

TEST REPORT

Product : Car Radio
Trade mark : ORTEK
Model/Type reference : TD-650
Serial Number : N/A
Report Number : EED32K00114301
FCC ID : 2AP4FTD-650
Date of Issue : Jun. 05, 2018
Test Standards : 47 CFR Part 15 Subpart C
Test result : PASS

Prepared for:

Shanghai Ortek Electronics Co.,LTD
Bridge 16 southern, Cao'an Road, jiading District,
Shanghai, China

Prepared by:

Centre Testing International Group Co., Ltd.
Hongwei Industrial Zone, Bao'an 70 District,
Shenzhen, Guangdong, China
TEL: +86-755-3368 3668
FAX: +86-755-3368 3385

Tested by:

Peter
Peter (Test Project)

Compiled by:

Tom - chen
Tom chen (Project Engineer)

Reviewed by:

Kevin Yang
Kevin yang (Reviewer)

Approved by:

Sheek Luo
Sheek Luo (Lab supervisor)

Date:

Jun. 05, 2018

Check No.:3319572323

2 Version

Version No.	Date	Description
00	Jun. 05, 2018	Original

3 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (c)	ANSI C63.10-2013	PASS
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	N/A
Conducted Peak Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(1)	ANSI C63.10-2013	PASS
20dB Occupied Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Carrier Frequencies Separation	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Hopping Channel Number	47 CFR Part 15 Subpart C Section 15.247 (b)	ANSI C63.10-2013	PASS
Dwell Time	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Pseudorandom Frequency Hopping Sequence	47 CFR Part 15 Subpart C Section 15.247(b)(4)&TCB Exclusion List (7 July 2002)	ANSI C63.10-2013	PASS
RF Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)	ANSI C63.10-2013	PASS
Radiated Spurious emissions	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS

Remark:

Test according to ANSI C63.4-2014 & ANSI C63.10-2013.

N/A: The device is only battery operated, the test related AC mains is not applicable.

The tested samples and the sample information are provided by the client.


4 Content

1 COVER PAGE	1
2 VERSION	2
3 TEST SUMMARY	3
4 CONTENT	4
5 TEST REQUIREMENT	5
5.1 TEST SETUP	5
5.1.1 For Conducted test setup	5
5.1.2 For Radiated Emissions test setup	5
5.1.3 For Conducted Emissions test setup	6
5.2 TEST ENVIRONMENT	6
5.3 TEST CONDITION	6
6 GENERAL INFORMATION	7
6.1 CLIENT INFORMATION	7
6.2 GENERAL DESCRIPTION OF EUT	7
6.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD	7
6.4 DESCRIPTION OF SUPPORT UNITS	8
6.5 TEST LOCATION	8
6.6 DEVIATION FROM STANDARDS	8
6.7 ABNORMALITIES FROM STANDARD CONDITIONS	8
6.8 OTHER INFORMATION REQUESTED BY THE CUSTOMER	8
6.9 MEASUREMENT UNCERTAINTY (95% CONFIDENCE LEVELS, K=2)	9
7 EQUIPMENT LIST	10
8 RADIO TECHNICAL REQUIREMENTS SPECIFICATION	12
Appendix A): 20dB Occupied Bandwidth	13
Appendix B): Carrier Frequency Separation	17
Appendix C): Dwell Time	21
Appendix D): Hopping Channel Number	25
Appendix E): Conducted Peak Output Power	27
Appendix F): Band-edge for RF Conducted Emissions	31
Appendix G): RF Conducted Spurious Emissions	36
Appendix H): Pseudorandom Frequency Hopping Sequence	43
Appendix I): Antenna Requirement	44
Appendix J): Restricted bands around fundamental frequency (Radiated)	45
Appendix K): Radiated Spurious Emissions	59
PHOTOGRAPHS OF TEST SETUP	67
PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS	69

5 Test Requirement

5.1 Test setup

5.1.1 For Conducted test setup

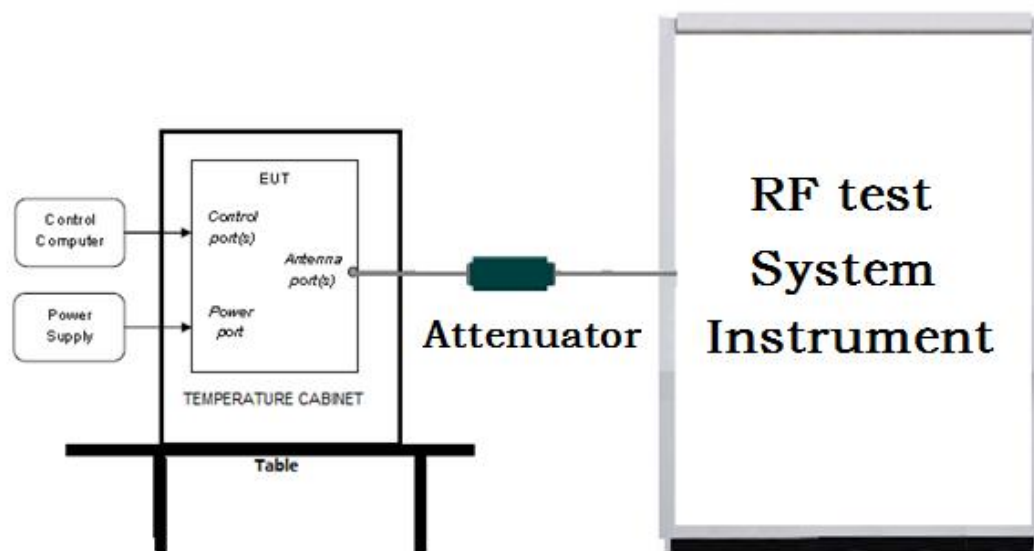

5.1.2 For Radiated Emissions test setup

Radiated Emissions setup:

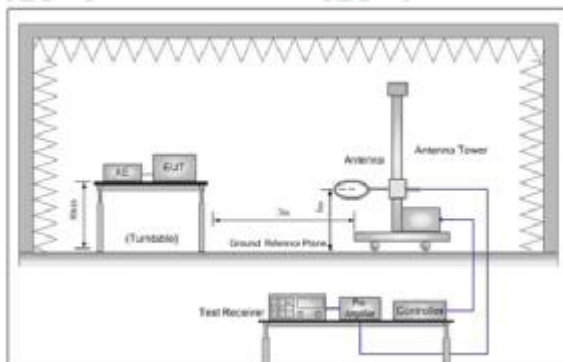


Figure 1. Below 30MHz

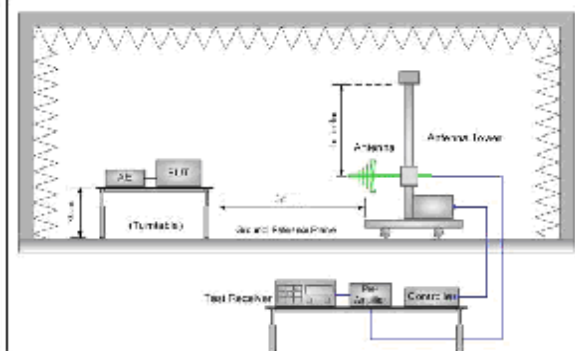


Figure 2. 30MHz to 1GHz


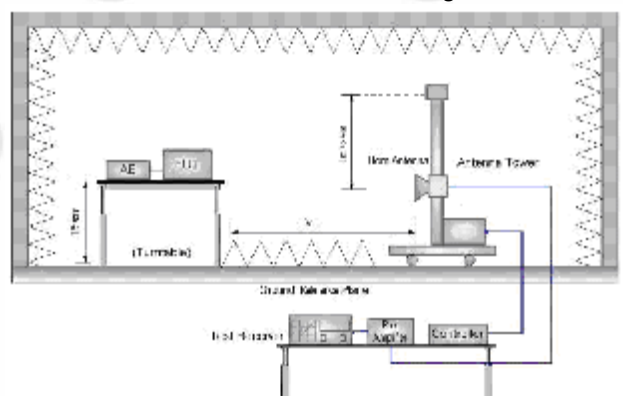


Figure 3. Above 1GHz

5.1.3 For Conducted Emissions test setup

Conducted Emissions setup

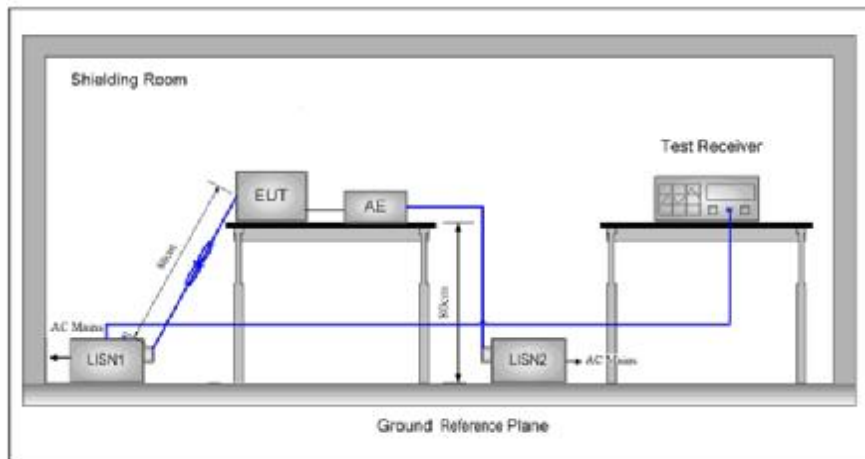

5.2 Test Environment

Operating Environment:	
Temperature:	23.1°C
Humidity:	52 % RH
Atmospheric Pressure:	1010mbar

5.3 Test Condition

Test Mode	Tx	RF Channel		
		Low(L)	Middle(M)	High(H)
GFSK/ π /4DQPSK/ 8DPSK(DH1,DH3, DH5)	2402MHz ~2480 MHz	Channel 1	Channel 40	Channel79
		2402MHz	2441MHz	2480MHz

TX mode:The EUT transmitted the continuous signal at the specific channel(s).

Test mode:

Pre-scan under all rate at Lowest channel 1

Mode	GFSK		
packets	1-DH1	1-DH3	1-DH5
Power(dBm)	3.520	3.685	3.845

Mode	π /4DQPSK		
packets	2-DH1	2-DH3	2-DH5
Power(dBm)	3.182	3.412	3.516
Mode	8DPSK		
packets	3-DH1	3-DH3	3-DH5
Power(dBm)	3.285	3.447	3.826

Through Pre-scan, 1-DH5 packet the power is the worst case of GFSK, 2-DH5 packet the power is the worst case of π /4DQPSK, 3-DH5 packet the power is the worst case of 8DPSK.

6 General Information

6.1 Client Information

Applicant:	Shanghai Ortekk Electronics Co.,LTD
Address of Applicant:	Bridge 16 southern,Cao'an Road,jiading District, Shanghai, China
Manufacturer:	Shanghai Ortekk Electronics Co.,LTD
Address of Manufacturer:	Bridge 16 southern,Cao'an Road,jiading District, Shanghai, China
Factory:	Shanghai Ortekk Electronics Co.,LTD
Address of Factory:	Bridge 16 southern,Cao'an Road,jiading District, Shanghai, China

6.2 General Description of EUT

Product Name:	Car Radio
Model No.(EUT):	TD-650
Trade mark:	ORTEK
EUT Supports Radios application:	2.1+EDR, 2402MHz to 2480MHz
Power Supply:	DC 12V
Sample Received Date:	May 11, 2018
Sample tested Date:	May 11, 2018 to Jun. 05, 2018

6.3 Product Specification subjective to this standard

Operation Frequency:	2402MHz~2480MHz						
Bluetooth Version:	2.1+EDR						
Modulation Technique:	Frequency Hopping Spread Spectrum(FHSS)						
Modulation Type:	GFSK, $\pi/4$ DQPSK, 8DPSK						
Number of Channel:	79						
Hopping Channel Type:	Adaptive Frequency Hopping systems						
Hardware Version:	V3.0(manufacturer declare)						
Firmware Version:	2.1(manufacturer declare)						
Test Power Grade:	N/A(manufacturer declare)						
Test Software of EUT:	MTK662X..exe(manufacturer declare)						
Sample Type:	Fixed production						
Antenna Type:	PCB antenna						
Antenna Gain:	5dBi						
Test Voltage:	AC 120V,60Hz						
Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	21	2422MHz	41	2442MHz	61	2462MHz
2	2403MHz	22	2423MHz	42	2443MHz	62	2463MHz
3	2404MHz	23	2424MHz	43	2444MHz	63	2464MHz
4	2405MHz	24	2425MHz	44	2445MHz	64	2465MHz
5	2406MHz	25	2426MHz	45	2446MHz	65	2466MHz
6	2407MHz	26	2427MHz	46	2447MHz	66	2467MHz
7	2408MHz	27	2428MHz	47	2448MHz	67	2468MHz

8	2409MHz	28	2429MHz	48	2449MHz	68	2469MHz
9	2410MHz	29	2430MHz	49	2450MHz	69	2470MHz
10	2411MHz	30	2431MHz	50	2451MHz	70	2471MHz
11	2412MHz	31	2432MHz	51	2452MHz	71	2472MHz
12	2413MHz	32	2433MHz	52	2453MHz	72	2473MHz
13	2414MHz	33	2434MHz	53	2454MHz	73	2474MHz
14	2415MHz	34	2435MHz	54	2455MHz	74	2475MHz
15	2416MHz	35	2436MHz	55	2456MHz	75	2476MHz
16	2417MHz	36	2437MHz	56	2457MHz	76	2477MHz
17	2418MHz	37	2438MHz	57	2458MHz	77	2478MHz
18	2419MHz	38	2439MHz	58	2459MHz	78	2479MHz
19	2420MHz	39	2440MHz	59	2460MHz	79	2480MHz
20	2421MHz	40	2441MHz	60	2461MHz		

6.4 Description of Support Units

The EUT has been tested independently.

6.5 Test Location

All tests were performed at:

Centre Testing International Group Co., Ltd.

Hongwei Industrial Zone, Bao'an 70 District, Shenzhen, Guangdong, China 518101

Telephone: +86 (0) 755 33683668 Fax: +86 (0) 755 33683385

No tests were sub-contracted.

FCC Designation No.: CN1164

6.6 Deviation from Standards

None.

6.7 Abnormalities from Standard Conditions

None.

6.8 Other Information Requested by the Customer

None.

6.9 Measurement Uncertainty (95% confidence levels, k=2)

No.	Item	Measurement Uncertainty
1	Radio Frequency	7.9×10^{-8}
2	RF power, conducted	0.31dB (30MHz-1GHz)
		0.57dB (1GHz-18GHz)
3	Radiated Spurious emission test	4.5dB (30MHz-1GHz)
		4.8dB (1GHz-12.75GHz)
4	Conduction emission	3.6dB (9kHz to 150kHz)
		3.2dB (150kHz to 30MHz)
5	Temperature test	0.64°C
6	Humidity test	2.8%
7	DC power voltages	0.025%

7 Equipment List

RF test system					
Equipment	Manufacturer	Model No.	Serial Number	Cal. Date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Signal Generator	Keysight	E8257D	MY53401106	03-13-2018	03-12-2019
Spectrum Analyzer	Keysight	N9010A	MY54510339	03-13-2018	03-12-2019
Signal Generator	Keysight	N5182B	MY53051549	03-13-2018	03-12-2019
High-pass filter	Sinoscite	FL3CX03WG 18NM12- 0398-002	---	01-10-2018	01-09-2019
High-pass filter	Sinoscite	FL3CX03WG 18NM12- 0398-002	---	01-10-2018	01-09-2019
DC Power	Keysight	E3642A	MY54426035	03-13-2018	03-12-2019
power meter & power sensor	R&S	OSP120	101374	03-13-2018	03-12-2019
RF control unit	JS Tonscend	JS0806-2	158060006	03-13-2018	03-12-2019
RF control unit	JS Tonscend	JS0806-2	158060006	03-13-2018	03-12-2019

3M Semi/full-anechoic Chamber					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
3M Chamber & Accessory Equipment	TDK	SAC-3	---	06-04-2016	06-03-2019
TRILOG Broadband Antenna	SCHWARZBECK	VULB9163	9163-484	06-09-2017	06-08-2018
Preamplifier	JS Tonscend	EMC051845 SE	980380	01-19-2018	01-18-2019
Horn Antenna	ETS-LINDGREN	3117	00057407	07-20-2015	07-18-2018
Loop Antenna	ETS	6502	00071730	06-22-2017	06-21-2019
Spectrum Analyzer	R&S	FSP40	100416	06-13-2017	06-12-2018
Receiver	R&S	ESCI	100435	06-14-2017	06-13-2018
Signal Generator	Keysight	E8257D	MY53401106	03-13-2018	03-12-2019
Temperature/ Humidity Indicator	TAYLOR	1451	1905	05-02-2018	05-01-2019
Communication test set	Agilent	E5515C	GB47050534	03-16-2018	03-15-2019
Cable line	Fulai(7M)	SF106	5219/6A	01-10-2018	01-09-2019
Cable line	Fulai(6M)	SF106	5220/6A	01-10-2018	01-09-2019
Cable line	Fulai(3M)	SF106	5216/6A	01-10-2018	01-09-2019
Cable line	Fulai(3M)	SF106	5217/6A	01-10-2018	01-09-2019
Communication test set	R&S	CMW500	152394	03-16-2018	03-15-2019
High-pass filter	Sinoscite	FL3CX03WG 18NM12-0398-002	---	01-10-2018	01-09-2019
band rejection filter	Sinoscite	FL5CX01CA 09CL12-0395-001	---	01-10-2018	01-09-2019
band rejection filter	Sinoscite	FL5CX01CA 08CL12-0393-001	---	01-10-2018	01-09-2019
band rejection filter	Sinoscite	FL5CX02CA 04CL12-0396-002	---	01-10-2018	01-09-2019
band rejection filter	Sinoscite	FL5CX02CA 03CL12-0394-001	---	01-10-2018	01-09-2019

8 Radio Technical Requirements Specification

Reference documents for testing:

No.	Identity	Document Title
1	FCC Part15C	Subpart C-Intentional Radiators
2	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices

Test Results List:

Test requirement	Test method	Test item	Verdict	Note
Part15C Section 15.247 (a)(1)	ANSI 63.10	20dB Occupied Bandwidth	PASS	Appendix A)
Part15C Section 15.247 (a)(1)	ANSI 63.10	Carrier Frequencies Separation	PASS	Appendix B)
Part15C Section 15.247 (a)(1)	ANSI 63.10	Dwell Time	PASS	Appendix C)
Part15C Section 15.247 (b)	ANSI 63.10	Hopping Channel Number	PASS	Appendix D)
Part15C Section 15.247 (b)(1)	ANSI 63.10	Conducted Peak Output Power	PASS	Appendix E)
Part15C Section 15.247(d)	ANSI 63.10	Band-edge for RF Conducted Emissions	PASS	Appendix F)
Part15C Section 15.247(d)	ANSI 63.10	RF Conducted Spurious Emissions	PASS	Appendix G)
Part15C Section 15.247 (a)(1)	ANSI 63.10	Pseudorandom Frequency Hopping Sequence	PASS	Appendix H)
Part15C Section 15.203/15.247 (c)	ANSI 63.10	Antenna Requirement	PASS	Appendix I)
Part15C Section 15.207	ANSI 63.10	AC Power Line Conducted Emission	N/A	N/A
Part15C Section 15.205/15.209	ANSI 63.10	Restricted bands around fundamental frequency (Radiated) Emission)	PASS	Appendix J)
Part15C Section 15.205/15.209	ANSI 63.10	Radiated Spurious Emissions	PASS	Appendix K)


Appendix A): 20dB Occupied Bandwidth

Test Result

Mode	Channel.	20dB Bandwidth [MHz]	99% OBW [MHz]	Verdict	Remark
GFSK	LCH	0.9652	0.88948	PASS	Peak detector
GFSK	MCH	1.029	0.89266	PASS	
GFSK	HCH	0.9663	0.89223	PASS	
$\pi/4$ DQPSK	LCH	1.281	1.1620	PASS	
$\pi/4$ DQPSK	MCH	1.283	1.1666	PASS	
$\pi/4$ DQPSK	HCH	1.281	1.1709	PASS	
8DPSK	LCH	1.299	1.1706	PASS	
8DPSK	MCH	1.289	1.1699	PASS	
8DPSK	HCH	1.287	1.1727	PASS	

Test Graph

Graphs	
GFSK/LCH	Center Freq: 2.402000000 GHz Occupied Bandwidth: 889.48 kHz Total Power: 11.2 dBm Transmit Freq Error: -20.437 kHz x dB Bandwidth: 965.2 kHz OBW Power: 99.90 % x dB: -20.00 dB
GFSK/MCH	Center Freq: 2.441000000 GHz Occupied Bandwidth: 892.66 kHz Total Power: 11.4 dBm Transmit Freq Error: -22.314 kHz x dB Bandwidth: 1.029 MHz OBW Power: 99.90 % x dB: -20.00 dB
GFSK/HCH	Center Freq: 2.480000000 GHz Occupied Bandwidth: 892.23 kHz Total Power: 12.2 dBm Transmit Freq Error: -24.688 kHz x dB Bandwidth: 966.3 kHz OBW Power: 99.90 % x dB: -20.00 dB

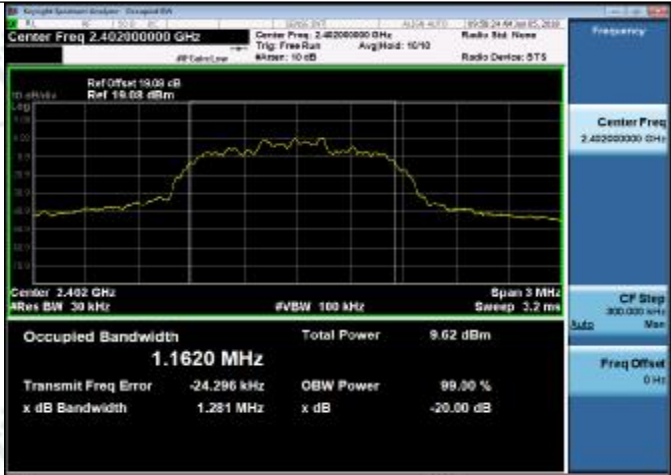$\pi/4$DQPSK/LCH	
$\pi/4$DQPSK/MCH	
$\pi/4$DQPSK/HCH	

8DPSK/LCH	 Center Freq 2.40200000 GHz Ref Offset 19.02 dB Ref 19.03 dBm Center 2.402 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 2.2 ms Occupied Bandwidth 1.1706 MHz Total Power 9.27 dBm Transmit Freq Error -17.757 kHz OBW Power 99.90 % x dB Bandwidth 1.299 MHz x dB -20.00 dB
8DPSK/MCH	 Center Freq 2.44100000 GHz Ref Offset 19.02 dB Ref 19.02 dBm Center 2.441 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 2.2 ms Occupied Bandwidth 1.1699 MHz Total Power 9.69 dBm Transmit Freq Error -16.142 kHz OBW Power 99.90 % x dB Bandwidth 1.289 MHz x dB -20.00 dB
8DPSK/HCH	 Center Freq 2.48000000 GHz Ref Offset 19.05 dB Ref 19.05 dBm Center 2.48 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 2.2 ms Occupied Bandwidth 1.1727 MHz Total Power 10.4 dBm Transmit Freq Error -15.975 kHz OBW Power 99.90 % x dB Bandwidth 1.287 MHz x dB -20.00 dB

Appendix B): Carrier Frequency Separation Result Table

Mode	Channel.	Carrier Frequency Separation [MHz]	Verdict
GFSK	LCH	0.998	PASS
GFSK	MCH	1.028	PASS
GFSK	HCH	1.040	PASS
$\pi/4$ DQPSK	LCH	0.966	PASS
$\pi/4$ DQPSK	MCH	1.016	PASS
$\pi/4$ DQPSK	HCH	0.932	PASS
8DPSK	LCH	1.038	PASS
8DPSK	MCH	1.110	PASS
8DPSK	HCH	0.976	PASS

Graphs



$\pi/4$DQPSK/LCH		
$\pi/4$DQPSK/MCH		
$\pi/4$DQPSK/HCH		

8DPSK/LCH	
8DPSK/MCH	
8DPSK/HCH	


Appendix C): Dwell Time Result Table

Mode	Packet	Channel	Burst Width [ms/hop/ch]	Total Hops[hop*ch]	Dwell Time[s]	Duty Cycle [%]	Verdict
GFSK	DH1	LCH	0.399	320	0.128	0.32	PASS
GFSK	DH1	MCH	0.399003	320	0.128	0.32	PASS
GFSK	DH1	HCH	0.399003	320	0.128	0.32	PASS
GFSK	DH3	LCH	1.649197	160	0.264	0.66	PASS
GFSK	DH3	MCH	1.6492	160	0.264	0.66	PASS
GFSK	DH3	HCH	1.64794	160	0.264	0.66	PASS
GFSK	DH5	LCH	2.8796	106.7	0.307	0.77	PASS
GFSK	DH5	MCH	2.8796	106.7	0.307	0.77	PASS
GFSK	DH5	HCH	2.8796	106.7	0.307	0.77	PASS


Test Graph

Graphs


GFSK_DH1/LCH

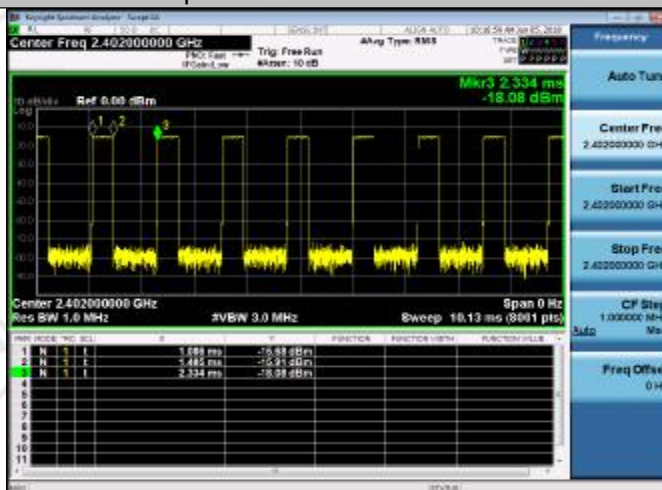



GFSK_DH1/MCH

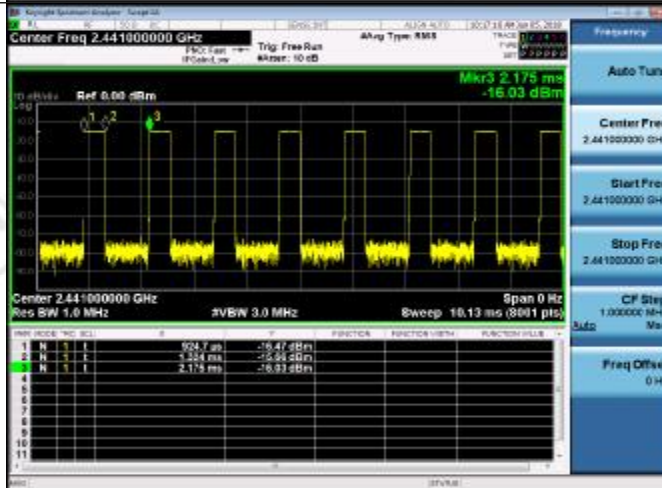

GFSK_DH1/HCH

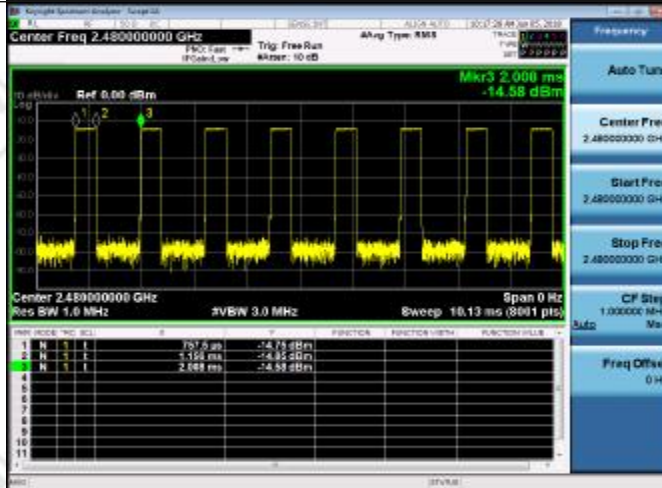

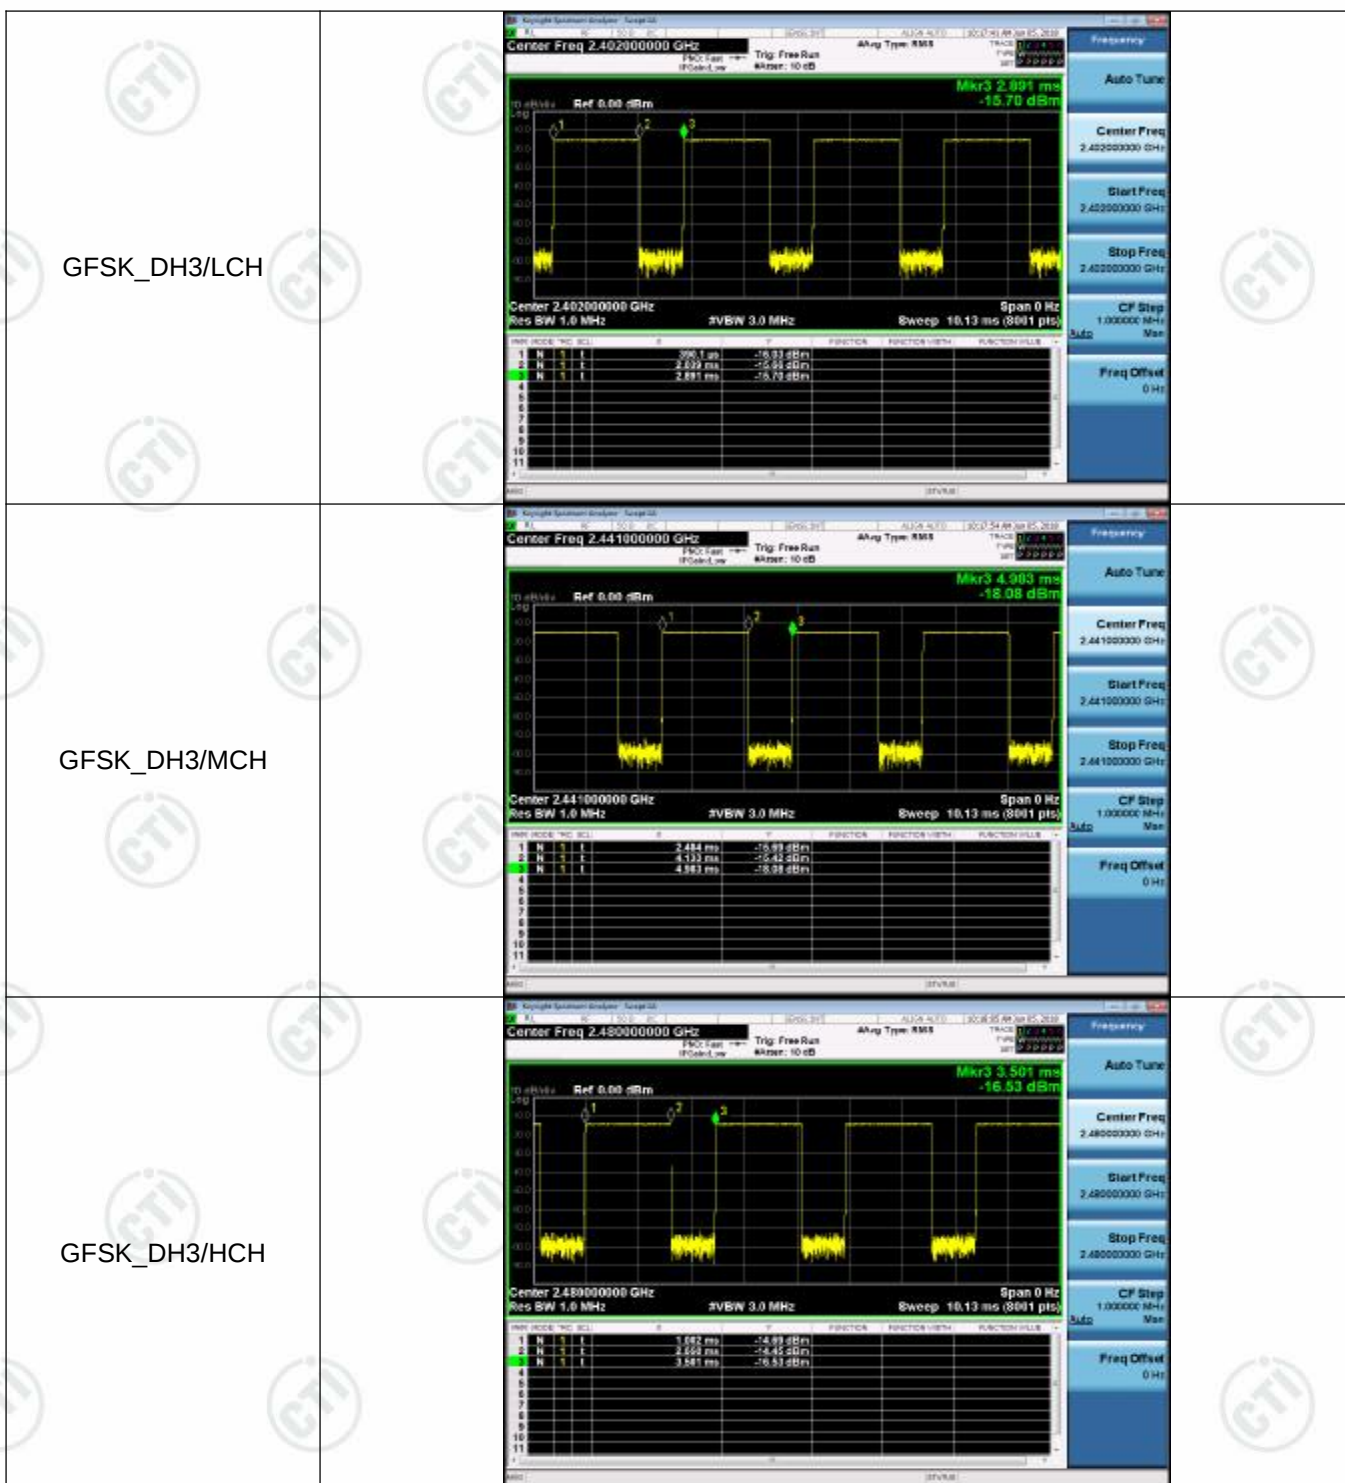

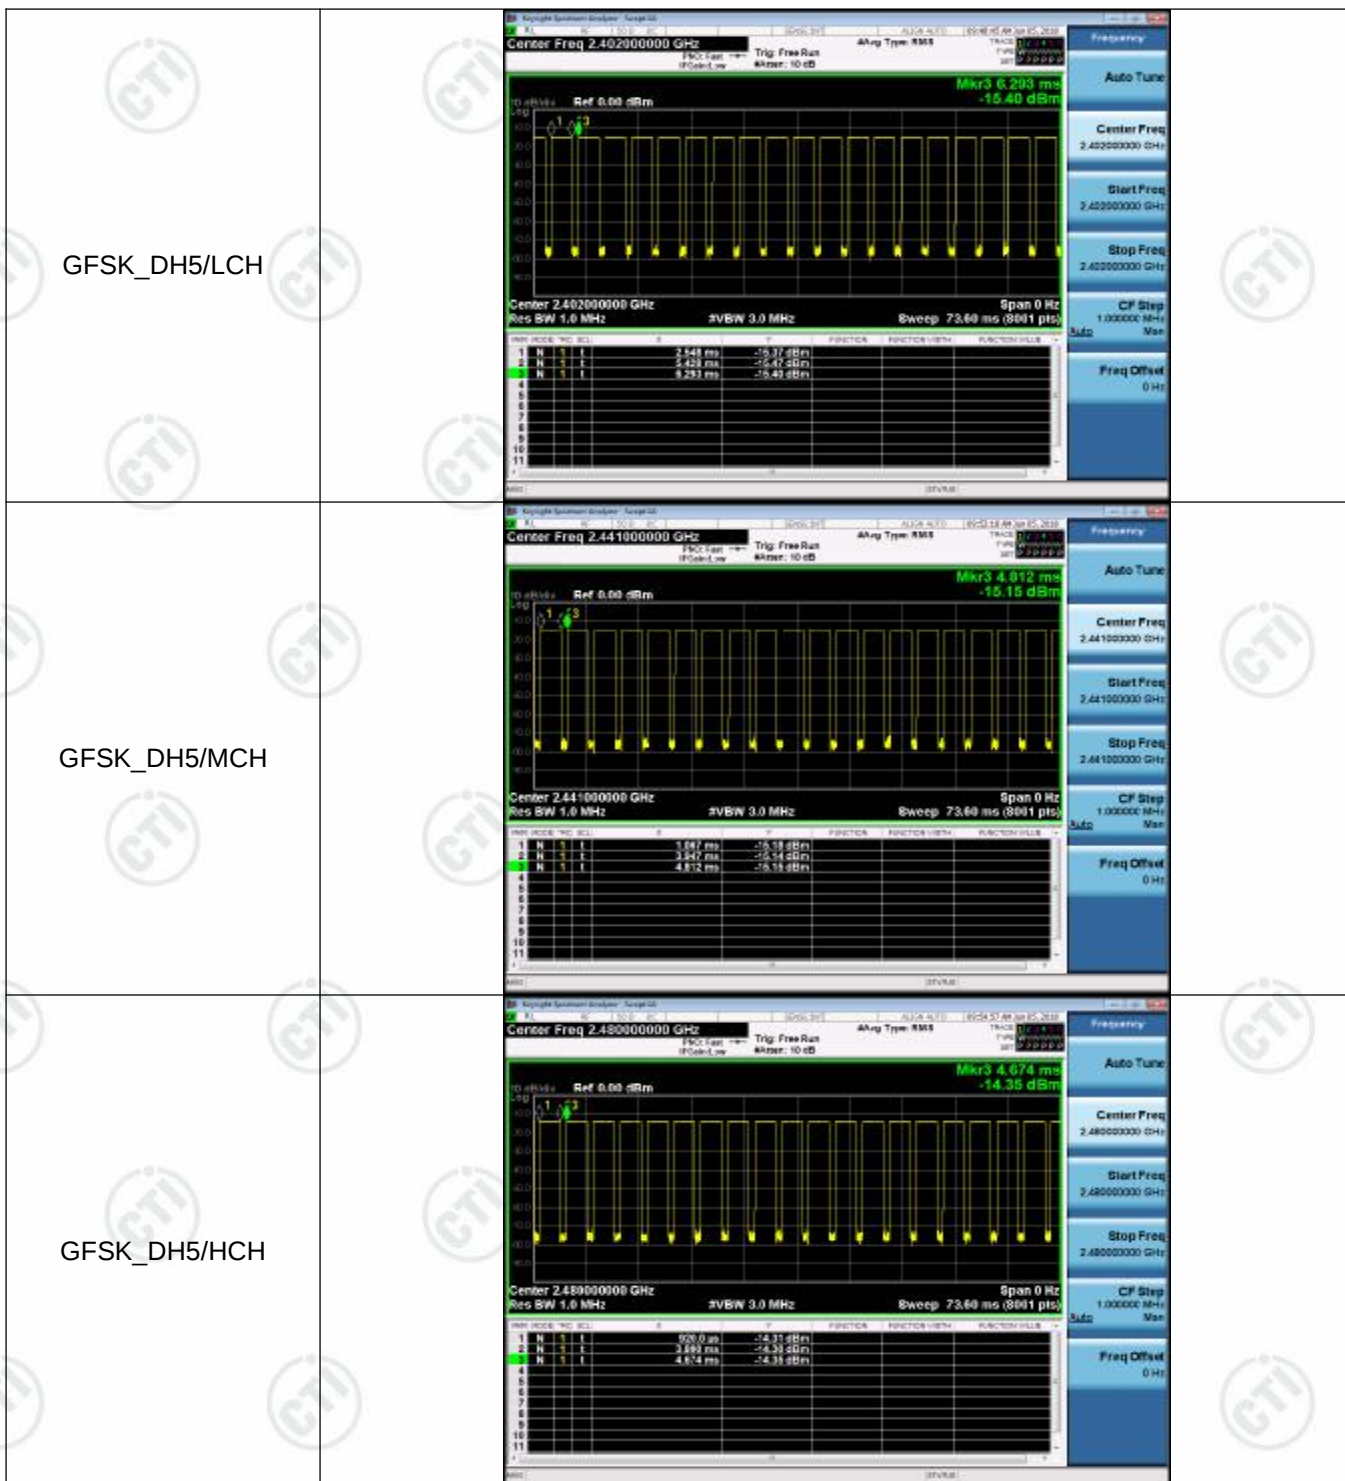

Appendix D): Hopping Channel Number Result Table

Mode	Channel.	Number of Hopping Channel	Verdict
GFSK	Hop	79	PASS
$\pi/4$ DQPSK	Hop	79	PASS
8DPSK	Hop	79	PASS

Test Graph

Graphs		
GFSK/Hop		Center Freq 2.441750000 GHz Start 2.40000 GHz Stop 2.48350 GHz ΔMkr1 77.905 5 MHz 0.809 dB
$\pi/4$ DQPSK/Hop		Center Freq 2.441750000 GHz Start 2.40000 GHz Stop 2.48350 GHz ΔMkr1 78.672 5 MHz 0.599 dB
8DPSK/Hop		Center Freq 2.441750000 GHz Start 2.40000 GHz Stop 2.48350 GHz ΔMkr1 78.156 5 MHz 1.581 dB




Appendix E): Conducted Peak Output Power Result Table

Mode	Channel.	Maximum Peak Output Power [dBm]	Verdict
GFSK	LCH	3.845	PASS
GFSK	MCH	4.008	PASS
GFSK	HCH	4.879	PASS
$\pi/4$ DQPSK	LCH	3.516	PASS
$\pi/4$ DQPSK	MCH	3.708	PASS
$\pi/4$ DQPSK	HCH	4.539	PASS
8DPSK	LCH	3.826	PASS
8DPSK	MCH	4.032	PASS
8DPSK	HCH	4.893	PASS

Test Graph

Graphs		
GFSK/LCH		
GFSK/MCH		
GFSK/HCH		

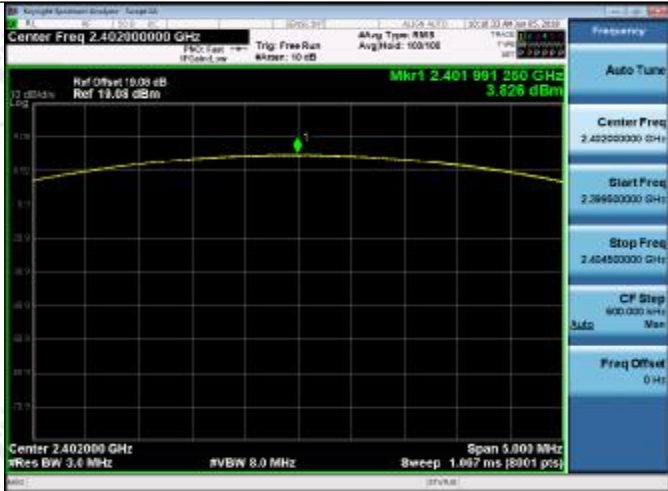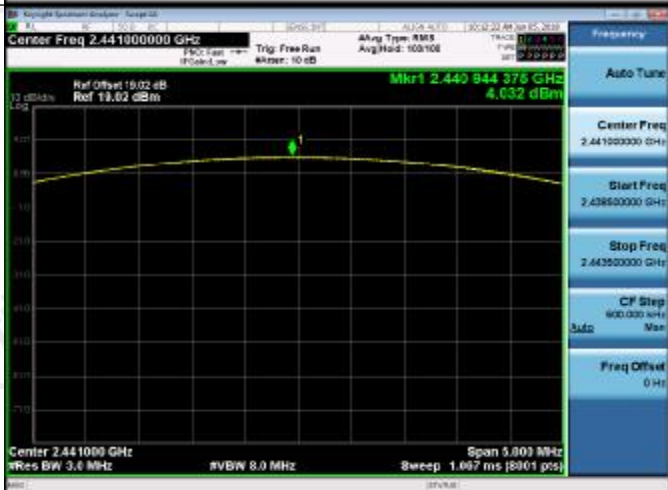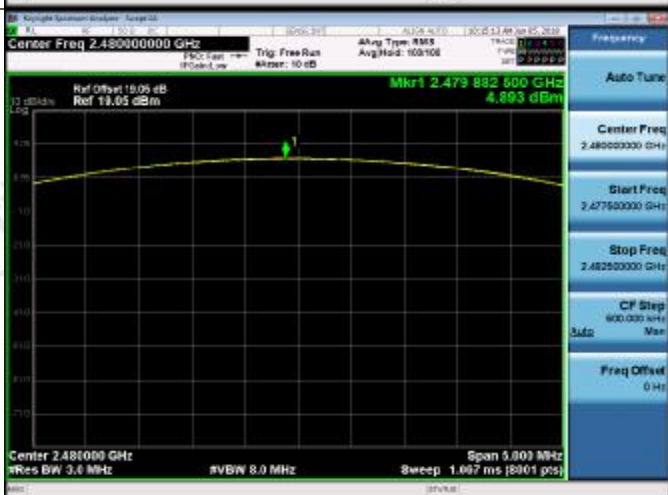


8DPSK/LCH	
8DPSK/MCH	
8DPSK/HCH	

Appendix F): Band-edge for RF Conducted Emissions

Result Table


Mode	Channel	Carrier Frequency [MHz]	Carrier Power [dBm]	Frequency Hopping	Max Spurious Level [dBm]	Limit [dBm]	Verdict
GFSK	LCH	2402	3.652	Off	-49.293	-16.35	PASS
			3.551	On	-50.346	-16.45	PASS
GFSK	HCH	2480	4.694	Off	-38.744	-15.31	PASS
			4.657	On	-39.079	-15.34	PASS
$\pi/4$ DQPSK	LCH	2402	2.479	Off	-50.655	-17.52	PASS
			2.249	On	-52.213	-17.75	PASS
$\pi/4$ DQPSK	HCH	2480	3.488	Off	-41.083	-16.51	PASS
			3.316	On	-41.427	-16.68	PASS
8DPSK	LCH	2402	2.330	Off	-60.818	-17.67	PASS
			-0.426	On	-61.105	-20.43	PASS
8DPSK	HCH	2480	2.990	Off	-56.413	-17.01	PASS
			3.185	On	-59.919	-16.82	PASS

Test Graph

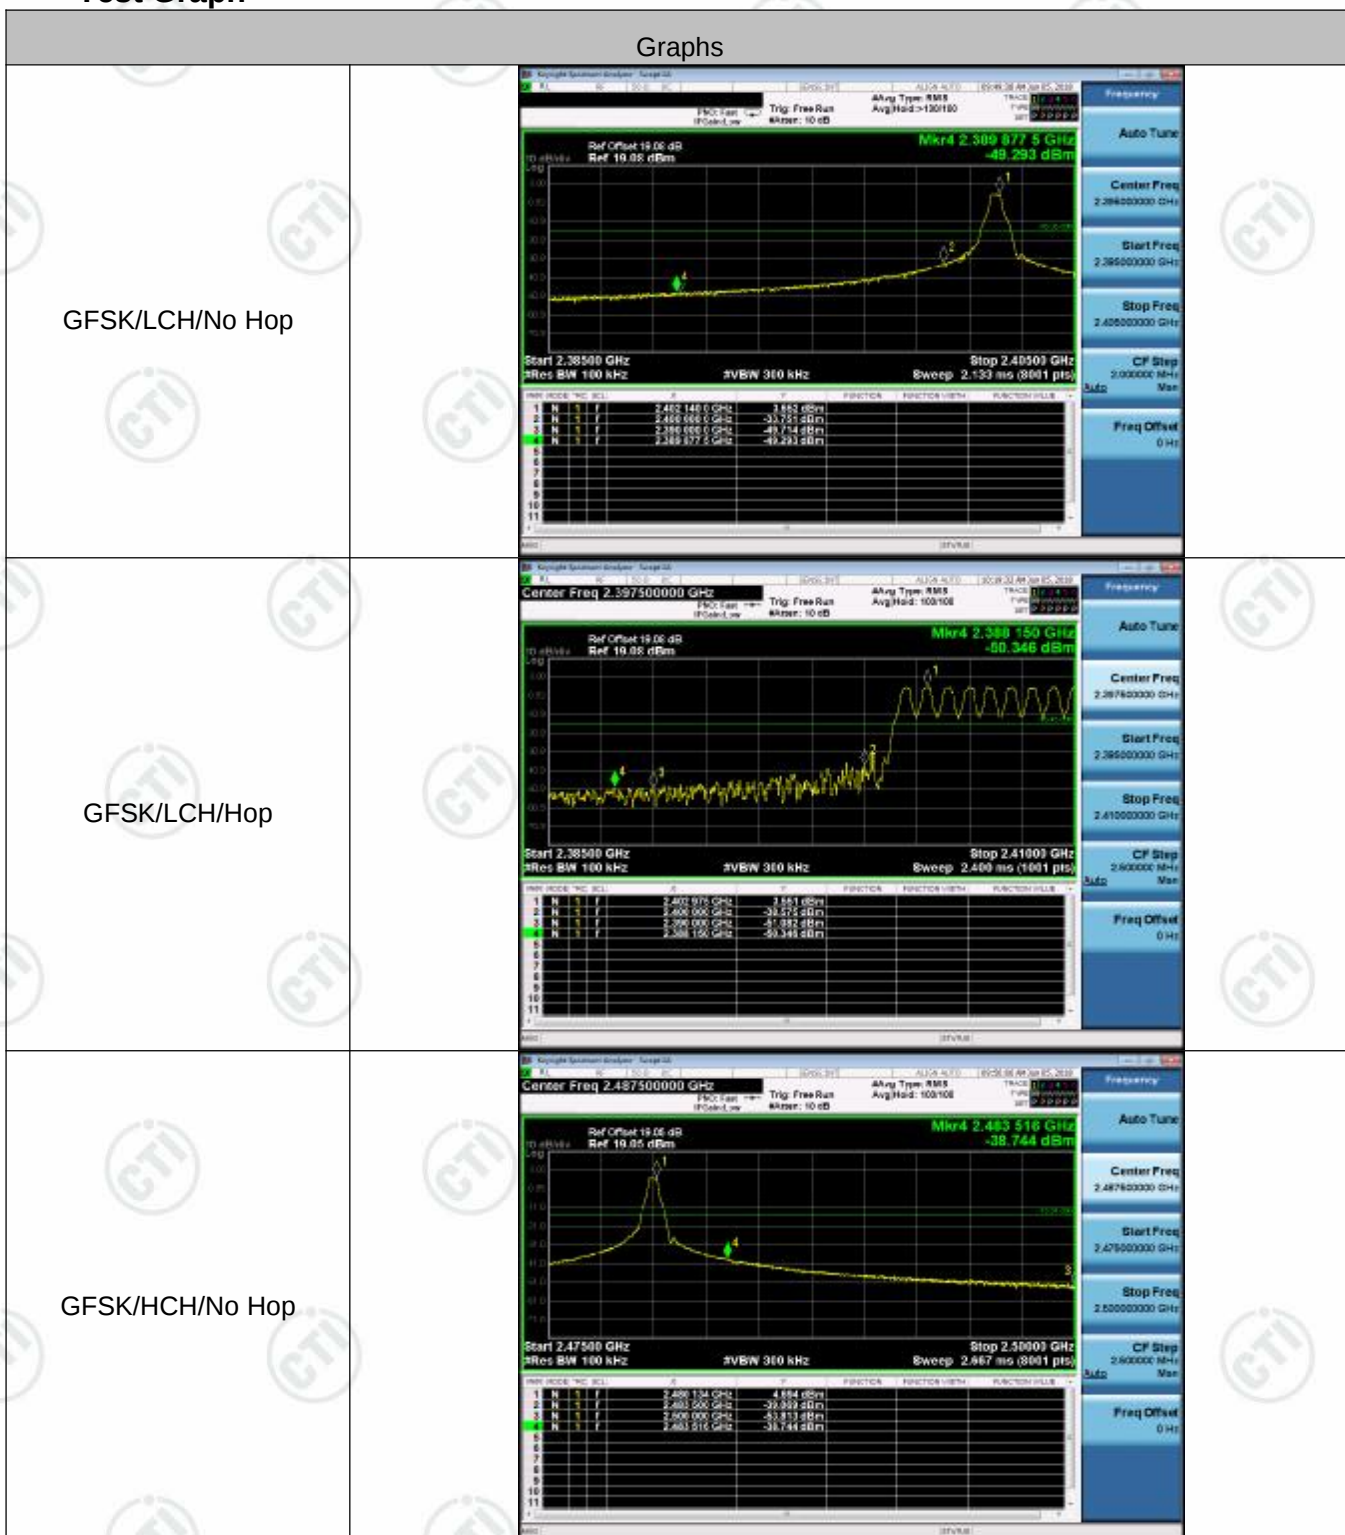






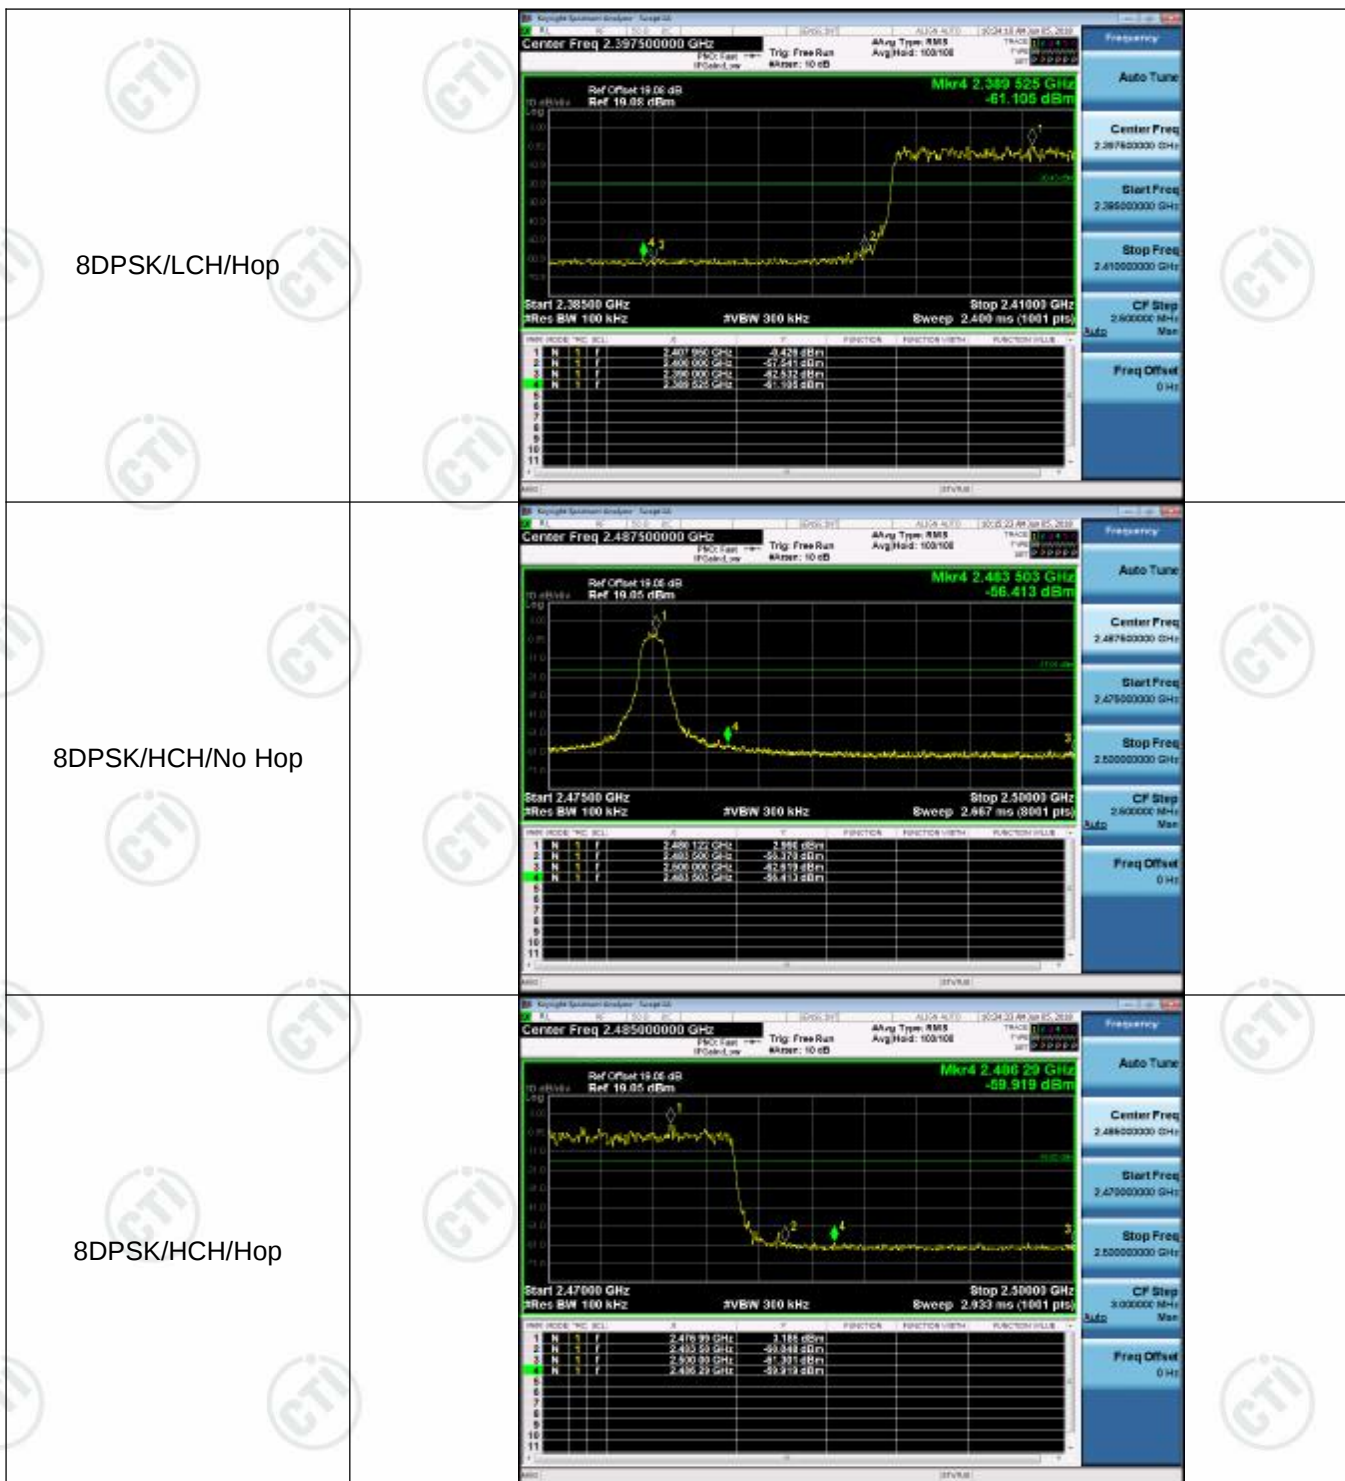




Appendix G): RF Conducted Spurious Emissions Result Table


Mode	Channel	Pref [dBm]	Puw[dBm]	Verdict
GFSK	LCH	3.618	<Limit	PASS
GFSK	MCH	3.794	<Limit	PASS
GFSK	HCH	4.648	<Limit	PASS
$\pi/4$ DQPSK	LCH	2.414	<Limit	PASS
$\pi/4$ DQPSK	MCH	2.633	<Limit	PASS
$\pi/4$ DQPSK	HCH	3.444	<Limit	PASS
8DPSK	LCH	1.755	<Limit	PASS
8DPSK	MCH	2.562	<Limit	PASS
8DPSK	HCH	3.244	<Limit	PASS

Test Graph

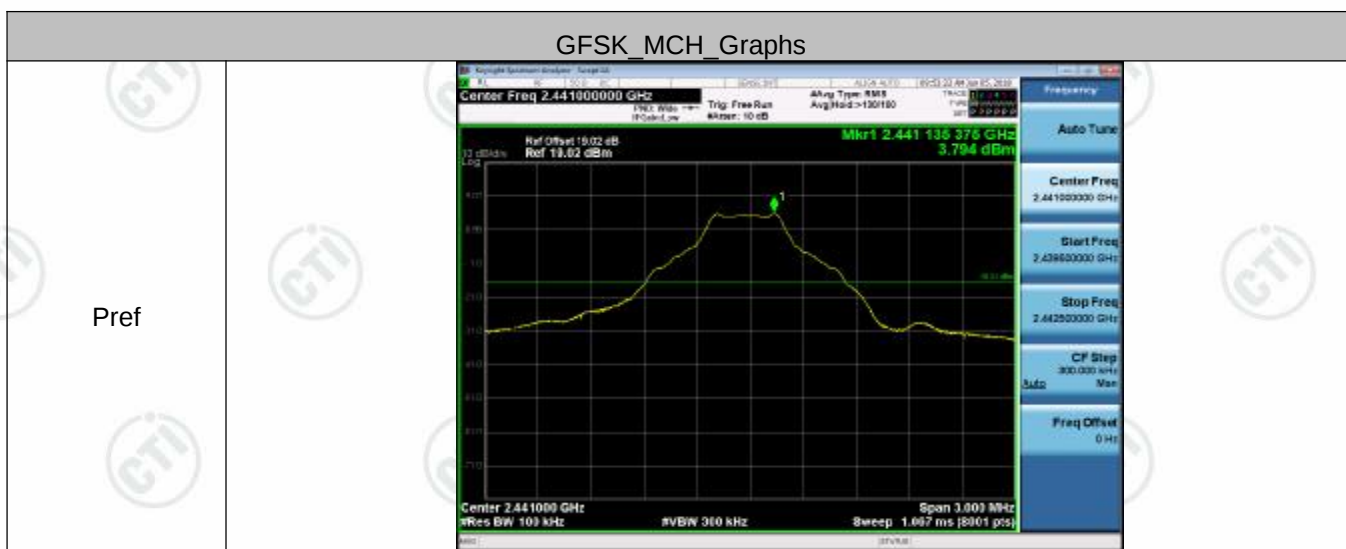


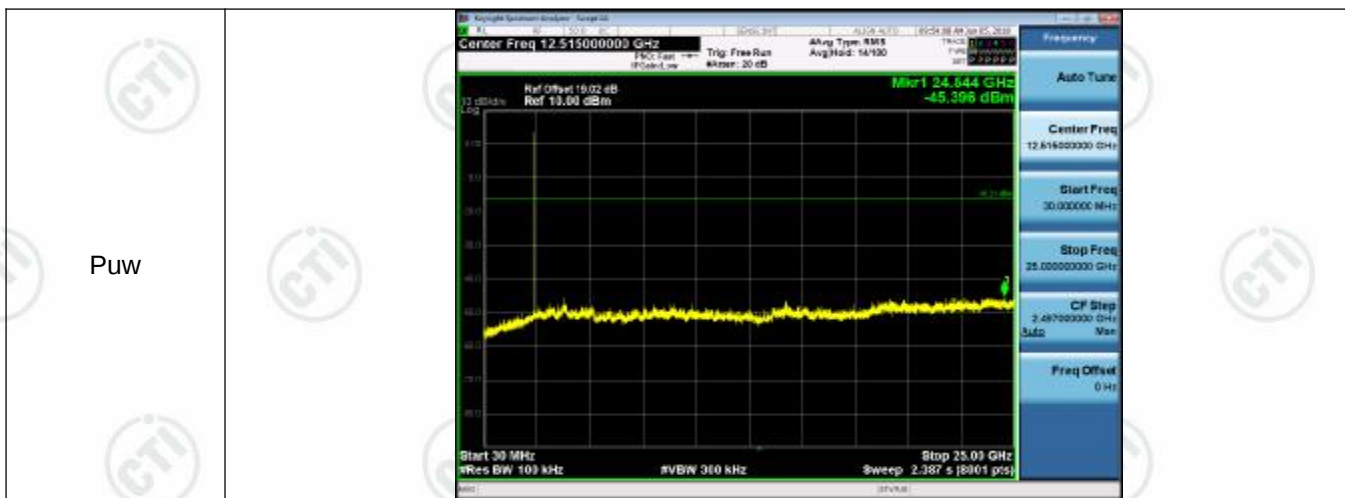

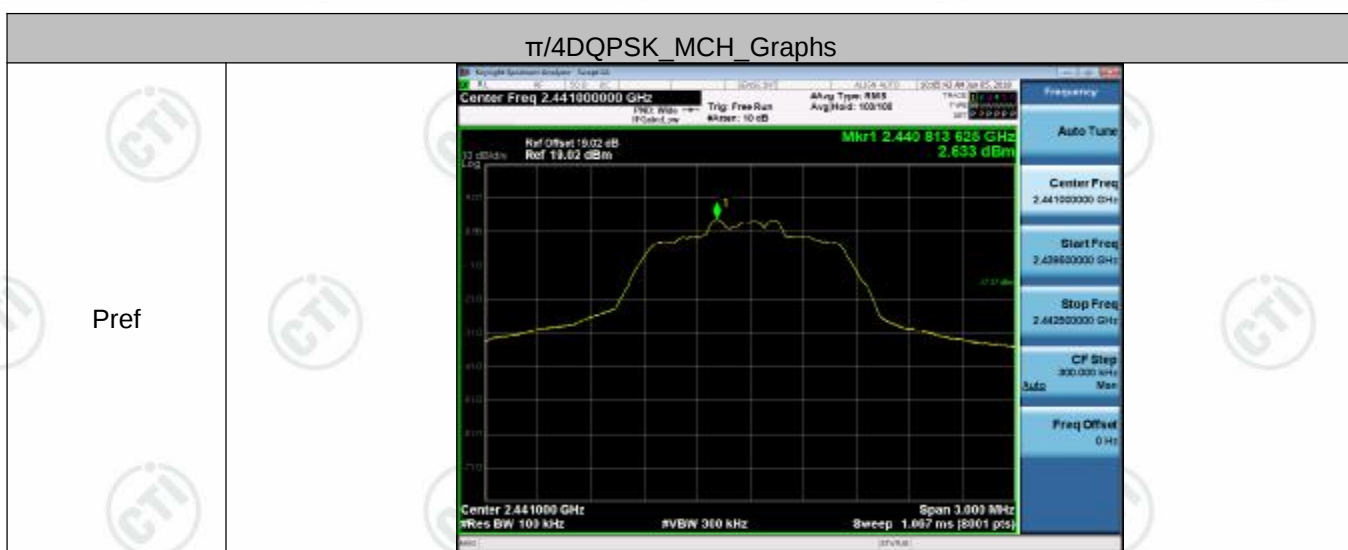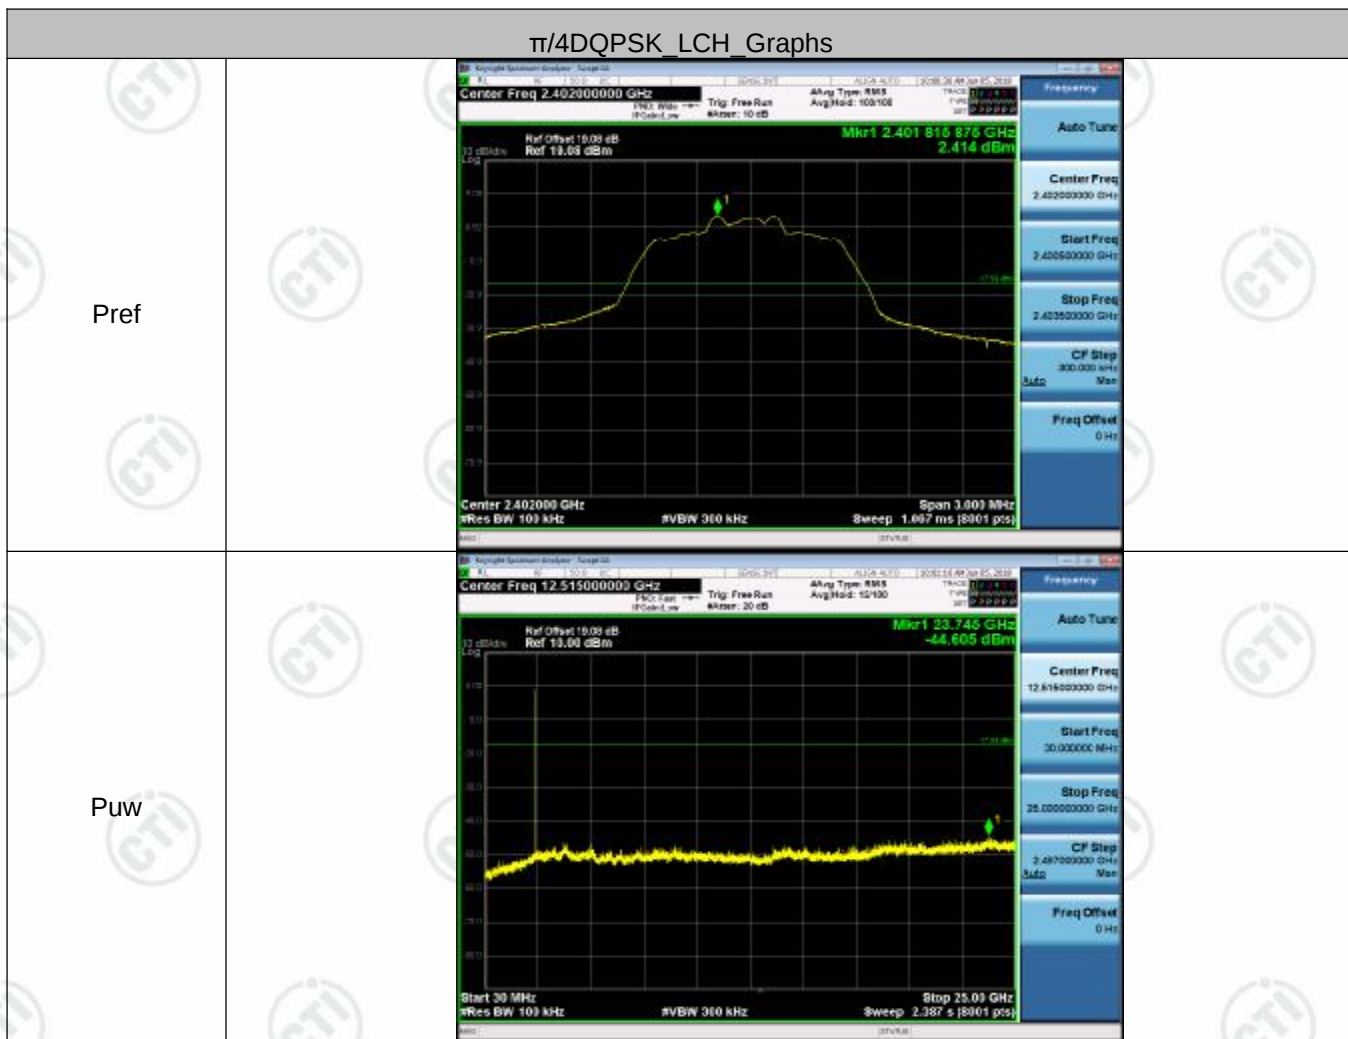


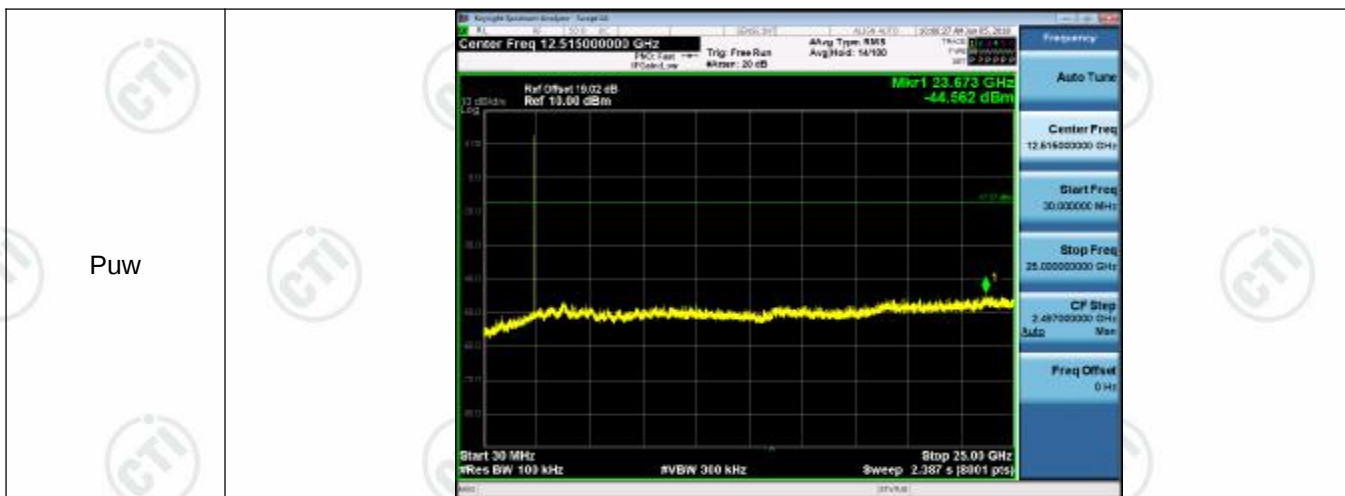


8DPSK_LCH_Graphs

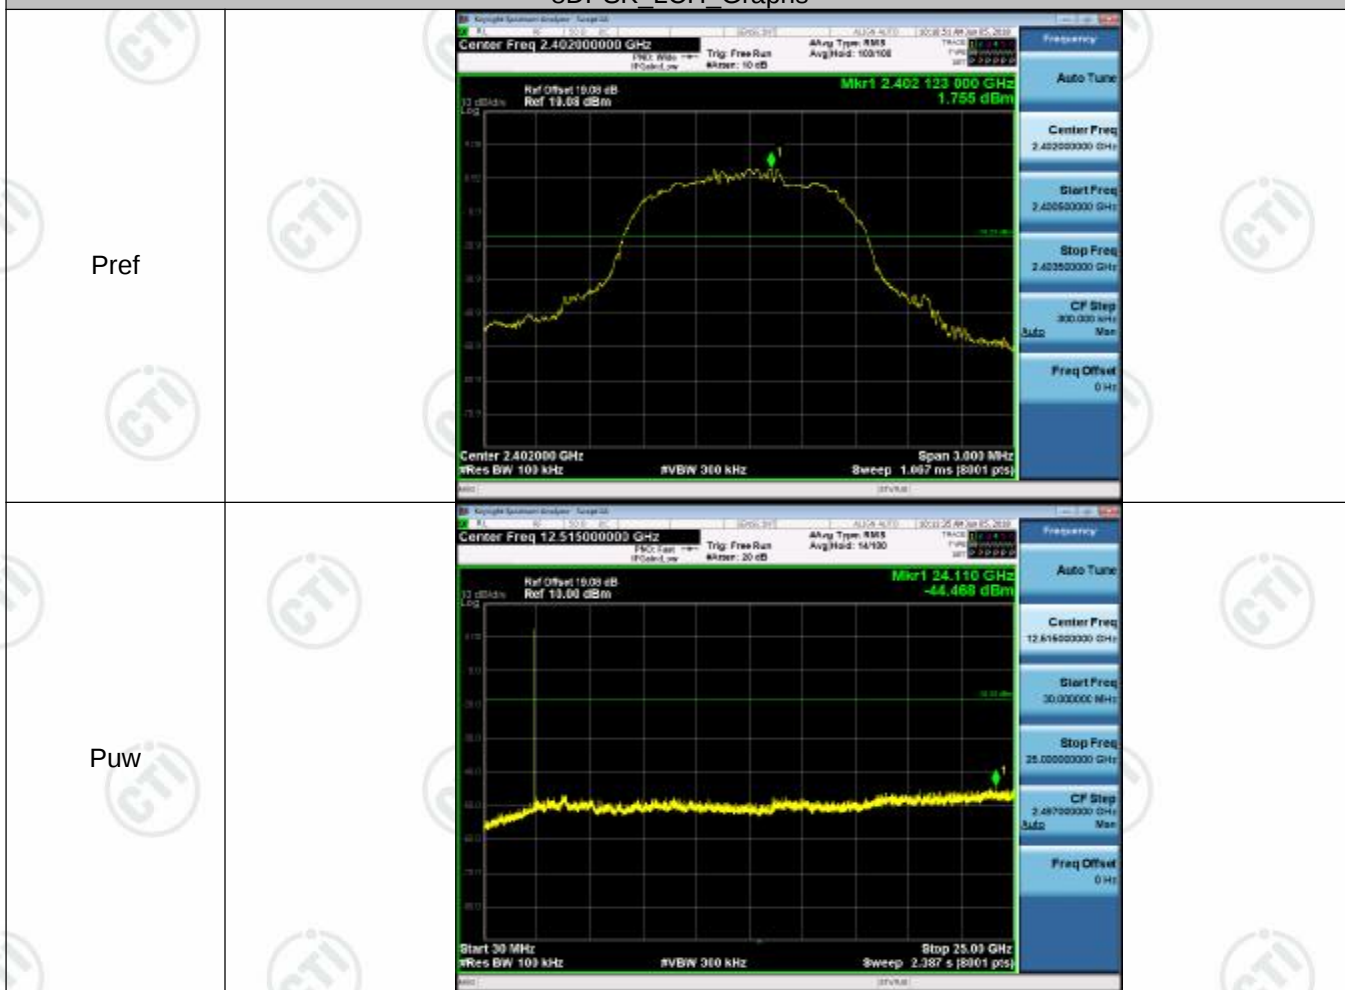

8DPSK_MCH_Graphs

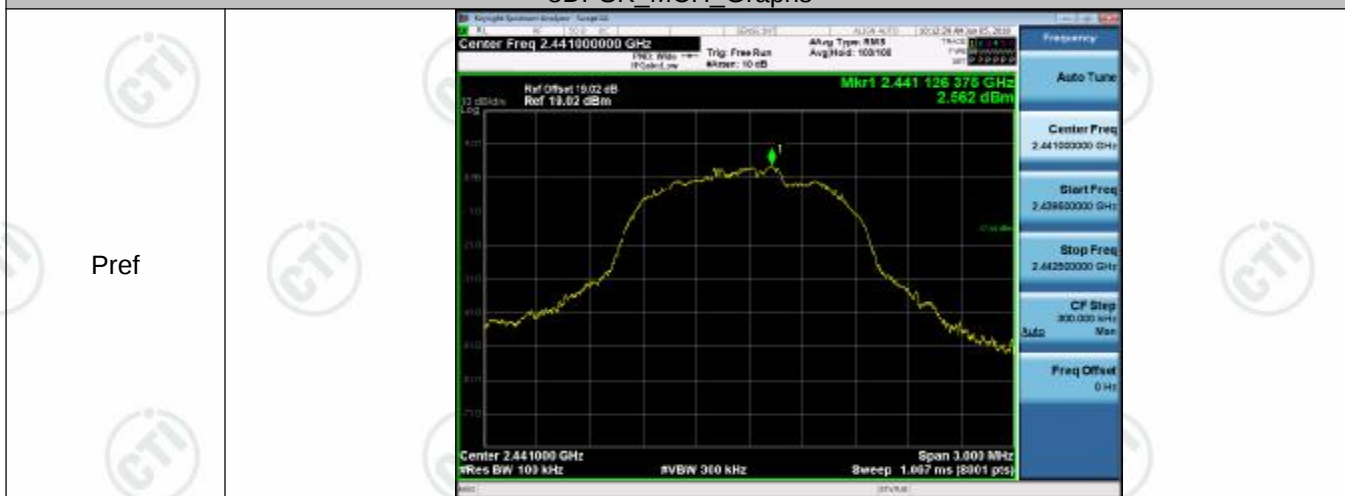

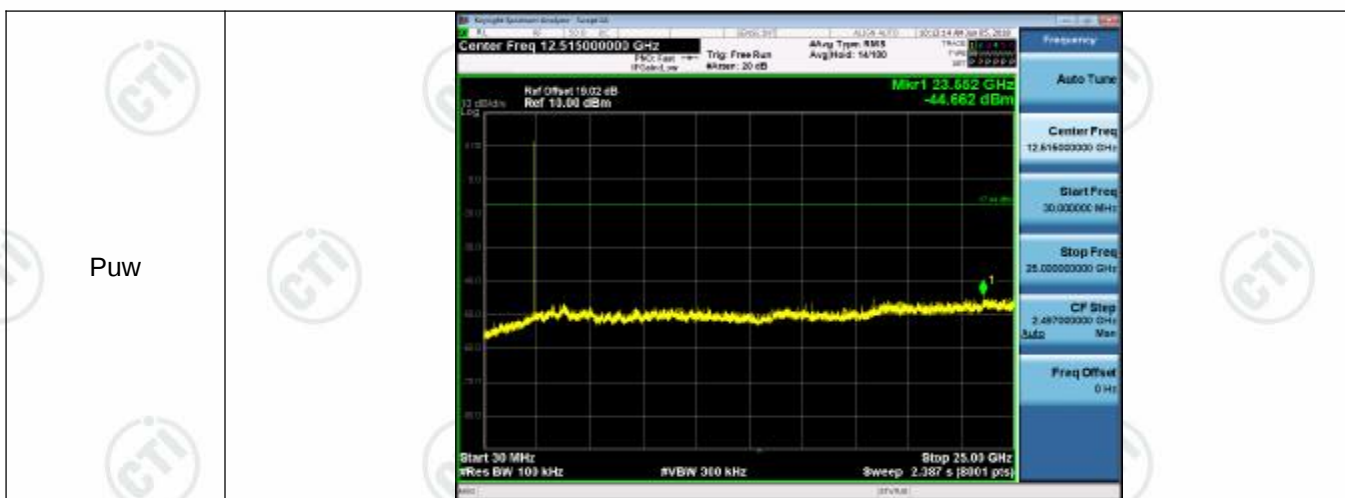

Appendix H): Pseudorandom Frequency Hopping Sequence

Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1) requirement:
Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively. Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.	
EUT Pseudorandom Frequency Hopping Sequence	
The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones. • Number of shift register stages: 9 • Length of pseudo-random sequence: $2^9 - 1 = 511$ bits • Longest sequence of zeros: 8 (non-inverted signal) <i>Linear Feedback Shift Register for Generation of the PRBS sequence</i> An example of Pseudorandom Frequency Hopping Sequence as follow: Each frequency used equally on the average by each transmitter. The system receivers have input bandwidths that match the hopping channel bandwidths of their Corresponding transmitters and shift frequencies in synchronization with the transmitted signals.	
The device does not have the ability to be coordinated with other FHSS systems in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitters.	

Appendix I): Antenna Requirement


15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

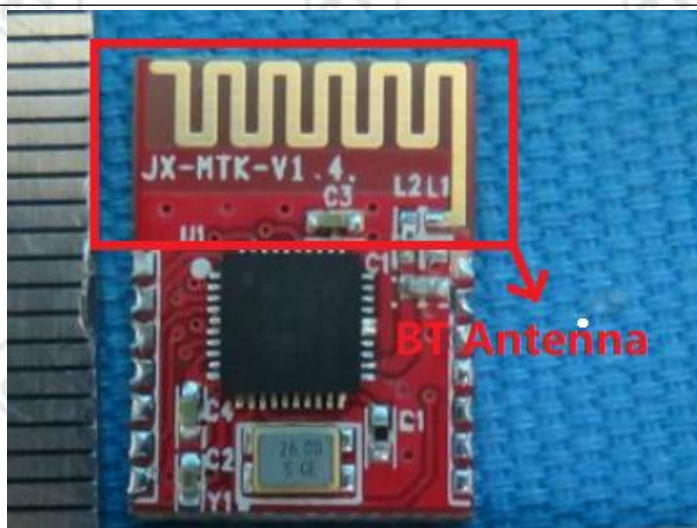

The antenna is PIFA Antenna and no consideration of replacement. The best case gain of the antenna is 5dBi.


Appendix J): Restricted bands around fundamental frequency (Radiated)

Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Test Procedure:	Below 1GHz test procedure as below: - The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. - The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. - The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. - For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. - The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. - Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel Above 1GHz test procedure as below: - Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter). b. Test the EUT in the lowest channel , the Highest channel - The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case. - Repeat above procedures until all frequencies measured was complete.				
Limit:	Frequency	Limit (dBμV/m @3m)		Remark	
	30MHz-88MHz	40.0		Quasi-peak Value	
	88MHz-216MHz	43.5		Quasi-peak Value	
	216MHz-960MHz	46.0		Quasi-peak Value	
	960MHz-1GHz	54.0		Quasi-peak Value	
	Above 1GHz	54.0		Average Value	
		74.0		Peak Value	

Test plot as follows:


GFSK:

Worse case mode:	GFSK (DH5)	Test channel:	Lowest	Remark:	Peak	Vertical
------------------	------------	---------------	--------	---------	------	----------

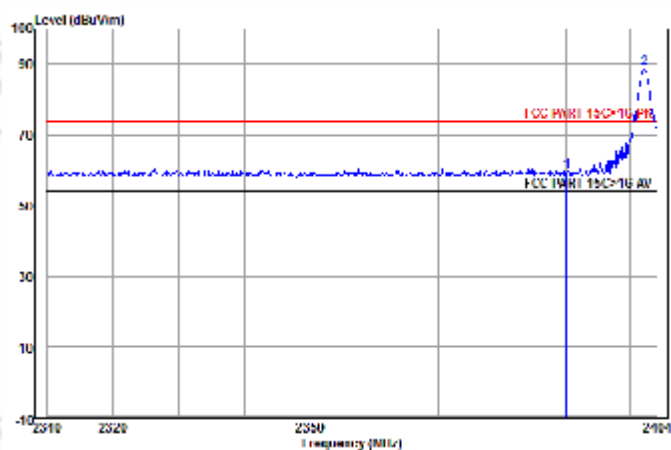


	Ant	Cable	Read	Limit	Over	
Freq	Factor	Loss	Level	Line	Limit	Pol/Phase Remark
MHz	dBi/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	2498.000	12.54	4.47	74.90	59.42	74.00 -14.48 Vertical
2 op	2402.179	12.56	3.07	53.15	80.70	74.00 14.78 Vertical

Worse case mode:	GFSK (DH5)	Test channel:	Lowest	Remark:	Peak	Horizontal
------------------	------------	---------------	--------	---------	------	------------

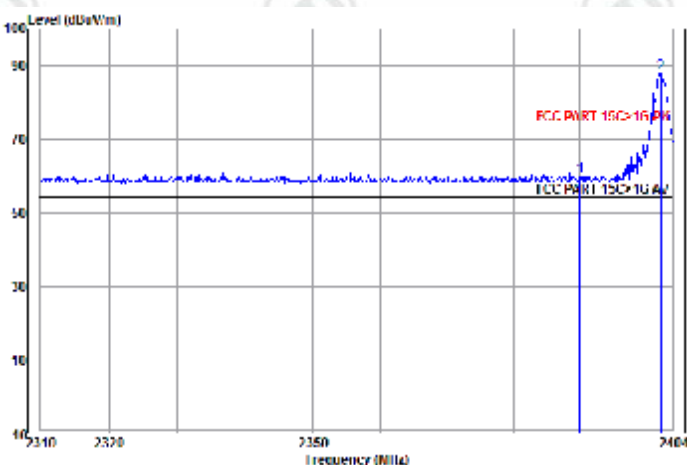


	Ant	Cable	Read	Limit	Over	
Freq	Factor	Loss	Level	Line	Limit	Pol/Phase Remark
MHz	dBi/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	2498.000	12.54	1.87	74.71	59.17	74.00 -14.71 Horizontal
2 pt	2402.179	12.56	1.87	52.43	80.86	74.00 14.86 Horizontal

Worse case mode:	GFSK (DH5)	Test channel:	Lowest	Remark:	Average	Vertical
------------------	------------	---------------	--------	---------	---------	----------

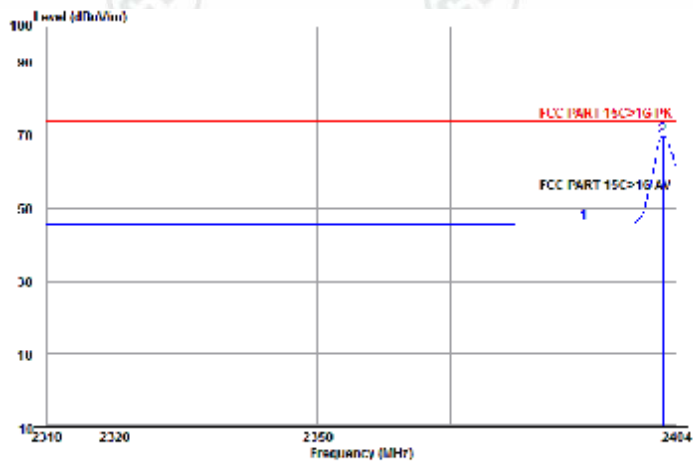


	Ant Freq	Cable Factor	Cable Loss	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz		dB	dBuV	dBuV/m	dBuV/m	dB		
1	2400.000	42.54	4.07	10.49	45.00	54.00	-8.00	Vertical	Average
2	2402.000	42.56	4.07	10.15	45.00	54.00	-13.75	Vertical	Average

Worse case mode:	GFSK (DH5)	Test channel:	Lowest	Remark:	Average	Horizontal
------------------	------------	---------------	--------	---------	---------	------------

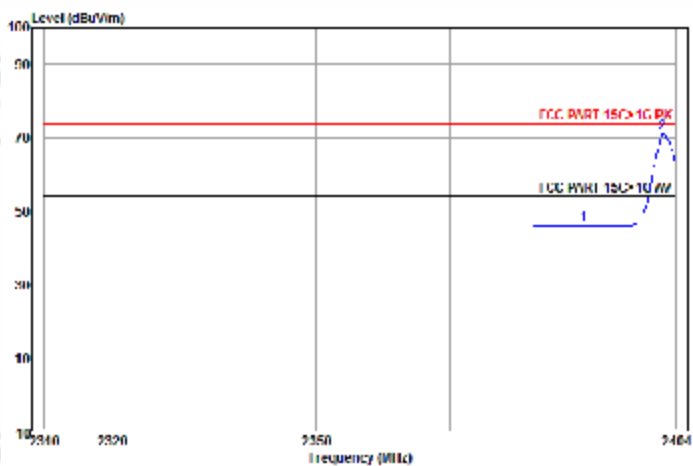


	Ant Freq	Cable Factor	Cable Loss	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz		dB	dBuV	dBuV/m	dBuV/m	dB		
1	2400.000	42.54	4.07	10.49	45.00	54.00	-8.00	Horizontal	Average
2	2402.000	42.56	4.07	10.15	45.00	54.00	-13.75	Horizontal	Average

Worse case mode:	GFSK (DH5)	Test channel:	Highest	Remark:	Peak	Vertical
------------------	------------	---------------	---------	---------	------	----------

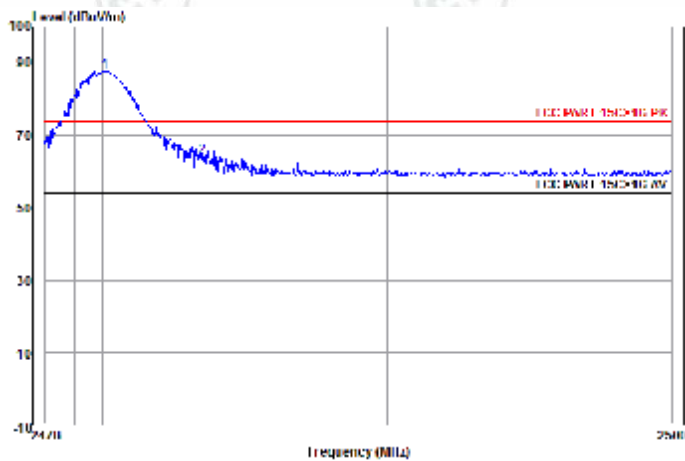


	Ant Freq	Cable Factor	Cable Loss	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz		dB	dBuV	dBuV/m	dBuV/m	dB		
1	2480.104	32.71	3.12	51.67	87.58	74.00	13.58	Vertical	
2	2483.500	32.71	3.12	28.00	63.92	74.00	-10.08	Vertical	

Worse case mode:	GFSK (DH5)	Test channel:	Highest	Remark:	Peak	Horizontal
------------------	------------	---------------	---------	---------	------	------------

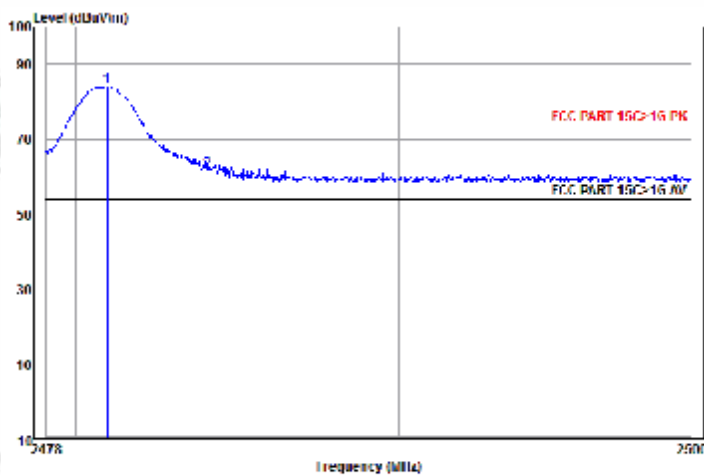


	Ant Freq	Cable Factor	Cable Loss	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz		dB	dBuV	dBuV/m	dBuV/m	dB		
1	2480.868	32.71	3.12	48.21	84.04	74.00	10.04	Horizontal	
2	2483.500	32.71	3.12	25.80	61.65	74.00	-12.35	Horizontal	

Worse case mode:	GFSK (DH5)	Test channel:	Highest	Remark:	Average	Vertical
------------------	------------	---------------	---------	---------	---------	----------

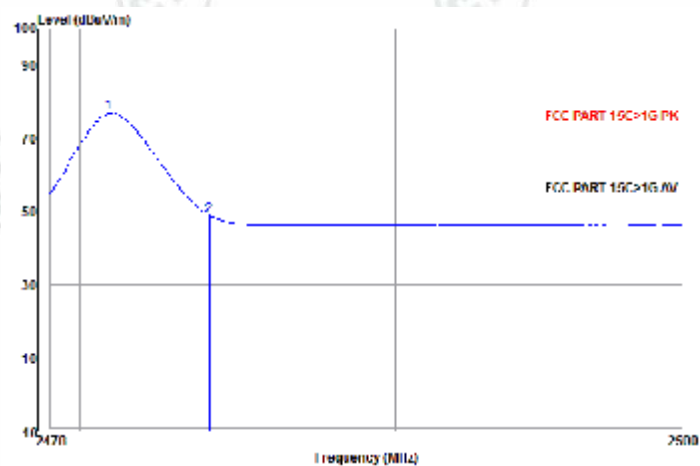

	Ant Freq	Cable Factor	Cable Loss	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz		dB	dBuV	dBuV/m	dBuV/m	dB		
1	2479.934	32.71	3.12	41.21	77.04	54.00	23.04	Vertical	Average
2	2484.500	32.71	3.12	12.83	48.66	54.00	-5.34	Vertical	Average


Worse case mode:	GFSK (DH5)	Test channel:	Highest	Remark:	Average	Horizontal
------------------	------------	---------------	---------	---------	---------	------------

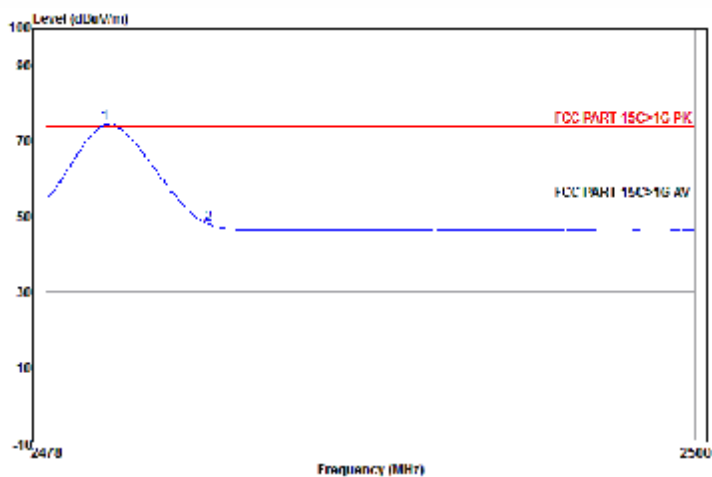

	Ant Freq	Cable Factor	Cable Loss	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz		dB	dBuV	dBuV/m	dBuV/m	dB		
1	2479.934	32.71	3.12	41.21	77.04	54.00	23.04	Horizontal	Average
2	2484.500	32.71	3.12	12.83	48.66	54.00	-5.34	Horizontal	Average


$\pi/4$ DQPSK:

Worse case mode:	$\pi/4$ DQPSK (2DH5)	Test channel:	Lowest	Remark:	Peak	Vertical
------------------	-------------------------	---------------	--------	---------	------	----------

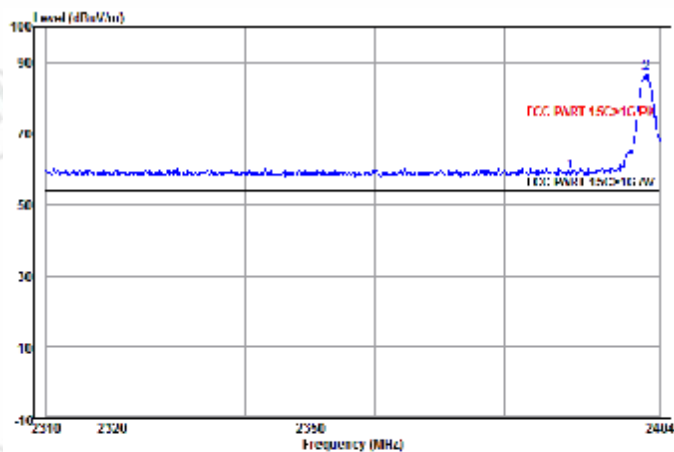


	Freq	Factor	Ant	Cable	Read	Level	Limit	Over	
	MHz		dB/m	Loss	dB	dBuV	dBuV/m	dBuV/m	dB
1	2390.000		32.53	3.07	23.50	59.10	74.00	-14.90	Vertical
2 pp	2402.081		32.56	3.07	51.47	87.05	74.00	13.05	Vertical

Worse case mode:	$\pi/4$ DQPSK (2DH5)	Test channel:	Lowest	Remark:	Peak	Horizontal
------------------	-------------------------	---------------	--------	---------	------	------------

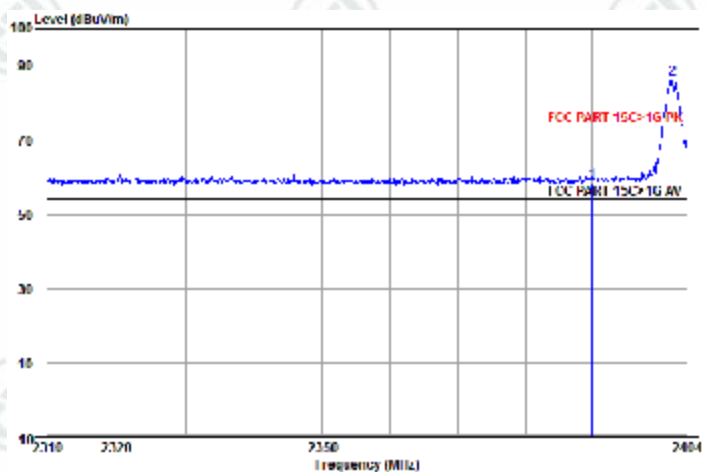


	Freq	Factor	Ant	Cable	Read	Level	Limit	Over	
	MHz		dB/m	Loss	dB	dBuV	dBuV/m	dBuV/m	dB
1	2390.000		32.53	3.07	23.09	58.09	74.00	-15.91	Horizontal
2 pp	2402.083		32.56	3.07	50.95	86.58	74.00	12.58	Horizontal


Worse case mode:	$\pi/4$ DQPSK (2DH5)	Test channel:	Lowest	Remark:	Average	Vertical
------------------	----------------------	---------------	--------	---------	---------	----------

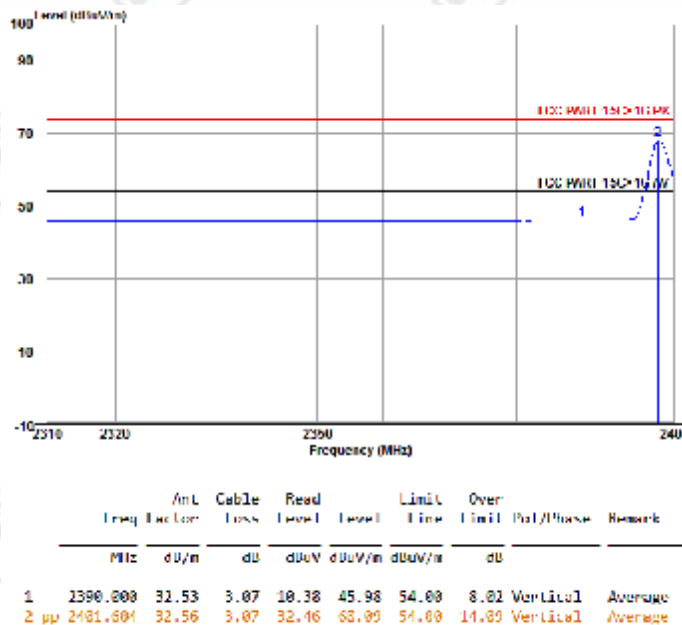


Worse case mode:	$\pi/4$ DQPSK (2DH5)	Test channel:	Lowest	Remark:	Average	Horizontal
------------------	----------------------	---------------	--------	---------	---------	------------

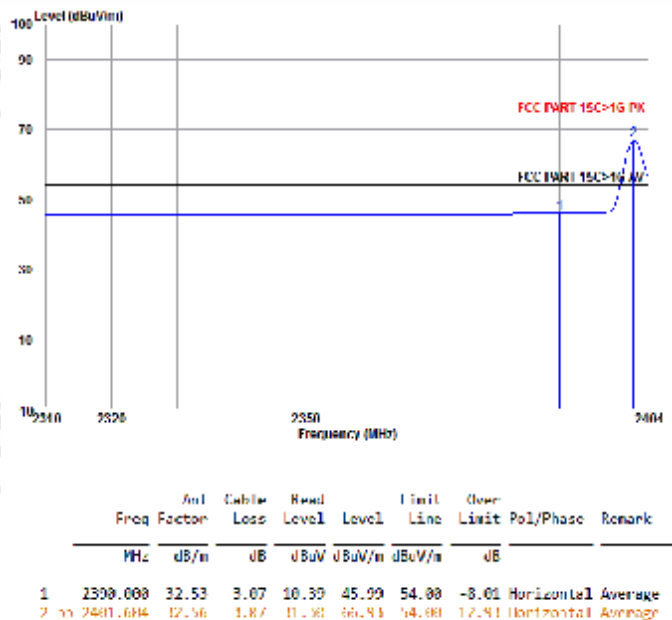


Worse case mode:	$\pi/4$ DQPSK (2DH5)	Test channel:	Highest	Remark:	Peak	Vertical
------------------	----------------------	---------------	---------	---------	------	----------

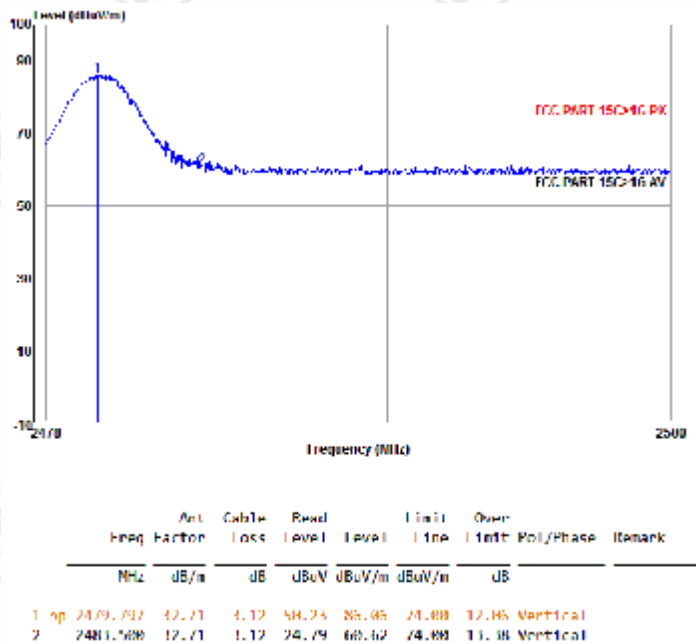

Worse case mode:	$\pi/4$ DQPSK (2DH5)	Test channel:	Highest	Remark:	Peak	Horizontal
------------------	----------------------	---------------	---------	---------	------	------------

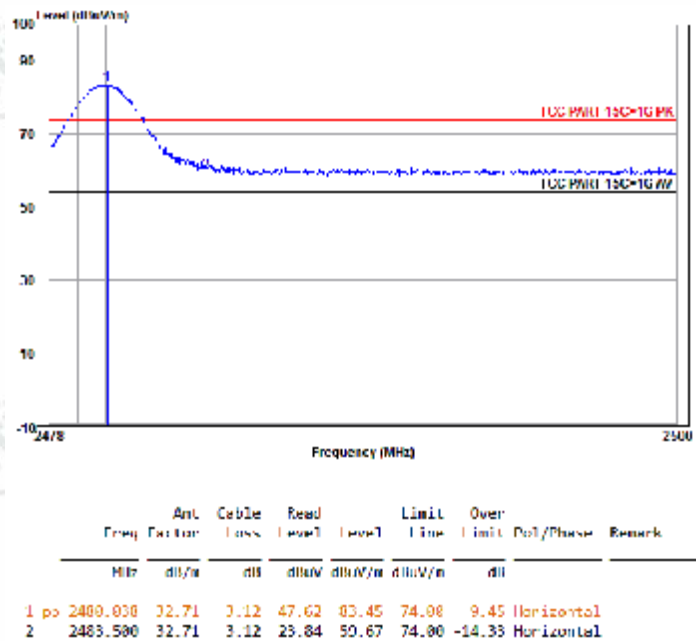


Worse case mode:	$\pi/4$ DQPSK (2DH5)	Test channel:	Highest	Remark:	Average	Vertical
------------------	-------------------------	---------------	---------	---------	---------	----------

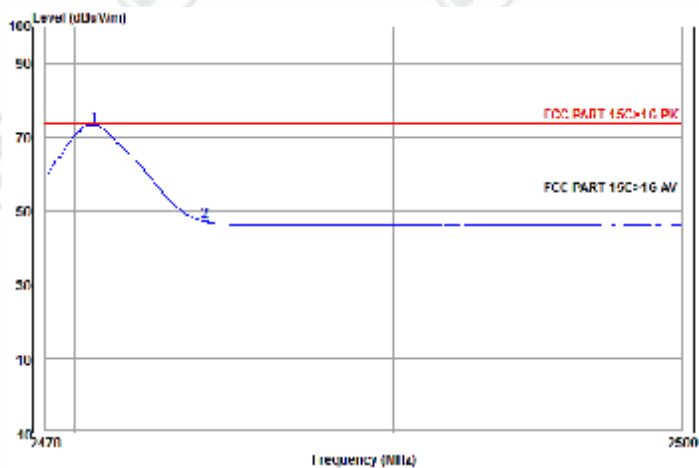

	Ant Freq	Factor	Cable Loss	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		
1 ps	2479.605	32.71	3.12	37.61	73.44	54.00	19.44	Vertical	Average
2	2483.500	32.71	3.12	11.48	47.23	54.00	6.77	Vertical	Average


Worse case mode:	$\pi/4$ DQPSK (2DH5)	Test channel:	Highest	Remark:	Average	Horizontal
------------------	-------------------------	---------------	---------	---------	---------	------------

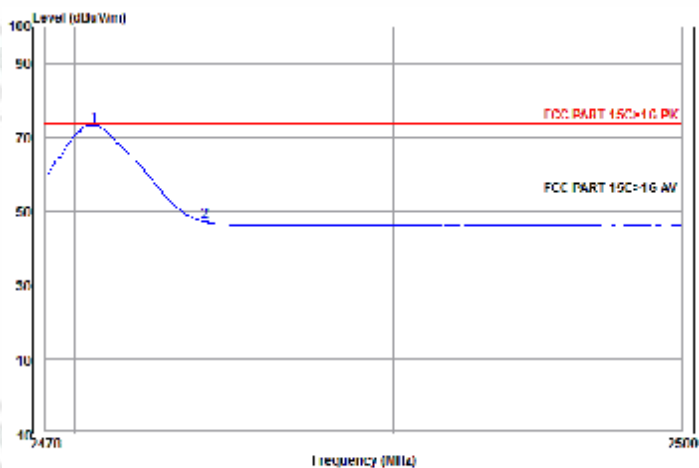

	Ant Freq	Factor	Cable Loss	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		
1 ps	2479.605	32.71	3.12	37.61	73.44	54.00	19.44	Vertical	Average
2	2483.500	32.71	3.12	11.48	47.23	54.00	6.77	Vertical	Average


8DPSK:

Worse case mode:	8DPSK (3DH5)	Test channel:	Lowest	Remark:	Peak	Vertical
------------------	--------------	---------------	--------	---------	------	----------

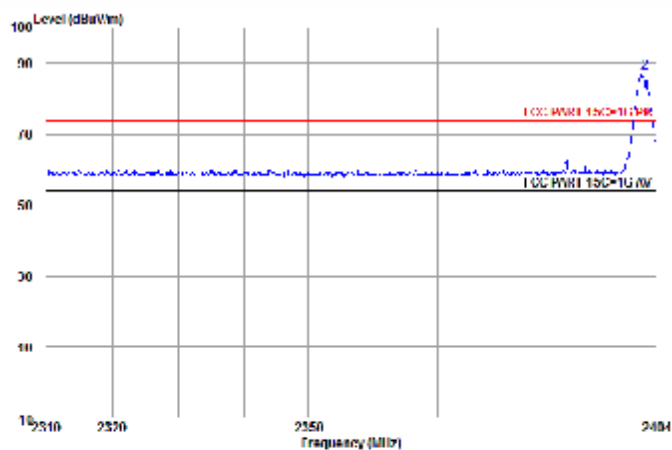


	Freq	Ant Factor	Cable Loss	Head Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBi/m	dB	dBuV	dBuV/m	dBuV/m	dB		
1	2398.000	42.54	4.07	24.43	59.04	74.00	-14.97	Vertical	
2	2402.275	32.56	3.08	51.79	87.43	74.00	13.43	Vertical	

Worse case mode:	8DPSK (3DH5)	Test channel:	Lowest	Remark:	Peak	Horizontal
------------------	--------------	---------------	--------	---------	------	------------

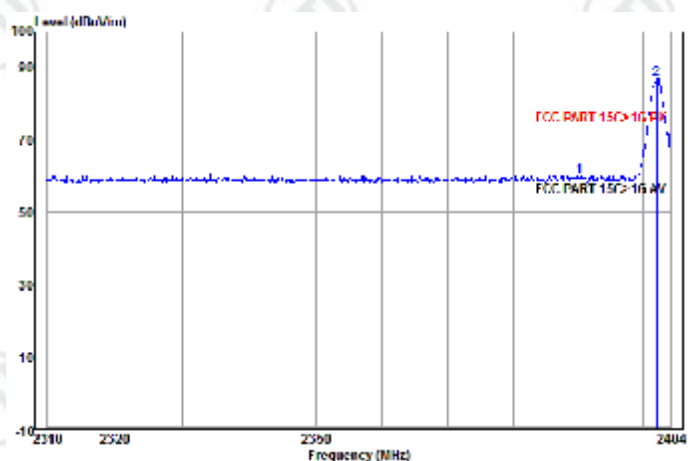


	Freq	Ant Factor	Cable Loss	Head Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBi/m	dB	dBuV	dBuV/m	dBuV/m	dB		
1	2398.000	32.53	3.07	21.00	59.40	74.00	-14.60	Horizontal	
2	2402.091	32.56	3.07	51.20	86.91	74.00	12.91	Horizontal	

Worse case mode:	8DPSK (3DH5)	Test channel:	Lowest	Remark:	Average	Vertical
------------------	--------------	---------------	--------	---------	---------	----------

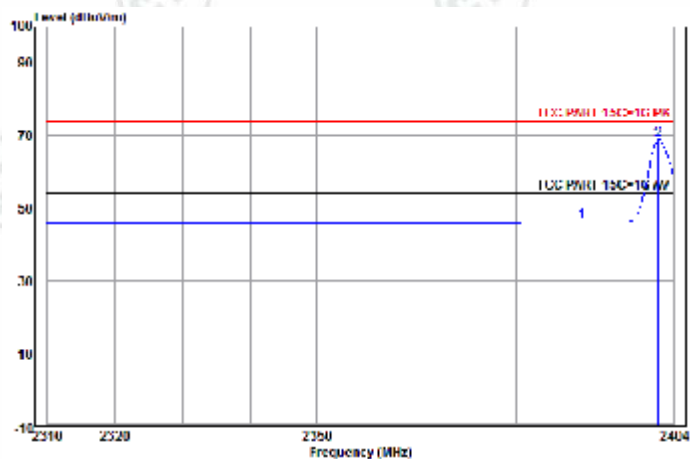


	Ant Freq	Cable Factor	Cable Loss	Read Level	Read Level	Limit Line	Over Limit	Over Limit Pol/Phase	Remark
	MHz		dB	dBuV	dBuV/m	dBuV/m	dB		
1	2398.888		12.53	10.07	46.80	54.00	-7.98	Vertical	Average
2	2401.624		12.56	10.17	46.80	54.00	-7.98	Vertical	Average

Worse case mode:	8DPSK (3DH5)	Test channel:	Lowest	Remark:	Average	Horizontal
------------------	--------------	---------------	--------	---------	---------	------------

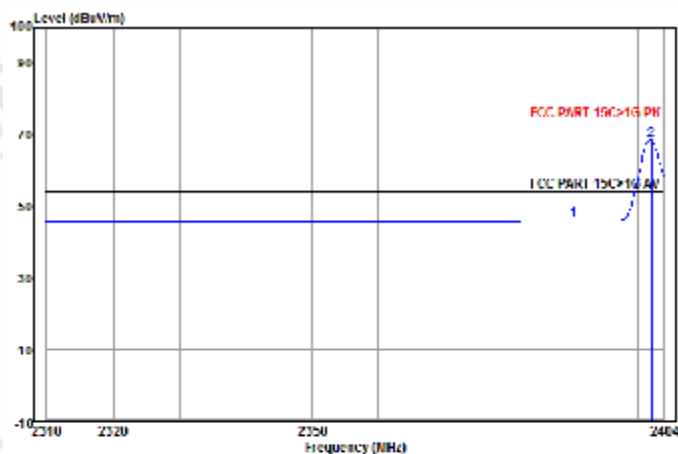


	Ant Freq	Cable Factor	Cable Loss	Read Level	Read Level	Limit Line	Over Limit	Over Limit Pol/Phase	Remark
	MHz		dB	dBuV	dBuV/m	dBuV/m	dB		
1	2398.888		12.53	10.07	46.80	54.00	-7.98	Horizontal	Average
2	2401.624		12.56	10.17	46.80	54.00	-7.98	Horizontal	Average

Worse case mode:	8DPSK (3DH5)	Test channel:	Highest	Remark:	Peak	Vertical
------------------	--------------	---------------	---------	---------	------	----------

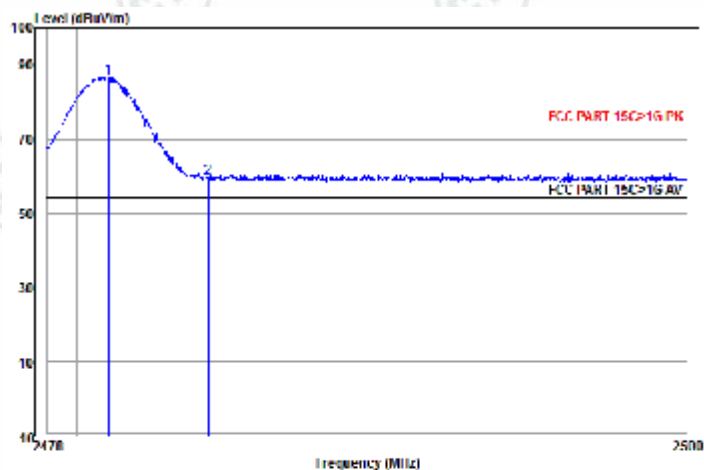


	Ant Freq	Cable Factor	Cable Loss	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		
1 up	2480.000	32.71	3.12	50.77	86.60	74.00	12.60	Vertical	
2	2483.500	32.71	3.12	23.67	59.50	74.00	14.50	Vertical	

Worse case mode:	8DPSK (3DH5)	Test channel:	Highest	Remark:	Peak	Horizontal
------------------	--------------	---------------	---------	---------	------	------------

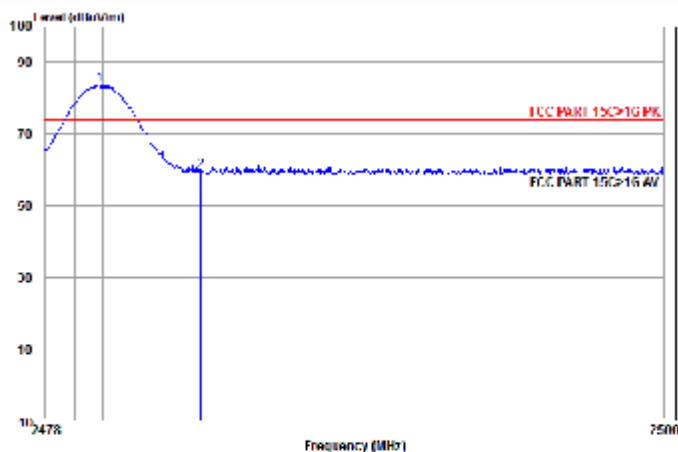


	Ant Freq	Cable Factor	Cable Loss	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		
1 up	2479.000	32.71	3.12	47.81	83.64	74.00	9.64	Horizontal	
2	2483.500	32.71	3.12	23.56	59.49	74.00	14.51	Horizontal	

Worse case mode:	8DPSK (3DH5)	Test channel:	Highest	Remark:	Average	Vertical
------------------	--------------	---------------	---------	---------	---------	----------

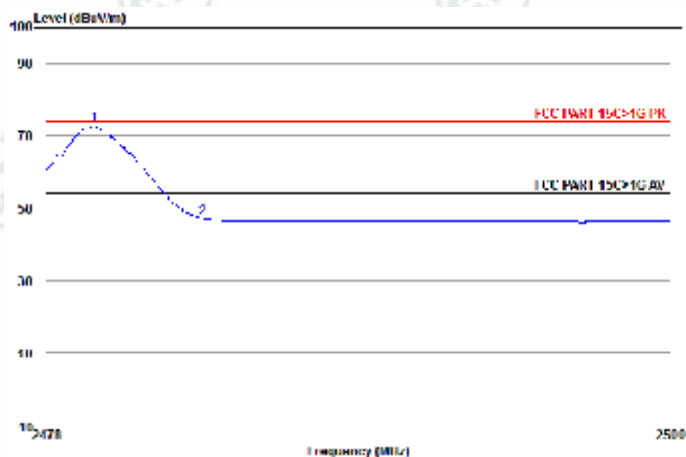

	Ant	Cable	Head	Limit	Over			
Freq	Factor	Loss	Level	Level	Line	Limit	Pol/Phase	Remark
MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		
1	2478.543	32.71	1.12	17.85	77.89	54.88	18.89	Vertical Average
2	2483.588	32.71	1.12	11.33	47.16	54.88	6.84	Vertical Average

Worse case mode:	8DPSK (3DH5)	Test channel:	Highest	Remark:	Average	Horizontal
------------------	--------------	---------------	---------	---------	---------	------------

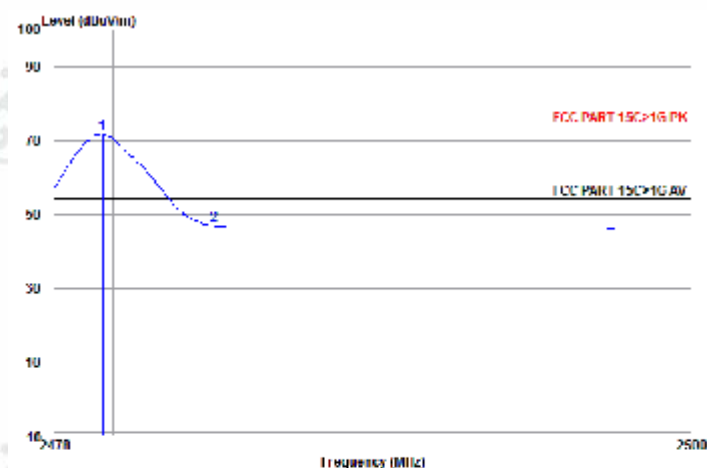

	Ant	Cable	Head	Limit	Over			
Freq	Factor	Loss	Level	Level	Line	Limit	Pol/Phase	Remark
MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		
1	2478.543	32.71	1.12	55.89	71.92	54.88	17.92	Horizontal Average
2	2483.588	32.71	1.12	18.98	46.81	54.88	7.14	Horizontal Average

Note:

1) Through Pre-scan transmitter mode with all kind of modulation and all kind of data type, find the 1-DH5 of data type is the worse case of GFSK modulation type, the 2-DH5 of data type is the worse case of $\pi/4$ DQPSK modulation type, the 3-DH5 of data type is the worse case of 8DPSK modulation type in charge + transmitter mode.

2) As shown in this section, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak values are measured.

3) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading - Correct Factor

Correct Factor = Preamplifier Factor - Antenna Factor - Cable Factor


Appendix K): Radiated Spurious Emissions

Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Test Procedure:					
Below 1GHz test procedure as below:					
a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation. b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.					
Above 1GHz test procedure as below:					
g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter). h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case. j. Repeat above procedures until all frequencies measured was complete.					
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dBμV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
	Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.				

Radiated Spurious Emissions test Data: Radiated Emission below 1GHz


30MHz~1GHz (QP)

Test mode:	Transmitting	Horizontal
------------	--------------	------------

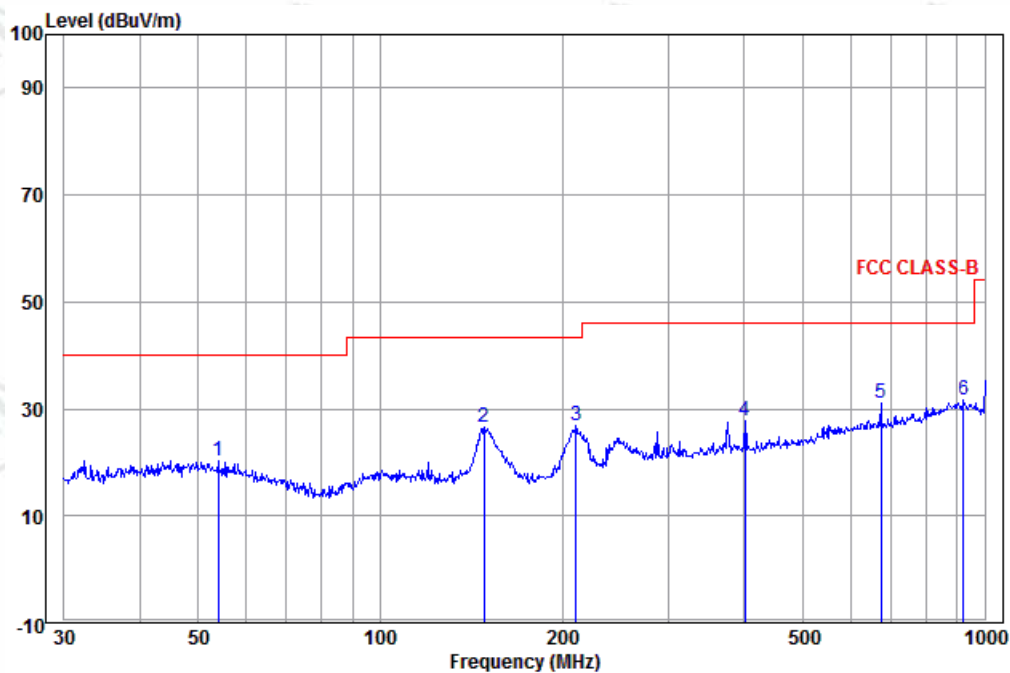

	Ant Freq	Cable Factor	Read Loss	Level Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dB		
1	53.882	13.98	0.15	6.12	20.25	40.00	-19.75	Horizontal QP
2	148.441	8.90	0.61	16.94	26.45	43.50	-17.05	Horizontal QP
3	210.786	11.76	1.16	13.84	26.76	43.50	-16.74	Horizontal QP
4	401.839	15.24	1.33	11.16	27.73	46.00	-18.27	Horizontal QP
5	672.845	18.99	1.92	10.04	30.95	46.00	-15.05	Horizontal QP
6 pp	922.516	22.05	2.43	7.12	31.60	46.00	-14.40	Horizontal QP

Test mode:	Transmitting	Vertical
------------	--------------	----------

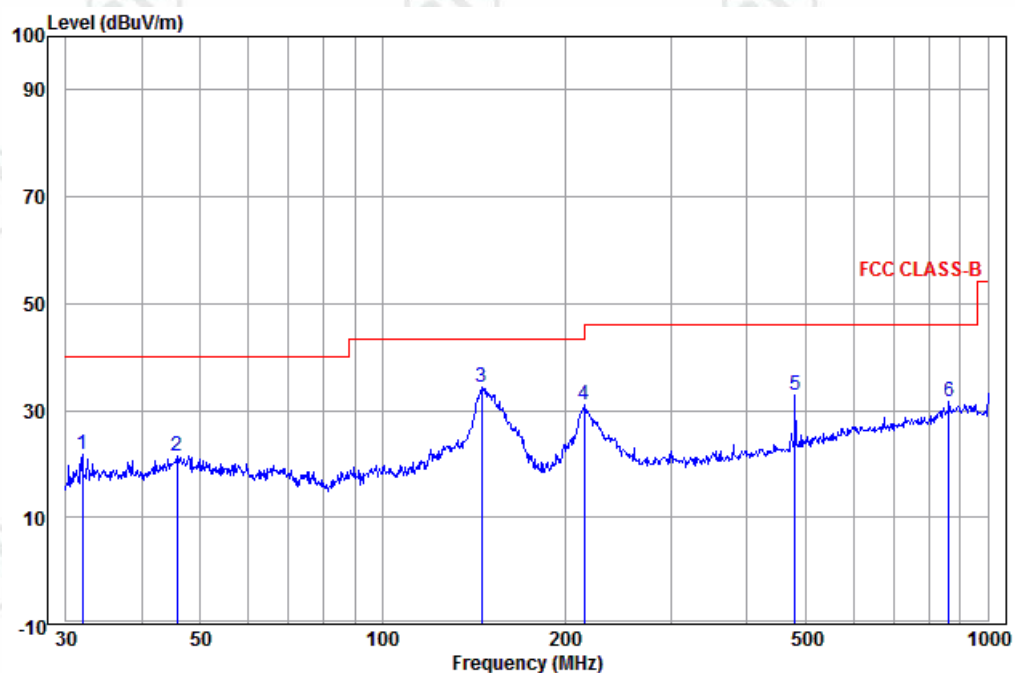

	Freq	Ant Factor	Cable Loss	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		
1	31.955	12.32	0.08	9.40	21.80	40.00	-18.20	Vertical	QP
2	45.695	14.28	0.09	7.03	21.40	40.00	-18.60	Vertical	QP
3 pp	145.861	9.06	0.61	24.67	34.34	43.50	-9.16	Vertical	QP
4	215.268	11.86	1.18	18.13	31.17	43.50	-12.33	Vertical	QP
5	480.528	16.64	1.50	14.86	33.00	46.00	-13.00	Vertical	QP
6	863.056	21.51	2.46	7.75	31.72	46.00	-14.28	Vertical	QP

Transmitter Emission above 1GHz

Worse case mode:		GFSK(1-DH5)		Test channel:		Lowest	Remark: Peak		
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Result	Antenna Polaxis
1273.572	30.40	1.97	44.28	49.09	37.18	74.00	-36.82	Pass	H
1842.139	31.46	2.68	43.64	47.32	37.82	74.00	-36.18	Pass	H
4804.000	34.69	5.98	44.60	47.48	43.55	74.00	-30.45	Pass	H
6017.064	35.91	7.44	44.50	48.76	47.61	74.00	-26.39	Pass	H
7206.000	36.42	6.97	44.77	47.71	46.33	74.00	-27.67	Pass	H
9608.000	37.88	6.98	45.58	46.13	45.41	74.00	-28.59	Pass	H
1263.883	30.38	1.96	44.29	48.77	36.82	74.00	-37.18	Pass	V
1719.783	31.26	2.55	43.76	47.48	37.53	74.00	-36.47	Pass	V
4804.000	34.69	5.98	44.60	47.82	43.89	74.00	-30.11	Pass	V
6611.326	36.21	7.28	44.56	48.39	47.32	74.00	-26.68	Pass	V
7206.000	36.42	6.97	44.77	47.18	45.80	74.00	-28.20	Pass	V
9608.000	37.88	6.98	45.58	45.92	45.20	74.00	-28.80	Pass	V

Worse case mode:		GFSK(1-DH5)		Test channel:		Middle	Remark: Peak		
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Result	Antenna Polaxis
1185.958	30.19	1.84	44.40	48.18	35.81	74.00	-38.19	Pass	H
1605.554	31.07	2.42	43.88	48.60	38.21	74.00	-35.79	Pass	H
4882.000	34.85	6.14	44.60	47.92	44.31	74.00	-29.69	Pass	H
5821.207	35.77	7.26	44.52	48.50	47.01	74.00	-26.99	Pass	H
7323.000	36.43	6.85	44.87	46.64	45.05	74.00	-28.95	Pass	H
9764.000	38.05	7.12	45.55	46.58	46.20	74.00	-27.80	Pass	H
1381.656	30.63	2.13	44.14	48.07	36.69	74.00	-37.31	Pass	V
1706.700	31.24	2.54	43.77	47.23	37.24	74.00	-36.76	Pass	V
4882.000	34.85	6.14	44.60	47.68	44.07	74.00	-29.93	Pass	V
6032.401	35.92	7.43	44.50	48.42	47.27	74.00	-26.73	Pass	V
7323.000	36.43	6.85	44.87	46.75	45.16	74.00	-28.84	Pass	V
9764.000	38.05	7.12	45.55	49.02	48.64	74.00	-25.36	Pass	V

Worse case mode:		GFSK(1-DH5)		Test channel:		Highest	Remark: Peak		
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Result	Antenna Polaxis
1179.935	30.18	1.83	44.41	48.09	35.69	74.00	-38.31	Pass	H
1541.476	30.95	2.34	43.95	47.88	37.22	74.00	-36.78	Pass	H
4960.000	35.02	6.29	44.60	46.56	43.27	74.00	-30.73	Pass	H
6017.064	35.91	7.44	44.50	48.66	47.51	74.00	-26.49	Pass	H
7440.000	36.45	6.73	44.97	45.72	43.93	74.00	-30.07	Pass	H
9920.000	38.22	7.26	45.52	46.00	45.96	74.00	-28.04	Pass	H
1270.334	30.39	1.97	44.29	48.15	36.22	74.00	-37.78	Pass	V
1795.839	31.39	2.63	43.69	48.44	38.77	74.00	-35.23	Pass	V
4960.000	35.02	6.29	44.60	46.63	43.34	74.00	-30.66	Pass	V
6017.064	35.91	7.44	44.50	48.67	47.52	74.00	-26.48	Pass	V
7440.000	36.45	6.73	44.97	46.55	44.76	74.00	-29.24	Pass	V
9920.000	38.22	7.26	45.52	45.93	45.89	74.00	-28.11	Pass	V

Worse case mode:		π/4DQPSK(2-DH5)		Test channel:		Lowest	Remark: Peak		
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Result	Antenna Polaxis
1254.268	30.35	1.94	44.31	47.81	35.79	74.00	-38.21	Pass	H
1755.164	31.32	2.59	43.73	46.88	37.06	74.00	-36.94	Pass	H
4804.000	34.69	5.98	44.60	47.32	43.39	74.00	-30.61	Pass	H
6001.768	35.90	7.44	44.50	48.12	46.96	74.00	-27.04	Pass	H
7206.000	36.42	6.97	44.77	47.37	45.99	74.00	-28.01	Pass	H
9608.000	37.88	6.98	45.58	46.79	46.07	74.00	-27.93	Pass	H
1188.980	30.20	1.84	44.40	48.63	36.27	74.00	-37.73	Pass	V
1487.509	30.85	2.27	44.01	48.19	37.30	74.00	-36.70	Pass	V
4804.000	34.69	5.98	44.60	47.80	43.87	74.00	-30.13	Pass	V
6017.064	35.91	7.44	44.50	48.51	47.36	74.00	-26.64	Pass	V
7206.000	36.42	6.97	44.77	47.32	45.94	74.00	-28.06	Pass	V
9608.000	37.88	6.98	45.58	46.63	45.91	74.00	-28.09	Pass	V

Worse case mode:		$\pi/4$ DQPSK(2-DH5)		Test channel:		Middle	Remark: Peak		
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dB μ V)	Level (dB μ V/m)	Limit Line (dB μ V/m)	Over Limit (dB)	Result	Antenna Polaxis
1192.011	30.21	1.85	44.40	48.03	35.69	74.00	-38.31	Pass	H
1468.696	30.81	2.25	44.03	47.56	36.59	74.00	-37.41	Pass	H
4882.000	34.85	6.14	44.60	47.45	43.84	74.00	-30.16	Pass	H
6017.064	35.91	7.44	44.50	48.42	47.27	74.00	-26.73	Pass	H
7323.000	36.43	6.85	44.87	46.52	44.93	74.00	-29.07	Pass	H
9764.000	38.05	7.12	45.55	46.65	46.27	74.00	-27.73	Pass	H
1201.149	30.23	1.86	44.38	48.18	35.89	74.00	-38.11	Pass	V
1549.344	30.96	2.35	43.94	47.63	37.00	74.00	-37.00	Pass	V
4882.000	34.85	6.14	44.60	47.84	44.23	74.00	-29.77	Pass	V
5821.207	35.77	7.26	44.52	48.47	46.98	74.00	-27.02	Pass	V
7323.000	36.43	6.85	44.87	47.28	45.69	74.00	-28.31	Pass	V
9764.000	38.05	7.12	45.55	46.75	46.37	74.00	-27.63	Pass	V

Worse case mode:		$\pi/4$ DQPSK(2-DH5)		Test channel:		Highest	Remark: Peak		
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dB μ V)	Level (dB μ V/m)	Limit Line (dB μ V/m)	Over Limit (dB)	Result	Antenna Polaxis
1286.606	30.43	1.99	44.26	47.72	35.88	74.00	-38.12	Pass	H
1537.557	30.94	2.34	43.96	47.96	37.28	74.00	-36.72	Pass	H
4960.000	35.02	6.29	44.60	46.54	43.25	74.00	-30.75	Pass	H
6032.401	35.92	7.43	44.50	49.20	48.05	74.00	-25.95	Pass	H
7440.000	36.45	6.73	44.97	46.67	44.88	74.00	-29.12	Pass	H
9920.000	38.22	7.26	45.52	45.75	45.71	74.00	-28.29	Pass	H
1267.104	30.38	1.96	44.29	49.02	37.07	74.00	-36.93	Pass	V
1630.264	31.11	2.45	43.85	47.51	37.22	74.00	-36.78	Pass	V
4960.000	35.02	6.29	44.60	48.04	44.75	74.00	-29.25	Pass	V
5836.044	35.78	7.28	44.52	48.91	47.45	74.00	-26.55	Pass	V
7440.000	36.45	6.73	44.97	46.48	44.69	74.00	-29.31	Pass	V
9920.000	38.22	7.26	45.52	46.55	46.51	74.00	-27.49	Pass	V

Worse case mode:		8DPSK(3-DH5)		Test channel:		Lowest	Remark: Peak		
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Result	Antenna Polaxis
1150.279	30.10	1.78	44.46	47.90	35.32	74.00	-38.68	Pass	H
1561.221	30.99	2.36	43.93	48.27	37.69	74.00	-36.31	Pass	H
4804.000	34.69	5.98	44.60	48.11	44.18	74.00	-29.82	Pass	H
6187.929	36.00	7.39	44.52	48.87	47.74	74.00	-26.26	Pass	H
7206.000	36.42	6.97	44.77	47.20	45.82	74.00	-28.18	Pass	H
9608.000	37.88	6.98	45.58	46.01	45.29	74.00	-28.71	Pass	H
1326.513	30.52	2.05	44.21	48.04	36.40	74.00	-37.60	Pass	V
1601.472	31.06	2.41	43.88	47.31	36.90	74.00	-37.10	Pass	V
4804.000	34.69	5.98	44.60	48.29	44.36	74.00	-29.64	Pass	V
6001.768	35.90	7.44	44.50	48.37	47.21	74.00	-26.79	Pass	V
7206.000	36.42	6.97	44.77	47.58	46.20	74.00	-27.80	Pass	V
9608.000	37.88	6.98	45.58	46.98	46.26	74.00	-27.74	Pass	V

Worse case mode:		8DPSK(3-DH5)		Test channel:		Middle	Remark: Peak		
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Result	Antenna Polaxis
1254.268	30.35	1.94	44.31	48.74	36.72	74.00	-37.28	Pass	H
1698.033	31.23	2.53	43.78	47.31	37.29	74.00	-36.71	Pass	H
4882.000	34.85	6.14	44.60	47.43	43.82	74.00	-30.18	Pass	H
5821.207	35.77	7.26	44.52	48.73	47.24	74.00	-26.76	Pass	H
7323.000	36.43	6.85	44.87	46.54	44.95	74.00	-29.05	Pass	H
9764.000	38.05	7.12	45.55	46.96	46.58	74.00	-27.42	Pass	H
1270.334	30.39	1.97	44.29	49.25	37.32	74.00	-36.68	Pass	V
1846.834	31.47	2.69	43.64	47.40	37.92	74.00	-36.08	Pass	V
4882.000	34.85	6.14	44.60	47.89	44.28	74.00	-29.72	Pass	V
6001.768	35.90	7.44	44.50	48.87	47.71	74.00	-26.29	Pass	V
7323.000	36.43	6.85	44.87	46.88	45.29	74.00	-28.71	Pass	V
9764.000	38.05	7.12	45.55	46.86	46.48	74.00	-27.52	Pass	V

Worse case mode:		8DPSK(3-DH5)		Test channel:		Highest	Remark: Peak		
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Result	Antenna Polaxis
1118.517	30.02	1.72	44.51	48.88	36.11	74.00	-37.89	Pass	H
1577.198	31.01	2.38	43.91	48.29	37.77	74.00	-36.23	Pass	H
4960.000	35.02	6.29	44.60	46.91	43.62	74.00	-30.38	Pass	H
5821.207	35.77	7.26	44.52	49.00	47.51	74.00	-26.49	Pass	H
7440.000	36.45	6.73	44.97	46.55	44.76	74.00	-29.24	Pass	H
9920.000	38.22	7.26	45.52	46.13	46.09	74.00	-27.91	Pass	H
1293.173	30.44	2.00	44.25	48.23	36.42	74.00	-37.58	Pass	V
1846.834	31.47	2.69	43.64	47.71	38.23	74.00	-35.77	Pass	V
4960.000	35.02	6.29	44.60	46.65	43.36	74.00	-30.64	Pass	V
6611.326	36.21	7.28	44.56	48.27	47.20	74.00	-26.80	Pass	V
7440.000	36.45	6.73	44.97	46.79	45.00	74.00	-29.00	Pass	V
9920.000	38.22	7.26	45.52	45.84	45.80	74.00	-28.20	Pass	V

Note:

- 1) Through Pre-scan transmitter mode with all kind of modulation and all kind of data type, find the 1-DH5 of data type is the worse case of GFSK modulation type, the 2-DH5 of data type is the worse case of $\pi/4$ DQPSK modulation type, the 3-DH5 of data type is the worse case of 8DPSK modulation type in transmitter mode.
- 2) As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak values are measured.
- 3) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
 Final Test Level = Receiver Reading - Correct Factor
 Correct Factor = Preamplifier Factor - Antenna Factor - Cable Factor
- 4) Scan from 9kHz to 25GHz, the disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

PHOTOGRAPHS OF TEST SETUP

Test Model No.: TD-650



Radiated spurious emission Test Setup-1(Below 1GHz)



Radiated spurious emission Test Setup-2(Below 30M)




Radiated spurious emission Test Setup-3(Above 1GHz)

PHOTOGRAPHS OF EUT Constructional Details


Test model No.:TD-650



View of Product-1

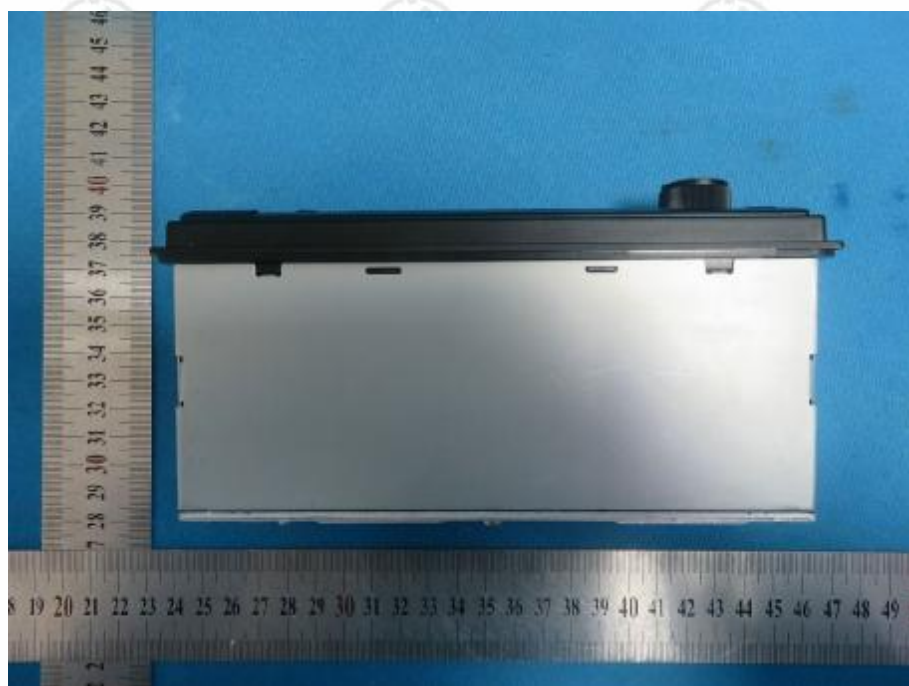

View of Product-2

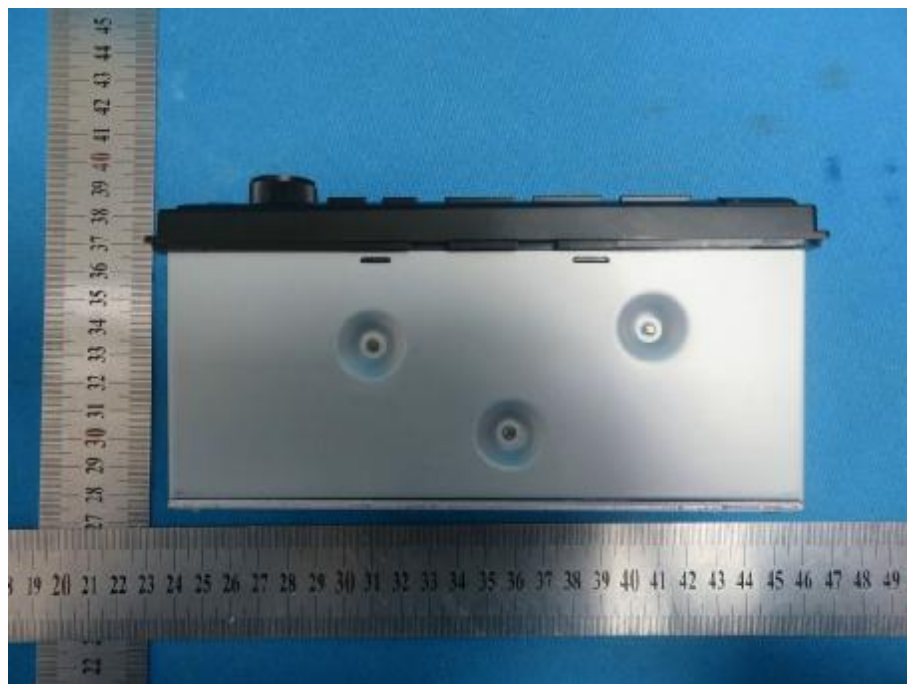

View of Product-3



View of Product-4




View of Product-5



View of Product-6



View of Product-7

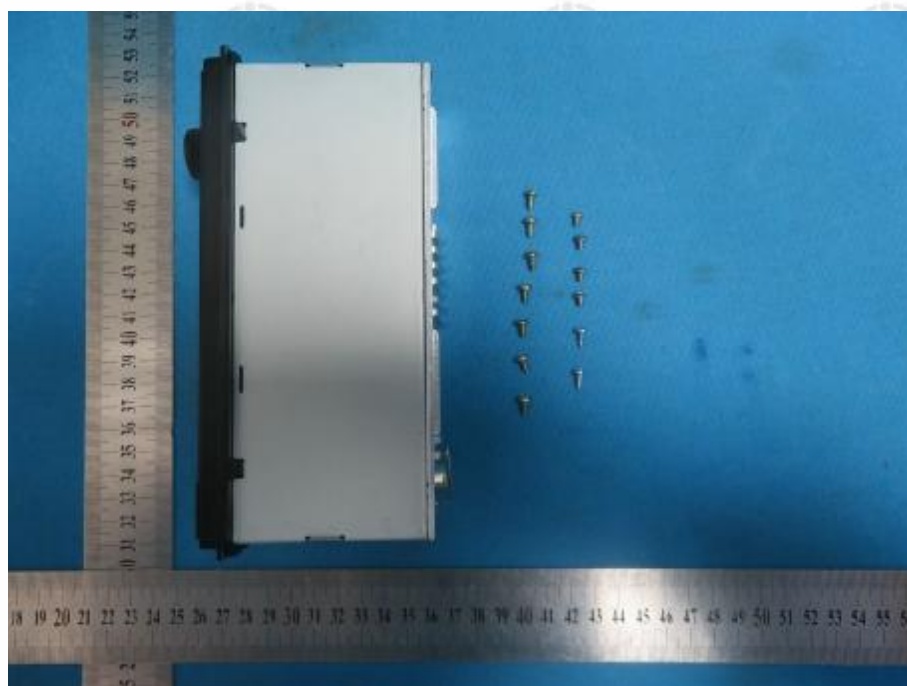


View of Product-8



View of Product-9



View of Product-10

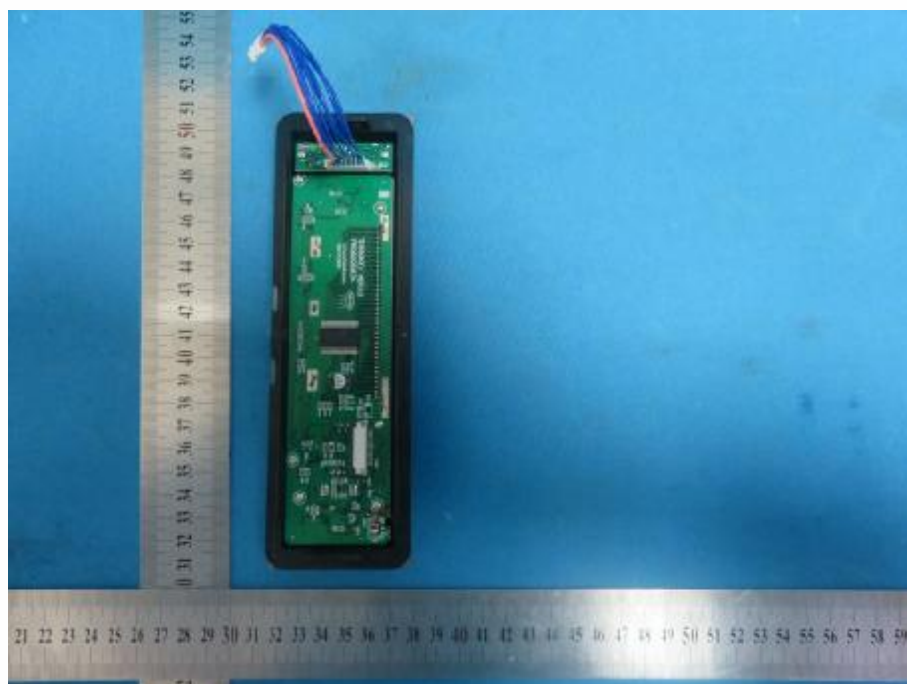


View of Product-11




View of Product-12




View of Product-13

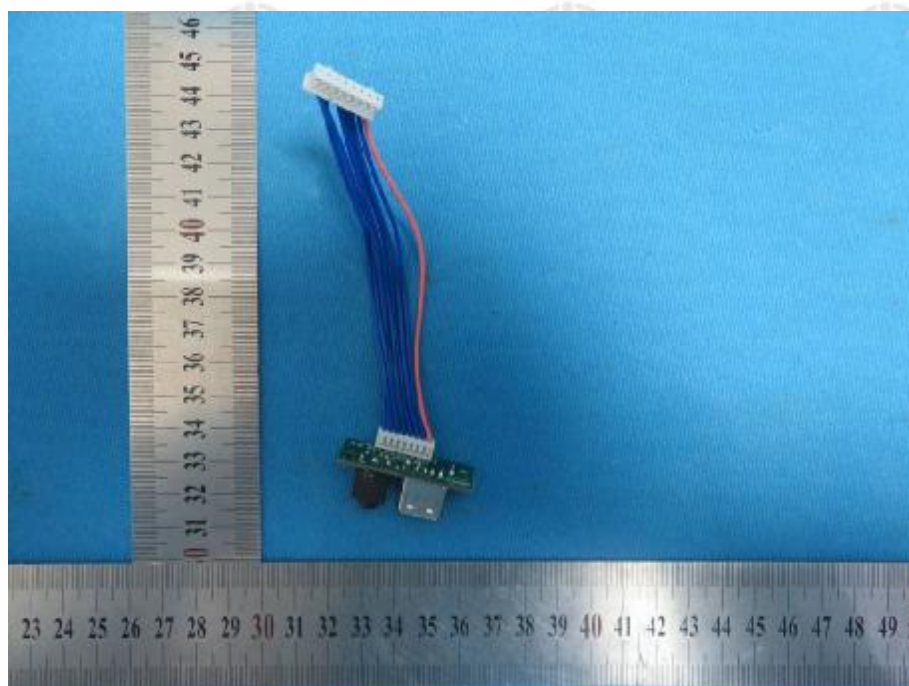


View of Product-14

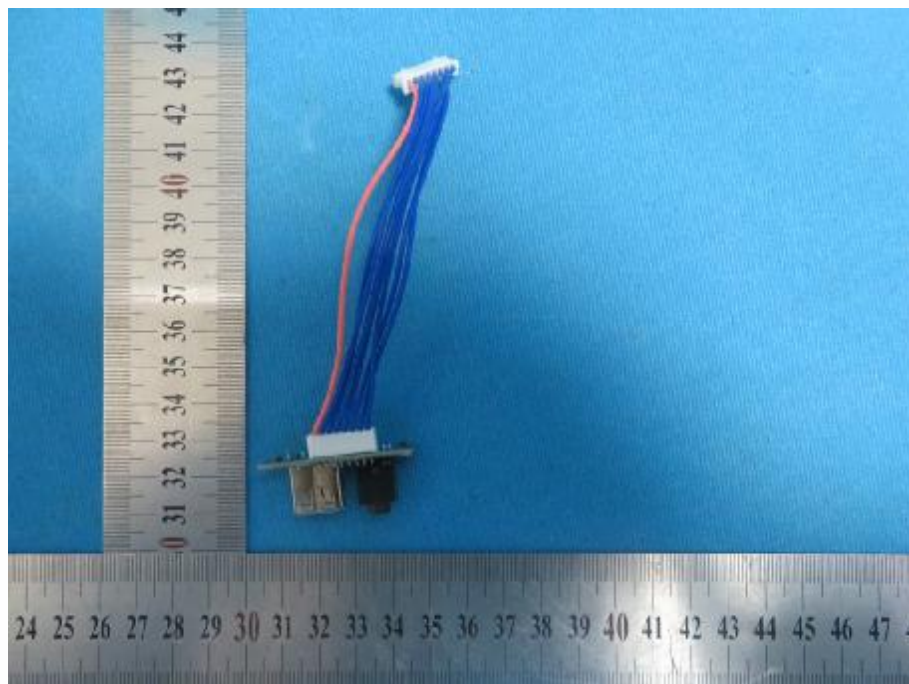

View of Product-15

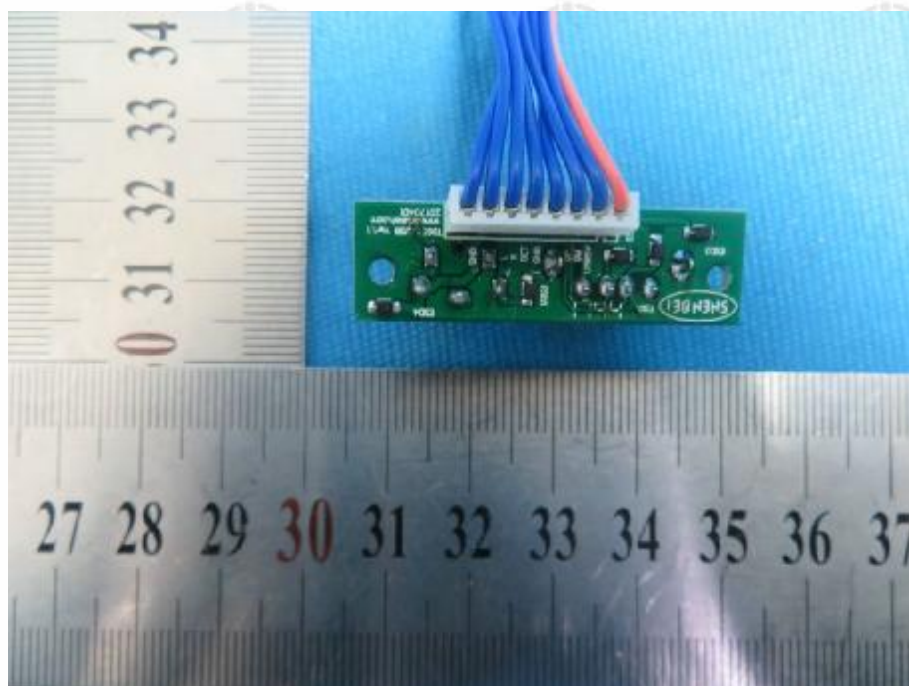


View of Product-16

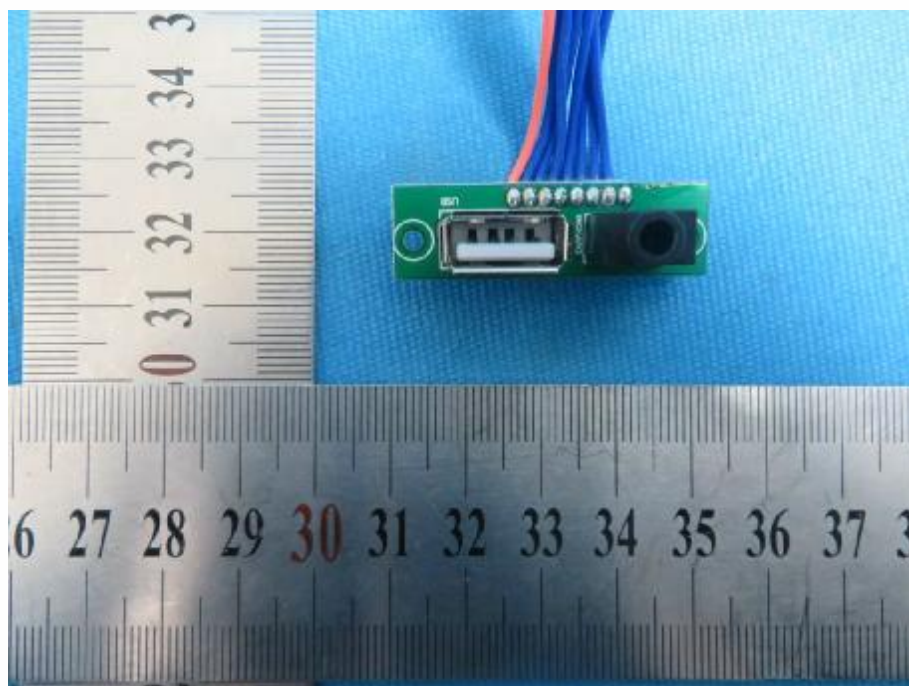

View of Product-17




View of Product-18

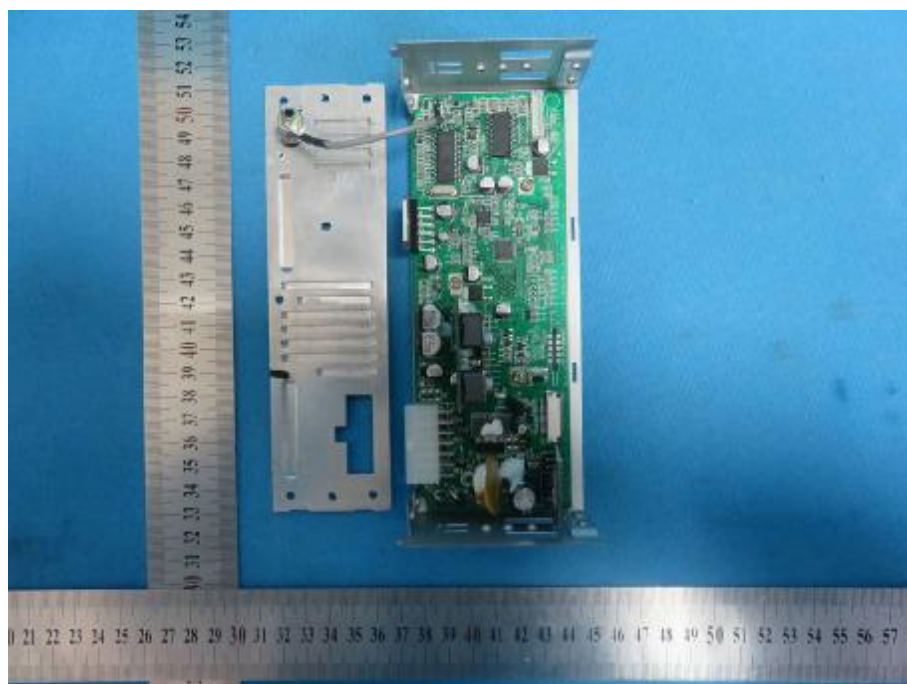


View of Product-19




View of Product-20

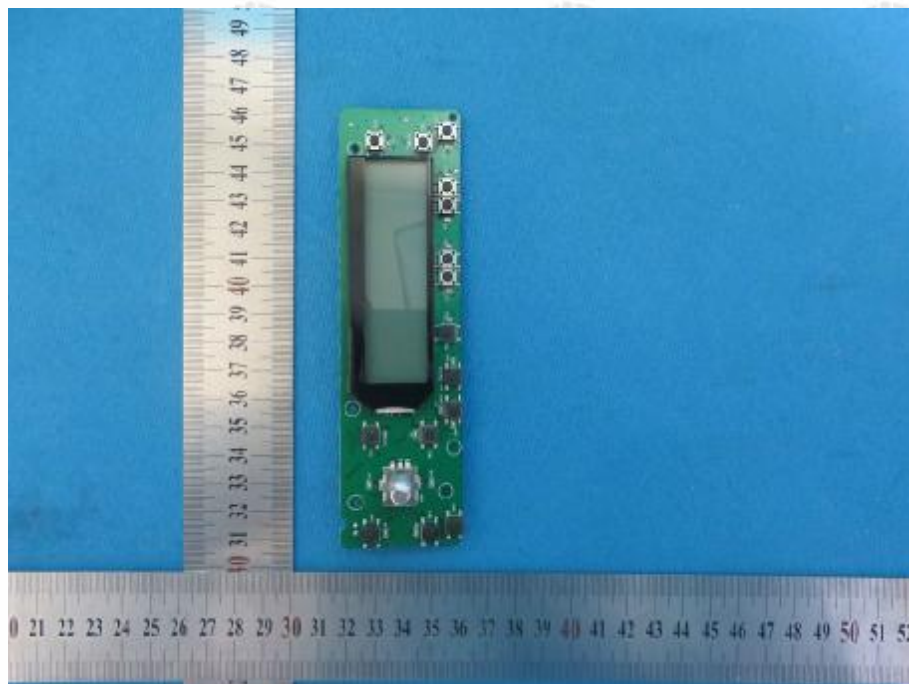

View of Product-21

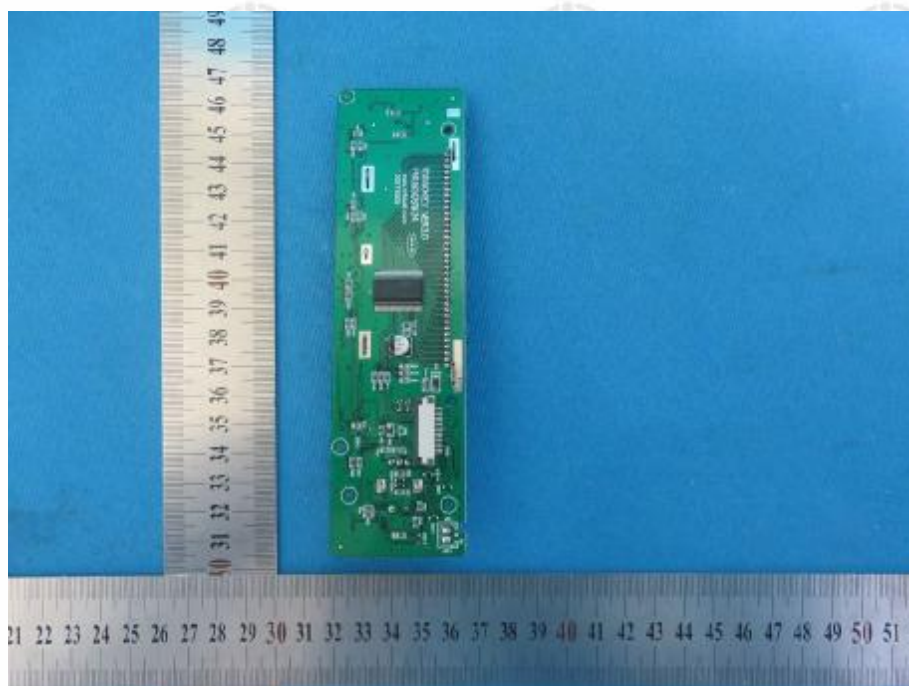


View of Product-22

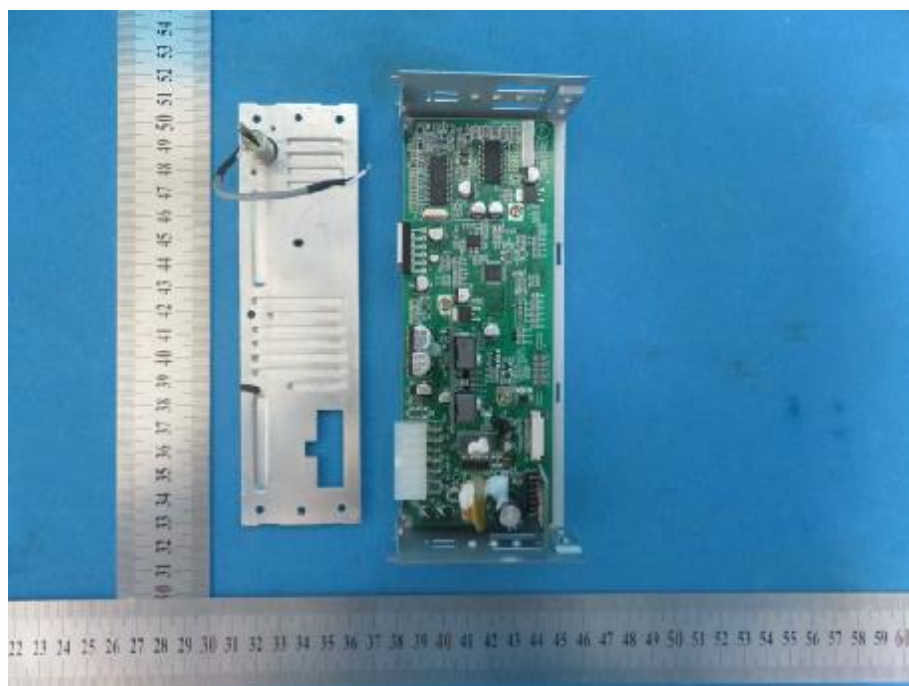


View of Product-23




View of Product-24

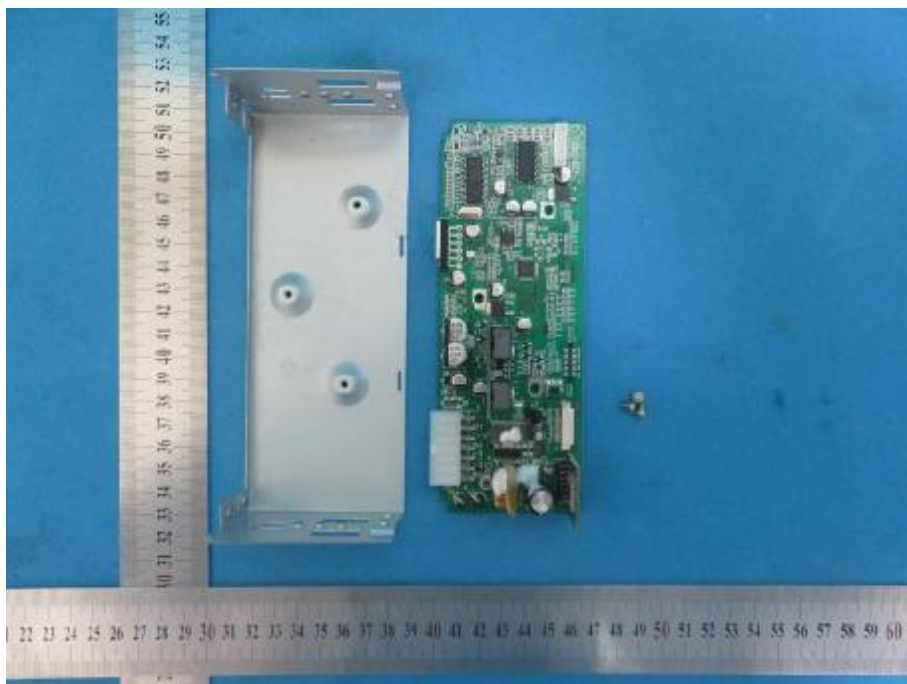


View of Product-25

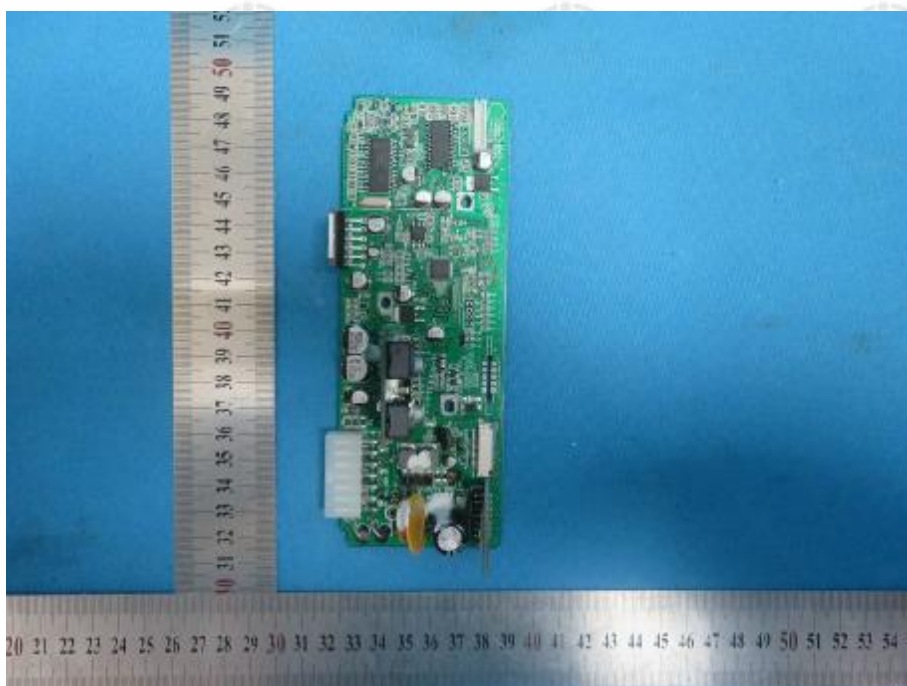


View of Product-26

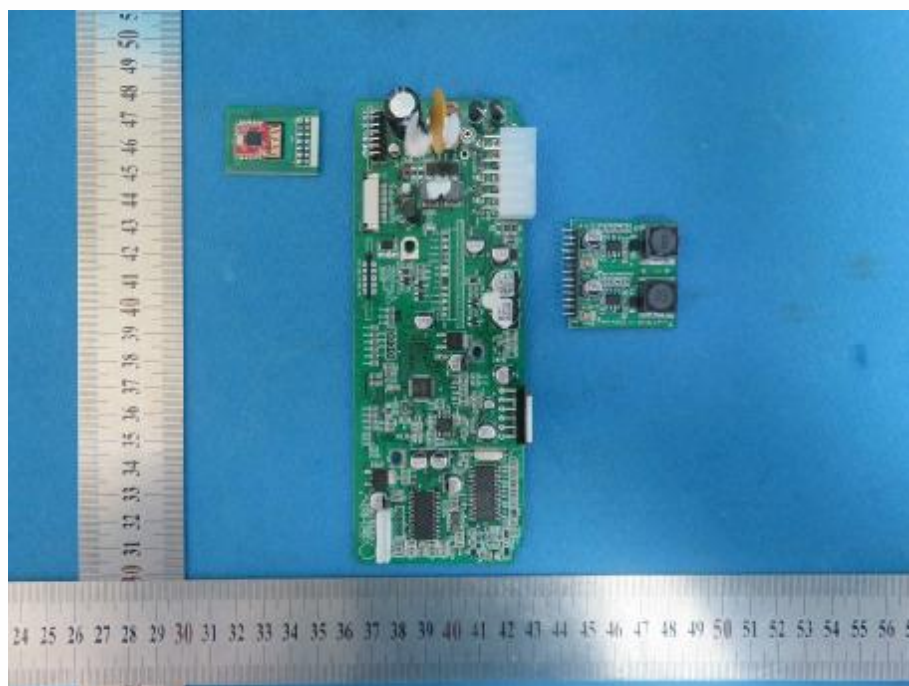

View of Product-27

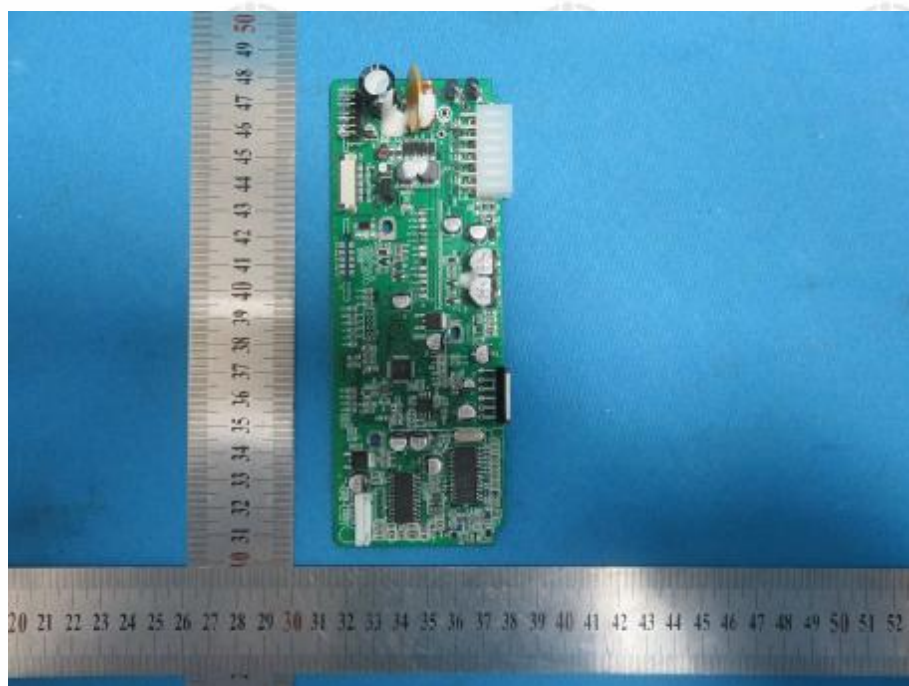


View of Product-28

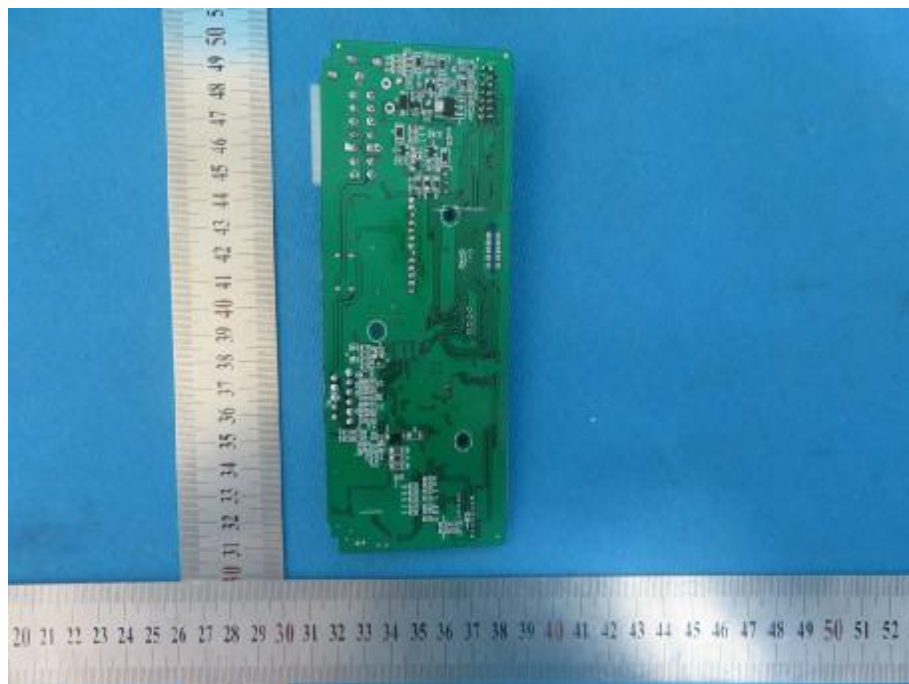


View of Product-29




View of Product-30

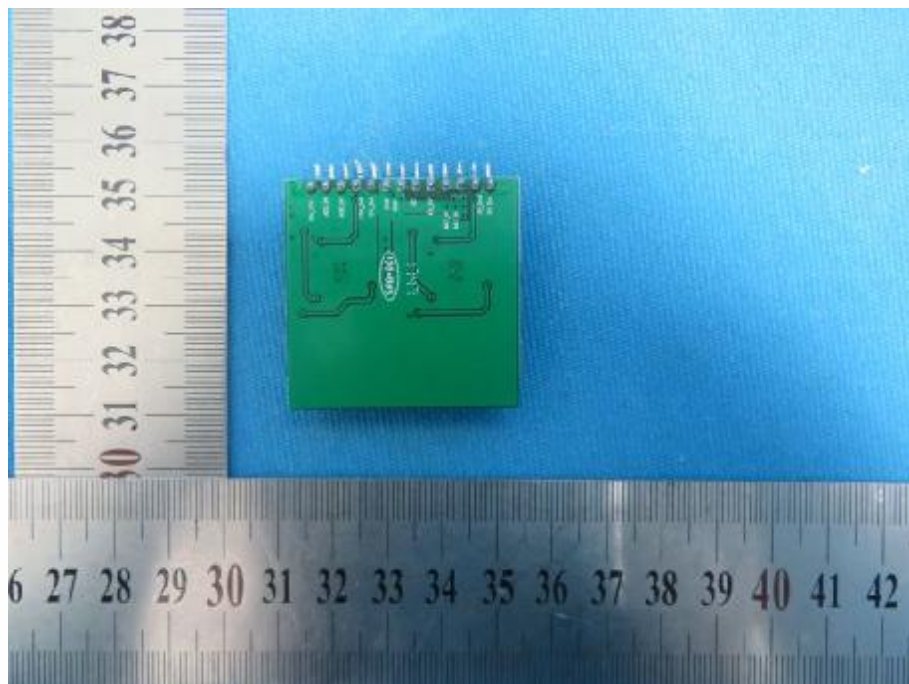


View of Product-31

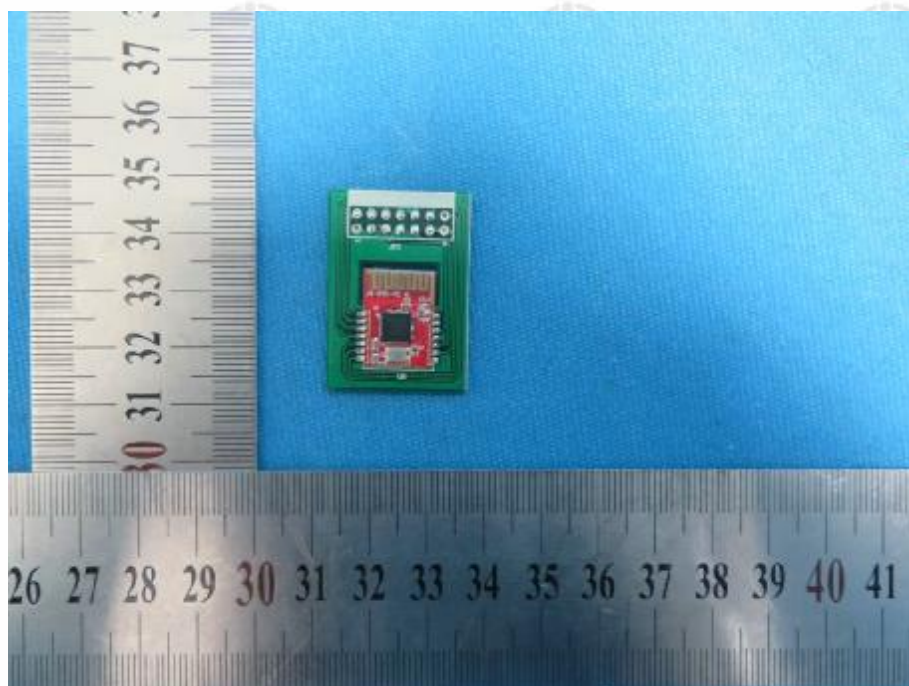


View of Product-32

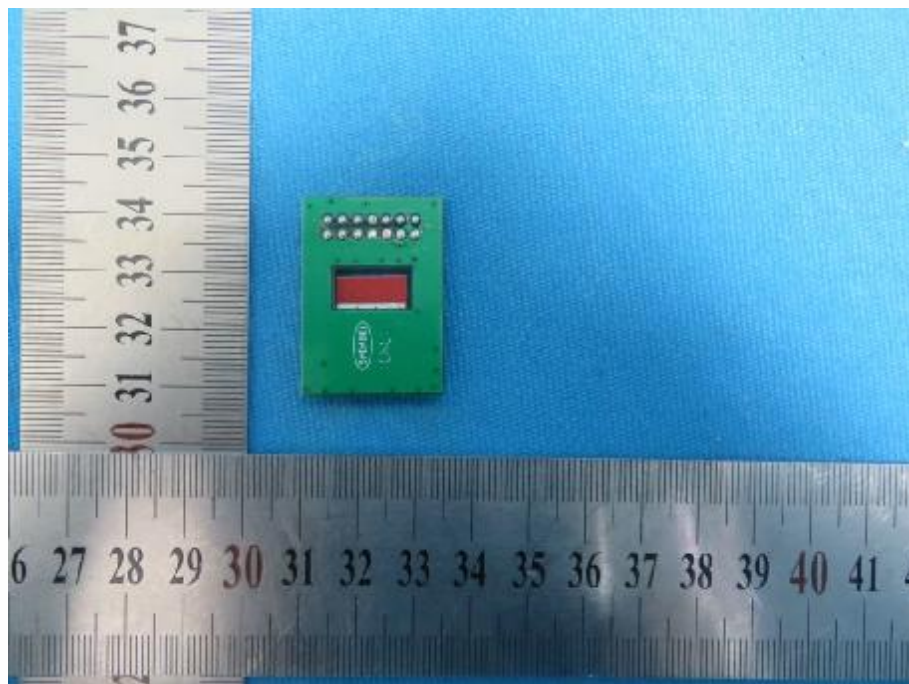


View of Product-33

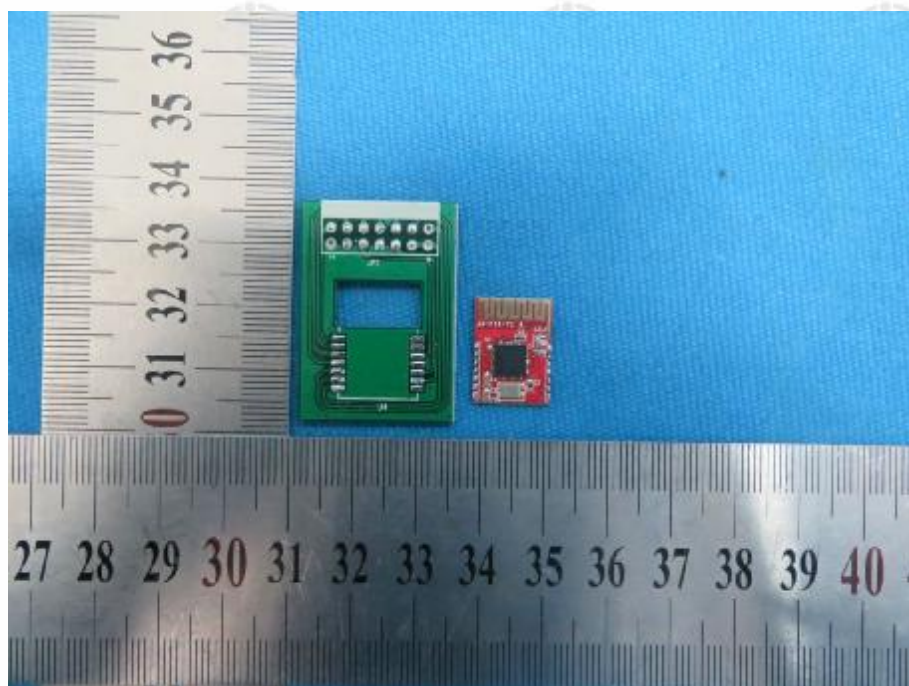

View of Product-34

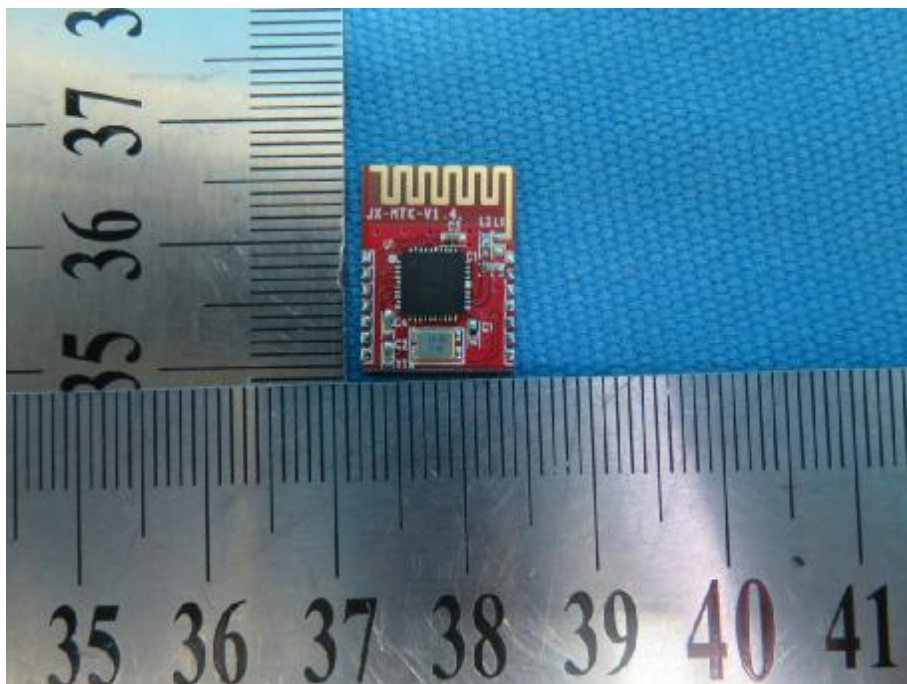

View of Product-35

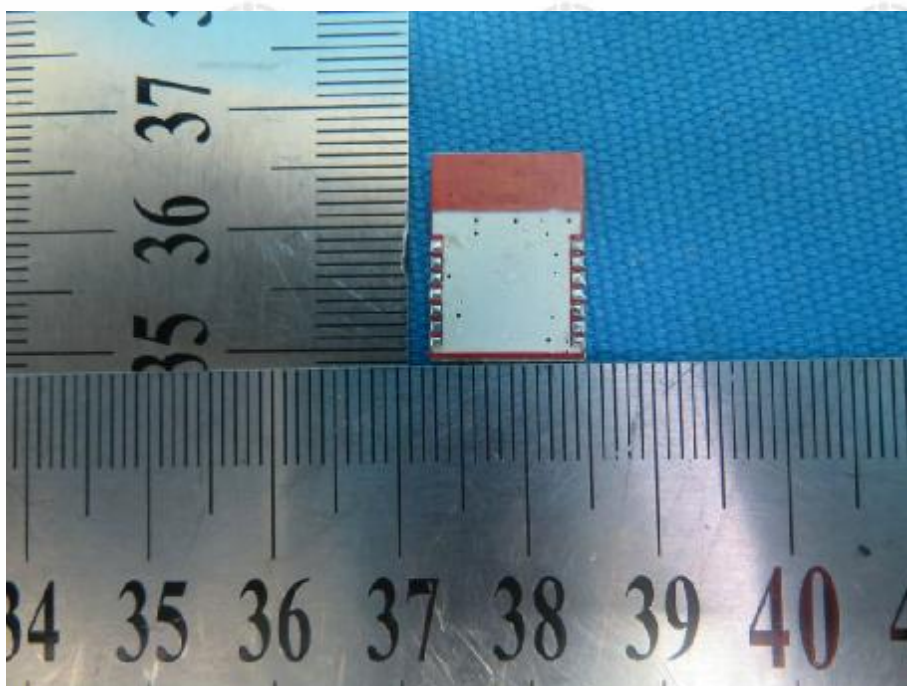

View of Product-36



View of Product-37

*** End of Report ***

The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of CTI, this report can't be reproduced except in full.