

WX013 user manual

Wireless Charger

Input voltage: USBA 5VDC (4.75–5.25V) \cong 1A

Output voltage: 5V (4.75–5.25V)

Output current: 0.7a max

Output efficiency: %80 (between coils)

Working frequency: 298–342kHz

Work temperature: -0°C – $+35^{\circ}\text{C}$

Relators: 10%~ 80%

Product introduction:

This product is only suitable for Foxconn models. It has the characteristics of small volume, convenient carriers, wide supply power supply, simple appearance and other characteristics.

Products have comprehensive and reliable temperature protection, over -pressure arrears protection, short circuit protection, and over current protection.

Operation step:

1. Insert this product USBA and insert it into a charger with USBA output.
2. Insert the charger and insert 110/220V to make the power supply work.
3. Put the product with a silicone pad and place it on the desktop.
4. Put the watch on the wireless charging and charge.
5. The watch prompts charging within 5 seconds. It means that the charging connection is successful.

Note: Specify the positive and negative product. There is one side of the silicone pad, put it on the desktop, and put the watch on the other side to charging.

Charging diagram

Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:


Reorient or relocate the receiving antenna.

Increase the separation between the equipment and receiver.

Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

Consult the dealer or an experienced radio/TV technician for help.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

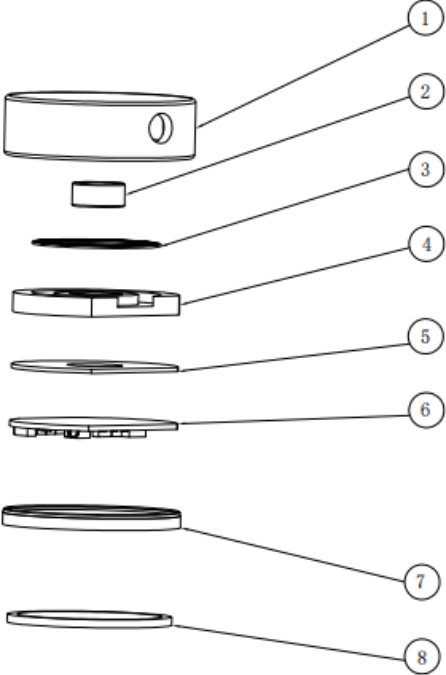

明细栏			
序号	数量	名称	描述
1	1	上壳	白色；导热PC;VDI21;ROHS无卤
2	1	磁铁	汝铁硼材料；镍银色；表面镀镍；ROHS
3	1	线圈	铜；铜黄色；引线留锡, ROHS
4	1	隔磁片	硅钢；ROHS/REACH无卤
5	1	散热片	红铜；带石墨烯片(背胶3M9448)；ROHS无卤
6	1	PCBA	FR4；ROHS无卤
7	1	下壳	白色；导热PC;VDI21;ROHS无卤
8	1	硅胶垫	硅橡胶；白色；VDI21；ROHS/REACH无卤
9	1	DC线	24号线；白色；SR套啤；塑胶材料表面VDI21；ROHS无卤

