



FCC TEST REPORT

FCC ID:2AP54-HZPFAST3H

Product Name:	Fast Wireless Charger
Trademark:	N/A
Model Number:	HZP-FAST3H
Prepared For :	Shenzhen Hongzhipu Technology Co., Ltd.
Address :	No.26, Pingxi South Road, Pingdi Street, Longgang District, Shenzhen, China
Prepared By :	Shenzhen BCTC Testing Co., Ltd.
Address :	BCTC Building & 1-2F, East of B Building, Pengzhou Industrial, Fuyuan 1st Road, Qiaotou Community, Fuyong Street, Bao'an District, Shenzhen, China
Test Date:	Jun. 27 - Jul. 10, 2018
Date of Report :	Jul. 11, 2018
Report No.:	BCTC-FY180603530E



TABLE OF CONTENTS

TEST REPORT DECLARATION	3
1.GENERAL INFORMATION	4
1.1. Report information	4
1.2. Measurement Uncertainty	4
1.3. Test Facility	4
1.4. Test Uncertainty	4
2.PRODUCT DESCRIPTION	5
2.1. EUT Description	5
2.2. Test mode	5
2.3. Block Diagram of EUT Configuration	5
2.4. Test Conditions	5
2.5. Description Of Support Units (Conducted Mode)	6
3.TEST RESULTS SUMMARY	6
4.TEST EQUIPMENT USED	7
4.1. For Conducted Emission Test	7
4.2. For Radiated Emission Measurement	7
5.CONDUCTED EMISSION TEST	8
5.1. Block Diagram of Test Setup	8
5.2. Test Standard	8
5.3. Conducted Emission Limit	8
5.4. EUT Configuration on Test	8
5.5. Operating Condition of EUT	9
5.6. Test Procedure	9
5.7. Test Result	9
6.RADIATED EMISSION MEASUREMENT	14
6.1. Block Diagram of Test Setup	14
6.2. Test Standard and Limit	15
6.3. EMI Test Receiver Setup	15
6.4. Test Procedure	16
6.5. Test Result	16
7.BANDWIDTH TEST	23
8.EUT TEST PHOTOS	25
9.EUT PHOTOS	27



TEST REPORT DECLARATION

Applicant : **Shenzhen Hongzhipu Technology Co., Ltd.**
Address : No.26, Pingxi South Road, Pingdi Street, Longgang District, Shenzhen, China
EUT Description : Fast Wireless Charger
Model Number : HZP-FAST3H
Serial Model : N/A

Test Standards:

FCC Part 15 C

This device described above has been tested by BCTC, and the test results show that the equipment under And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of BCTC, this document may be altered or revised by BCTC, personal only, and shall be noted in the revision of the document.

Prepared by(Engineer): Lake Xie

Lake Xie

Reviewer(Supervisor): Rita Xiao

Rita Xiao

Approved(Manager): Carson Zhang

Carson Zhang





1. GENERAL INFORMATION

1.1. Report information

- 1.1.1. This report is not a certificate of quality; it only applies to the sample of the specific product/equipment given at the time of its testing. The results are not used to indicate or imply that they are application to the similar items. In addition, such results must not be used to indicate or imply that BCTC approves recommends or endorses the manufacture, supplier or use of such product/equipment, or that BCTC in any way guarantees the later performance of the product/equipment.
- 1.1.2. The sample/s mentioned in this report is/are supplied by Applicant, BCTC therefore assumes no responsibility for the accuracy of information on the brand name, model number, origin of manufacture or any information supplied.
- 1.1.3. Additional copies of the report are available to the Applicant at an additional fee. No third part can obtain a copy of this report through BCTC, unless the applicant has authorized BCTC in writing to do so.

1.2. Measurement Uncertainty

Available upon request.

1.3. Test Facility

Site Description
Name of Firm : Shenzhen BCTC Testing Co., Ltd.

Site Location : BCTC Building & 1-2F, East of B Building,
Pengzhou Industrial, Fuyuan 1st Road, Qiaotou
Community, Fuyong Street, Bao'an District,
Shenzhen, China

1.4. Test Uncertainty

Conducted Emission = $\pm 2.66\text{dB}$
Uncertainty
Radiated Emission Uncertainty = $\pm 4.15\text{dB}$



2. PRODUCT DESCRIPTION

2.1.EUT Description

Description : Fast Wireless Charger

Applicant : **Shenzhen Hongzhipu Technology Co., Ltd.**
No.26, Pingxi South Road, Pingdi Street, Longgang District, Shenzhen, China

Manufacturer : **Shenzhen Hongzhipu Technology Co., Ltd.**
No.26, Pingxi South Road, Pingdi Street, Longgang District, Shenzhen, China

Model Number : HZP-FAST3H

Serial Model : N/A

Model : N/A

Difference


Power Supply : Input: DC 5V 2A /DC 9V 2A
Output: 5W/7.5W/10W

Work Frequency : 115-205KHz

2.2.Test mode

Test Modes	keeping TX+Charging mode
------------	--------------------------

2.3.Block Diagram of EUT Configuration

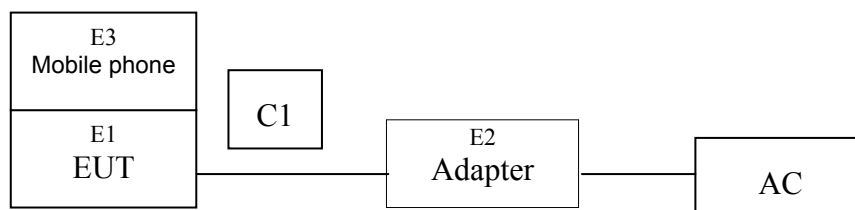

2.4.Test Conditions

Temperature: 23~25℃

Relative Humidity: 55~63 %



2.5. Description Of Support Units (Conducted Mode)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E1	Fast Wireless Charger	N/A	HZP-FAST3H	N/A	EUT
E2	Adapter	N/A	BCTC-001	N/A	AC100-240V~50/60Hz Output: 5V $\overline{\text{---}}$ 2A 9V $\overline{\text{---}}$ 2A
E3	Mobile phone	N/A	Apple Watch	N/A	

Item	Shielded Type	Ferrite Core	Length	Note
C1	NO	NO	1.0M	DC cable unshielded

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) “YES” is means “shielded” “with core”; “NO” is means “unshielded” “without core”.

3. TEST RESULTS SUMMARY

Table 1 Test Results Summary

Test Items	Test Results
Conducted disturbance	Pass
Radiated disturbance	Pass

Remark: “N/A” means “Not applicable.”



4. TEST EQUIPMENT USED

4.1. For Conducted Emission Test


Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Test Receiver	R&S	ESCI	1166.5950K03-1 01165-ha	2017.08.27	2018.08.26
2	LISN	SCHWARZBECK	NSLK8127	8127739	2017.08.27	2018.08.26
3	LISN	R&S	NSLK8126	8126487	2017.08.27	2018.08.26
4	RF cables	R&S	R204	R20X	2017.08.27	2018.08.26
5	Attenuator	R&S	ESH3-Z2	143206	2017.08.27	2018.08.26

4.2. For Radiated Emission Measurement

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
5	Horn Antenna (14GHz-40GHz)	SCHWARZBECK	BBHA 9170	9170-181	2017.09.03	2018.09.02
6	Amplifier (9kHz-6GHz)	SCHWARZBECK	BBV9744	9744-0037	2017.08.27	2018.08.26
7	Amplifier (1GHz-18GHz)	SCHWARZBECK	BBV9718	9718-309	2017.08.27	2018.08.26
8	Amplifier (18GHz-40GHz)	SCHWARZBECK	BBV 9721	9721-205	2017.08.27	2018.08.26
9	Loop Antenna (9kHz-30MHz)	SCHWARZBECK	FMZB1519B	00014	2017.09.03	2018.09.02
10	RF cables1 (9kHz-1GHz)	R&S	R203	R20X	2017.08.27	2018.08.26
11	RF cables2 (1GHz-40GHz)	R&S	R204	R21X	2017.08.27	2018.08.26
12	Antenna connector	Florida RF Labs	N/A	RF 01#	2017.08.27	2018.08.26
13	Power Metter	ANRITSU	ML2487A	6K00001568	2017.08.27	2018.08.26
14	Power Sensor (AV)	ANRITSU	ML2491A	030989	2017.08.27	2018.08.26
15	Signal Analyzer 9kHz-26.5GHz	Agilent	N9010A	MY48030494	2017.08.27	2018.08.26
16	Test Receiver 20kHz-40GHz	R&S	ESU 40	100376	2017.08.27	2018.08.26
17	D.C. Power Supply	LongWei	PS-305D	010964729	2017.08.27	2018.08.26

5. CONDUCTED EMISSION TEST

5.1. Block Diagram of Test Setup

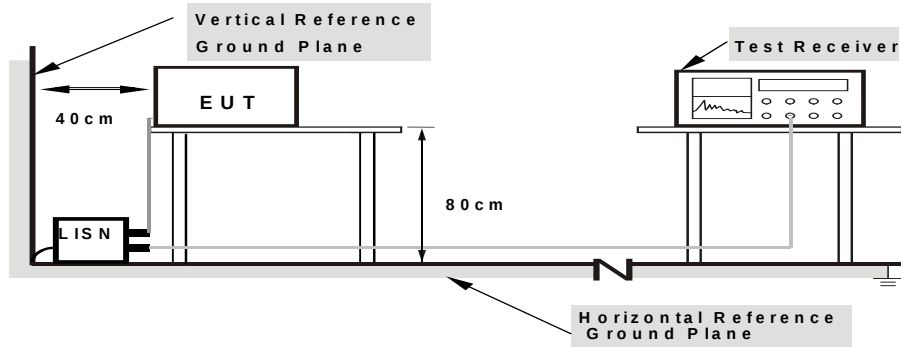

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure.
The specification used was with the FCC Part 15.207 limits.

(EUT: **Watch Stand with Charging Cable**)

5.2. Test Standard

FCC§15.207

5.3. Conducted Emission Limit

Frequency MHz	Limits dB(μV)	
	Quasi-peak Level	Average Level
0.15 ~ 0.50	66 ~ 56*	56 ~ 46*
0.50 ~ 5.00	56	46
5.00 ~ 30.00	60	50

Notes: 1. *Decreasing linearly with logarithm of frequency.

5.4. EUT Configuration on Test

The following equipments are installed on conducted emission test to meet FCC Part 15.207 requirement and operating in a manner, which tends to maximize its emission characteristics in a normal application.



5.4.1.milestone dual

Model Number: **K118-1291**

5.5.Operating Condition of EUT

5.5.1.Setup the EUT and simulators as shown in Section 5.1.

5.5.2.Turn on the power of all equipments.

5.5.3.Let the EUT work in test modes (EUT Working) and test it.

5.6.Test Procedure

The EUT is put on a table of non-conducting material that is 80cm high. The vertical conducting wall of shielding is located 40cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.). A EMI test receiver (R&S Test Receiver ESHS30) is used to test the emissions form both sides of AC line. The bandwidth of EMI test receiver is set at 9kHz.

The bandwidth of the test receiver (R&S Test Receiver ESHS30) is set at 10KHz.

We pretest AC 120V and AC 240V, the worst voltage was AC 120V and the data recording in the report.


5.7.Test Result

PASS

ALL the input DC5V 2A,DC9V 2A model for 5W, 7.5W,10W have test, the worst case have record the report.



EUT:	Fast Wireless Charger	Model Name :	HZP-FAST3H
Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101kPa	Phase :	L
Test Voltage :	DC 9V, 2A form Adapter AC 120V/60Hz	Test Mode:	10W

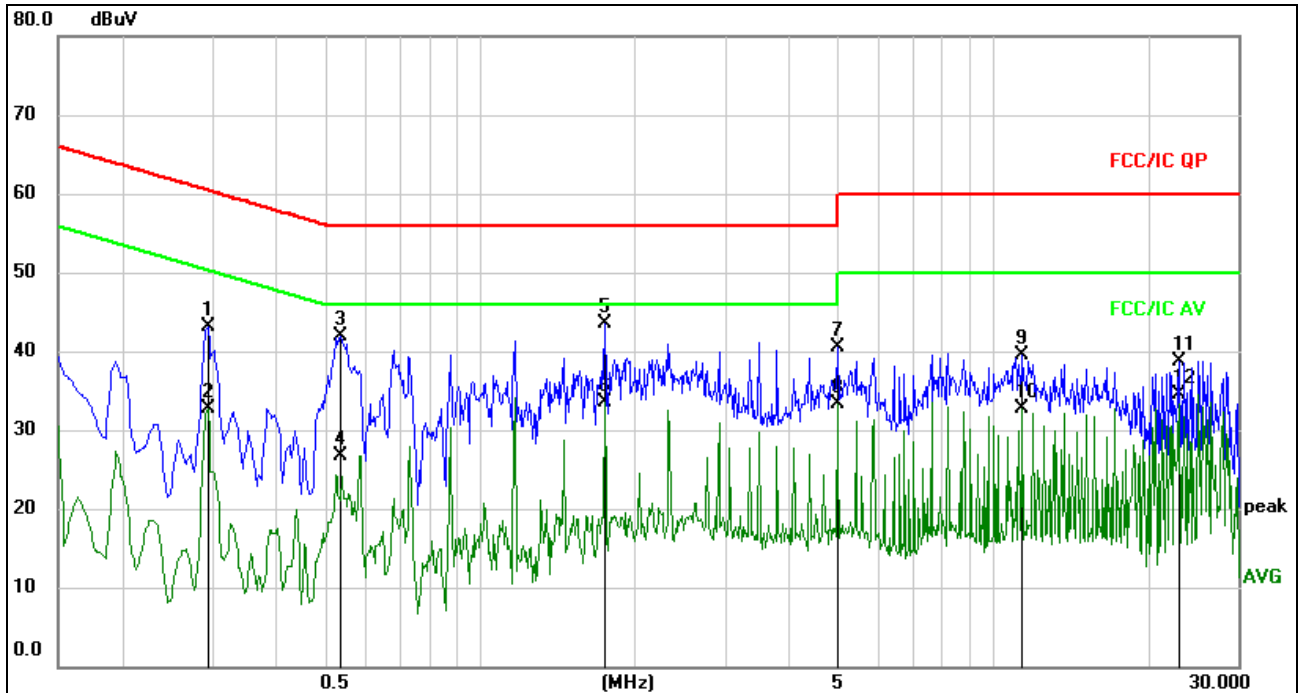


Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.2940	33.25	9.78	43.03	60.41	-17.38	QP	
2		0.2940	22.83	9.78	32.61	50.41	-17.80	AVG	
3		0.5325	32.07	9.92	41.99	56.00	-14.01	QP	
4		0.5325	16.79	9.92	26.71	46.00	-19.29	AVG	
5		1.7520	33.65	9.78	43.43	56.00	-12.57	QP	
6	*	1.7520	23.67	9.78	33.45	46.00	-12.55	AVG	
7		4.9605	30.51	9.90	40.41	56.00	-15.59	QP	
8		4.9605	23.48	9.90	33.38	46.00	-12.62	AVG	
9		11.3774	29.66	9.92	39.58	60.00	-20.42	QP	
10		11.3774	22.73	9.92	32.65	50.00	-17.35	AVG	
11		23.0370	28.68	10.11	38.79	60.00	-21.21	QP	
12		23.0370	24.45	10.11	34.56	50.00	-15.44	AVG	



EUT:	Fast Wireless Charger	Model Name. :	HZP-FAST3H
Temperature:	26 °C	Relative Humidity:	54%
Pressure:	1010hPa	Phase :	N
Test Voltage :	DC 9V, 2A form Adapter AC 120V/60Hz	Test Mode:	10W

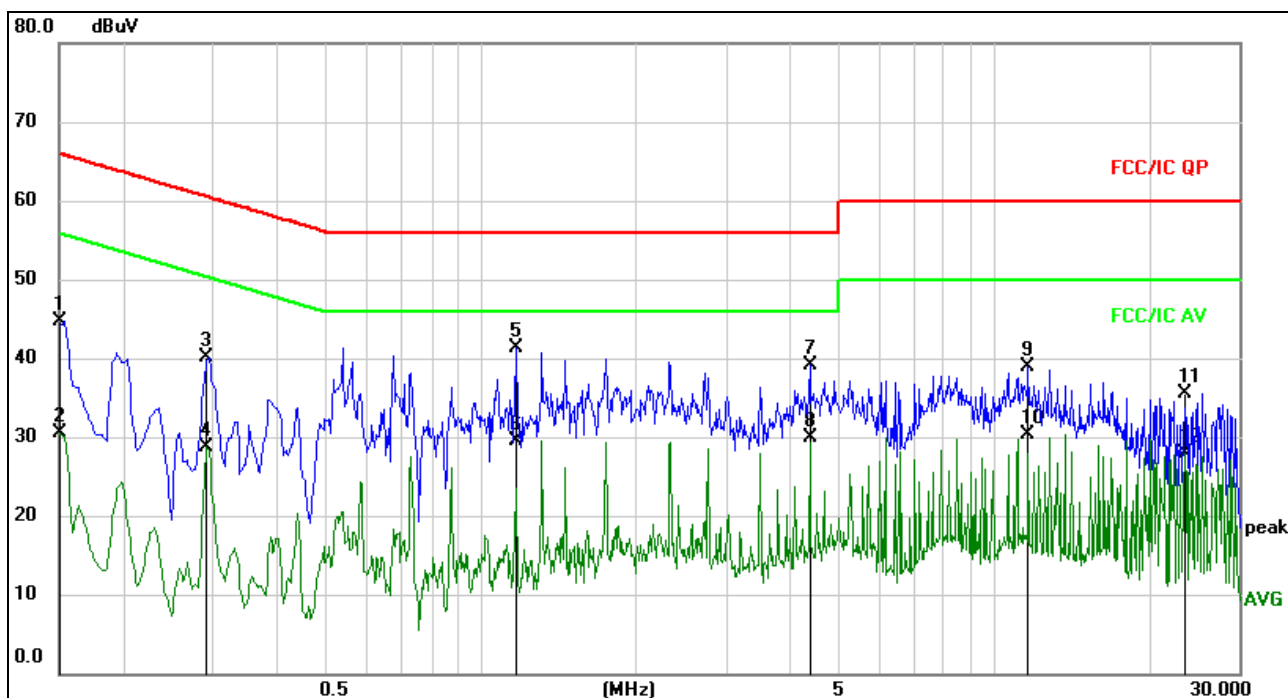


Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1500	34.86	9.77	44.63	66.00	-21.37	QP	
2		0.1500	20.66	9.77	30.43	56.00	-25.57	AVG	
3		0.2895	30.37	9.78	40.15	60.54	-20.39	QP	
4		0.2895	18.89	9.78	28.67	50.54	-21.87	AVG	
5	*	1.1670	31.44	9.77	41.21	56.00	-14.79	QP	
6		1.1670	19.70	9.77	29.47	46.00	-16.53	AVG	
7		4.3755	29.31	9.88	39.19	56.00	-16.81	QP	
8		4.3755	20.10	9.88	29.98	46.00	-16.02	AVG	
9		11.6700	28.92	9.93	38.85	60.00	-21.15	QP	
10		11.6700	20.43	9.93	30.36	50.00	-19.64	AVG	
11		23.6265	25.32	10.12	35.44	60.00	-24.56	QP	
12		23.6265	17.88	10.12	28.00	50.00	-22.00	AVG	



EUT:	Fast Wireless Charger	Model Name :	HZP-FAST3H
Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101kPa	Phase :	L
Test Voltage :	DC 5V, 2A form Adapter AC 120V/60Hz	Test Mode:	7.5W

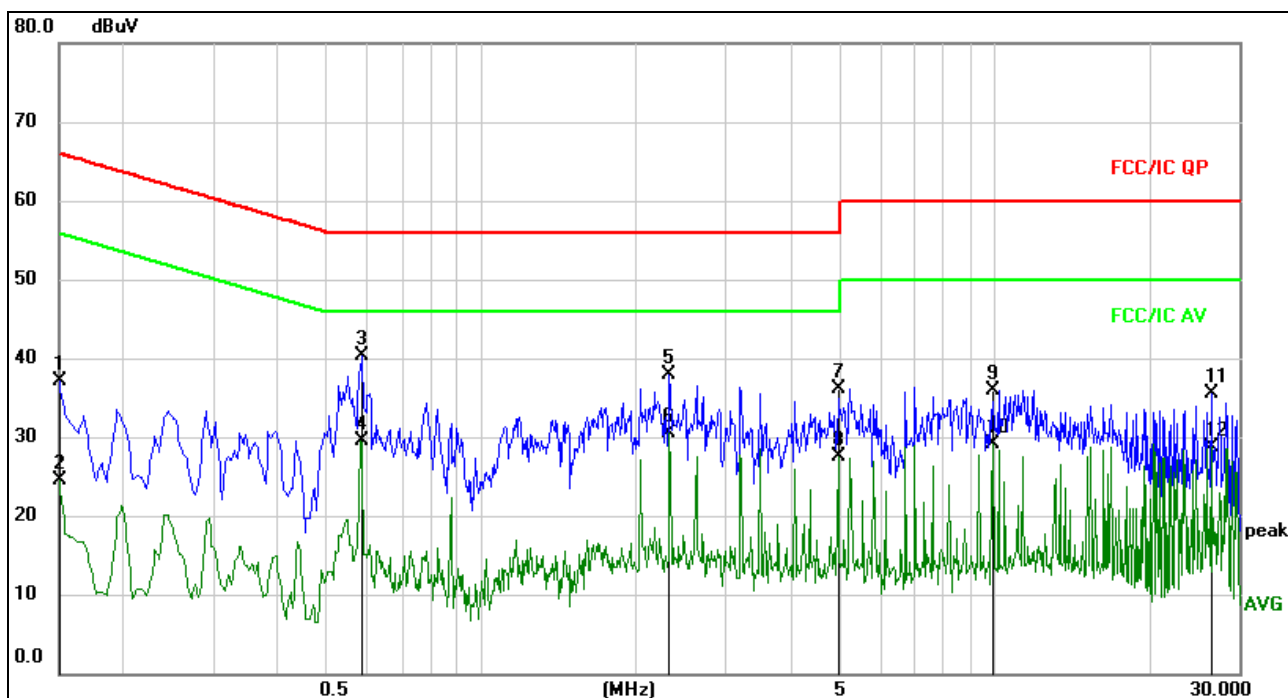


Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1500	27.24	9.77	37.01	66.00	-28.99	QP	
2		0.1500	14.68	9.77	24.45	56.00	-31.55	AVG	
3		0.5820	30.27	10.13	40.40	56.00	-15.60	QP	
4		0.5820	19.34	10.13	29.47	46.00	-16.53	AVG	
5		2.3325	28.01	9.80	37.81	56.00	-18.19	QP	
6	*	2.3325	20.61	9.80	30.41	46.00	-15.59	AVG	
7		4.9560	26.15	9.90	36.05	56.00	-19.95	QP	
8		4.9560	17.61	9.90	27.51	46.00	-18.49	AVG	
9		9.9150	26.09	9.89	35.98	60.00	-24.02	QP	
10		9.9150	19.13	9.89	29.02	50.00	-20.98	AVG	
11		26.5425	25.36	10.14	35.50	60.00	-24.50	QP	
12		26.5425	18.62	10.14	28.76	50.00	-21.24	AVG	



EUT:	Fast Wireless Charger	Model Name. :	HZP-FAST3H
Temperature:	26 °C	Relative Humidity:	54%
Pressure:	1010hPa	Phase :	N
Test Voltage :	DC 5V, 2A form Adapter AC 120V/60Hz	Test Mode:	7.5W

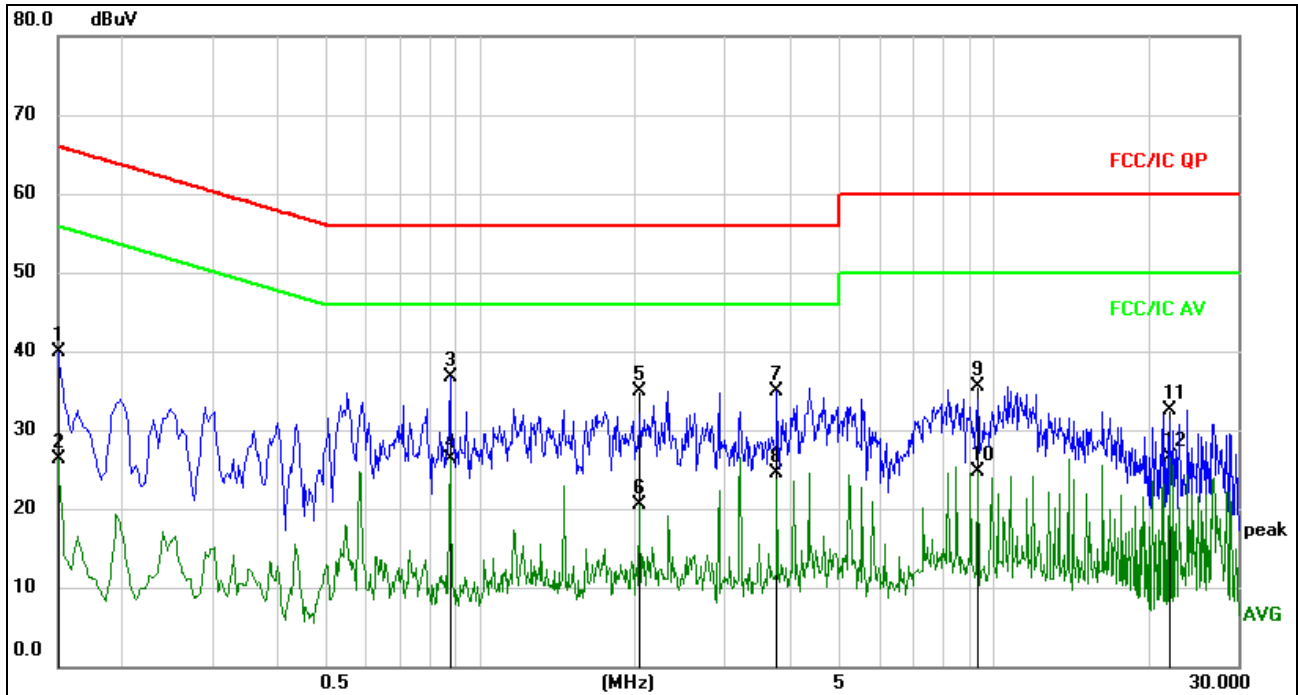

Remark:


1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1500	30.07	9.77	39.84	66.00	-26.16	QP	
2		0.1500	16.49	9.77	26.26	56.00	-29.74	AVG	
3	*	0.8745	26.92	9.81	36.73	56.00	-19.27	QP	
4		0.8745	16.42	9.81	26.23	46.00	-19.77	AVG	
5		2.0400	25.19	9.79	34.98	56.00	-21.02	QP	
6		2.0400	10.71	9.79	20.50	46.00	-25.50	AVG	
7		3.7905	25.12	9.86	34.98	56.00	-21.02	QP	
8		3.7905	14.68	9.86	24.54	46.00	-21.46	AVG	
9		9.3344	25.57	9.90	35.47	60.00	-24.53	QP	
10		9.3344	14.89	9.90	24.79	50.00	-25.21	AVG	
11		22.1685	22.30	10.11	32.41	60.00	-27.59	QP	
12		22.1685	16.34	10.11	26.45	50.00	-23.55	AVG	

6. RADIATED EMISSION MEASUREMENT

6.1. Block Diagram of Test Setup


6.1.1. Block Diagram of connection between the EUT and the simulators

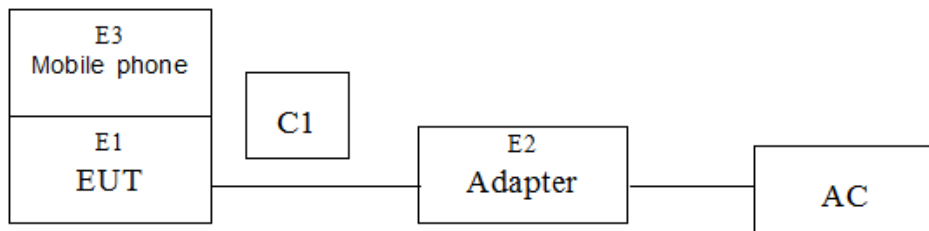


(EUT: **Watch Stand with Charging Cable**)

6.1.2. Anechoic Chamber Test Setup Diagram

(A) Radiated Emission Test-Up Frequency Below 30MHz

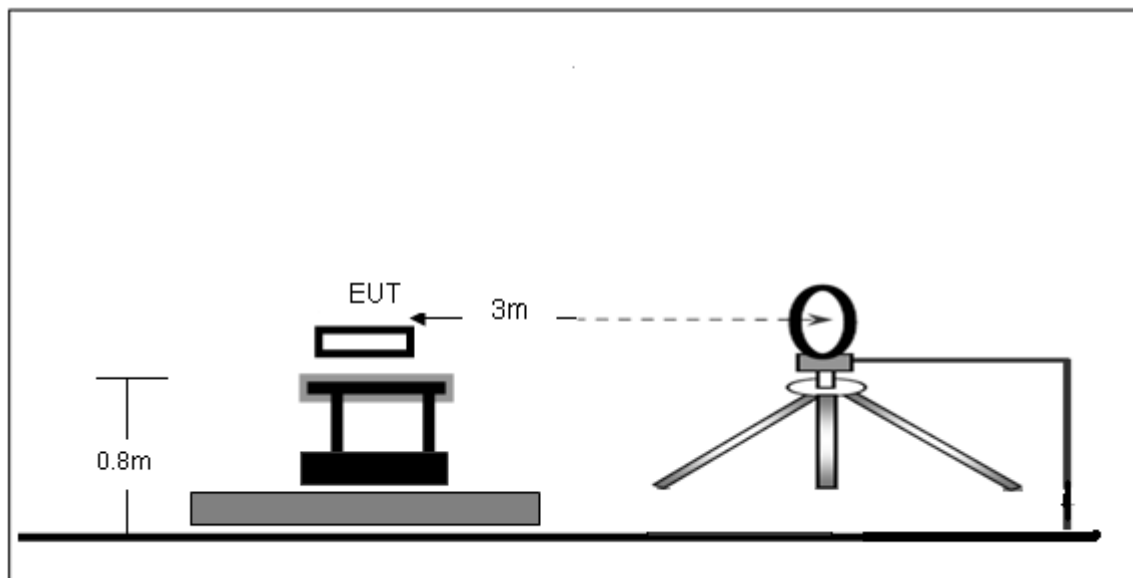

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

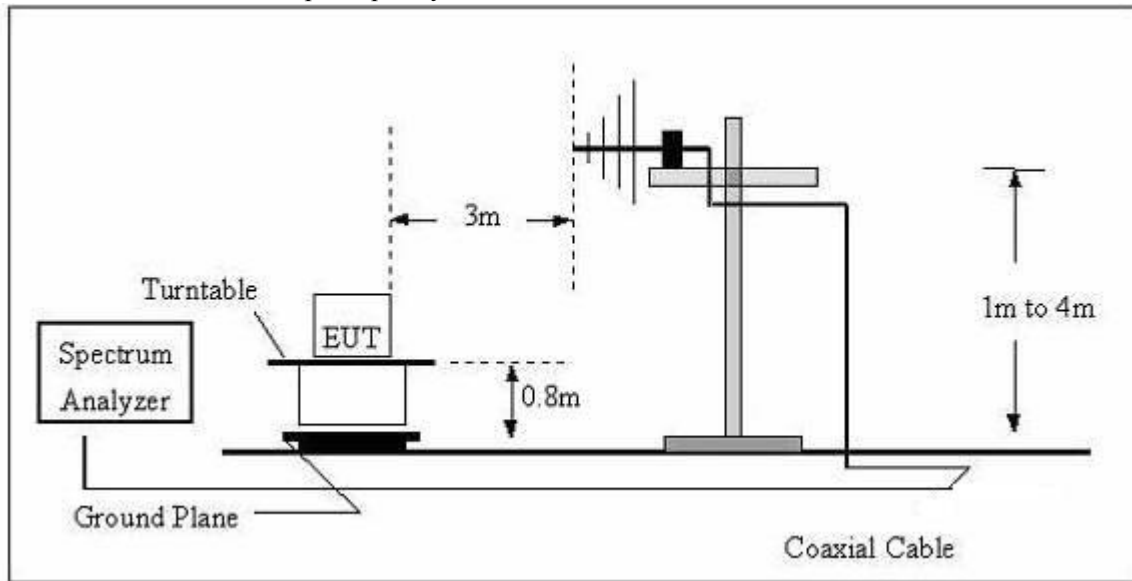

The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209 and FCC 15.205 limits.

6.2. Test Standard and Limit

FCC §15.209; §15.205

Test Standard	FCC Part15 C Section 15.209 and 15.205				
Test Limit	Frequency (MHz)	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz~0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz~1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz~30MHz	30	-	-	30
	30MHz~88MHz	100	40.0	Quasi-peak	3
	88MHz~216MHz	150	43.5	Quasi-peak	3
	216MHz~960MHz	200	46.0	Quasi-peak	3
	960MHz~1000MHz	500	54.0	Quasi-peak	3
	Above 1000MHz	500	54.0	Average	3
		-	74.0	Peak	3

6.3. EMI Test Receiver Setup

The system was investigated from 9kHz to1GHz.

During the radiated emission test, the EMI test receiver setup was set with the following configurations:



Frequency Range	RBW	Video B/W	Detector
9 kHz – 150 kHz	200 kHz	1 kHz	QP
150 kHz – 30MHz	9kHz	30kHz	QP
30 MHz – 1000 MHz	120 kHz	300 kHz	QP

Note: For the frequency bands 9-90 kHz and 110-490 kHz, the test was based on average detector.

6.4.Test Procedure

The EUT is placed on a turn table which is 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can move up and down between 1 to 4 meters to find out the maximum emission level. Broadband antenna (calibrated by dipole antenna) are used as a receiving antenna. Both horizontal and vertical polarization of the antenna are set on measurement.

6.5.Test Result

PASS

ALL the input DC5V 2A,DC9V 2A model for 5W, 7.5W,10W have test, the worst case have record the report.

**9kHz-30MHz**

EUT:	Fast Wireless Charger	Model Name :	HZP-FAST3H
Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101kPa	Polarization :	Horizontal
Test Voltage :	DC 9V, 2A form Adapter AC120V/60Hz		
Test Mode :	10W		

Frequency (kHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
19.0500	39.42	20.15	59.57	142.01	-82.44	
19.0500	36.17	20.15	56.32	122.01	-65.69	AV
49.6500	50.66	20.33	70.99	133.69	-62.70	PK
49.6500	46.38	20.33	66.71	113.69	-46.98	AV
145.5200	68.22	20.55	88.77	124.35	-35.58	PK
145.5200	63.68	20.55	84.23	104.35	-20.12	AV
762.5400	31.33	20.64	51.97	69.96	-17.99	QP
845.2600	35.18	21.26	56.44	69.06	-12.62	QP
1168.2600	24.69	22.32	47.01	66.25	-19.24	QP

Note:

Pre-scan in the all of mode, the worst case in of was recorded.

Factor = antenna factor + cable loss – pre-amplifier.

Margin = Emission Level- Limit.

**9kHz-30MHz**

EUT:	Fast Wireless Charger	Model Name :	HZP-FAST3H
Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101kPa	Polarization :	Horizontal
Test Voltage :	DC 5V, 2A form Adapter AC120V/60Hz		
Test Mode :	7.5W		

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(kHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
18.2200	39.42	20.15	59.57	142.39	-82.82	PK
18.2200	36.17	20.15	56.32	122.39	-66.07	AV
51.2600	50.66	20.33	70.99	133.41	-62.42	PK
51.2600	46.38	20.33	66.71	113.41	-46.70	AV
137.2600	68.22	20.55	88.77	124.83	-36.06	PK
137.6200	63.68	20.55	84.23	104.83	-20.60	AV
785.6300	31.33	20.64	51.97	69.70	-17.73	QP
884.2900	35.18	21.26	56.44	68.67	-12.23	QP
1257.5600	24.69	22.32	47.01	65.61	-18.60	QP

Note:

Pre-scan in the all of mode, the worst case in of was recorded.


Factor = antenna factor + cable loss – pre-amplifier.

Margin = Emission Level- Limit.



30MHz-1GHz

EUT:	Fast Wireless Charger	Model Name :	HZP-FAST3H
Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101kPa	Polarization :	Horizontal
Test Voltage :	DC 9V, 2A form Adapter AC120V/60Hz		
Test Mode :	10W		

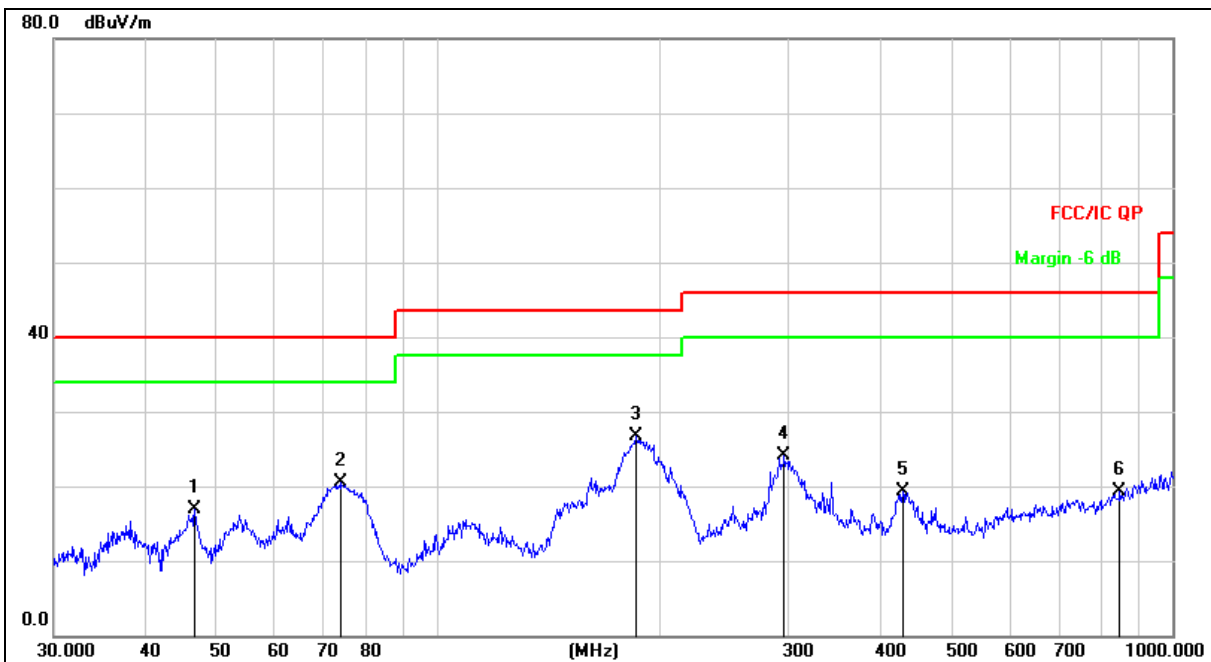


Remark:
Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		46.6664	30.97	-14.01	16.96	40.00	-23.04	QP
2		73.8756	38.87	-18.38	20.49	40.00	-19.51	QP
3	*	185.7882	44.15	-17.50	26.65	43.50	-16.85	QP
4		296.1836	37.75	-13.67	24.08	46.00	-21.92	QP
5		429.5228	30.15	-10.88	19.27	46.00	-26.73	QP
6		848.0563	22.81	-3.52	19.29	46.00	-26.71	QP



EUT:	Fast Wireless Charger	Model Name :	HZP-FAST3H
Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101kPa	Polarization :	Vertical
Test Voltage :	DC 9V, 2A form Adapter AC120V/60Hz		
Test Mode :	10W		

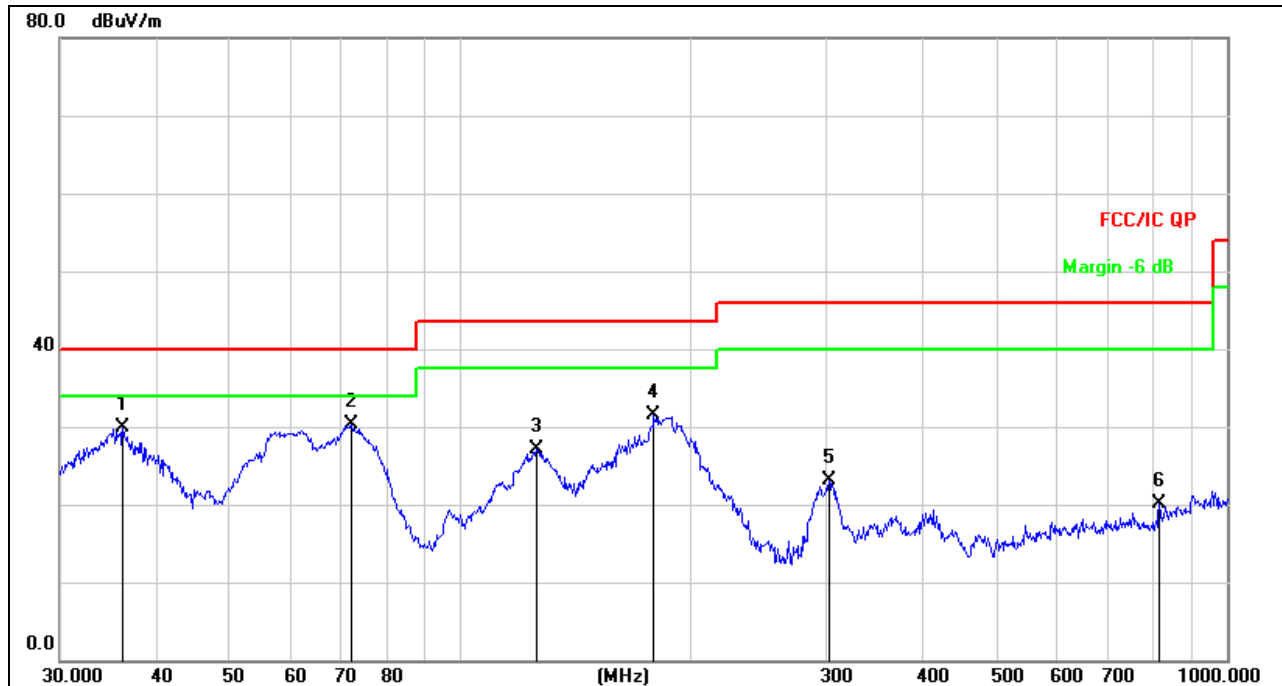

Remark:


Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		36.2541	45.93	-16.04	29.89	40.00	-10.11	QP
2	*	72.0843	48.26	-18.01	30.25	40.00	-9.75	QP
3		125.8864	45.55	-18.40	27.15	43.50	-16.35	QP
4		178.7584	49.62	-18.14	31.48	43.50	-12.02	QP
5		302.4812	36.49	-13.47	23.02	46.00	-22.98	QP
6		815.9678	24.25	-4.07	20.18	46.00	-25.82	QP



30MHz-1GHz

EUT:	Fast Wireless Charger	Model Name :	HZP-FAST3H
Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101kPa	Polarization :	Horizontal
Test Voltage :	DC 5V, 2A form Adapter AC120V/60Hz		
Test Mode :	7.5W		

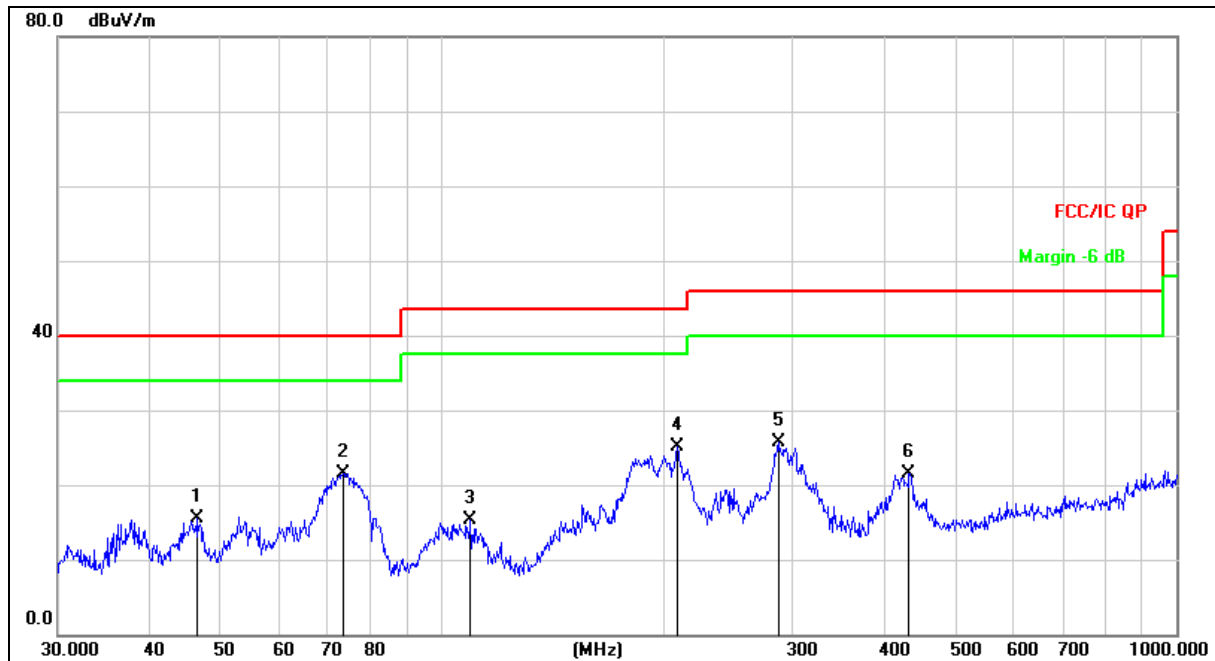


Remark:
Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
		MHz	Level	Factor	ment			Detector
			dBuV	dB	dBuV/m	dB/m	dB	
1		46.5030	29.55	-14.01	15.54	40.00	-24.46	QP
2		73.3593	39.78	-18.27	21.51	40.00	-18.49	QP
3		109.4116	30.96	-15.74	15.22	43.50	-28.28	QP
4	*	209.3129	41.27	-16.23	25.04	43.50	-18.46	QP
5		286.9823	39.82	-14.19	25.63	46.00	-20.37	QP
6		432.5457	32.37	-10.84	21.53	46.00	-24.47	QP



EUT:	Fast Wireless Charger	Model Name :	HZP-FAST3H
Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101kPa	Polarization :	Vertical
Test Voltage :	DC 5V, 2A form Adapter AC120V/60Hz		
Test Mode :	7.5W		

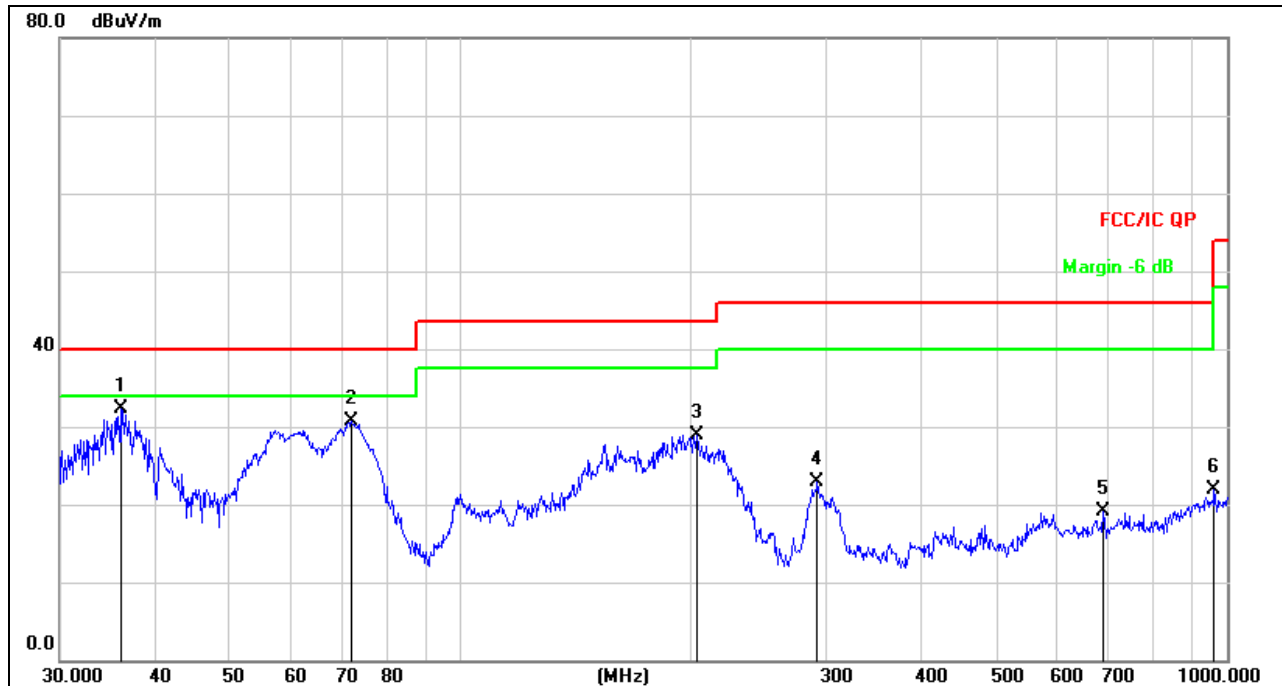

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1	*	36.0007	48.44	-16.13	32.31	40.00	-7.69	QP
2		72.0843	48.69	-18.01	30.68	40.00	-9.32	QP
3		203.5228	45.22	-16.26	28.96	43.50	-14.54	QP
4		292.0583	36.85	-13.90	22.95	46.00	-23.05	QP
5		689.5644	25.18	-6.00	19.18	46.00	-26.82	QP
6		962.1623	23.94	-1.96	21.98	54.00	-32.02	QP



7. BANDWIDTH TEST

1. Set RBW = 1 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission.


TEST SETUP

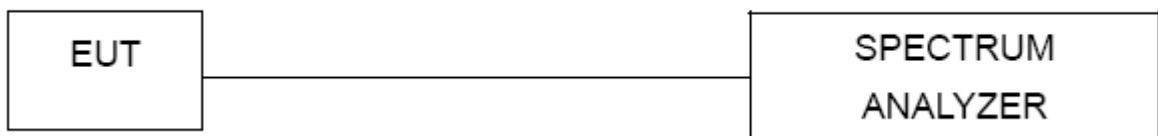




EUT:	Fast Wireless Charger	Model Name :	HZP-FAST3H
Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101kPa		

Frequency (KHz)	20dB bandwidth (KHz)	99% bandwidth (KHz)	Result
130	10.00	9.7576	Pass

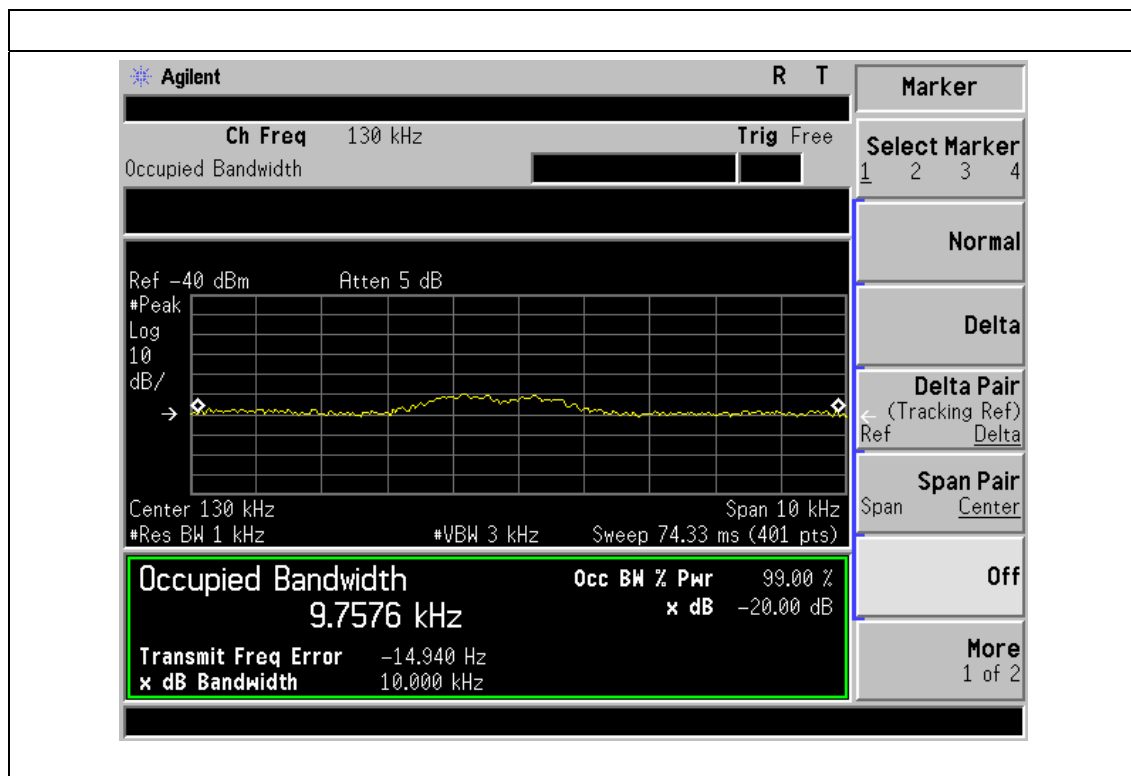


8. EUT TEST PHOTOS

Conducted Measurement Photos

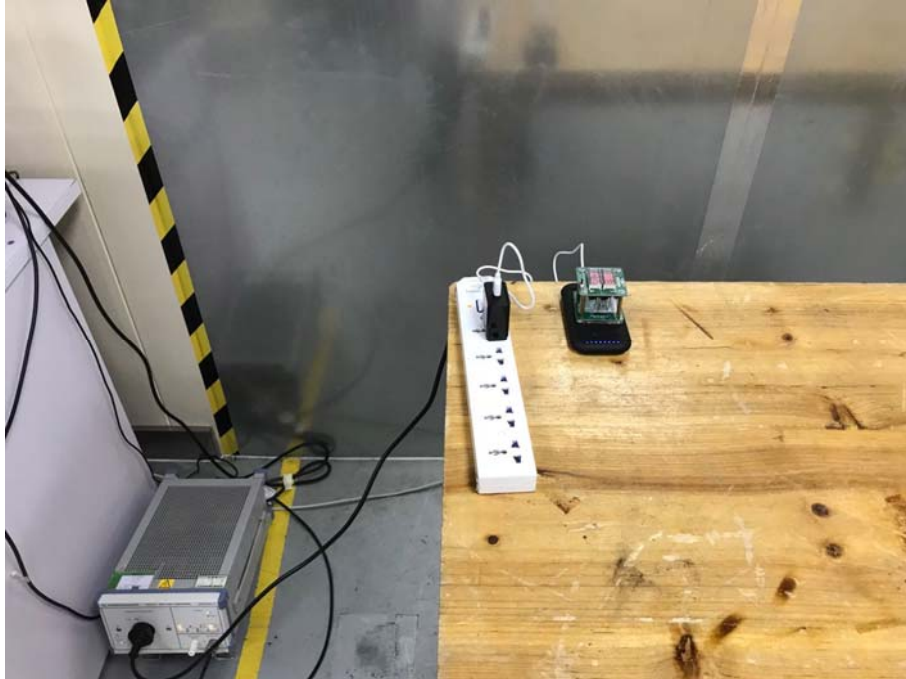

Radiated Measurement Photos
9KHz-30MHz

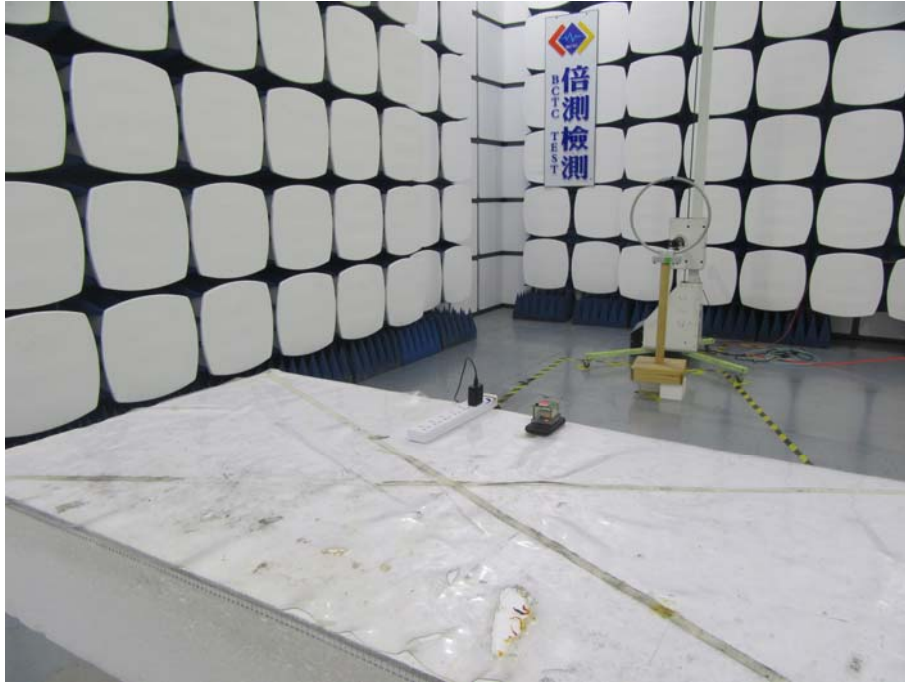

30MHz-1GHz



9. EUT PHOTOS



***** END OF REPORT *****