



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

No. 1 Workshop, M-10, Middle section, Science & Technology Park,
Shenzhen, Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053
Fax: +86 (0) 755 2671 0594
Email: ee.shenzhen@sgs.com

Report No.: SZEM180600492004
Page: 1 of 32

TEST REPORT

Application No.: SZEM1806004920RG
Applicant: Treswave LLC
Address of Applicant: Treswave LLC, 12775 CRAWFORD DR, TUSTIN, CA 92782
Manufacturer: Treswave LLC
Address of Manufacturer: Treswave LLC, 12775 CRAWFORD DR, TUSTIN, CA 92782
Factory: Treswave LLC
Address of Factory: Treswave LLC, 12775 CRAWFORD DR, TUSTIN, CA 92782
Equipment Under Test (EUT):
EUT Name: TW801
Model No.: TW801
Trade mark: Treswave
FCC ID: 2AP6Q-TW801
Standard(s) : 47 CFR Part 15, Subpart B
Date of Receipt: 2018-04-25
Date of Test: 2018-05-04 to 2018-05-09
Date of Issue: 2018-07-27

Test Result:	Pass*
---------------------	-------

* In the configuration tested, the EUT complied with the standards specified above.



Keny Xu

EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180600492004
Page: 2 of 32

Revision Record				
Version	Chapter	Date	Modifier	Remark
01		2018-07-27		Original

Authorized for issue by:				
				
		<hr/> Leo Lai /Project Engineer		
				
		<hr/> Eric Fu /Reviewer		

2 Test Summary

Emission Part				
Item	Standard	Method	Requirement	Result
Conducted Emissions at Mains Terminals (150kHz-30MHz)	47 CFR Part 15, Subpart B	ANSI C63.4:2014	Class B	Pass
Radiated Emissions (30MHz-1GHz)	47 CFR Part 15, Subpart B	ANSI C63.4:2014	Class B	Pass
Radiated Emissions (above 1GHz)	47 CFR Part 15, Subpart B	ANSI C63.4:2014	Class B	Pass

Internal Source	Upper Frequency
Below 1.705MHz	30MHz
1.705MHz to 108MHz	1GHz
108MHz to 500MHz	2GHz
500MHz to 1GHz	5GHz
Above 1GHz	5th harmonic of the highest frequency or 40GHz, whichever is lower

The difference between old and new are show as below. Other parts of the mobile phone are the same. The equipment, is the identical design and construction, with only difference on the software version to reduce the frequency band (LTE Band 2/4/5) to the original FCC Grant cited above.

1. The software change is only reduce some frequency band, will not change the electrical/IO/RF characteristics, and antenna.
2. Color change: color change to black from silver
3. ID change: change top material of a short glass to plastic. It is not the functional area.
4. Camera lens shape change: from square to round

Note:

According to the difference above, the TW801 is share the same data of the test report SZEM180300241704, but do the spot check for Radiated Emission(30M~1G).

3 Contents

	Page
1 COVER PAGE	1
2 TEST SUMMARY	3
3 CONTENTS	4
4 GENERAL INFORMATION	5
4.1 DETAILS OF E.U.T	5
4.2 DESCRIPTION OF SUPPORT UNITS	5
4.3 MEASUREMENT UNCERTAINTY	5
4.4 TEST LOCATION	6
4.5 TEST FACILITY	6
4.6 DEVIATION FROM STANDARDS	6
4.7 ABNORMALITIES FROM STANDARD CONDITIONS	6
5 EQUIPMENT LIST	7
6 EMISSION TEST RESULTS	9
6.1 CONDUCTED EMISSIONS AT MAINS TERMINALS (150KHz-30MHz)	9
6.1.1 E.U.T. Operation	10
6.1.2 Test Setup Diagram	10
6.1.3 Measurement Data	10
6.2 RADIATED EMISSIONS (30MHz-1GHz)	15
6.2.1 E.U.T. Operation	16
6.2.2 Test Setup Diagram	16
6.2.3 Measurement Data	16
6.3 RADIATED EMISSIONS (ABOVE 1GHz)	25
6.3.1 E.U.T. Operation	26
6.3.2 Test Setup Diagram	26
6.3.3 Measurement Data	26
7 PHOTOGRAPHS	31
7.1 CONDUCTED EMISSIONS AT MAINS TERMINALS (150KHz-30MHz) TEST SETUP	31
7.2 RADIATED EMISSIONS (30MHz-1GHz) TEST SETUP	32
7.3 EUT CONSTRUCTIONAL DETAILS (EUT PHOTOS)	32

4 General Information

4.1 Details of E.U.T.

Power supply:	Model No.: UC11US AC Input: 100-240V 50/60Hz 0.2A DC Output: 5V 1A
Cable:	USB cable: 100cm shielded.
Internal source:	2400MHz

4.2 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
Earphone	PHILIPS	SHE6000	REF. No.SEA1000
Laptop	Lenovo	T430u	REF. No.SEA1800
Earphone	PHILIPS	SHE6000	REF. No.SEA1000
Router	NETGEAR	DGN2200	REF. No.SEA2200

4.3 Measurement Uncertainty

No.	Item	Measurement Uncertainty
1	Conduction Emission	3.0dB (150kHz to 30MHz)
2	Radiated Emission	4.5dB (30MHz-1GHz)
		4.8dB (1GHz-6GHz)
3	Temperature test	1 °C
4	Humidity test	3%

4.4 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China.
518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.

4.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- CNAS (No. CNAS L2929)**

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

- A2LA (Certificate No. 3816.01)**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

- VCCI**

The 3m Fully-anechoic chamber for above 1GHz, 10m Semi-anechoic chamber for below 1GHz, Shielded Room for Mains Port Conducted Interference Measurement and Telecommunication Port Conducted Interference Measurement of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-20026, R-14188, C-12383 and T-11153 respectively.

- FCC –Designation Number: CN1178**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized as an accredited testing laboratory.

Designation Number: CN1178. Test Firm Registration Number: 406779.

- Industry Canada (IC)**

Two 3m Semi-anechoic chambers and the 10m Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1, 4620C-2, 4620C-3.

4.6 Deviation from Standards

None

4.7 Abnormalities from Standard Conditions

None

5 Equipment List

Conducted Emissions at Mains Terminals (150kHz-30MHz)					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Shielding Room	ChangZhou ZhongYu	GB-88	SEM001-06	2017-05-10	2020-05-09
Measurement Software	AUDIX	e3 V5.4.1221d	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM024-01	2017-07-13	2018-07-12
LISN	Rohde & Schwarz	ENV216	SEM007-01	2017-09-27	2018-09-26
LISN	ETS-LINDGREN	3816/2	SEM007-02	2018-04-02	2019-04-01
EMI Test Receiver	Rohde & Schwarz	ESCI	SEM004-02	2018-04-02	2019-04-01

Radiated Emissions (30MHz-1GHz)					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
10m Semi-Anechoic Chamber	SAEMC	FSAC1018	SEM001-03	2018-03-31	2021-03-30
Measurement Software	AUDIX	e3 V8.2014-6-27	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM029-01	2017-07-13	2018-07-12
EMI Test Receiver (9kHz-3GHz)	Rohde & Schwarz	ESR	SEM004-03	2018-04-02	2019-04-01
Trilog-Broadband Antenna(30MHz-1GHz)	Schwarzbeck	VULB9168	SEM003-18	2016-06-29	2019-06-28
Pre-amplifier	Sonoma Instrument Co	310N	SEM005-04	2018-04-13	2019-04-12

Radiated Emissions (above 1GHz)					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
3m Semi-Anechoic Chamber	AUDIX	N/A	SEM001-02	2018-03-13	2021-03-12
Measurement Software	AUDIX	e3 V8.2014-6-27	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM026-01	2017-07-13	2018-07-12
EXA Spectrum Analyzer	AgilentTechnologies Inc	N9010A	SEM004-09	2018-04-13	2019-04-12
Horn Antenna(1-18GHz)	Rohde & Schwarz	HF907	SEM003-07	2018-04-13	2021-04-12
Low Noise Amplifier(100MHz-18GHz)	Black Diamond Series	BDLNA-0118-352810	SEM005-05	2017-09-27	2018-09-26

General used equipment					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Humidity/ Temperature Indicator	Shanghai Meteorological Industry Factory	ZJ1-2B	SEM002-03	2017-09-29	2018-09-28
Humidity/ Temperature Indicator	Shanghai Meteorological Industry Factory	ZJ1-2B	SEM002-04	2017-09-29	2018-09-28
Humidity/ Temperature Indicator	Mingle	N/A	SEM002-08	2017-09-29	2018-09-28
Barometer	Changchun Meteorological Industry Factory	DYM3	SEM002-01	2018-04-08	2019-04-07

6 Emission Test Results

6.1 Conducted Emissions at Mains Terminals (150kHz-30MHz)

Test Requirement: 47 CFR Part 15, Subpart B
Test Method: ANSI C63.4:2014
Frequency Range: 150kHz to 30MHz
Limit:
0.15M-0.5MHz 66dB(μV)-56dB(μV) quasi-peak, 56dB(μV)-46dB(μV) average
0.5M-5MHz 56dB(μV) quasi-peak, 46dB(μV) average
5M-30MHz 60dB(μV) quasi-peak, 50dB(μV) average
Detector: Peak for pre-scan (9kHz resolution bandwidth) 0.15M to 30MHz

6.1.1 E.U.T. Operation

Operating Environment:

Temperature: 21.8 °C Humidity: 56.6 % RH Atmospheric Pressure: 1020 mbar

Pretest these modes to find the worst case:
g: CDMA2000 BC0 + BT +WLAN + earphone + battery + adapter
h: CDMA2000 BC1 + BT +WLAN + earphone + battery + adapter

i: CDMA2000 BC10 + BT +WLAN + battery + adapter

j: CDMA BC0 + BT +WLAN + earphone + battery + adapter

k: CDMA BC1 + BT +WLAN + earphone + battery + adapter

l: CDMA BC10 + BT +WLAN + battery + adapter


p: LTE band 13 + BT +WLAN + GPS Rx + battery + adapter

q: LTE band 25 + BT +WLAN + battery + adapter

r: LTE band 26 + BT +WLAN + battery + adapter


s: LTE band 41 + BT +WLAN + battery + adapter

t: Transfer data between the EUT and the PC

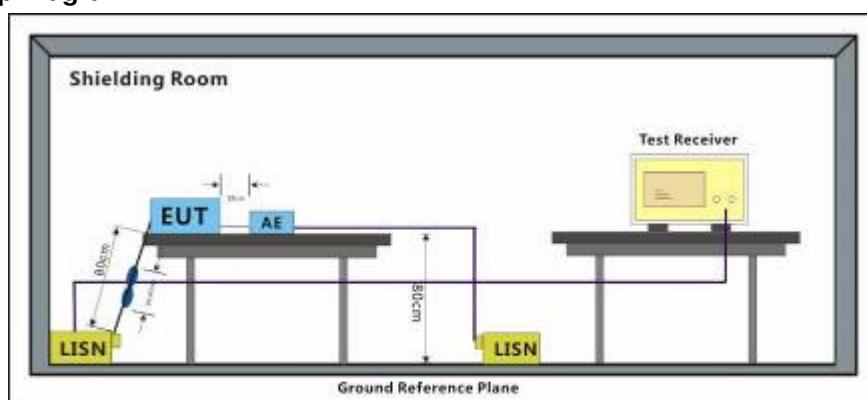The worst case for final test:
g: CDMA2000 BC0 + BT +WLAN + earphone + battery + adapter
t: Transfer data between the EUT and the PC**6.1.2 Test Setup Diagram****6.1.3 Measurement Data**

An initial pre-scan was performed with peak detector. Quasi-Peak or Average measurement were performed at the frequencies with maximized peak emission were detected.

Mode:g; Line:Live Line

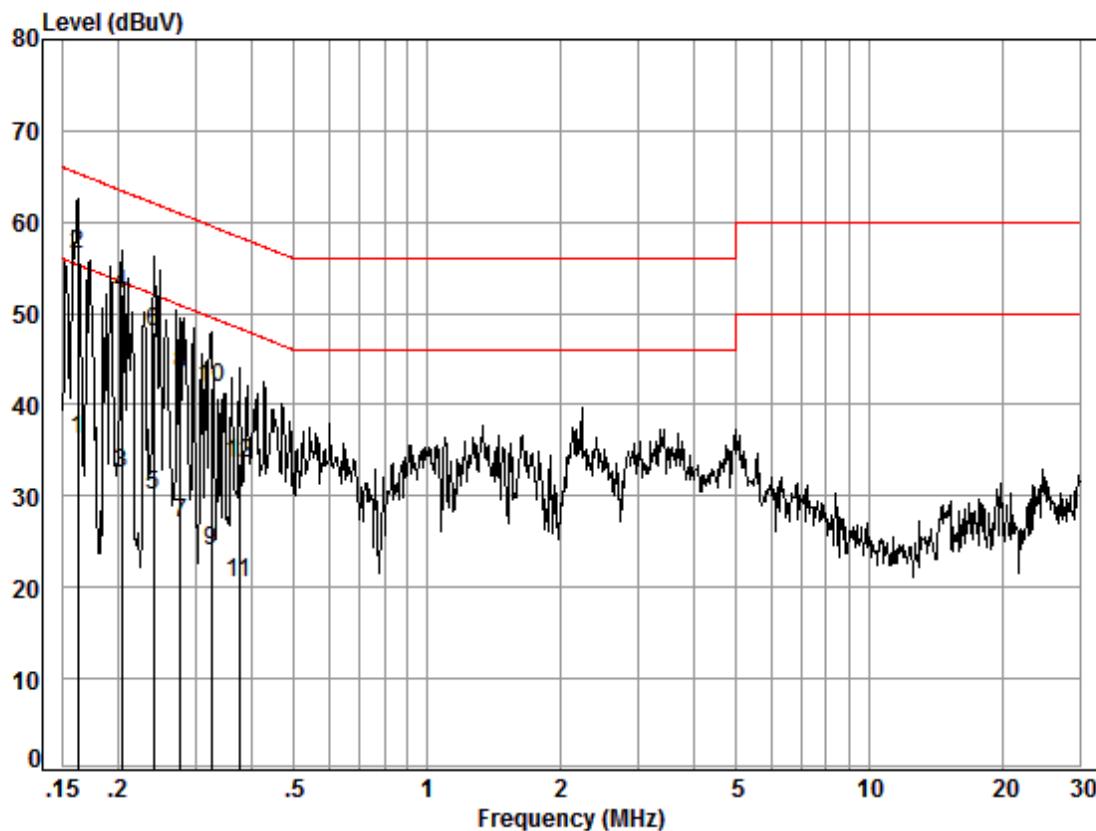

Site : Shielding Room


Condition: Line

Job No. : 02417RG

Test mode: g

Freq	Cable	LISN	Read	Limit		Over	Remark
	MHz	Loss	Factor	Level	Level	Line	
1	0.16	0.02	9.52	26.74	36.28	55.34	-19.06 Average
2	0.16	0.02	9.52	46.96	56.50	65.34	-8.84 QP
3	0.20	0.03	9.50	22.87	32.40	53.45	-21.05 Average
4	0.20	0.03	9.50	42.65	52.18	63.45	-11.27 QP
5	0.24	0.03	9.51	20.61	30.15	52.08	-21.93 Average
6	0.24	0.03	9.51	38.32	47.86	62.08	-14.22 QP
7	0.28	0.03	9.51	17.56	27.10	50.90	-23.80 Average
8	0.28	0.03	9.51	33.81	43.35	60.90	-17.55 QP
9	0.33	0.03	9.50	14.43	23.96	49.57	-25.61 Average
10	0.33	0.03	9.50	32.26	41.79	59.57	-17.78 QP
11	0.38	0.03	9.49	11.07	20.59	48.39	-27.80 Average
12	0.38	0.03	9.49	24.09	33.61	58.39	-24.78 QP

Mode:g; Line:Neutral Line

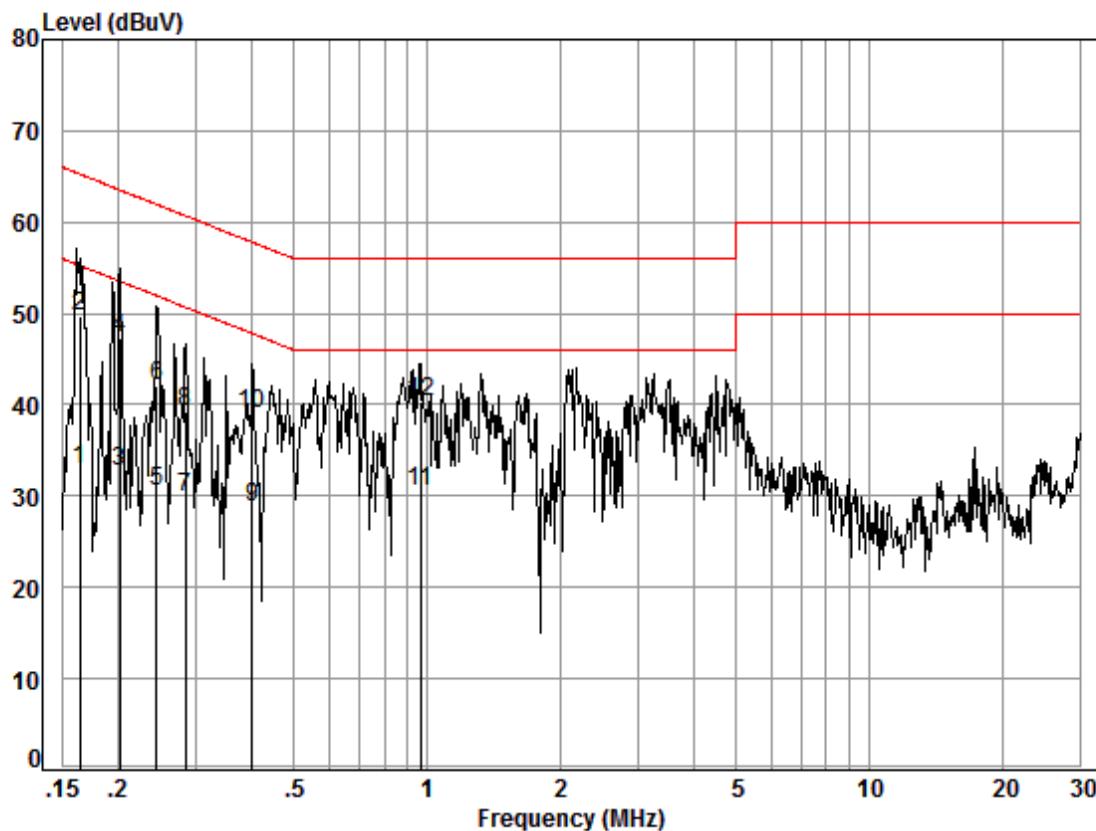

Site : Shielding Room


Condition: Neutral

Job No. : 02417RG

Test mode: g

Freq	Cable	LISN	Read	Limit		Over	Remark
	MHz	Loss	Factor	Level	Level	Line	
1	0.16	0.02	9.59	23.33	32.94	55.25	-22.31 Average
2	0.16	0.02	9.59	39.98	49.59	65.25	-15.66 QP
3	0.20	0.03	9.57	23.10	32.70	53.54	-20.84 Average
4	0.20	0.03	9.57	37.74	47.34	63.54	-16.20 QP
5	0.24	0.03	9.58	20.84	30.45	51.95	-21.50 Average
6	0.24	0.03	9.58	32.51	42.12	61.95	-19.83 QP
7	0.28	0.03	9.58	20.27	29.88	50.68	-20.80 Average
8	0.28	0.03	9.58	29.55	39.16	60.68	-21.52 QP
9	0.40	0.04	9.59	19.16	28.79	47.81	-19.02 Average
10	0.40	0.04	9.59	29.29	38.92	57.81	-18.89 QP
11	0.97	0.09	9.62	20.90	30.61	46.00	-15.39 Average
12	0.97	0.09	9.62	30.59	40.30	56.00	-15.70 QP

Mode:t; Line:Live Line

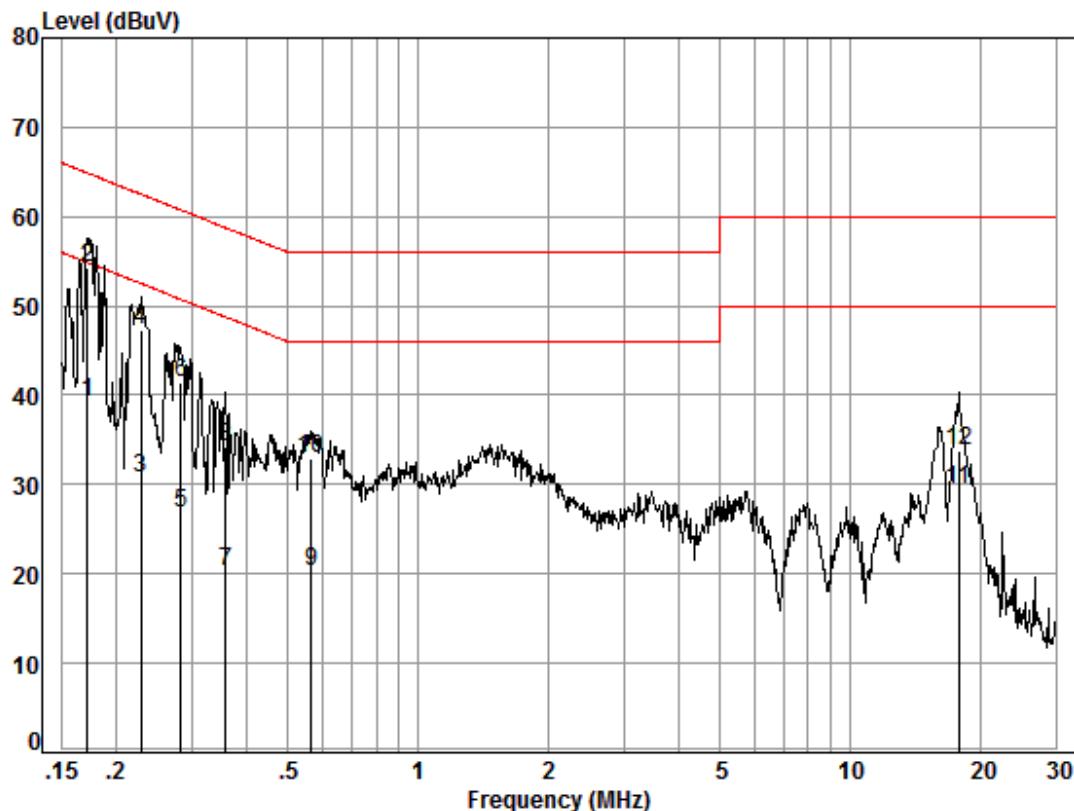

Site : Shielding Room


Condition: Line

Job No. : 02417RG

Test mode: t

Freq	Cable Loss	LISM Factor	Read	Limit Line	Over Limit	Remark
			Level			
	MHz	dB	dB	dBuV	dBuV	dB
1	0.17	0.02	9.52	29.67	39.21	54.86 -15.65 Average
2	0.17	0.02	9.52	44.83	54.37	64.86 -10.49 QP
3	0.23	0.03	9.51	21.30	30.84	52.52 -21.68 Average
4	0.23	0.03	9.51	37.66	47.20	62.52 -15.32 QP
5	0.28	0.03	9.51	17.17	26.71	50.72 -24.01 Average
6	0.28	0.03	9.51	31.88	41.42	60.72 -19.30 QP
7	0.36	0.03	9.50	10.76	20.29	48.74 -28.45 Average
8	0.36	0.03	9.50	24.79	34.32	58.74 -24.42 QP
9	0.57	0.05	9.52	10.75	20.32	46.00 -25.68 Average
10	0.57	0.05	9.52	23.44	33.01	56.00 -22.99 QP
11	17.85	0.26	9.73	19.48	29.47	50.00 -20.53 Average
12	17.85	0.26	9.73	23.83	33.82	60.00 -26.18 QP

Mode:t; Line:Neutral Line

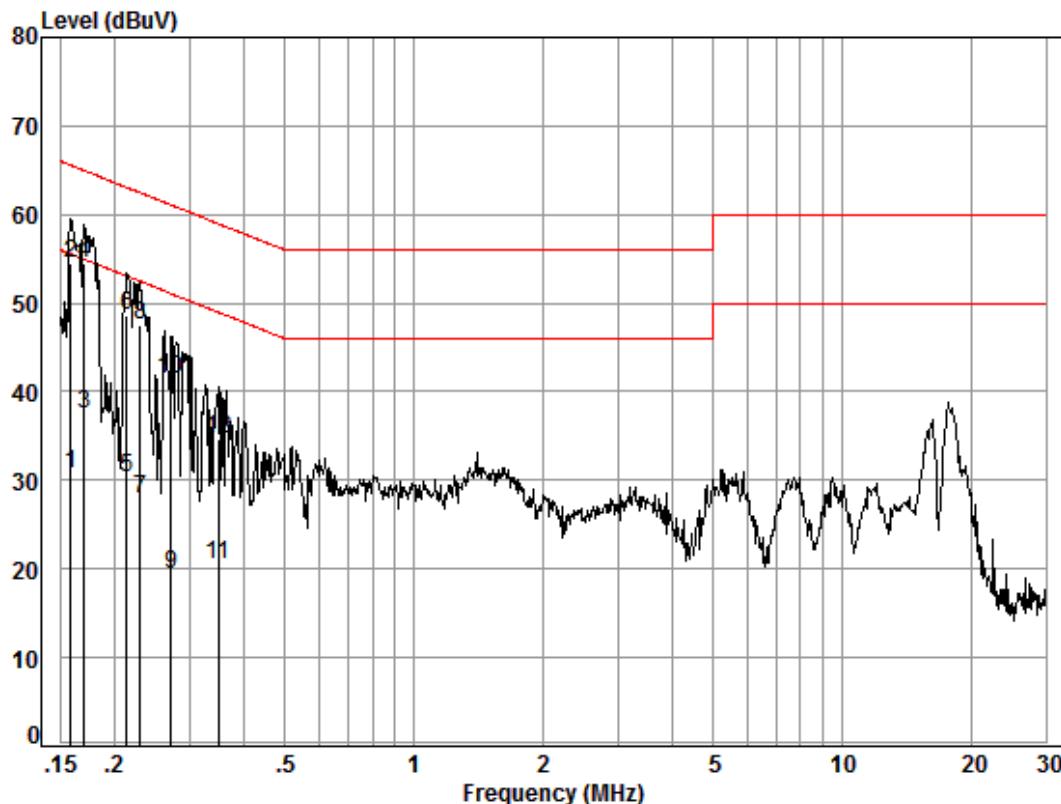

Site : Shielding Room

Condition: Neutral

Job No. : 02417RG

Test mode: t

	Freq	Cable	LISN	Read	Limit	Over	Remark
		MHz	dB	dB	dBuV	dBuV	
1	0.16	0.02	9.58	21.16	30.76	55.56	-24.80 Average
2	0.16	0.02	9.58	44.97	54.57	65.56	-10.99 QP
3	0.17	0.02	9.59	27.81	37.42	54.94	-17.52 Average
4	0.17	0.02	9.59	44.94	54.55	64.94	-10.39 QP
5	0.21	0.03	9.57	20.60	30.20	53.05	-22.85 Average
6	0.21	0.03	9.57	39.04	48.64	63.05	-14.41 QP
7	0.23	0.03	9.58	18.25	27.86	52.48	-24.62 Average
8	0.23	0.03	9.58	37.80	47.41	62.48	-15.07 QP
9	0.27	0.03	9.58	9.80	19.41	51.07	-31.66 Average
10	0.27	0.03	9.58	31.71	41.32	61.07	-19.75 QP
11	0.35	0.03	9.58	10.95	20.56	48.96	-28.40 Average
12	0.35	0.03	9.58	25.10	34.71	58.96	-24.25 QP

6.2 Radiated Emissions (30MHz-1GHz)

Test Requirement: 47 CFR Part 15, Subpart B
Test Method: ANSI C63.4:2014
Frequency Range: 30MHz to 1GHz
Measurement Distance: 10m
Limit:
30MHz -88MHz 29.5(dB μ V/m) quasi-peak
88MHz-216MHz 33.1(dB μ V/m) quasi-peak
216MHz-960MHz 35.6(dB μ V/m) quasi-peak
960MHz-1000MHz 43.5(dB μ V/m) quasi-peak
Detector: Peak for pre-scan (120kHz resolution bandwidth) 30M to1000MHz

6.2.1 E.U.T. Operation

Operating Environment:


Temperature: 25 °C Humidity: 51 % RH Atmospheric Pressure: 1020 mbar

Pretest these modes to find the worst case:

- g: CDMA2000 BC0 + BT +WLAN + earphone + battery + adapter
- h: CDMA2000 BC1 + BT +WLAN + earphone + battery + adapter
- i: CDMA2000 BC10 + BT +WLAN + battery + adapter
- j: CDMA BC0 + BT +WLAN + earphone + battery + adapter
- k: CDMA BC1 + BT +WLAN + earphone + battery + adapter
- l: CDMA BC10 + BT +WLAN + battery + adapter
- p: LTE band 13 + BT +WLAN + GPS Rx + battery + adapter
- q: LTE band 25 + BT +WLAN + battery + adapter
- r: LTE band 26 + BT +WLAN + battery + adapter
- s: LTE band 41 + BT +WLAN + battery + adapter
- t: Transfer data between the EUT and the PC
- u: CDMA2000 BC0 + BT +WLAN + Camera + earphone + battery + adapter
- t: Transfer data between the EUT and the PC
- u: CDMA2000 BC0 + BT +WLAN + Camera + earphone + battery + adapter

The worst case for final test:


6.2.2 Test Setup Diagram

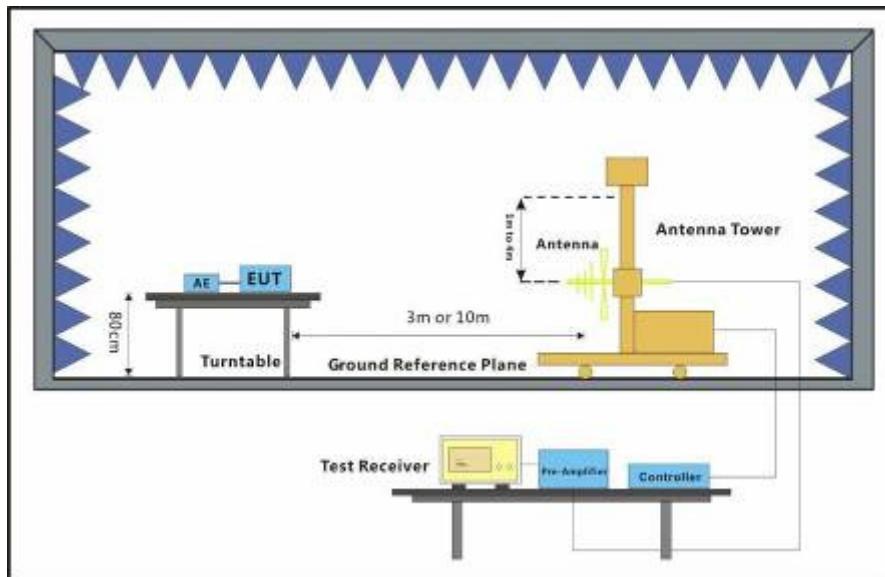

6.2.3 Measurement Data

An initial pre-scan was performed in the chamber using the spectrum analyser in peak detection mode. Quasi-peak measurements were conducted based on the peak sweep graph. The EUT was measured by BiConiLog antenna with 2 orthogonal polarities.

Mode:t; Polarization:Horizontal

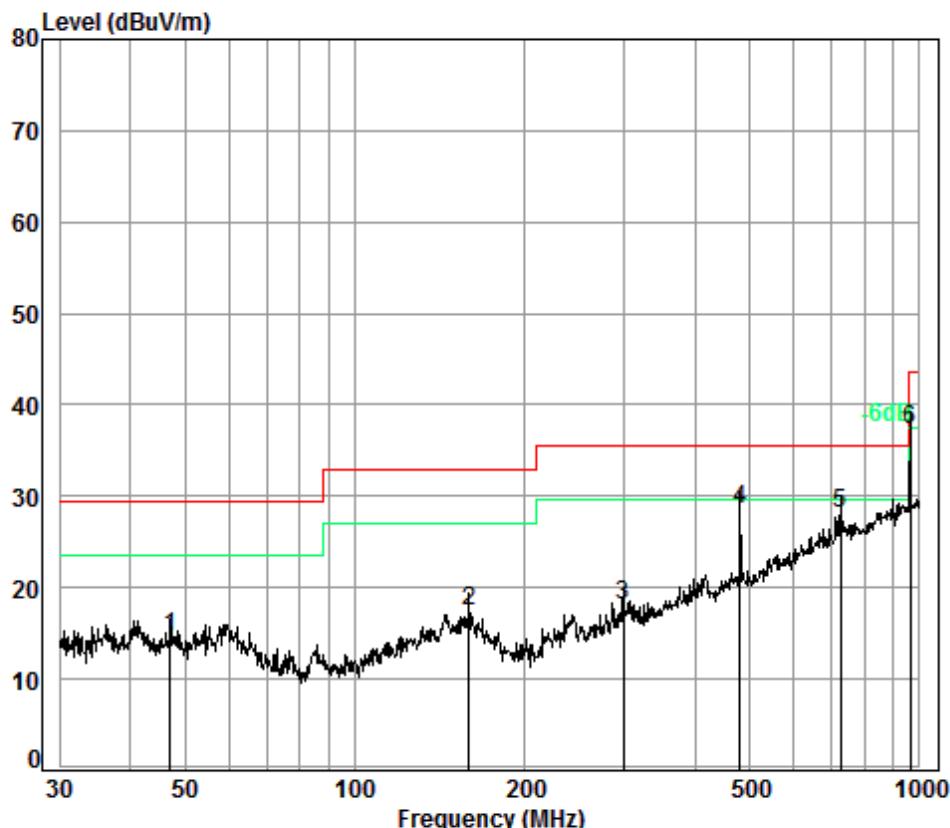


Condition: 10m HORIZONTAL

Job No. : 02417RG

Test Mode: t

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	47.16	6.84	12.85	32.52	27.41	14.58	29.50	-14.92
2	159.23	7.50	13.39	32.51	28.97	17.35	33.00	-15.65
3	299.32	8.05	12.64	32.44	29.77	18.02	35.60	-17.58
4	480.53	8.50	16.53	32.42	35.87	28.48	35.60	-7.12
5	724.26	9.20	20.45	32.39	30.91	28.17	35.60	-7.43
6 pp	962.16	9.60	22.77	31.06	35.96	37.27	43.50	-6.23

Mode:t; Polarization:Vertical

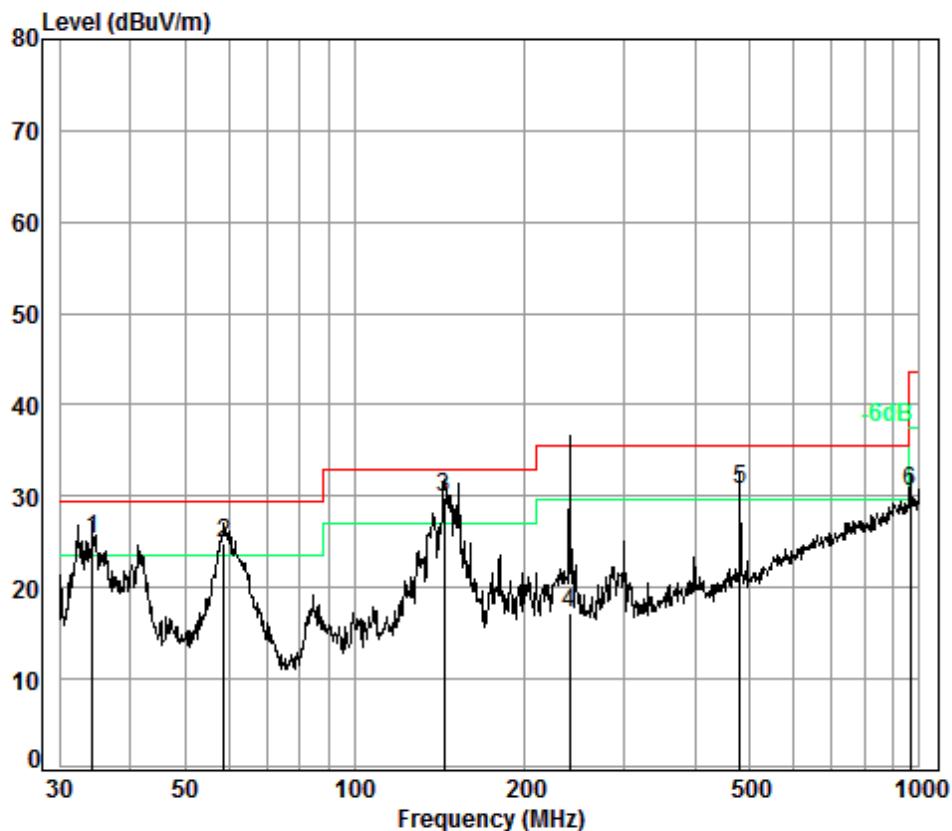


Condition: 10m VERTICAL

Job No. : 02417RG

Test Mode: t

Freq	Cable	Ant	Preamp	Read	Limit	Over		
	Loss	Factor	Factor	Level				
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	34.28	6.70	12.62	32.58	38.48	25.22	29.50	-4.28
2	58.61	7.00	12.10	32.54	38.37	24.93	29.50	-4.57
3 pp	143.83	7.42	13.01	32.52	41.97	29.88	33.00	-3.12
4 qp	239.99	7.80	11.07	32.49	30.80	17.18	35.60	-18.42
5	480.53	8.50	16.53	32.42	38.09	30.70	35.60	-4.90
6	962.16	9.60	22.77	31.06	29.15	30.46	43.50	-13.04

Mode:u; Polarization:Horizontal

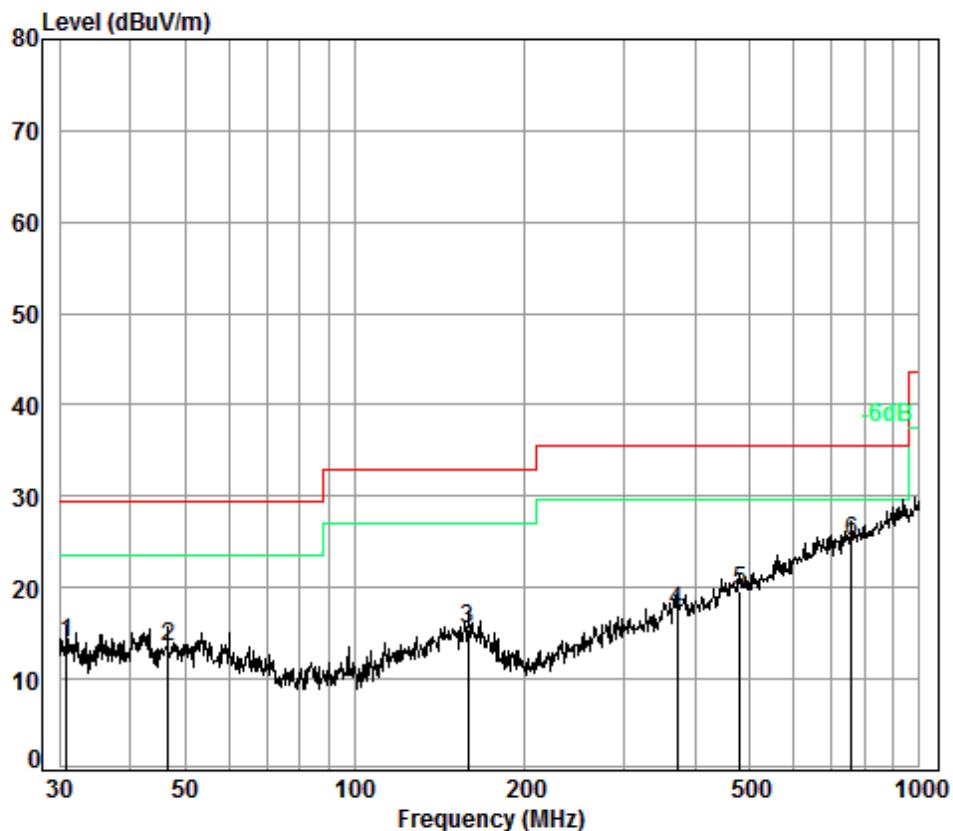


Condition: 10m HORIZONTAL

Job No. : 02417RG

Test Mode: u

Freq	Cable	Ant	Preamp	Read	Limit	Over		
	Loss	Factor	Factor	Level				
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	30.85	6.70	12.50	32.60	27.31	13.91	29.50	-15.59
2	46.67	6.83	12.86	32.52	26.45	13.62	29.50	-15.88
3	158.67	7.49	13.39	32.51	27.09	15.46	33.00	-17.54
4	372.00	8.30	14.33	32.43	27.31	17.51	35.60	-18.09
5	480.53	8.50	16.53	32.42	27.05	19.66	35.60	-15.94
6 pp	758.04	9.20	20.86	32.38	27.48	25.16	35.60	-10.44

Mode:u; Polarization:Vertical

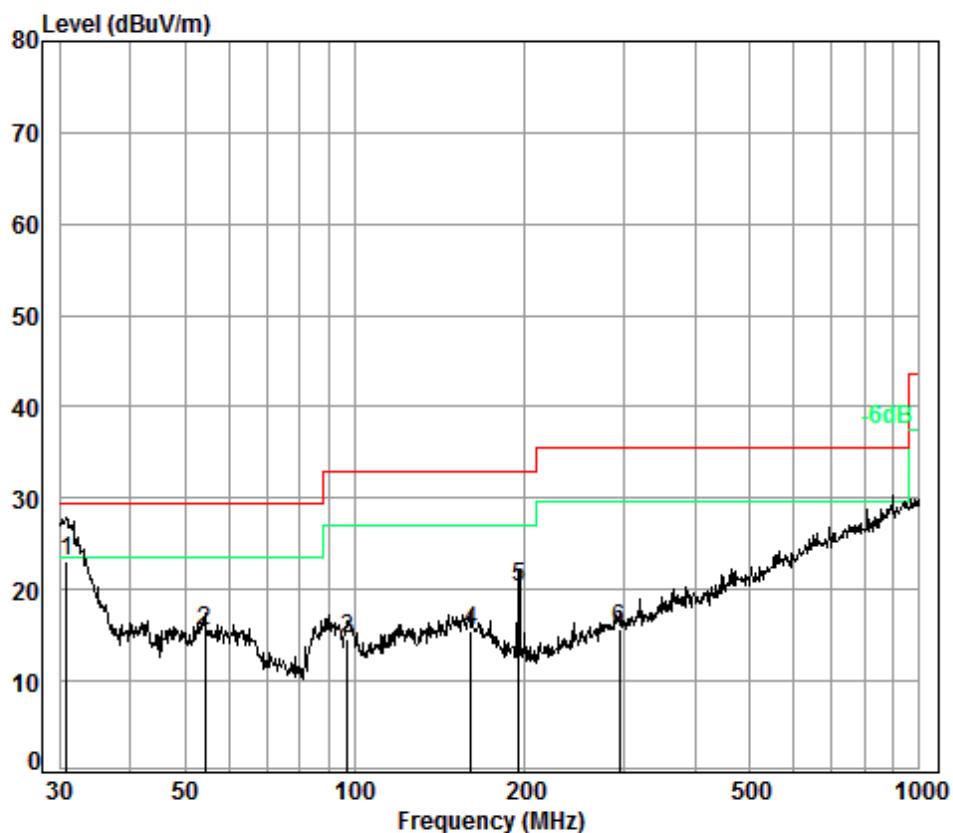

Condition: 10m VERTICAL


Job No. : 02417RG

Test Mode: u

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit		Over Limit
					MHz	dB	
1 pp	30.85	6.70	12.50	32.60	36.50	23.10	29.50 -6.40
2	54.26	6.99	12.43	32.53	28.61	15.50	29.50 -14.00
3	97.11	7.20	9.20	32.63	30.84	14.61	33.00 -18.39
4	160.91	7.50	13.30	32.51	27.29	15.58	33.00 -17.42
5	195.14	7.58	9.53	32.53	35.62	20.20	33.00 -12.80
6	294.11	8.04	12.51	32.44	27.59	15.70	35.60 -19.90

Spot Check Data:

Mode:t; Polarization:Horizontal

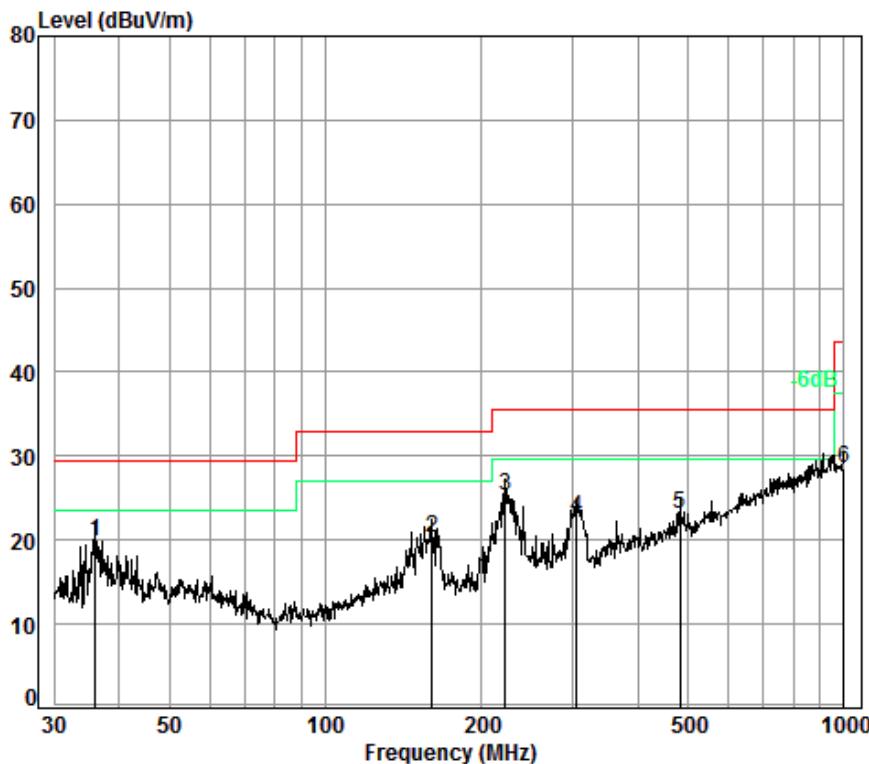


Condition: 10m HORIZONTAL

Job No. : 04920RG

Test Mode: t

Freq	Cable	Ant	Preamp	Read	Limit	Over	Limit	
	Loss	Factor	Factor	Level	Level	Line		
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	36.00	6.78	12.78	32.47	32.84	19.93	29.50	-9.57
2	160.35	7.48	13.36	32.42	31.95	20.37	33.00	-12.63
3	222.17	7.72	10.30	32.39	39.70	25.33	35.60	-10.27
4	305.68	8.03	12.83	32.36	34.28	22.78	35.60	-12.82
5	482.22	8.55	16.55	32.35	30.31	23.06	35.60	-12.54
6	1000.00	9.58	22.85	30.77	26.91	28.57	43.50	-14.93

Mode:t; Polarization:Vertical

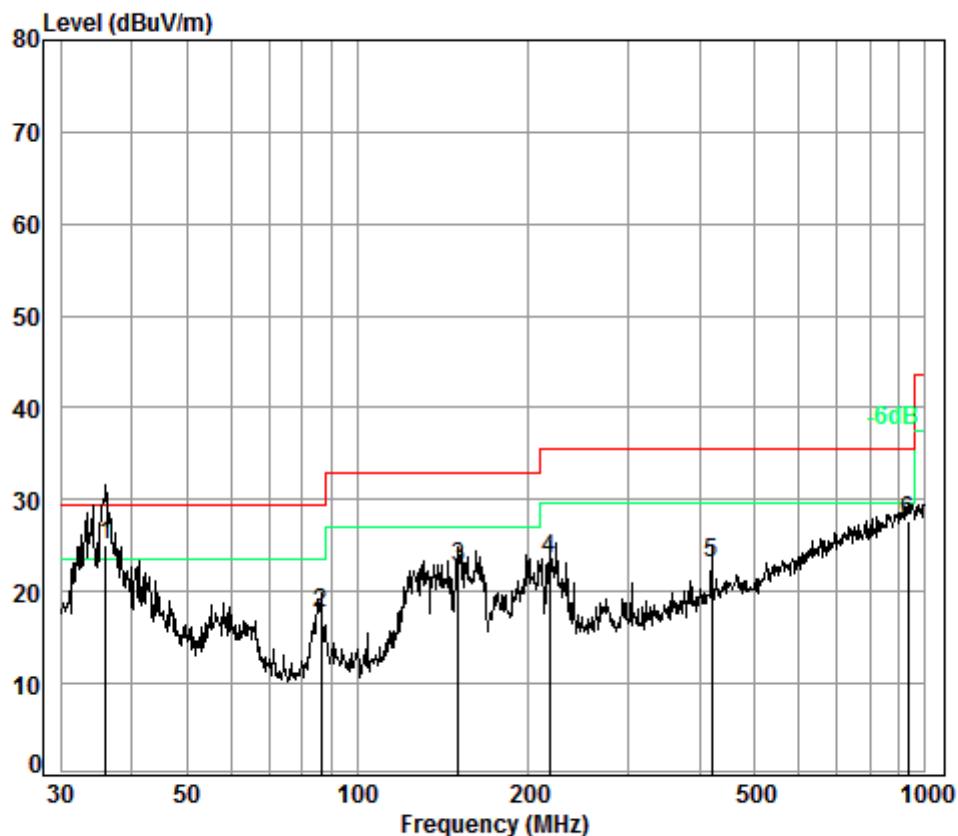


Condition: 10m VERTICAL

Job No. : 04920RG

Test Mode: t

Freq	Cable	Ant	Preamp	Read	Limit	Over		
	Loss	Factor	Factor	Level			Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	36.00	6.78	12.78	32.47	37.91	25.00	29.50	-4.50
2	86.20	7.16	8.64	32.47	34.43	17.76	29.50	-11.74
3	150.54	7.44	13.41	32.43	34.34	22.76	33.00	-10.24
4	217.54	7.70	10.01	32.39	38.16	23.48	35.60	-12.12
5	420.58	8.38	15.43	32.34	31.66	23.13	35.60	-12.47
6	932.27	9.52	22.61	31.32	26.83	27.64	35.60	-7.96

Mode:u; Polarization:Horizontal

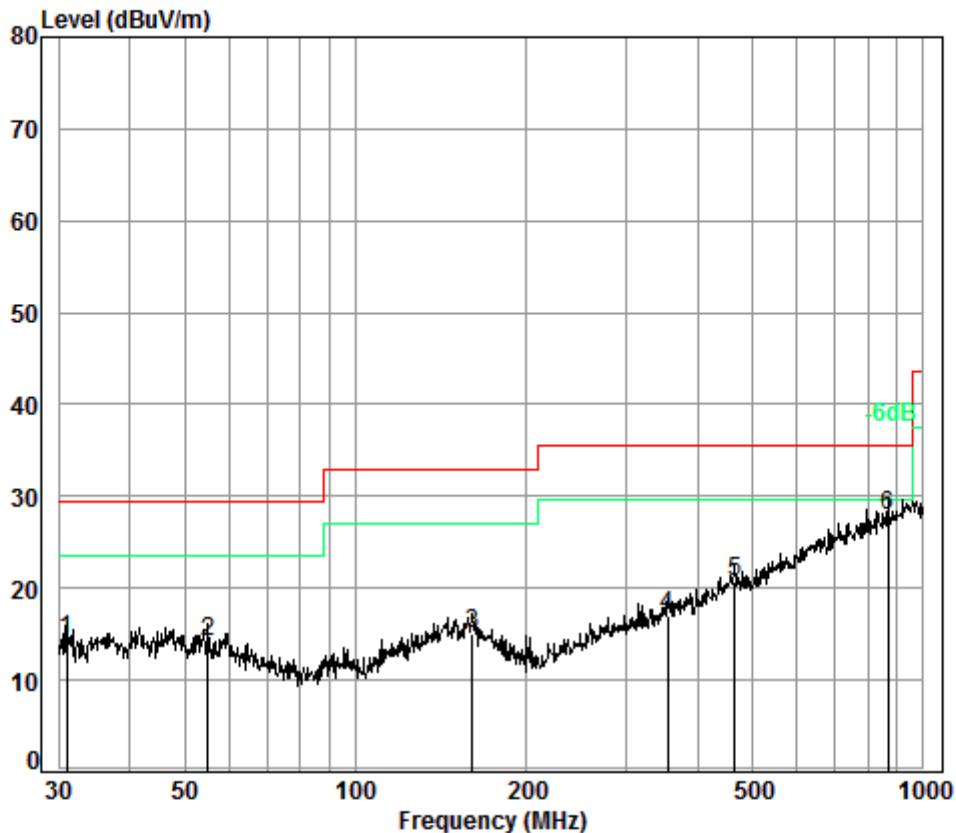


Condition: 10m HORIZONTAL

Job No. : 04920RG

Test Mode: u

Freq	Cable	Ant	Preamp	Read	Limit	Over	
	MHz	Loss	Factor	Level			
	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	30.96	6.72	12.50	32.48	27.54	14.28	29.50 -15.22
2	55.03	6.97	12.37	32.45	27.33	14.22	29.50 -15.28
3	160.91	7.49	13.30	32.42	26.76	15.13	33.00 -17.87
4	354.18	8.18	13.93	32.35	27.26	17.02	35.60 -18.58
5	465.60	8.51	16.35	32.35	28.10	20.61	35.60 -14.99
6 pp	866.09	9.42	21.79	31.78	28.38	27.81	35.60 -7.79

Mode:u; Polarization:Vertical

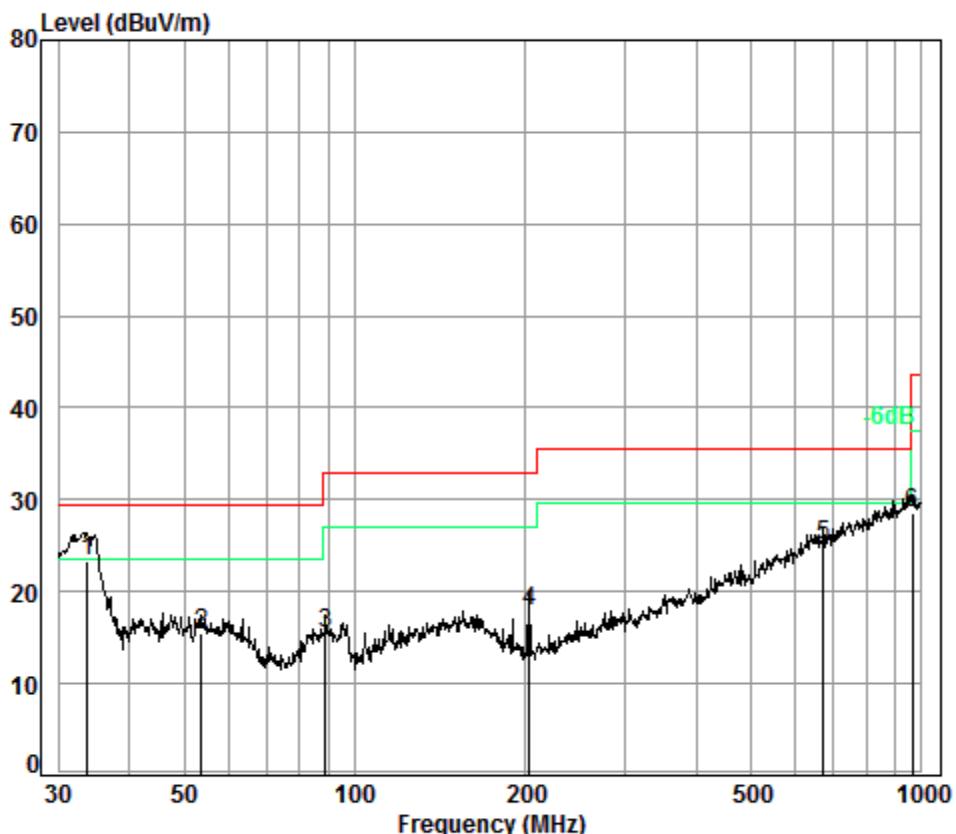

Condition: 10m VERTICAL

Job No. : 04920RG

Test Mode: u

Freq	Cable	Ant	Preamp	Read	Limit	Over		
	Loss	Factor	Factor	Level			Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	33.80	6.76	12.60	32.47	36.49	23.38	29.50	-6.12
2	53.69	6.95	12.48	32.45	28.52	15.50	29.50	-14.00
3	88.96	7.18	8.68	32.47	32.12	15.51	33.00	-17.49
4	203.52	7.64	9.38	32.40	33.33	17.95	33.00	-15.05
5	670.49	9.02	19.79	32.33	28.60	25.08	35.60	-10.52
6	962.16	9.55	22.77	31.07	27.30	28.55	43.50	-14.95

6.3 Radiated Emissions (above 1GHz)

Test Requirement: 47 CFR Part 15, Subpart B

Test Method: ANSI C63.4:2014

Frequency Range: Above 1GHz

Measurement Distance: 3m

Limit:

Above 1GHz 74(dB μ V/m) peak, 54(dB μ V/m) average

Detector: Peak for pre-scan (1000kHz resolution bandwidth) 1000M to18000MHz

6.3.1 E.U.T. Operation

Operating Environment:

Temperature: 21.6 °C Humidity: 55.9 % RH Atmospheric Pressure: 1020 mbar


Pretest these modes to find the worst case:

- g: CDMA2000 BC0 + BT +WLAN + earphone + battery + adapter
- h: CDMA2000 BC1 + BT +WLAN + earphone + battery + adapter
- i: CDMA2000 BC10 + BT +WLAN + battery + adapter
- j: CDMA BC0 + BT +WLAN + earphone + battery + adapter
- k: CDMA BC1 + BT +WLAN + earphone + battery + adapter
- l: CDMA BC10 + BT +WLAN + battery + adapter
- p: LTE band 13 + BT +WLAN + GPS Rx + battery + adapter
- q: LTE band 25 + BT +WLAN + battery + adapter
- r: LTE band 26 + BT +WLAN + battery + adapter
- s: LTE band 41 + BT +WLAN + battery + adapter
- t: Transfer data between the EUT and the PC

The worst case for final test:

- h: CDMA2000 BC1 + BT +WLAN + earphone + battery + adapter
- t: Transfer data between the EUT and the PC


6.3.2 Test Setup Diagram

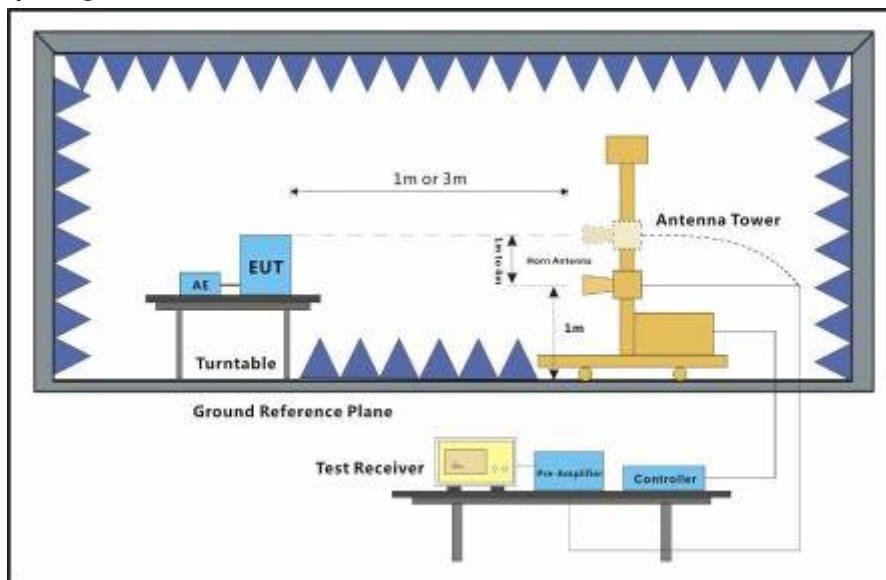

6.3.3 Measurement Data

An initial pre-scan was performed in the chamber using the spectrum analyser in peak detection mode. Quasi-peak measurements were conducted based on the peak sweep graph. The EUT was measured by BiConiLog antenna with 2 orthogonal polarities.

Mode:h; Polarization:Horizontal

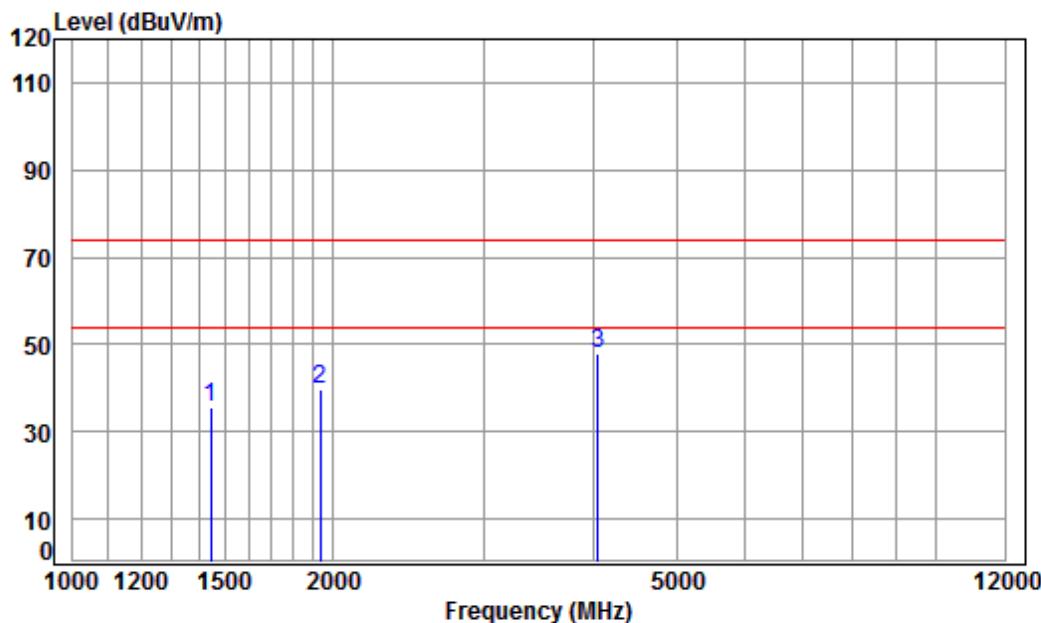


Condition: 3m Horizontal

Job No : 02417RG

Mode : h

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Over Line	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1446.436	5.31	25.58	41.37	46.23	35.75	74.00	-38.25	Peak
2	1937.036	4.96	27.58	41.66	48.67	39.55	74.00	-34.45	Peak
3	pp 4059.890	7.05	33.60	42.34	49.66	47.97	74.00	-26.03	Peak

Mode:h; Polarization:Vertical

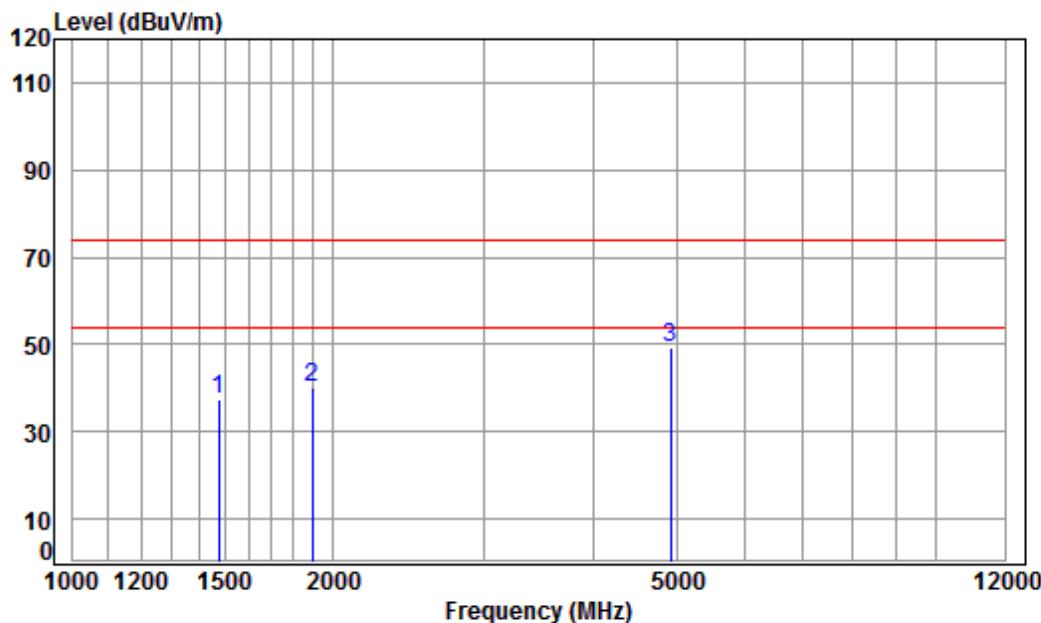


Condition: 3m VERTICAL

Job No : 02417RG

Mode : h

		Cable Freq	Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1477.873	5.41	25.71	41.39	47.78	37.51	74.00	-36.49	Peak	
2	1892.439	5.01	27.42	41.64	49.15	39.94	74.00	-34.06	Peak	
3	pp 4917.863	8.01	34.36	42.49	49.28	49.16	74.00	-24.84	Peak	

Mode:t; Polarization:Horizontal

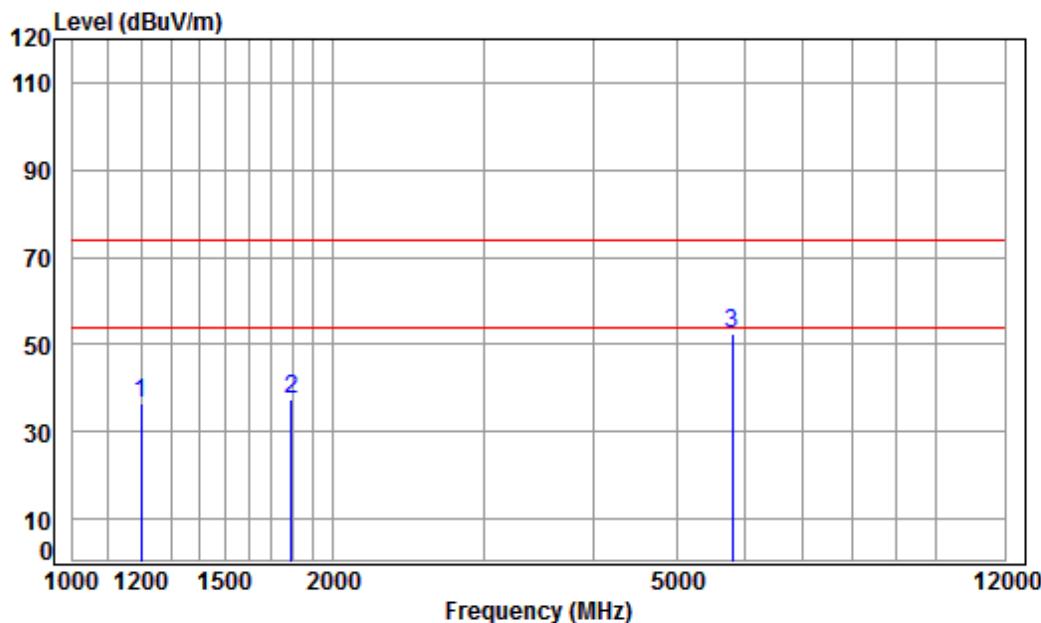


Condition: 3m HORIZONTAL

Job No : 02417RG

Mode : t

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Over Line	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1		1200.526	4.42	24.48	41.18	48.78	36.50	74.00	-37.50 Peak
2		1790.190	5.12	27.03	41.58	47.05	37.62	74.00	-36.38 Peak
3	pp	5799.177	9.90	34.58	41.77	49.70	52.41	74.00	-21.59 Peak

Mode:t; Polarization:Vertical

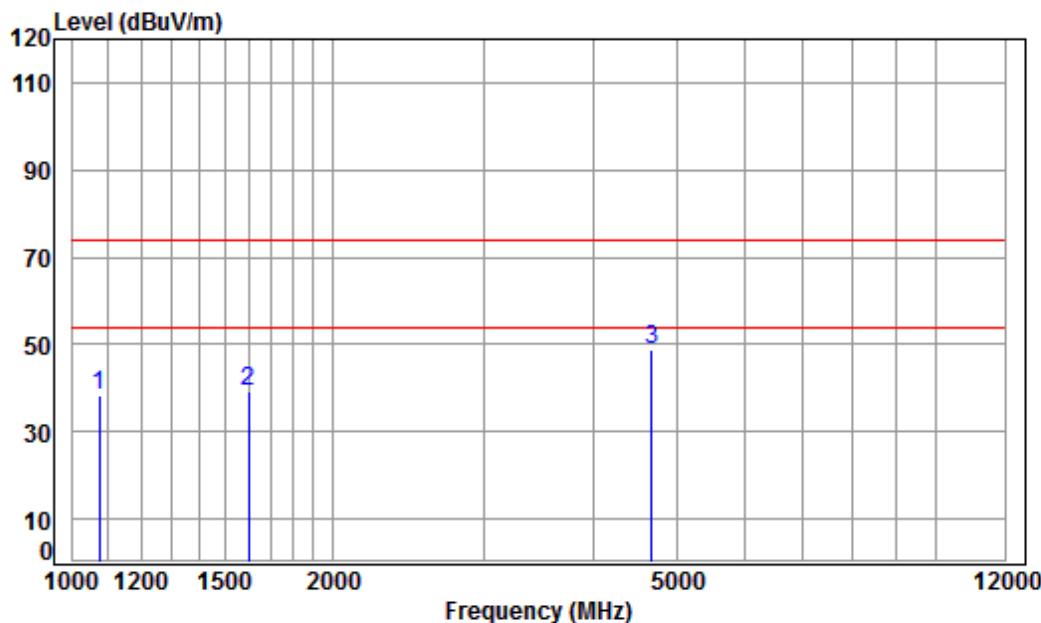

Condition: 3m VERTICAL


Job No : 02417RG

Mode : t



		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Over Line	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1074.301	3.89	23.82	41.07	51.75	38.39	74.00	-35.61	Peak
2	1599.100	5.35	26.24	41.47	49.07	39.19	74.00	-34.81	Peak
3	pp 4677.225	7.75	33.93	42.45	49.80	49.03	74.00	-24.97	Peak

7 Photographs

7.1 Conducted Emissions at Mains Terminals (150kHz-30MHz) Test Setup

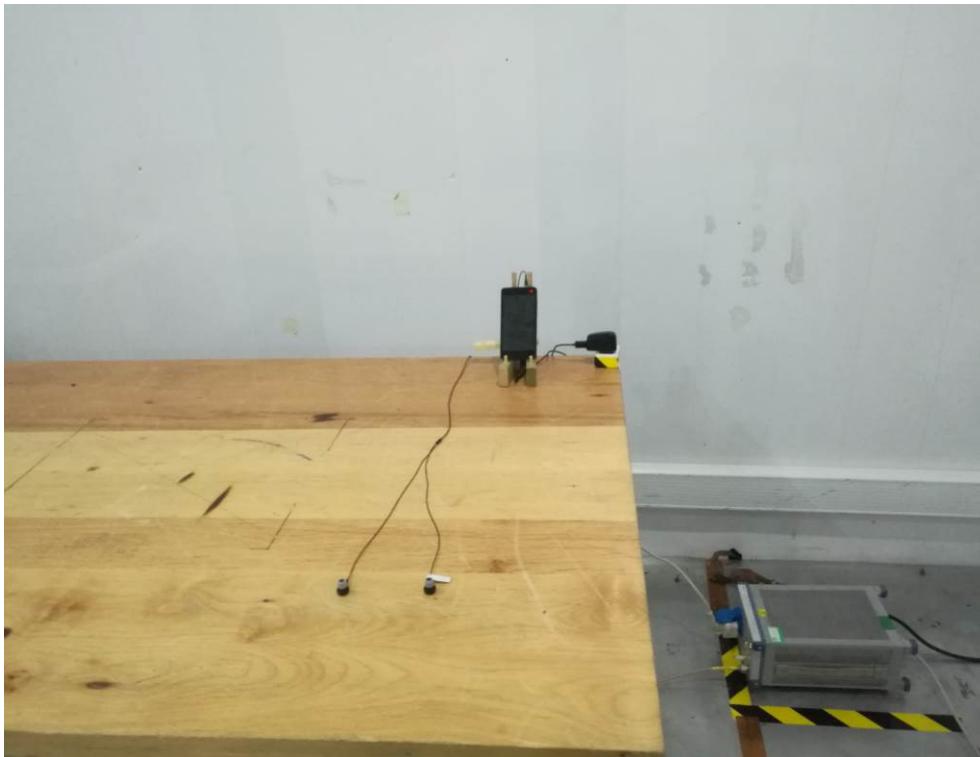

7.2 Radiated Emissions (30MHz-1GHz) Test Setup

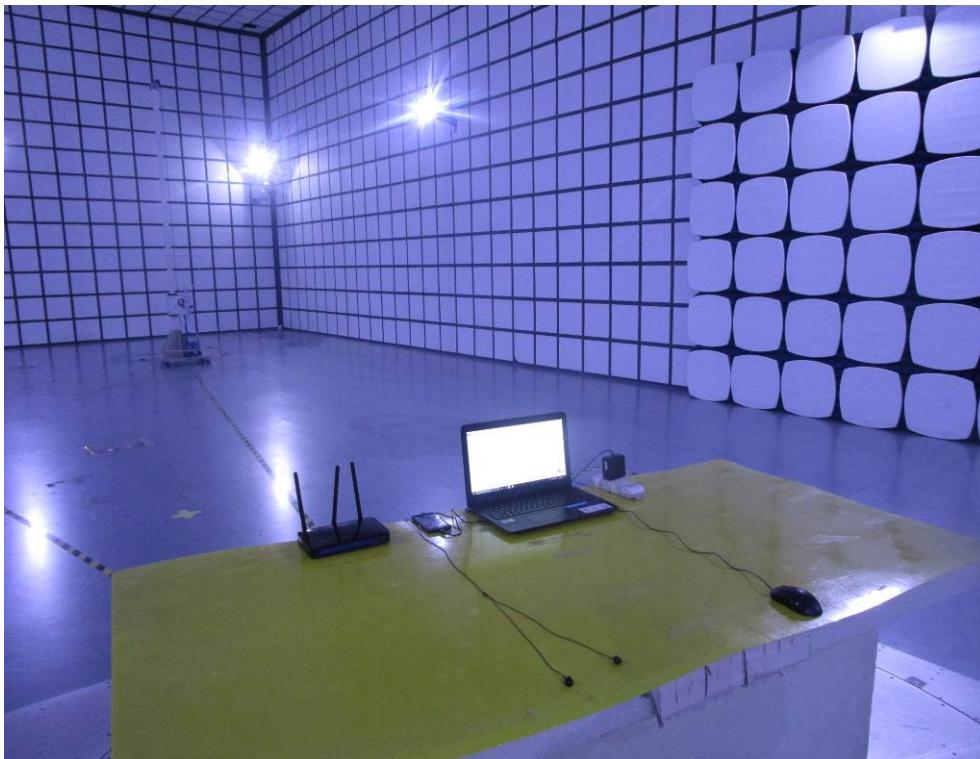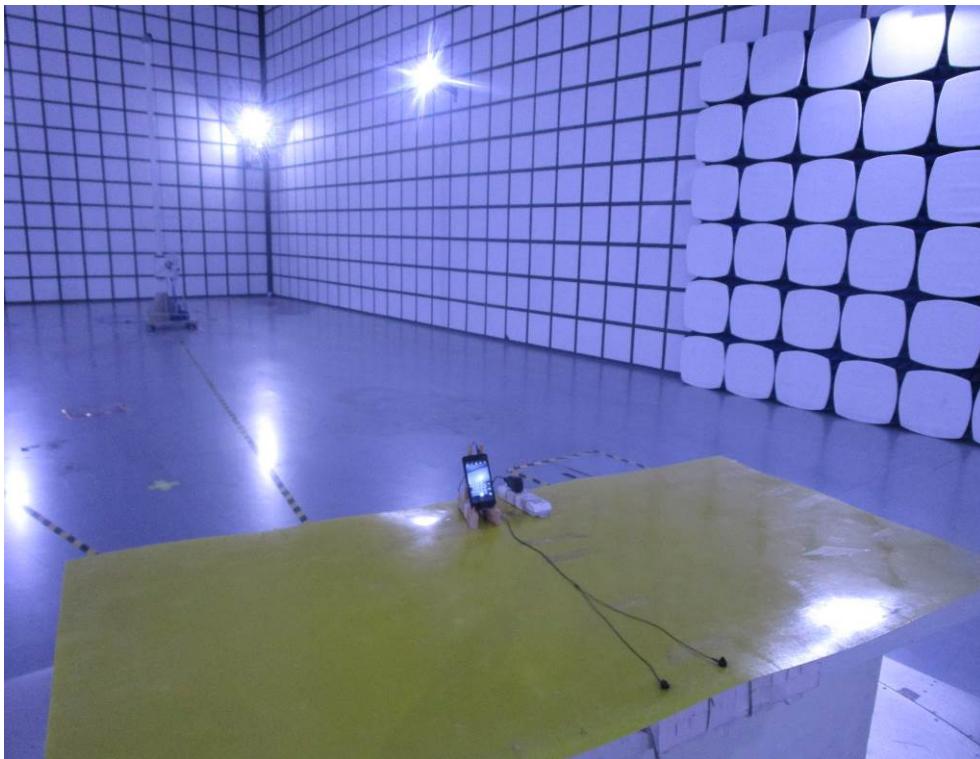

7.3 EUT Constructional Details (EUT Photos)

Refer to Appendix A - Photographs of EUT Constructional Details for SZEM1806004920RG

- End of the Report -