

SAR Test Report

Report No.: AGC02707180601FH01

FCC ID : 2AP7L-ETHOS
APPLICATION PURPOSE : Original Equipment
PRODUCT DESIGNATION : Mobile Phone
BRAND NAME : MI
MODEL NAME : ETHOS
CLIENT : Whoop International Trading Limited
DATE OF ISSUE : July 11,2018
STANDARD(S) : IEEE Std. 1528:2013
FCC 47CFR § 2.1093
IEEE/ANSI C95.1:2005
REPORT VERSION : V1.0

Attestation of Global Compliance(Shenzhen) Co., Ltd.

CAUTION:

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.



The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	July 11,2018	Valid	Initial Release

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

Test Report Certification

Applicant Name	Whoop International Trading Limited
Applicant Address	Flat-B 8/F Chong Gming Building 72 Cheung Sha Wan Road, Kowloon, Hong Kong, China
Manufacturer Name	Shenzhen Fortune Ship Technology Co., Ltd.
Manufacturer Address	6-7th Floor, Kingson Building, New energy and innovation industrial park, 1st Chuangsheng Road, Xili town, Nanshan District, Shenzhen, China
Product Designation	Mobile Phone
Brand Name	MI
Model Name	ETHOS
Different Description	N/A
EUT Voltage	DC3.8V by battery
Applicable Standard	IEEE Std. 1528:2013 FCC 47CFR § 2.1093 IEEE/ANSI C95.1:2005
Test Date	Jun.15, 2018 to July 3, 2018
Report Template	AGCRT-US-4G/SAR (2018-01-01)

Note: The results of testing in this report apply to the product/system which was tested only.

Eric Zhou

Tested By

Eric Zhou(Zhou Yongkang)

July 3,2018

Angela Li

Checked By

Angela Li(Li Jiao)

July 11,2018

Forrest Lei

Authorized By

Forrest Lei(Lei Yonggang)
Authorized Officer

July 11,2018

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

TABLE OF CONTENTS

1. SUMMARY OF MAXIMUM SAR VALUE	5
2. GENERAL INFORMATION.....	6
2.1. EUT DESCRIPTION.....	6
3. SAR MEASUREMENT SYSTEM.....	9
3.1. THE SATIMO SYSTEM USED FOR PERFORMING COMPLIANCE TESTS CONSISTS OF FOLLOWING ITEMS	9
3.2. COMOSAR E-FIELD PROBE	10
3.3. ROBOT.....	10
3.4. VIDEO POSITIONING SYSTEM	11
3.5. DEVICE HOLDER	11
3.6. SAM TWIN PHANTOM.....	12
4. SAR MEASUREMENT PROCEDURE.....	13
4.1. SPECIFIC ABSORPTION RATE (SAR).....	13
4.2. SAR MEASUREMENT PROCEDURE	14
4.3. RF EXPOSURE CONDITIONS	16
5. TISSUE SIMULATING LIQUID.....	18
5.1. THE COMPOSITION OF THE TISSUE SIMULATING LIQUID.....	18
5.2. TISSUE DIELECTRIC PARAMETERS FOR HEAD AND BODY PHANTOMS	19
5.3. TISSUE CALIBRATION RESULT	20
6. SAR SYSTEM CHECK PROCEDURE	25
6.1. SAR SYSTEM CHECK PROCEDURES	25
6.2. SAR SYSTEM CHECK.....	26
7. EUT TEST POSITION.....	28
7.1. DEFINE TWO IMAGINARY LINES ON THE HANDSET.....	28
7.2. CHEEK POSITION	29
7.3. TILT POSITION.....	29
7.4. BODY WORN POSITION	30
8. SAR EXPOSURE LIMITS	31
9. TEST FACILITY	32
10. TEST EQUIPMENT LIST	33
11. MEASUREMENT UNCERTAINTY	34
12. CONDUCTED POWER MEASUREMENT.....	37
13. TEST RESULTS.....	65
13.1. SAR TEST RESULTS SUMMARY.....	65
APPENDIX A. SAR SYSTEM CHECK DATA	88
APPENDIX B. SAR MEASUREMENT DATA.....	128
APPENDIX C. TEST SETUP PHOTOGRAPHS.....	194
APPENDIX D. CALIBRATION DATA	203

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

1. SUMMARY OF MAXIMUM SAR VALUE

The maximum results of Specific Absorption Rate (SAR) found during testing for EUT are as follows:

Frequency Band	Highest Reported 1g-SAR(W/Kg)		SAR Test Limit (W/Kg)
	Head	Body-worn (with 10mm separation)	
GSM 850	0.358	0.644	1.6
PCS 1900	0.064	1.191	
UMTS Band II	0.127	1.276	
UMTS Band IV	0.118	1.159	
UMTS Band V	0.348	0.676	
LTE Band 2	0.086	0.751	
LTE Band 4	0.170	1.342	
LTE Band 5	0.343	0.730	
LTE Band 7	0.059	1.308	
LTE Band 12	0.344	0.918	
WIFI 2.4G	0.505	0.213	
WIFI 5G (UNII-1)	0.131	0.043	
WIFI 5G (UNII-3)	0.059	0.143	
Simultaneous Reported SAR	1.521		
SAR Test Result	PASS		

This device is compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6W/Kg) specified in IEEE Std. 1528:2013; FCC 47CFR § 2.1093; IEEE/ANSI C95.1:2005 and the following specific FCC Test Procedures:

- KDB 447498 D01 General RF Exposure Guidance v06
- KDB 648474 D04 Handset SAR v01r03
- KDB 865664 D01 SAR Measurement 100MHz to 6GHz v01r04
- KDB 941225 D01 3G SAR Procedures v03r01
- KDB 941225 D06 Hotspot Mode v02r01
- KDB 248227 D01 802.11 Wi-Fi SAR v02r02
- KDB 941225 D05 SAR for LTE Devices v02r05

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

2. GENERAL INFORMATION

2.1. EUT Description

General Information	
Product Designation	Mobile Phone
Test Model	ETHOS
Hardware Version	YK736_MB_V0.2
Software Version	MI_ETHOS_V1.2_20180623
Device Category	Portable
RF Exposure Environment	Uncontrolled
Antenna Type	Internal
GSM and GPRS& EGPRS	
Support Band	☒ GSM 850 ☒ PCS 1900 ☒ GSM 900 ☒ DCS 1800
GPRS & EGPRS Type	Class B
GPRS & EGPRS Class	Class 12(1Tx+4Rx, 2Tx+3Rx, 3Tx+2Rx, 4Tx+1Rx)
TX Frequency Range	GSM 850 : 820-850MHz; PCS 1900: 1850-1910MHz;
RX Frequency Range	GSM 850 : 869~894MHz; PCS 1900: 1930~1990MHz
Release Version	R99
Type of modulation	GMSK for GSM/GPRS; GMSK & 8-PSK for EGPRS
Antenna Gain	GSM850:1.44dBi; PCS1900: 1.32dBi;
Max. Average Power	GSM850: 31.64dBm; PCS1900: 28.43dBm
WCDMA	
Support Band	☒ UMTS FDD Band II ☒ UMTS FDD Band V ☒ UMTS FDD Band IV ☐ UMTS FDD Band I ☐ UMTS FDD Band III ☐ UMTS FDD Band VIII
HS Type	HSPA(HSUPA/HSDPA)
TX Frequency Range	FDD Band II: 1850-1910MHz; Band IV: 1712.4-1752.6MHz FDD Band V: 820-850MHz
RX Frequency Range	FDD Band II: 1930-1990MHz; Band IV: 2112.4-5152.6MHz FDD Band V: 869-894MHz
Release Version	Rel-6
Type of modulation	HSDPA:QPSK/16QAM; HSUPA:BPSK; WCDMA:QPSK
Antenna Gain	Band II: 1.26dBi; Band IV: 1.35dBi; Band V: 1.55dBi;
Max. Average Power	Band II: 22.44dBm; Band IV: 21.46dBm; Band V: 21.95dBm

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

EUT Description(Continue)

LTE	
Support Band	☒ FDD Band 2 ☒ FDD Band 4 ☒ FDD Band 5 ☒ FDD Band 7 ☒ FDD Band 12 ☐ FDD Band 17 ☐ FDD Band 25 ☐ FDD Band 26 ☐ TDD Band 41 (U.S. Bands) ☐ FDD Band 1 ☐ FDD Band 3 ☒ FDD Band 7 ☐ FDD Band 8 ☐ FDD Band 20 ☐ TDD Band 33 ☐ TDD Band 34 ☐ TDD Band 38 ☐ FDD Band 40 ☐ FDD Band 42 ☐ FDD Band 43 (Non-U.S. Bands)
TX Frequency Range	Band 2: 1850-1909.9MHz; Band 4: 1710 -1754.9MHz; Band 5 :824-849MHz; Band 7:2500-2570MHz; Band 12: 699 -715.9;
RX Frequency Range	Band 2: 1930-1989.9 MHz; Band 4: 2110 -2154.9MHz; Band 5 :869-894MHz; Band 7:2620-2690MHz Band 12: 729- 745.9 MHz;
Release Version	Rel-8
Type of modulation	QPSK, 16QAM
Antenna Gain	1.58dBi(LTE band 2),1.30dBi (LTE band 4), 1.50dBi (LTE band 5), 1.44dBi(LTE band 7), 1.29dBi(Band 12)
Diversity Antenna Gain	1.44dBi(LTE band 2),1.22dBi (LTE band 4), 1.42dBi (LTE band 5), 1.37dBi(LTE band 7), 1.16dBi(Band 12)
Max. Average Power	Band 2: 23.89dBm; Band 4: 23.99dBm; Band 5: 24.19dBm Band 7: 24.85dBm; Band 12: 23.81dBm;
Bluetooth	
Bluetooth Version	☐ V2.0 ☐ V2.1 ☐ V2.1+EDR ☐ V3.0 ☐ V3.0+HS ☒ V4.0 ☐ V4.1
Operation Frequency	2402~2480MHz
Type of modulation	☒ GFSK ☒ II/4-DQPSK ☒ 8-DPSK
Peak Power	1.186dBm
Antenna Gain	1.0dBi
2.4G WIFI	
WIFI Specification	☐ 802.11a ☒ 802.11b ☒ 802.11g ☒ 802.11n(20) ☒ 802.11n(40)
Operation Frequency	2412~2462MHz
Type of modulation	BPSK, QPSK, CCK, 16-QAM, 64-QAM
Avg. Burst Power	11b: 12.12dBm,11g:9.51dBm,11n(20):9.43dBm,11n(40):9.19dBm
Antenna Gain	1.0dBi
5G WIFI	
WIFI Specification	☒ 802.11a ☒ 802.11n20 ☒ 802.11ac20 ☒ 802.11n40 ☒ 802.11ac40 ☐ 802.11ac80
Operation Frequency	5150 MHz~5250MHz;5725 MHz~5850MHz
Type of modulation	BPSK, QPSK, 16QAM, 64QAM, 128QAM, 256QAM,OFDM
Output Power	IEEE 802.11a20: 10.84 dBm IEEE 802.11n(20): 10.01 dBm; IEEE802.11n(40): 11.27 dBm IEEE802.11ac(20): 11.06 dBm IEEE802.11ac(40): 11.24 dBm
Antenna Gain	1.0dBi

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

Accessories	
Battery	Brand name: N/A Model No. : ETHOS-B01 Voltage and Capacitance: 3.8 V & 2450mAh
Adapter	Brand name: N/A Model No. : TPA-46B050100UU Input: AC 100-240V, 50/60Hz, 200mA Output: DC 5V, 1000mA
Earphone	Brand name: N/A Model No. : N/A


Note: 1.CMU200 can measure the average power and Peak power at the same time
 2.The sample used for testing is end product.

Product	Type
	☒ Production unit ☐ Identical Prototype

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

3. SAR MEASUREMENT SYSTEM

3.1. The SATIMO system used for performing compliance tests consists of following items

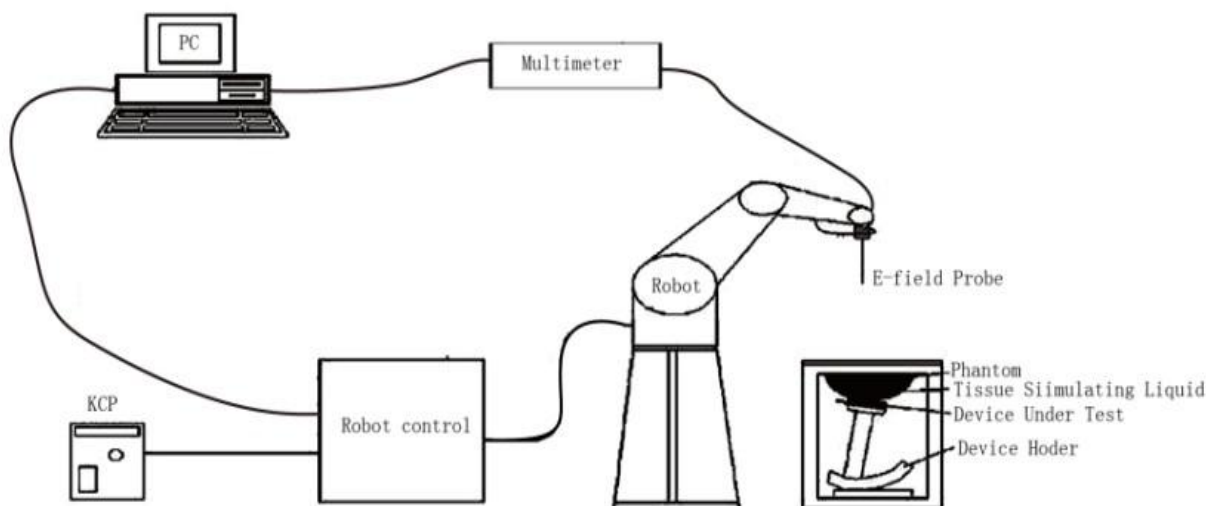

The COMOSAR system for performing compliance tests consists of the following items:

- The PC. It controls most of the bench devices and stores measurement data. A computer running WinXP and the Opensar software.
- The E-Field probe. The probe is a 3-axis system made of 3 distinct dipoles. Each dipole returns a voltage in function of the ambient electric field.
- The Keithley multimeter measures each probe dipole voltages.
- The SAM phantom simulates a human head. The measurement of the electric field is made inside the phantom.
- The liquids simulate the dielectric properties of the human head tissues.
- The network emulator controls the mobile phone under test.
- The validation dipoles are used to measure a reference SAR. They are used to periodically check the bench to make sure that there is no drift of the system characteristics over time.
- The phantom, the device holder and other accessories according to the targeted measurement.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

3.2. COMOSAR E-Field Probe

The SAR measurement is conducted with the dosimetric probe manufactured by SATIMO. The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. SATIMO conducts the probe calibration in compliance with international and national standards (e.g. IEEE 1528 and relevant KDB files.) The calibration data are in Appendix D.

Isotropic E-Field Probe Specification

Model	SSE2		
Manufacture	MVG		
Identification No.	SN 08/16 EPGO282		
Frequency	0.7GHz-6GHz Linearity:±0.06dB(700MHz-6GHz)		
Dynamic Range	0.01W/Kg-100W/Kg Linearity:±0.06dB		
Dimensions	Overall length:330mm Length of individual dipoles:2mm Maximum external diameter:8mm Probe Tip external diameter:2.5mm Distance between dipoles/ probe extremity:1mm		
Application	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6 GHz with precision of better 30%.		

3.3. Robot

The COMOSAR system uses the KUKA robot from SATIMO SA (France).For the 6-axis controller COMOSAR system, the KUKA robot controller version from SATIMO is used.

The XL robot series have many features that are important for our application:


- ☐ High precision (repeatability 0.02 mm)
- ☐ High reliability (industrial design)
- ☐ Jerk-free straight movements
- ☐ Low ELF interference (the closed metallic construction shields against motor control fields)
- ☐ 6-axis controller



The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.


3.4. Video Positioning System

The video positioning system is used in OpenSAR to check the probe. Which is composed of a camera, LED, mirror and mechanical parts. The camera is piloted by the main computer with firewire link. During the process, the actual position of the probe tip with respect to the robot arm is measured, as well as the probe length and the horizontal probe offset. The software then corrects all movements, such that the robot coordinates are valid for the probe tip. The repeatability of this process is better than 0.1 mm. If a position has been taught with an aligned probe, the same position will be reached with another aligned probe within 0.1 mm, even if the other probe has different dimensions. During probe rotations, the probe tip will keep its actual position.

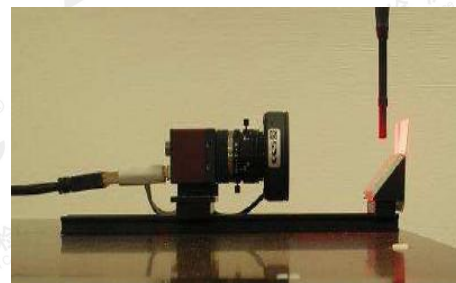

3.5. Device Holder

The COMOSAR device holder is designed to cope with different positions given in the standard. It has two scales for the device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear reference points). The rotation center for both scales is the ear reference point (EPR). Thus the device needs no repositioning when changing the angles. The COMOSAR device holder has been made out of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon_r = 3$ and loss tangent $\delta = 0.02$. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.

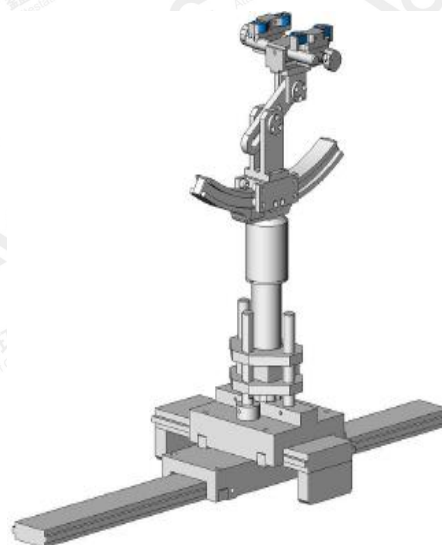

3.6. SAM Twin Phantom

The SAM twin phantom is a fiberglass shell phantom with 2mm shell thickness (except the ear region where shell thickness increases to 6mm). It has three measurement areas:

- ☐ Left head
- ☐ Right head
- ☐ Flat phantom



The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

4. SAR MEASUREMENT PROCEDURE

4.1. Specific Absorption Rate (SAR)

SAR is related to the rate at which energy is absorbed per unit mass in object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and occupational/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element(dv) of given mass density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dV} \right)$$

SAR is expressed in units of Watts per kilogram (W/Kg)

SAR can be obtained using either of the following equations:

$$SAR = \frac{\sigma E^2}{\rho}$$

$$SAR = c_h \left. \frac{dT}{dt} \right|_{t=0}$$

Where

SAR	is the specific absorption rate in watts per kilogram;
E	is the r.m.s. value of the electric field strength in the tissue in volts per meter;
σ	is the conductivity of the tissue in siemens per metre;
ρ	is the density of the tissue in kilograms per cubic metre;
c _h	is the heat capacity of the tissue in joules per kilogram and Kelvin;
$\left. \frac{dT}{dt} \right _{t=0}$	is the initial time derivative of temperature in the tissue in kelvins per second

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

4.2. SAR Measurement Procedure

Step 1: Power Reference Measurement

The Power Reference Measurement and Power Drift Measurement are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface is 2.7mm This distance cannot be smaller than the distance os sensor calibration points to probe tip as `defined in the probe properties,

Step 2: Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in SATIMO software can find the maximum locations even in relatively coarse grids. When an Area Scan has measured all reachable points, it computes the field maximal found in the scanned area, within a range of the global maximum. The range (in db) is specified in the standards for compliance testing. For example, a 2db range is required in IEEE Standard 1528 and IEC62209 standards, whereby 3db is a requirement when compliance is assessed in accordance with the ARIB standard (Japan) If one Zoom Scan follows the Area Scan, then only the absolute maximum will be taken as reference. For cases where multiple maximum are detected, the number of Zoom Scan has to be increased accordingly.

Area Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100MHz to 6GHz

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5 \text{ mm}$
Maximum probe angle from probe axis to phantom surface normal at the measurement location	30° ± 1°	20° ± 1°
Maximum area scan spatial resolution: $\Delta x_{\text{Area}}, \Delta y_{\text{Area}}$	$\leq 2 \text{ GHz: } \leq 15 \text{ mm}$ $2 - 3 \text{ GHz: } \leq 12 \text{ mm}$	$3 - 4 \text{ GHz: } \leq 12 \text{ mm}$ $4 - 6 \text{ GHz: } \leq 10 \text{ mm}$
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

Step 3: Zoom Scan

Zoom Scan are used to assess the peak spatial SAR value within a cubic average volume containing 1g abd 10g of simulated tissue. The Zoom Scan measures points(refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the Zoom Scan evaluates the averaged SAR for 1g and 10g and displays these values next to the job's label.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

Zoom Scan Parameters extracted from KDB865664 d01 SAR Measurement 100MHz to 6GHz

Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			$\leq 2 \text{ GHz}: \leq 8 \text{ mm}$ $2 - 3 \text{ GHz}: \leq 5 \text{ mm}^*$	$3 - 4 \text{ GHz}: \leq 5 \text{ mm}^*$ $4 - 6 \text{ GHz}: \leq 4 \text{ mm}^*$
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		$\leq 5 \text{ mm}$	$3 - 4 \text{ GHz}: \leq 4 \text{ mm}$ $4 - 5 \text{ GHz}: \leq 3 \text{ mm}$ $5 - 6 \text{ GHz}: \leq 2 \text{ mm}$
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	$\leq 4 \text{ mm}$	$3 - 4 \text{ GHz}: \leq 3 \text{ mm}$ $4 - 5 \text{ GHz}: \leq 2.5 \text{ mm}$ $5 - 6 \text{ GHz}: \leq 2 \text{ mm}$
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	
Minimum zoom scan volume	x, y, z		$\geq 30 \text{ mm}$	$3 - 4 \text{ GHz}: \geq 28 \text{ mm}$ $4 - 5 \text{ GHz}: \geq 25 \text{ mm}$ $5 - 6 \text{ GHz}: \geq 22 \text{ mm}$
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <u>reported</u> SAR from the <u>area scan based 1-g SAR estimation</u> procedures of KDB 447498 is $\leq 1.4 \text{ W/kg}$, $\leq 8 \text{ mm}$, $\leq 7 \text{ mm}$ and $\leq 5 \text{ mm}$ zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

Step 4: Power Drift Measurement

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the same settings. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

4.3. RF Exposure Conditions


Test Configuration and setting:

The device is a 4G Mobile Phone which supports GSM/GPRS/EGPRS, WCDMA/HSPA, LTE, BT, WIFI, and support hot spot mode.

For WWAN SAR testing, the device was controlled by using a base station emulator. Communication between the device and the emulator were established by air link. The distance between the EUT and the antenna is larger than 50cm, and the output power radiated from the emulator antenna is at least 30db smaller than the output power of EUT.

For WLAN testing, the EUT is configured with the WLAN continuous TX tool through engineering command.

Antenna Location: (back view)

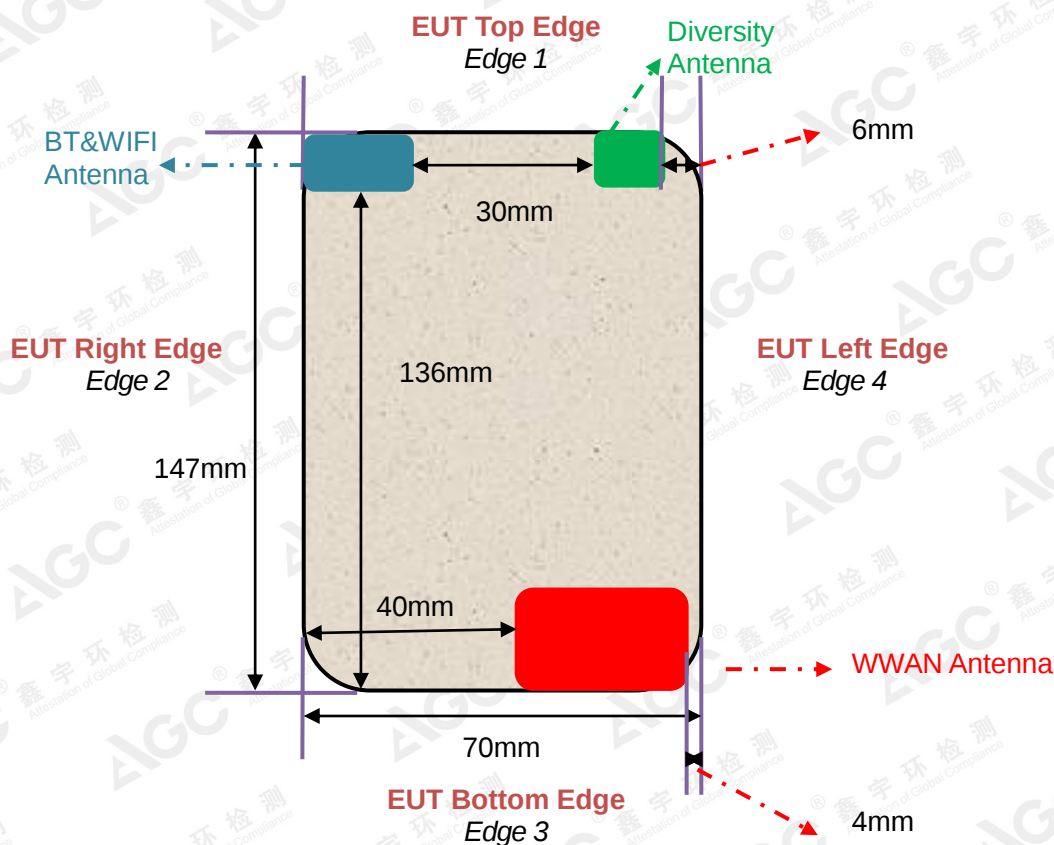

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

For WWAN mode:

Test Configurations	Antenna to edges/surface	SAR required	Note
Head			
Left Touch		Yes	--
Left Tilt		Yes	--
Right Touch		Yes	--
Right Tilt		Yes	--
Body			
Back	<25mm	Yes	--
Front	<25mm	Yes	--
Hotspot			
Back	<25mm	Yes	--
Front	<25mm	Yes	--
Edge 1 (Top)	127mm	No	SAR is not required for the distance between the antenna and the edge is >25mm as per KDB 941225 D06 Hotspot SAR
Edge 2 (Right)	40mm	No	SAR is not required for the distance between the antenna and the edge is >25mm as per KDB 941225 D06 Hotspot SAR
Edge 3 (Bottom)	1mm	Yes	--
Edge 4 (Left)	4mm	Yes	--

For WLAN mode:

Test Configurations	Antenna to edges/surface	SAR required	Note
Head			
Left Touch		Yes	--
Left Tilt		Yes	--
Right Touch		Yes	--
Right Tilt		Yes	--
Body			
Back	<25mm	Yes	--
Front	<25mm	Yes	--
Hotspot			
Back	<25mm	Yes	--
Front	<25mm	Yes	--
Edge 1 (Top)	1mm	Yes	--
Edge 2 (Right)	1mm	Yes	--
Edge 3 (Bottom)	136mm	No	SAR is not required for the distance between the antenna and the edge is >25mm as per KDB 941225 D06 Hotspot SAR
Edge 4 (Left)	36mm	No	SAR is not required for the distance between the antenna and the edge is >25mm as per KDB 941225 D06 Hotspot SAR

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

5. TISSUE SIMULATING LIQUID

For SAR measurement of the field distribution inside the phantom, the phantom must be filled with homogeneous tissue simulating liquid to a depth of at least 15cm. For head SAR testing the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15cm For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15cm. The nominal dielectric values of the tissue simulating liquids in the phantom and the tolerance of 5% are listed in 5.2

5.1. The composition of the tissue simulating liquid

Ingredient (% Weight) Frequency (MHz)	Water	Nacl	Polysorbate 20	DGBE	1,2 Propane diol	Triton X-100	Diethylen- glycol monohexyl ether
750 Head	35	2	0	0	63	0	0
750 Body	55	1	0	0	44	0	0
835 Head	50.36	1.25	48.39	0	0	0	0
835 Body	54	1	0	15	0	30	0
1750 Head	52.64	0.36	0	47	0	0	0
1750 Body	70	1	0	9	0	20	0
1900 Head	54.9	0.18	0	44.92	0	0	0
1900 Body	70	1	0	9	0	20	0
2450 Head	71.88	0.16	0	7.99	0	19.97	0
2450 Body	70	1	0	9	0	20	0
2600 Head	55.242	0.306	0	44.452	0	0	0
2600 Body	70	1	0	9	0	20	0
5000 Head	65.52	0	0	0	0	17.24	17.24
5000 Body	80	0	0	10	0	10	0

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

5.2. Tissue Dielectric Parameters for Head and Body Phantoms

The head tissue dielectric parameters recommended by the IEEE 1528 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness variations in a human head. Other head and body tissue parameters that have not been specified in IEEE 1528 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equations described in Reference [12] and extrapolated according to the head parameters specified in IEEE 1528.

Target Frequency (MHz)	head		body	
	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
750	41.9	0.89	55.5	0.96
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	1.01	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1750	40.1	1.37	53.4	1.49
1800 – 2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
2600	39.0	1.96	52.5	2.16
3000	38.5	2.40	52.0	2.73
5200	36.0	4.66	49.0	5.30
5300	35.9	4.76	48.9	5.42
5600	35.5	5.07	48.5	5.77
5800	35.3	5.27	48.2	6.00

(ϵ_r = relative permittivity, σ = conductivity and $\rho = 1000$ kg/m³)

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

5.3. Tissue Calibration Result

The dielectric parameters of the liquids were verified prior to the SAR evaluation using SATIMO Dielectric Probe Kit and R&S Network Analyzer ZVL6.

Tissue Stimulant Measurement for 750MHz					
Head	Fr. (MHz)	Dielectric Parameters ($\pm 5\%$)		Tissue Temp [°C]	Test time
		ϵ_r 41.9 (39.805-43.995)	δ [s/m] 0.89(0.8455-0.9345)		
	704	43.85	0.85	21.3	July 2,2018
	707.5	43.35	0.86		
	711	41.68	0.87		
	750	41.06	0.87		
Body	Fr. (MHz)	Dielectric Parameters ($\pm 5\%$)		Tissue Temp [°C]	Test time
		ϵ_r 55.5(52.725-58.275)	δ [s/m]0.96(0.912-1.008)		
	704	57.32	0.92	21.5	July 2,2018
	707.5	56.69	0.93		
	711	55.04	0.97		
	750	54.56	0.98		

Tissue Stimulant Measurement for 835MHz					
Head	Fr. (MHz)	Dielectric Parameters ($\pm 5\%$)		Tissue Temp [°C]	Test time
		ϵ_r 41.5 (39.425-43.575)	δ [s/m] 0.90(0.855-0.945)		
	824.2	42.35	0.87	21.5	Jun.15,2018
	826.4	41.68	0.87		
	835	41.06	0.88		
	836.6	40.73	0.90		
	846.6	40.22	0.91		
	848.8	39.93	0.92		
Body	Fr. (MHz)	Dielectric Parameters ($\pm 5\%$)		Tissue Temp [°C]	Test time
		ϵ_r 55.20(52.44-57.96)	δ [s/m]0.97(0.9215-1.0185)		
	824.2	56.11	0.94	21.9	Jun.15,2018
	826.4	55.64	0.95		
	835	55.03	0.95		
	836.6	54.58	0.96		
	846.6	54.15	0.97		
	848.8	53.72	0.98		

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

Tissue Stimulant Measurement for 835MHz					
	Fr. (MHz)	Dielectric Parameters ($\pm 5\%$)		Tissue Temp [°C]	Test time
		ϵ_r 41.5 (39.425-43.575)	δ [s/m] 0.90(0.855-0.945)		
Head	829	41.44	0.90	22.5	Jun.19,2018
	835	41.21	0.90		
	836.5	40.95	0.90		
	844	40.62	0.91		
	Fr. (MHz)	Dielectric Parameters ($\pm 5\%$)		Tissue Temp [°C]	Test time
		ϵ_r 55.20(52.44-57.96)	δ [s/m]0.97(0.9215-1.0185)		
Body	829	56.02	0.95	22.8	Jun.19,2018
	835	55.89	0.95		
	836.5	55.64	0.96		
	844	55.18	0.97		

Tissue Stimulant Measurement for 1750MHz					
	Fr. (MHz)	Dielectric Parameters ($\pm 5\%$)		Tissue Temp [°C]	Test time
		ϵ_r 40.1 (38.095-42.105)	δ [s/m]1.37(1.3015-1.439)		
Head	1712.5	41.66	1.33	21.8	Jun.23,2018
	1720	41.05	1.35		
	1732.5	40.71	1.36		
	1745	40.29	1.38		
	1750	39.84	1.40		
	1752.5	39.13	1.42		
	Fr. (MHz)	Dielectric Parameters ($\pm 5\%$)		Tissue Temp [°C]	Test time
		ϵ_r 53.4(50.73-56.07)	δ [s/m] 1.49(1.4155-1.5645)		
Body	1712.5	55.59	1.43	21.7	Jun.21,2018
	1720	55.16	1.44		
	1732.5	54.67	1.46		
	1745	54.22	1.48		
	1750	53.58	1.50		
	1752.5	53.02	1.51		

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

Tissue Stimulant Measurement for 1900MHz					
	Fr. (MHz)	Dielectric Parameters ($\pm 5\%$)		Tissue Temp [°C]	Test time
		$\epsilon_r 40.00(38.00-42.00)$	$\delta[s/m] 1.40(1.33-1.47)$		
Head	1850.2	41.15	1.35	21.3	Jun.17,2018
	1852.4	40.69	1.36		
	1880	40.03	1.37		
	1900	39.54	1.39		
	1907.6	38.99	1.40		
	1909.8	38.34	1.42		
	Fr. (MHz)	Dielectric Parameters ($\pm 5\%$)		Tissue Temp [°C]	Test time
		$\epsilon_r 53.30(50.635-55.965)$	$\delta[s/m] 1.52(1.444-1.596)$		
Body	1850.2	54.95	1.47	21.6	Jun.17,2018
	1852.4	54.22	1.49		
	1880	53.84	1.51		
	1900	53.16	1.53		
	1907.6	52.77	1.55		
	1909.8	52.05	1.56		

Tissue Stimulant Measurement for 1900MHz					
	Fr. (MHz)	Dielectric Parameters ($\pm 5\%$)		Tissue Temp [°C]	Test time
		$\epsilon_r 40.00(38.00-42.00)$	$\delta[s/m] 1.40(1.33-1.47)$		
Head	1860	41.06	1.36	21.2	Jun.25,2018
	1880	40.67	1.38		
	1900	40.00	1.40		
	Fr. (MHz)	Dielectric Parameters ($\pm 5\%$)		Tissue Temp [°C]	Test time
		$\epsilon_r 53.30(50.635-55.965)$	$\delta[s/m] 1.52(1.444-1.596)$		
Body	1860	54.16	1.48	21.5	Jun.25,2018
	1880	53.74	1.50		
	1900	53.22	1.52		

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

Tissue Stimulant Measurement for 2450MHz					
	Fr. (MHz)	Dielectric Parameters ($\pm 5\%$)		Tissue Temp [°C]	Test time
		$\epsilon_r 39.2(37.24-41.16)$	$\delta[s/m] 1.80(1.71-1.89)$		
Head	2412	40.69	1.73	21.3	Jun.26,2018
	2437	40.05	1.77		
	2450	39.51	1.80		
	2462	38.98	1.82		
	Fr. (MHz)	Dielectric Parameters ($\pm 5\%$)		Tissue Temp [°C]	Test time
		$\epsilon_r 52.7(50.065-55.335)$	$\delta[s/m] 1.95(1.8525-2.0475)$		
Body	2412	54.26	1.88	21.5	Jun.26,2018
	2437	53.64	1.93		
	2450	53.02	1.95		
	2462	52.59	1.96		

Tissue Stimulant Measurement for 2600MHz					
	Fr. (MHz)	Dielectric Parameters ($\pm 5\%$)		Tissue Temp [°C]	Test time
		$\epsilon_r 39(37.05-40.95)$	$\delta[s/m] 1.96(1.86-2.06)$		
Head	2510	40.63	1.88	21.5	Jun.28,2018
	2535	40.20	1.89		
	2560	39.53	1.90		
	2600	39.11	1.92		
	Fr. (MHz)	Dielectric Parameters ($\pm 5\%$)		Tissue Temp [°C]	Test time
		$\epsilon_r 52.5(49.875-55.125)$	$\delta[s/m] 2.16(2.052-2.268)$		
Body	2510	54.06	2.12	21.7	Jun.28,2018
	2535	53.75	2.14		
	2560	53.34	2.15		
	2600	52.48	2.18		

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

Tissue Stimulant Measurement for 5200MHz					
Head	Fr. (MHz)	Dielectric Parameters ($\pm 5\%$)		Tissue Temp [°C]	Test time
		ϵ_r 36(34.2-37.8)	$\delta[s/m]$ 4.66(1.71-1.89)		
	5180	36.55	4.69	21.1	Jun.30,2018
	5200	36.10	4.70		
Body	Fr. (MHz)	Dielectric Parameters ($\pm 5\%$)		Tissue Temp [°C]	Test time
		ϵ_r 49.0(46.55-51.450)	$\delta[s/m]$ 5.30(5.035 -5.565)		
	5180	50.24	5.28	21.3	Jun.30,2018
	5200	49.77	5.31		
	5240	49.18	5.33		

Tissue Stimulant Measurement for 5800MHz					
Head	Fr. (MHz)	Dielectric Parameters ($\pm 5\%$)		Tissue Temp [°C]	Test time
		ϵ_r 35.3(33.535-37.065)	$\delta[s/m]$ 5.27(5.0065-5.5335)		
	5755	36.15	5.20	21.3	July 3, 2018
	5795	35.74	5.22		
Body	Fr. (MHz)	Dielectric Parameters ($\pm 5\%$)		Tissue Temp [°C]	Test time
		ϵ_r 48.2 (45.79-50.610)	$\delta[s/m]$ 6.00 (5.70-6.30)		
	5755	49.77	5.85	21.5	July 3, 2018
	5795	49.13	5.90		
	5800	48.60	5.95		

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.


6. SAR SYSTEM CHECK PROCEDURE

6.1. SAR System Check Procedures

SAR system check is required to confirm measurement accuracy, according to the tissue dielectric media, probe calibration points and other system operating parameters required for measuring the SAR of a test device. The system verification must be performed for each frequency band and within the valid range of each probe calibration point required for testing the device. The same SAR probe(s) and tissue-equivalent media combinations used with each specific SAR system for system verification must be used for device testing. When multiple probe calibration points are required to cover substantially large transmission bands, independent system verifications are required for each probe calibration point. A system verification must be performed before each series of SAR measurements using the same probe calibration point and tissue-equivalent medium. Additional system verification should be considered according to the conditions of the tissue-equivalent medium and measured tissue dielectric parameters, typically every three to four days when the liquid parameters are remeasured or sooner when marginal liquid parameters are used at the beginning of a series of measurements.

Each SATIMO system is equipped with one or more system check kits. These units, together with the predefined measurement procedures within the SATIMO software, enable the user to conduct the system check and system validation. System kit includes a dipole, and dipole device holder.


The system check verifies that the system operates within its specifications. It's performed daily or before every SAR measurement. The system check uses normal SAR measurement in the flat section of the phantom with a matched dipole at a specified distance. The system check setup is shown as below.

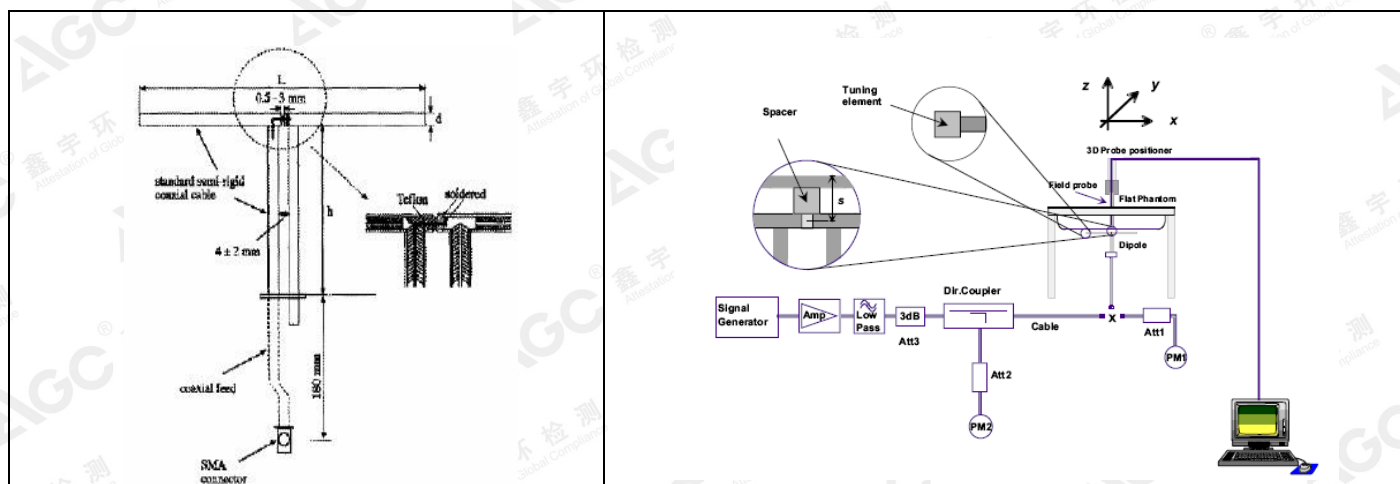

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

6.2. SAR System Check

6.2.1. Dipoles

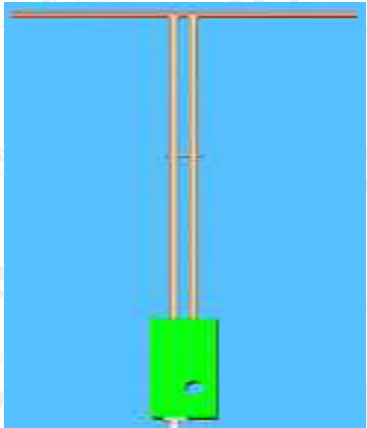	The dipole used is based on the IEEE-1528 standard, and is complied with mechanical and electrical specifications in line with the requirements of IEEE. the table below provides details for the mechanical and electrical specifications for the dipole.
	The wave guide used is based on the IEEE-1528 standard, and is complied with mechanical and electrical specifications in line with the requirements of IEEE. the table below provides details for the mechanical and electrical specifications for the wave guide.

Frequency	L (mm)	h (mm)	d (mm)
750MHz	176	100	6.35
835MHz	161.0	89.8	3.6
1800MHz	71.6	41.7	3.6
1900MHz	68	39.5	3.6
2450MHz	51.5	30.4	3.6
2600MHz	48.5	28.8	3.6

Frequency	L (mm)	W (mm)	L _f (mm)	W _f (mm)
5000MHz	40.39	20.19	81.03	61.98

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

6.2.2. System Check Result

Validation Kit: SN47/14 DIP 0G750-340& SN29/15 DIP 0G835-383& SN29/15 DIP 1G800-387&SN 29/15 DIP 1G900-389& SN 29/15DIP 2G450-393& 47/14 &DIP 2G600-342&SN 15/15 WGA 36

Head

Frequency [MHz]	Target Value(W/Kg)		Reference Result ($\pm 10\%$)		Tested Value(W/Kg)		Tissue Temp. [°C]	Test time
	1g	10g	1g	10g	1g	10g		
750	8.65	5.68	7.785-9.515	5.112-6.248	8.99	5.87	21.3	July 2,2018
835	10.04	6.43	9.036-11.044	5.787 -7.073	10.27	6.18	21.5	Jun.15,2018
835	10.04	6.43	9.036-11.044	5.787 -7.073	9.69	6.18	22.5	Jun.19,2018
1800	37.43	19.88	33.687-41.173	17.892-21.868	40.23	20.64	21.6	Jun.23,2018
1900	41.44	21.33	37.296-45.584	19.197-23.463	39.11	19.80	21.3	Jun.17,2018
1900	41.44	21.33	37.296-45.584	19.197-23.463	39.03	19.63	21.2	Jun.25,2018
2450	54.53	24.30	49.077-59.983	21.87-26.730	52.15	22.47	21.3	Jun.26,2018
2600	53.26	23.87	47.934-58.586	21.483-26.257	49.81	22.66	21.5	Jun.28,2018
5200	159.92	56.13	143.928-175.912	50.517-61.743	169.10	56.22	21.1	Jun.30,2018
5800	180.38	61.46	162.342-198.418	55.314-67.606	188.65	63.21	21.3	July 3,2018

Body

Frequency [MHz]	Target Value(W/Kg)		Reference Result ($\pm 10\%$)		Tested Value(W/Kg)		Tissue Temp. [°C]	Test time
	1g	10g	1g	10g	1g	10g		
750	8.95	5.97	8.055-9.845	5.373-6.567	9.65	6.00	21.5	July 2,2018
835	9.85	6.45	8.865-10.835	5.805-7.095	9.68	5.92	21.9	Jun.15,2018
835	9.85	6.45	8.865-10.835	5.805-7.095	9.35	5.98	22.8	Jun.19,2018
1800	36.53	19.80	32.877-40.183	17.82-21.780	36.41	18.88	21.7	Jun.21,2018
1900	39.38	20.86	35.442-43.318	18.774-22.946	37.61	19.43	21.6	Jun.17,2018
1900	39.38	20.86	35.442-43.318	18.774-22.946	37.26	18.89	21.5	Jun.25,2018
2450	49.92	23.16	44.928-54.912	20.844-25.476	49.60	22.27	21.5	Jun.26,2018
2600	51.69	23.33	46.521-56.859	20.997-25.663	49.60	22.48	21.7	Jun.28,2018
5200	158.49	56.44	142.641-174.339	50.796-62.084	169.48	56.56	21.3	Jun.30,2018
5800	176.30	61.30	158.67-193.93	55.17-67.43	179.50	59.36	21.5	July 3,2018

Note:

(1) We use a CW signal of 18dBm for system check, and then all SAR values are normalized to 1W forward power. The result must be within $\pm 10\%$ of target value.



The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

7. EUT TEST POSITION

This EUT was tested in **Right Cheek, Right Tilted, Left Cheek, Left Tilted, Body back, Body front and 4 edges.**

7.1. Define Two Imaginary Lines on the Handset

- (1) The vertical centerline passes through two points on the front side of the handset the midpoint of the width w_t of the handset at the level of the acoustic output, and the midpoint of the width w_b of the handset.
- (2) The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output. The horizontal line is also tangential to the face of the handset at point A.
- (3) The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily to the front face of the handset, especially for clamshell handsets, handsets with flip covers, and other irregularly shaped handsets.

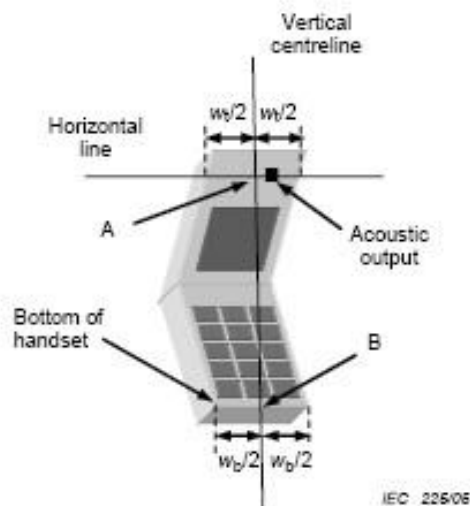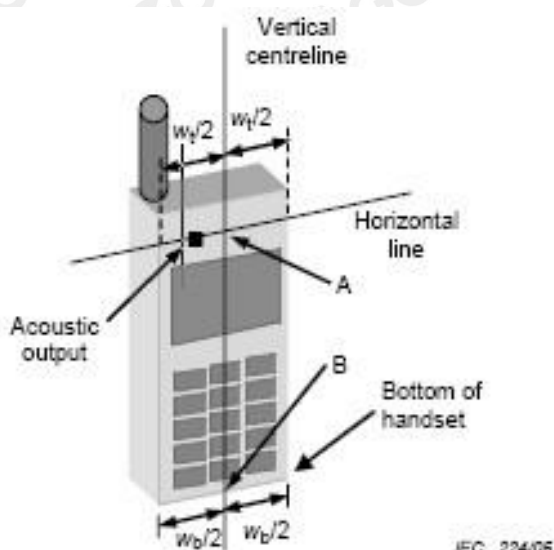

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

7.2. Cheek Position

- (1) To position the device with the vertical center line of the body of the device and the horizontal line crossing the center piece in a plane parallel to the sagittal plane of the phantom. While maintaining the device in this plane, align the vertical center line with the reference plane containing the ear and mouth reference point (M: Mouth, RE: Right Ear, and LE: Left Ear) and align the center of the ear piece with the line RE-LE.
- (2) To move the device towards the phantom with the ear piece aligned with the the line LE-RE until the phone touched the ear. While maintaining the device in the reference plane and maintaining the phone contact with ear, move the bottom of the phone until any point on the front side is in contact with the cheek of the phantom or until contact with the ear is lost



7.3. Tilt Position



- (1) To position the device in the “cheek” position described above.
- (2) While maintaining the device in the reference plane described above and pivoting against the ear, moves it outward away from the mouth by an angle of 15 degrees or until with the ear is lost.



The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

7.4. Body Worn Position

- (1) To position the EUT parallel to the phantom surface.
- (2) To adjust the EUT parallel to the flat phantom.
- (3) To adjust the distance between the EUT surface and the flat phantom to **10mm**.

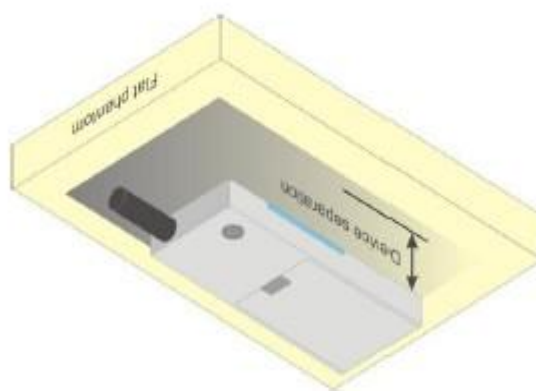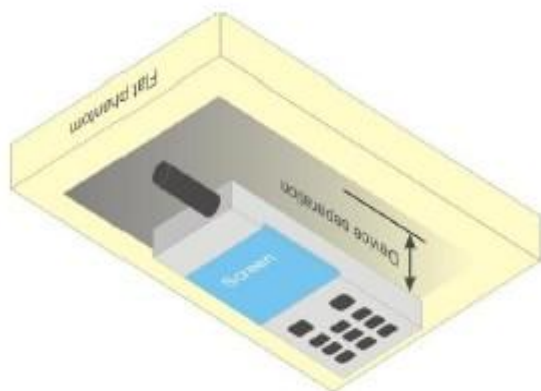

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

8. SAR EXPOSURE LIMITS

Limits for General Population/Uncontrolled Exposure (W/kg)

Type Exposure	Uncontrolled Environment Limit (W/kg)
Spatial Peak SAR (1g cube tissue for brain or body)	1.60
Spatial Average SAR (Whole body)	0.08
Spatial Peak SAR (Limbs)	4.0

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

9. TEST FACILITY

Test Site	Attestation of Global Compliance (Shenzhen) Co., Ltd
Location	1-2F., Bldg.2, No.1-4, Chaxi Sanwei Technical Industrial Park, Gushu, Xixiang, Bao'an District B112-B113, Shenzhen 518012
NVLAP Lab Code	600153-0
Designation Number	CN5028
Test Firm Registration Number	682566
Description	Attestation of Global Compliance(Shenzhen) Co., Ltd is accredited by National Voluntary Laboratory Accreditation program, NVLAP Code 600153-0

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

10. TEST EQUIPMENT LIST

Equipment description	Manufacturer/ Model	Identification No.	Current calibration date	Next calibration date
SAR Probe	MVG	SN 08/16 EPGO282	Aug. 08,2017	Aug. 07,2018
Phantom	SATIMO	SN_4511_SAM90	Validated. No cal required.	Validated. No cal required.
Liquid	SATIMO	-	Validated. No cal required.	Validated. No cal required.
Comm Tester	Agilent-8960	GB46310822	Mar. 01,2018	Feb. 28,2019
Comm Tester	R&S- CMW500	S/N121209	Jul. 13,2017	Jul. 12,2018
Multimeter	Keithley 2000	1188656	Mar. 01,2018	Feb. 28,2019
Dipole	SATIMO SID750	SN 22/16 DIP 0G750-417	Jul. 05,2016	Jul. 04,2019
Dipole	SATIMO SID835	SN29/15 DIP 0G835-383	Jul. 05,2016	Jul. 04,2019
Dipole	SATIMO SID1800	SN29/15 DIP 1G800-387	Jul. 05,2016	Jul. 04,2019
Dipole	SATIMO SID1900	SN 29/15 DIP 1G900-389	Jul. 05,2016	Jul. 04,2019
Dipole	SATIMO SID2450	SN29/15 DIP 2G450-393	Jul. 05,2016	Jul. 04,2019
Dipole	SATIMO SID2600	SN 22/16 DIP 2G600-407	Jul. 05,2016	Jul. 04,2019
Wave guide	SWG5500	SN 15/15 WGA 36	Jul. 05,2016	Jul. 04,2019
Signal Generator	Agilent-E4438C	US41461365	Mar. 01,2018	Feb. 28,2019
Vector Analyzer	Agilent / E4440A	US41421290	Mar. 01,2018	Feb. 28,2019
Network Analyzer	Rhode & Schwarz ZVL6	SN100132	Mar. 01,2018	Feb. 28,2019
Attenuator	Warison /WATT-6SR1211	N/A	N/A	N/A
Attenuator	Mini-circuits / VAT-10+	N/A	N/A	N/A
Amplifier	EM30180	SN060552	Mar. 01,2018	Feb. 28,2019
Directional Couple	Werlatone/ C5571-10	SN99463	Jun. 12,2018	Jun. 11,2019
Directional Couple	Werlatone/ C6026-10	SN99482	Jun. 12,2018	Jun. 11,2019
Power Sensor	NRP-Z21	1137.6000.02	Oct. 12,2017	Oct. 11,2018
Power Sensor	NRP-Z23	US38261498	Mar. 01,2018	Feb. 28,2019
Power Viewer	R&S	V2.3.1.0	N/A	N/A

Note: Per KDB 865664 Dipole SAR Validation, AGC Lab has adopted 3 years calibration intervals. On annual basis, every measurement dipole has been evaluated and is in compliance with the following criteria:

1. There is no physical damage on the dipole;
2. System validation with specific dipole is within 10% of calibrated value;
3. Return-loss is within 20% of calibrated measurement;
4. Impedance is within 5Ω of calibrated measurement.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

11. MEASUREMENT UNCERTAINTY

Measurement uncertainty for Dipole averaged over 1 gram / 10 gram.									
a	b	c	d	e f(d,k)	f	g	h c×f/e	i c×g/e	k
Uncertainty Component	Sec.	Tol (± %)	Prob. Dist.	Div.	Ci (1g)	Ci (10g)	1g Ui (±%)	10g Ui (±%)	vi
Measurement System									
Probe calibration	E.2.1	5.831	N	1	1	1	5.83	5.83	∞
Axial Isotropy	E.2.2	0.695	R	$\sqrt{3}$	$\sqrt{0.5}$	$\sqrt{0.5}$	0.28	0.28	∞
Hemispherical Isotropy	E.2.2	1.045	R	$\sqrt{3}$	$\sqrt{0.5}$	$\sqrt{0.5}$	0.43	0.43	∞
Boundary effect	E.2.3	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Linearity	E.2.4	0.685	R	$\sqrt{3}$	1	1	0.40	0.40	∞
System detection limits	E.2.4	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Modulation response	E.2.5	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
Readout Electronics	E.2.6	0.021	N	1	1	1	0.021	0.021	∞
Response Time	E.2.7	0	R	$\sqrt{3}$	1	1	0	0	∞
Integration Time	E.2.8	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
RF ambient conditions-Noise	E.6.1	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
RF ambient conditions-reflections	E.6.1	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
Probe positioner mechanical tolerance	E.6.2	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
Probe positioning with respect to phantom shell	E.6.3	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
Extrapolation, interpolation, and integrations algorithms for max. SAR evaluation	E.5	2.3	R	$\sqrt{3}$	1	1	1.33	1.33	∞
Test sample Related									
Test sample positioning	E.4.2	2.6	N	1	1	1	2.6	2.6	∞
Device holder uncertainty	E.4.1	3	N	1	1	1	3	3	∞
Output power variation—SAR drift measurement	E.2.9	5	R	$\sqrt{3}$	1	1	2.89	2.89	∞
SAR scaling	E.6.5	5	R	$\sqrt{3}$	1	1	2.89	2.89	∞
Phantom and tissue parameters									
Phantom shell uncertainty—shape, thickness, and permittivity	E.3.1	4	R	$\sqrt{3}$	1	1	2.31	2.31	∞
Uncertainty in SAR correction for deviations in permittivity and conductivity	E.3.2	1.9	N	1	1	0.84	1.90	1.60	∞
Liquid conductivity measurement	E.3.3	4	N	1	0.78	0.71	3.12	2.84	M
Liquid permittivity measurement	E.3.3	5	N	1	0.23	0.26	1.15	1.30	M
Liquid conductivity—temperature uncertainty	E.3.4	2.5	R	$\sqrt{3}$	0.78	0.71	1.13	1.02	∞
Liquid permittivity—temperature uncertainty	E.3.4	2.5	R	$\sqrt{3}$	0.23	0.26	0.33	0.38	∞
Combined Standard Uncertainty			RSS				9.79	9.59	
Expanded Uncertainty (95% Confidence interval)			K=2				19.58	19.18	

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

System check uncertainty for Dipole averaged over 1 gram / 10 gram.									
a	b	c	d	e f(d,k)	f	g	h c×f/e	i c×g/e	k
Uncertainty Component	Sec.	Tol (± %)	Prob. Dist.	Div.	Ci (1g)	Ci (10g)	1g Ui (±%)	10g Ui (±%)	vi
Measurement System									
Probe calibration drift	E.2.1.3	0.5	N	1	1	1	0.50	0.50	∞
Axial Isotropy	E.2.2	0.695	R	$\sqrt{3}$	0	0	0.00	0.00	∞
Hemispherical Isotropy	E.2.2	1.045	R	$\sqrt{3}$	0	0	0.00	0.00	∞
Boundary effect	E.2.3	1.0	R	$\sqrt{3}$	0	0	0.00	0.00	∞
Linearity	E.2.4	0.685	R	$\sqrt{3}$	0	0	0.00	0.00	∞
System detection limits	E.2.4	1.0	R	$\sqrt{3}$	0	0	0.00	0.00	∞
Modulation response	E.2.5	3.0	R	$\sqrt{3}$	0	0	0.00	0.00	∞
Readout Electronics	E.2.6	0.021	N	1	0	0	0.00	0.00	∞
Response Time	E.2.7	0	R	$\sqrt{3}$	0	0	0.00	0.00	∞
Integration Time	E.2.8	1.4	R	$\sqrt{3}$	0	0	0.00	0.00	∞
RF ambient conditions-Noise	E.6.1	3.0	R	$\sqrt{3}$	0	0	0.00	0.00	∞
RF ambient conditions-reflections	E.6.1	3.0	R	$\sqrt{3}$	0	0	0.00	0.00	∞
Probe positioner mechanical tolerance	E.6.2	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
Probe positioning with respect to phantom shell	E.6.3	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
Extrapolation, interpolation, and integrations algorithms for max. SAR evaluation	E.5	2.3	R	$\sqrt{3}$	0	0	0.00	0.00	∞
System check source (dipole)									
Deviation of experimental dipoles	E.6.4	2	N	1	1	1	2	2	∞
Input power and SAR drift measurement	8,6.6.4	5	R	$\sqrt{3}$	1	1	2.89	2.89	∞
Dipole axis to liquid distance	8,E.6.6	2	R	$\sqrt{3}$	1	1	1.15	1.15	∞
Phantom and tissue parameters									
Phantom shell uncertainty—shape, thickness, and permittivity	E.3.1	4	R	$\sqrt{3}$	1	1	2.31	2.31	∞
Uncertainty in SAR correction for deviations in permittivity and conductivity	E.3.2	1.9	N	1	1	0.84	1.90	1.60	∞
Liquid conductivity measurement	E.3.3	4	N	1	0.78	0.71	3.12	2.84	M
Liquid permittivity measurement	E.3.3	5	N	1	0.23	0.26	1.15	1.30	M
Liquid conductivity—temperature uncertainty	E.3.4	2.5	R	$\sqrt{3}$	0.78	0.71	1.13	1.02	∞
Liquid permittivity—temperature uncertainty	E.3.4	2.5	R	$\sqrt{3}$	0.23	0.26	0.33	0.38	∞
Combined Standard Uncertainty			RSS				5.564	5.205	
Expanded Uncertainty (95% Confidence interval)			K=2				11.128	10.410	

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

System Validation uncertainty for Dipole averaged over 1 gram / 10 gram.									
a	b	c	d	e f(d,k)	f	g	h c×f/e	i c×g/e	k
Uncertainty Component	Sec.	Tol (±%)	Prob. Dist.	Div.	Ci (1g)	Ci (10g)	1g Ui (±%)	10g Ui (±%)	vi
Measurement System									
Probe calibration	E.2.1	5.831	N	1	1	1	5.83	5.83	∞
Axial Isotropy	E.2.2	0.695	R	$\sqrt{3}$	1	1	0.40	0.40	∞
Hemispherical Isotropy	E.2.2	1.045	R	$\sqrt{3}$	0	0	0.00	0.00	∞
Boundary effect	E.2.3	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Linearity	E.2.4	0.685	R	$\sqrt{3}$	1	1	0.40	0.40	∞
System detection limits	E.2.4	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Modulation response	E.2.5	3.0	R	$\sqrt{3}$	0	0	0.00	0.00	∞
Readout Electronics	E.2.6	0.021	N	1	1	1	0.021	0.021	∞
Response Time	E.2.7	0.0	R	$\sqrt{3}$	0	0	0.00	0.00	∞
Integration Time	E.2.8	1.4	R	$\sqrt{3}$	0	0	0.00	0.00	∞
RF ambient conditions-Noise	E.6.1	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
RF ambient conditions-reflections	E.6.1	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
Probe positioner mechanical tolerance	E.6.2	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
Probe positioning with respect to phantom shell	E.6.3	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
Extrapolation, interpolation, and integrations algorithms for max. SAR evaluation	E.5	2.3	R	$\sqrt{3}$	1	1	1.33	1.33	∞
System check source (dipole)									
Deviation of experimental dipole from numerical dipole	E.6.4	5.0	N	1	1	1	5.00	5.00	∞
Input power and SAR drift measurement	8,6.6.4	5.0	R	$\sqrt{3}$	1	1	2.89	2.89	∞
Dipole axis to liquid distance	8,E.6.6	2.0	R	$\sqrt{3}$	1	1	1.15	1.15	∞
Phantom and tissue parameters									
Phantom shell uncertainty—shape, thickness, and permittivity	E.3.1	4.0	R	$\sqrt{3}$	1	1	2.31	2.31	∞
Uncertainty in SAR correction for deviations in permittivity and conductivity	E.3.2	1.9	N	1	1	0.84	1.90	1.60	∞
Liquid conductivity measurement	E.3.3	4.0	N	1	0.78	0.71	3.12	2.84	M
Liquid permittivity measurement	E.3.3	5.0	N	1	0.23	0.26	1.15	1.30	M
Liquid conductivity—temperature uncertainty	E.3.4	2.5	R	$\sqrt{3}$	0.78	0.71	1.13	1.02	∞
Liquid permittivity—temperature uncertainty	E.3.4	2.5	R	$\sqrt{3}$	0.23	0.26	0.33	0.38	∞
Combined Standard Uncertainty			RSS				9.718	9.517	
Expanded Uncertainty (95% Confidence interval)			K=2				19.437	19.035	

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

12. CONDUCTED POWER MEASUREMENT

GSM BAND

Mode	Frequency(MHz)	Avg. Burst Power(dBm)	Duty cycle Factor(dBm)	Frame Power(dBm)
Maximum Power <1>				
GSM 850	824.2	31.33	-9	22.33
	836.6	31.64	-9	22.64
	848.8	31.09	-9	22.09
GPRS 850 (1 Slot)	824.2	31.11	-9	22.11
	836.6	31.45	-9	22.45
	848.8	31.29	-9	22.29
GPRS 850 (2 Slot)	824.2	28.62	-6	22.62
	836.6	28.59	-6	22.59
	848.8	28.42	-6	22.42
GPRS 850 (3 Slot)	824.2	26.33	-4.26	22.07
	836.6	26.47	-4.26	22.21
	848.8	26.53	-4.26	22.27
GPRS 850 (4 Slot)	824.2	25.29	-3	22.29
	836.6	25.66	-3	22.66
	848.8	25.67	-3	22.67
EGPRS 850 (1 Slot)	824.2	25.12	-9	16.12
	836.6	25.22	-9	16.22
	848.8	25.39	-9	16.39
EGPRS 850 (2 Slot)	824.2	22.12	-6	16.12
	836.6	22.12	-6	16.12
	848.8	22.29	-6	16.29
EGPRS 850 (3 Slot)	824.2	21.34	-4.26	17.08
	836.6	21.25	-4.26	16.99
	848.8	21.42	-4.26	17.16
EGPRS 850 (4 Slot)	824.2	19.29	-3	16.29
	836.6	19.16	-3	16.16
	848.8	19.37	-3	16.37

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

Mode	Frequency(MHz)	Avg. Burst Power(dBm)	Duty cycle Factor(dBm)	Frame Power(dBm)
Maximum Power <2>				
GSM 850	824.2	30.63	-9	21.63
	836.6	30.78	-9	21.78
	848.8	30.69	-9	21.69
GPRS 850 (1 Slot)	824.2	30.06	-9	21.06
	836.6	30.42	-9	21.42
	848.8	30.23	-9	21.23
GPRS 850 (2 Slot)	824.2	28.60	-6	22.60
	836.6	28.53	-6	22.53
	848.8	28.40	-6	22.40
GPRS 850 (3 Slot)	824.2	26.31	-4.26	22.05
	836.6	26.43	-4.26	22.17
	848.8	26.51	-4.26	22.25
GPRS 850 (4 Slot)	824.2	25.26	-3	22.26
	836.6	25.61	-3	22.61
	848.8	25.63	-3	22.63

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

GSM BAND CONTINUE

Mode	Frequency(MHz)	Avg. Burst Power(dBm)	Duty cycle Factor(dBm)	Frame Power(dBm)
Maximum Power <1>				
PCS1900	1850.2	28.43	-9	19.43
	1880	28.25	-9	19.25
	1909.8	28.34	-9	19.34
GPRS1900 (1 Slot)	1850.2	27.55	-9	18.55
	1880	27.69	-9	18.69
	1909.8	27.34	-9	18.34
GPRS1900 (2 Slot)	1850.2	24.11	-6	18.11
	1880	24.28	-6	18.28
	1909.8	24.46	-6	18.46
GPRS1900 (3 Slot)	1850.2	23.26	-4.26	19.00
	1880	23.33	-4.26	19.07
	1909.8	23.11	-4.26	18.85
GPRS1900 (4 Slot)	1850.2	22.85	-3	19.85
	1880	22.78	-3	19.78
	1909.8	22.69	-3	19.69
EGPRS1900 (1 Slot)	1850.2	24.03	-9	15.03
	1880	24.33	-9	15.33
	1909.8	24.49	-9	15.49
EGPRS1900 (2 Slot)	1850.2	21.54	-6	15.54
	1880	21.75	-6	15.75
	1909.8	21.68	-6	15.68
EGPRS1900 (3 Slot)	1850.2	21.57	-4.26	17.31
	1880	21.33	-4.26	17.07
	1909.8	21.24	-4.26	16.98
EGPRS1900 (4 Slot)	1850.2	20.23	-3	17.23
	1880	20.44	-3	17.44
	1909.8	20.11	-3	17.11

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

Mode	Frequency(MHz)	Avg. Burst Power(dBm)	Duty cycle Factor(dBm)	Frame Power(dBm)
Maximum Power <2>				
PCS1900	1850.2	27.89	-9	18.89
	1880	27.65	-9	18.65
	1909.8	27.59	-9	18.59
GPRS1900 (1 Slot)	1850.2	27.43	-9	18.43
	1880	27.58	-9	18.58
	1909.8	27.31	-9	18.31
GPRS1900 (2 Slot)	1850.2	24.06	-6	18.06
	1880	24.25	-6	18.25
	1909.8	24.43	-6	18.43
GPRS1900 (3 Slot)	1850.2	23.22	-4.26	18.96
	1880	23.31	-4.26	19.05
	1909.8	23.08	-4.26	18.82
GPRS1900 (4 Slot)	1850.2	22.82	-3	19.82
	1880	22.76	-3	19.76
	1909.8	22.63	-3	19.63

Note 1:

The Frame Power (Source-based time-averaged Power) is scaled the maximum burst average power based on time slots. The calculated methods are show as following:

Frame Power = Max burst power (1 Up Slot) – 9 dB

Frame Power = Max burst power (2 Up Slot) – 6 dB

Frame Power = Max burst power (3 Up Slot) – 4.26 dB

Frame Power = Max burst power (4 Up Slot) – 3 dB

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

UMTS BAND
HSDPA Setup Configuration:

- The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- The RF path losses were compensated into the measurements.
- A call was established between EUT and Based Station with following setting:
 - (1) Set Gain Factors(β_c and β_d) parameters set according to each
 - (2) Set RMC 12.2Kbps+HSDPA mode.
 - (3) Set Cell Power=-86dBm
 - (4) Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
 - (5) Select HSDPA Uplink Parameters
 - (6) Set Delta ACK, Delta NACK and Delta CQI=8
 - (7) Set Ack - Nack Repetition Factor to 3
 - (8) Set CQI Feedback Cycle (k) to 4ms
 - (9) Set CQI Repetition Factor to 2
 - (10) Power Ctrl Mode=All Up bits
- The transmitted maximum output power was recorded.

 Table C.10.2.4: β values for transmitter characteristics tests with HS-DPCCH

Sub-test	β_c (Note5)	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15(Note 4)	15/15(Note 4)	64	12/15(Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

 Note 1: $\Delta ACK, \Delta NACK$ and $\Delta CQI = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$.

 Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, ΔACK and $\Delta NACK = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$, and $\Delta CQI = 24/15$ with $\beta_{hs} = 24/15 * \beta_c$.

 Note 3: CM = 1 for $\beta_c/\beta_d = 12/15$, $hs/c = 24/15$. For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

 Note 4: For subtest 2 the c/d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $c = 11/15$ and $d = 15/15$.

HSUPA Setup Configuration:

- The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- The RF path losses were compensated into the measurements.
- A call was established between EUT and Base Station with following setting * :
 - (1) Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
 - (2) Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
 - (3) Set Cell Power = -86 dBm
 - (4) Set Channel Type = 12.2k + HSPA
 - (5) Set UE Target Power
 - (6) Power Ctrl Mode= Alternating bits
 - (7) Set and observe the E-TFCI
 - (8) Confirm that E-TFCI is equal to the target E-TFCI of 75 for sub-test 1, and other subtest's E-TFCI
- The transmitted maximum output power was recorded.

 Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1)	β_{ec}	β_{ed} (Note 4) (Note 5)	β_{ed} (SF)	β_{ed} (Code s)	CM (dB) (Note 2)	MPR (dB) (Note 2) (Note 6)	AG Index (Note 5)	E-TF CI
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/225	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	β_{ed1} : 47/15 β_{ed2} : 47/15	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15	0	-	-	5/15	5/15	47/15	4	1	1.0	0.0	12	67

Note 1: For sub-test 1 to 4, ΔACK , $\Delta NACK$ and $\Delta CQI = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$. For sub-test 5, ΔACK , $\Delta NACK$ and $\Delta CQI = 5/15$ with $\beta_{hs} = 5/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $hs/c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the c/d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $c = 10/15$ and $d = 15/15$.

Note 4: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 5: β_{ed} cannot be set directly; it is set by Absolute Grant Value.

Note 6: For subtests 2, 3 and 4, UE may perform E-DPDCH power scaling at max power which could results in slightly smaller MPR values.

UMTS BAND II

Mode	Frequency (MHz)	Avg. Burst Power (dBm)
WCDMA 1900 RMC	1852.4	22.39
	1880	22.44
	1907.6	22.00
WCDMA 1900 AMR	1852.4	22.00
	1880	22.04
	1907.6	21.88
HSDPA Subtest 1	1852.4	21.03
	1880	20.70
	1907.6	20.78
HSDPA Subtest 2	1852.4	20.17
	1880	20.08
	1907.6	20.82
HSDPA Subtest 3	1852.4	19.73
	1880	20.13
	1907.6	20.22
HSDPA Subtest 4	1852.4	20.50
	1880	20.42
	1907.6	20.40
HSUPA Subtest 1	1852.4	20.43
	1880	20.28
	1907.6	20.14
HSUPA Subtest 2	1852.4	21.01
	1880	21.48
	1907.6	21.38
HSUPA Subtest 3	1852.4	21.42
	1880	21.30
	1907.6	21.27
HSUPA Subtest 4	1852.4	21.26
	1880	22.42
	1907.6	22.19
HSUPA Subtest 5	1852.4	21.44
	1880	21.62
	1907.6	22.08

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

UMTS BAND IV

Mode	Frequency (MHz)	Avg. Burst Power (dBm)
WCDMA 1700 RMC	1712.5	21.32
	1732.5	21.45
	1752.5	21.46
WCDMA 1700 AMR	1712.5	19.79
	1732.5	20.42
	1752.5	19.85
HSDPA Subtest 1	1712.5	19.75
	1732.5	19.26
	1752.5	20.02
HSDPA Subtest 2	1712.5	20.21
	1732.5	19.96
	1752.5	19.14
HSDPA Subtest 3	1712.5	19.90
	1732.5	18.91
	1752.5	20.09
HSDPA Subtest 4	1712.5	20.32
	1732.5	19.63
	1752.5	19.33
HSUPA Subtest 1	1712.5	19.16
	1732.5	19.43
	1752.5	19.85
HSUPA Subtest 2	1712.5	19.60
	1732.5	20.63
	1752.5	20.93
HSUPA Subtest 3	1712.5	20.69
	1732.5	20.83
	1752.5	21.43
HSUPA Subtest 4	1712.5	20.16
	1732.5	19.25
	1752.5	19.54
HSUPA Subtest 5	1712.5	19.15
	1732.5	18.77
	1752.5	19.04

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

UMTS BAND V

Mode	Frequency (MHz)	Avg. Burst Power (dBm)
WCDMA 850 RMC	826.4	21.44
	836.6	20.85
	846.6	21.58
WCDMA 850 AMR	826.4	20.78
	836.6	20.90
	846.6	21.01
HSDPA Subtest 1	826.4	19.73
	836.6	19.46
	846.6	19.96
HSDPA Subtest 2	826.4	19.86
	836.6	19.66
	846.6	20.05
HSDPA Subtest 3	826.4	20.60
	836.6	19.90
	846.6	20.11
HSDPA Subtest 4	826.4	20.82
	836.6	20.48
	846.6	20.52
HSUPA Subtest 1	826.4	20.56
	836.6	21.80
	846.6	21.15
HSUPA Subtest 2	826.4	21.09
	836.6	21.40
	846.6	21.95
HSUPA Subtest 3	826.4	21.10
	836.6	20.62
	846.6	20.90
HSUPA Subtest 4	826.4	21.03
	836.6	20.37
	846.6	21.11
HSUPA Subtest 5	826.4	20.92
	836.6	20.60
	846.6	21.54

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

According to 3GPP 25.101 sub-clause 6.2.2, the maximum output power is allowed to be reduced by following the table.

Table 6.1aA: UE maximum output power with HS-DPCCH and E-DCH

UE Transmit Channel Configuration	CM(db)	MPR(db)
For all combinations of ,DPDCH,DPCCH HS-DPDCH,E-DPDCH and E-DPCCH	$0 \leq CM \leq 3.5$	$MAX(CM-1,0)$

Note: CM=1 for $\beta_c/\beta_d=12/15$, $\beta_{hs}/\beta_c=24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

The device supports MPR to solve linearity issues (ACLR or SEM) due to the higher peak-to average ratios (PAR) of the HSUPA signal. This prevents saturating the full range of the TX DAC inside of device and provides a reduced power output to the RF transceiver chip according to the Cubic Metric (a function of the combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH).

When E-DPDCH channels are present the beta gains on those channels are reduced firsts to try to get the power under the allowed limit. If the beta gains are lowered as far as possible, then a hard limiting is applied at the maximum allowed level.

The SW currently recalculates the cubic metric every time the beta gains on the E-DPDCH are reduced. The cubic metric will likely get lower each time this is done .However, there is no reported reduction of maximum output power in the HSUPA mode since the device also provides a compensation for the power back-off by increasing the gain of TX_AG_C in the transceiver (PA) device.

The end effect is that the DUT output power is identical to the case where there is no MPR in the device.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

LTE Band

LTE (TDD) Considerations

For Time-Division Duplex (TDD) systems, SAR must be tested using a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by the defined 3GPP LTE TDD configurations.

SAR was tested with the highest transmission duty factor (63.33%) using Uplink-downlink configuration 0 and Special subframe configuration 7.

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS)

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$7680 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$
5	$6592 \cdot T_s$			$20480 \cdot T_s$		
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			$12800 \cdot T_s$		
8	$24144 \cdot T_s$			-	-	-
9	$13168 \cdot T_s$			-	-	-

Table 4.2-2: Uplink-downlink configurations

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

Calculated Duty Cycle

Uplink-Downlink Configuration	Downlink-to-Uplink Switch-point Periodicity	Subframe Number										Calculated Duty Cycle(%)
		0	1	2	3	4	5	6	7	8	9	
0	5ms	D	S	U	U	U	D	S	U	U	U	63.33
1	5ms	D	S	U	U	D	D	S	U	U	D	43.33
2	5ms	D	S	U	D	D	D	S	U	D	D	23.33
3	10ms	D	S	U	U	U	D	D	D	D	D	31.67
4	10ms	D	S	U	U	D	D	D	D	D	D	21.67
5	10ms	D	S	U	D	D	D	D	D	D	D	11.67
6	5ms	D	S	U	U	U	D	S	U	U	D	53.33

Note: Calculated Duty Cycle = Extended cyclic prefix in uplink x (Ts) x # of S + # of U

Example for Calculated Duty Cycle for Uplink-Downlink Configuration 0:

Calculated Duty Cycle = $5120 \times [1/(15000 \times 2048)] \times 2 + 6 \text{ ms} = 63.33\%$

where

$T_s = 1/(15000 \times 2048)$ seconds

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

LTE Band

Conducted Power of LTE Band 2(dBm)							
Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel	Channel
					18607	18900	19193
1.4MHz	QPSK	1	0	0	23.70	23.82	23.46
			3	0	23.88	23.86	23.55
			5	0	23.65	23.78	23.43
		3	0	0	23.58	23.69	23.58
			2	0	23.75	23.61	23.43
			3	0	23.70	23.78	23.11
		6	0	1	22.83	22.99	22.10
	16QAM	1	0	1	22.80	23.07	22.53
			3	1	22.58	23.13	22.46
			5	1	22.87	23.08	22.51
		3	0	1	22.46	22.74	22.10
			2	1	22.59	23.89	22.09
			3	1	22.83	22.81	22.02
		6	0	2	21.71	21.78	21.13
Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel	Channel
					18615	18900	19185
3MHz	QPSK	1	0	0	23.63	23.81	23.48
			7	0	23.43	23.66	23.50
			14	0	23.31	23.71	23.33
		8	0	1	22.59	22.58	22.05
			4	1	22.62	22.67	22.11
			7	1	22.71	22.85	22.04
		15	0	1	22.71	22.81	21.96
	16QAM	1	0	1	22.86	22.99	22.28
			7	1	22.53	22.88	22.35
			14	1	22.71	22.86	22.25
		8	0	2	21.36	21.44	20.59
			4	2	21.44	21.62	20.86
			7	2	21.71	21.78	20.93
		15	0	2	21.63	21.70	20.95

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

Conducted Power of LTE Band 2(dBm)							
Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel	Channel
					18625	18900	19175
5MHz	QPSK	1	0	0	23.17	23.35	23.12
			12	0	23.06	23.31	23.06
			24	0	23.02	23.16	23.00
		12	0	1	22.56	22.57	21.55
			6	1	22.28	22.59	21.59
			11	1	22.42	22.68	21.89
		25	0	1	22.23	22.79	22.02
	16QAM	1	0	1	22.51	22.54	21.87
			12	1	22.35	22.45	21.58
			24	1	22.36	22.42	21.84
		12	0	2	21.53	21.88	20.58
			6	2	21.42	21.69	20.67
			11	2	21.49	21.80	20.88
		25	0	2	21.26	21.77	21.00
Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel	Channel
					18650	18900	19150
10MHz	QPSK	1	0	0	23.20	23.45	22.88
			24	0	23.22	23.16	22.67
			49	0	23.17	23.06	22.97
		25	0	1	22.10	22.52	21.58
			12	1	22.17	22.47	21.69
			25	1	22.09	22.25	21.96
		50	0	1	22.11	22.54	21.99
	16QAM	1	0	1	22.41	22.49	22.15
			24	1	22.32	22.53	22.33
			49	1	22.05	22.29	22.22
		25	0	2	21.19	21.37	21.03
			12	2	21.32	21.43	21.11
			25	2	21.07	21.33	21.08
		50	0	2	21.08	21.38	20.95

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

Conducted Power of LTE Band 2(dBm)							
Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel	Channel
					18675	18900	19125
15MHz	QPSK	1	0	0	23.15	23.32	22.95
			37	0	23.17	23.11	22.45
			74	0	23.13	23.03	22.91
		36	0	1	22.23	22.42	22.08
			16	1	22.24	22.33	22.04
			35	1	22.12	22.28	22.14
		75	0	1	22.17	22.55	22.18
	16QAM	1	0	1	22.36	22.35	22.02
			37	1	22.34	22.45	22.10
			74	1	22.15	22.18	22.04
		36	0	2	20.59	21.23	21.11
			16	2	20.54	21.08	21.07
			35	2	20.97	21.28	21.02
		75	0	2	21.08	21.39	21.01
Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel	Channel
					18700	18900	19100
20MHz	QPSK	1	0	0	23.06	22.67	22.85
			49	0	23.01	22.92	22.78
			99	0	23.05	22.82	22.64
		50	0	1	21.86	22.15	22.55
			25	1	21.75	22.17	22.67
			49	1	21.92	22.18	21.89
		100	0	1	21.95	22.34	21.87
	16QAM	1	0	1	22.24	22.16	22.08
			49	1	22.12	22.23	22.07
			99	1	22.01	22.19	22.05
		50	0	2	20.56	21.23	20.66
			25	2	20.22	21.31	20.59
			49	2	20.82	21.10	20.82
		100	0	2	20.91	21.28	20.78

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

Conducted Power of LTE Band 4(dBm)							
Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel	Channel
					19957	20175	20393
1.4MHz	QPSK	1	0	0	23.15	21.56	21.77
			2	0	23.11	21.33	21.53
			5	0	23.19	21.54	21.80
		3	0	0	22.26	22.46	23.22
			1	0	22.36	22.42	22.39
			2	0	22.08	22.63	22.82
		6	0	1	22.11	22.08	22.99
	16QAM	1	0	1	22.00	22.90	22.85
			2	1	22.11	22.69	22.38
			5	1	23.16	22.93	22.90
		3	0	1	22.89	22.14	22.52
			1	1	22.87	22.42	22.52
			2	1	22.99	22.60	22.80
		6	0	2	21.94	21.76	21.90
Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel	Channel
					19965	20175	20385
3MHz	QPSK	1	0	0	23.01	23.91	23.01
			7	0	23.06	23.88	23.11
			14	0	23.11	23.99	23.03
		8	0	1	23.23	22.88	22.85
			4	1	23.09	22.66	22.94
			7	1	23.02	22.84	22.93
		15	0	1	23.02	22.88	22.78
	16QAM	1	0	1	23.12	22.90	22.54
			7	1	23.16	22.85	22.67
			14	1	23.10	22.96	22.45
		8	0	2	22.03	21.74	21.53
			4	2	22.01	21.69	21.57
			7	2	22.13	21.85	21.76
		15	0	2	21.88	21.70	21.71

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

Conducted Power of LTE Band 4(dBm)							
Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel	Channel
					19975	20175	20375
5MHz	QPSK	1	0	0	23.19	23.78	23.73
			12	0	23.58	23.58	23.44
			24	0	23.76	23.75	23.89
		12	0	1	22.59	22.58	22.78
			6	1	22.46	22.62	22.80
			11	1	22.91	22.87	22.77
		25	0	1	22.89	22.80	22.80
	16QAM	1	0	1	23.16	22.82	22.53
			12	1	23.12	22.45	22.37
			24	1	23.03	22.94	22.65
		12	0	2	21.85	21.79	22.39
			6	2	21.49	21.55	22.49
			11	2	21.99	21.84	21.74
		25	0	2	21.89	21.67	21.71
Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel	Channel
					20000	20175	20350
10MHz	QPSK	1	0	0	23.58	23.73	23.81
			24	0	23.59	23.46	23.89
			49	0	23.55	23.04	23.91
		25	0	1	22.44	22.59	22.58
			12	1	23.64	22.46	22.67
			25	1	22.73	22.95	22.82
		50	0	1	22.82	22.79	22.71
	16QAM	1	0	1	22.58	22.78	22.92
			24	1	22.66	22.46	22.46
			49	1	22.68	22.98	22.07
		25	0	2	21.56	21.55	21.88
			12	2	21.34	21.69	21.67
			25	2	21.68	21.78	21.75
		50	0	2	21.78	21.68	21.71

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

Conducted Power of LTE Band 4(dBm)							
Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel	Channel
					20025	20175	20325
15MHz	QPSK	1	0	0	23.93	23.60	23.05
			38	0	23.45	23.66	23.21
			74	0	23.48	23.93	23.87
		36	0	1	22.59	23.49	22.55
			18	1	22.37	23.64	22.66
			39	1	22.75	23.23	22.93
		75	0	1	22.91	23.10	23.03
	16QAM	1	0	1	23.07	22.69	22.65
			38	1	23.12	22.64	22.58
			74	1	23.16	22.92	22.52
		36	0	2	21.59	22.13	21.66
			18	2	21.69	22.31	21.48
			39	2	21.64	22.01	21.57
		75	0	2	21.76	21.91	21.85
Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel	Channel
					20050	20175	20300
20MHz	QPSK	1	0	0	23.86	23.41	23.86
			49	0	23.58	23.59	23.47
			99	0	23.69	23.88	23.69
		50	0	1	22.59	22.94	22.56
			25	1	22.65	22.82	22.58
			49	1	22.61	22.88	22.76
		100	0	1	22.65	22.78	22.81
	16QAM	1	0	1	22.88	22.48	22.81
			49	1	22.89	22.92	22.48
			99	1	22.65	22.81	22.85
		50	0	2	21.33	21.59	21.77
			25	2	21.61	21.43	21.74
			49	2	21.57	21.72	21.71
		100	0	2	21.59	21.66	21.72

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

Conducted Power of LTE Band 5(dBm)							
Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel	Channel
					20407	20525	20643
1.4MHz	QPSK	1	0	0	23.80	20.42	20.14
			2	0	23.75	20.26	20.53
			5	0	23.36	20.31	20.14
		3	0	0	23.41	20.19	21.69
			1	0	23.22	20.64	21.58
			2	0	23.31	20.36	21.26
		6	0	1	22.28	21.29	22.26
	16QAM	1	0	1	22.49	21.61	20.34
			2	1	22.54	21.59	20.33
			5	1	22.48	22.61	20.36
		3	0	1	22.59	22.69	21.59
			1	1	22.34	22.74	21.74
			2	1	22.41	22.35	21.31
		6	0	2	21.23	22.18	22.32
Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel	Channel
					20415	20525	20635
3MHz	QPSK	1	0	0	23.23	24.19	22.20
			7	0	23.41	24.03	22.34
			14	0	23.29	24.01	22.18
		8	0	1	22.22	23.10	21.96
			4	1	22.29	23.11	21.88
			7	1	22.24	23.09	21.97
		15	0	1	22.21	23.25	23.14
	16QAM	1	0	1	22.51	23.42	20.56
			7	1	22.34	23.63	20.54
			14	1	22.56	23.52	20.53
		8	0	2	21.43	22.49	22.18
			4	2	21.35	22.52	22.22
			7	2	21.25	22.33	22.14
		15	0	2	21.18	22.21	22.18

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

Conducted Power of LTE Band 5(dBm)							
Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel	Channel
					20425	20525	20625
5MHz	QPSK	1	0	0	23.20	22.12	20.23
			12	0	23.24	22.23	20.31
			24	0	23.35	22.24	20.21
		12	0	1	22.16	23.10	21.52
			6	1	22.19	23.15	21.44
			11	1	22.30	23.29	21.26
		25	0	1	22.28	23.28	21.34
	16QAM	1	0	1	22.55	23.41	23.17
			12	1	22.64	23.57	23.25
			24	1	22.71	23.59	23.10
		12	0	2	21.42	22.15	22.53
			6	2	21.35	22.27	22.54
			11	2	21.47	22.37	22.19
		25	0	2	21.30	22.17	22.21
Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel	Channel
					20450	20525	20600
10MHz	QPSK	1	0	0	21.33	22.07	22.21
			24	0	21.24	22.06	22.03
			49	0	21.42	22.10	22.06
		25	0	1	21.64	22.11	21.15
			12	1	21.59	22.32	21.25
			25	1	21.63	22.42	21.42
		50	0	1	20.59	22.55	21.26
	16QAM	1	0	1	20.55	22.10	21.11
			24	1	20.43	21.68	21.12
			49	1	20.39	21.88	21.32
		25	0	2	20.42	21.65	21.64
			12	2	20.57	21.54	21.63
			25	2	21.10	21.06	21.58
		50	0	2	21.11	21.13	21.72

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

Conducted Power of LTE Band 7 (dBm)							
Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel	Channel
					20775	21100	21425
5MHz	QPSK	1	0	0	21.45	21.36	21.42
			12	0	21.69	21.54	21.28
			24	0	21.44	21.54	22.23
		12	0	1	21.35	21.13	22.11
			6	1	21.43	22.40	22.19
			13	1	21.36	22.34	21.36
		25	0	1	22.44	22.29	21.70
	16QAM	1	0	1	22.39	21.11	22.67
			12	1	22.25	22.36	21.21
			24	1	22.66	21.12	21.25
		12	0	2	21.85	22.13	21.69
			6	2	21.99	21.15	22.53
			13	2	22.02	21.28	22.77
		25	0	2	22.13	21.05	24.85
Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel	Channel
					20800	21100	21400
10MHz	QPSK	1	0	0	22.39	22.36	21.56
			24	0	22.44	22.11	21.47
			49	0	22.69	22.26	21.00
		25	0	1	21.47	22.33	21.20
			12	1	21.03	22.46	21.34
			25	1	21.34	22.38	21.29
		50	0	1	22.56	22.55	22.61
	16QAM	1	0	1	22.55	21.11	22.13
			24	1	21.44	21.32	22.51
			49	1	21.36	21.52	22.64
		25	0	2	21.42	21.49	22.45
			12	2	21.28	21.23	22.59
			25	2	22.19	21.17	22.67
		50	0	2	22.74	21.39	21.74

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

Conducted Power of LTE Band 7 (dBm)

Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel	Channel
					20825	21100	21375
15MHz	QPSK	1	0	0	22.43	22.31	22.03
			37	0	22.58	22.05	22.11
			74	0	22.69	22.11	22.09
		37	0	1	21.55	22.16	21.47
			16	1	21.64	22.28	21.57
			35	1	21.66	22.27	21.38
		75	0	1	22.10	22.54	22.42
	16QAM	1	0	1	22.16	21.45	21.56
			37	1	22.58	21.36	21.88
			74	1	21.47	22.44	22.29
		37	0	2	21.53	21.11	22.13
			16	2	21.95	21.13	22.24
			35	2	22.42	21.28	22.65
		75	0	2	22.72	21.94	22.74
Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel	Channel
					20850	21100	21350
20MHz	QPSK	1	0	0	22.52	22.95	22.89
			49	0	21.33	22.19	22.79
			99	0	21.28	22.33	22.45
		50	0	1	21.56	21.56	22.36
			25	1	21.78	22.33	21.52
			49	1	21.36	22.47	21.38
		100	0	1	22.44	21.58	21.44
	16QAM	1	0	1	21.29	22.87	21.94
			49	1	21.34	22.79	21.33
			99	1	21.39	22.67	21.14
		50	0	2	22.45	22.33	22.38
			25	2	22.52	22.45	22.49
			49	2	22.39	22.64	22.85
		100	0	2	21.09	21.88	21.99

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

Conducted Power of LTE Band 12(dBm)							
Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel	Channel
					23017	23095	23173
1.4MHz	QPSK	1	0	0	23.76	22.32	22.64
			3	0	23.59	22.46	22.46
			5	0	23.81	21.14	22.65
		3	0	0	21.22	21.53	22.47
			2	0	21.37	21.35	22.70
			3	0	21.88	22.29	22.76
		6	0	1	22.81	22.28	22.75
	16QAM	1	0	1	22.92	22.68	22.87
			3	1	22.69	21.59	22.90
			5	1	22.95	21.50	22.57
		3	0	1	21.33	21.34	22.74
			2	1	21.67	21.46	22.42
			3	1	21.94	21.27	22.38
		6	0	2	22.78	22.28	22.86
Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel	Channel
					23025	23095	23165
3MHz	QPSK	1	0	0	21.68	22.47	21.73
			7	0	21.53	22.53	21.39
			14	0	21.82	22.04	21.69
		8	0	1	22.39	21.96	21.53
			4	1	22.27	21.56	21.75
			7	1	22.84	21.17	22.75
		15	0	1	22.80	22.24	22.66
	16QAM	1	0	1	22.93	22.72	22.05
			7	1	21.34	22.69	22.37
			14	1	21.11	21.31	22.02
		8	0	2	21.34	21.53	22.57
			4	2	21.37	21.45	22.34
			7	2	21.93	22.28	22.24
		15	0	2	22.84	22.27	22.76

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

Conducted Power of LTE Band 12(dBm)							
Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel	Channel
					23035	23095	23155
5MHz	QPSK	1	0	0	22.67	22.54	22.72
			12	0	22.56	22.59	22.98
			24	0	22.74	22.67	22.65
		12	0	1	21.59	22.27	22.67
			6	1	21.31	22.64	22.57
			13	1	21.79	22.09	22.72
		25	0	1	22.80	21.25	22.79
	16QAM	1	0	1	22.95	21.92	22.70
			12	1	22.58	21.57	22.37
			24	1	21.12	21.25	22.56
		12	0	2	21.26	21.54	22.46
			6	2	21.34	21.37	22.64
			13	2	21.06	21.27	22.84
		25	0	2	22.90	22.36	21.86
Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel	Channel
					23060	23095	23130
10MHz	QPSK	1	0	0	20.76	22.32	23.64
			24	0	20.53	22.59	23.57
			49	0	20.81	21.14	23.65
		25	0	1	21.55	21.32	22.25
			12	1	21.59	21.57	22.58
			25	1	21.88	22.29	22.68
		50	0	1	22.81	22.28	22.75
	16QAM	1	0	1	22.92	22.68	22.87
			24	1	23.22	22.56	22.69
			49	1	23.55	22.50	22.82
		25	0	2	21.22	21.59	22.58
			12	2	21.59	21.69	22.79
			25	2	21.64	21.27	22.78
		50	0	2	22.78	22.28	21.86

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3.3-1 of the 3GPP TS36.101.

Table 6.2.3.3-1 Maximum Power Reduction (MPR) for Power class3

Modulation	Maximum Power Reduction (MPR) for Power[RB]						MPR(dB)
	1.4MHz	3MHz	5MHz	10MHz	15MHz	20MHz	
QPSK	>5	>4	>8	>12	>16	>18	≤1
16QAM	≤5	≤4	≤8	≤12	≤16	≤18	≤1
16QAM	>5	>4	>8	>12	>16	>18	≤2

The allowed A-MPR values specified below in Table 6.2.4.3-1 of 3GPP TS36.101 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signaling Value of "NS_01".3

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

Table 6.2.4.3-1: Additional Maximum Power Reduction (A-MPR) / Spectrum Emission requirements

Network Signaling value	Requirements (sub-clause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks (N_{RB})	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.2-1	1.4,3,5,10,15,20	Table 5.4.2-1	N/A
NS_03	6.6.2.2.3.1	2,4,10, 23, 25,35,36	3	>5	≤ 1
			5	>6	≤ 1
			10	>6	≤ 1
			15	>8	≤ 1
			20	>10	≤ 1
NS_04	6.6.2.2.3.2	41	5	>6	≤ 1
NS_05	6.6.3.3.3.1	1	10, 15, 20	Table 6.2.4.3-4	
NS_06	6.6.2.2.3.3	12, 13, 14, 17	1.4, 3, 5, 10	≥ 50	≤ 1
NS_07	6.6.2.2.3.3	13	10	Table 5.4.2-1	N/A
NS_08	6.6.3.3.3.2			Table 6.2.4.3-2	Table 6.2.4.3-2
NS_09	6.6.3.3.3.3	19	10, 15	> 44	≤ 3
NS_10	6.6.3.3.3.4	21	10, 15	> 40	≤ 1
				> 55	≤ 2
NS_11	6.6.2.2.1	20	15, 20	Table 6.2.4.3-3	Table 6.2.4.3-3
NS_12	6.6.3.3.13	231	1.4, 3, 5, 10,15,20	Table 6.2.4.3-5	Table 6.2.4.3-5
NS_13	6.6.3.3.5	26	1.4, 3, 5	Table 6.2.4.3-6	Table 6.2.4.3-6
NS_14	6.6.3.3.6	26	5	Table 6.2.4.3-7	Table 6.2.4.3-7
NS_15	6.6.3.3.7	26	10, 15	Table 6.2.4.3-8	Table 6.2.4.3-8
NS_16	6.6.3.3.8	26	1.4, 3, 5, 10, 15	Table 6.2.4.3-9	Table 6.2.4.3-9
NS_17	6.6.3.3.9	27	3, 5, 10	Table 6.2.4.3-10	Table 6.2.4.3-10
NS_18	6.6.3.3.10	28	5, 10	Table 6.2.4.3-11, Table 6.2.4.3-12, Table 6.2.4.3-13	
	6.6.3.3.11	28	5	Table 5.4.2-1	N/A
NS_19			10, 15, 20	≥ 2	≤ 1
NS_20			10, 15, 20	≥ 1	≤ 4
NS_21			10, 15, 20	Table 6.2.4.3-15	Table 6.2.4.3-15
NS_22			5, 10, 15, 20	Table 6.2.4.3-14	Table 6.2.4.3-14
...					
NS_20	-	-	-	-	-

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

2.4G WIFI

Mode	Data Rate (Mbps)	Channel	Frequency(MHz)	Avg. Burst Power(dBm)
802.11b	1	1	2412	11.99
		6	2437	10.74
		11	2462	12.12
802.11g	6	1	2412	8.70
		6	2437	9.14
		11	2462	9.51
802.11n(20)	6.5	1	2412	9.12
		6	2437	9.07
		11	2462	9.43
802.11n(40)	13.5	1	2422	9.19
		6	2437	8.14
		11	2452	8.18

Bluetooth_V4.0_BR/EDR

Modulation	Channel	Frequency(MHz)	Avg. Burst Power (dBm)
GFSK	0	2402	-1.843
	39	2441	-2.400
	78	2480	1.186
$\pi/4$ -DQPSK	0	2402	-2.755
	39	2441	-3.084
	78	2480	0.243
8-DPSK	0	2402	-2.855
	39	2441	-3.236
	78	2480	0.151

Bluetooth_V4.0_BLE

Modulation	Channel	Frequency(MHz)	Peak Power (dBm)
GFSK	0	2402	-2.173
	19	2440	-2.760
	39	2480	0.805

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

5GHz WIFI

Band	Mode	Channel	Frequency (MHz)	Average Power (dBm)
U-NII-1	802.11a20	36	5180	7.57
		40	5200	7.70
		48	5240	8.20
	802.11n HT20	36	5180	7.93
		40	5200	8.15
		48	5240	8.08
	802.11n HT40	38	5190	7.81
		46	5230	8.52
	802.11ac VHT20	36	5180	8.93
		40	5200	8.02
		48	5240	8.14
	802.11ac VHT40	38	5190	7.66
		46	5230	8.70

Band	Mode	Channel	Frequency (MHz)	Average Power (dBm)
U-NII-3	802.11a	149	5745	10.84
		157	5785	10.82
		165	5825	10.14
	802.11n HT20	149	5745	8.94
		157	5785	8.88
		165	5825	10.01
	802.11n HT40	151	5755	11.27
		159	5795	10.46
	802.11ac VHT20	149	5745	11.06
		157	5785	10.90
		165	5825	9.84
	802.11ac VHT40	151	5755	11.24
		159	5795	10.50

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

13. TEST RESULTS

13.1. SAR Test Results Summary

13.1.1. Test position and configuration

Head SAR was performed with the device configured in the positions according to IEEE 1528-2013, Body-worn SAR was performed with the device 10mm from the phantom, and 4 Edges SAR was performed with the device 10mm from the phantom.

13.1.2. Operation Mode

1. Per KDB 447498 D01 v06 ,for each exposure position, if the highest 1-g SAR is ≤ 0.8 W/kg, testing for low and high channel is optional.
2. Per KDB 865664 D01 v01r04,for each frequency band, if the measured SAR is ≥ 0.8 W/Kg, testing for repeated SAR measurement is required , that the highest measured SAR is only to be tested. When the SAR results are near the limit, the following procedures are required for each device to verify these types of SAR measurement related variation concerns by repeating the highest measured SAR configuration in each frequency band.
 - (1) When the original highest measured SAR is ≥ 0.8 W/Kg, repeat that measurement once.
 - (2) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is >1.20 or when the original or repeated measurement is ≥ 1.45 W/Kg.
 - (3) Perform a third repeated measurement only if the original, first and second repeated measurement is ≥ 1.5 W/Kg and ratio of largest to smallest SAR for the original, first and second measurement is ≥ 1.20 .
3. Per KDB 648474 D04 v01r03,when the reported SAR for a body-worn accessory measured without a headset connected to the handset is ≤ 1.2 W/Kg, SAR testing with a headset connected is not required.
4. Per KDB 248227 D01v02r02,for 2.4GHz 802.11g/n SAR testing is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.
5. Per KDB 941225 D06 V02r01, when the same wireless mode transmission configurations for voice and data are required for SAR measurements, the more conservative configuration with a smaller separation distance should be tested for the overlapping SAR configurations.
6. Maximum Scaling SAR in order to calculate the Maximum SAR values to test under the standard Peak Power, Calculation method is as follows:
Maximum Scaling SAR =tested SAR (Max.) $\times$ [maximum turn-up power (mw)/ maximum measurement output power(mw)]
7. Proximity sensor, just for avoiding the wrong operation in the phone screen when call, and has no influence on output power or SAR result
8. Per KDB 941225 D05v02r03,
 - (1) start with the largest channel bandwidth and measure SAR for QPSK with 1RB allocation using the RB offset and required test channel combination with highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
 - (2) 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure;
 - (3) For QPSK with 100% RB allocation. SAR is not required when the highest maximum output power for 100% RB allocation is less than the highest maximum output power in 50% and 1RB allocation and the highest reported SAR is >1.45 W/Kg, the remaining required test channels must also be tested.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

- (4) 16QAM output power for each RB allocation configuration is not 1/2 dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is $\leq 1.45\text{W/Kg}$, Per KDB 941225 D05v02r02, 16QAM SAR testing is not required.
- (5) Smaller bandwidth output power for each RB allocation configuration is $>$ not 1/2 dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is $\leq 1.45\text{W/Kg}$. Per KDB 941125 D05v02r03, smaller bandwidth SAR testing is not required.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

13.1.3. Test Result

SAR MEASUREMENT									
Depth of Liquid (cm):>15				Relative Humidity (%): 53.4					
Product: Mobile Phone									
Test Mode: GSM850 with GMSK modulation									
Position	Mode	Ch.	Fr. (MHz)	Power Drift (<±5%)	SAR (1g) (W/kg)	Max. Tune-up Power (dBm)	Meas. output Power (dBm)	Scaled SAR (W/Kg)	Limit (W/kg)
SIM 1 Card									
Left Cheek	voice	190	836.6	-1.44	0.353	31.70	31.64	0.358	1.6
Left Tilt	voice	190	836.6	0.75	0.248	31.70	31.64	0.251	1.6
Right Cheek	voice	190	836.6	0.69	0.341	31.70	31.64	0.346	1.6
Right Tilt	voice	190	836.6	-2.05	0.231	31.70	31.64	0.234	1.6
Body back	voice	190	836.6	1.24	0.558	31.70	31.64	0.566	1.6
Body front	voice	190	836.6	0.53	0.431	31.70	31.64	0.437	1.6
Body back	GPRS-4 slot	190	836.6	-2.33	0.638	25.70	25.66	0.644	1.6
Body front	GPRS-4 slot	190	836.6	0.64	0.598	25.70	25.66	0.604	1.6
Edge 3(Bottom)	GPRS-4 slot	190	836.6	0.27	0.216	25.70	25.66	0.218	1.6
Edge 4(Left)	GPRS-4 slot	190	836.6	-0.99	0.376	25.70	25.66	0.379	1.6

Note:

- When the 1-g Reported SAR is ≤ 0.8 W/kg, testing for low and high channel is optional. Refer to KDB 447498.
- The test separation for body back, body front and 4 Edges is 10mm of all above table.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

SAR MEASUREMENT									
Depth of Liquid (cm):>15				Relative Humidity (%): 52.1					
Product: Mobile Phone									
Test Mode: PCS1900 with GMSK modulation									
Position	Mode	Ch.	Fr. (MHz)	Power Drift (<±5%)	SAR (1g) (W/kg)	Max. Tune-up Power (dBm)	Meas. output Power (dBm)	Scaled SAR (W/Kg)	Limit (W/kg)
SIM 1 Card									
Left Cheek	voice	661	1880.0	-1.10	0.060	28.50	28.25	0.064	1.6
Left Tilt	voice	661	1880.0	1.03	0.008	28.50	28.25	0.008	1.6
Right Cheek	voice	661	1880.0	0.94	0.029	28.50	28.25	0.031	1.6
Right Tilt	voice	661	1880.0	-0.55	0.006	28.50	28.25	0.006	1.6
Body back	voice	661	1880.0	2.68	0.726	28.50	28.25	0.769	1.6
Body front	voice	661	1880.0	-1.03	0.646	28.50	28.25	0.684	1.6
Body back	GPRS-4 slot	512	1850.2	-0.21	0.992	23.00	22.85	1.027	1.6
Body back	GPRS-4 slot	661	1880	1.27	0.988	23.00	22.78	1.039	1.6
Body back	GPRS-4 slot	810	1909.8	-0.36	1.109	23.00	22.69	1.191	1.6
Body front	GPRS-4 slot	512	1850.2	0.97	0.973	23.00	22.85	1.007	1.6
Body front	GPRS-4 slot	661	1880	-0.52	0.979	23.00	22.78	1.030	1.6
Body front	GPRS-4 slot	810	1909.8	0.84	1.057	23.00	22.69	1.135	1.6
Edge 3(Bottom)	GPRS-4 slot	661	1880.0	-0.34	0.640	23.00	22.78	0.673	1.6
Edge 4(Left)	GPRS-4 slot	661	1880.0	1.12	0.098	23.00	22.78	0.103	1.6

Note:

- When the 1-g Reported SAR is ≤ 0.8 W/kg, testing for low and high channel is optional. Refer to KDB 447498.
- The test separation for body back, body front and 4 Edges is 10mm of all above table.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

SAR MEASUREMENT									
Depth of Liquid (cm):>15					Relative Humidity (%): 52.1				
Product: Mobile Phone									
Test Mode: WCDMA Band II with QPSK modulation									
Position	Mode	Ch.	Fr. (MHz)	Power Drift (<±5%)	SAR (1g) (W/kg)	Max. Tune-up Power (dBm)	Meas. output Power (dBm)	Scaled SAR (W/Kg)	Limit (W/kg)
Left Cheek	RMC 12.2kbps	9400	1880	-0.66	0.125	22.50	22.44	0.127	1.6
Left Tilt	RMC 12.2kbps	9400	1880	-1.51	0.028	22.50	22.44	0.028	1.6
Right Cheek	RMC 12.2kbps	9400	1880	1.33	0.060	22.50	22.44	0.061	1.6
Right Tilt	RMC 12.2kbps	9400	1880	-0.04	0.04	22.50	22.44	0.041	1.6
Body back	RMC 12.2kbps	9262	1852.4	0.25	1.160	22.50	22.39	1.190	1.6
Body back	RMC 12.2kbps	9400	1880	-1.34	1.119	22.50	22.44	1.135	1.6
Body back	RMC 12.2kbps	9538	1907.6	2.09	1.048	22.50	22.00	1.176	1.6
Body front	RMC 12.2kbps	9262	1852.4	-2.31	1.244	22.50	22.39	1.276	1.6
Body front	RMC 12.2kbps	9400	1880	2.00	1.179	22.50	22.44	1.195	1.6
Body front	RMC 12.2kbps	9538	1907.6	-0.92	1.114	22.50	22.00	1.250	1.6
Body front+ear	RMC 12.2kbps	9262	1852.4	0.61	1.185	22.50	22.39	1.215	1.6
Body front+ear	RMC 12.2kbps	9400	1880	0.11	1.135	22.50	22.44	1.151	1.6
Body front+ear	RMC 12.2kbps	9538	1907.6	1.36	1.056	22.50	22.00	1.185	1.6
Edge 3(Bottom)	RMC 12.2kbps	9400	1880	0.04	0.735	22.50	22.44	0.745	1.6
Edge 4(Left)	RMC 12.2kbps	9400	1880	0.67	0.101	22.50	22.44	0.102	1.6

Note:

- When the 1-g Reported SAR is ≤ 0.8 W/kg, testing for low and high channel is optional. Refer to KDB 447498.
- The test separation for body back, body front and 4 Edges is 10mm of all above table.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

SAR MEASUREMENT									
Depth of Liquid (cm):>15									
Product: Mobile Phone									
Test Mode: WCDMA Band IV with QPSK modulation									
Position	Mode	Ch.	Fr. (MHz)	Power Drift (<±5%)	SAR (1g) (W/kg)	Max. Tune-up Power (dBm)	Meas. output Power (dBm)	Scaled SAR (W/Kg)	Limit (W/kg)
Left Cheek	RMC 12.2kbps	8662	1732.5	-0.85	0.117	21.50	21.45	0.118	1.6
Left Tilt	RMC 12.2kbps	8662	1732.5	0.34	0.027	21.50	21.45	0.027	1.6
Right Cheek	RMC 12.2kbps	8662	1732.5	-0.74	0.107	21.50	21.45	0.108	1.6
Right Tilt	RMC 12.2kbps	8662	1732.5	0.26	0.040	21.50	21.45	0.040	1.6
Body back	RMC 12.2kbps	8562	1712.5	-1.05	1.108	21.50	21.32	1.155	1.6
Body back	RMC 12.2kbps	8662	1732.5	-1.38	1.138	21.50	21.45	1.151	1.6
Body back	RMC 12.2kbps	8763	1752.5	0.90	1.123	21.50	21.46	1.133	1.6
Body front	RMC 12.2kbps	8562	1712.5	0.7	1.038	21.50	21.32	1.082	1.6
Body front	RMC 12.2kbps	8662	1732.5	-1.14	1.027	21.50	21.45	1.039	1.6
Body front	RMC 12.2kbps	8763	1752.5	1.27	1.148	21.50	21.46	1.159	1.6
Edge 3(Bottom)	RMC 12.2kbps	8662	1732.5	-0.26	0.615	21.50	21.45	0.622	1.6
Edge 4(Left)	RMC 12.2kbps	8662	1732.5	0.33	0.102	21.50	21.45	0.103	1.6

Note:

- When the 1-g Reported SAR is ≤ 0.8 W/kg, testing for low and high channel is optional. Refer to KDB 447498.
- The test separation for body back, body front and 4 Edges is 10mm of all above table.

SAR MEASUREMENT									
Depth of Liquid (cm):>15					Relative Humidity (%): 53.4				
Product: Mobile Phone									
Test Mode: WCDMA Band V with QPSK modulation									
Position	Mode	Ch.	Fr. (MHz)	Power Drift (<±5%)	SAR (1g) (W/kg)	Max. Tune-up Power (dBm)	Meas. output Power (dBm)	Scaled SAR (W/Kg)	Limit (W/kg)
Left Cheek	RMC 12.2kbps	4183	836.6	1.12	0.285	21.60	20.85	0.339	1.6
Left Tilt	RMC 12.2kbps	4183	836.6	-0.43	0.168	21.60	20.85	0.200	1.6
Right Cheek	RMC 12.2kbps	4183	836.6	0.92	0.293	21.60	20.85	0.348	1.6
Right Tilt	RMC 12.2kbps	4183	836.6	0.05	0.205	21.60	20.85	0.244	1.6
Body back	RMC 12.2kbps	4183	836.6	-0.36	0.569	21.60	20.85	0.676	1.6
Body front	RMC 12.2kbps	4183	836.6	1.08	0.523	21.60	20.85	0.622	1.6
Edge 3(Bottom)	RMC 12.2kbps	4183	836.6	-2.53	0.146	21.60	20.85	0.174	1.6
Edge 4(Left)	RMC 12.2kbps	4183	836.6	-2.69	0.327	21.60	20.85	0.389	1.6

Note:

- When the 1-g Reported SAR is ≤ 0.8 W/kg, testing for low and high channel is optional. Refer to KDB 447498.
- The test separation for body back, body front and 4 Edges is 10mm of all above table.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

SAR MEASUREMENT												
Depth of Liquid (cm):>15						Relative Humidity (%): 53.3						
Product: Mobile Phone												
Test Mode: LTE Band 2												
BM MHz	MOD	Position	Test Mode		Ch.	Freq. (MHz)	Power Drift (<±5%)	SAR (1g) (W/kg)	Max. Tune up Power (dBm)	Meas. output Power (dBm)	Scaled SAR (W/Kg)	Limit (W/kg)
			UL RB Allocatio n	UL RB STAR T								
20	QPSK	Left Cheek	1	0	18900	1880	-2.79	0.078	23.10	22.67	0.086	1.6
		Left Tilt	1	0	18900	1880	-0.54	0.013	23.10	22.67	0.014	1.6
		Right Cheek	1	0	18900	1880	1.04	0.032	23.10	22.67	0.035	1.6
		Right Tilt	1	0	18900	1880	0.63	0.011	23.10	22.67	0.012	1.6
		Body back	1	0	18900	1880	-1.25	0.625	23.10	22.67	0.690	1.6
		Body front	1	0	18900	1880	2.63	0.680	23.10	22.67	0.751	1.6
		Edge 3(Bottom)	1	0	18900	1880	-1.00	0.371	23.10	22.67	0.410	1.6
		Edge 4(Left)	1	0	18900	1880	0.82	0.046	23.10	22.67	0.051	1.6

Note:

- When the 1-g Reported SAR is ≤ 0.8 W/kg, testing for low and high channel is optional. Refer to KDB 447498.
- The test separation for body back, body front and 4 Edges is 10mm of all above table.

SAR MEASUREMENT												
Depth of Liquid (cm):>15												
Product: Mobile Phone												
Test Mode: LTE Band 4												
BM MHz	MOD	Position	Test Mode		Ch.	Freq. (MHz)	Power Drift (<±5%)	SAR (1g) (W/kg)	Max. Tune up Power (dBm)	Meas. output Power (dBm)	Scaled SAR (W/Kg)	Limit (W/kg)
			UL RB Allocation	UL RB START								
20	QPSK	Left Cheek	1	0	20175	1732.5	-2.06	0.127	23.86	23.41	0.141	1.6
		Left Tilt	1	0	20175	1732.5	0.55	0.046	23.86	23.41	0.051	1.6
		Right Cheek	1	0	20175	1732.5	-1.34	0.153	23.86	23.41	0.170	1.6
		Right Tilt	1	0	20175	1732.5	-0.02	0.053	23.86	23.41	0.059	1.6
		Body back	1	0	20050	1720	1.7	1.138	23.86	23.86	1.138	1.6
		Body back	1	0	20175	1732.5	-0.91	1.166	23.86	23.41	1.293	1.6
		Body back	1	0	20300	1745	1.77	1.135	23.86	23.86	1.135	1.6
		Body front	1	0	20050	1720	0.64	1.143	23.86	23.86	1.143	1.6
		Body front	1	0	20175	1732.5	0.40	1.210	23.86	23.41	1.342	1.6
		Body front	1	0	20300	1745	0.33	1.263	23.86	23.86	1.263	1.6
		Body front + Ear.	1	0	20050	1720	-0.65	1.042	23.86	23.86	1.042	1.6
		Body front + Ear.	1	0	20175	1732.5	-1.71	1.207	23.86	23.41	1.339	1.6
		Body front + Ear.	1	0	20300	1745	0.66	1.249	23.86	23.86	1.249	1.6
		Edge 3(Bottom)	1	0	20175	1732.5	-0.45	0.588	23.86	23.41	0.652	1.6
		Edge 4(Left)	1	0	20175	1732.5	1.24	0.088	23.86	23.41	0.098	1.6

Note:

- When the 1-g Reported SAR is ≤ 0.8 W/kg, testing for low and high channel is optional. Refer to KDB 447498.
- The test separation for body back, body front and 4 Edges is 10mm of all above table.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

SAR MEASUREMENT												
Depth of Liquid (cm):>15					Relative Humidity (%): 64.9							
Product: Mobile Phone												
Test Mode: LTE Band 5												
BM MHz	MOD	Position	Test Mode		Ch.	Freq. (MHz)	Power Drift (<±5%)	SAR (1g) (W/kg)	Max. Tuneup Power (dBm)	Meas. output Power (dBm)	Scaled SAR (W/Kg)	Limit (W/kg)
			UL RB Allocati on	UL RB START								
10	QPSK	Left Cheek	1	0	20525	836.5	0.92	0.306	22.3	22.07	0.323	1.6
		Left Tilt	1	0	20525	836.5	-0.45	0.188	22.3	22.07	0.198	1.6
		Right Cheek	1	0	20525	836.5	-0.22	0.325	22.3	22.07	0.343	1.6
		Right Tilt	1	0	20525	836.5	1.05	0.234	22.3	22.07	0.247	1.6
		Body back	1	0	20525	836.5	1.69	0.692	22.3	22.07	0.730	1.6
		Body front	1	0	20525	836.5	2.07	0.487	22.3	22.07	0.513	1.6
		Edge 3(Bottom)	1	0	20525	836.5	-1.00	0.153	22.3	22.07	0.161	1.6
		Edge 4(Left)	1	0	20525	836.5	-0.44	0.350	22.3	22.07	0.369	1.6

Note:

- When the 1-g Reported SAR is ≤ 0.8 W/kg, testing for low and high channel is optional. Refer to KDB 447498.
- The test separation for body back, body front and 4 Edges is 10mm of all above table.

SAR MEASUREMENT												
Depth of Liquid (cm):>15					Relative Humidity (%): 49.3							
Product: Mobile Phone												
Test Mode: LTE Band 7												
BM MHz	MOD	Position	Test Mode		Ch.	Freq. (MHz)	Power Drift (<±5%)	SAR (1g) (W/kg)	Max. Tuneup Power (dBm)	Meas. output Power (dBm)	Scaled SAR (W/Kg)	Limit (W/kg)
			UL RB Allocation	UL RB START								
20	QPSK	Left Cheek	1	0	21100	2535	0.77	0.058	23.00	22.95	0.059	1.6
		Left Tilt	1	0	21100	2535	-0.16	0.024	23.00	22.95	0.024	1.6
		Right Cheek	1	0	21100	2535	-1.35	0.038	23.00	22.95	0.038	1.6
		Right Tilt	1	0	21100	2535	0.05	0.022	23.00	22.95	0.022	1.6
		Body back	1	0	20850	2510	-0.51	1.155	23.00	22.52	1.290	1.6
		Body back	1	0	21100	2535	0.29	1.171	23.00	22.95	1.185	1.6
		Body back	1	0	21350	2560	0.79	1.275	23.00	22.89	1.308	1.6
		Body front	1	0	20850	2510	1.35	0.922	23.00	22.52	1.030	1.6
		Body front	1	0	21100	2535	-3.86	0.952	23.00	22.95	0.963	1.6
		Body front	1	0	21350	2560	0.57	1.015	23.00	22.89	1.041	1.6
		Body back+ Ear.	1	0	20850	2510	-0.81	1.119	23.00	22.52	1.250	1.6
		Body back+ Ear.	1	0	21100	2535	-0.09	1.131	23.00	22.95	1.144	1.6
		Body back+ Ear.	1	0	21350	2560	-0.01	1.194	23.00	22.89	1.225	1.6
		Edge 3(Bottom)	1	0	21100	2535	0.15	0.729	23.00	22.95	0.737	1.6
		Edge 4(Left)	1	0	21100	2535	0.66	0.142	23.00	22.95	0.144	1.6

Note:

- When the 1-g Reported SAR is ≤ 0.8 W/kg, testing for low and high channel is optional. Refer to KDB 447498.
- The test separation for body back, body front and 4 Edges is 10mm of all above table.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

SAR MEASUREMENT												
Depth of Liquid (cm):>15						Relative Humidity (%): 54.6						
Product: Mobile Phone												
Test Mode: LTE Band 12												
BM MHz	MOD	Position	Test Mode		Ch.	Freq. (MHz)	Power Drift (<±5%)	SAR (1g) (W/kg)	Max. Tuneup Power (dBm)	Meas. output Power (dBm)	Scaled SAR (W/Kg)	Limit (W/kg)
			UL RB Allocation	UL RB START								
10	QPSK	Left Cheek	1	49	23095	707.5	-2.33	0.253	23.65	22.32	0.344	1.6
		Left Tilt	1	49	23095	707.5	0.67	0.171	23.65	22.32	0.232	1.6
		Right Cheek	1	49	23095	707.5	-1.00	0.239	23.65	22.32	0.325	1.6
		Right Tilt	1	49	23095	707.5	-0.54	0.167	23.65	22.32	0.227	1.6
		Body back	1	49	23095	707.5	0.78	0.676	23.65	22.32	0.918	1.6
		Body front	1	49	23095	707.5	0.60	0.381	23.65	22.32	0.518	1.6
		Edge 3(Bottom)	1	49	23095	707.5	0.09	0.103	23.65	22.32	0.140	1.6
		Edge 4(Left)	1	49	23095	707.5	1.08	0.350	23.65	22.32	0.475	1.6

Note:

- When the 1-g Reported SAR is ≤ 0.8 W/kg, testing for low and high channel is optional. Refer to KDB 447498.
- The test separation for body back, body front and 4 Edges is 10mm of all above table.

SAR MEASUREMENT									
Depth of Liquid (cm):>15				Relative Humidity (%): 52.8					
Product: Mobile Phone									
Test Mode:802.11b									
Position	Mode	Ch.	Fr. (MHz)	Power Drift (<±5%)	SAR (1g) (W/kg)	Max. Tune-up Power (dBm)	Meas. output Power (dBm)	Scaled SAR (W/Kg)	Limit (W/kg)
Left Cheek	DTS	11	2462	0.14	0.439	12.15	12.12	0.442	1.6
Left Tilt	DTS	11	2462	-2.03	0.502	12.15	12.12	0.505	1.6
Right Cheek	DTS	11	2462	1.54	0.199	12.15	12.12	0.200	1.6
Right Tilt	DTS	11	2462	0.28	0.252	12.15	12.12	0.254	1.6
Body back	DTS	11	2462	-0.64	0.212	12.15	12.12	0.213	1.6
Body front	DTS	11	2462	0.04	0.154	12.15	12.12	0.155	1.6
Edge 1 (Top)	DTS	11	2462	-0.99	0.010	12.15	12.12	0.010	1.6
Edge 2(Right)	DTS	11	2462	-2.48	0.065	12.15	12.12	0.065	1.6

Note:

- According to KDB 248227 D01v02r02,for 2.4GHz 802.11g/n SAR testing is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.
- All of above "DTS" means data transmitters.
- The test separation for body back, body front and 4 Edges is 10mm of all above table.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

SAR MEASUREMENT								
Depth of Liquid (cm):>15				Relative Humidity (%): 52.4				
Product: Mobile Phone								
Test Mode: UNII-1(802.11ac VHT20)								
Position	Ch.	Fr. (MHz)	Power Drift (<±5%)	SAR (1g) (W/kg)	Max. Tune-up Power (dBm)	Meas. output Power (dBm)	Scaled SAR (W/Kg)	Limit (W/kg)
Left Cheek	36	5180	-0.25	0.107	9.0	8.93	0.109	1.6
Left Tilt	36	5180	-1.35	0.129	9.0	8.93	0.131	1.6
Right Cheek	36	5180	0.66	0.061	9.0	8.93	0.062	1.6
Right Tilt	36	5180	2.06	0.075	9.0	8.93	0.076	1.6
Body back	36	5180	-1.78	0.022	9.0	8.93	0.022	1.6
Body front	36	5180	0.09	0.018	9.0	8.93	0.018	1.6
Edge 1 (Top)	36	5180	-1.44	0.042	9.0	8.93	0.043	1.6
Edge 2(Right)	36	5180	0.99	0.020	9.0	8.93	0.020	1.6

Note:

- When the 1-g Reported SAR is ≤ 0.8 W/kg, testing for low and high channel is optional. Refer to KDB 447498.
- The test separation for body back, body front and 4 Edges is 10mm of all above table.

SAR MEASUREMENT								
Depth of Liquid (cm):>15					Relative Humidity (%): 55.5			
Product: Mobile Phone								
Test Mode: UNII-3 (802.11n HT40)								
Position	Ch.	Fr. (MHz)	Power Drift (<±5%)	SAR (1g) (W/kg)	Max. Tune-up Power (dBm)	Meas. output Power (dBm)	Scaled SAR (W/Kg)	Limit (W/kg)
Left Cheek	151	5755	-057	0.044	11.30	11.27	0.044	1.6
Left Tilt	151	5755	-0.13	0.059	11.30	11.27	0.059	1.6
Right Cheek	151	5755	1.36	0.039	11.30	11.27	0.039	1.6
Right Tilt	151	5755	-0.16	0.014	11.30	11.27	0.014	1.6
Body back	151	5755	1.54	0.142	11.30	11.27	0.143	1.6
Body front	151	5755	0.43	0.050	11.30	11.27	0.050	1.6
Edge 1 (Top)	151	5755	0.79	0.043	11.30	11.27	0.043	1.6
Edge 2(Right)	151	5755	0.08	0.017	11.30	11.27	0.017	1.6

Note:

- When the 1-g Reported SAR is ≤ 0.8 W/kg, testing for low and high channel is optional. Refer to KDB 447498.
- The test separation for body back, body front and 4 Edges is 10mm of all above table.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

Repeated SAR										
Product: Mobile Phone										
Test Mode: PCS1900 with GMSK modulation & WCDMA Band II & WCDMA Band IV with QPSK modulation										
Position	Mode	Ch.	Fr. (MHz)	Power Drift (<±5%)	Once SAR (1g) (W/kg)	Power Drift (<±5%)	Twice SAR (1g) (W/kg)	Power Drift (<±5%)	Third SAR (1g) (W/kg)	Limit W/kg
Body back	GPRS-4 slot	810	1909.8	-0.32	1.009	--	--	--	--	1.6
Body front	RMC 12.2kbps	9262	1852.4	-2.36	1.210	--	--	--	--	1.6
Body front	RMC 12.2kbps	8763	1752.5	1.18	1.142	--	--	--	--	1.6

SAR MEASUREMENT													
Depth of Liquid (cm):>15													
Product: Mobile Phone													
Test Mode: LTE Band 4& LTE Band 7													
BM MHz	MOD	Position	Test Mode		Ch.	Freq. (MHz)	Power Drift (<±5%)	Once SAR (1g) (W/kg)	Power Drift (<±5%)	Twice SAR (1g) (W/kg)	Power Drift (<±5%)	Third SAR (1g) (W/kg)	Limit (W/kg)
			UL RB Allocation	UL RB START									
20	QPSK	Body front	1	0	20300	1745	0.36	1.246	--	--	--	--	1.6
		Body back	1	0	21350	2560	0.65	1.263	--	--	--	--	1.6

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

Simultaneous Multi-band Transmission Evaluation:

NO	Simultaneous state	Portable Handset		
		Head	Body-worn	Hotspot
1	GSM(voice)+ WLAN(2.4GWiFi / UNII-1/ UNII-3)	Yes	Yes	-
2	WCDMA(voice)+ WLAN(2.4GWiFi / UNII-1/ UNII-3)	Yes	Yes	-
3	GSM(voice)+Bluetooth(data)	-	Yes	-
4	WCDMA(voice)+Bluetooth(data)	-	Yes	-
5	GSM (Data) + Bluetooth(data)	-	Yes	
6	GSM (Data) + WLAN (2.4GWiFi/ UNII-1/ UNII-3)	Yes	Yes	Yes
7	WCDMA (Data) + Bluetooth(data)	--	Yes	
8	WCDMA (Data) + WLAN (2.4GWiFi / UNII-1/ UNII-3)	Yes	Yes	Yes
9	LTE + Bluetooth(data)	--	Yes	
10	LTE + WLAN (2.4GWiFi / UNII-1/ UNII-3)	Yes	Yes	Yes

NOTE:

1. WIFI and BT share the same antenna, and cannot transmit simultaneously.
2. Simultaneous with every transmitter must be the same test position.
3. KDB 447498 D01, BT SAR is excluded as below table.
4. KDB 447498 D01, for handsets the test separation distance is determined by the smallest distance between the outer surface of the device and the user; which is 0mm for head SAR and 10mm for body-worn SAR.
5. According to KDB 447498 D01 4.3.1, Standalone SAR test exclusion is as follow:
 For 100 MHz to 6 GHz and test separation distances ≤ 50 mm, the 1-g and 10-g SAR test exclusion thresholds are determined by the following:

$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$$
 for 1-g SAR, and ≤ 7.5 for 10-g extremity SAR³⁰, where
 - f(GHz) is the RF channel transmit frequency in GHz
 - Power and distance are rounded to the nearest mW and mm before calculation³¹
 - The result is rounded to one decimal place for comparison
 - The values 3.0 and 7.5 are referred to as numeric thresholds in step b) below
 The test exclusions are applicable only when the minimum test separation distance is ≤ 50 mm, and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is < 5 mm, a distance of 5 mm according to 4.1 f) is applied to determine SAR test exclusion.
6. If the test separation distance is < 5 mm, 5mm is used for excluded SAR calculation.
7. According to KDB 447498 D01 4.3.2, simultaneous transmission SAR test exclusion is as follow:
 - (1) Simultaneous transmission SAR test exclusion is determined for each operating configuration and exposure condition according to the reported standalone SAR of each applicable simultaneous transmitting antenna.
 - (2) Any transmitters and antennas should be considered when calculating simultaneous mode.
 - (3) For mobile phone and PC, it's the sum of all transmitters and antennas at the same mode with same position in each applicable exposure condition
 - (4) When the standalone SAR test exclusion of section 4.3.2 is applied to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to the following to det

$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})} / x] \leq 3.0$$
 W/kg for test separation distances ≤ 50 mm;
 where x = 7.5 for 1-g SAR, and x = 18.75 for 10-g SAR.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

8. When the sum of SAR is larger than the limit, SAR test exclusion is determined by the SAR to peak location separation ratio. The simultaneous transmitting antennas in each operating mode and exposure condition combination must be considered one pair at a time to determine the SAR to peak location separation ratio to qualify for test exclusion. The ratio is determined by $(SAR1 + SAR2)1.5/R_i$, rounded to two decimal digits, and must be ≤ 0.04 for all antenna pairs in the configuration to qualify for 1-g SAR test exclusion.

Estimated SAR		Max Power including Tune-up Tolerance		Separation Distance (mm)	Estimated SAR (W/kg)
		dBm	mW		
BT	Head	2	1.585	0	0.067
	Body	2	1.585	10	0.033

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

Sum of the SAR for GSM 850 & Wi-Fi & BT:

RF Exposure Conditions	Test Position	Simultaneous Transmission Scenario			Σ1-g SAR (W/Kg)	SPLSR (Yes/No)
		GSM 850	Wi-Fi Band	Bluetooth		
2.4G Wi-Fi						
Head (voice)	Left Touch	0.358	0.442		0.800	No
	Left Tilt	0.251	0.505		0.756	No
	Right Touch	0.346	0.200		0.546	No
	Right Tilt	0.234	0.254		0.488	No
Body-worn (voice)	Rear	0.566	0.213		0.779	No
		0.566		0.033	0.599	No
	Front	0.437	0.155		0.592	No
		0.437		0.033	0.470	No
Body-worn (Data)	Rear	0.644		0.033	0.677	No
		0.644	0.213		0.857	No
	Front	0.604		0.033	0.637	No
		0.604	0.155		0.759	No
UNII-1						
Head (voice)	Left Touch	0.358	0.109		0.467	No
	Left Tilt	0.251	0.131		0.382	No
	Right Touch	0.346	0.062		0.408	No
	Right Tilt	0.234	0.076		0.310	No
Body-worn (voice)	Rear	0.566	0.022		0.588	No
		0.566		0.033	0.599	No
	Front	0.437	0.018		0.455	No
		0.437		0.033	0.470	No
Body-worn (Data)	Rear	0.644		0.033	0.677	No
		0.644	0.022		0.666	No
	Front	0.604		0.033	0.637	No
		0.604	0.018		0.622	No
UNII-3						
Head (voice)	Left Touch	0.358	0.044		0.402	No
	Left Tilt	0.251	0.059		0.310	No
	Right Touch	0.346	0.039		0.385	No
	Right Tilt	0.234	0.014		0.248	No
Body-worn (voice)	Rear	0.566	0.143		0.709	No
		0.566		0.033	0.599	No
	Front	0.437	0.050		0.487	No
		0.437		0.033	0.470	No
Body-worn (Data)	Rear	0.644		0.033	0.677	No
		0.644	0.143		0.787	No
	Front	0.604		0.033	0.637	No
		0.604	0.050		0.654	No

Note:

- According to KDB 447498 D01 General RF Exposure Guidance, when the simultaneous transmission SAR is less than 1.6 W/Kg, SPLSR assessment is not required.
- SPLSR mean is "The SAR to Peak Location Separation Ratio"

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

Sum of the SAR for GSM 1900 & Wi-Fi & BT:

RF Exposure Conditions	Test Position	Simultaneous Transmission Scenario			Σ1-g SAR (W/Kg)	SPLSR (Yes/No)
		PCS 1900	Wi-Fi Band	Bluetooth		
2.4G Wi-Fi						
Head (voice)	Left Touch	0.064	0.442		0.506	No
	Left Tilt	0.008	0.505		0.513	No
	Right Touch	0.031	0.200		0.231	No
	Right Tilt	0.006	0.254		0.260	No
Body-worn (voice)	Rear	0.769	0.213		0.982	No
		0.769		0.033	0.802	No
	Front	0.684	0.155		0.839	No
		0.684		0.033	0.717	No
Body-worn (Data)	Rear	1.191		0.033	1.224	No
		1.191	0.213		1.404	No
	Front	1.135		0.033	1.168	No
		1.135	0.155		1.290	No
UNII-1						
Head (voice)	Left Touch	0.064	0.109		0.173	No
	Left Tilt	0.008	0.131		0.139	No
	Right Touch	0.031	0.062		0.093	No
	Right Tilt	0.006	0.076		0.082	No
Body-worn (voice)	Rear	0.769	0.022		0.791	No
		0.769		0.033	0.802	No
	Front	0.684	0.018		0.702	No
		0.684		0.033	0.717	No
Body-worn (Data)	Rear	1.191		0.033	1.224	No
		1.191	0.022		1.213	No
	Front	1.135		0.033	1.168	No
		1.135	0.018		1.153	No
UNII-3						
Head (voice)	Left Touch	0.064	0.044		0.108	No
	Left Tilt	0.008	0.059		0.067	No
	Right Touch	0.031	0.039		0.070	No
	Right Tilt	0.006	0.014		0.020	No
Body-worn (voice)	Rear	0.769	0.143		0.912	No
		0.769		0.033	0.802	No
	Front	0.684	0.050		0.734	No
		0.684		0.033	0.717	No
Body-worn (Data)	Rear	1.191		0.033	1.224	No
		1.191	0.143		1.334	No
	Front	1.135		0.033	1.168	No
		1.135	0.050		1.185	No

Note:

- According to KDB 447498 D01 General RF Exposure Guidance, when the simultaneous transmission SAR is less than 1.6 W/Kg, SPLSR assessment is not required.
- SPLSR mean is "The SAR to Peak Location Separation Ratio"

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

Sum of the SAR for WCDMA Band II & Wi-Fi & BT:

RF Exposure Conditions	Test Position	Simultaneous Transmission Scenario			Σ 1-g SAR (W/Kg)	SPLSR (Yes/No)
		WCDMA Band II	Wi-Fi Band	Bluetooth		
2.4G Wi-Fi						
Head	Left Touch	0.127	0.442		0.569	No
	Left Tilt	0.028	0.505		0.533	No
	Right Touch	0.061	0.200		0.261	No
	Right Tilt	0.041	0.254		0.295	No
Body-worn	Rear	1.190	0.213		1.403	No
	Front	1.276	0.155		1.431	No
	Rear	1.190		0.033	1.223	No
	Front	1.276		0.033	1.309	No
UNII-1						
Head	Left Touch	0.127	0.109		0.236	No
	Left Tilt	0.028	0.131		0.159	No
	Right Touch	0.061	0.062		0.123	No
	Right Tilt	0.041	0.076		0.117	No
Body-worn	Rear	1.190	0.022		1.212	No
	Front	1.276	0.018		1.294	No
	Rear	1.190		0.033	1.223	No
	Front	1.276		0.033	1.309	No
UNII-3						
Head	Left Touch	0.127	0.044		0.171	No
	Left Tilt	0.028	0.059		0.087	No
	Right Touch	0.061	0.039		0.100	No
	Right Tilt	0.041	0.014		0.055	No
Body-worn	Rear	1.190	0.143		1.333	No
	Front	1.276	0.050		1.326	No
	Rear	1.190		0.033	1.223	No
	Front	1.276		0.033	1.309	No

Note:

- According to KDB 447498 D01 General RF Exposure Guidance, when the simultaneous transmission SAR is less than 1.6 W/Kg, SPLSR assessment is not required.
- SPLSR mean is "The SAR to Peak Location Separation Ratio"

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

Sum of the SAR for WCDMA Band IV & Wi-Fi & BT:

RF Exposure Conditions	Test Position	Simultaneous Transmission Scenario			Σ 1-g SAR (W/Kg)	SPLSR (Yes/No)
		WCDMA Band IV	Wi-Fi DTS Band	Bluetooth		
2.4G Wi-Fi						
Head	Left Touch	0.118	0.442		0.560	No
	Left Tilt	0.027	0.505		0.532	No
	Right Touch	0.108	0.200		0.308	No
	Right Tilt	0.040	0.254		0.294	No
Body-worn	Rear	1.155	0.213		1.368	No
	Front	1.159	0.155		1.314	No
	Rear	1.155		0.033	1.188	No
	Front	1.159		0.033	1.192	No
UNII-1						
Head	Left Touch	0.118	0.109		0.227	No
	Left Tilt	0.027	0.131		0.158	No
	Right Touch	0.108	0.062		0.170	No
	Right Tilt	0.040	0.076		0.116	No
Body-worn	Rear	1.155	0.022		1.177	No
	Front	1.159	0.018		1.177	No
	Rear	1.155		0.033	1.188	No
	Front	1.159		0.033	1.192	No
UNII-3						
Head	Left Touch	0.118	0.044		0.162	No
	Left Tilt	0.027	0.059		0.086	No
	Right Touch	0.108	0.039		0.147	No
	Right Tilt	0.040	0.014		0.054	No
Body-worn	Rear	1.155	0.143		1.298	No
	Front	1.159	0.050		1.209	No
	Rear	1.155		0.033	1.188	No
	Front	1.159		0.033	1.192	No

Note:

- According to KDB 447498 D01 General RF Exposure Guidance, when the simultaneous transmission SAR is less than 1.6 W/Kg, SPLSR assessment is not required.
- SPLSR mean is "The SAR to Peak Location Separation Ratio"

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

Sum of the SAR for WCDMA Band V & Wi-Fi & BT:

RF Exposure Conditions	Test Position	Simultaneous Transmission Scenario			Σ 1-g SAR (W/Kg)	SPLSR (Yes/No)
		WCDMA Band V	Wi-Fi DTS Band	Bluetooth		
2.4G Wi-Fi						
Head	Left Touch	0.339	0.442		0.781	No
	Left Tilt	0.200	0.505		0.705	No
	Right Touch	0.348	0.200		0.548	No
	Right Tilt	0.244	0.254		0.498	No
Body-worn	Rear	0.676	0.213		0.889	No
	Front	0.622	0.155		0.777	No
	Rear	0.676		0.033	0.709	No
	Front	0.622		0.033	0.655	No
UNII-1						
Head	Left Touch	0.339	0.109		0.448	No
	Left Tilt	0.200	0.131		0.331	No
	Right Touch	0.348	0.062		0.410	No
	Right Tilt	0.244	0.076		0.320	No
Body-worn	Rear	0.676	0.022		0.698	No
	Front	0.622	0.018		0.640	No
	Rear	0.676		0.033	0.709	No
	Front	0.622		0.033	0.655	No
UNII-3						
Head	Left Touch	0.339	0.044		0.383	No
	Left Tilt	0.200	0.059		0.259	No
	Right Touch	0.348	0.039		0.387	No
	Right Tilt	0.244	0.014		0.258	No
Body-worn	Rear	0.676	0.143		0.819	No
	Front	0.622	0.050		0.672	No
	Rear	0.676		0.033	0.709	No
	Front	0.622		0.033	0.655	No

Note:

- According to KDB 447498 D01 General RF Exposure Guidance, when the simultaneous transmission SAR is less than 1.6 W/Kg, SPLSR assessment is not required.
- SPLSR mean is "The SAR to Peak Location Separation Ratio"

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

Sum of the SAR for LTE Band 2 & Wi-Fi & BT:

RF Exposure Conditions	Test Position	Simultaneous Transmission Scenario			Σ1-g SAR (W/Kg)	SPLSR (Yes/No)
		LTE Band 2	Wi-Fi DTS Band	Bluetooth		
2.4G WI-Fi						
Head	Left Touch	0.086	0.442		0.528	No
	Left Tilt	0.014	0.505		0.519	No
	Right Touch	0.035	0.200		0.235	No
	Right Tilt	0.012	0.254		0.266	No
Body-worn	Rear	0.690	0.213		0.903	No
	Front	0.751	0.155		0.906	No
	Rear	0.690		0.033	0.723	No
	Front	0.751		0.033	0.784	No
UNII-1						
Head	Left Touch	0.086	0.109		0.195	No
	Left Tilt	0.014	0.131		0.145	No
	Right Touch	0.035	0.062		0.097	No
	Right Tilt	0.012	0.076		0.088	No
Body-worn	Rear	0.690	0.022		0.712	No
	Front	0.751	0.018		0.769	No
	Rear	0.690		0.033	0.723	No
	Front	0.751		0.033	0.784	No
UNII-3						
Head	Left Touch	0.086	0.044		0.130	No
	Left Tilt	0.014	0.059		0.073	No
	Right Touch	0.035	0.039		0.074	No
	Right Tilt	0.012	0.014		0.026	No
Body-worn	Rear	0.690	0.143		0.833	No
	Front	0.751	0.050		0.801	No
	Rear	0.690		0.033	0.723	No
	Front	0.751		0.033	0.784	No

Note:

- According to KDB 447498 D01 General RF Exposure Guidance, when the simultaneous transmission SAR is less than 1.6 W/Kg, SPLSR assessment is not required.
- SPLSR mean is "The SAR to Peak Location Separation Ratio"

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

Sum of the SAR for LTE Band 4 & Wi-Fi & BT:

RF Exposure Conditions	Test Position	Simultaneous Transmission Scenario			Σ 1-g SAR (W/Kg)	SPLSR (Yes/No)
		LTE Band 4	Wi-Fi DTS Band	Bluetooth		
2.4G Wi-Fi						
Head	Left Touch	0.141	0.442		0.583	No
	Left Tilt	0.051	0.505		0.556	No
	Right Touch	0.170	0.200		0.370	No
	Right Tilt	0.059	0.254		0.313	No
Body-worn	Rear	1.293	0.213		1.506	No
	Front	1.342	0.155		1.497	No
	Rear	1.293		0.033	1.326	No
	Front	1.342		0.033	0.375	No
UNII-1						
Head	Left Touch	0.141	0.109		0.250	No
	Left Tilt	0.051	0.131		0.182	No
	Right Touch	0.170	0.062		0.232	No
	Right Tilt	0.059	0.076		0.135	No
Body-worn	Rear	1.293	0.022		1.315	No
	Front	1.342	0.018		1.360	No
	Rear	1.293		0.033	1.326	No
	Front	1.342		0.033	0.375	No
UNII-3						
Head	Left Touch	0.141	0.044		0.185	No
	Left Tilt	0.051	0.059		0.110	No
	Right Touch	0.170	0.039		0.209	No
	Right Tilt	0.059	0.014		0.073	No
Body-worn	Rear	1.293	0.143		1.436	No
	Front	1.342	0.050		1.392	No
	Rear	1.293		0.033	1.326	No
	Front	1.342		0.033	0.375	No

INote:

- According to KDB 447498 D01 General RF Exposure Guidance, when the simultaneous transmission SAR is less than 1.6 W/Kg, SPLSR assessment is not required.
- SPLSR mean is "The SAR to Peak Location Separation Ratio"

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

Sum of the SAR for LTE Band 5 & Wi-Fi & BT:

RF Exposure Conditions	Test Position	Simultaneous Transmission Scenario			Σ 1-g SAR (W/Kg)	SPLSR (Yes/No)
		LTE Band 5	Wi-Fi DTS Band	Bluetooth		
2.4G Wi-Fi						
Head	Left Touch	0.323	0.442		0.765	No
	Left Tilt	0.198	0.505		0.703	No
	Right Touch	0.343	0.200		0.543	No
	Right Tilt	0.247	0.254		0.501	No
Body-worn	Rear	0.730	0.213		0.943	No
	Front	0.513	0.155		0.668	No
	Rear	0.730		0.033	0.763	No
	Front	0.513		0.033	0.546	No
UNII-1						
Head	Left Touch	0.323	0.109		0.432	No
	Left Tilt	0.198	0.131		0.329	No
	Right Touch	0.343	0.062		0.405	No
	Right Tilt	0.247	0.076		0.323	No
Body-worn	Rear	0.730	0.022		0.752	No
	Front	0.513	0.018		0.531	No
	Rear	0.730		0.033	0.763	No
	Front	0.513		0.033	0.546	No
UNII-3						
Head	Left Touch	0.323	0.044		0.367	No
	Left Tilt	0.198	0.059		0.257	No
	Right Touch	0.343	0.039		0.382	No
	Right Tilt	0.247	0.014		0.261	No
Body-worn	Rear	0.730	0.143		0.873	No
	Front	0.513	0.050		0.563	No
	Rear	0.730		0.033	0.763	No
	Front	0.513		0.033	0.546	No

Note:

- According to KDB 447498 D01 General RF Exposure Guidance, when the simultaneous transmission SAR is less than 1.6 W/Kg, SPLSR assessment is not required.
- SPLSR mean is "The SAR to Peak Location Separation Ratio"

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

Sum of the SAR for LTE Band 7 & Wi-Fi & BT:

RF Exposure Conditions	Test Position	Simultaneous Transmission Scenario			Σ 1-g SAR (W/Kg)	SPLSR (Yes/No)
		LTE Band 7	Wi-Fi DTS Band	Bluetooth		
2.4G Wi-Fi						
Head	Left Touch	0.059	0.442		0.501	No
	Left Tilt	0.024	0.505		0.529	No
	Right Touch	0.038	0.200		0.238	No
	Right Tilt	0.022	0.254		0.276	No
Body-worn	Rear	1.308	0.213		1.521	No
	Front	1.041	0.155		1.196	No
	Rear	1.290		0.033	1.323	No
	Front	1.041		0.033	1.074	No
UNII-1						
Head	Left Touch	0.059	0.109		0.168	No
	Left Tilt	0.024	0.131		0.155	No
	Right Touch	0.038	0.062		0.100	No
	Right Tilt	0.022	0.076		0.098	No
Body-worn	Rear	1.308	0.022		1.330	No
	Front	1.041	0.018		1.059	No
	Rear	1.290		0.033	1.323	No
	Front	1.041		0.033	1.074	No
UNII-3						
Head	Left Touch	0.059	0.044		0.103	No
	Left Tilt	0.024	0.059		0.083	No
	Right Touch	0.038	0.039		0.077	No
	Right Tilt	0.022	0.014		0.036	No
Body-worn	Rear	1.308	0.143		1.451	No
	Front	1.041	0.050		1.091	No
	Rear	1.290		0.033	1.323	No
	Front	1.041		0.033	1.074	No

Note:

- According to KDB 447498 D01 General RF Exposure Guidance, when the simultaneous transmission SAR is less than 1.6 W/Kg, SPLSR assessment is not required.
- SPLSR mean is "The SAR to Peak Location Separation Ratio"

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

Sum of the SAR for LTE Band 12 & Wi-Fi & BT:

RF Exposure Conditions	Test Position	Simultaneous Transmission Scenario			Σ 1-g SAR (W/Kg)	SPLSR (Yes/No)
		LTE Band 12	Wi-Fi DTS Band	Bluetooth		
2.4G Wi-Fi						
Head	Left Touch	0.344	0.442		0.786	No
	Left Tilt	0.232	0.505		0.737	No
	Right Touch	0.325	0.200		0.525	No
	Right Tilt	0.227	0.254		0.481	No
Body-worn	Rear	0.918	0.213		1.131	No
	Front	0.518	0.155		0.673	No
	Rear	0.918		0.033	0.951	No
	Front	0.518		0.033	0.551	No
UNII-1						
Head	Left Touch	0.344	0.109		0.453	No
	Left Tilt	0.232	0.131		0.363	No
	Right Touch	0.325	0.062		0.387	No
	Right Tilt	0.227	0.076		0.303	No
Body-worn	Rear	0.918	0.022		0.940	No
	Front	0.518	0.018		0.536	No
	Rear	0.918		0.033	0.951	No
	Front	0.518		0.033	0.551	No
UNII-3						
Head	Left Touch	0.344	0.044		0.388	No
	Left Tilt	0.232	0.059		0.291	No
	Right Touch	0.325	0.039		0.364	No
	Right Tilt	0.227	0.014		0.241	No
Body-worn	Rear	0.918	0.143		1.061	No
	Front	0.518	0.050		0.568	No
	Rear	0.918		0.033	0.951	No
	Front	0.518		0.033	0.551	No

Note:

- According to KDB 447498 D01 General RF Exposure Guidance, when the simultaneous transmission SAR is less than 1.6 W/Kg, SPLSR assessment is not required.
- SPLSR mean is "The SAR to Peak Location Separation Ratio"

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

APPENDIX A. SAR SYSTEM CHECK DATA

Test Laboratory: AGC Lab

Date: July 2, 2018

System Check Head 750 MHz

DUT: Dipole 750 MHz Type: SID 750

Communication System CW; Communication System Band: D750 (750.0 MHz); Duty Cycle: 1:1; Conv.F=1.61

Frequency: 750 MHz; Medium parameters used: $f = 750$ MHz; $\sigma = 0.87$ mho/m; $\epsilon_r = 41.06$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section; Input Power=18dBm


Ambient temperature (°C): 22, Liquid temperature (°C): 21.3

SATIMO Configuration:

- Probe: SSE2; Calibrated: Aug. 08, 2017; Serial No.: SN 08/16 EPGO282
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_32

Configuration/System Check 750MHz Head/Area Scan: Measurement grid: dx=8mm, dy=8mm

Configuration/System Check 750MHz Head/Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm


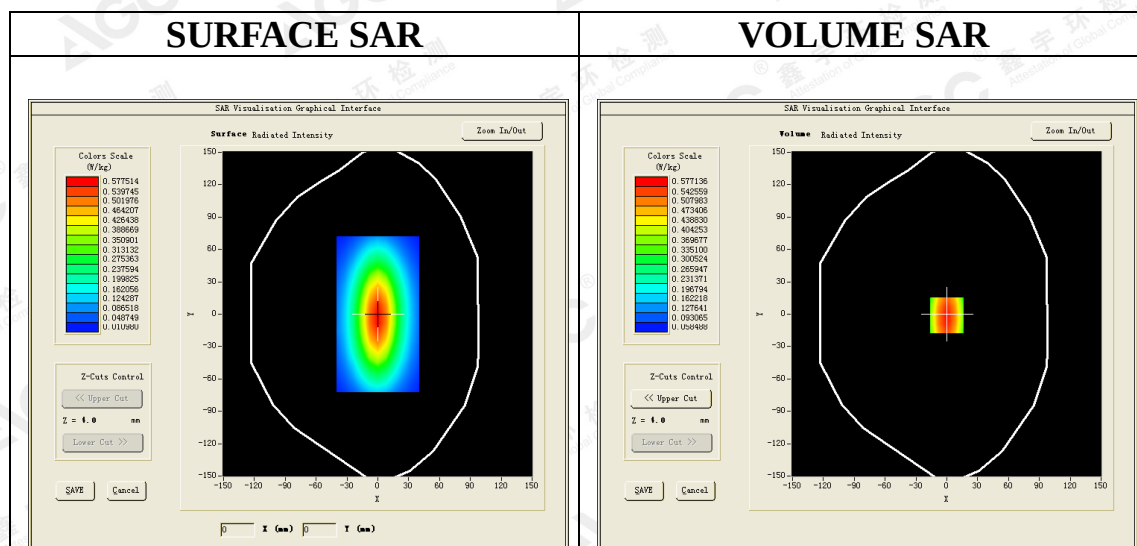


Maximum location: X=1.00, Y=-1.00

SAR Peak: 0.78 W/kg

SAR 10g (W/Kg)	0.370125
SAR 1g (W/Kg)	0.566954

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

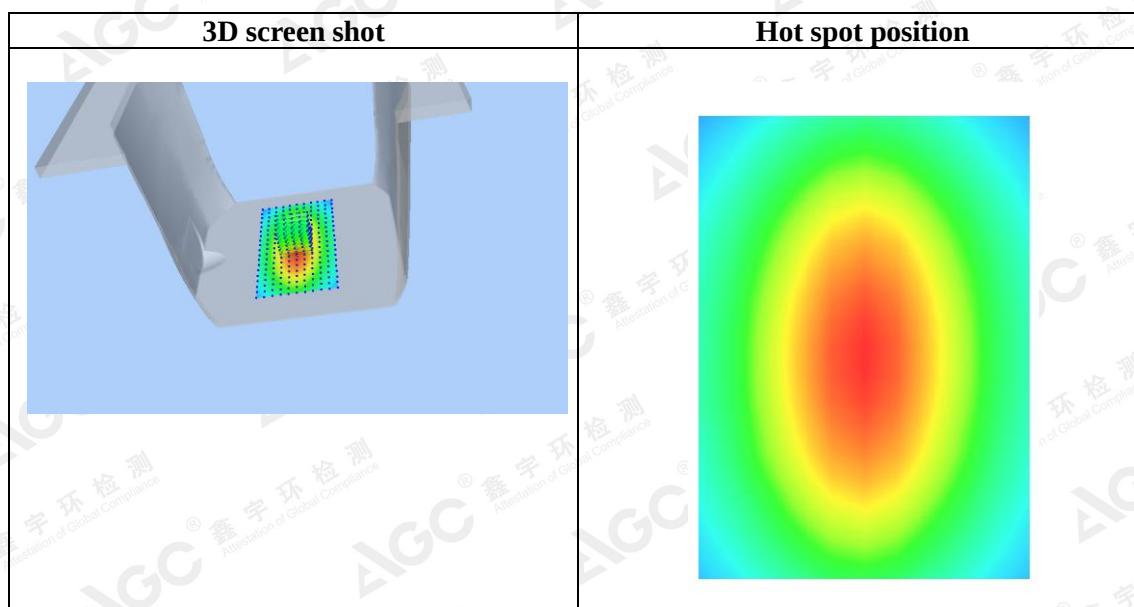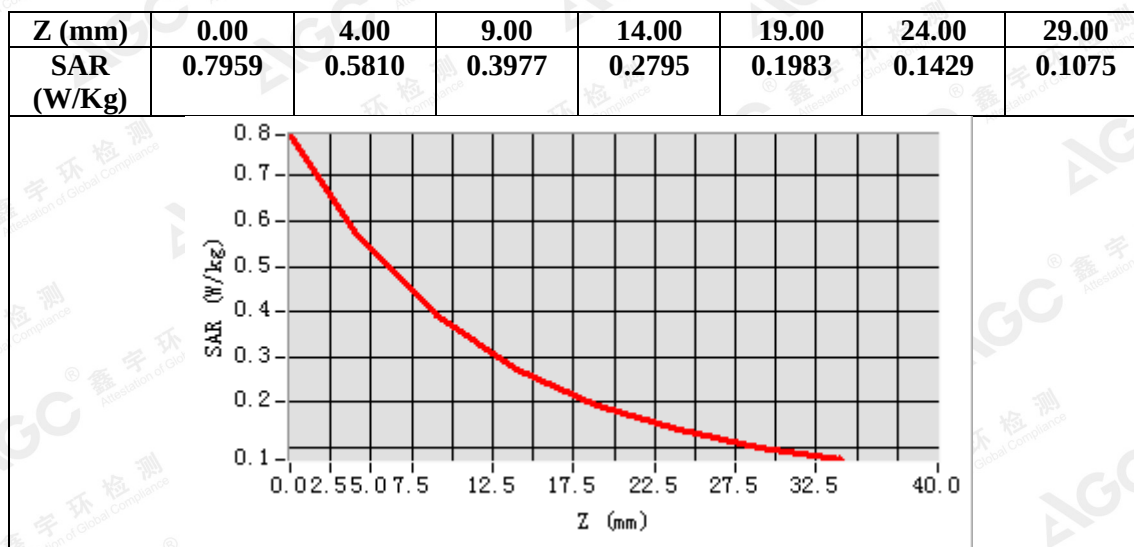

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

Test Laboratory: AGC Lab

Date: July 2, 2018

System Check Body 750 MHz

DUT: Dipole 750 MHz Type: SID 750

Communication System CW; Communication System Band: D750 (750.0 MHz); Duty Cycle: 1:1; Conv.F=1.66

Frequency: 750 MHz; Medium parameters used: $f = 750$ MHz; $\sigma = 0.98$ mho/m; $\epsilon_r = 54.56$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section; Input Power=18dBm


Ambient temperature (°C):22, Liquid temperature (°C): 21.5

SATIMO Configuration:

- Probe: SSE2; Calibrated: Aug. 08, 2017; Serial No.: SN 08/16 EPGO282
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_32

Configuration/System Check 750MHz Body/Area Scan: Measurement grid: dx=8mm, dy=8mm

Configuration/System Check 750MHz Body/Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm


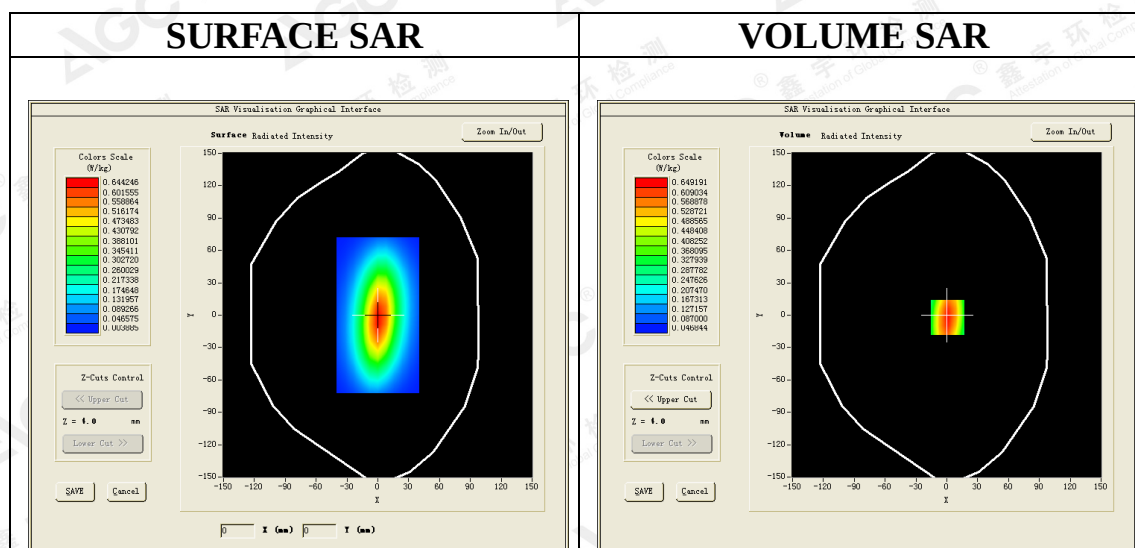


Maximum location: X=2.00, Y=-2.00

SAR Peak: 0.90 W/kg

SAR 10g (W/Kg)	0.378543
SAR 1g (W/Kg)	0.608906

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

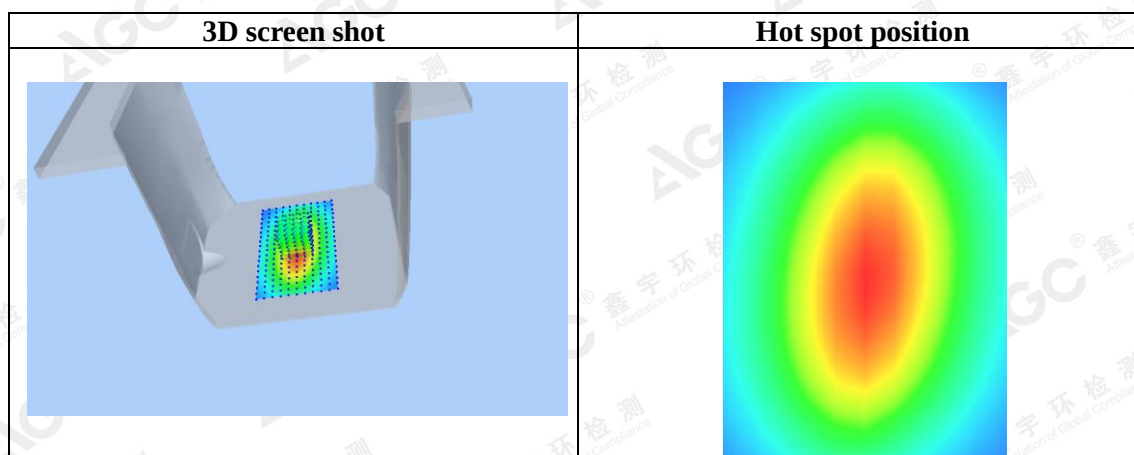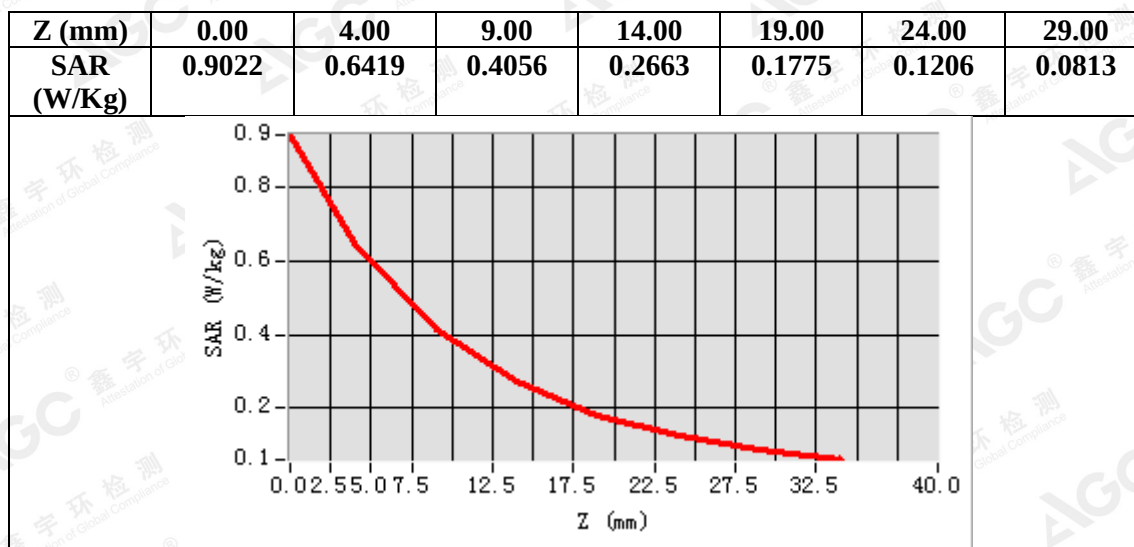

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

Test Laboratory: AGC Lab

Date: Jun.15,2018

System Check Head 835 MHz

DUT: Dipole 835 MHz Type: SID 835

Communication System CW; Communication System Band: D835 (835.0 MHz); Duty Cycle: 1:1; Conv.F=1.74

Frequency: 835 MHz; Medium parameters used: $f = 835$ MHz; $\sigma = 0.88$ mho/m; $\epsilon_r = 41.06$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section; Input Power=18dBm


Ambient temperature (°C):22.4, Liquid temperature (°C): 21.5

SATIMO Configuration:

- Probe: SSE2; Calibrated: Aug. 08,2017; Serial No.: SN 08/16 EPGO282
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_32

Configuration/System Check 835MHz Head/Area Scan: Measurement grid: dx=8mm, dy=8mm

Configuration/System Check 835MHz Head/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm


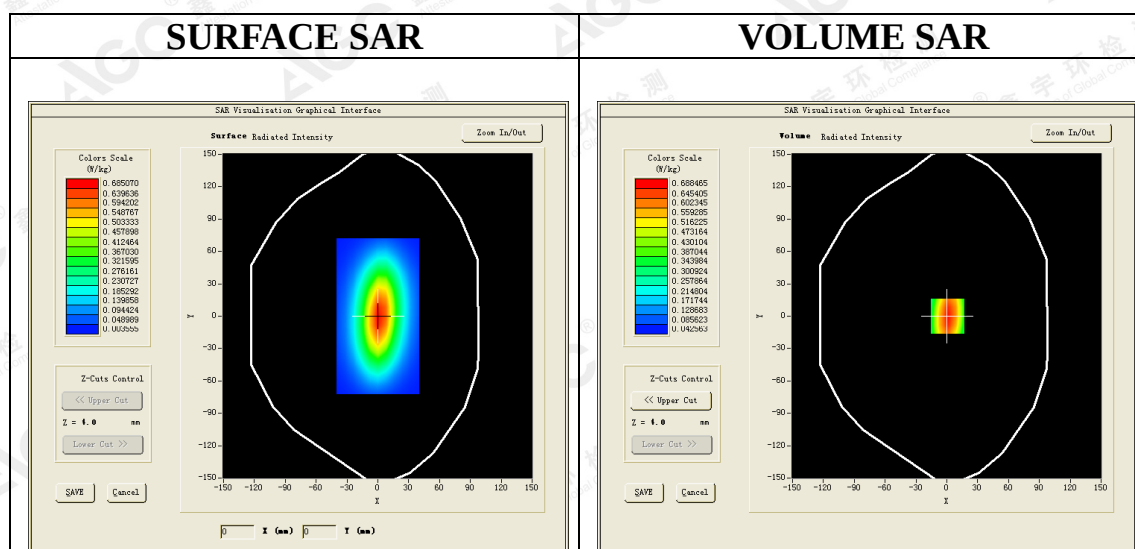


Maximum location: X=1.00, Y=1.00

SAR Peak: 1.00 W/kg

SAR 10g (W/Kg)	0.390039
SAR 1g (W/Kg)	0.647822

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

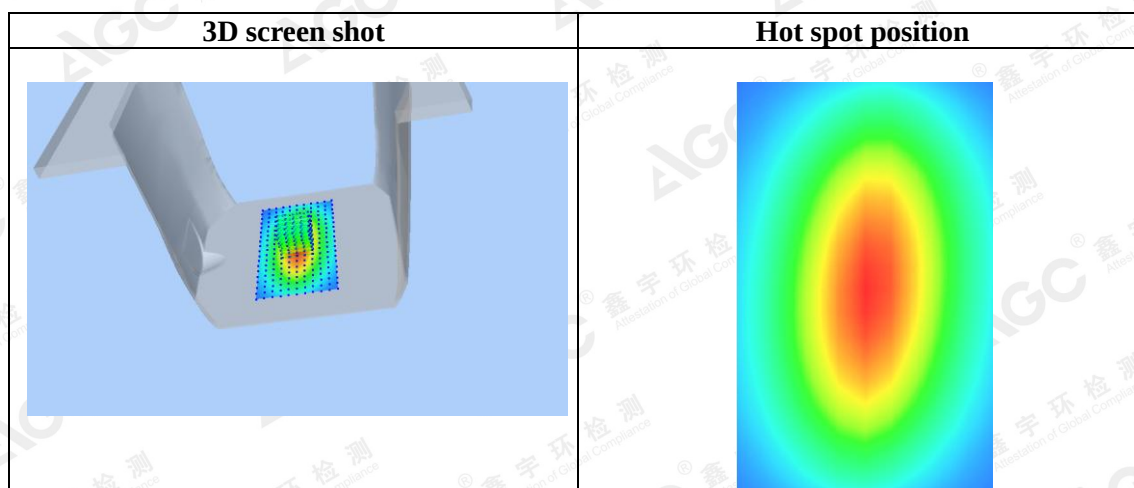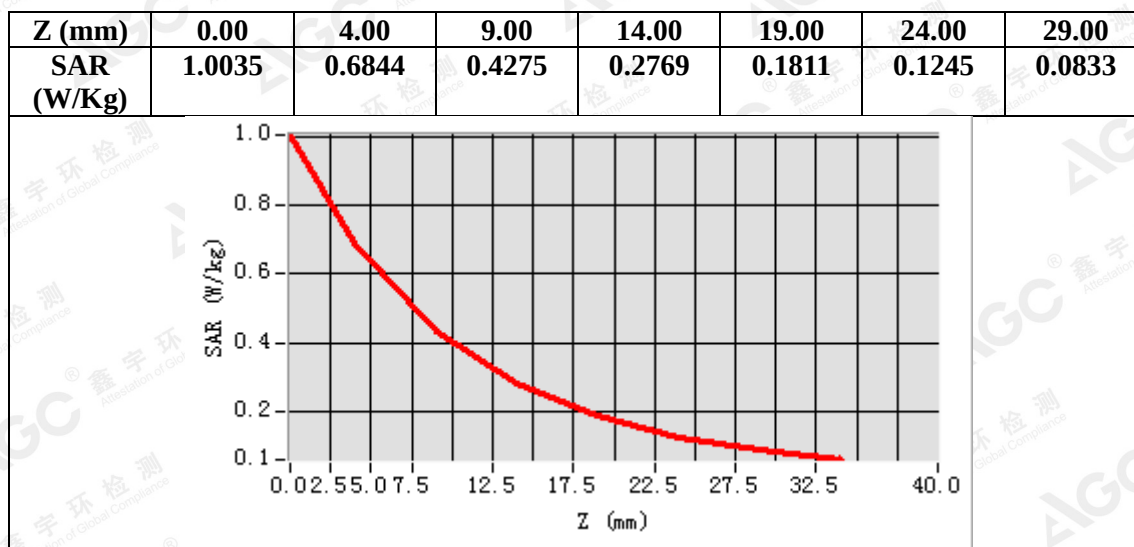

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

Test Laboratory: AGC Lab

Date: Jun.15,2018

System Check Body 835 MHz

DUT: Dipole 835 MHz Type: SID 835

Communication System CW; Communication System Band: D835 (835.0 MHz); Duty Cycle: 1:1; Conv.F=1.81

Frequency: 835 MHz; Medium parameters used: $f = 835$ MHz; $\sigma = 55.03$ mho/m; $\epsilon_r = 0.95$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section; Input Power=18dBm


Ambient temperature (°C):22.4, Liquid temperature (°C): 21.9

SATIMO Configuration:

- Probe: SSE2; Calibrated: Aug. 08,2017; Serial No.: SN 08/16 EPGO282
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_32

Configuration/System Check 835MHz Body/Area Scan: Measurement grid: dx=8mm, dy=8mm

Configuration/System Check 835MHz Body/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm


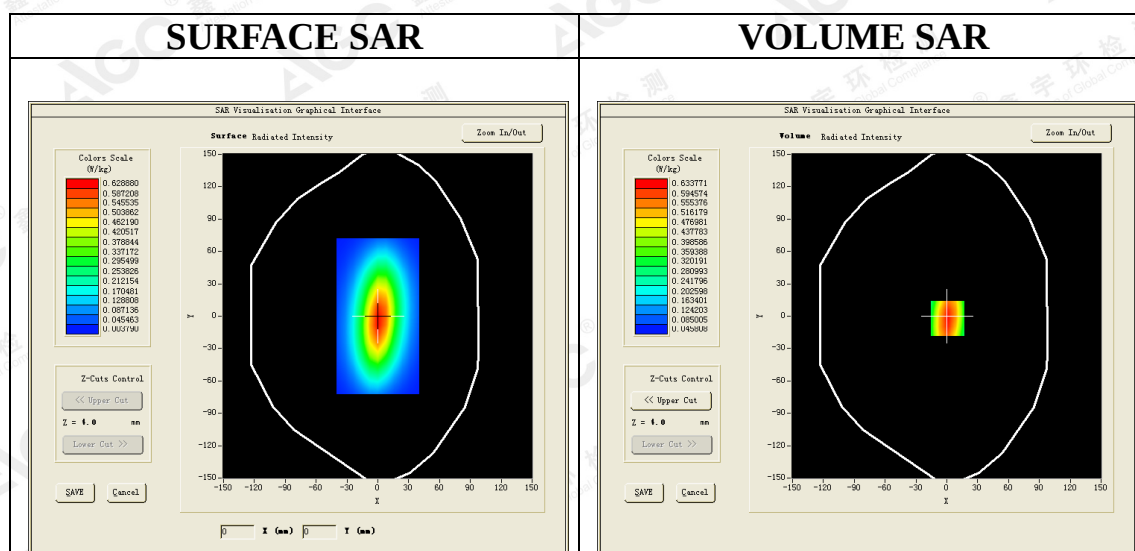


Maximum location: X=2.00, Y=-2.00

SAR Peak: 0.89 W/kg

SAR 10g (W/Kg)	0.373517
SAR 1g (W/Kg)	0.610549

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

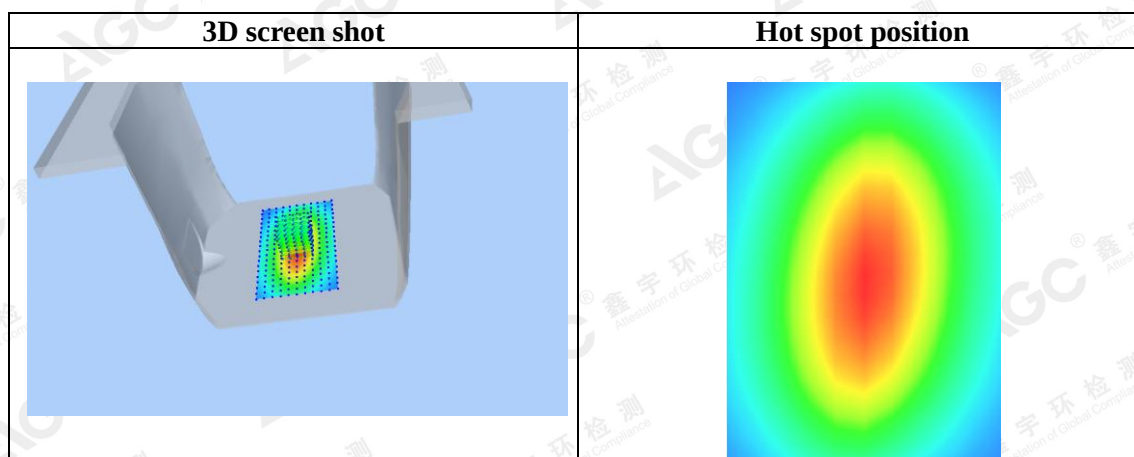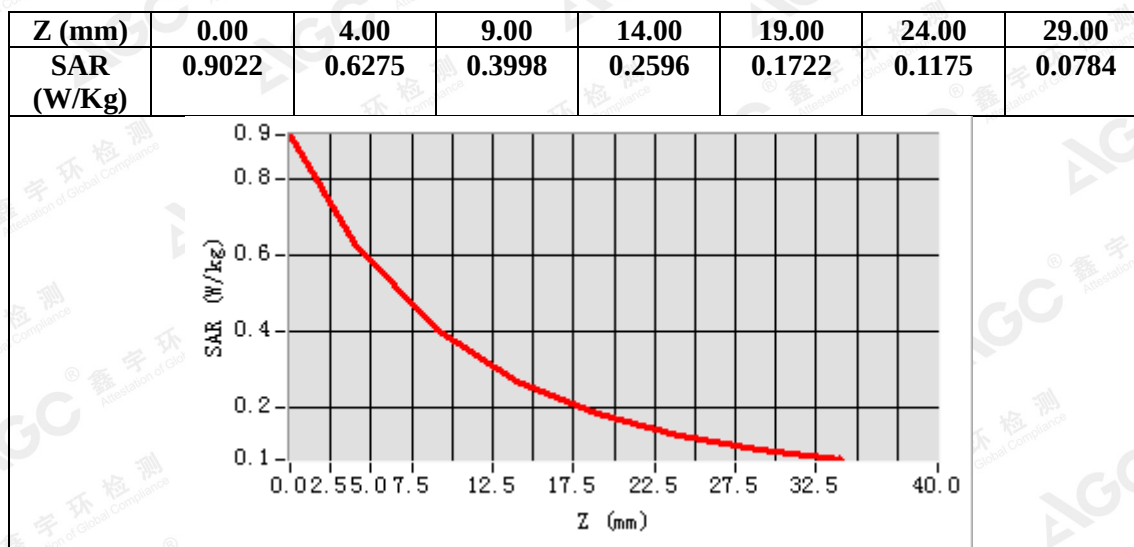

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

Test Laboratory: AGC Lab

Date: Jun.19,2018

System Check Head 835 MHz

DUT: Dipole 835 MHz Type: SID 835

Communication System CW; Communication System Band: D835 (835.0 MHz); Duty Cycle: 1:1; Conv.F=1.74

Frequency: 835 MHz; Medium parameters used: $f = 835$ MHz; $\sigma = 0.9$ mho/m; $\epsilon_r = 41.21$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section; Input Power=18dBm


Ambient temperature (°C):23.3, Liquid temperature (°C): 22.5

SATIMO Configuration:

- Probe: SSE2; Calibrated: Aug. 08,2017; Serial No.: SN 08/16 EPGO282
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_32

Configuration/System Check 835MHz Head/Area Scan: Measurement grid: dx=8mm, dy=8mm

Configuration/System Check 835MHz Head/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm


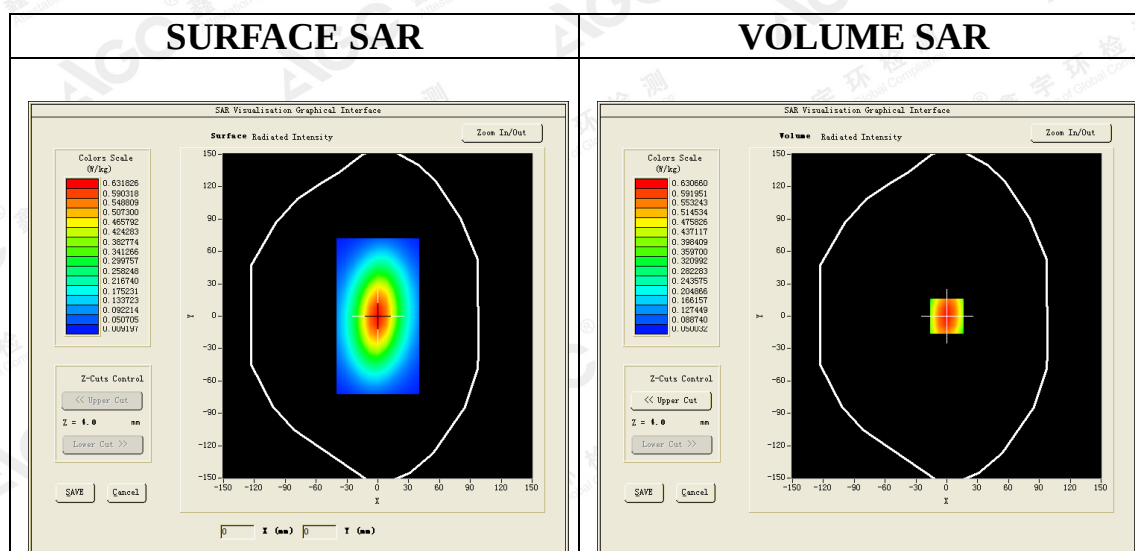


Maximum location: X=0.00, Y=0.00

SAR Peak: 0.90 W/kg

SAR 10g (W/Kg)	0.390125
SAR 1g (W/Kg)	0.611547

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

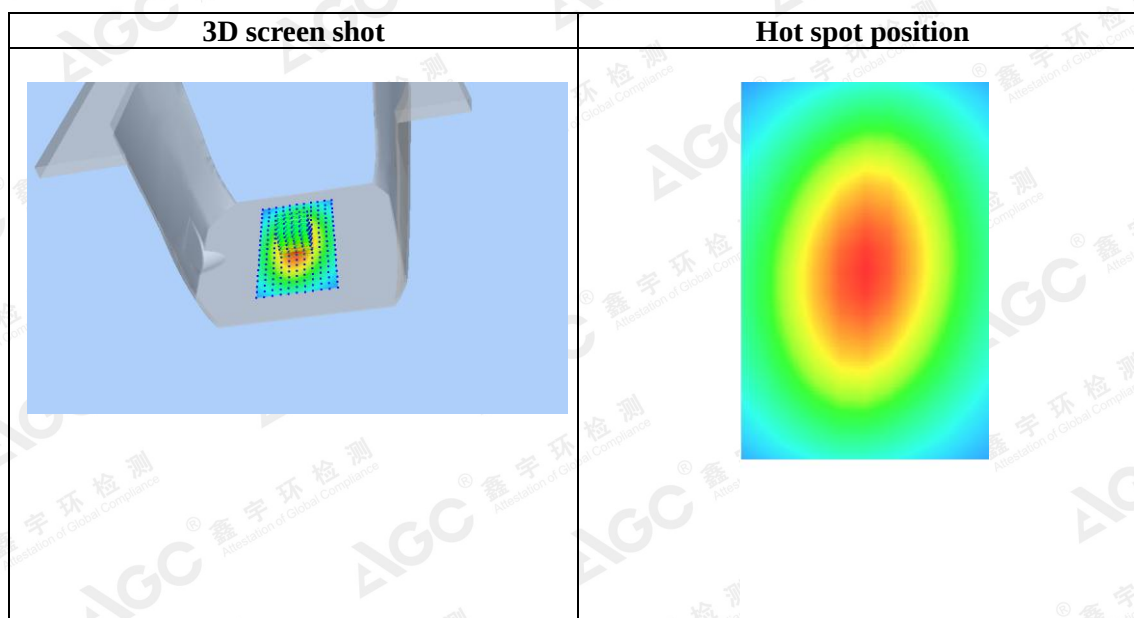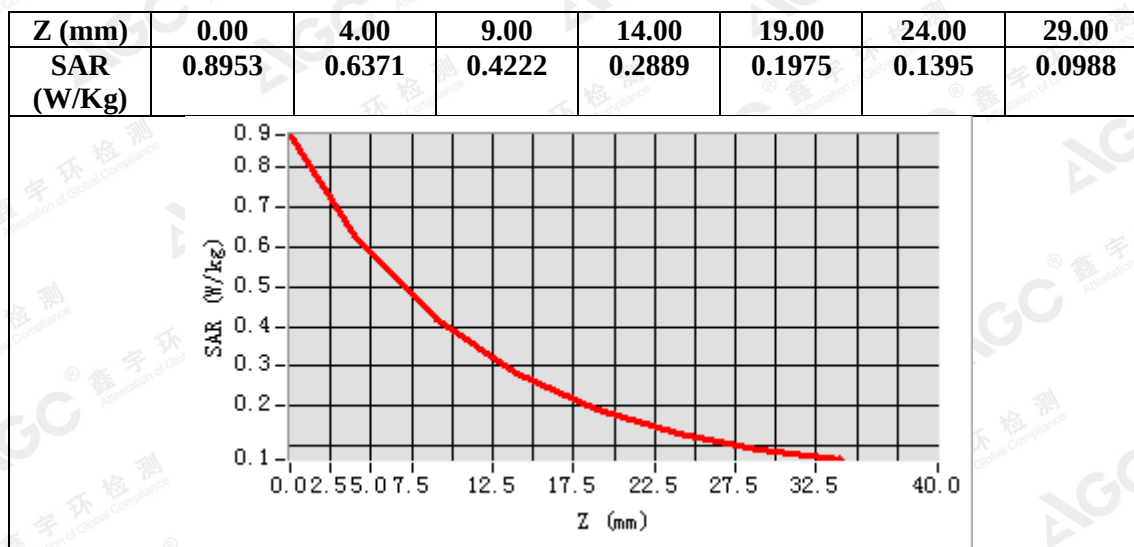

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

Test Laboratory: AGC Lab

Date: Jun.19,2018

System Check Body 835 MHz

DUT: Dipole 835 MHz Type: SID 835

Communication System CW; Communication System Band: D835 (835.0 MHz); Duty Cycle: 1:1; Conv.F=1.81

Frequency: 835 MHz; Medium parameters used: $f = 835$ MHz; $\sigma = 0.95$ mho/m; $\epsilon_r = 55.89$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section; Input Power=18dBm


Ambient temperature (°C):23.3, Liquid temperature (°C): 22.8

SATIMO Configuration:

- Probe: SSE2; Calibrated: Aug. 08,2017; Serial No.: SN 08/16 EPGO282
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_32

Configuration/System Check 835MHz Body/Area Scan: Measurement grid: dx=8mm, dy=8mm

Configuration/System Check 835MHz Body/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm


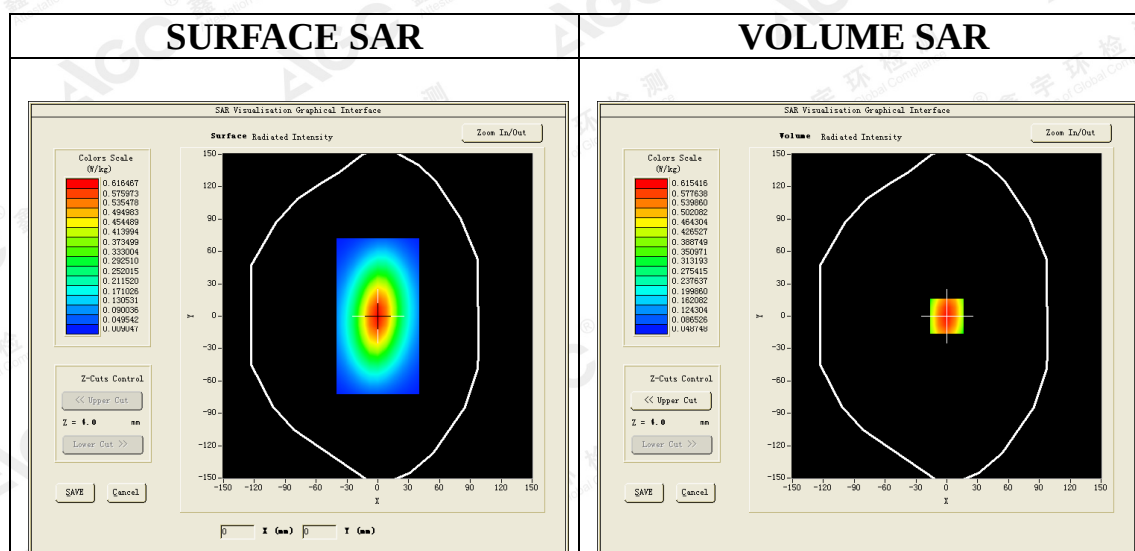


Maximum location: X=0.00, Y=0.00

SAR Peak: 0.86 W/kg

SAR 10g (W/Kg)	0.377520
SAR 1g (W/Kg)	0.590207

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

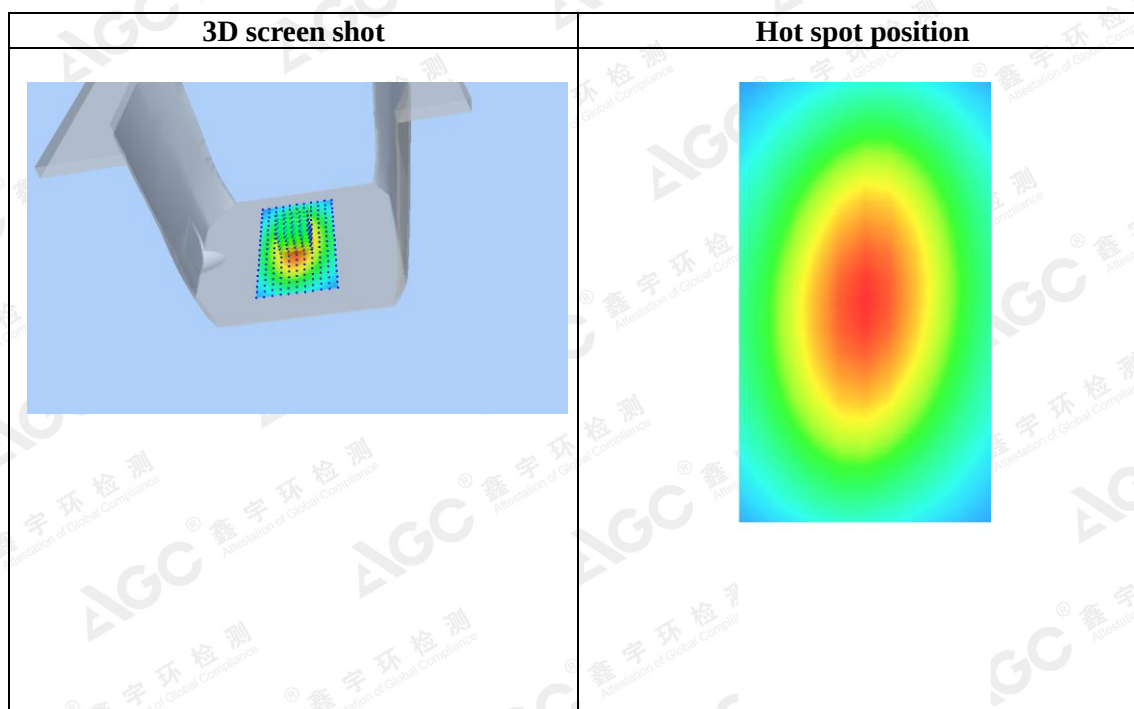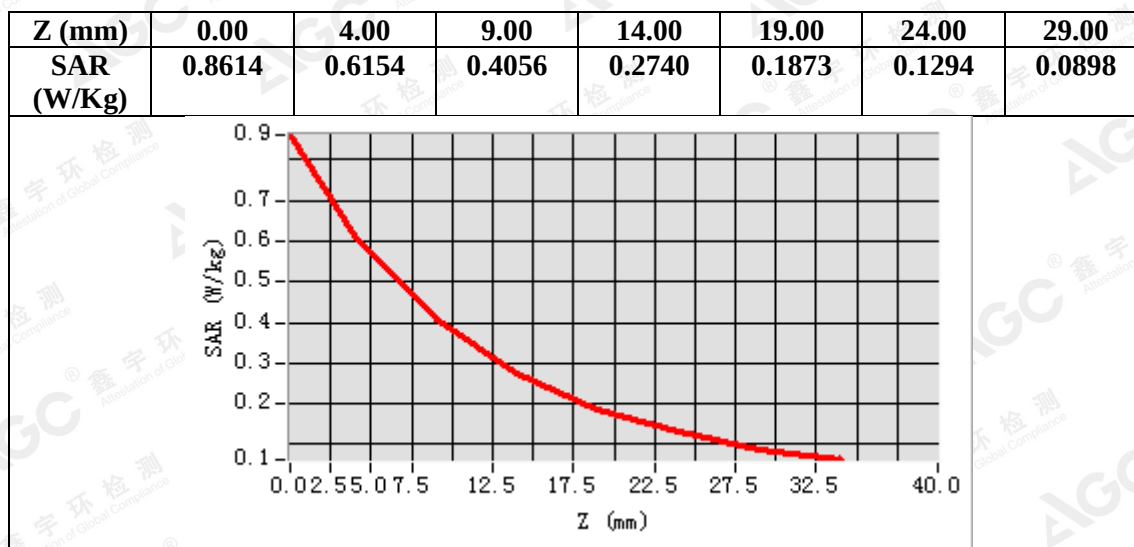

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

Test Laboratory: AGC Lab

Date: Jun.23,2018

System Check Head 1750MHz

DUT: Dipole 1800 MHz; Type: SID 1800

Communication System: CW; Communication System Band: D1700 (1750.0 MHz); Duty Cycle:1:1; Conv.F=1.99

Frequency: 1750 MHz; Medium parameters used: $f = 1750\text{MHz}$; $\sigma = 1.4 \text{ mho/m}$; $\epsilon_r = 39.84$; $\rho = 1000 \text{ kg/m}^3$;

Phantom section: Flat Section; Input Power=18dBm

Ambient temperature ($^{\circ}\text{C}$): 21.8, Liquid temperature ($^{\circ}\text{C}$): 21.6, Relative Humidity (%):50.1

SATIMO Configuration:

Probe: SSE2; Calibrated: Aug. 08,2017; Serial No.: SN 08/16 EPGO282


• Sensor-Surface: 4mm (Mechanical Surface Detection)

• Phantom: SAM twin phantom

• Measurement SW: OpenSAR V4_02_35

Configuration/System Check 1750MHz Head/Area Scan: Measurement grid: $dx=8\text{mm}, dy=8\text{mm}$

Configuration/System Check 1750MHz Head/Zoom Scan: Measurement grid: $dx=8\text{mm}, dy=8\text{mm}, dz=5\text{mm}$


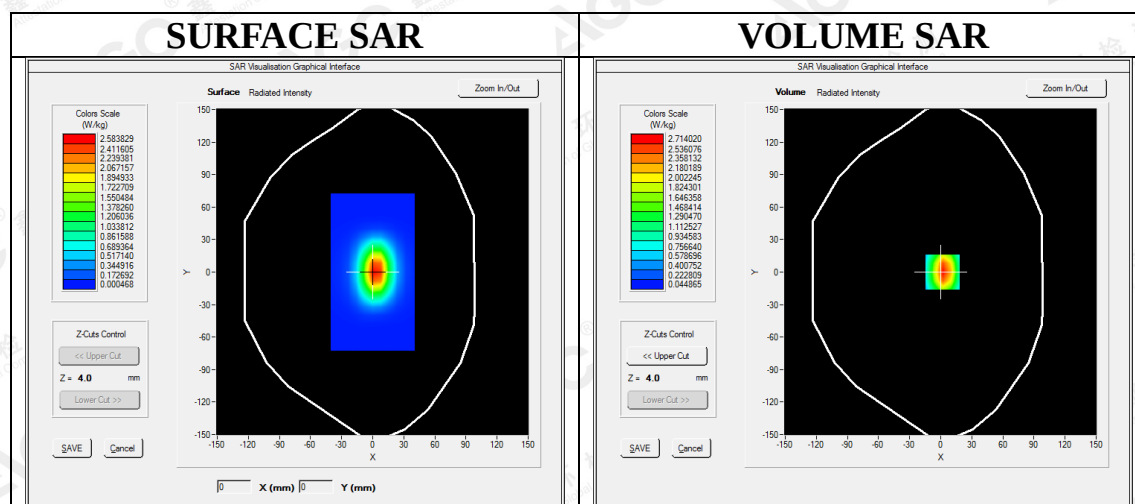


Maximum location: X=2.00, Y=1.00

SAR Peak: 4.28 W/kg

SAR 10g (W/Kg)	1.302514
SAR 1g (W/Kg)	2.538546

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

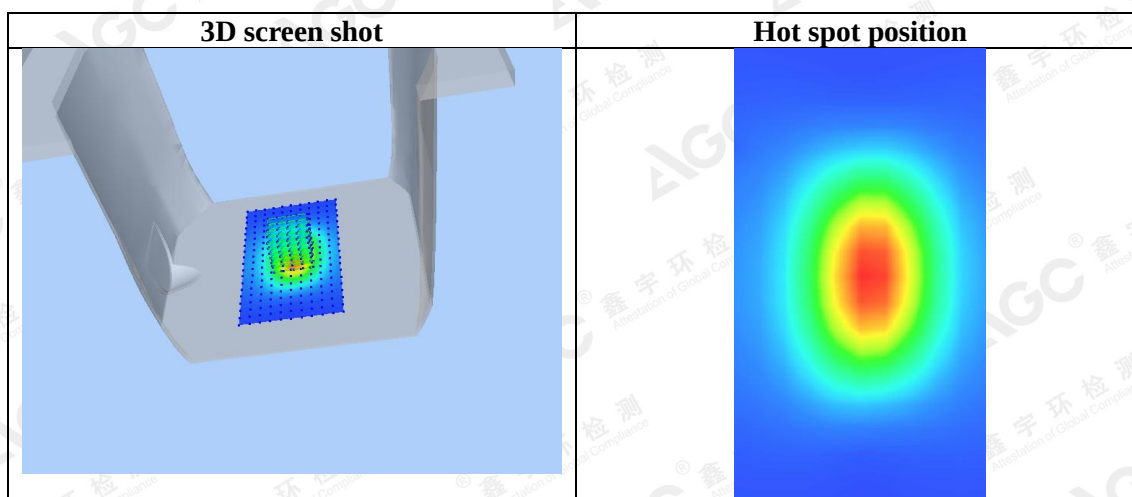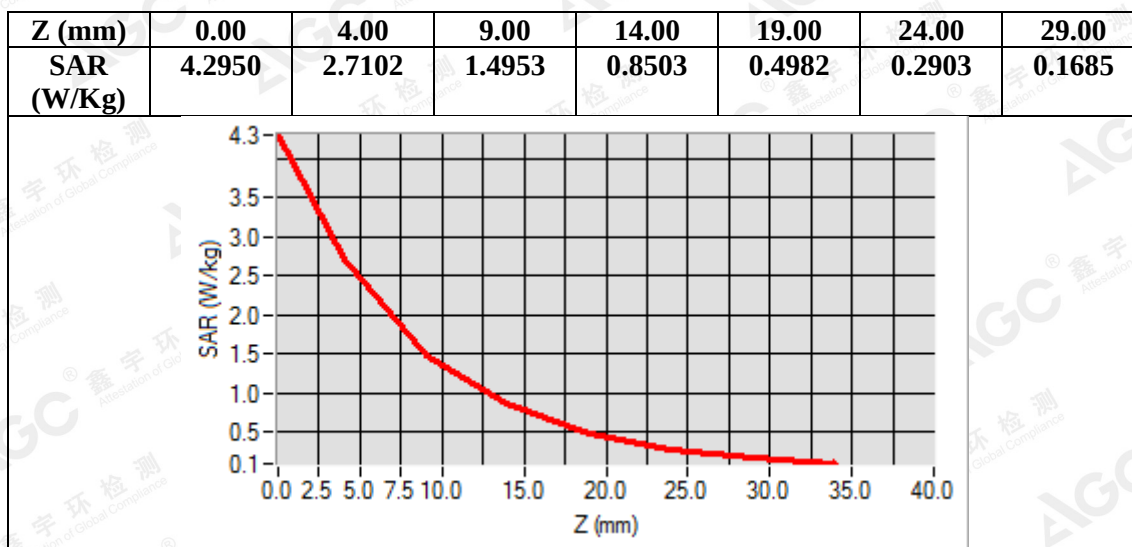

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

Test Laboratory: AGC Lab

Date: Jun.21,2018

System Check Body 1750MHz

DUT: Dipole 1800 MHz; Type: SID 1800

Communication System: CW; Communication System Band: D1700 (1750.0 MHz); Duty Cycle:1:1; Conv.F=2.05

Frequency: 1750MHz; Medium parameters used: $f = 1750\text{MHz}$; $\sigma = 1.5 \text{ mho/m}$; $\epsilon_r = 53.58$; $\rho = 1000 \text{ kg/m}^3$;

Phantom section: Flat Section; Input Power=18dBm

Ambient temperature ($^{\circ}\text{C}$): 22.3, Liquid temperature ($^{\circ}\text{C}$):21.7, Relative Humidity (%):58.7

SATIMO Configuration:

Probe: SSE2; Calibrated: Aug. 08,2017; Serial No.: SN 08/16 EPGO282


• Sensor-Surface: 4mm (Mechanical Surface Detection)

• Phantom: SAM twin phantom

• Measurement SW: OpenSAR V4_02_32

Configuration/System Check 1750MHz Body/Area Scan: Measurement grid: $dx=8\text{mm}, dy=8\text{mm}$

Configuration/System Check 1750MHz Body/Zoom Scan: Measurement grid: $dx=8\text{mm}, dy=8\text{mm}, dz=5\text{mm}$


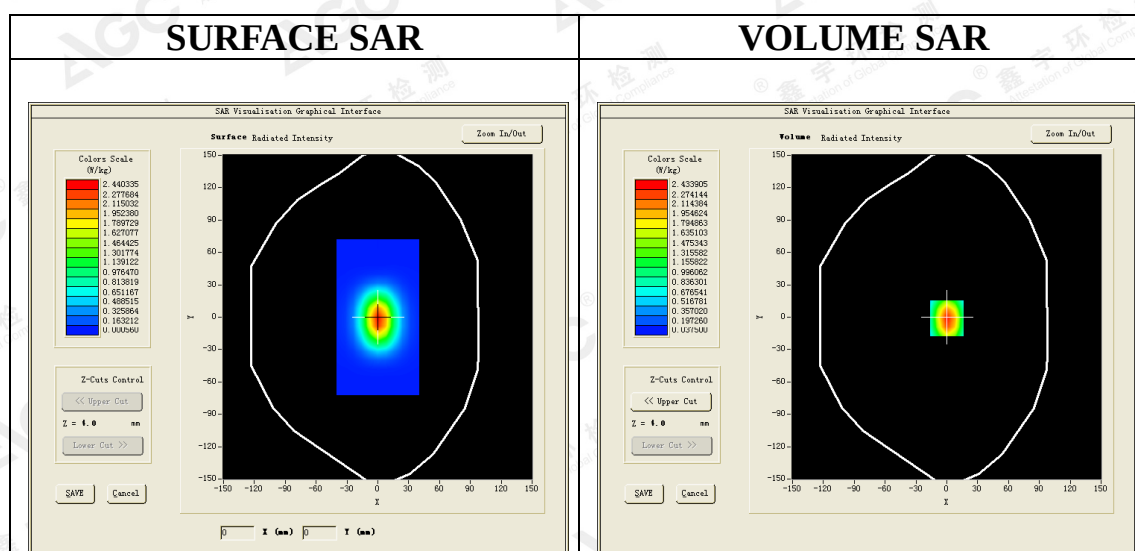


Maximum location: X=1.00, Y=-1.00

SAR Peak: 3.88 W/kg

SAR 10g (W/Kg)	1.191053
SAR 1g (W/Kg)	2.297540

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

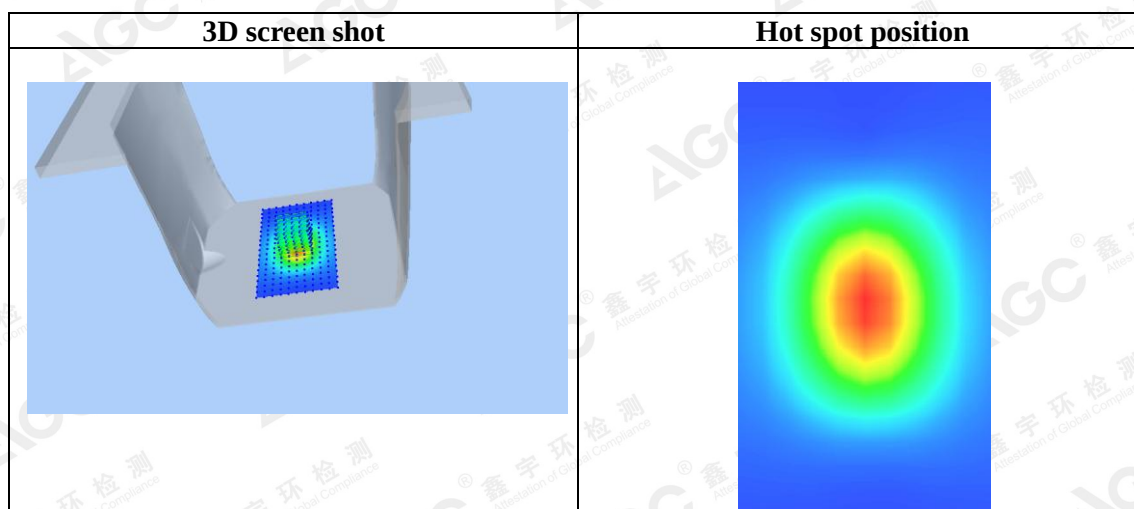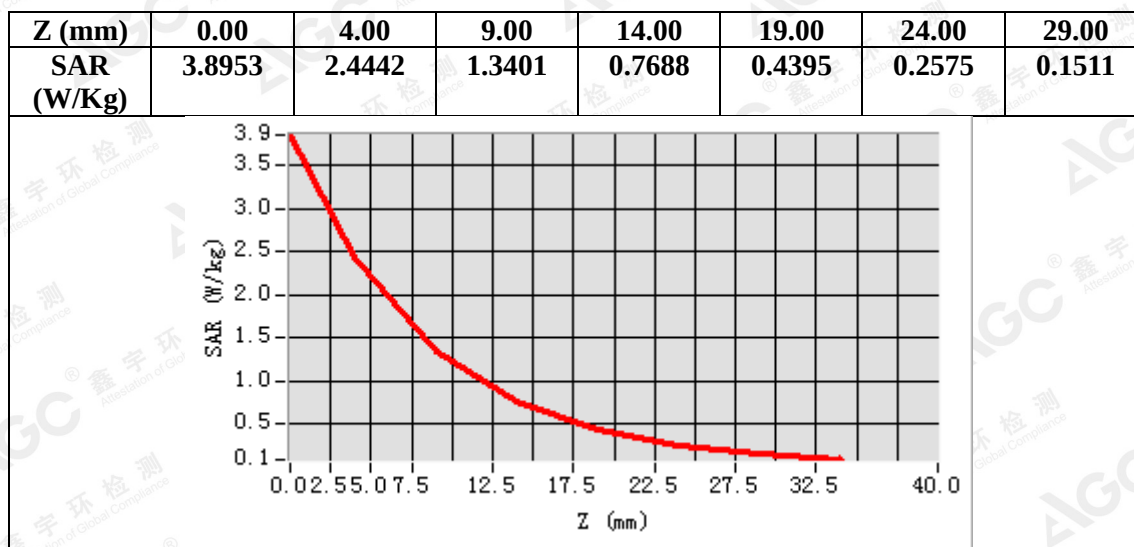

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

Test Laboratory: AGC Lab

Date: Jun.17,2018

System Check Head 1900MHz

DUT: Dipole 1900 MHz; Type: SID 1900

Communication System: CW; Communication System Band: D1900 (1900.0 MHz); Duty Cycle:1:1; Conv.F=2.32

Frequency: 1900 MHz; Medium parameters used: $f = 1900$ MHz; $\sigma = 1.39$ mho/m; $\epsilon_r = 39.54$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section; Input Power=18dBm

Ambient temperature (°C):22.1, Liquid temperature (°C): 21.3

SATIMO Configuration:

Probe: SSE2; Calibrated: Aug. 08,2017; Serial No.: SN 08/16 EPGO282


• Sensor-Surface: 4mm (Mechanical Surface Detection)

• Phantom: SAM twin phantom

• Measurement SW: OpenSAR V4_02_32

Configuration/System Check 1900MHz Head/Area Scan: Measurement grid: dx=8mm, dy=8mm

Configuration/System Check 1900MHz Head/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm


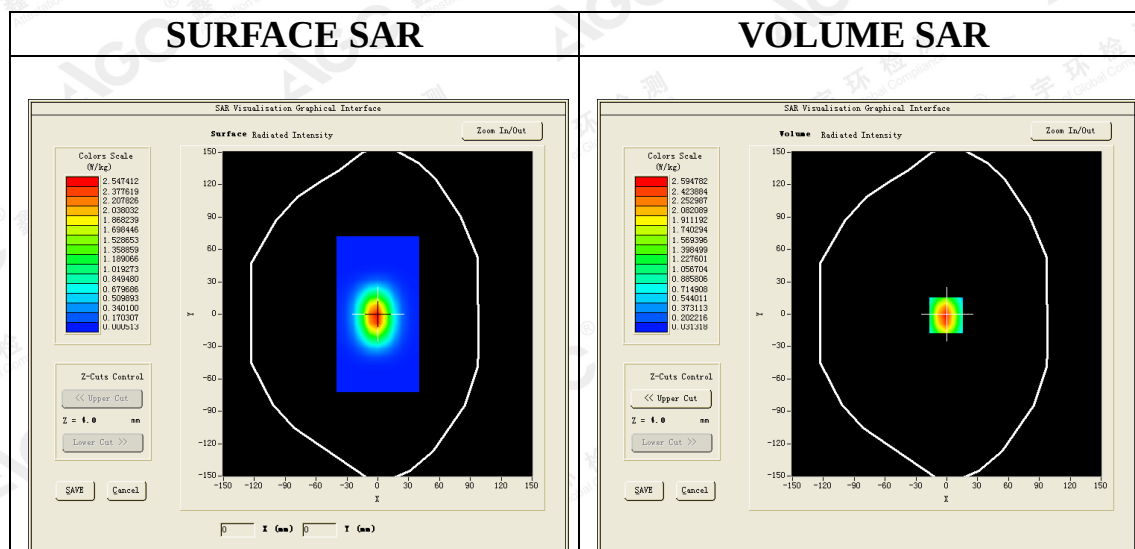


Maximum location: X=-1.00, Y=-1.00

SAR Peak: 4.19 W/kg

SAR 10g (W/Kg)	1.249513
SAR 1g (W/Kg)	2.467481

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

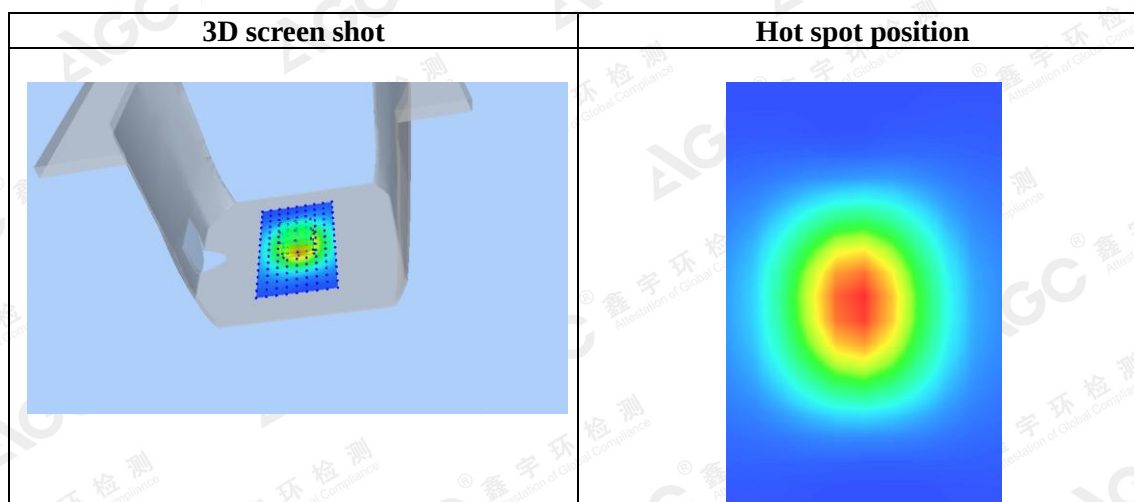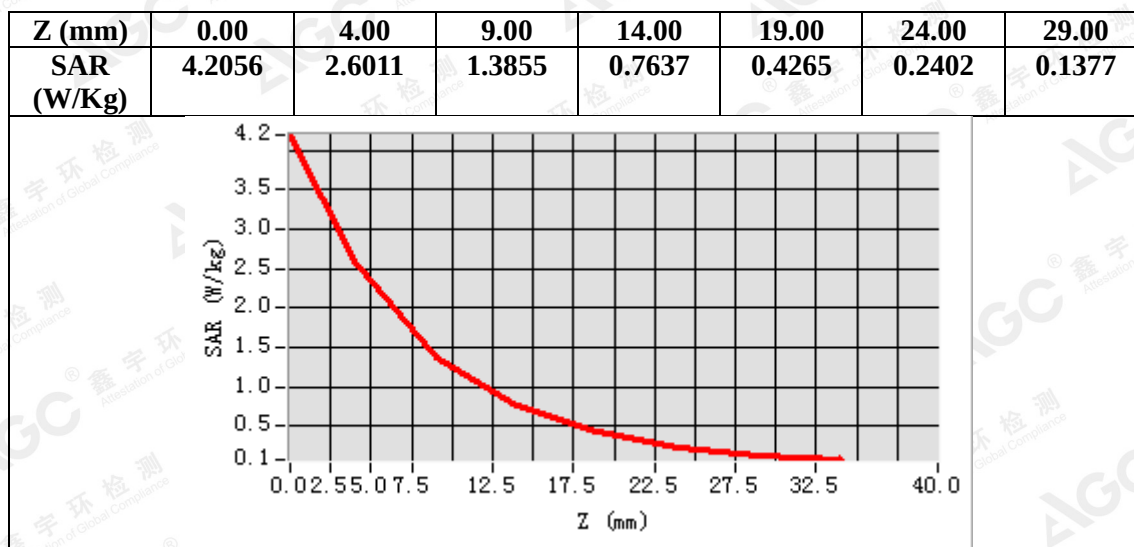

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

Test Laboratory: AGC Lab

Date: Jun.17,2018

System Check Body 1900MHz

DUT: Dipole 1900 MHz; Type: SID 1900

Communication System: CW; Communication System Band: D1900 (1900.0 MHz); Duty Cycle:1:1; Conv.F=2.39

Frequency: 1900 MHz; Medium parameters used: $f = 1900$ MHz; $\sigma = 1.53$ mho/m; $\epsilon_r = 53.16$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section; Input Power=18dBm

Ambient temperature (°C):22.1, Liquid temperature (°C): 21.6

SATIMO Configuration:

Probe: SSE2; Calibrated: Aug. 08,2017; Serial No.: SN 08/16 EPGO282


• Sensor-Surface: 4mm (Mechanical Surface Detection)

• Phantom: SAM twin phantom

• Measurement SW: OpenSAR V4_02_32

Configuration/System Check 1900MHz Body/Area Scan: Measurement grid: dx=8mm, dy=8mm

Configuration/System Check 1900MHz Body/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm


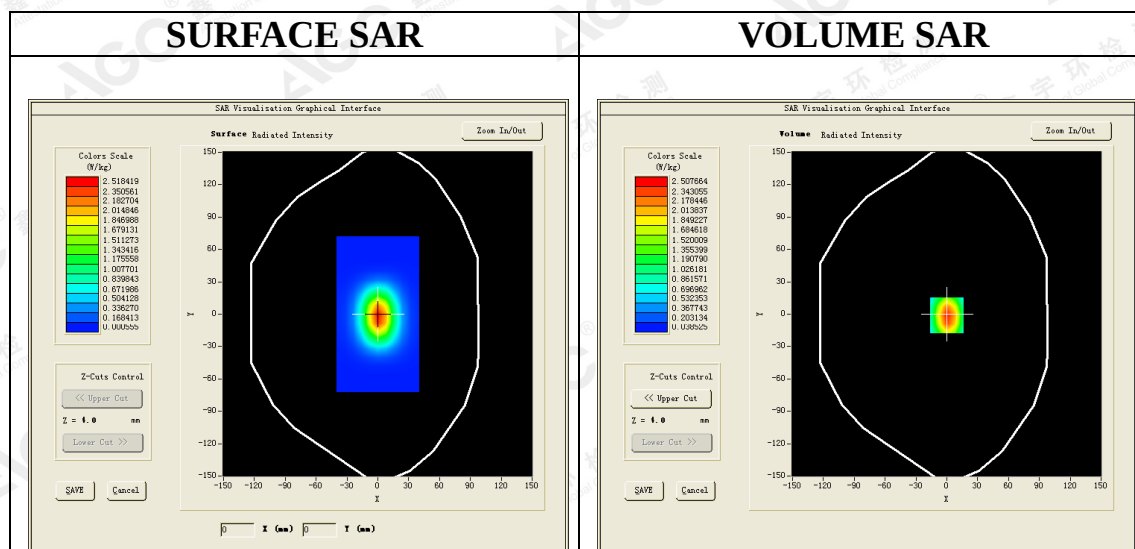


Maximum location: X=1.00, Y=-1.00

SAR Peak: 3.97 W/kg

SAR 10g (W/Kg)	1.225639
SAR 1g (W/Kg)	2.372845

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

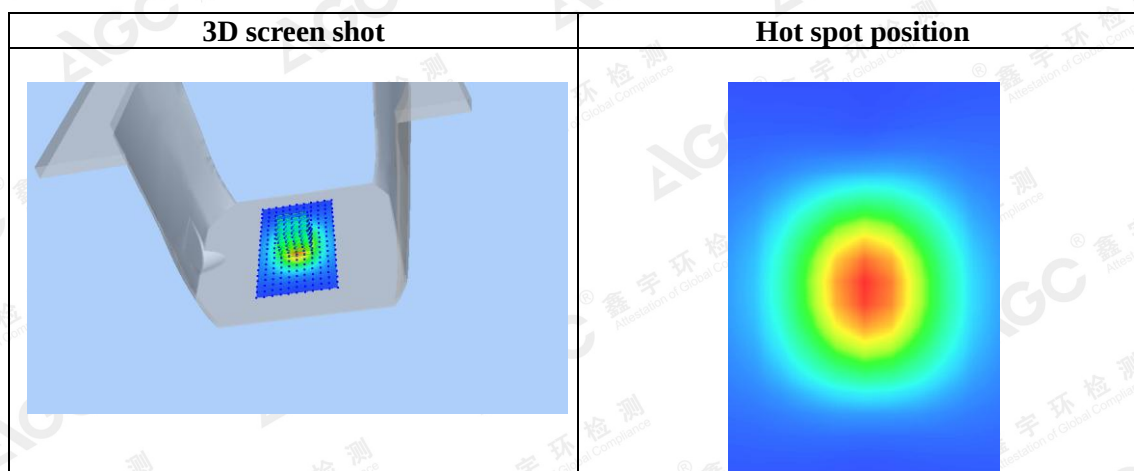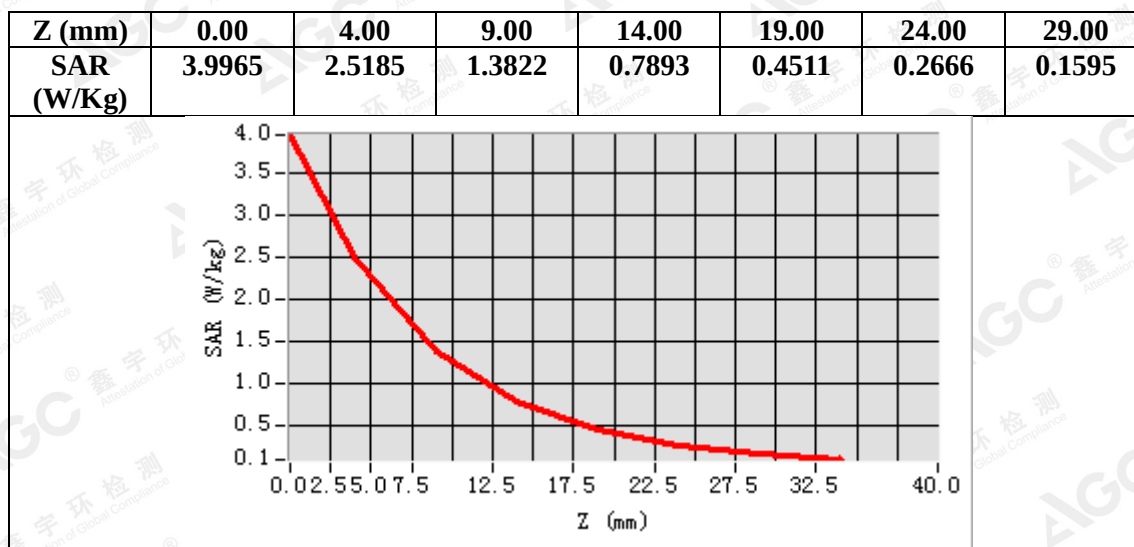

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

Test Laboratory: AGC Lab

Date: Jun.25,2018

System Check Head 1900MHz

DUT: Dipole 1900 MHz; Type: SID 1900

Communication System: CW; Communication System Band: D1900 (1900.0 MHz); Duty Cycle:1:1; Conv.F=2.32

Frequency: 1900 MHz; Medium parameters used: $f = 1900$ MHz; $\sigma = 1.4$ mho/m; $\epsilon_r = 40$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section; Input Power=18dBm

Ambient temperature (°C):21.8, Liquid temperature (°C): 21.2

SATIMO Configuration:

Probe: SSE2; Calibrated: Aug. 08,2017; Serial No.: SN 08/16 EPGO282


• Sensor-Surface: 4mm (Mechanical Surface Detection)

• Phantom: SAM twin phantom

• Measurement SW: OpenSAR V4_02_32

Configuration/System Check 1900MHz Head/Area Scan: Measurement grid: dx=8mm, dy=8mm

Configuration/System Check 1900MHz Head/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm


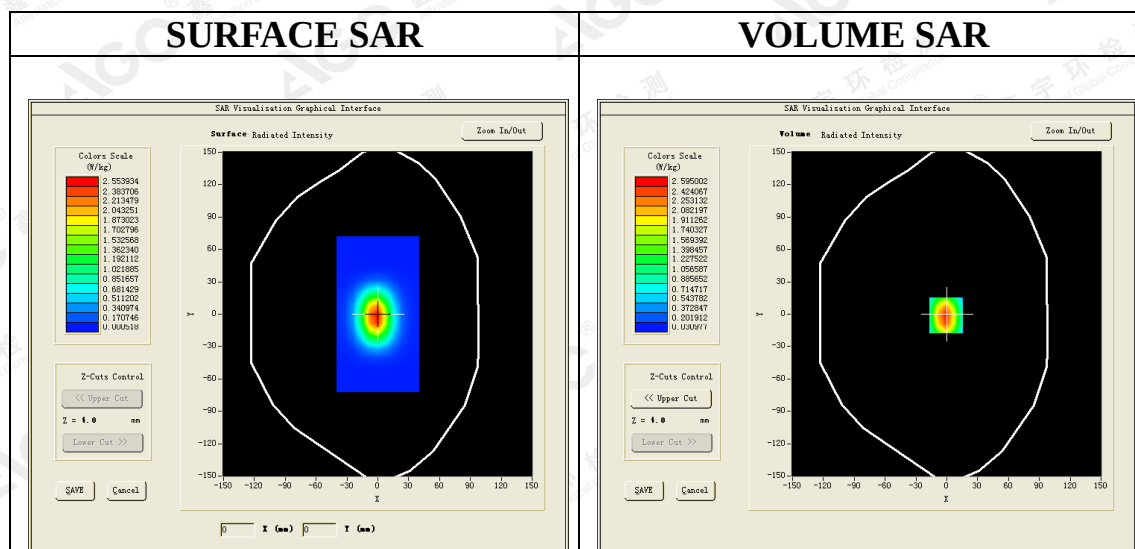


Maximum location: X=-0.00, Y=-0.00

SAR Peak: 4.19 W/kg

SAR 10g (W/Kg)	1.238774
SAR 1g (W/Kg)	2.462418

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

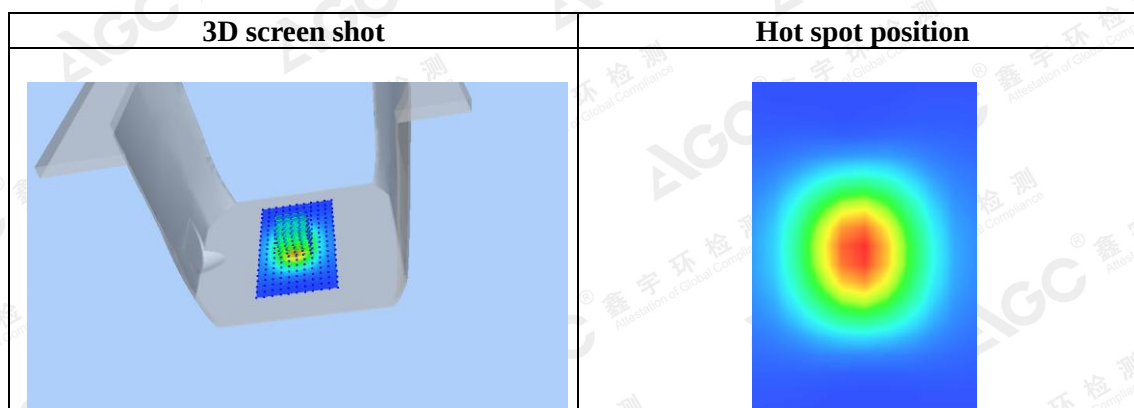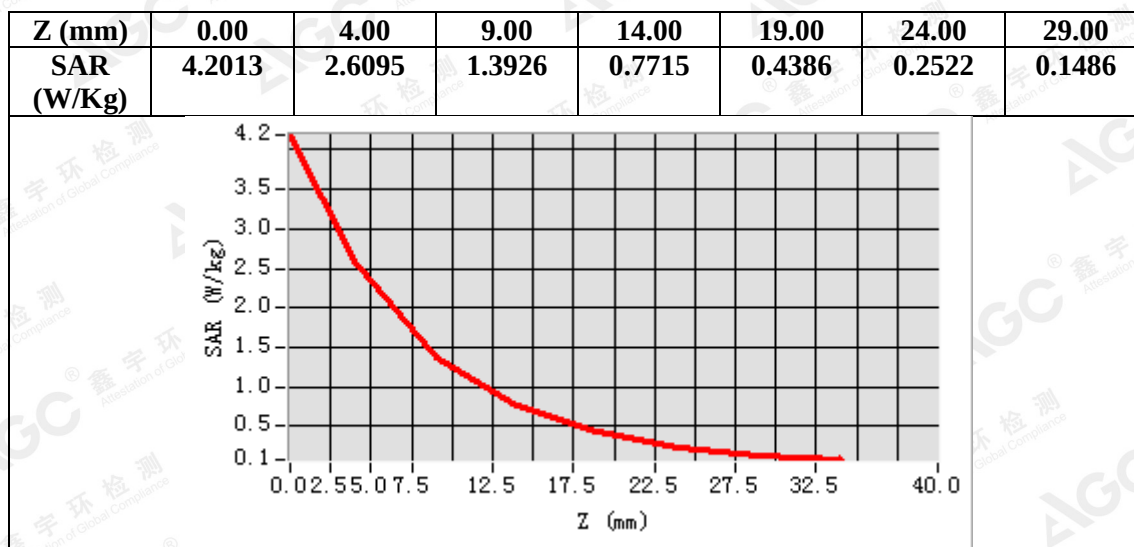

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

Test Laboratory: AGC Lab

Date: Jun.25,2018

System Check Body 1900MHz

DUT: Dipole 1900 MHz; Type: SID 1900

Communication System: CW; Communication System Band: D1900 (1900.0 MHz); Duty Cycle:1:1; Conv.F=2.39

Frequency: 1900 MHz; Medium parameters used: $f = 1900$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 53.22$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section; Input Power=18dBm

Ambient temperature (°C):21.8, Liquid temperature (°C): 21.5

SATIMO Configuration:

Probe: SSE2; Calibrated: Aug. 08,2017; Serial No.: SN 08/16 EPGO282


• Sensor-Surface: 4mm (Mechanical Surface Detection)

• Phantom: SAM twin phantom

• Measurement SW: OpenSAR V4_02_32

Configuration/System Check 1900MHz Body/Area Scan: Measurement grid: dx=8mm, dy=8mm

Configuration/System Check 1900MHz Body/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm


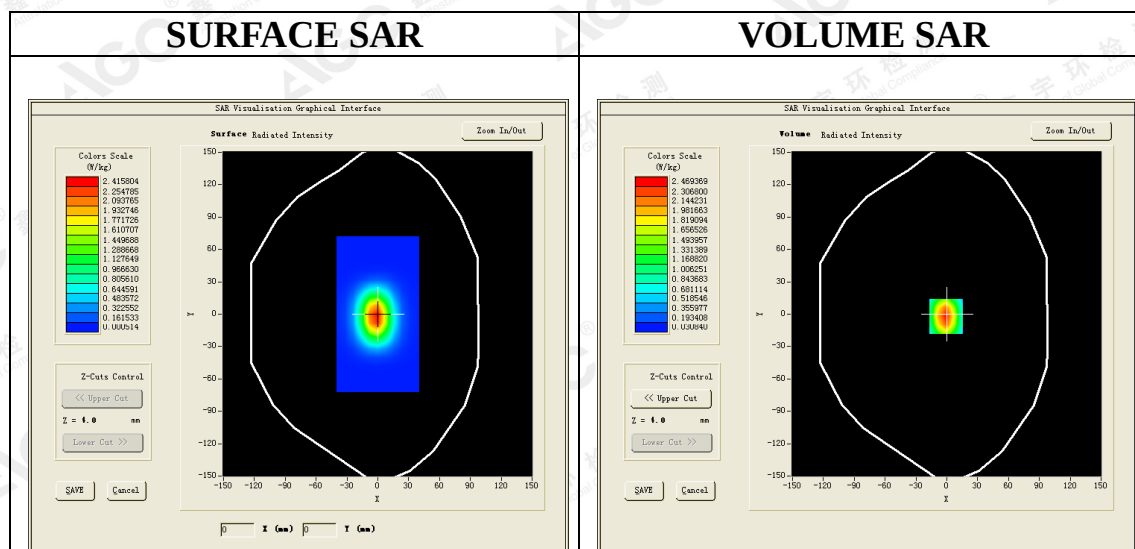


Maximum location: X=-1.00, Y=-1.00

SAR Peak: 4.00 W/kg

SAR 10g (W/Kg)	1.192135
SAR 1g (W/Kg)	2.350741

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

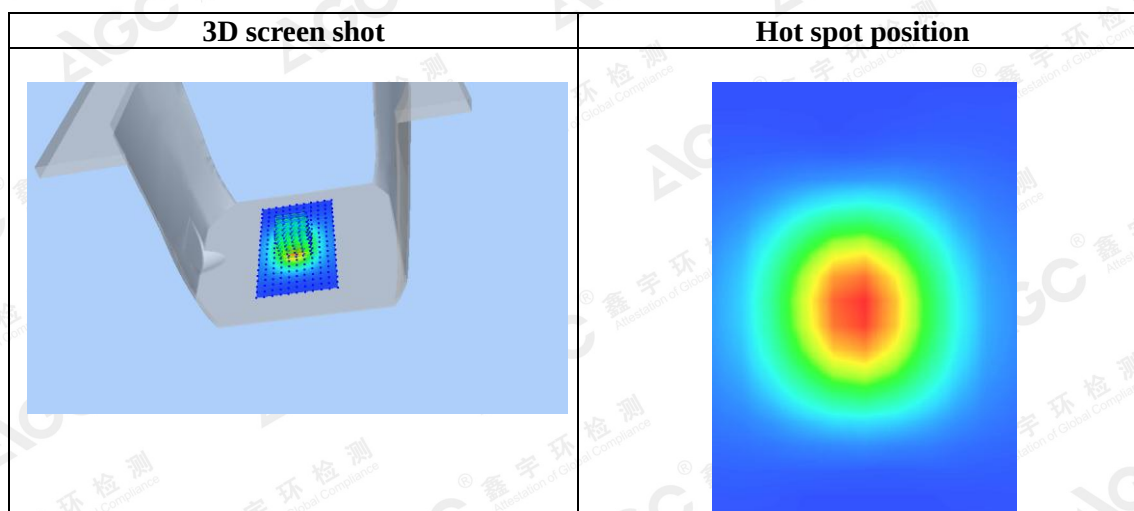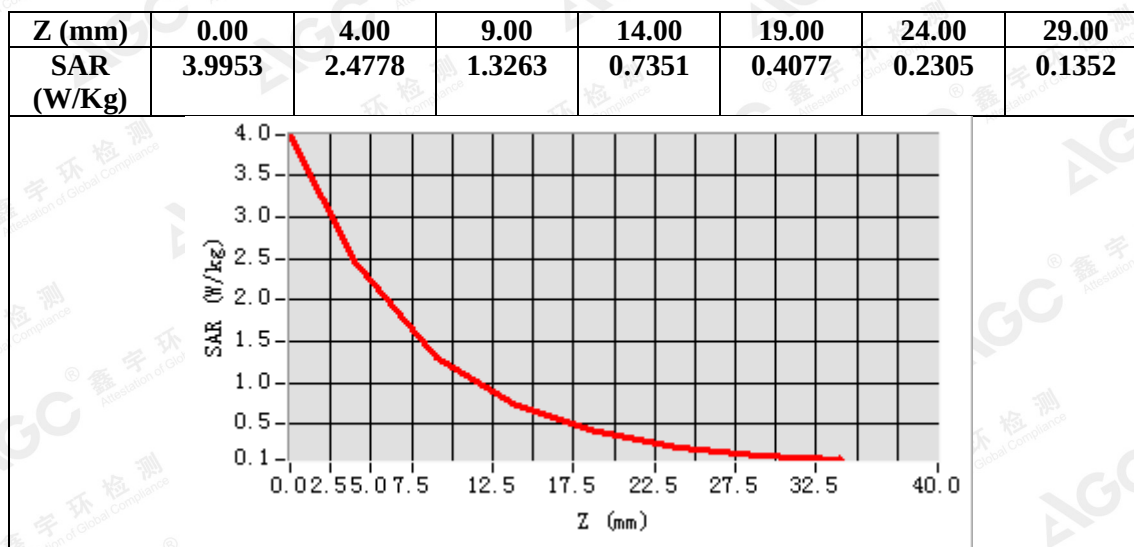

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

Test Laboratory: AGC Lab

Date: Jun.26,2018

System Check Head 2450 MHz

DUT: Dipole 2450 MHz Type: SID 2450

Communication System CW; Communication System Band: D2450 (2450.0 MHz); Duty Cycle: 1:1; Conv.F=2.52

Frequency: 2450 MHz; Medium parameters used: $f = 2450$ MHz; $\sigma = 1.8$ mho/m; $\epsilon_r = 39.51$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section; Input Power=18dBm


Ambient temperature (°C):22, Liquid temperature (°C): 21.3

SATIMO Configuration

- Probe: SSE2; Calibrated: Aug. 08,2017; Serial No.: SN 08/16 EPGO282
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_32

Configuration/System Check 2450MHz Head/Area Scan: Measurement grid: dx=8mm, dy=8mm

Configuration/System Check 2450MHz Head/Zoom Scan: Measurement grid: dx=5mm,dy=5mm, dz=5mm


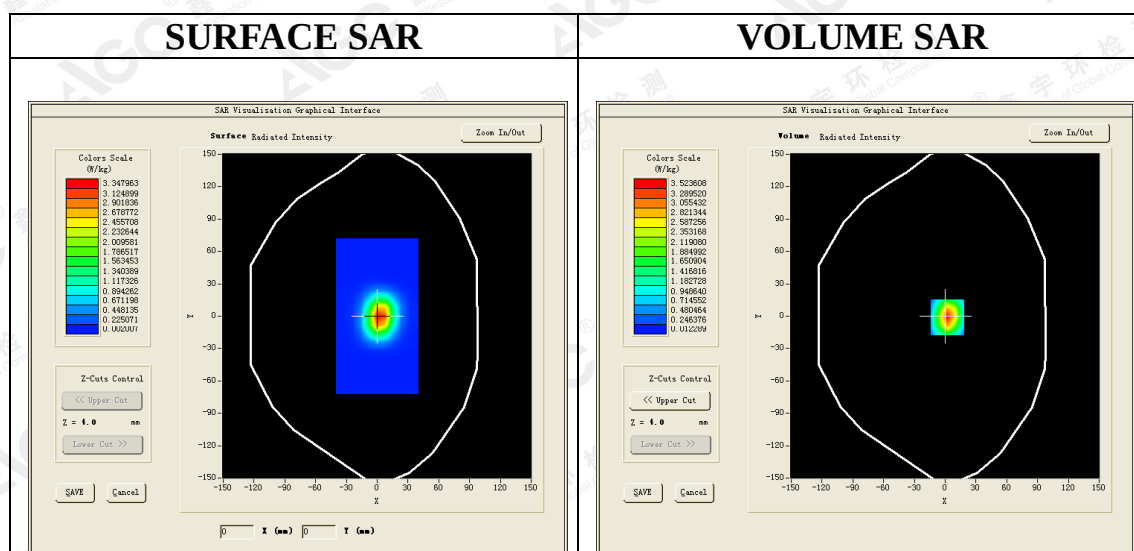


Maximum location: X=2.00, Y=-2.00

SAR Peak: 6.25 W/kg

SAR 10g (W/Kg)	1.417741
SAR 1g (W/Kg)	3.290135

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

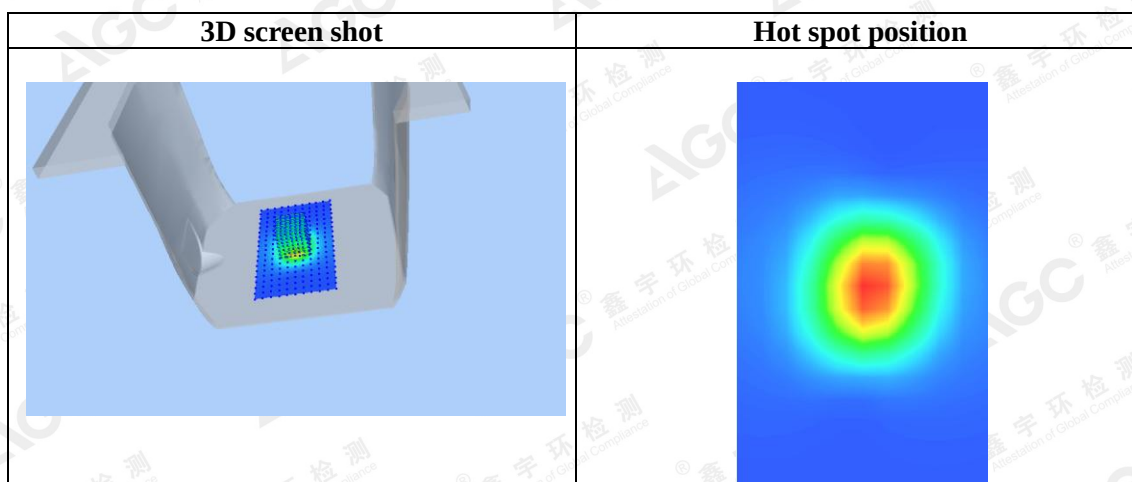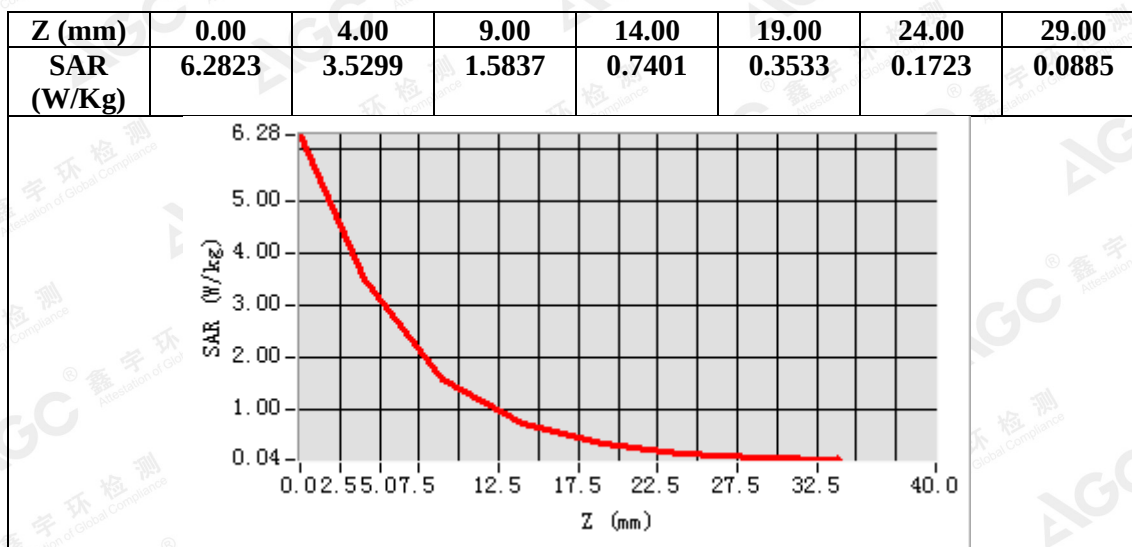

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.