



Emissions Test Report

EUT Name: Halo Band

Model No.: C9X87E

CFR 47 Part 15.247:2019 and RSS-247:2017

Prepared for:

Conde Verdon Company LLC
3200 Greenfield Rd., Ste 300
Dearborn, MI 48120, U.S.A.

Prepared by:

TUV Rheinland of North America, Inc.
5015 Brandin Ct
Fremont, CA 94538 U.S.A.
Tel: (925) 249-9123
Fax: (925) 249-9124
<http://www.tuv.com/>

Report/Issue Date: November 8th, 2019
Report Number: 31962289.001
Project Number: 234110820
Revision Number 0

Revisions

Note: Latest revision report will replace all previous reports.

Statement of Compliance

Applicant: Conde Verdon Company LLC
3200 Greenfield Rd., Ste 300
Dearborn, MI 48120, USA

Requester / Applicant: Conde Verdon Company LLC

Name of Equipment: Halo Band
Model No. C9X87E

Type of Equipment: Intentional Radiator

Application of Regulations: CFR 47 Part 15.247:2019 and RSS-247:2017

Test Dates: July 29, 2019 to August 9, 2019

Guidance Documents:

Emissions: ANSI C63.10-2013, KDB 558074 D01 15.247 Measurement Guidance v05

Test Methods:

Emissions: ANSI C63.10-2013, KDB 558074 D01 15.247 Measurement Guidance v05

The electromagnetic compatibility test and documented data described in this report has been performed and recorded by TUV Rheinland, in accordance with the standards and procedures listed herein. As the responsible authorized agent of the EMC laboratory, I hereby declare that the equipment described above has been shown to be compliant with the EMC requirements of the stated regulations and standards based on these results. If any special accessories and/or modifications were required for compliance, they are listed in the Executive Summary of this report.

This report must not be used to claim product endorsement by A2LA or any agency of the U.S. Government. This report contains data that are not covered by A2LA accreditation. This report shall not be reproduced except in full, without the written authorization of TUV Rheinland of North America.

James Borrott

11/08/2019

Test Engineer

Date

Laboratory Signature

Date



ISED

Testing Cert #3331.02

US1131

US0185

Table of Contents

1	Executive Summary	7
1.1	Scope	7
1.2	Purpose	7
1.3	Summary of Test Results	8
1.4	Special Accessories	8
1.5	Equipment Modifications	8
2	Laboratory Information	9
2.1	Accreditations & Endorsements	9
2.1.1	US Federal Communications Commission	9
2.1.2	NIST / A2LA	9
2.1.3	ISED	9
2.1.4	Japan – VCCI	9
2.1.5	Acceptance by Mutual Recognition Arrangement	10
2.2	Test Facilities	10
2.2.1	Emission Test Facility	10
2.3	Measurement Uncertainty	11
2.3.1	Sample Calculation – radiated & conducted emissions	11
2.3.2	Measurement Uncertainty Emissions	11
2.3.3	Measurement Uncertainty Immunity	12
2.4	Calibration Traceability	12
3	Product Information	13
3.1	Product Description	13
3.2	Equipment Configuration	13
3.3	Operating Mode	13
3.4	Unique Antenna Connector	14
3.4.1	Results	14
3.5	Duty Cycle	14
4	Emission	16
4.1	Output Power Requirements	16
4.1.1	Test Method	16
4.1.2	Results	17
4.2	Occupied Bandwidth	20
4.2.1	Test Method	20
4.2.2	Results	21
4.3	Hopping Frequency Requirements	27
4.3.1	Test Method	27
4.3.2	Results	28
4.4	Out of Band Emissions: Non-Restricted Bands	33
4.4.1	Test Method	33

Table of Contents

4.4.2	Results	33
4.5	Out of Band Emissions: Restricted Band Edge	42
4.5.1	Test Method	42
4.5.2	Test Results	43
4.6	Transmitter Spurious Emissions	46
4.6.1	Test Methodology	46
4.6.2	Transmitter Spurious Emission Limit	48
4.6.3	Test Results	48
4.7	AC Conducted Emissions	58
4.7.1	Test Methodology	58
4.7.2	Test Results	58
5	Test Equipment Use List	61
5.1	Equipment List	61
6	EMC Test Plan	62
6.1	Introduction	62
6.2	Customer	62
6.3	Equipment Under Test (EUT)	63
6.4	Test Specifications	65

Index of Tables

Table 1: Summary of Test Results	8
Table 2: RF Output Power at the Antenna Port – Test Results.....	17
Table 3: Occupied Bandwidth – Test Results.....	21
Table 4: Frequency Hopping Requirements	28
Table 5: Band Edge Requirements – Test Results.....	34
Table 6: Transmit Spurious Emission at Restricted Band Edge Requirements	43
Table 7: AC Conducted Emissions – Test Results.....	58
Table 8: Customer Information.....	62
Table 9: Technical Contact Information	62
Table 10: EUT Specifications	63
Table 11: Interface Specifications.....	64
Table 12: Supported Equipment.....	64
Table 13: Description of Sample used for Testing.....	64
Table 14: Description of Test Configuration used for Radiated Measurement.	64
Table 15: Test Specifications	65

1 Executive Summary

1.1 Scope

This report is intended to document the status of conformance with the requirements of the CFR 47 Part 15.247:2019 and RSS-247:2017 based on the results of testing performed on July 29, 2019 to August 9, 2019 on the Halo Band manufactured by Conde Verdon Company LLC. This report only applies to the specific samples tested under the stated test conditions. It is the responsibility of the manufacturer to assure that additional production units of this model are manufactured with identical or EMI equivalent electrical and mechanical components. This report is further intended to document changes and modifications to the EUT throughout its life cycle. All documentation will be included as a supplement.

1.2 Purpose

Testing were performed to evaluate the EMC performance of the EUT in accordance with the applicable requirements, procedures, and criteria defined in the application of regulations and application of standards listed in this report.

The report documents the 2.4 GHz Bluetooth BR/EDR radio characteristics for the C9X87E .

1.3 Summary of Test Results

Table 1: Summary of Test Results

Test	Test Method ANSI C63.10:2013	Test Parameters	Measured Value	Result
2402 MHz to 2480 MHz Band				
Spurious Emission in Transmitted Mode	CFR47 15.209, CFR47 15.247 (d), RSS-GEN Sect.8.9	Class B	-4.27 dB (Margin)	Complied
Restricted Bands of Operation	CFR47 15.205, RSS GEN Sect.8.10	Class B		Complied
AC Power Conducted Emission	CFR47 15.207, RSS-GEN Sect.8.8	Class B	-11.25 dB (Margin)	Complied
Occupied Bandwidth	CFR47 15.247 (a1), RSS GEN Sect.6.7	N/A	20dB BW = 1.294 MHz 99% BW = 1.1792MHz	Complied
Channel Separation	CFR47 15.247 (a1), RSS 247 Sect. 5.1 (b)	> Two-Third 20dB BW	996 kHz	Complied
Number of Hopping Channels	CFR47 15.247 (a1)(iii), RSS 247 Sect. 5.1(d)	>15	79 Channels	Complied
Average time occupancy of Channel	CFR47 15.247 (a1), RSS 247 Sect. 5.1(d)	< 0.4 sec	286.3ms	Complied
Maximum Transmitted Power	CFR47 15.247 (a1), RSS 247 Sect. 5.1 (b)	<125 mWatts	9.31 mW	Complied
Out of Band Emission	CFR47 15.247 (d), RSS 247 Sect. 5.5	< -20 dBr	- 24.79 dBr (-37.75 dBm at 2489.37 MHz)	Complied

Note: 1. Meet restricted band emission requirements.
 2. This report is only documented for 2402 – 2480MHz.

1.4 Special Accessories

No special accessories were necessary in order to achieve compliance.

1.5 Equipment Modifications

None

2 Laboratory Information

2.1 *Accreditations & Endorsements*

2.1.1 US Federal Communications Commission



TUV Rheinland of North America at 1279 Quarry Ln, Pleasanton, CA 94566, and 5015 Brandin Ct, Fremont, CA 94538 is recognized by the commission for performing testing services for the general public on a fee basis. These laboratory test facilities have been fully described in reports submitted to and accepted by the FCC (US1131). The laboratory scope of accreditation includes: Title 47 CFR Parts 15, 18, and 90. The accreditation is updated every 3 years.

2.1.2 NIST / A2LA



TUV Rheinland of North America is accredited by the National Voluntary Laboratory Accreditation Program, which is administered under the auspices of the National Institute of Standards and Technology. The laboratory has been assessed and accredited in accordance with ISO Guide 17025:2005. The scope of laboratory accreditation includes emission and immunity testing. The accreditation is updated annually.

2.1.3 ISED

The Pleasanton 5-meter Semi-Anechoic Chamber, has been accepted by ISED to perform testing to 3 and 5 meters based on the test procedures described in ANSI C63.4-2014. The Fremont 10-meter Semi-Anechoic Chamber, has been accepted by ISED to perform testing to 3 and 10 meters based on the test procedures described in ANSI C63.4-2014. Under US0185

2.1.4 Japan – VCCI



The Voluntary Control Council for Interference by Information Technology Equipment (VCCI) is a group that consists of Information Technology Equipment (ITE) manufacturers and EMC test laboratories. The purpose of the Council is to take voluntary control measures against electromagnetic interference from Information Technology Equipment, and thereby contribute to the development of a socially beneficial and responsible state of affairs in the realm of Information Technology Equipment in Japan. TUV Rheinland of North America at 1279 Quarry Ln, Pleasanton, CA 94566 and 5015 Brandin Ct, Fremont, CA 94538 has been assessed and approved in accordance with the Regulations for Voluntary Control Measures.

VCCI Registration No. for Pleasanton: A-0326

VCCI Registration No. for Fremont: A-0327

2.1.5 Acceptance by Mutual Recognition Arrangement



The United States has an established agreement with specific countries under the Asia Pacific Laboratory Accreditation Corporation (APLAC) Mutual Recognition Arrangement. Under this agreement, all TUV Rheinland at 1279 Quarry Ln, Pleasanton, CA 94566 and 5015 Brandin Ct, Fremont, CA 94538 test results and test reports within the scope of the laboratory NIST / A2LA accreditation will be accepted by each member country.

2.2 Test Facilities

All of the test facilities are located at 1279 Quarry Lane, Pleasanton, California 94566, USA and 5015 Brandin Ct, Fremont, CA 94538 USA.

2.2.1 Emission Test Facility

The Semi-Anechoic chamber and AC Line Conducted measurement facility used to collect the radiated and conducted data has been constructed in accordance with ANSI C63.7:1992. The site has been measured in accordance with and verified to comply with the theoretical normalized site attenuation requirements of ANSI C63.4-2014, at a test distance of 3 and 5 meters. The site is listed with the FCC and accredited by A2LA (Lab Code 3331.02). The 3/5-meter semi-anechoic chamber used to collect the radiated data has been verified to comply with the theoretical normalized site attenuation requirements of ANSI C63.4-2014, at a test distance of 3 meter and 5 meters. A report detailing this site can be obtained from TUV Rheinland of North America.

2.3 Measurement Uncertainty

Two types of measurement uncertainty are expressed in this report, per *ISO Guide To The Expression Of Uncertainty In Measurement*, 1st Edition, 1995.

The Combined Standard Uncertainty is the standard uncertainty of the result of a measurement when that result is obtained from the values of a number of other quantities; it is equal to the positive square root of the sum of the variances or co-variances of these other quantities, weighted according to how the measurement result varies with changes in these quantities. The term **standard uncertainty** is the result of a measurement expressed as a standard deviation.

2.3.1 Sample Calculation – radiated & conducted emissions

The field strength is calculated by subtracting the Amplifier Gain and adding the Cable Loss and Antenna Correction Factor to the measured reading. The basic equation is as follows:

$$\text{Field Strength (dB}\mu\text{V/m)} = \text{RAW} - \text{AMP} + \text{CBL} + \text{ACF}$$

Where: RAW = Measured level before correction (dB μ V)

AMP = Amplifier Gain (dB)

CBL = Cable Loss (dB)

ACF = Antenna Correction Factor (dB/m)

$$\mu\text{V/m} = 10^{\frac{\text{dB}\mu\text{V/m}}{20}}$$

Sample radiated emissions calculation @ 30 MHz

Measurement +Antenna Factor–Amplifier Gain+Cable loss=Radiated Emissions (dBuV/m)

$$25 \text{ dBuV/m} + 17.5 \text{ dB} - 20 \text{ dB} + 1.0 \text{ dB} = 23.5 \text{ dBuV/m}$$

2.3.2 Measurement Uncertainty Emissions

Per CISPR 16-4-2	U _{lab}	U _{cispr}
Radiated Disturbance @ 10 meters		
30 – 1,000 MHz	2.25 dB	4.51 dB
Radiated Disturbance @ 3 meters		
30 – 1,000 MHz	2.26 dB	4.52 dB
1 – 6 GHz	2.12 dB	4.25 dB
6 – 18 GHz	2.47 dB	4.93 dB
Conducted Disturbance @ Mains Terminals		
150 kHz – 30 MHz	1.09 dB	2.18 dB
Disturbance Power		
30 MHz – 300 MHz	3.92 dB	4.3 dB

Voltech PM6000A

The estimated combined standard uncertainty for harmonic current and flicker measurements is $\pm 5.0\%$.	Per CISPR 16-4-2 Methods
--	--------------------------

2.3.3 Measurement Uncertainty Immunity

The estimated combined standard uncertainty for ESD immunity measurements is $\pm 8.2\%$.	Per IEC 61000-4-2
The estimated combined standard uncertainty for radiated immunity measurements is ± 4.10 dB.	Per IEC 61000-4-3
The estimated combined standard uncertainty for conducted immunity measurements with CDN is ± 3.66 dB	Per IEC 61000-4-6
The estimated combined standard uncertainty for power frequency magnetic field immunity is $\pm 2.9\%$.	Per IEC 61000-4-8

Thermo KeyTek EMC Pro

The estimated combined standard uncertainty for EFT fast transient immunity measurements is $\pm 2.6\%$.

The estimated combined standard uncertainty for surge immunity measurements is $\pm 2.6\%$.
--

The estimated combined standard uncertainty for voltage variation and interruption measurements is $\pm 1.74\%$.

The expanded uncertainty at a level of 95% confidence is obtained by multiplying the combined standard uncertainty by a coverage factor of 2. Compliance criteria are not based on measurement uncertainty.

2.4 Calibration Traceability

All measurement instrumentation is traceable to the National Institute of Standards and Technology (NIST). Measurement method complies with ANSI/NCSL Z540-1-1994 and ISO Standard 17025:2005.

3 Product Information

3.1 Product Description

The Model C9X87E has wireless capability, Bluetooth BR and EDR, operating in the 2400-2483.5 MHz Band.

3.2 Equipment Configuration

A description of the equipment configuration is given in the Test Plan Section. The EUT was tested as called for in the test standard and was configured and operated in a manner consistent with its intended use. The EUT was connected to rated power and allowed to reach intended operating conditions. The placement of the EUT system components was guided by the test standard and selected to represent typical installation conditions.

In the case of a EUT that can operate in more than one configuration, preliminary testing was performed to determine the configuration that produced maximum radiation.

The final configuration was selected to produce the worst case radiation for emissions testing and to place the EUT in the most susceptible state for immunity testing.

3.3 Operating Mode

A description of the operation mode is given in the Test Plan Section. In the case of a EUT that can operate in more than one state, preliminary testing was performed to determine the operating mode that produced maximum radiation.

The final operating mode was selected to produce the worst case radiation for emissions testing.

3.4 Unique Antenna Connector


An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of CFR47 Parts 15.211, 15.213, 15.217, 15.219, or 15.221.

3.4.1 Results

The Halo Band has 1 Antenna dedicated Bluetooth antenna that has maximum gain of -2.2dBi. It is connected via RF connector that is not easily accessible to the end user.


3.5 Duty Cycle

While in test mode, the device was set to continuous transmit, yielding in a 100% duty cycle for all data rates and packet types. Worse case mode for each data rate shown.

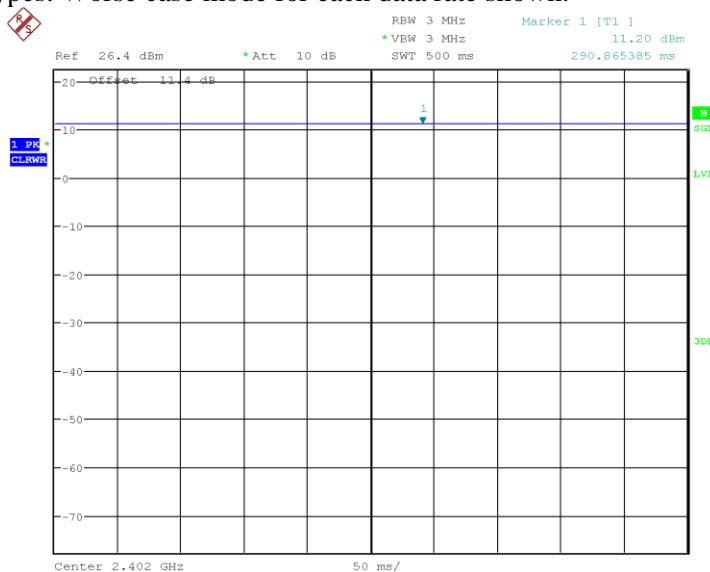


Date: 29.JUL.2019 09:38:42

Duty Cycle Measurement – DH3

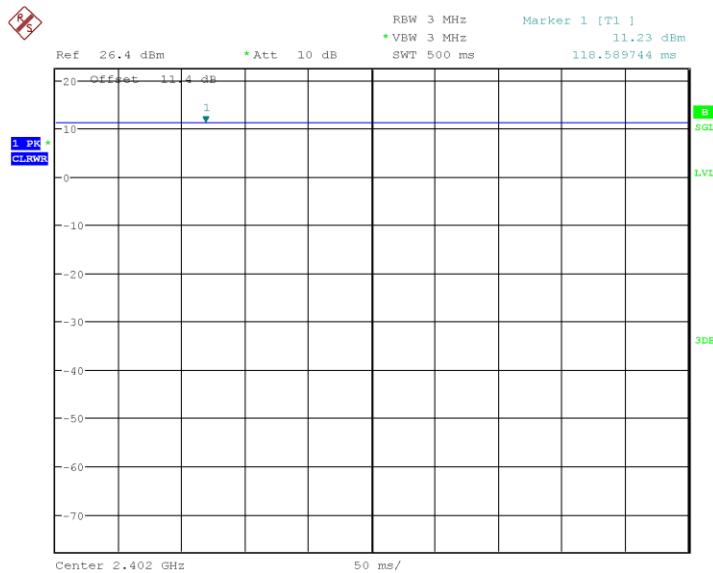

Date: 29.JUL.2019 09:40:58

Duty Cycle Measurement – 2DH3

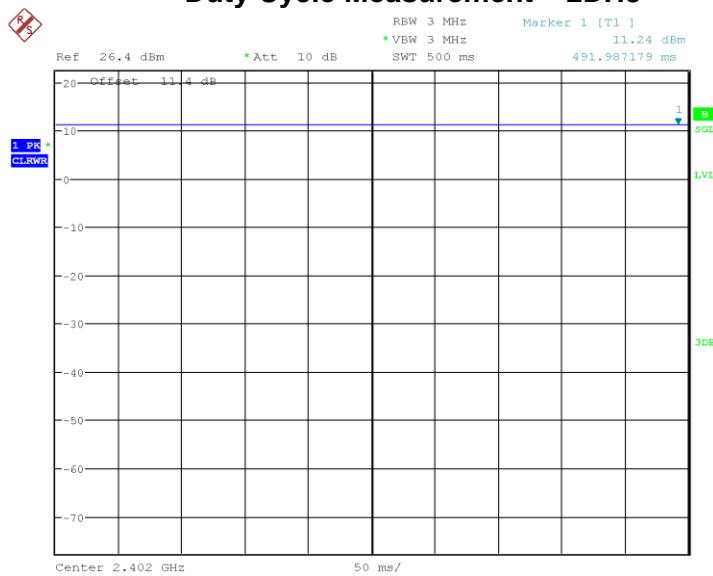

Date: 29.JUL.2019 09:42:18

Duty Cycle measurement – 3DH3

4 Emission

Testing was performed in accordance with CFR 47 Part 15.247:2019 and RSS-247:2017. These test methods are listed under the laboratory's A2LA Scope of Accreditation. This test measures the levels emanating from the EUT, thus evaluating the potential for the EUT to cause radio frequency interference to other electronic devices. Procedures described in Section 8 of the standard were used.

4.1 Output Power Requirements

The maximum output power requirement is the maximum equivalent isotropic radiated power delivering at the transmitting antenna under specified conditions of measurements in the presence of modulation.


The maximum output power and harmonics shall not exceed CFR47 Part 15.247 (a)(1) and RSS 247 Sect. 5.1(b)

Frequency hopping systems in the 2400-2483.5 MHz band: 125 mW.

4.1.1 Test Method

The conducted method was used to measure the channel power output according to ANSI C63.10:2013 Section 11.9.1.2. The measurement was performed with modulation per CFR47 Part 15.247 (a)(1) and RSS-247 Sect. 5.1. This test was conducted on 3 channels on C9X87E . The worst mode result indicated below.

Test Setup:

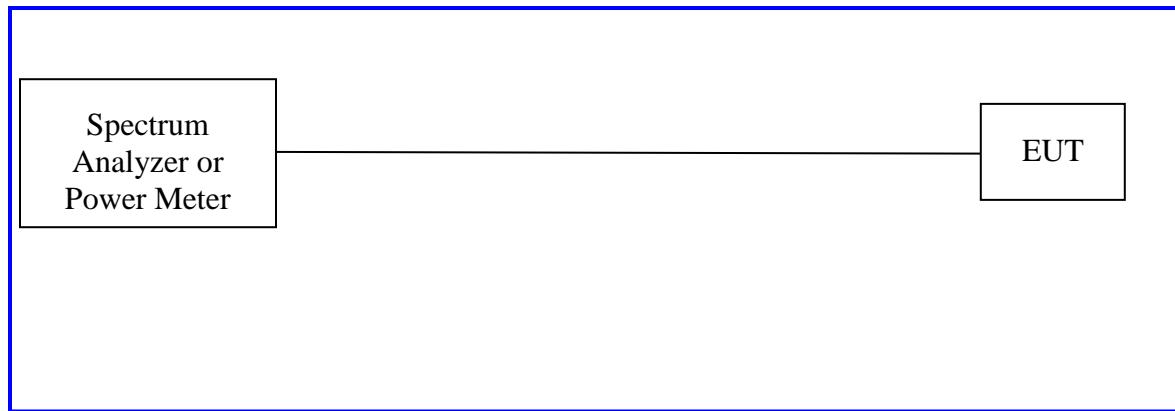

4.1.2 Results


As originally tested, the EUT was found to be compliant to the requirements of the test standard(s).

Table 2: RF Output Power at the Antenna Port – Test Results

Conducted Output Power – EDR, BR				
Packet	Operating Channel	Limit [dBm]	Power [dBm]	Margin [dB]
DH1	2402 MHz	+21.00	10.9	-10.1
	2441 MHz	+21.00	10.99	-10.01
	2480 MHz	+21.00	10.99	-10.01
DH3	2402 MHz	+21.00	10.96	-10.04
	2441 MHz	+21.00	10.96	-10.04
	2480 MHz	+21.00	10.98	-10.02
DH5	2402 MHz	+21.00	10.96	-10.04
	2441 MHz	+21.00	10.95	-10.05
	2480 MHz	+21.00	10.97	-10.03
2-DH1	2402 MHz	+21.00	10.61	-10.39
	2441 MHz	+21.00	10.78	-10.22
	2480 MHz	+21.00	10.82	-10.18
2-DH3	2402 MHz	+21.00	10.6	-10.4
	2441 MHz	+21.00	10.8	-10.2
	2480 MHz	+21.00	10.85	-10.15
2-DH5	2402 MHz	+21.00	10.6	-10.4
	2441 MHz	+21.00	10.8	-10.2
	2480 MHz	+21.00	10.82	-10.18
3-DH1	2402 MHz	+21.00	11.02	-9.98
	2441 MHz	+21.00	11.24	-9.76
	2480 MHz	+21.00	11.22	-9.78
3-DH3	2402 MHz	+21.00	11.04	-9.96
	2441 MHz	+21.00	11.25	-9.75
	2480 MHz	+21.00	11.25	-9.75


3-DH5	2402 MHz	+21.00	11.02	-9.98
	2441 MHz	+21.00	11.22	-9.78
	2480 MHz	+21.00	11.24	-9.76

Note: The EUT is capable to transmit at both BDR and EDR. The worst case at low, middle, and high frequencies are shown below.

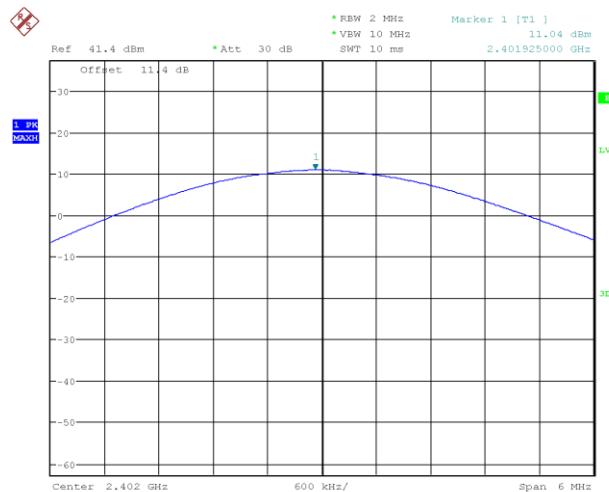


Date: 30.JUL.2019 14:01:16

Plot 1. 3-DH3, 2402MHz Power

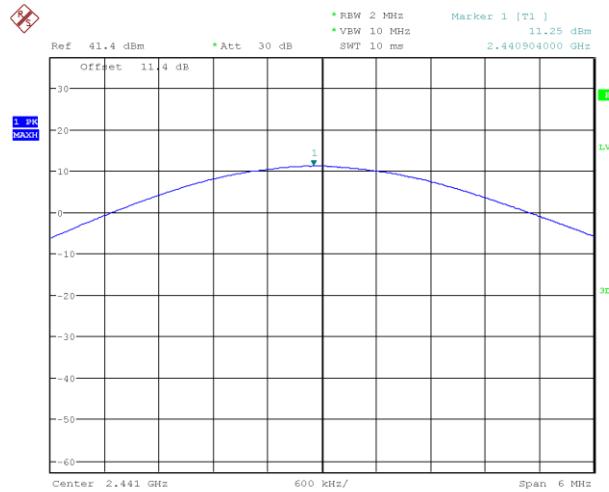

Date: 30.JUL.2019 14:24:47

Plot 2. 3-DH3, 2441MHz Power

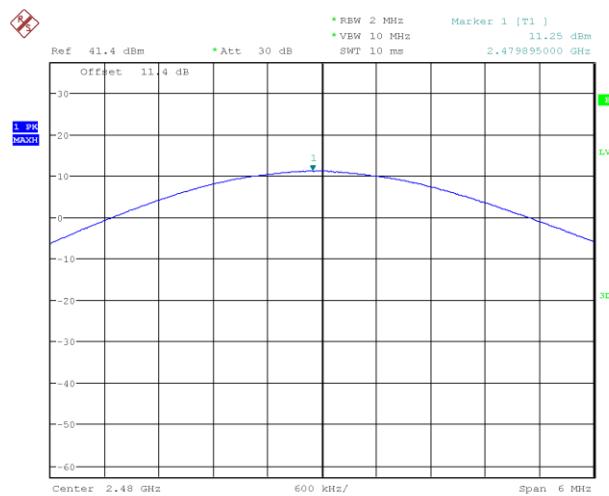

Date: 30.JUL.2019 14:31:11

Plot 3. 3-DH3, 2480MHz Power

4.2 Occupied Bandwidth

The occupied bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio. The reference level is the *level of the highest amplitude signal observed from the transmitter at the fundamental frequency*.


The 99% bandwidth is the bandwidth in which 99% of the transmitted power occupied.

20 dB bandwidth was performed by coupling the output of the EUT to the input of a spectrum analyzer.

4.2.1 Test Method

The conducted method was used to measure the occupied bandwidth. The measurement was performed with modulation per CFR47 15.247 (a)(1) and RSS GEN Sect. 6.7. This test was conducted on 3 channels on C9X87E . The worst sample result indicated below.

Test Setup:

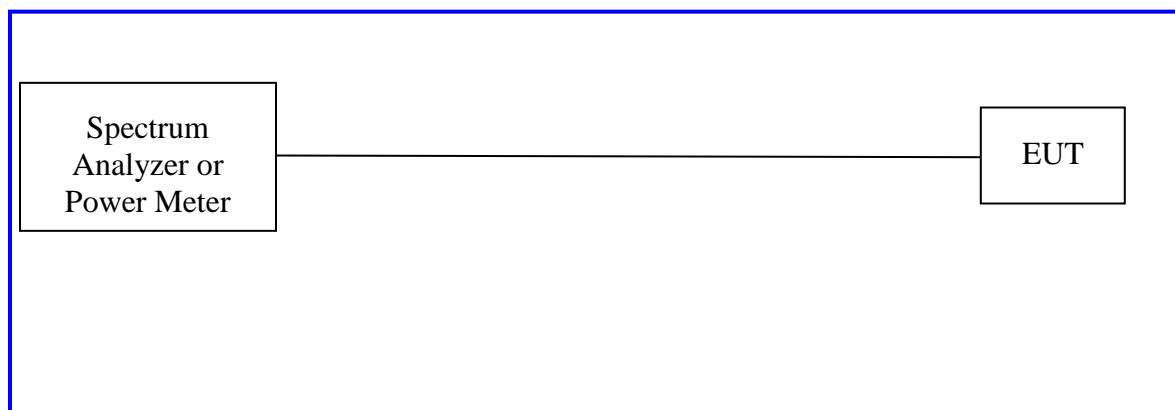


4.2.2 Results

These measurements were used for information only


Table 3: Occupied Bandwidth – Test Results

Bandwidth (MHz)			
Packet	Freq. (MHz)	20dB Bandwidth MHz	99% Bandwidth MHz
DH1	2402	0.9495	0.909
	2441	0.924	0.909
	2480	0.921	0.9045
DH3	2402	0.933	0.906
	2441	0.9465	0.906
	2480	0.9105	0.9135
DH5	2402	0.9375	0.906
	2441	0.9645	0.906
	2480	0.936	0.912
2-DH1	2402	1.346	1.204
	2441	1.356	1.204
	2480	1.357	1.202
2-DH3	2402	1.354	1.203
	2441	1.334	1.203
	2480	1.342	1.204
2-DH5	2402	1.355	1.202
	2441	1.363	1.204
	2480	1.355	1.203
3-DH1	2402	1.363	1.202
	2441	1.351	1.202

	2480	1.351	1.203
	2402	1.351	1.202
3-DH3	2441	1.345	1.204
	2480	1.362	1.202
3-DH5	2402	1.359	1.202
	2441	1.348	1.203
	2480	1.353	1.2
Note: Worst case for Occupied Bandwidth are shown below.			

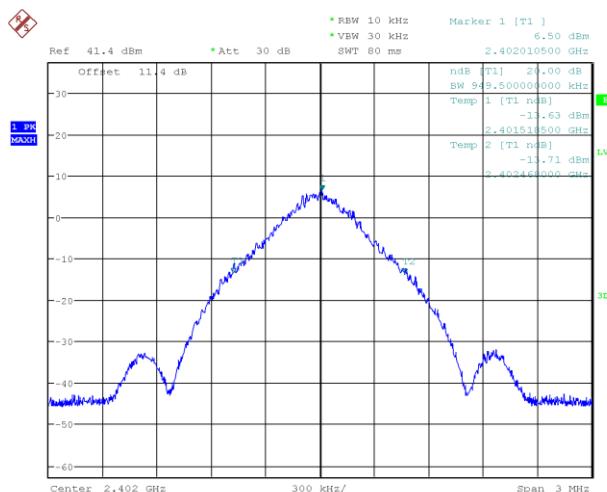


Plot 4. DH1 2402MHz 20dB Bandwidth

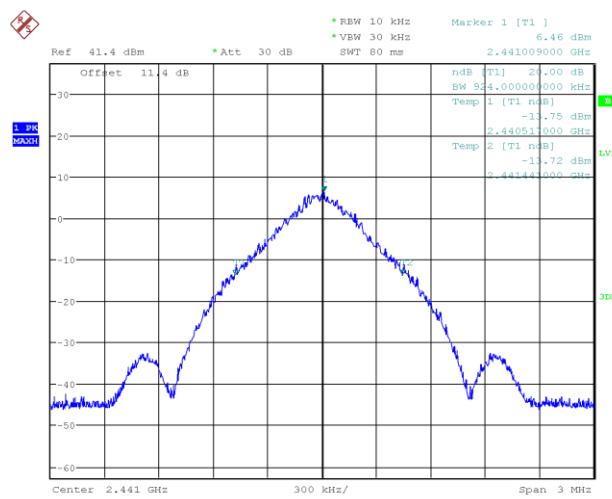


Date: 30.JUL.2019 14:57:21

Plot 5. DH1 2441MHz 20dB Bandwidth

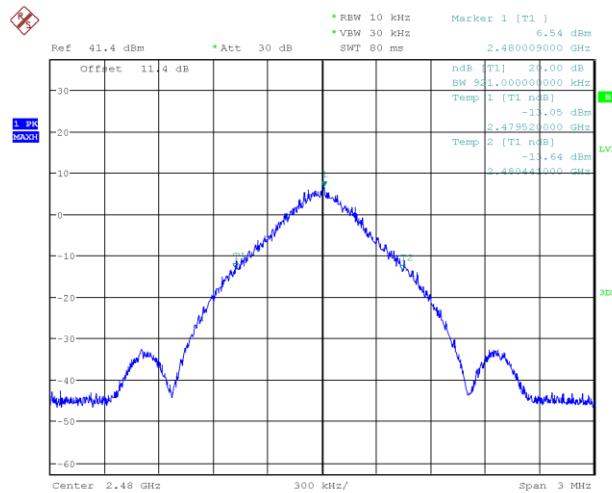


Date: 30.JUL.2019 15:00:49

Plot 6. DH1 2480MHz 20dB Bandwidth

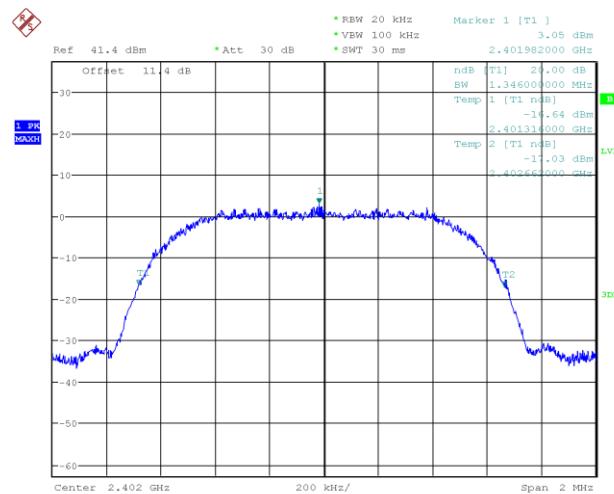


Date: 30.JUL.2019 15:06:06

Plot 7. 2DH1 2402MHz 20dB Bandwidth

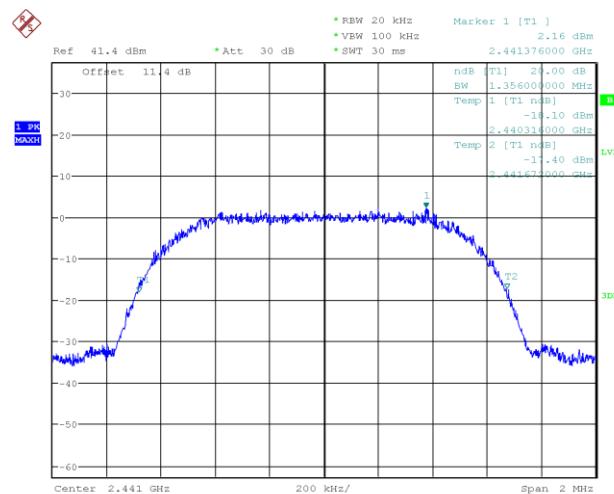


Date: 30.JUL.2019 15:12:50

Plot 8. 2DH1 2441MHz 20dB Bandwidth

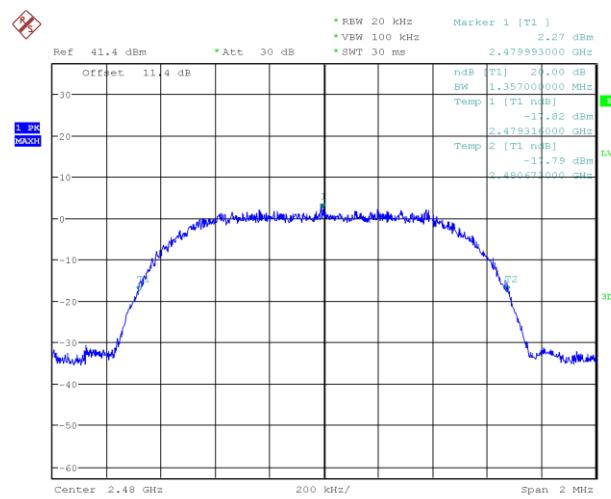


Date: 30.JUL.2019 15:16:30

Plot 9. 2DH1 2480MHz 20dB Bandwidth

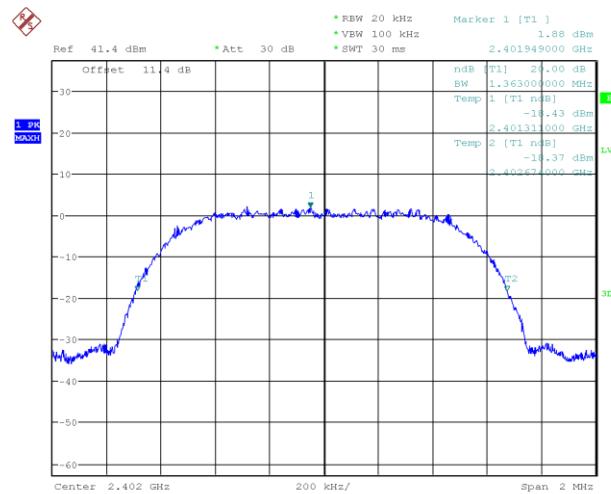


Date: 30.JUL.2019 15:09:47

Plot 10. 3DH1 2402MHz 20dB Bandwidth

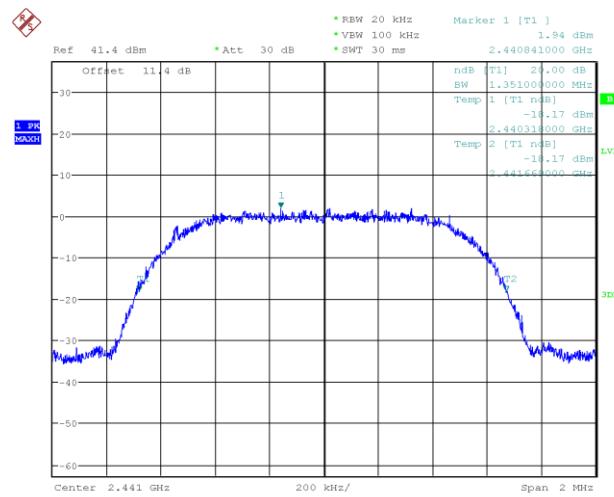

Plot 11. 3DH1 2441MHz 20dB Bandwidth

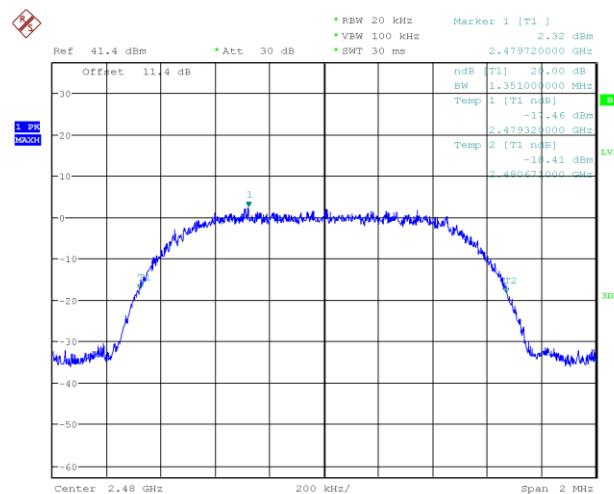

Plot 12. 3DH1 2480MHz 20dB Bandwidth

4.3 Hopping Frequency Requirements

The Frequency Hopping Requirements are applicable to the equipment using Frequency Hopping Spread Spectrum (FHSS) modulation.


Per CFR47 15.247 (a)(1)(iii), RSS 247 Sect.5.1(b) and 5.1(d), frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

4.3.1 Test Method

The conducted method were used to measure the carrier frequency separation according to ANSI C63.10:2013 Section 7.8.2, frequency hopping system in Sect. 7.8.3, and time of occupancy in Sect. 7.8.4. The measurement was performed with the EUT set to hop to channel frequencies. Results indicated below.

Test Setup:

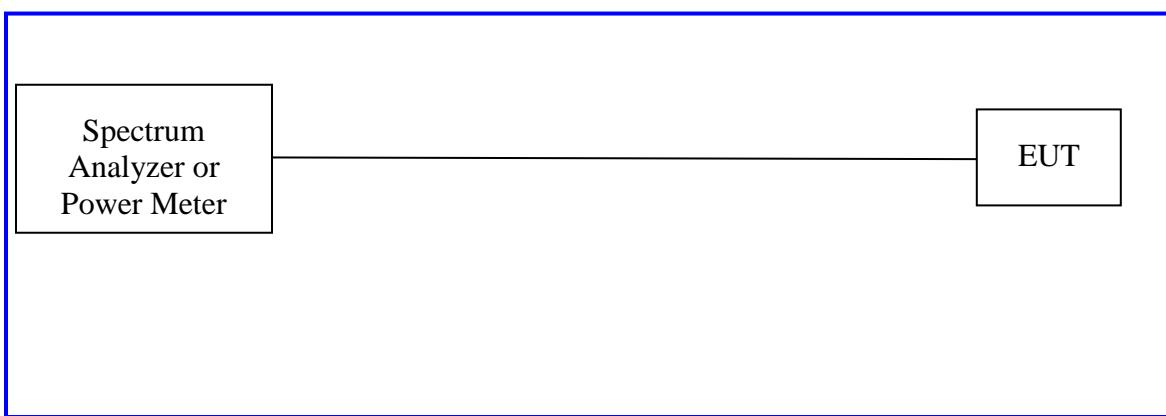

4.3.2 Results

As originally tested, the EUT was found to be compliant to the requirements of the test standard(s).

Table 4: Frequency Hopping Requirements

Average Occupancy Time					
Packet	Pulse Width (ms)	# of Pulses (3.16s)	Ave. Time (ms)	Limit (ms)	Result
DH1	0.3845897	32	123.068704	<400	-276.931296
DH3	1.633846	13	212.39998	<400	-187.60002
DH5	2.884615	10	288.4615	<400	-111.5385
2-DH1	0.388435897	31	120.4151281	<400	-279.584872
2-DH3	1.663423	16	266.14768	<400	-133.85232
2-DH5	2.887949	10	288.7949	<400	-111.2051
3-DH1	0.388025641	32	124.1682051	<400	-275.831795
3-DH3	1.635962	13	212.67506	<400	-187.32494
3-DH5	2.890962	10	289.0962	<400	-110.9038

Note: The dwell time in each channel must be less than 0.4 seconds. The total time for 79 hopping channels is 31.6 seconds. To determine the average dwell time, the frequency 2441MHz was sample in 3.16 second, an 1/10th of the total 79 hopping channels dwell time.

Minimum Channel Separation			
Package	Hopping Separation (kHz)	Two-Third of 20dB Bandwidth Limit (kHz)	Result
DH1	994.5	>616.00	Pass
DH3	1023	>631.00	Pass
DH5	1002	>643.00	Pass
2-DH1	991.5	>904.00	Pass
2-DH3	999	>889.33	Pass
2-DH5	1032	>908.67	Pass
3-DH1	1009.5	>900.67	Pass

3-DH3	1012.5	>896.67	Pass
3-DH5	960	>898.67	Pass


Note 1: The EUT was hopping randomly all 79 operating channels. The channel separation was measured at the middle channel, 2441 MHz. Two-Third of the highest 20dB bandwidth was used.

Note 2: For 20 dB Occupied Bandwidth plot, refer to Section 5.2 of this test report.

Minimum Number of Channels


Range (2402MHz -2480MHz)	Min. Channel Limit	Result
79	15	Pass

Note: Both BDR and EDR used the same number of hopping channels. All packet types were tested

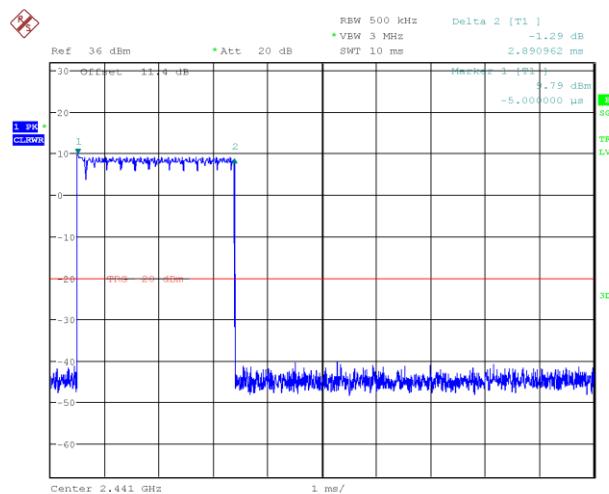

Date: 31.JUL.2019 10:00:40


Plot 13. Pulse Width for 3-DH5

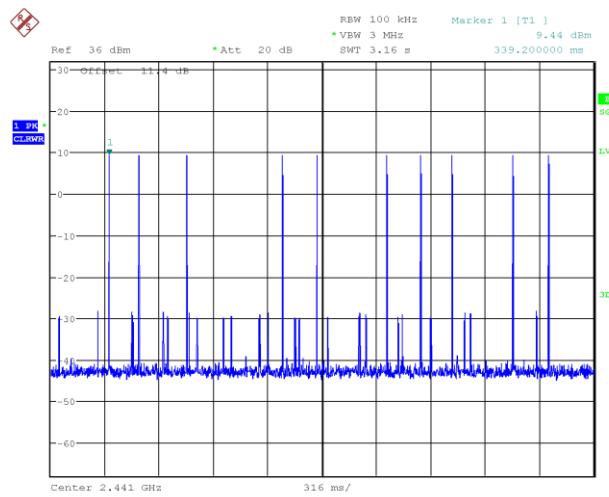

Date: 31.JUL.2019 10:01:33


Plot 14. Number of Pulses in 3.16 sec for 3-DH5

Note: There are 10 pulses in 3.16 seconds.

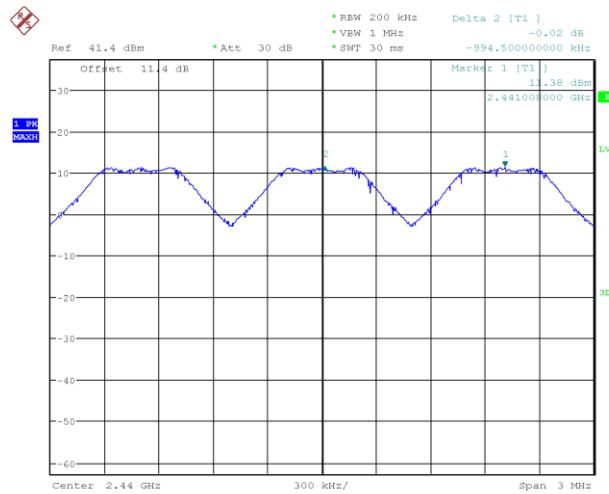


Date: 31.JUL.2019 08:33:44

Plot 15. Hopping Separation for DH1

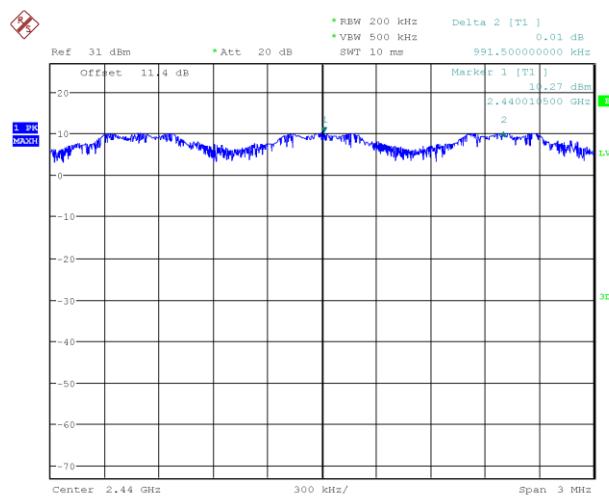


Date: 31.JUL.2019 08:50:34

Plot 16. Hopping Separation for 2-DH1

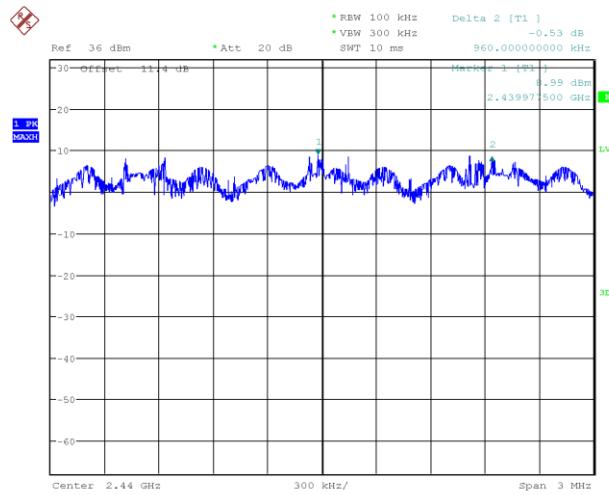

Date: 31.JUL.2019 09:32:39

Plot 17. Hopping Separation for 3-DH5

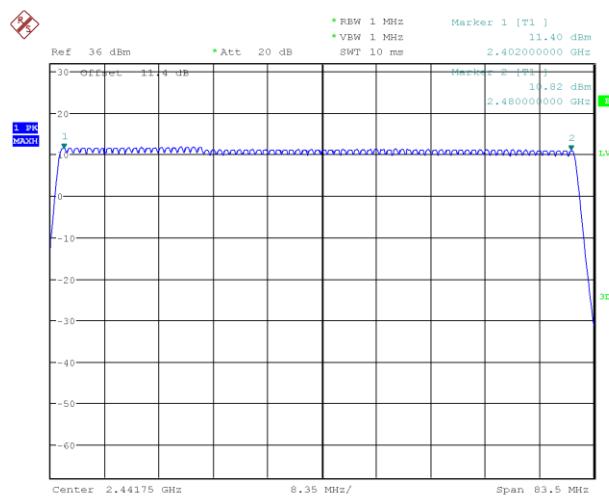

Date: 31.JUL.2019 10:22:28

Plot 18. Number of Operating Channels (79)


4.4 Out of Band Emissions: Non-Restricted Bands

Any frequency outside the band of 2400 MHz to 2483.5 MHz, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under the regulation, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. ; CFR 47 Part 15.247(d) and RSS 247 Sect. 5.5.

4.4.1 Test Method

Conducted measurements per ANSI C63.10-2013 Sections 6.10, 11.11, 14.3.3 were used to measure the undesirable emission requirement in non-restricted bands. The measurement was performed with modulation. The measurement was conducted from 30MHz to 26.5GHz on 3 channels in each mode on the EUT. Reference level was established on the channel with highest measured PSD (2480MHz/1Mbps and 2402MHz/2Mbps) as stated in ANSI C63.10-2013 Section 11.11.2. Band edge tests were conducted on the low and high channel of each mode. The worst case measurement of each mode is recorded in this report.

Test setup:

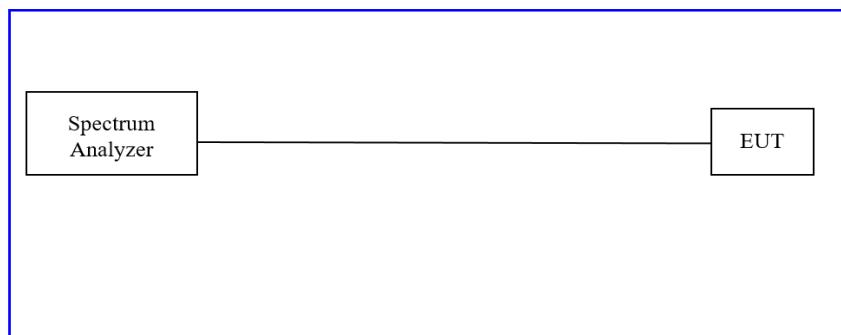

4.4.2 Results


As originally tested, the EUT was found to be compliant to the requirements of the test standard(s).

Table 5: Band Edge Requirements – Test Results


Non-Restricted Frequency Band Edge Emissions						
Package/ Power	Band Edge	Operating Freq. (MHz)	Measured (dBc)	Limit (dBc)	Frequency (MHz)	Result
DH3	Low	2402	33.74	20	2387.046	Pass
	High	2480	34.24	20	2486.426	Pass
2DH3	Low	2402	34.77	20	2394.615	Pass
	High	2480	34.04	20	2488.506	Pass
3DH3	Low	2402	34.27	20	2398.640	Pass
	High	2480	34.20	20	2497.461	Pass

Note 1: The stated limits for 20 dBc are relative to each individual output per KDB 662911 Method.
 The worst case of each data rate is recorded.


Note 2: Worse case package was tested for each data rate

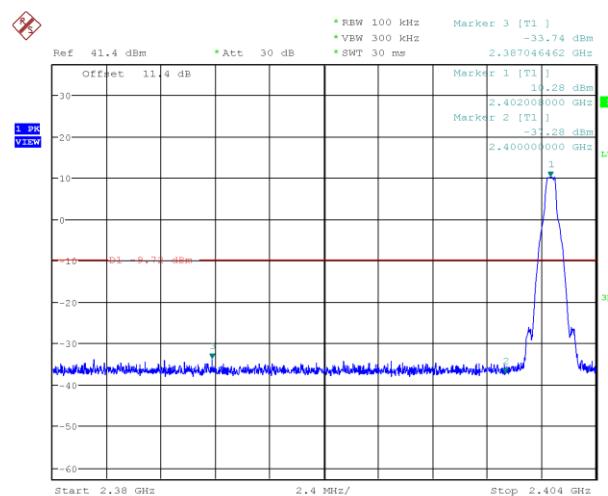


Plot 19. DH3 2402MHz Lower Band edge

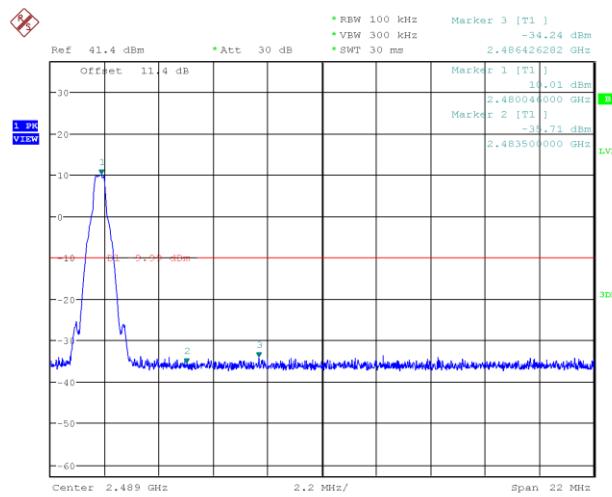

Plot 20. DH3 2480MHz Upper Band Edge

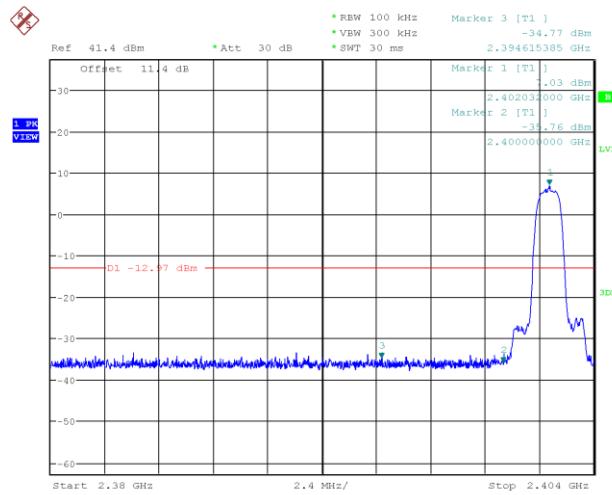


Plot 21. 2DH3 2402MHz Lower Band Edge

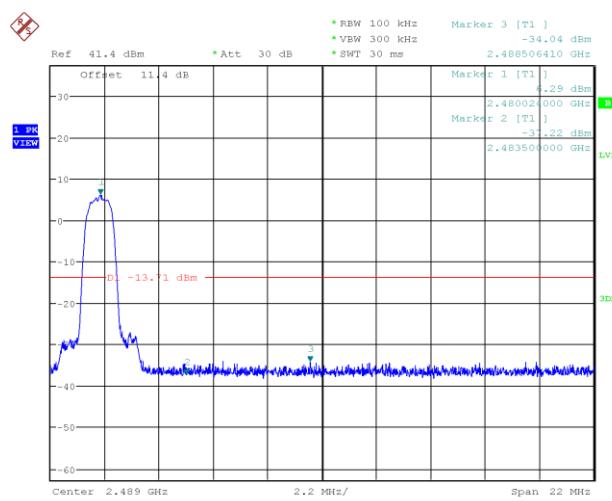


Date: 31.JUL.2019 08:08:16

Plot 22. 2DH3 2480MHz Upper Band Edge

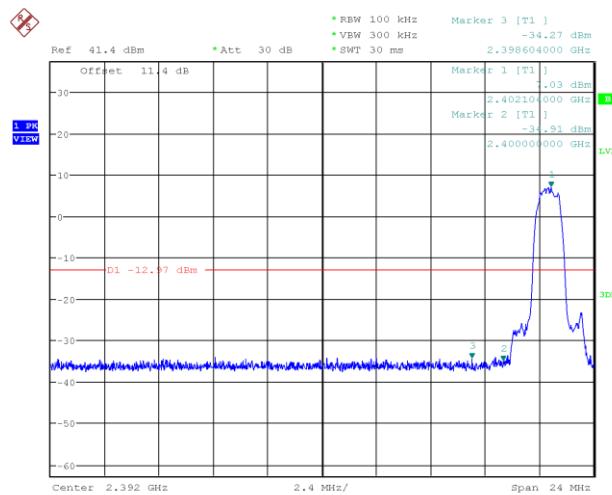


Date: 31.JUL.2019 08:02:58

Plot 23. 3DH3 2402MHz Lower band Edge

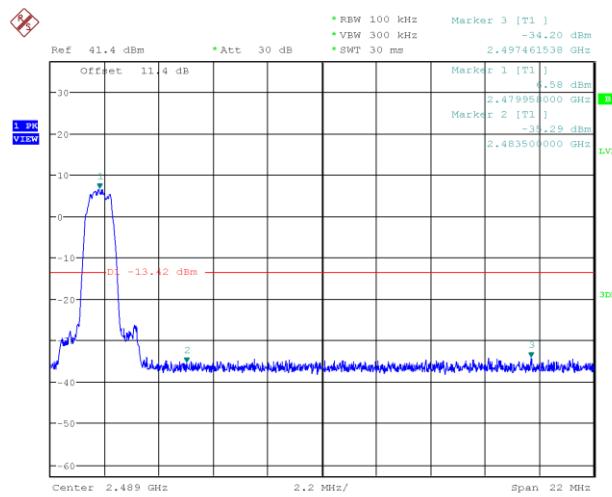


Date: 31.JUL.2019 08:10:02

Plot 24. 3DH3 2480MHz Upper Band Edge

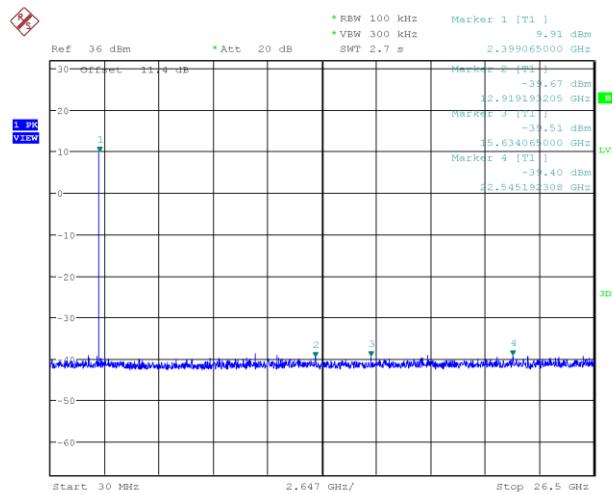


Date: 31.JUL.2019 10:46:47

Plot 25. DH3 2402MHz, 30MHz-26.5GHz Spurious

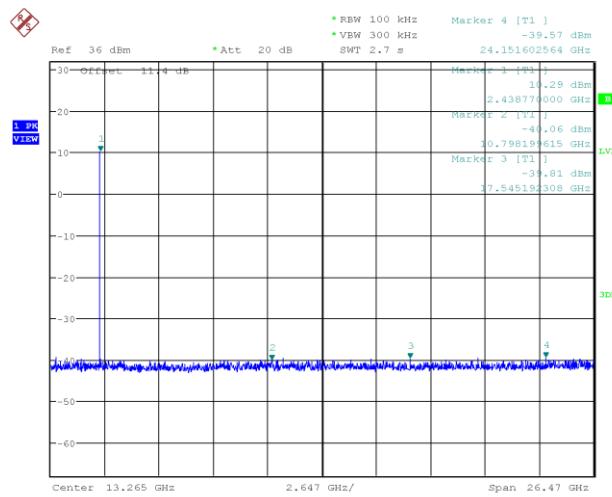


Date: 31.JUL.2019 10:56:57

Plot 26. DH3 2441MHz, 30MHz-26.5GHz Spurious

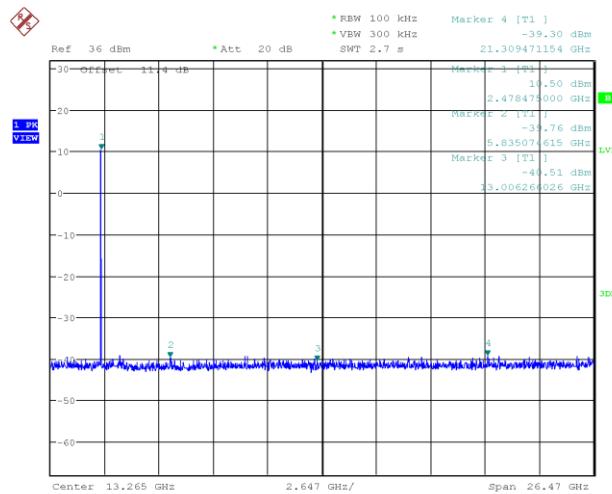


Date: 31.JUL.2019 11:03:51

Plot 27. DH3 2480MHz, 30MHz-26.5GHz Spurious

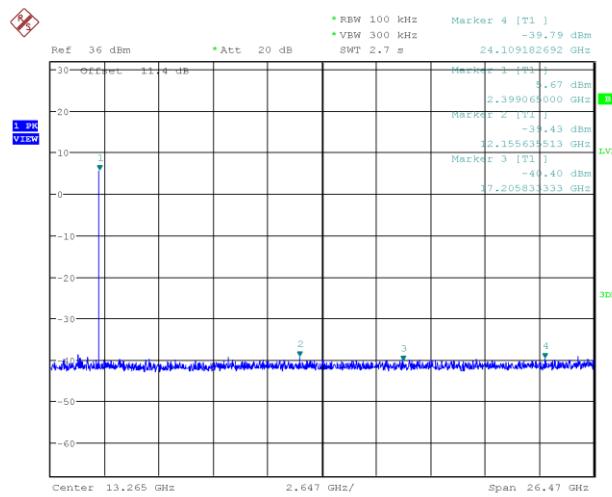


Date: 31.JUL.2019 10:51:01

Plot 28. 2DH3 2402MHz, 30MHz-26.5GHz Spurious

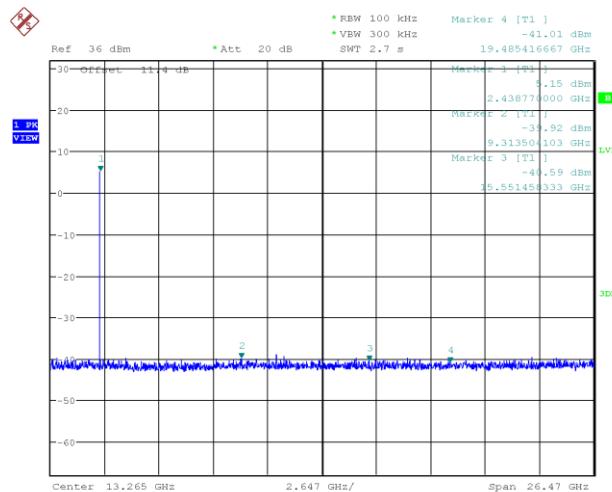


Date: 31.JUL.2019 10:58:59

Plot 29. 2DH3 2441MHz, 30MHz-26.5GHz Spurious

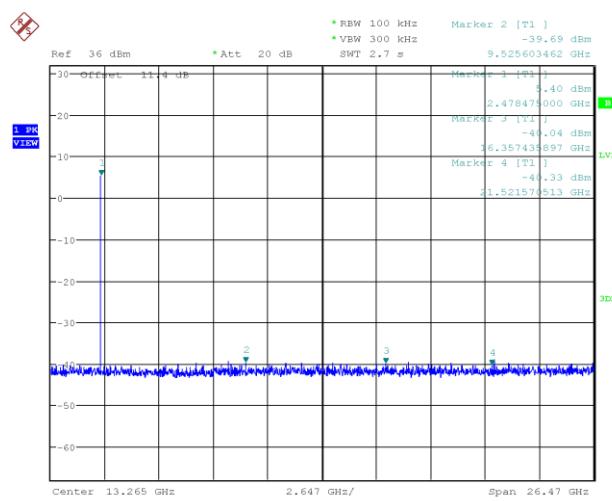


Date: 31.JUL.2019 11:05:47

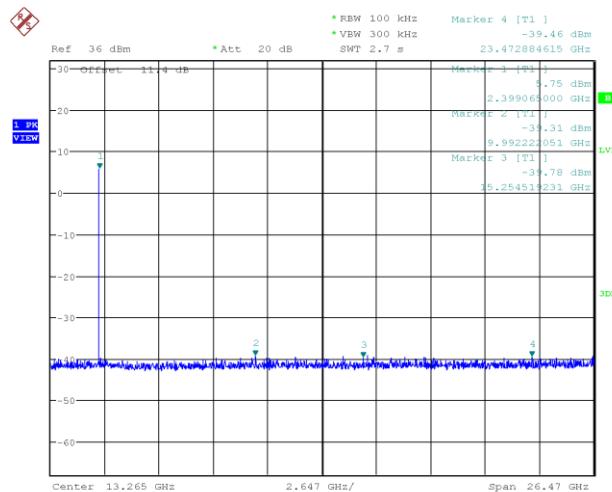Plot 30. 2DH3 2480MHz, 30MHz-26.5GHz Spurious


Date: 31.JUL.2019 10:54:04

Plot 31. 3DH3 2402MHz, 30MHz-26.5GHz Spurious

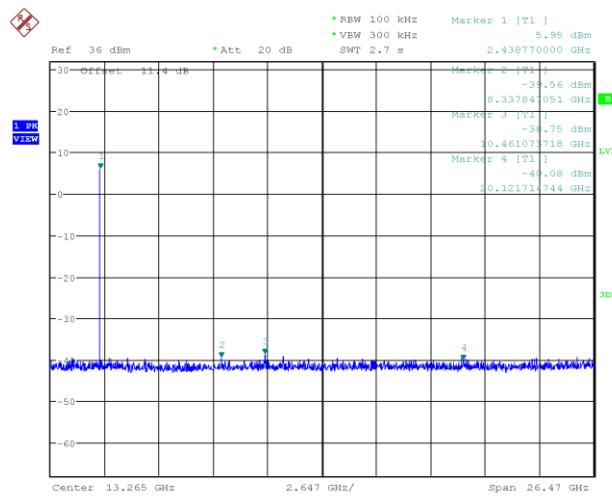

Date: 31.JUL.2019 11:00:57

Plot 32. 3DH3 2441MHz, 30MHz-26.5GHz Spurious

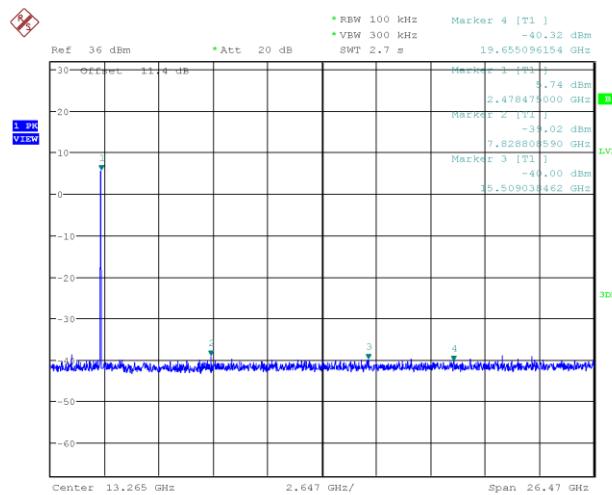

Date: 31.JUL.2019 11:07:25

Plot 33. 3DH3 2480MHz, 30MHz-26.5GHz Spurious


4.5 Out of Band Emissions: Restricted Band Edge

Transmitter spurious emissions are emissions outside the frequency range of the equipment when the equipment is in transmitting mode; per requirement of CFR47 15.205, 15.209, 15.247(d), RSS-247 Sect. 5.5, RSS-GEN Sect. 8.9 and 8.10.

4.5.1 Test Method

Radiated measurements per ANSI C63.10-2013 Section 6.10.5 were used to measure the undesirable emission requirement in restricted bands. Peak points were found and RMS Average was taken for each point found. The measurement was performed with modulation. This test was conducted on the upper and lower most channels in each worse case mode on the EUT. The worst case measurement of each channel is recorded in this report. All channels were tested at highest power settings.

Test Setup

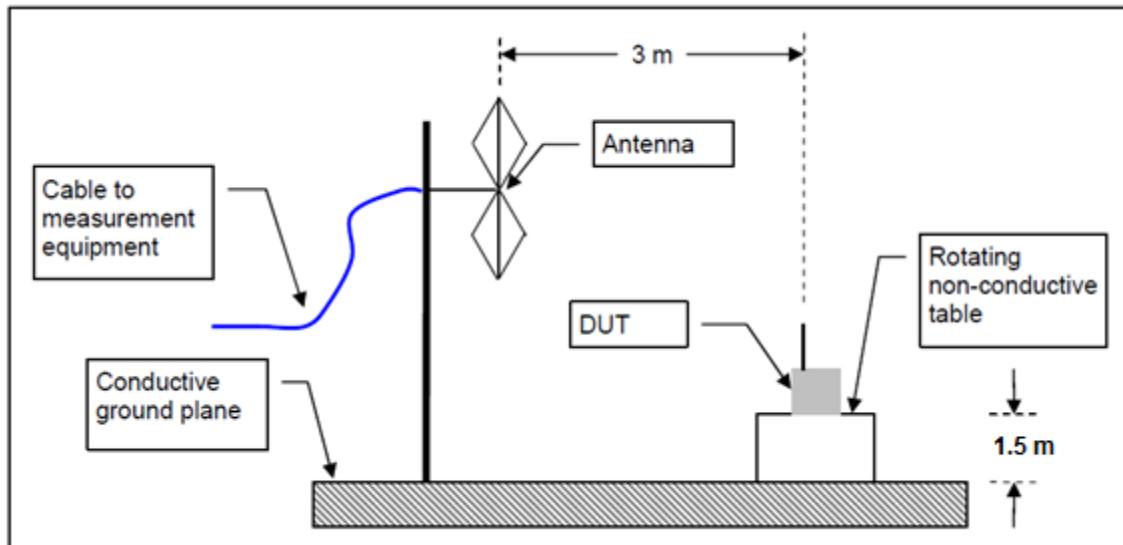


The DUT was stimulated by manufacturer provided test software that is not available to the end user.

4.5.2 Test Results


Table 6: Transmit Spurious Emission at Restricted Band Edge Requirements

Test Conditions: Radiated Measurement, Normal Temperature and Voltage							
Lower Restricted Band Edge							
Freq. (MHz)	Mode	Center Freq (MHz)	Detector (Average/ Peak)	Measured (dBuV/m)	Limit (dBuV/m)	Margin	Results
2338.436	3DH3	2402	Average	33.38	54	20.62	Pass
2370.638	3DH3	2402	Peak	46.03	74	27.97	Pass
2262.370	3DH3 Hopping	2402	Average	32.23	54	21.77	Pass
2379.691	3DH3 Hopping	2402	Peak	46.32	74	27.68	Pass
Upper Restricted Band Edge							
Freq. (MHz)	Mode	Center Freq (MHz)	Detector (Average/ Peak)	Measured (dBuV/m)	Limit (dBuV/m)	Margin	Results
2598.857	3DH3	2480	Average	34.17	54	19.83	Pass
2567.350	3DH3	2480	Peak	47.92	74	26.08	Pass
2740.035	3DH3 Hopping	2480	Average	34.29	54	19.71	Pass
2558.768	3DH3 Hopping	2480	Peak	47.5	74	26.5	Pass


Note: All restricted band edge tests were performed at full power. Worse case (3DH3) reported

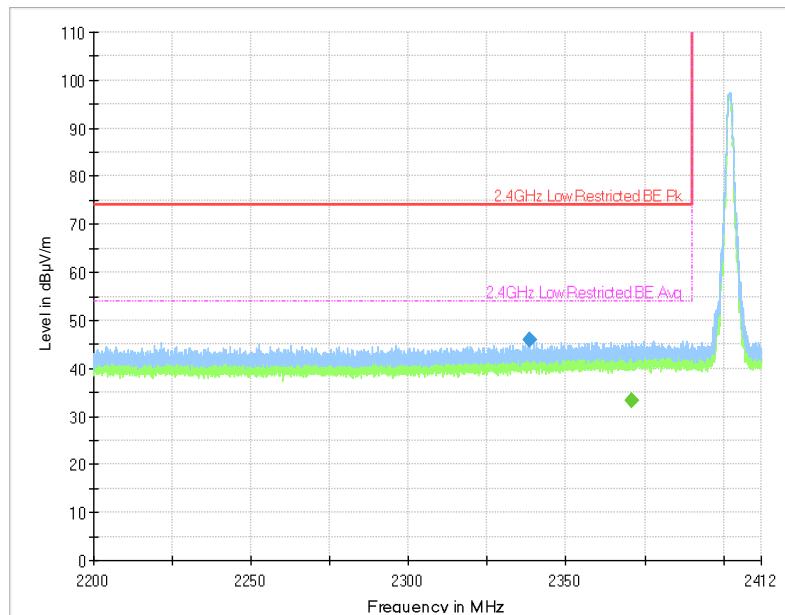


Plot 34. Lower Restricted Band Edge, 2402MHz, 3DH3

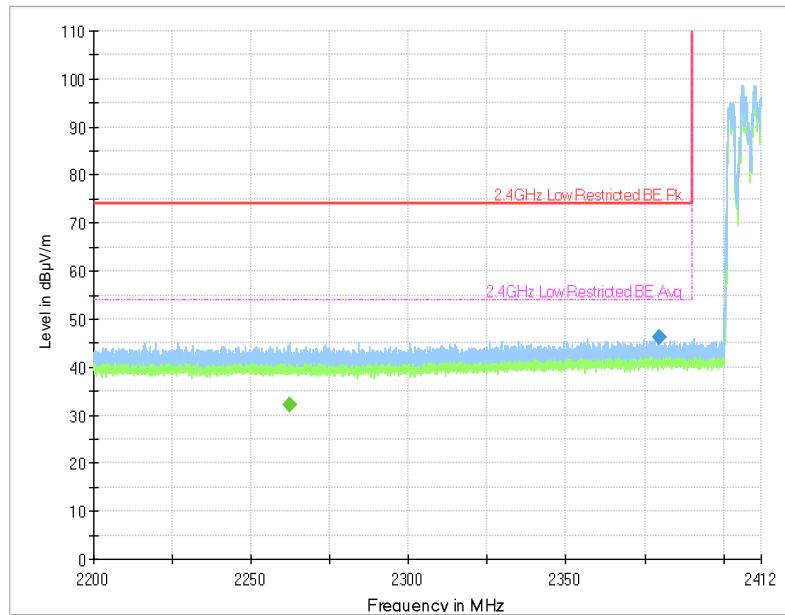

Plot 35. Lower Restricted Band Edge, 2402MHz, 3DH3, Hopping

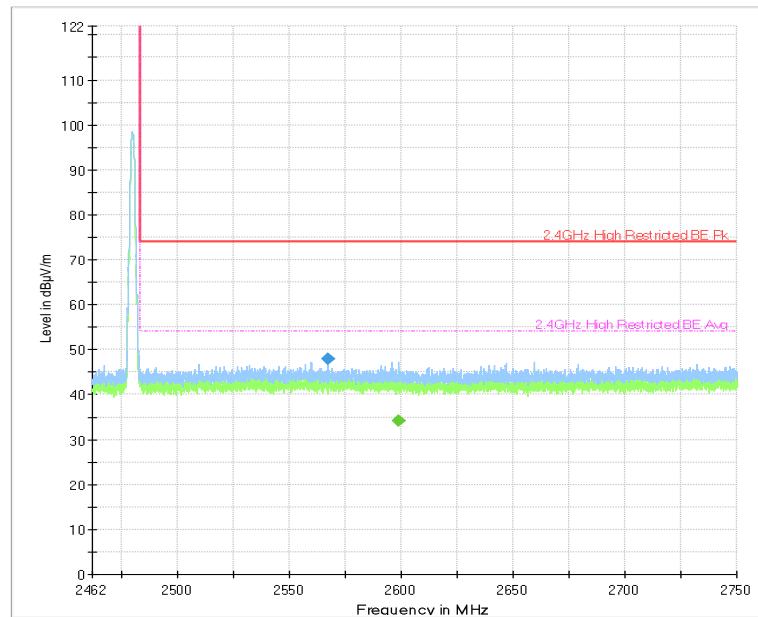

Plot 36. Upper Restricted Band Edge, 2480MHz, 3DH3

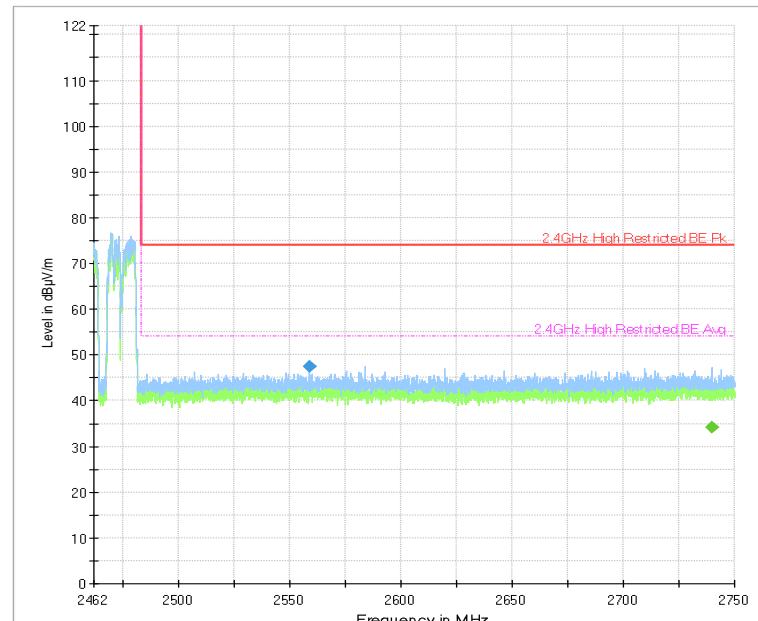

Plot 37. Upper Restricted Band Edge, 2480MHz, 3DH3, Hopping

4.6 Transmitter Spurious Emissions

Transmitter spurious emissions are emissions outside the frequency range of the equipment when the equipment is in transmitting mode; per requirement of CFR47 15.205, 15.209, 15.247(d), RSS GEN Sect. 8.9 and 8.10.

4.6.1 Test Methodology

4.6.1.1 Preliminary Test

A test program that controls instrumentation and data logging was used to automate the preliminary RF emission test procedure. The frequency range of interest was divided into sub-ranges to yield a frequency resolution of approximately 120 kHz and provide a reading at each frequency for no more than 12° of turntable rotation. For each frequency sub-range the turntable was rotated 360° while peak emission data was recorded and plotted over the frequency range of interest in horizontal and vertical antenna polarization's.

Preliminary emission profile testing was performed inside the anechoic chamber. The EUT was placed on a 1.0m x 1.5m non-conductive table 80cm (<1 GHz) and 150cm (>1 GHz) above the floor. The EUT was positioned as shown in the setup photographs. The receiving antenna was placed at a distance of 3m at a height of 1 – 4m. Measurement equipment was located outside of the chamber <1GHz frequency range.

4.6.1.2 Final Test

For each frequency measured, the peak emission was maximized by manipulating the receiving antenna from 1 to 4 meters above the ground plane and placing it at the position that produced the maximum signal strength reading. The turntable was then rotated through 360° while observing the peak signal and placing the EUT at the position that produced maximum radiation. The six highest emissions relative to the limit were measured unless such emissions were more than 20 dB below the limit. If less than six emissions are within 20 dB of the limit, than the noise level of the receiver is measured at frequencies where emissions are expected. Multiples of all oscillator and microprocessor frequencies were also checked.



Final testing was performed on an NSA compliant test site. The EUT was placed on a 1.0m x 1.5m non-conductive table 80cm (<1 GHz) and 150cm (>1 GHz) above the ground plane. The placement of EUT and cables were the same as for preliminary testing and is shown in the setup photographs.

The final scans performed on the highest power measured, for three operating channels: 2402 MHz, 2441 MHz, and 2480 MH. Worse case operating mode reported.

4.6.1.3 Deviations

None.

Test Setup:

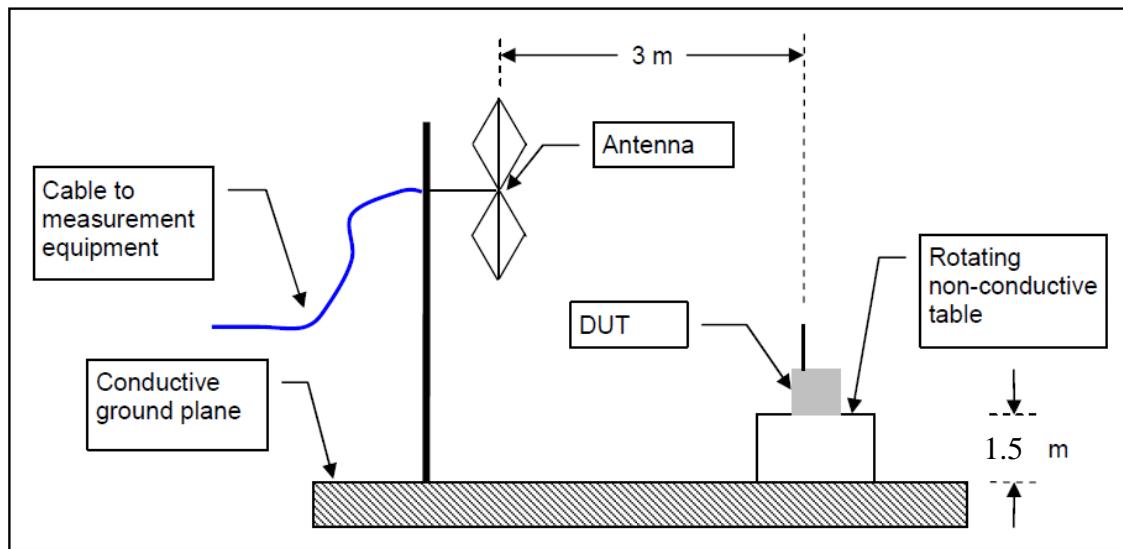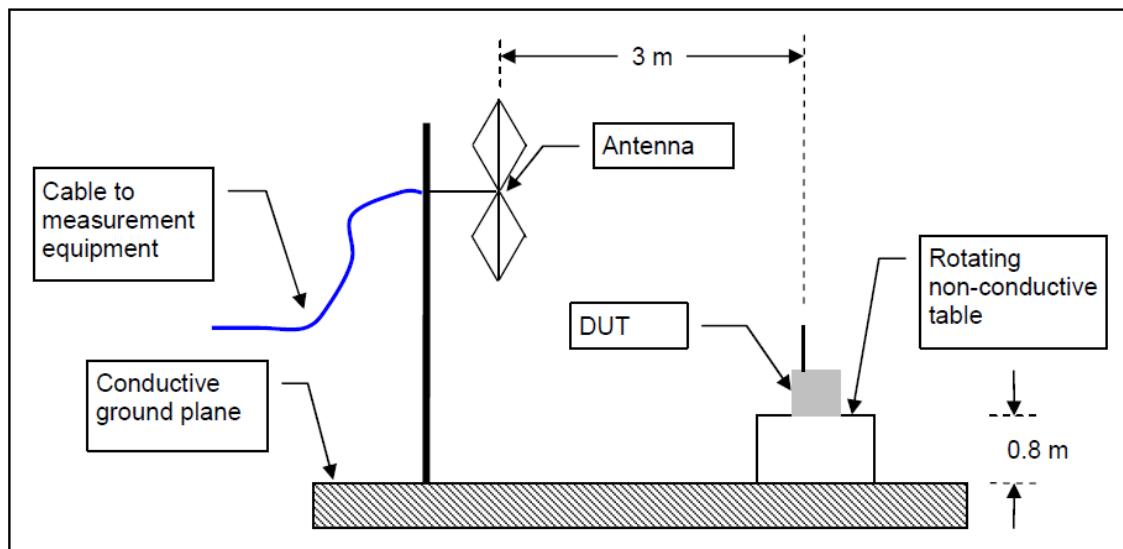

4.6.2 Transmitter Spurious Emission Limit

The spurious emissions of the transmitter shall not exceed the values in CFR47 Part 15.205, 15.209: 2018 and RSS Gen Sect. 8.9, 8.10: 2018.

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490.....	2400/F (kHz)	300
0.490-1.705.....	24000/F (kHz)	30
1.705-30.0.....	30	30
30-88.....	100 **	3
88-216.....	150 **	3
216-960.....	200 **	3
Above 960.....	500	3

All harmonics and spurious emission which are outside of the restricted band shall be 20 dB below the in-band emission.

Sample Calculation

The field strength is calculated by subtracting the Amplifier Gain and adding the Cable Loss and Antenna Correction Factor to the measured reading. The basic equation is as follows:

$$\text{Field Strength (dB}\mu\text{V/m)} = \text{FIM} - \text{AMP} + \text{CBL} + \text{ACF}$$

Where:

FIM = Field Intensity Meter (dB μ V)

AMP = Amplifier Gain (dB)

CBL = Cable Loss (dB)

ACF = Antenna Correction Factor (dB/m)


$$\mu\text{V/m} = 10^{\frac{\text{dB}\mu\text{V / m}}{20}}$$

4.6.3 Test Results

The final measurement data was taken under the worst case operating modes, configurations, and/or cable positions. It also reflects the results including any modifications and/or special accessories listed in Sections 1.4 and Test Plan.


As originally tested, the EUT was found to be compliant to the requirements of the test standard(s). Worse case modes are provided below

Frequency (MHz)	QuasiPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
30.387407	14.81	40.00	25.19	260.0	H	-53.0	-6.9
51.819560	3.59	40.00	36.41	178.0	H	99.0	-18.1
121.642920	10.30	43.51	33.22	336.0	H	-54.0	-10.8
268.204080	9.02	46.00	36.98	350.0	H	-56.0	-11.8
766.618320	16.98	46.00	29.02	178.0	V	133.0	-3.9
922.894120	18.58	46.00	27.42	151.0	H	35.0	-1.1

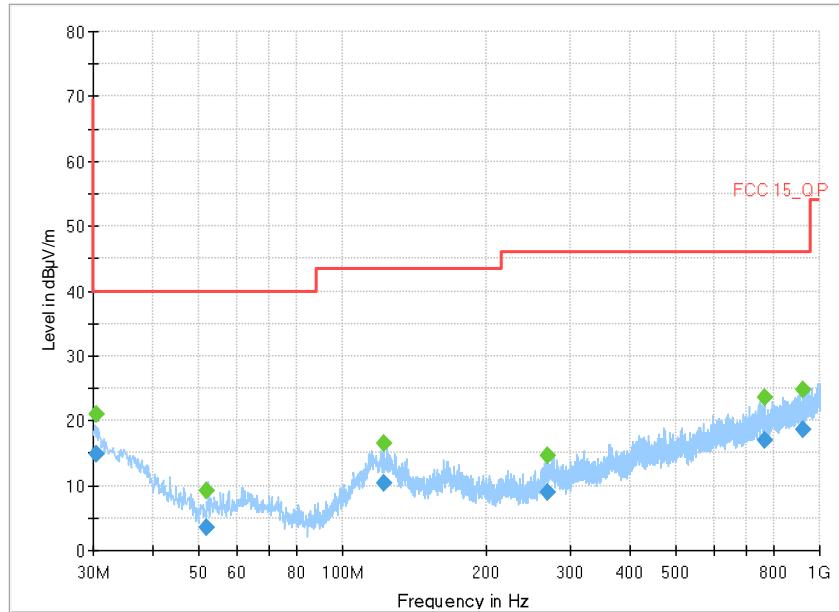


Plot 38. 30-1000MHz, 2402 MHz, 3DH3

Frequency (MHz)	QuasiPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
32.257560	12.77	40.00	27.23	336.0	H	98.0	-8.3
63.099000	5.08	40.00	34.92	204.0	V	127.0	-17.1
115.116920	10.84	43.51	32.68	337.0	V	-10.0	-11.1
268.794560	9.13	46.00	36.87	283.0	V	-97.0	-11.8
501.074200	11.43	46.00	34.57	207.0	H	-162.0	-7.8
925.776360	18.65	46.00	27.35	286.0	V	190.0	-1.0

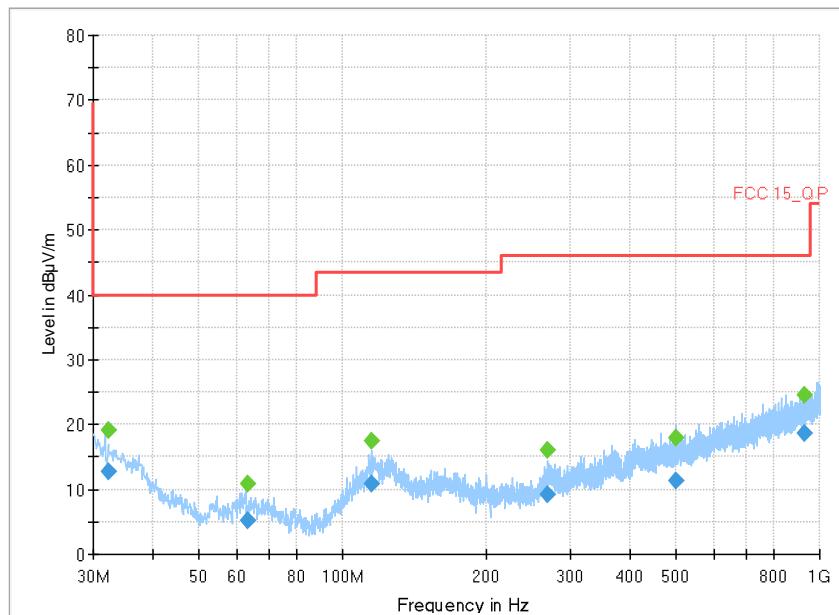


Plot 39. 30-1000MHz, 2441 MHz, 3DH3

Frequency (MHz)	QuasiPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
30.751670	14.35	40.00	25.65	205.0	V	170.0	-7.2
60.343600	4.81	40.00	35.19	150.0	H	-96.0	-17.1
88.086400	2.04	43.52	41.48	231.0	H	82.0	-19.9
116.276960	11.03	43.51	32.48	336.0	V	-100.0	-11.0
418.098080	12.40	46.00	33.60	150.0	H	25.0	-9.1
930.057680	18.56	46.00	27.44	178.0	H	-113.0	-0.7

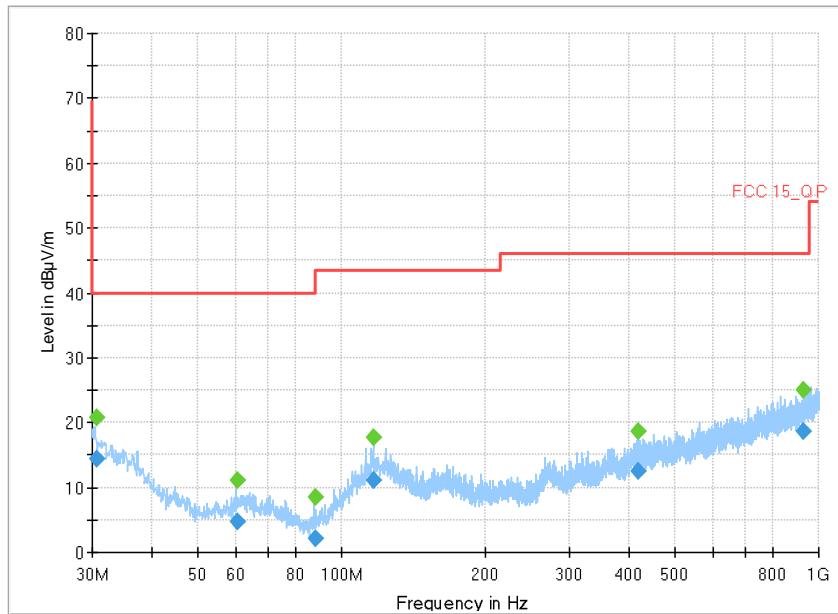


Plot 40. 30-1000MHz, 2480MHz, 3DH3

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5961.059000	43.45	---	74.00	30.55	128.0	V	40.0	-12.2
5961.059000	---	31.00	54.00	23.00	128.0	V	40.0	-12.2
7361.034000	---	30.45	54.00	23.55	170.0	V	154.0	-10.4
7361.034000	43.10	---	74.00	30.90	170.0	V	154.0	-10.4
9668.983500	46.59	---	74.00	27.41	100.0	H	10.0	-6.0
9668.983500	---	33.97	54.00	20.03	100.0	H	10.0	-6.0
10540.550000	46.60	---	74.00	27.40	200.0	H	1.0	-5.1
10540.550000	---	33.73	54.00	20.27	200.0	H	1.0	-5.1
14637.510000	50.50	---	74.00	23.50	200.0	H	180.0	1.7
14637.510000	---	37.26	54.00	16.74	200.0	H	180.0	1.7
17968.650000	---	40.05	54.00	13.95	250.0	V	-180.0	5.6
17968.650000	52.95	---	74.00	21.05	250.0	V	-180.0	5.6

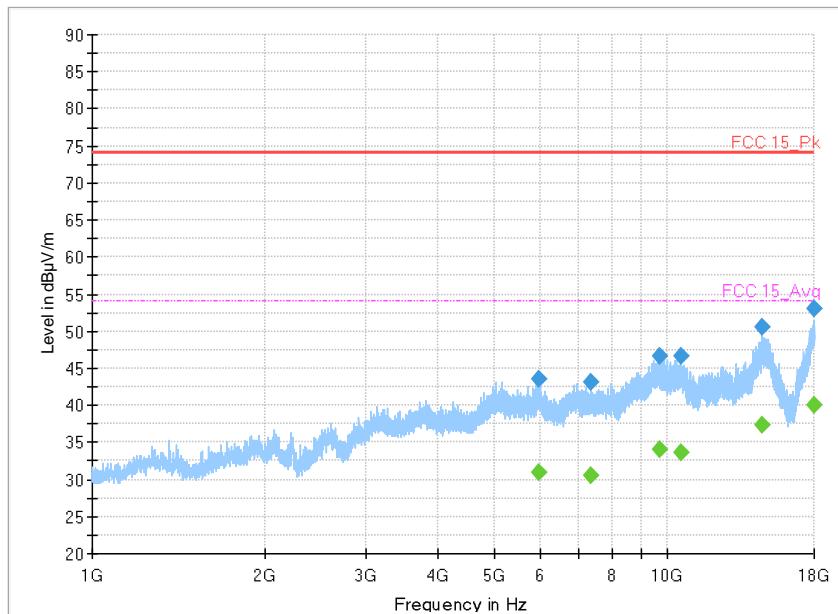


Plot 41. 1-18GHz, 2402MHz, 3DH3

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr.
5979.174000	44.01	---	74.00	29.99	250.0	V	-64.0	-12.2
5979.174000	---	31.21	54.00	22.79	250.0	V	-64.0	-12.2
6848.769000	43.47	---	74.00	30.53	194.0	V	-123.0	-11.6
6848.769000	---	30.79	54.00	23.21	194.0	V	-123.0	-11.6
9598.312500	---	33.69	54.00	20.31	100.0	H	-126.0	-6.2
9598.312500	46.79	---	74.00	27.21	100.0	H	-126.0	-6.2
10558.506000	---	33.71	54.00	20.29	180.0	H	-79.0	-5.1
10558.506000	46.88	---	74.00	27.12	180.0	H	-79.0	-5.1
14763.767000	50.76	---	74.00	23.24	250.0	V	-34.0	1.6
14763.767000	---	37.67	54.00	16.33	250.0	V	-34.0	1.6
17923.415500	52.60	---	74.00	21.41	250.0	V	-60.0	5.4
17923.415500	---	39.53	54.00	14.47	250.0	V	-60.0	5.4

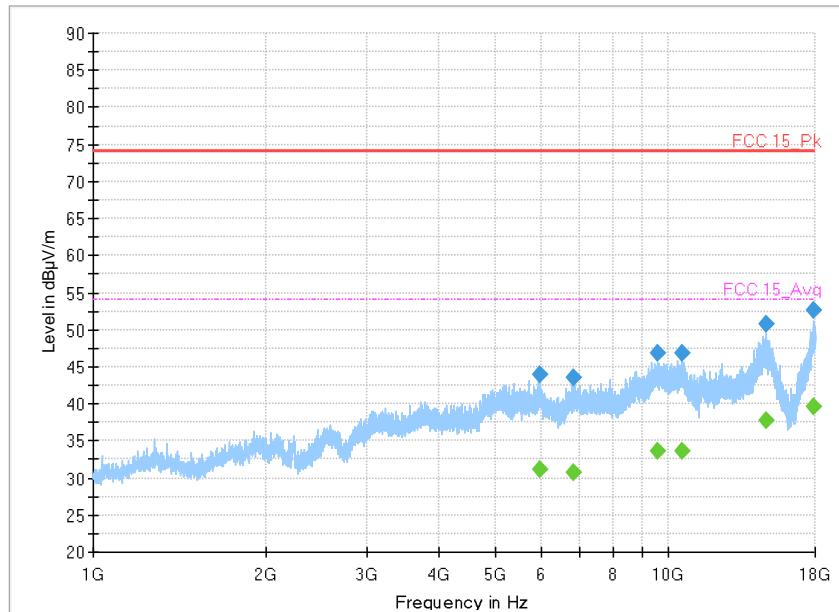


Plot 42. 1-18GHz, 2441MHz, 3DH3

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5413.889500	---	30.14	54.00	23.86	178.0	V	-96.0	-12.6
5413.889500	43.40	---	74.00	30.60	178.0	V	-96.0	-12.6
6752.962500	43.75	---	74.00	30.25	181.0	V	-123.0	-11.5
6752.962500	---	30.42	54.00	23.58	181.0	V	-123.0	-11.5
9450.130500	46.60	---	74.00	27.40	250.0	V	134.0	-6.5
9450.130500	---	34.07	54.00	19.93	250.0	V	134.0	-6.5
10550.600500	---	33.46	54.00	20.54	250.0	V	24.0	-5.1
10550.600500	46.30	---	74.00	27.70	250.0	V	24.0	-5.1
14695.474000	50.34	---	74.00	23.66	250.0	V	-157.0	1.8
14695.474000	---	37.64	54.00	16.36	250.0	V	-157.0	1.8
17958.808500	52.78	---	74.00	21.22	250.0	V	-180.0	5.6
17958.808500	---	39.85	54.00	14.15	250.0	V	-180.0	5.6

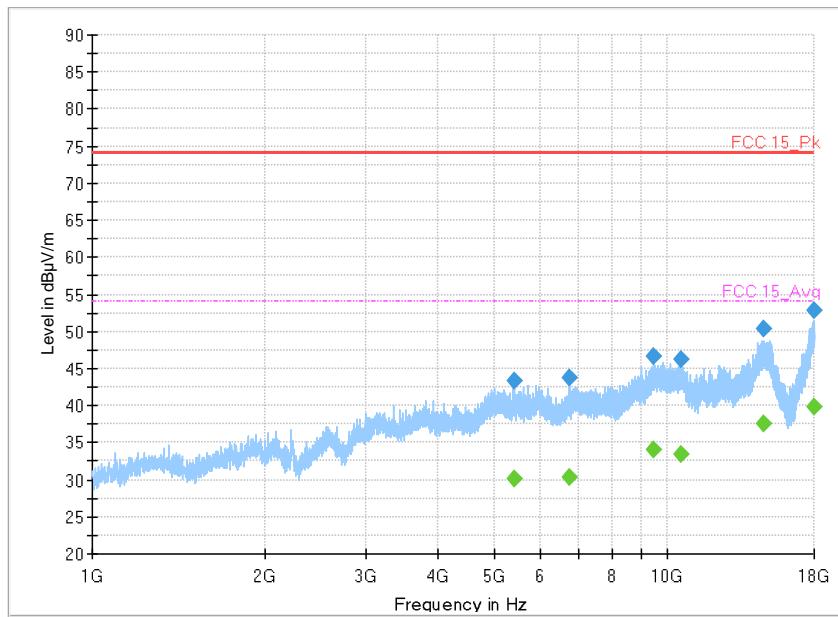


Plot 43. 1-18GHz, 2480MHz, 3DH3

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
24860.301250	48.95	---	74.00	25.05	125.0	V	-5.0	12.1
24860.301250	---	35.95	54.00	18.05	125.0	V	-5.0	12.1
26115.657500	50.48	---	74.00	23.52	126.0	V	-33.0	13.5
26115.657500	---	37.34	54.00	16.66	126.0	V	-33.0	13.5

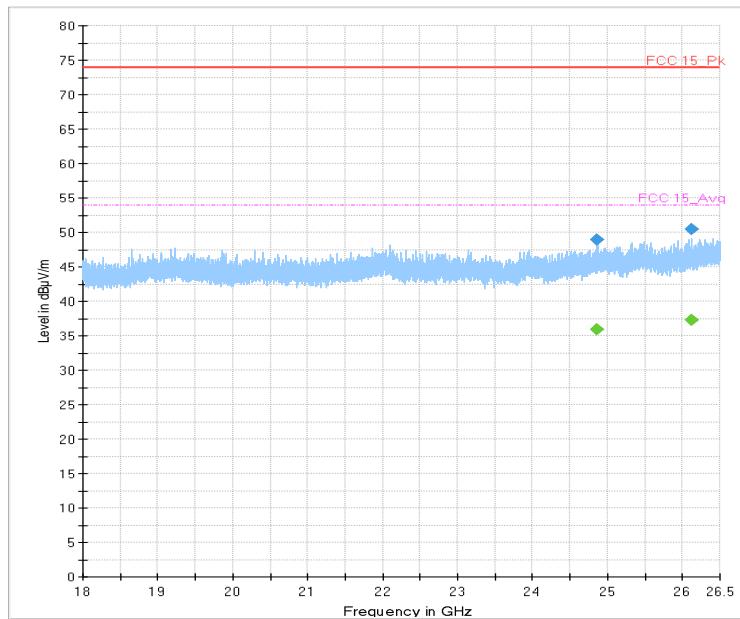


Plot 44. 18-26GHz, 2402MHz, 3DH3

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
24892.815625	---	36.07	54.00	17.93	126.0	V	-104.0	12.1
24892.815625	49.46	---	74.00	24.54	126.0	V	-104.0	12.1
26278.040000	---	37.48	54.00	16.52	126.0	V	180.0	13.7
26278.040000	50.48	---	74.00	23.52	126.0	V	180.0	13.7

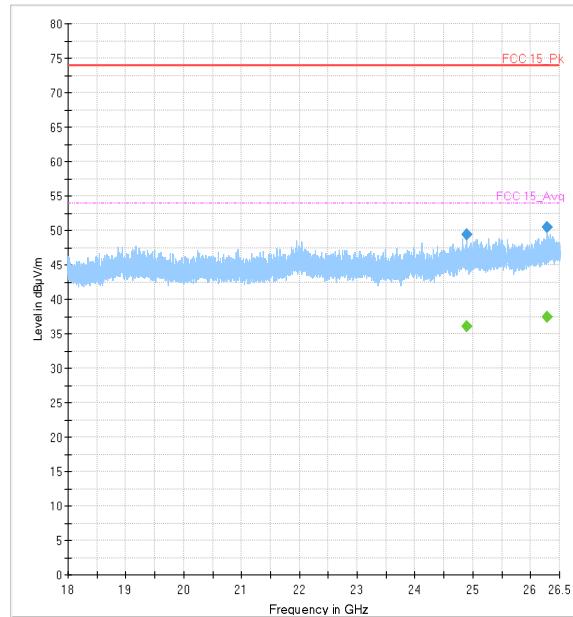

Plot 45. 18-26GHz, 2441MHz, 3DH3

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
25661.468750	49.25	---	74.00	24.75	155.0	V	-144.0	13.0
25661.468750	---	36.20	54.00	17.80	155.0	V	-144.0	13.0
26248.926875	50.23	---	74.00	23.77	125.0	H	-42.0	13.6
26248.926875	---	37.39	54.00	16.61	125.0	H	-42.0	13.6

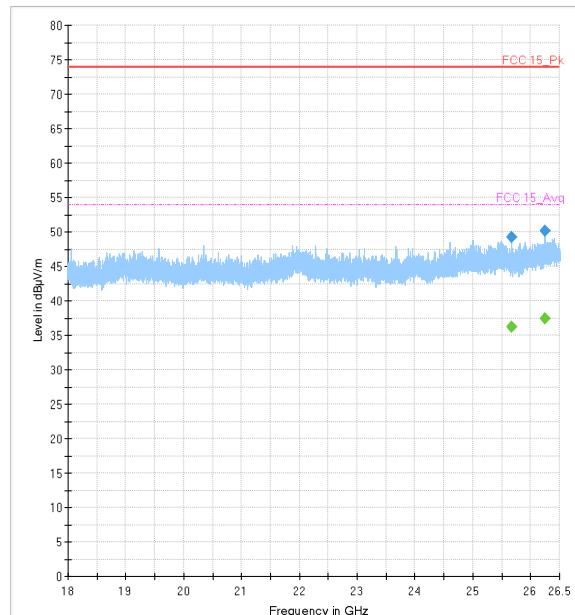

Plot 46. 18-26GHz, 2480MHz, 3DH3

4.7 AC Conducted Emissions

Testing was performed in accordance with ANSI C63.4: 2014. These test methods are listed under the laboratory's A2LA Scope of Accreditation.

This test measures the levels emanating from the EUT's AC input port, thus evaluating the potential for the EUT to cause radio frequency interference to other electronic devices.

The AC conducted emissions of equipment under test shall not exceed the values in CFR47 Part 15.207: 2018 and RSS- GEN Sect. 8.8: 2018.

4.7.1 Test Methodology

A test program that controls instrumentation and data logging was used to automate the AC Power Line Conducted emission test procedure. The frequency range of interest was divided into sub-ranges such as to yield a frequency resolution of 9 kHz. Each phase and neutral of the AC power line were measured with respect to ground. Measurements were performed using a set of 50 μ H / 50 Ω LISNs.

Testing is performed in Lab 2. The setup photographs clearly identify which site was used. The vertical ground plane used in the semi-anechoic chamber is a 2m x 2m solid aluminum frame and panel, and it is bonded to the horizontal ground plane.

In the case of tabletop equipment, the EUT is placed on a 1.0m x 1.5m non-conductive table 80cm above the ground plane and 40cm from a vertical ground reference plane. The rear of the EUT was positioned flush with the backside of the table and directly over the LISNs. The power and I/O cables were routed over the edge of the table and bundled approximately 40cm from the ground plane. Support equipment was powered from a separate LISN.

4.7.1.1 Deviations

There were no deviations from this test methodology.

4.7.2 Test Results


As originally tested, the EUT was found to be compliant to the requirements of the test standard(s).

Table 7: AC Conducted Emissions – Test Results

Test Conditions: Conducted Measurement at Normal Conditions only		
AC Power: 120 Vac/60 Hz	Configuration: Tabletop	
Configuration	Frequency Range	Test Result
Line 1 (Hot)	0.15 to 30 MHz	Pass
Line 2 (Neutral)	0.15 to 30 MHz	Pass


Live Line

Frequency (MHz)	QuasiPeak (dB μ V)	Average (dB μ V)	Limit (dB μ V)	Margin (dB)	Line	Corr. (dB)
0.181213	---	23.44	54.3	30.85	L1	10
0.181213	43.55	---	64.32	20.77	L1	10
0.248447	---	20.68	51.57	30.89	L1	9.8
0.248447	38.69	---	61.61	22.92	L1	9.8
0.314479	---	16.23	49.62	33.39	L1	9.7
0.314479	33.92	---	59.66	25.74	L1	9.7
0.462475	---	13.23	46.59	33.36	L1	9.7
0.462475	26.26	---	56.6	30.34	L1	9.7
8.871193	---	-1.4	50	51.4	L1	9.8
8.871193	5.55	---	60	54.45	L1	9.8
29.872596	---	-4.8	50	54.8	L1	9.8
29.872596	2.51	---	60	57.49	L1	9.8

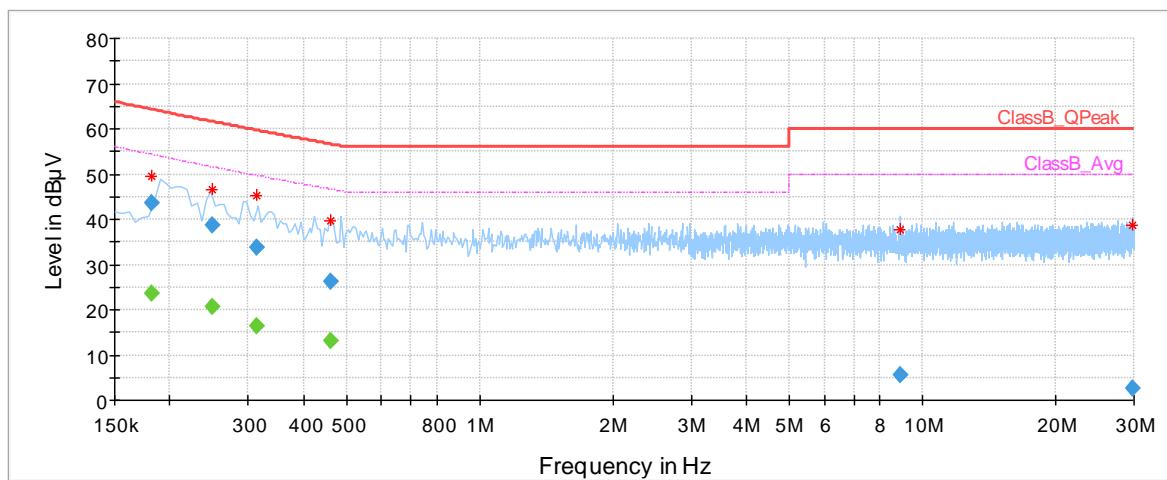

Neutral Line

Frequency (MHz)	QuasiPeak (dB μ V)	Average (dB μ V)	Limit (dB μ V)	Margin (dB)	Line	Corr. (dB)
0.217385	---	20.53	52.71	32.18	N	9.8
0.217385	40.25	---	62.74	22.49	N	9.8
0.436624	---	7.35	47.03	39.68	N	9.6
0.436624	25.58	---	57.05	31.46	N	9.6
0.873096	---	-0.37	46	46.37	N	9.7
0.873096	12.47	---	56	43.53	N	9.7
4.135321	---	-4.46	46	50.46	N	9.7
4.135321	3.4	---	56	52.6	N	9.7
7.821092	---	2.91	50	47.09	N	9.7
7.821092	11.07	---	60	48.93	N	9.7
19.776202	---	-2.51	50	52.51	N	10
19.776202	4.83	---	60	55.17	N	10

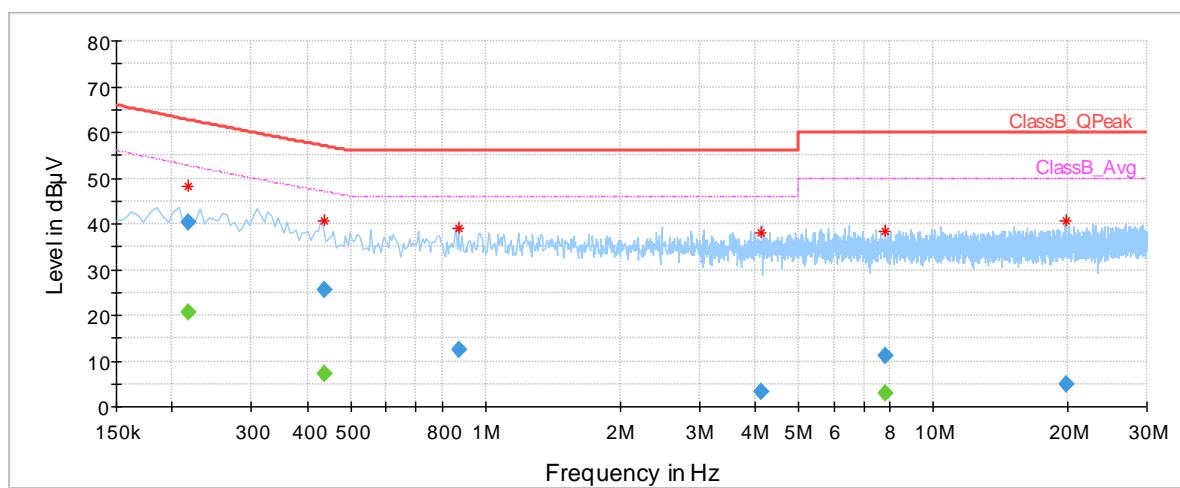

5 Test Equipment Use List

5.1 Equipment List

Equipment	Manufacturer	Model #	Serial/Inst #	Last Cal mm/dd/yyyy	Next Cal mm/dd/yyyy
Spectrum Analyzer	Rohde & Schwarz	FSU26.5	200050	11/20/2018	11/20/2019
EMI Receiver	Rohde & Schwarz	ESW44	101663-dv	07/18/2019	07/18/2020
L.I.S.N.	Com-Power	LI-215	192000	01/16/2019	01/16/2020
Transient Limiter	Com-Power	LIT-930	531582	01/16/2019	01/16/2020
Preamplifier, 9 kHz – 1 GHz	Sonoma	310N	213221	01/16/2019	01/16/2020
Bilog Antenna	Sunol Sciences	JB3	A060502	05/27/2018	05/27/2020
Amplifier	Miteq	TTA1800-30-HG	1842452	01/15/2019	01/15/2020
Horn Antenna	Sunol Sciences	DRH-118	A040806	03/05/2019	03/05/2020
Amplifier	HP	8449B	3008A01013	01/15/2019	01/15/2020
Horn Antenna		RA42-K-F-B-C	020131-004	03/04/2019	03/04/2021
Amplifier	Rohde & Schwarz	TS-PR26	3545.7014.03	03/04/2019	03/04/2021
Amplifier	Sonoma	310N	185516	N/A (See Note)	
1.6 GHz Low Pass Filter	K&L Microwave	8L120-X1600-0/09135-0249	UA691-35	N/A (See Note)	
2.4GHZ Band Pass Filter	Microtronics	BRM50702	009	1/15/2019	1/15/2020
3.5 GHz High Pass Filter	Hewlett Packard	84300-80038	820004	N/A (See Note)	

Note: Equipment is characterized before use.

6 EMC Test Plan

6.1 *Introduction*

This section provides a description of the Equipment Under Test (EUT), configurations, operating conditions, and performance acceptance criteria. It is an overview of information provided by the manufacturer so that the test laboratory may perform the requested testing.

6.2 *Customer*

Table 8: Customer Information

Company Name	Conde Verdon Company LLC
Address	3200 Greenfield Rd., Ste 300
City, State, Zip	Dearborn, MI 48120,
Country	U.S.A.

Table 9: Technical Contact Information

Name	Pamela A. Jasinski
E-mail	CondeVerdonCompanyLLC@gmail.com
Phone	302-691-6440

6.3 Equipment Under Test (EUT)

Table 10: EUT Specifications

EUT Specifications	
AC Input	120 VAC, 60Hz
Environment	Indoor/Outdoor
Operating Temperature Range:	0 to 35 degrees C
Multiple Feeds:	<input type="checkbox"/> Yes and how many <input checked="" type="checkbox"/> No
Product Marketing Name (PMN)	Halo Band
Hardware Version Identification Number (HVIN)	DVT
Firmware Version Identification Number (FVIN)	N/A
Bluetooth Radio	
Operating Mode	BDR and EDR
Transmitter Frequency Band	2402 MHz to 2480 MHz
Operating Bandwidth	1 MHz
Max. Power Output	9.69 dBm
Antenna Type	Chip antenna
Antenna Gain	-2.2 dBi
Modulation Type	GFSK, $\pi/4$ -DQPSK and 8DPSK
Data Rate	1 Mbps, 2Mbps, and 3Mbps
Note: 1. This report only documents the radio characteristics for 2402 - 2480 MHz bands.	

Table 11: Interface Specifications

Interface Type	Cabled with what type of cable?	Is the cable shielded?	Maximum potential length of the cable?	Metallic (M), Coax (C), Fiber (F), or Not Applicable?
USB (used for data communication)	USB	<input checked="" type="checkbox"/> No	<input checked="" type="checkbox"/> Metric: 3 m	<input checked="" type="checkbox"/> M
Note: These USB cables were use for test purposes only.				

Table 12: Supported Equipment

Equipment	Manufacturer	Model	Serial	Used for
Laptop	HP	Pavilion	N/A	Setup EUT operating channel & Conducted Emission Test
Note:				

Table 13: Description of Sample used for Testing

Device	Serial	RF Connection	CFR47 Part 15.247
Halo Band	N/A	Integrated Antenna	Radiated Emissions Conducted Emissions
		Direct via SMA Connection	Transmit Power, Occupied Bandwidth, Out of Band Emission, Hopping Requirement

Table 14: Description of Test Configuration used for Radiated Measurement.

Device	Antenna	Mode	Setup Photo (X-Axis)	Setup Photo (Y-Axis)	Setup Photo (Z-Axis)
Bluetooth Module	Folded Monopole	Transmit	EUT Upright	N/A	N/A
Note:					

6.4 Test Specifications

Testing requirements

Table 15: Test Specifications

Emissions and Immunity	
Standard	Requirement
CFR 47 Part 15.247: 2019	All
RSS-247 Issue 2, 2017	All

END OF REPORT