

# FCC TEST REPORT

**Test report  
On Behalf of  
Dragon Hunter LLC  
For  
Wifi Camera  
Model No.: 501**

**FCC ID: 2APAS-501**

**Prepared for :** Dragon Hunter LLC  
1521 Northern Pacific Center, Brainerd, MN 56401, United States

**Prepared By :** Shenzhen United Testing Technology Co., Ltd.  
2F, Annex Bldg, Jiahuangyuan Tech Park, #365 Baotian 1 Rd, Tiegang  
Community, Xixiang Str, Bao'an District, Shenzhen, China

**Date of Test:** Mar. 14, 2018 ~ Mar. 22, 2018

**Date of Report:** Mar. 22, 2018

**Report Number:** UNIA2018030101-E



### TEST RESULT CERTIFICATION

**Applicant's name** ..... : Dragon Hunter LLC

Address ..... : 1521 Northern Pacific Center, Brainerd, MN 56401, United States

**Manufacture's Name**..... : Dragon Hunter LLC

Address ..... : 1521 Northern Pacific Center, Brainerd, MN 56401, United States

**Product description**

Trade Mark: Whitetail' R

Product name ..... : Wifi Camera

Model and/or type reference : 501

**Standards** ..... : FCC Rules and Regulations Part 15 Subpart C Section 15.247  
ANSI C63.10: 2013

This publication may be reproduced in whole or in part for non-commercial purposes as long as the **Shenzhen United Testing Technology Co., Ltd.** is acknowledged as copyright owner and source of the material. **Shenzhen United Testing Technology Co., Ltd.** takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

**Date of Test** .....

Date (s) of performance of tests .....: Mar. 14, 2018 ~ Mar. 22, 2018

Date of Issue.....: Mar. 22, 2018

Test Result.....: **Pass**

Prepared by:

Kahn yang/Editor

Reviewer:

Sherwin Qian/Supervisor

Approved & Authorized Signer:

Liuze/Manager

<b>Table of Contents</b>	<b>Page</b>
1 . TEST SUMMARY	5
2 . GENERAL INFORMATION	6
GENERAL DESCRIPTION OF EUT	6
Operation of EUT during testing	7
DESCRIPTION OF TEST SETUP	7
MEASUREMENT INSTRUMENTS LIST	8
3 . CONDUCTED EMISSIONS TEST	9
Conducted Power Line Emission Limit	9
Test Setup	9
Test Procedure	9
Test Result	9
4 RADIATED EMISSION TEST	12
Radiation Limit	12
Test Setup	12
Test Procedure	13
Test Result	13
5 BAND EDGE	28
Limits	28
Test Procedure	28
Test Result	28
6 OCCUPIED BANDWIDTH MEASUREMENT	36
Test Limit	36
Test Procedure	36
Measurement Equipment Used	36
Test Result	36
7 POWER SPECTRAL DENSITY TEST	45
Test Limit	45
Test Procedure	45
Measurement Equipment Used	45
Test Result	45
8 PEAK OUTPUT POWER TEST	54
Test Limit	54
Test Procedure	54
Measurement Equipment Used	54
Test Result	54

<b>Table of Contents</b>	<b>Page</b>
9 OUT OF BAND EMISSIONS TEST	55
Test Limit	55
Test Procedure	55
Test Setup	55
Test Result	55
10 ANTENNA REQUIREMENT	60
11 PHOTOGRAPH OF TEST	61
Radiated Emission	61
Conducted Emission	62

## 1. TEST SUMMARY

### TEST PROCEDURES AND RESULTS

DESCRIPTION OF TEST	RESULT
CONDUCTED EMISSIONS TEST	COMPLIANT
RADIATED EMISSION TEST	COMPLIANT
BAND EDGE	COMPLIANT
OCCUPIED BANDWIDTH MEASUREMENT	COMPLIANT
POWER SPECTRAL DENSITY	COMPLIANT
PEAK OUTPUT POWER <sub>Peak</sub>	COMPLIANT
OUT OF BAND EMISSIONS	COMPLIANT
ANTENNA REQUIREMENT	COMPLIANT

### TEST FACILITY

Test Firm : Shenzhen United Testing Technology Co., Ltd.

Address : 2F, Annex Bldg, Jiahuangyuan Tech Park, #365 Baotian 1 Rd, Tiegang Community, Xixiang Str, Bao'an District, Shenzhen, China

### MEASUREMENT UNCERTAINTY

Measurement Uncertainty	
Conducted Emission Expanded Uncertainty	= 2.23dB, k=2
Radiated emission expanded uncertainty(9kHz-30MHz)	= 3.08dB, k=2
Radiated emission expanded uncertainty(30MHz-1000MHz)	= 4.42dB, k=2
Radiated emission expanded uncertainty(Above 1GHz)	= 4.06dB, k=2

## 2. GENERAL INFORMATION

### GENERAL DESCRIPTION OF EUT

Equipment	Wifi Camera
Model Name	501
Serial Model	N/A
Model Difference	N/A
FCC ID	2APAS-501
Antenna Type	Integral Antenna
Antenna Gain	1 dBi
Operation frequency	802.11b/g/n 20:2412~2462 MHz 802.11n 40: 2422~2452MHz
Number of Channels	802.11b/g/n20: 11CH 802.11n 40: 7CH
Modulation Type	CCK/OFDM/DBPSK/DAPSK
Power Source	DC3.7V Battery or DC5V 1.5A form Adapter with AC 120V/60Hz
Power Rating	DC3.7V Battery or DC5V 1.5A form Adapter with AC 120V/60Hz

2.1.1 Carrier Frequency of Channels

Channel List for 802.11b/g/n(20MHz)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	04	2427	07	2442	10	2457
02	2417	05	2432	08	2447	11	2462
03	2422	06	2437	09	2452		

Channel List for 802.11n(40MHz)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
03	2422	06	2437	09	2452		
04	2427	07	2442				
05	2432	08	2447				

Operation of EUT during testing

Operating Mode

The mode is used: **Transmitting mode for 802.11b/g/n(20MHz)**


- Low Channel: 2412MHz
- Middle Channel: 2437MHz
- High Channel: 2462MHz

**Transmitting mode for 802.11n(40MHz)**

- Low Channel: 2422MHz
- Middle Channel: 2437MHz
- High Channel: 2452MHz

DESCRIPTION OF TEST SETUP

Operation of EUT during conducted testing and Radiation and Above1GHz Radiation testing:

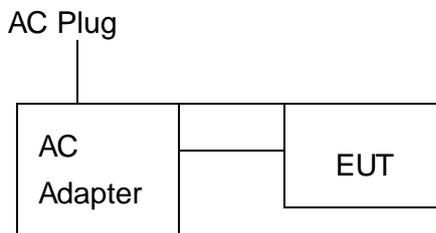

Operation of EUT during Radiation and Above1GHz Radiation testing:



MEASUREMENT INSTRUMENTS LIST

Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1.	EMI Receiver	Rohde & Schwarz	ESCI	100627	Feb. 01, 2018	Jan. 01, 2019
2.	LISN	SchwarzBeck	NSLK 8126	8126377	Feb. 01, 2018	Jan. 01, 2019
3.	RF Switching Unit	Compliance Direction	RSU-M2	38303	Feb. 01, 2018	Jan. 01, 2019
4.	EMI Test Software ES-K1	Rohde & Schwarz	N/A	N/A	N/A	N/A
5.	EMI Test Receiver	Rohde & Schwarz	ESCI	100627	Feb. 01, 2018	Jan. 01, 2019
6.	Trilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	Feb. 01, 2018	Jan. 01, 2019
7.	Pre-amplifier	Compliance Direction	PAP-0203	22008	Feb. 01, 2018	Jan. 01, 2019
8.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A
9.	EMI Receiver	Rohde & Schwarz	ESCI	100627	Feb. 01, 2018	Jan. 01, 2019
10.	LISN	SchwarzBeck	NSLK 8126	8126377	Feb. 01, 2018	Jan. 01, 2019
11.	RF Switching Unit	Compliance Direction	RSU-M2	38303	Feb. 01, 2018	Jan. 01, 2019
12.	EMI Test Software ES-K1	Rohde & Schwarz	N/A	N/A	N/A	N/A
13.	EMI Receiver	Rohde & Schwarz	ESCI	100627	Feb. 01, 2018	Jan. 01, 2019
14.	EMI Receiver	Rohde & Schwarz	ESCI	100627	Feb. 01, 2018	Jan. 01, 2019
15.	LISN	SchwarzBeck	NSLK 8126	8126377	Feb. 01, 2018	Jan. 01, 2019
16.	RF Switching Unit	Compliance Direction	RSU-M2	38303	Feb. 01, 2018	Jan. 01, 2019
17.	EMI Test Software ES-K1	Rohde & Schwarz	N/A	N/A	N/A	N/A
18.	Power Meter	R&S	NRVD	SEL0069	Feb. 01, 2018	Jan. 01, 2019
19.	Power Sensor	R&S	URV5-Z2	SEL0071	Feb. 01, 2018	Jan. 01, 2019
20.	Power Sensor	R&S	URV5-Z2	SEL0072	Feb. 01, 2018	Jan. 01, 2019
21.	Software EMC32	R&S	EMC32-S	SEL0082	N/A	N/A
22.	Log-periodic Antenna	Amplifier Reasearch	APT1.580	SEL0073	Feb. 01, 2018	Jan. 01, 2019
23.	Loop Antenna	Schwarz beck	FMZB 1516	9773	Feb. 01, 2018	Jan. 01, 2019
24.	Broadband Antenna	Schwarz beck	VULB9163	9163-333	Feb. 01, 2018	Jan. 01, 2019
25.	Horn Antenna	ETS	3117	00086197	Feb. 01, 2018	Jan. 01, 2019
26.	Horn Antenna	Schwarzbeck	BBHA9170	BBHA91705 82	Feb. 01, 2018	Jan. 01, 2019
27.	Antenna Tripod	Amplifier Reasearch	TP1000A	SEL0074	Feb. 01, 2018	Jan. 01, 2019
28.	High Gain Horn Antenna	Amplifier Reasearch	AT4002A	SEL0075	Feb. 01, 2018	Jan. 01, 2019
29.	Spectrum analyzer	Agilent	N9020A	MY49911004 8	Feb. 01, 2018	Jan. 01, 2019
30.	Spectrum analyzer	Agilent	E4407B	MY46184326	Feb. 01, 2018	Jan. 01, 2019
31.	Spectrum analyzer	R&S	FSP30	836079/035	Feb. 01, 2018	Jan. 01, 2019

### 3. CONDUCTED EMISSIONS TEST

#### Conducted Power Line Emission Limit


For unintentional device, according to § 15.107(a) Line Conducted Emission Limits is as following

Frequency (MHz)	Maximum RF Line Voltage (dB $\mu$ V)			
	CLASS A		CLASS B	
	Q.P.	Ave.	Q.P.	Ave.
0.15 - 0.50	79	66	66-56*	56-46*
0.50 - 5.00	73	60	56	46
5.00 - 30.0	73	60	60	50

\* Decreasing linearly with the logarithm of the frequency

For intentional device, according to §15.207(a) Line Conducted Emission Limit is same as above table.

#### Test Setup

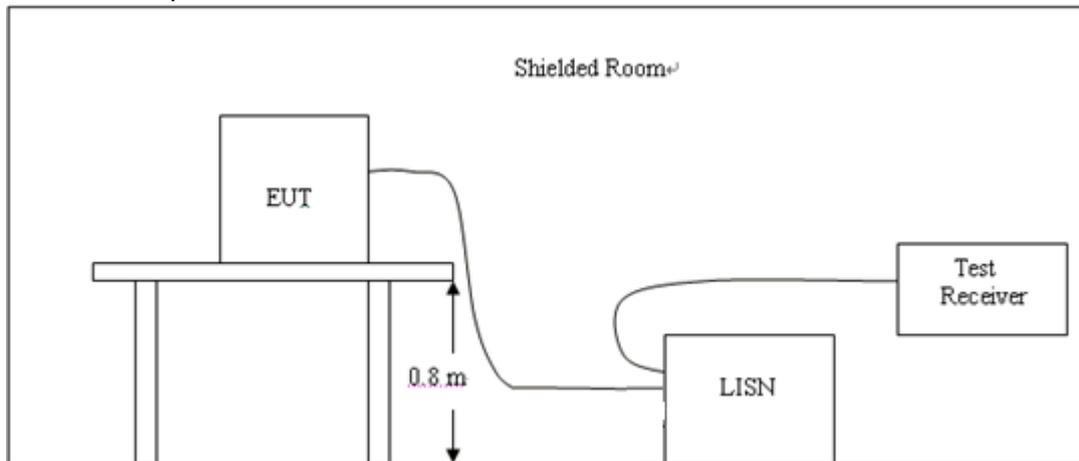

#### Test Procedure


- 1, The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a Wifi Cameraop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10.
- 2, Support equipment, if needed, was placed as per ANSI C63.10.
- 3, All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4, If a EUT received DC power from the USB Port of Notebook PC, the PC's adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5, All support equipments received AC power from a second LISN, if any.
- 6, The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7, Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.

#### Test Result

**PASS**


All the test modes completed for test.

Test Specification: Line

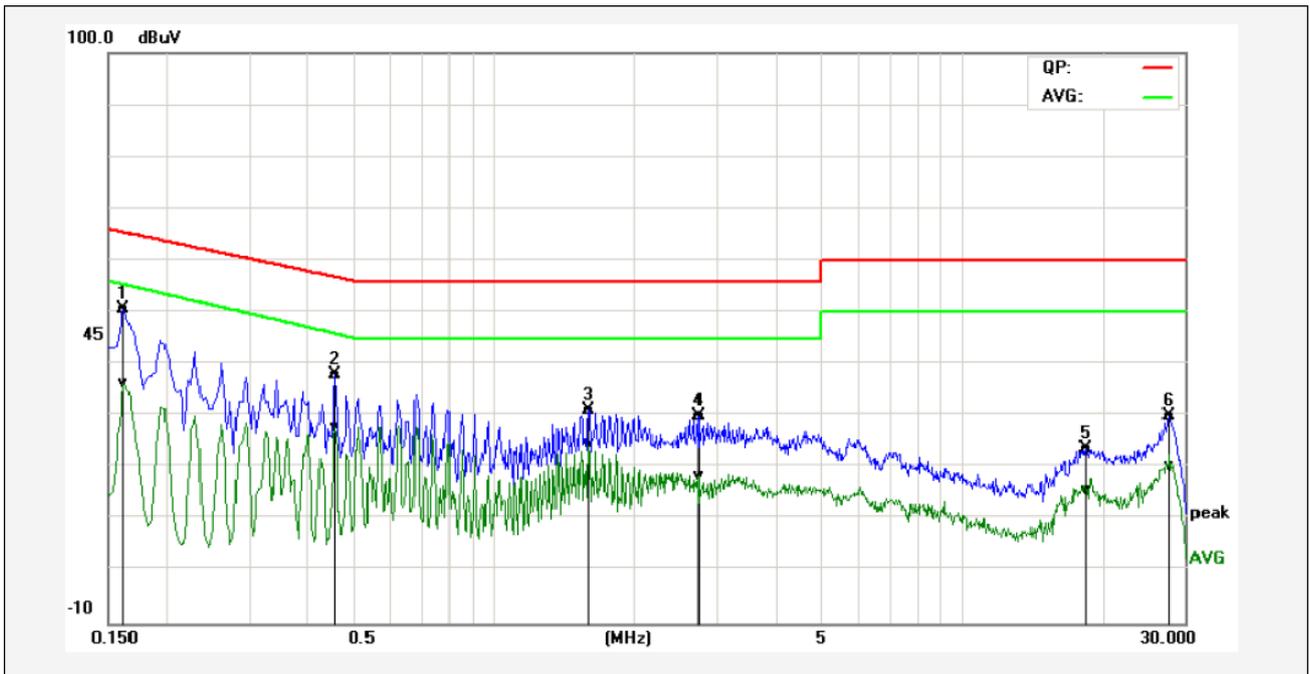

No.	Frequency (MHz)	QuasiPeak reading (dBuV)	Average reading (dBuV)	Correction factor (dB)	QuasiPeak result (dBuV)	Average result (dBuV)	QuasiPeak limit (dBuV)	Average limit (dBuV)	QuasiPeak margin (dB)	Average margin (dB)	Remark
1*	0.1620	50.55	36.16	0.20	50.75	36.36	65.36	55.30	-14.61	-18.94	Pass
2P	0.4580	37.80	27.50	0.18	37.98	27.68	56.73	45.80	-18.75	-18.12	Pass
3P	1.5980	30.95	24.02	0.19	31.14	24.21	56.00	45.00	-24.86	-20.79	Pass
4P	2.7420	29.68	18.13	0.21	29.89	18.34	56.00	45.00	-26.11	-26.66	Pass
5P	18.3420	23.15	15.18	0.46	23.61	15.64	60.00	50.00	-36.39	-34.36	Pass
6P	27.6060	29.11	19.61	0.85	29.96	20.46	60.00	50.00	-30.04	-29.54	Pass

Test Specification: Neutral

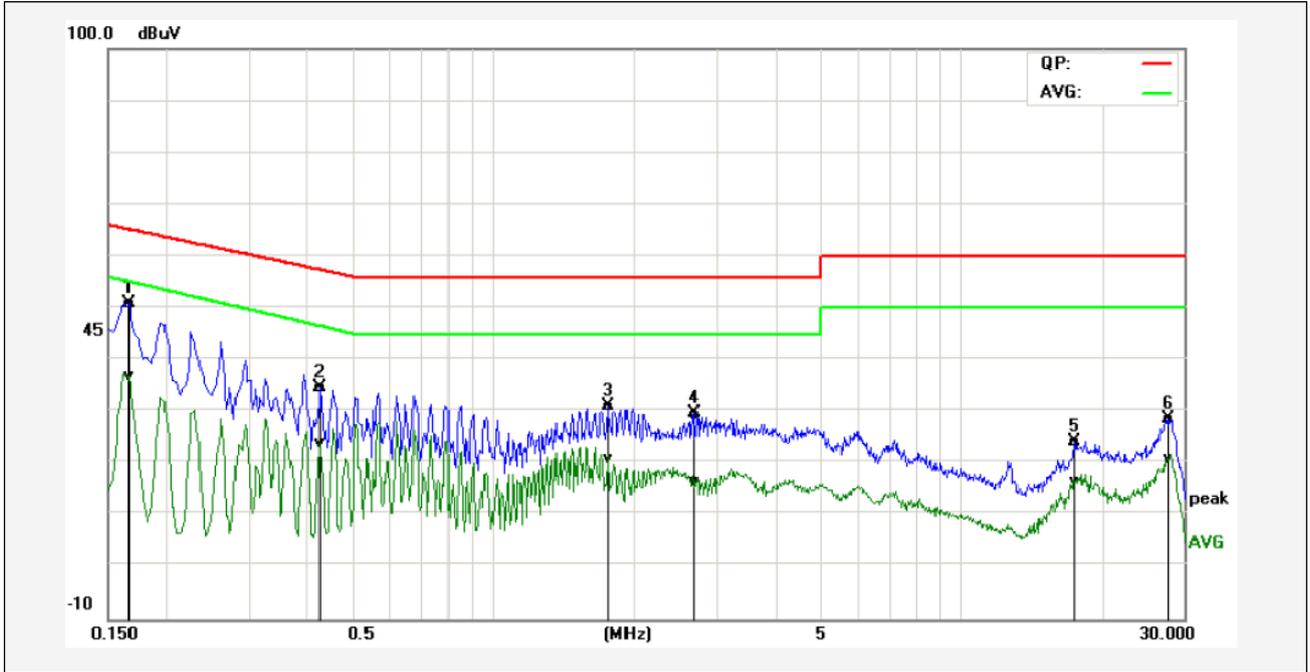

No.	Frequency (MHz)	QuasiPeak reading (dBuV)	Average reading (dBuV)	Correction factor (dB)	QuasiPeak result (dBuV)	Average result (dBuV)	QuasiPeak limit (dBuV)	Average limit (dBuV)	QuasiPeak margin (dB)	Average margin (dB)	Remark
1*	0.1660	50.65	36.71	0.20	50.85	36.91	65.16	55.07	-14.31	-18.16	Pass
2P	0.4260	34.63	23.88	0.18	34.81	24.06	57.33	46.46	-22.52	-22.40	Pass
3P	1.7620	30.88	20.87	0.17	31.05	21.04	56.00	45.00	-24.95	-23.96	Pass
4P	2.6820	29.39	16.30	0.21	29.60	16.51	56.00	45.00	-26.40	-28.49	Pass
5P	17.5620	23.91	16.22	0.40	24.31	16.62	60.00	50.00	-35.69	-33.38	Pass
6P	27.7420	27.67	20.10	0.86	28.53	20.96	60.00	50.00	-31.47	-29.04	Pass

### 4 RADIATED EMISSION TEST

#### Radiation Limit


For unintentional device, according to § 15.109(a), except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency (MHz)	Distance (Meters)	Radiated (dB $\mu$ V/m)	Radiated ( $\mu$ V/m)
30-88	3	40	100
88-216	3	43.5	150
216-960	3	46	200
Above 960	3	54	500


For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emissions from intentional radiators at a distance of 3 meters shall not exceed the above table.

#### Test Setup


- (1) Radiated Emission Test-Up Frequency Below 30MHz

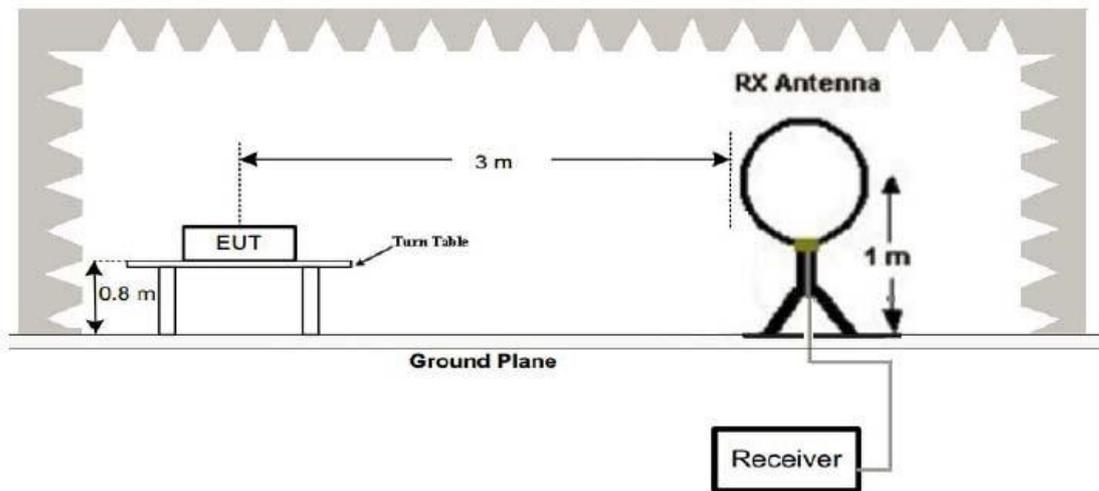

- (2) Radiated Emission Test-Up Frequency 30MHz~1GHz

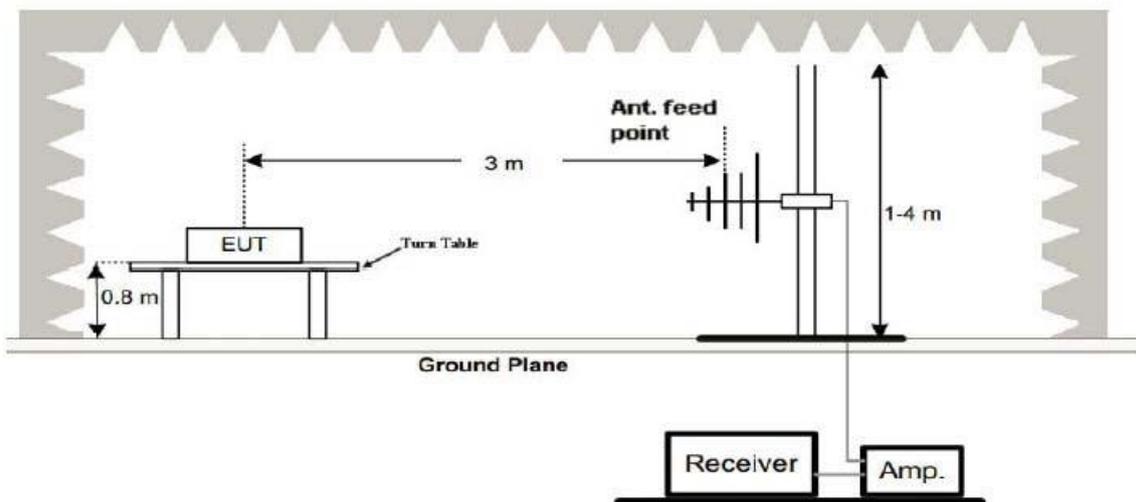

(3) Radiated Emission Test-Up Frequency Above 1GHz

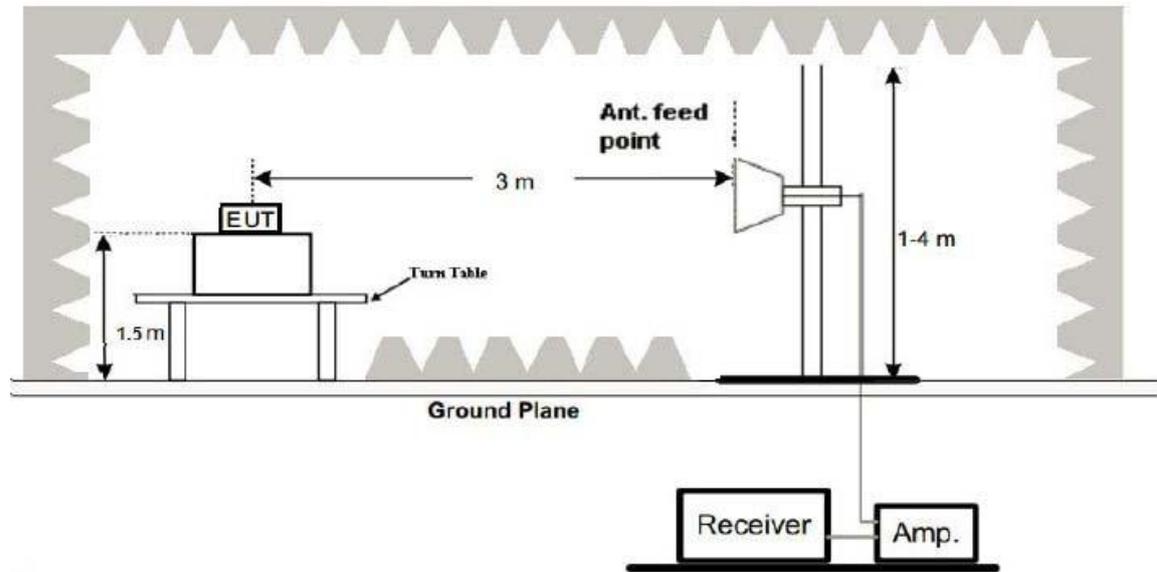

Test Procedure

1. Below 1GHz measurement the EUT is placed on turntable which is 0.8m above ground plane. And above 1GHz measurement EUT was placed on low permittivity and low tangent turn table which is 1.5m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The test frequency range from 9KHz to 25GHz per FCC PART 15.33(a).

Note:


For battery operated equipment, the equipment tests shall be performed using a new battery.

Test Result

PASS


All the test modes completed for test. The worst case of Radiated Emission (802.11b Transmitting High Channel-2462MHz (worst case) ); the test data of this mode was reported.

Below 1GHz Test Results:  
Antenna polarity: H

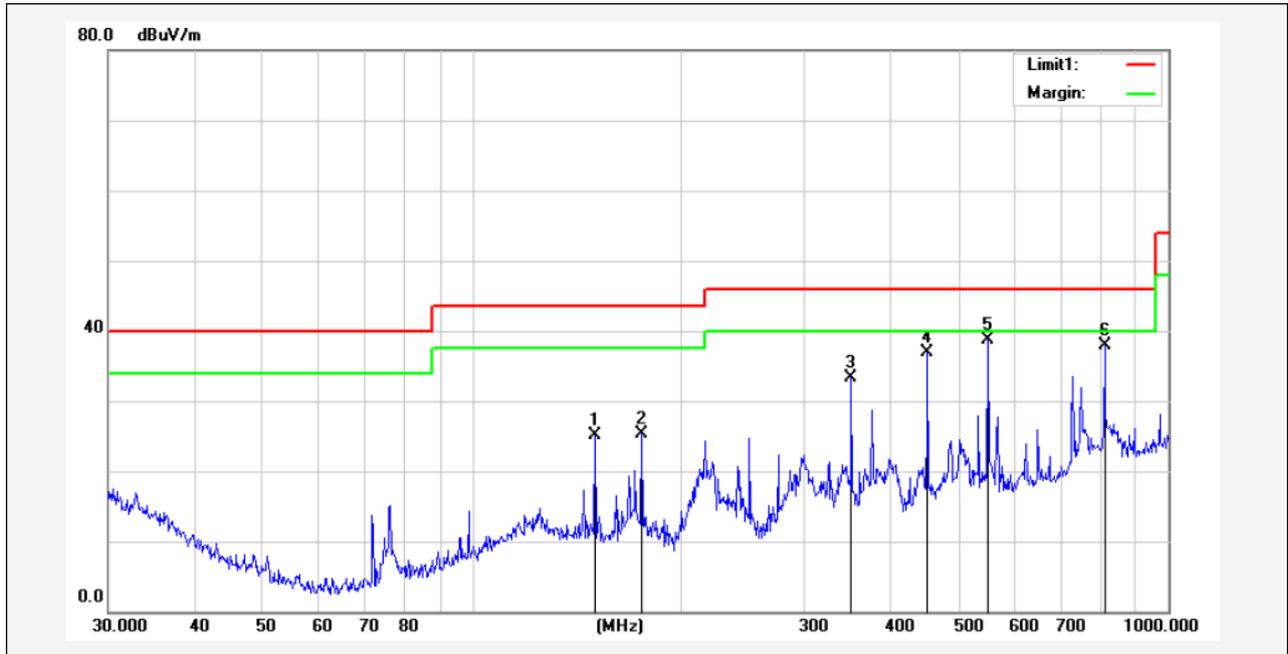

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1	150.0108	40.61	-15.55	25.06	43.50	-18.44			peak
2	175.0368	42.93	-17.54	25.39	43.50	-18.11			peak
3	350.4768	46.41	-13.09	33.32	46.00	-12.68			peak
4	451.1350	48.65	-11.73	36.92	46.00	-9.08			peak
5*	550.9480	19.40	19.35	38.75	46.00	-7.25			peak
6	810.2654	14.34	23.65	37.99	46.00	-8.01			peak

Antenna polarity: V

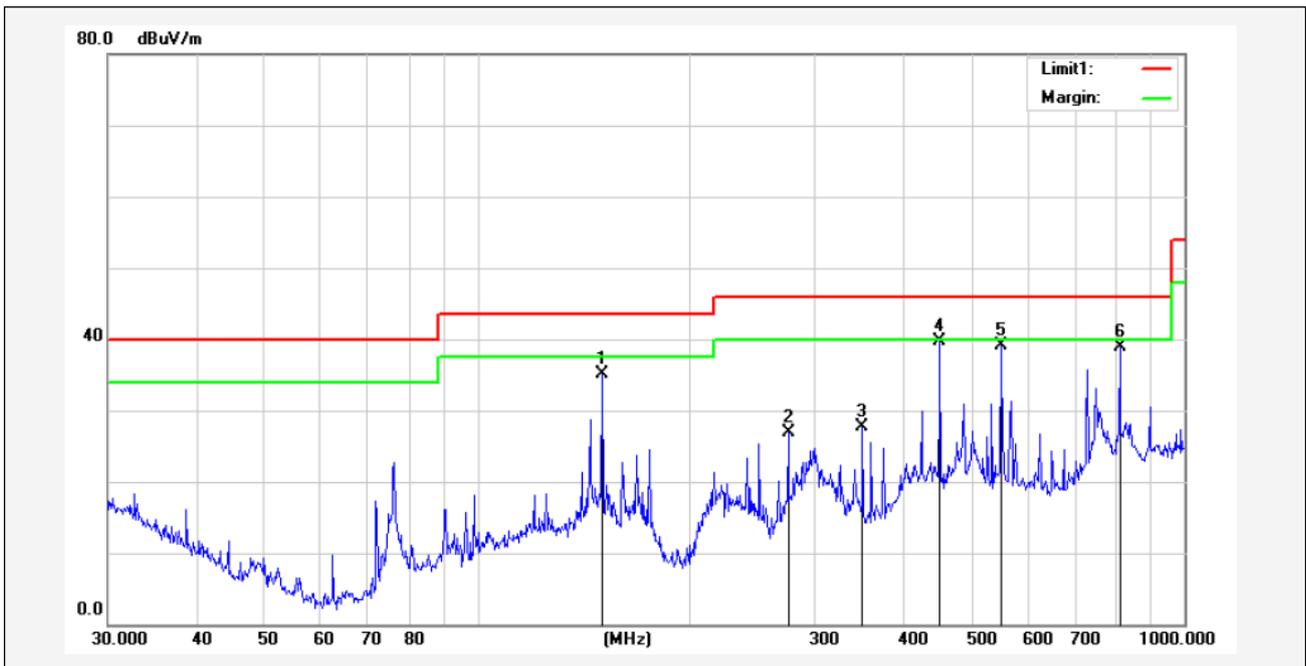

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1	150.0108	50.66	-15.55	35.11	43.50	-8.39			peak
2	275.1570	40.81	-13.99	26.82	46.00	-19.18			peak
3	350.4768	40.88	-13.09	27.79	46.00	-18.21			peak
4*	451.1350	51.41	-11.73	39.68	46.00	-6.32			peak
5	550.9480	19.67	19.35	39.02	46.00	-6.98			peak
6	810.2654	15.29	23.65	38.94	46.00	-7.06			peak

Remark:

- (1) Measuring frequencies from 9 KHz to the 1 GHz, Radiated emission test from 9KHz to 30MHz was verified, and no any emission was found except system noise floor.
- (2) \* denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.

Above 1 GHz Test Results:

LOW CH1 (802.11b Mode)/2412  
Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	
4824	63.15	-3.64	59.51	74	-14.49	peak
4824	47.08	-3.64	43.44	54	-10.56	AVG
7236	56.66	-0.95	55.71	74	-18.29	peak
7236	42.54	-0.95	41.59	54	-12.41	AVG
---	---	---	---	---	---	---
---	---	---	---	---	---	---

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	
4824	62.78	-3.64	59.14	74	-14.86	peak
4824	46.72	-3.64	43.08	54	-10.92	AVG
7236	56.45	-0.95	55.5	74	-18.5	peak
7236	42.23	-0.95	41.28	54	-12.72	AVG
---	---	---	---	---	---	---
---	---	---	---	---	---	---

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

MID CH6 (802.11b Mode)/2437  
Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	
4874	62.37	-3.51	58.86	74	-15.14	peak
4874	46.59	-3.51	43.08	54	-10.92	AVG
7311	55.44	-0.82	54.62	74	-19.38	peak
7311	41.82	-0.82	41	54	-13	AVG
---	---	---	---	---	---	---
---	---	---	---	---	---	---

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	
4874	62.13	-3.51	58.62	74	-15.38	peak
4874	46.28	-3.51	42.77	54	-11.23	AVG
7311	55.34	-0.82	54.52	74	-19.48	peak
7311	41.65	-0.82	40.83	54	-13.17	AVG
---	---	---	---	---	---	---
---	---	---	---	---	---	---

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

HIGH CH11 (802.11b Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	62.06	-3.43	58.63	74	-15.37	peak
4924	46.04	-3.43	42.61	54	-11.39	AVG
7386	55.49	-0.75	54.74	74	-19.26	peak
7386	41.57	-0.75	40.82	54	-13.18	AVG
---	---	---	---	---	---	---
---	---	---	---	---	---	---

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	61.66	-3.43	58.23	74	-15.77	peak
4924	45.82	-3.43	42.39	54	-11.61	AVG
7386	55.36	-0.75	54.61	74	-19.39	peak
7386	41.34	-0.75	40.59	54	-13.41	AVG
---	---	---	---	---	---	---
---	---	---	---	---	---	---

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency.
- (3) \* denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) Data of measurement within this frequency range shown "----" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.
- (6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

LOW CH1 (802.11g Mode)/2412  
Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	
4824	61.88	-3.64	58.24	74	-15.76	peak
4824	46.72	-3.64	43.08	54	-10.92	AVG
7236	56.34	-0.95	55.39	74	-18.61	peak
7236	42.16	-0.95	41.21	54	-12.79	AVG
---	---	---	---	---	---	---
---	---	---	---	---	---	---

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	
4824	61.62	-3.64	57.98	74	-16.02	peak
4824	46.35	-3.64	42.71	54	-11.29	AVG
7236	56.21	-0.95	55.26	74	-18.74	peak
7236	42.04	-0.95	41.09	54	-12.91	AVG
---	---	---	---	---	---	---
---	---	---	---	---	---	---

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

MID CH6 (802.11g Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	
4874	61.37	-3.51	57.86	74	-16.14	peak
4874	46.15	-3.51	42.64	54	-11.36	AVG
7311	55.89	-0.82	55.07	74	-18.93	peak
7311	41.73	-0.82	40.91	54	-13.09	AVG
---	---	---	---	---	---	---
---	---	---	---	---	---	---

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	
4874	61.14	-3.51	57.63	74	-16.37	peak
4874	46.08	-3.51	42.57	54	-11.43	AVG
7311	55.63	-0.82	54.81	74	-19.19	peak
7311	41.55	-0.82	40.73	54	-13.27	AVG
---	---	---	---	---	---	---
---	---	---	---	---	---	---

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

HIGH CH11 (802.11g Mode)/2462  
Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	60.78	-3.43	57.35	74	-16.65	peak
4924	46.29	-3.43	42.86	54	-11.14	AVG
7386	55.66	-0.75	54.91	74	-19.09	peak
7386	41.03	-0.75	40.28	54	-13.72	AVG
---	---	---	---	---	---	---
---	---	---	---	---	---	---

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	60.25	-3.43	56.82	74	-17.18	peak
4924	45.38	-3.43	41.95	54	-12.05	AVG
7386	55.44	-0.75	54.69	74	-19.31	peak
7386	40.17	-0.75	39.42	54	-14.58	AVG
---	---	---	---	---	---	---
---	---	---	---	---	---	---

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency.
- (3) \* denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.
- (6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at F undamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

LOW CH1 (802.11n/H20 Mode)/2412  
Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	62.15	-3.64	58.51	74	-15.49	peak
4824	46.37	-3.64	42.73	54	-11.27	AVG
7236	56.44	-0.95	55.49	74	-18.51	peak
7236	42.18	-0.95	41.23	54	-12.77	AVG
---	---	---	---	---	---	---
---	---	---	---	---	---	---

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	61.91	-3.64	58.27	74	-15.73	peak
4824	46.22	-3.64	42.58	54	-11.42	AVG
7236	56.37	-0.95	55.42	74	-18.58	peak
7236	42.59	-0.95	41.64	54	-12.36	AVG
---	---	---	---	---	---	---
---	---	---	---	---	---	---

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

MID CH6 (802.11n/H20 Mode)/2437  
Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	
4874	61.56	-3.51	58.05	74	-15.95	peak
4874	46.33	-3.51	42.82	54	-11.18	AVG
7311	56.29	-0.82	55.47	74	-18.53	peak
7311	41.45	-0.82	40.63	54	-13.37	AVG
---	---	---	---	---	---	---
---	---	---	---	---	---	---

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	
4874	61.32	-3.51	57.81	74	-16.19	peak
4874	46.27	-3.51	42.76	54	-11.24	AVG
7311	56.11	-0.82	55.29	74	-18.71	peak
7311	41.04	-0.82	40.22	54	-13.78	AVG
---	---	---	---	---	---	---
---	---	---	---	---	---	---

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

HIGH CH11 (802.11 n/H20 Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	60.89	-3.43	57.46	74	-16.54	peak
4924	45.67	-3.43	42.24	54	-11.76	AVG
7386	55.84	-0.75	55.09	74	-18.91	peak
7386	40.52	-0.75	39.77	54	-14.23	AVG
---	---	---	---	---	---	---
---	---	---	---	---	---	---

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	60.34	-3.43	56.91	74	-17.09	peak
4924	45.55	-3.43	42.12	54	-11.88	AVG
7386	55.27	-0.75	54.52	74	-19.48	peak
7386	40.11	-0.75	39.36	54	-14.64	AVG
---	---	---	---	---	---	---
---	---	---	---	---	---	---

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

LOW CH3 (802.11n/H40 Mode)/2422  
Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	62.57	-3.63	58.94	74	-15.06	peak
4924	46.36	-3.63	42.73	54	-11.27	AVG
7386	56.29	-0.94	55.35	74	-18.65	peak
7386	42.45	-0.94	41.51	54	-12.49	AVG
---	---	---	---	---	---	---
---	---	---	---	---	---	---

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	62.33	-3.63	58.7	74	-15.3	peak
4924	45.78	-3.63	42.15	54	-11.85	AVG
7386	56.12	-0.94	55.18	74	-18.82	peak
7386	41.65	-0.94	40.71	54	-13.29	AVG
---	---	---	---	---	---	---
---	---	---	---	---	---	---

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

MID CH6 (802.11n/H40 Mode)/2437  
Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	61.85	-3.51	58.34	74	-15.66	peak
4874	45.47	-3.51	41.96	54	-12.04	AVG
7311	55.72	-0.82	54.9	74	-19.1	peak
7311	41.24	-0.82	40.42	54	-13.58	AVG
---	---	---	---	---	---	---
---	---	---	---	---	---	---

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	61.59	-3.51	58.08	74	-15.92	peak
4874	45.21	-3.51	41.7	54	-12.3	AVG
7311	55.33	-0.82	54.51	74	-19.49	peak
7311	41.06	-0.82	40.24	54	-13.76	AVG
---	---	---	---	---	---	---
---	---	---	---	---	---	---

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

HIGH CH9 (802.11 n/H40 Mode)/2452  
Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4904	61.22	-3.43	57.79	74	-16.21	peak
4904	45.16	-3.43	41.73	54	-12.27	AVG
7356	55.09	-0.75	54.34	74	-19.66	peak
7356	41.35	-0.75	40.6	54	-13.4	AVG
---	---	---	---	---	---	---
---	---	---	---	---	---	---

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4904	60.67	-3.43	57.24	74	-16.76	peak
4904	45.08	-3.43	41.65	54	-12.35	AVG
7356	54.39	-0.75	53.64	74	-20.36	peak
7356	40.56	-0.75	39.81	54	-14.19	AVG
---	---	---	---	---	---	---
---	---	---	---	---	---	---

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

**Remark:**

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency.
- (3) \* denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.
- (6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

## 5 BAND EDGE

### Limits

FCC PART 15.247 Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

### Test Procedure

The band edge compliance of RF radiated emission should be measured by following the guidance in ANSI C63.10 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization etc. Set RBW to 100KHz and VBM to 300KHz to measure the peak field strength and set RBW to 1MHz and VBW to 10Hz to measure the average radiated field strength. The conducted RF band edge was measured by using a spectrum analyzer. Set span wide enough to capture the highest in-band emission and the emission at the band edge. Set RBW to 100 KHz and VBW to 300 KHz, to measure the conducted peak band edge.

### Test Result

#### PASS

Operation Mode:  
802.11b Mode TX CH Low (2412MHz)  
Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	
2390	54.76	-5.81	48.95	74	-25.05	peak
2390	/	-5.81	/	54	/	AVG
2399	63.08	-5.84	57.24	74	-16.76	peak
2399	48.51	-5.84	42.67	54	-11.33	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

#### Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	
2390	53.56	-5.81	47.75	74	-26.25	peak
2390	/	-5.81	/	54	/	AVG
2399	61.66	-5.84	55.82	74	-18.18	peak
2399	47.35	-5.84	41.51	54	-12.49	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Operation Mode: TX CH High (2462MHz)  
Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	55.53	-5.65	49.88	74	-24.12	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	54.27	-5.65	48.62	74	-25.38	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

Operation Mode: 802.11g Mode TX CH Low (2412MHz)  
Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	54.82	-5.81	49.01	74	-24.99	peak
2390	/	-5.81	/	54	/	AVG
2399	62.35	-5.84	56.51	74	-17.49	peak
2399	46.69	-5.84	40.85	54	-13.15	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	54.24	-5.81	48.43	74	-25.57	peak
2390	/	-5.81	/	54	/	AVG
2399	61.88	-5.84	56.04	74	-17.96	peak
2399	46.31	-5.84	40.47	54	-13.53	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Operation Mode: TX CH High (2462MHz)  
Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
2483.5	54.67	-5.65	49.02	74	-24.98	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
2483.5	55.23	-5.65	49.58	74	-24.42	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Operation Mode: 802.11n/H20 Mode TX CH Low (2412MHz)  
Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2390	53.34	-5.81	47.53	74	-26.47	
2390	/	-5.81	/	54	/	AVG
2399	62.15	-5.84	56.31	74	-17.69	peak
2399	45.87	-5.84	40.03	54	-13.97	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2390	54.29	-5.81	48.48	74	-25.52	
2390	/	-5.81	/	54	/	AVG
2399	61.57	-5.84	55.73	74	-18.27	peak
2399	45.45	-5.84	39.61	54	-14.39	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Operation Mode: TX CH High (2462MHz)  
Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	55.32	-5.65	49.67	74	-24.33	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	53.44	-5.65	47.79	74	-26.21	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

Operation Mode: 802.11n/H40 Mode TX CH Low (2422MHz)  
Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
2390	54.69	-5.81	48.88	74	-25.12	peak
2390	/	-5.81	/	54	/	AVG
2399	61.38	-5.84	55.54	74	-18.46	peak
2399	46.14	-5.84	40.3	54	-13.7	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
2390	53.53	-5.81	47.72	74	-26.28	peak
2390	/	-5.81	/	54	/	AVG
2399	61.15	-5.84	55.31	74	-18.69	peak
2399	45.99	-5.84	40.15	54	-13.85	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Operation Mode: TX CH High (2452MHz)  
Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	53.27	-5.65	47.62	74	-26.38	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	55.45	-5.65	49.8	74	-24.2	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

## 6 OCCUPIED BANDWIDTH MEASUREMENT

### Test Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS

### Test Procedure

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Set EUT as normal operation.
3. Based on FCC Part15 C Section 15.247: RBW= 100KHz. VBW= 300 KHz.
4. The useful radiated emission from the EUT was detected by the spectrum analyser with peak detector.

### Measurement Equipment Used


Same as Radiated Emission Measurement

### Test Result


**PASS**

TX 802.11b Mode			
Frequency	6dB Bandwidth (MHz)	Channel Separation (MHz)	Result
2412 MHz	9.133	>=500KHz	PASS
2437 MHz	9.152	>=500KHz	PASS
2462 MHz	9.130	>=500KHz	PASS


CH: 2412MHz

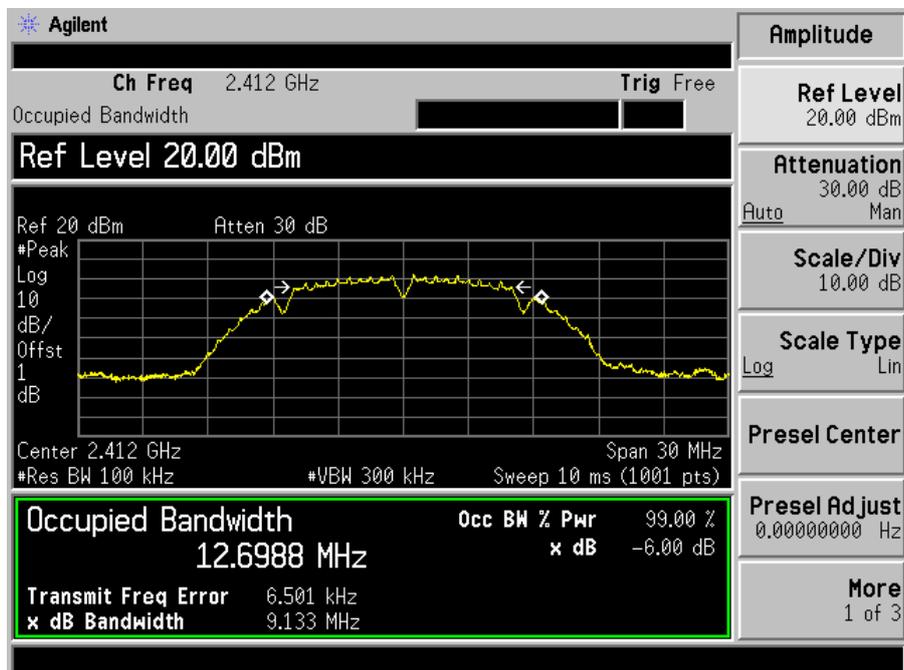

CH: 2437MHz

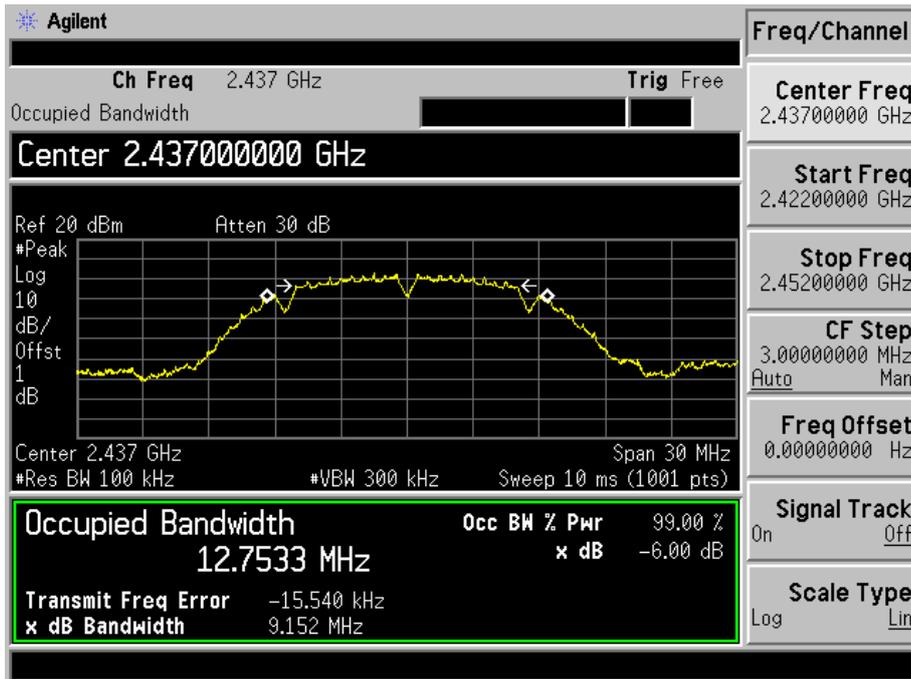


CH: 2462MHz

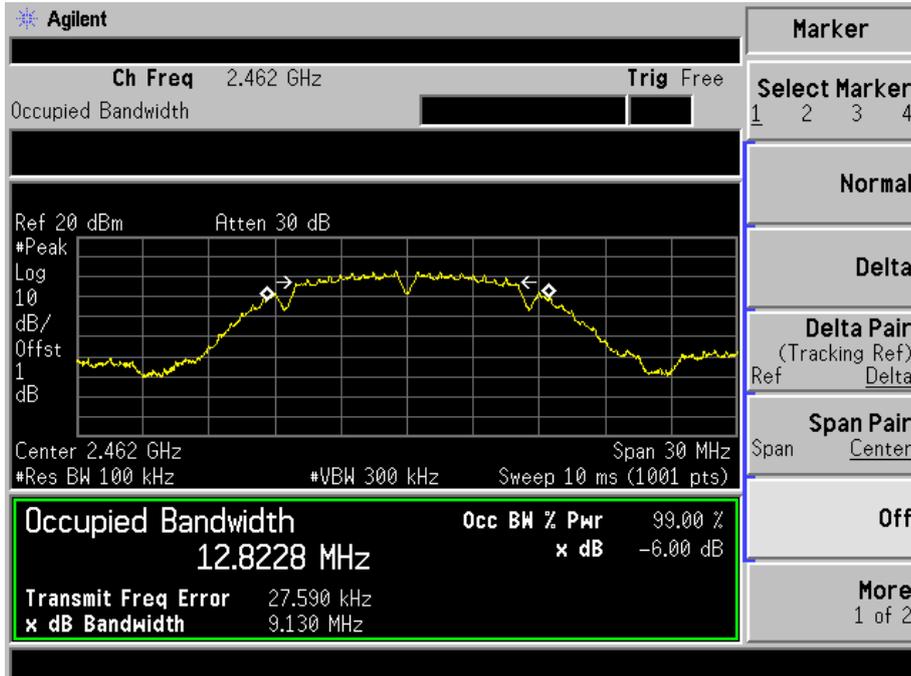


TX 802.11g Mode			
Frequency	6dB Bandwidth (MHz)	Channel Separation (MHz)	Result
2412 MHz	15.464	>=500KHz	PASS
2437 MHz	14.412	>=500KHz	PASS
2462 MHz	16.333	>=500KHz	PASS


CH: 2412MHz

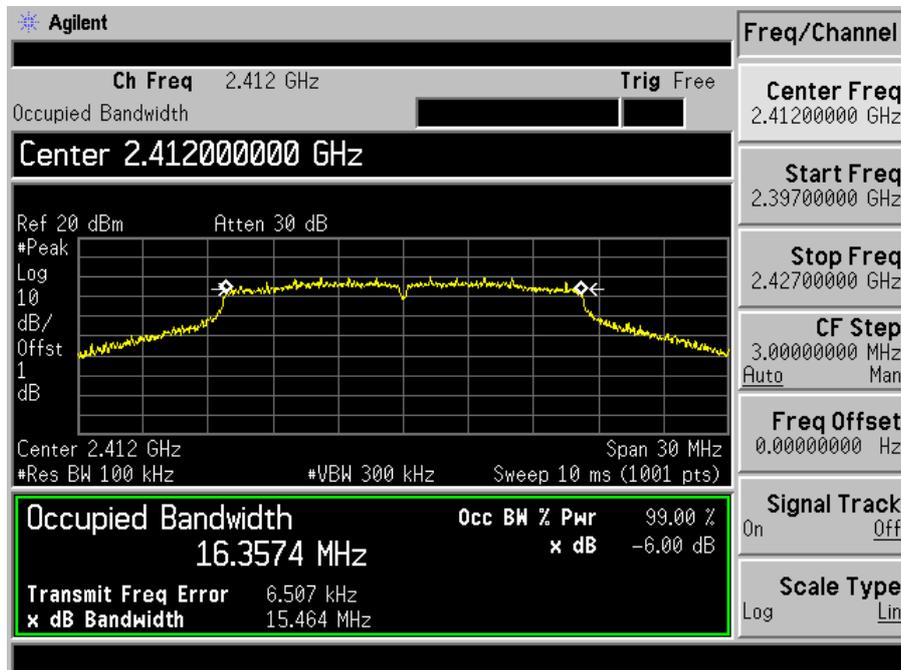

CH: 2437MHz

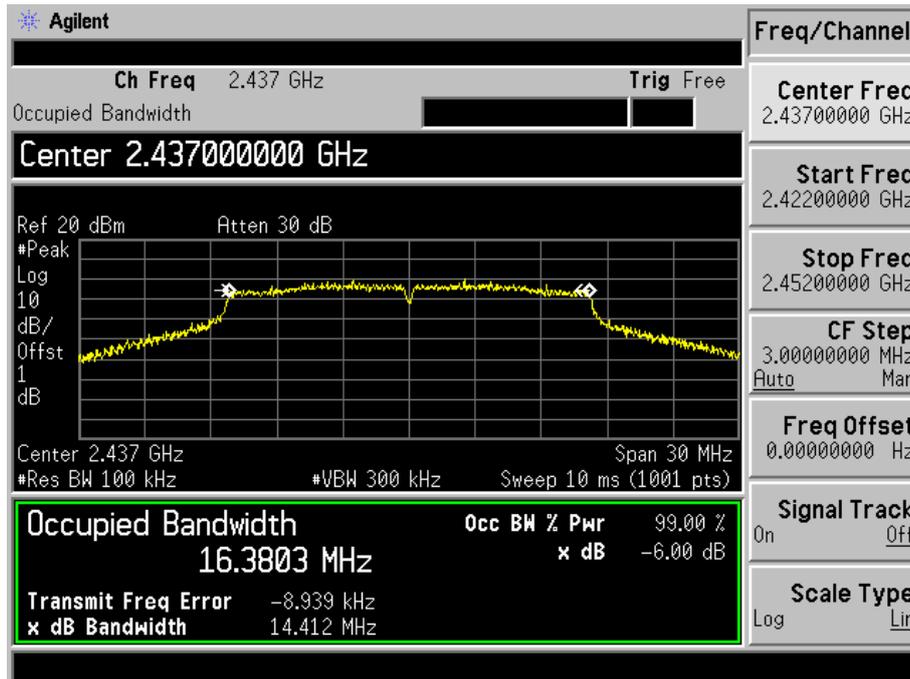


CH: 2462MHz

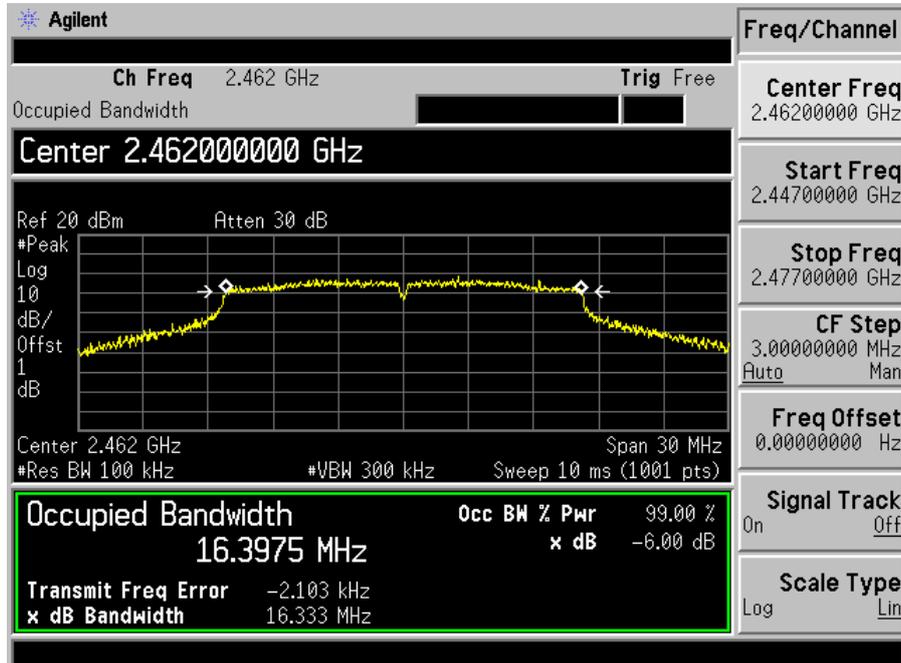


TX 802.11n/HT20 Mode			
Frequency	6dB Bandwidth (MHz)	Channel Separation (MHz)	Result
2412 MHz	15.072	>=500KHz	PASS
2437 MHz	13.805	>=500KHz	PASS
2462 MHz	15.054	>=500KHz	PASS


CH: 2412MHz

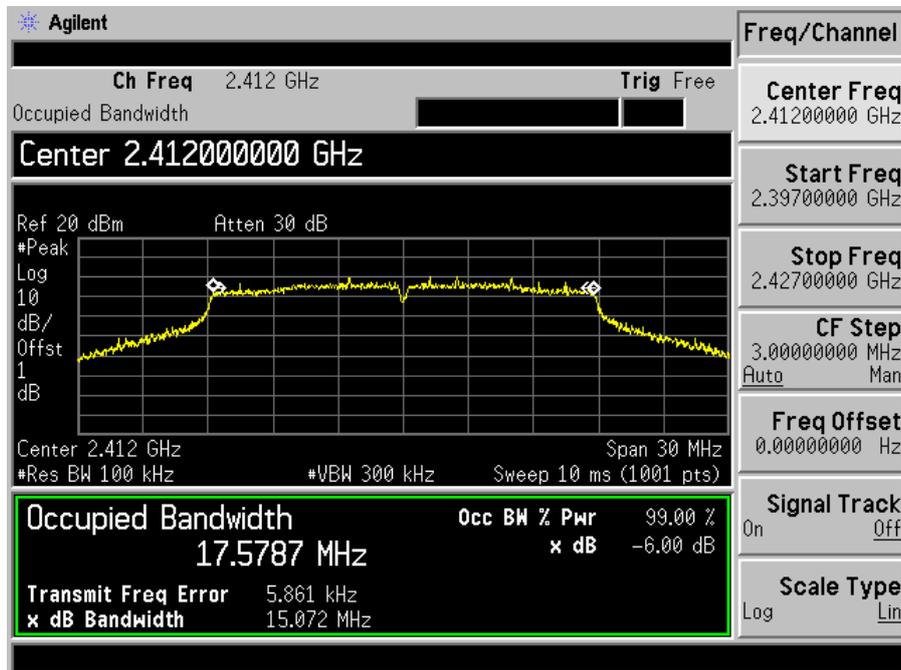

CH: 2437MHz

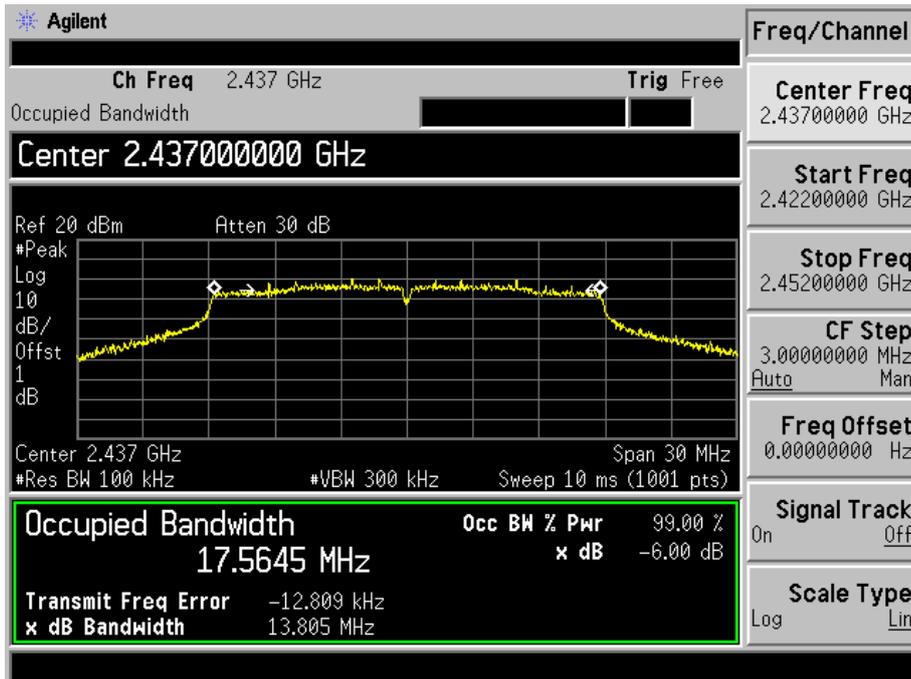


CH: 2462MHz

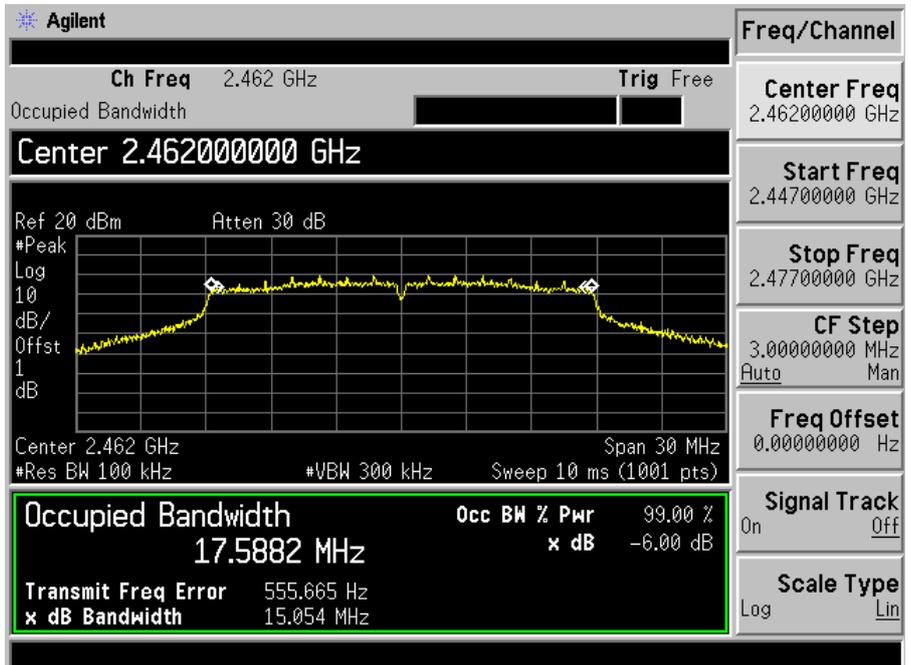


TX 802.11n/HT40 Mode			
Frequency	6dB Bandwidth (MHz)	Channel Separation (MHz)	Result
2422 MHz	35.029	>=500KHz	PASS
2437 MHz	35.116	>=500KHz	PASS
2452 MHz	35.176	>=500KHz	PASS


CH: 2422MHz

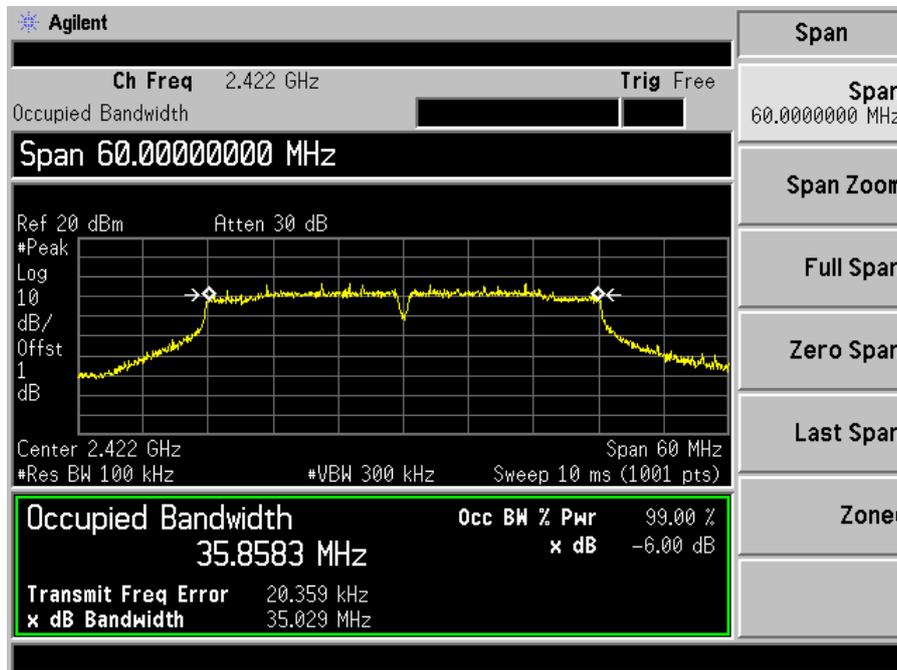

CH: 2437MHz

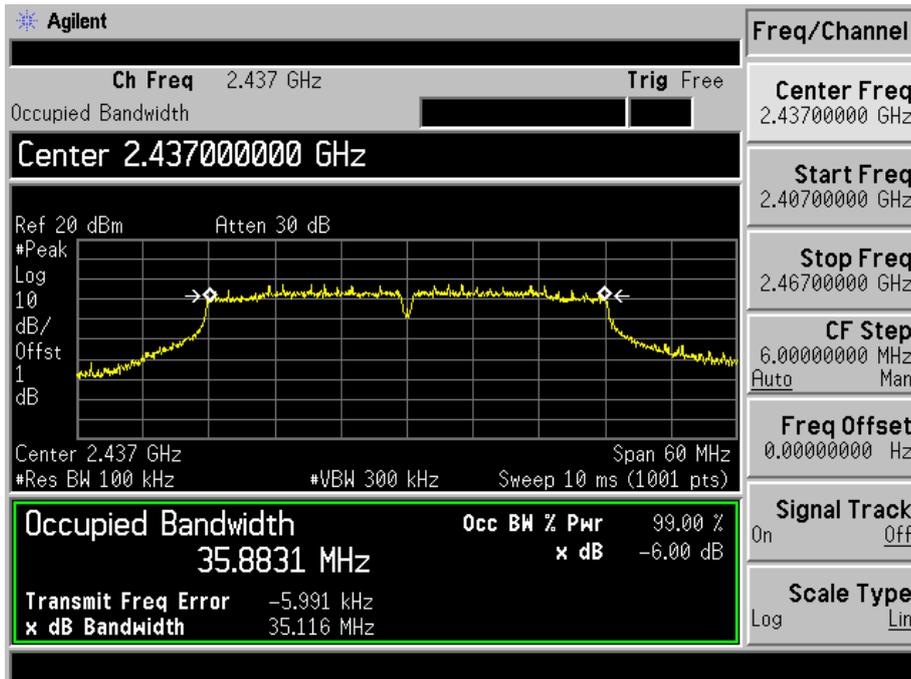

CH: 2452MHz

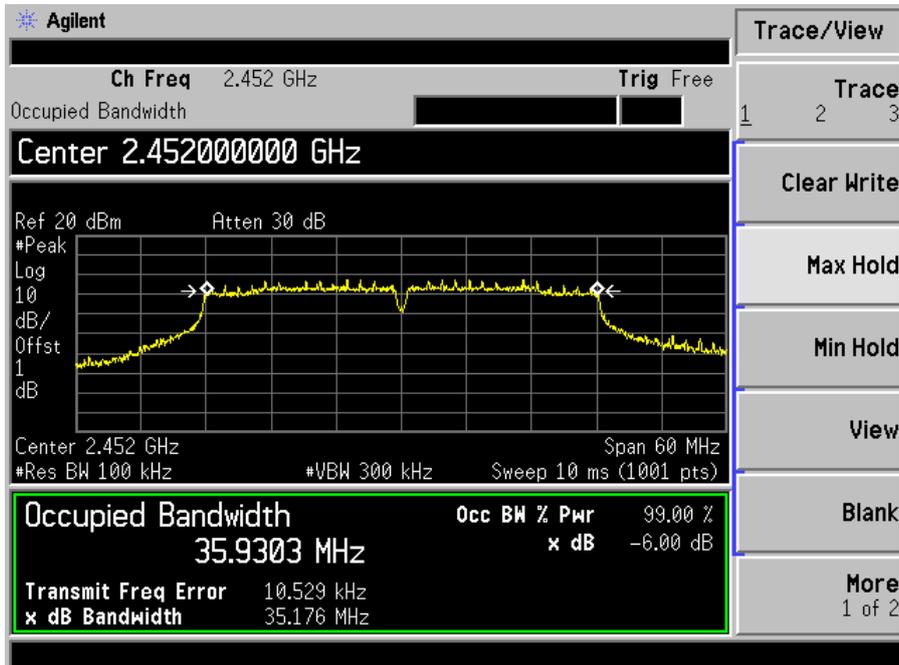

## 7 POWER SPECTRAL DENSITY TEST

### Test Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS

### Test Procedure

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Set EUT as normal operation.
3. Based on FCC Part15 C Section 15.247: RBW= 3KHz. VBW= 10 KHz, Span=3MHz.
4. The useful radiated emission from the EUT was detected by the spectrum analyser with peak detector.

### Measurement Equipment Used


Same as Radiated Emission Measurement

### Test Result


**PASS**

TX 802.11b Mode			
Frequency	Power Density (dBm/3KHz)	Limit (dBm/3KHz)	Result
2412 MHz	-19.25	8	PASS
2437 MHz	-18.35	8	PASS
2462 MHz	-19.40	8	PASS


CH: 2412MHz

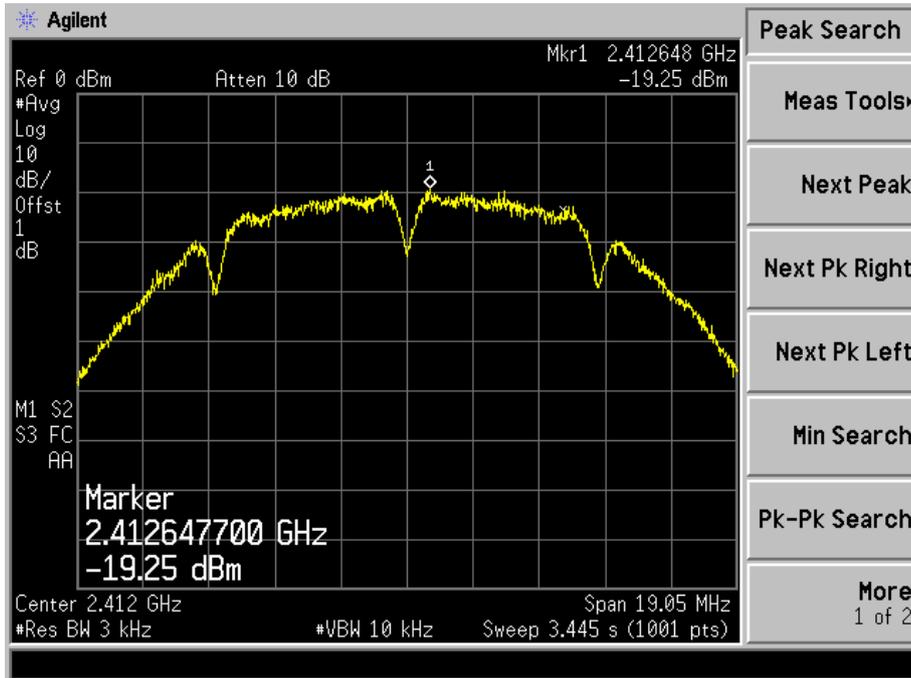

CH: 2437MHz

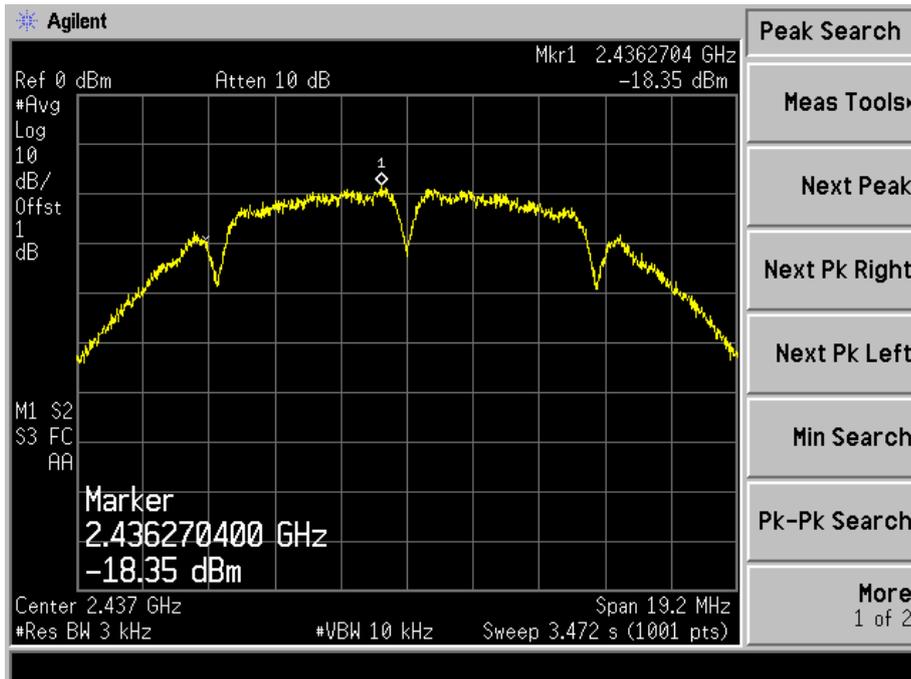


CH: 2462MHz

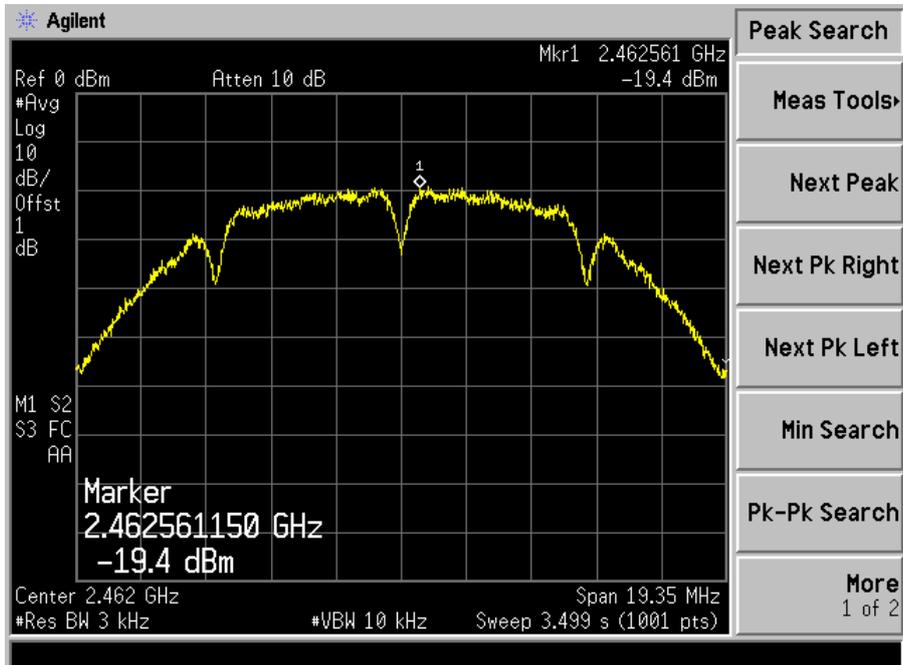


TX 802.11g Mode			
Frequency	Power Density (dBm/3KHz)	Limit (dBm/3KHz)	Result
2412 MHz	-22.20	8	PASS
2437 MHz	-21.56	8	PASS
2462 MHz	-22.90	8	PASS


CH: 2412MHz

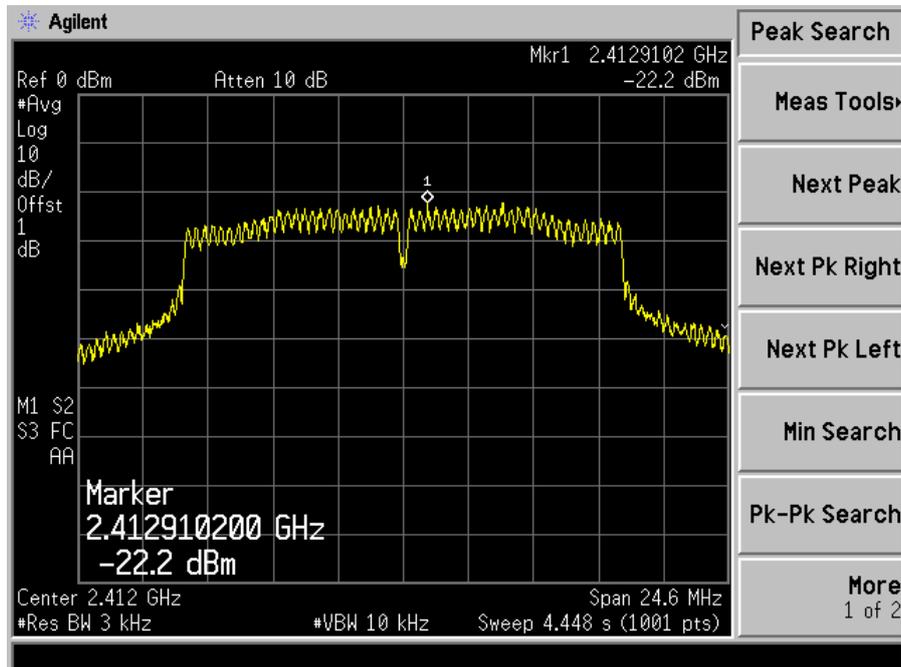

CH: 2437MHz

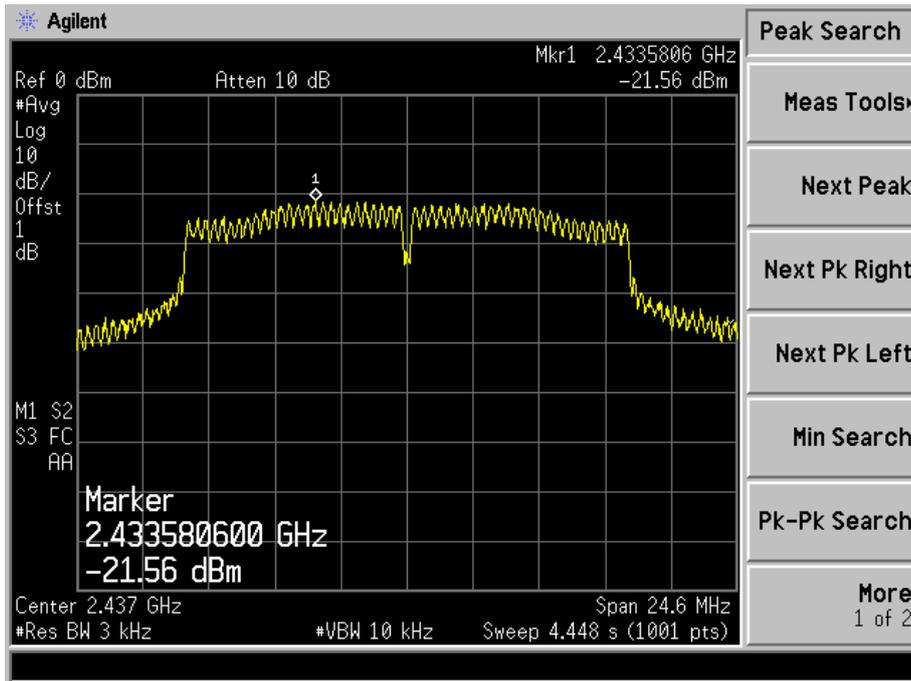


CH: 2462MHz

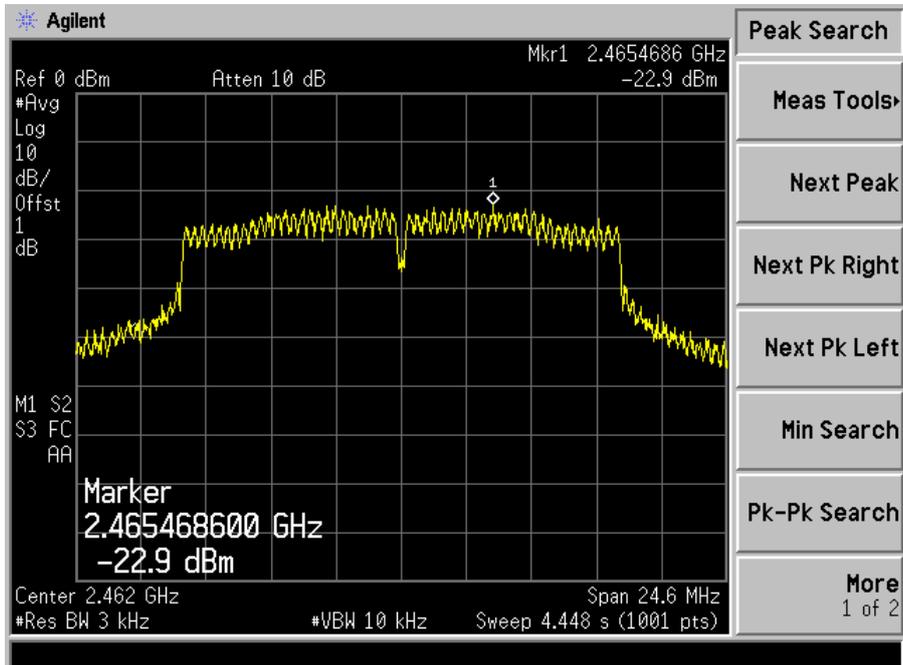


TX 802.11n/HT20 Mode			
Frequency	Power Density (dBm/3KHz)	Limit (dBm/3KHz)	Result
2412 MHz	-23.13	8	PASS
2437 MHz	-22.82	8	PASS
2462 MHz	-23.66	8	PASS


CH: 2412MHz

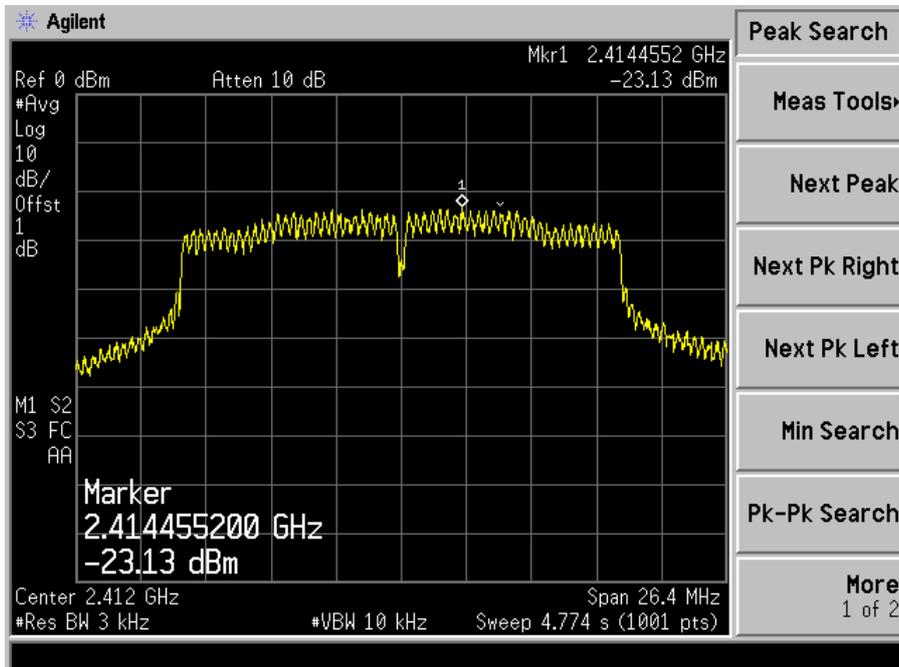

CH: 2437MHz

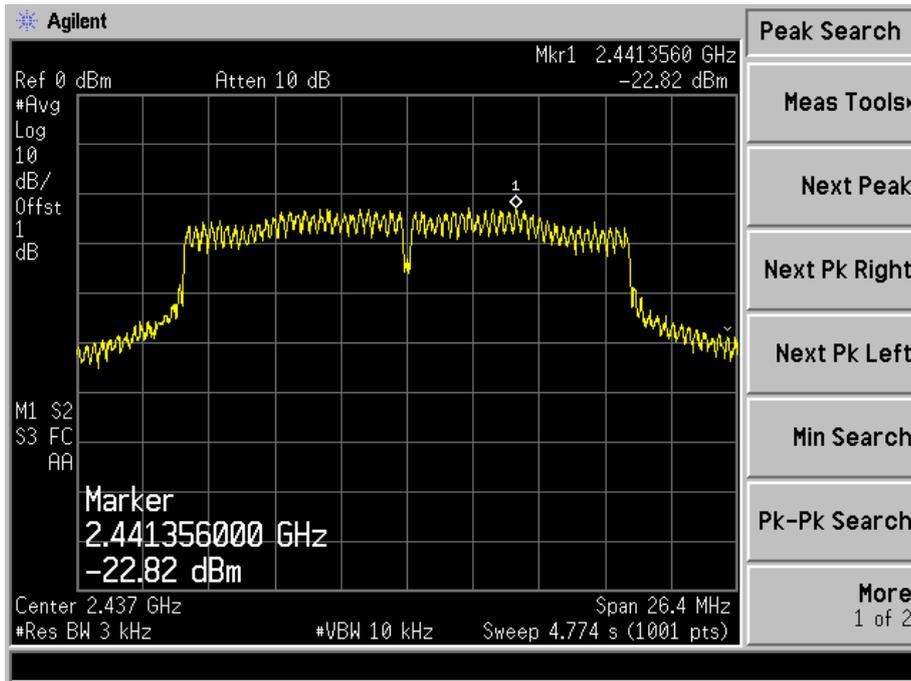


CH: 2462MHz

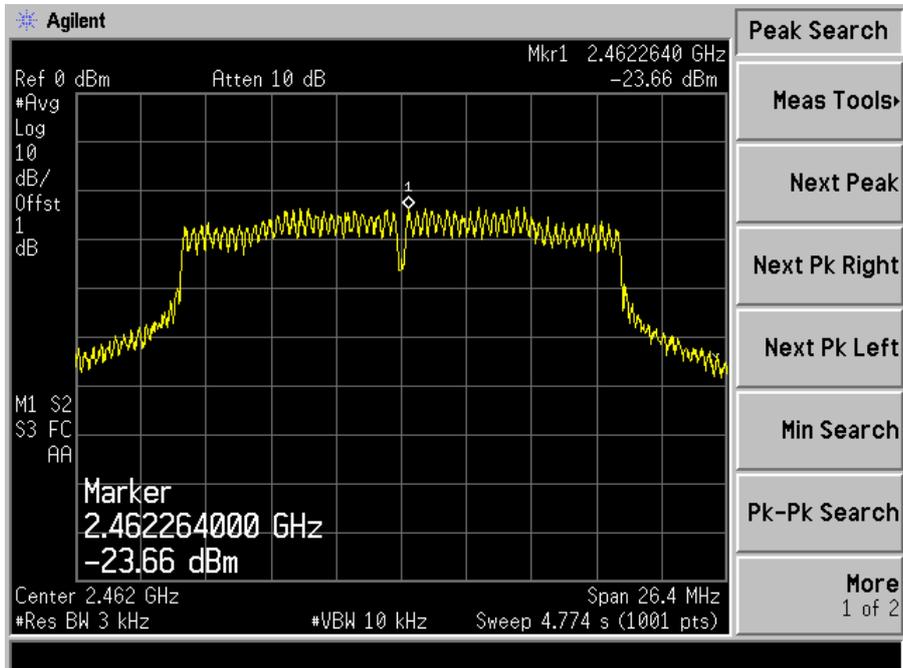


TX 802.11n/HT40 Mode			
Frequency	Power Density (dBm/3KHz)	Limit (dBm/3KHz)	Result
2422 MHz	-26.05	8	PASS
2437 MHz	-25.85	8	PASS
2452 MHz	-26.64	8	PASS


CH: 2422MHz

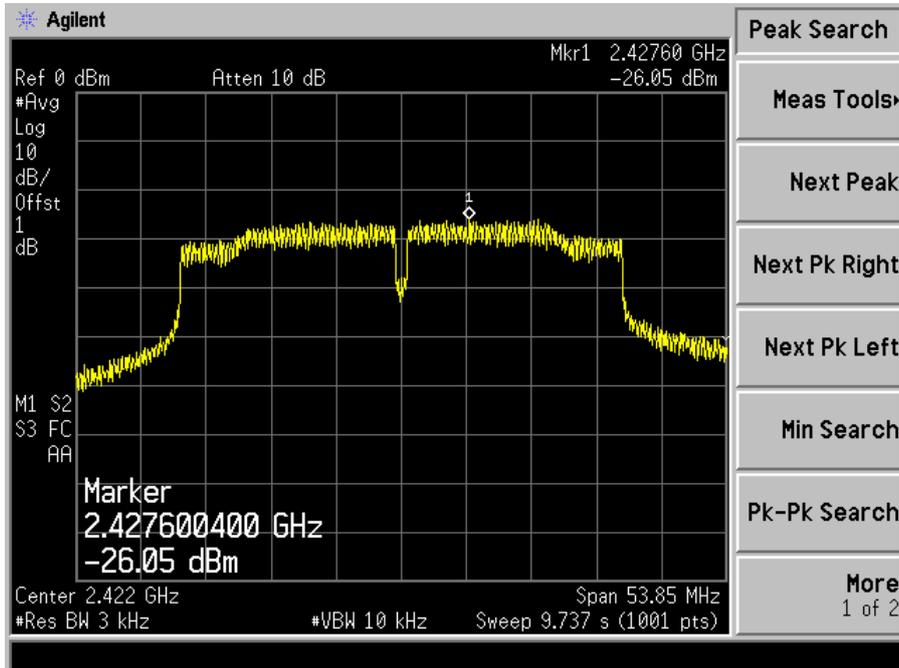

CH: 2437MHz

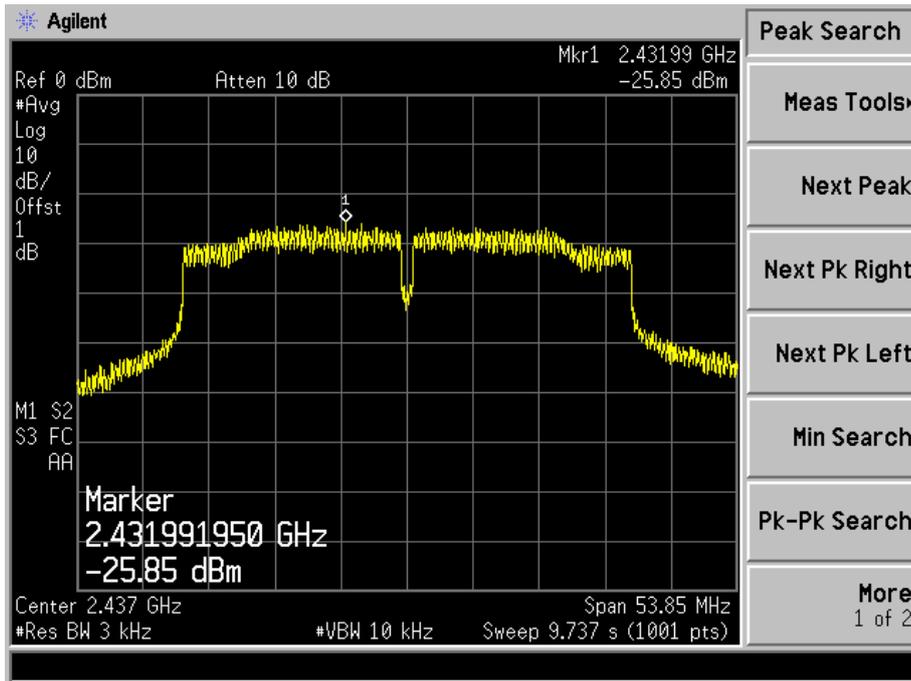

CH: 2452MHz

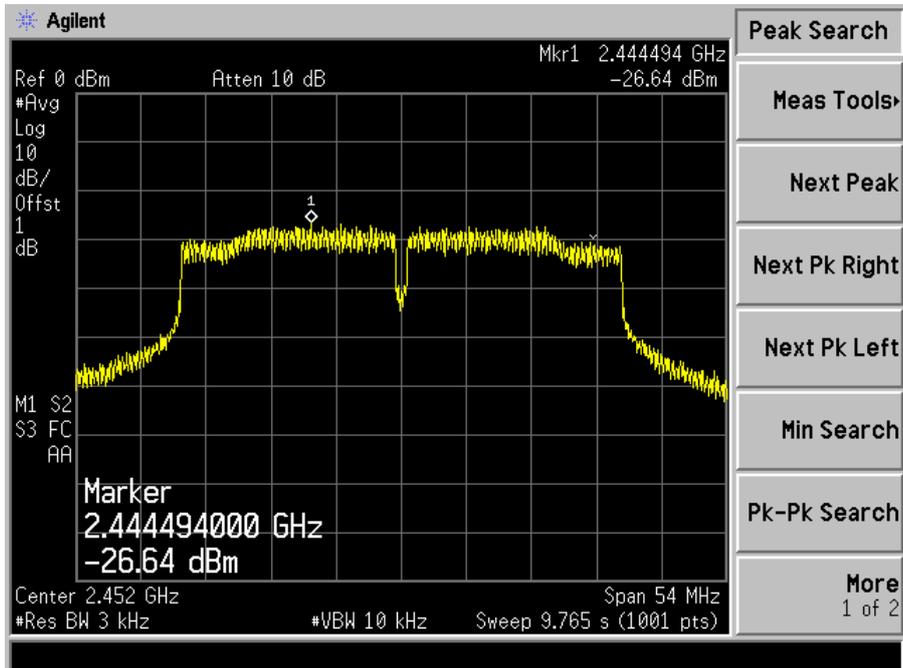

### 8 PEAK OUTPUT POWER TEST

Test Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS

Test Procedure

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. The EUT was directly connected to the Power meter.

Measurement Equipment Used

Same as Radiated Emission Measurement

Test Result

**PASS**

All the test modes completed for test.

TX 802.11b Mode			
Test Channe	Frequency (MHz)	Maximum Peak Conducted Output Power (dBm)	LIMIT dBm
CH01	2412	12.58	30
CH06	2437	12.42	30
CH11	2462	12.15	30
TX 802.11g Mode			
CH01	2412	12.17	30
CH06	2437	11.78	30
CH11	2462	11.63	30
TX 802.11n20 Mode			
CH01	2412	11.44	30
CH06	2437	11.29	30
CH11	2462	11.05	30
TX 802.11n40 Mode			
CH03	2422	12.32	30
CH06	2437	12.14	30
CH09	2452	11.88	30

## 9 OUT OF BAND EMISSIONS TEST


### Test Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

### Test Procedure

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Set EUT as TX operation and connect directly to the spectrum analyzer.
3. Set spectrum analyzer RBW= 100KHz. VBW= 300 KHz
4. Set detected by the spectrum analyser with peak detector.

### Test Setup

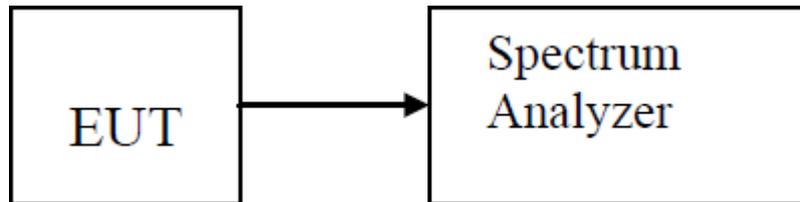


### Test Result


**PASS**

TX 802.11b Mode

Lowest

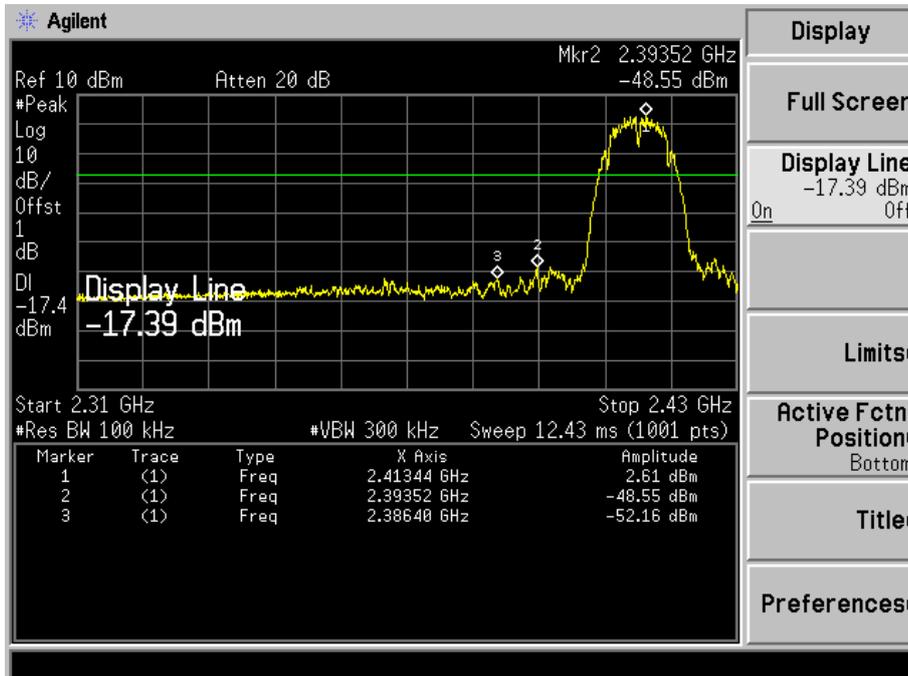


Highest

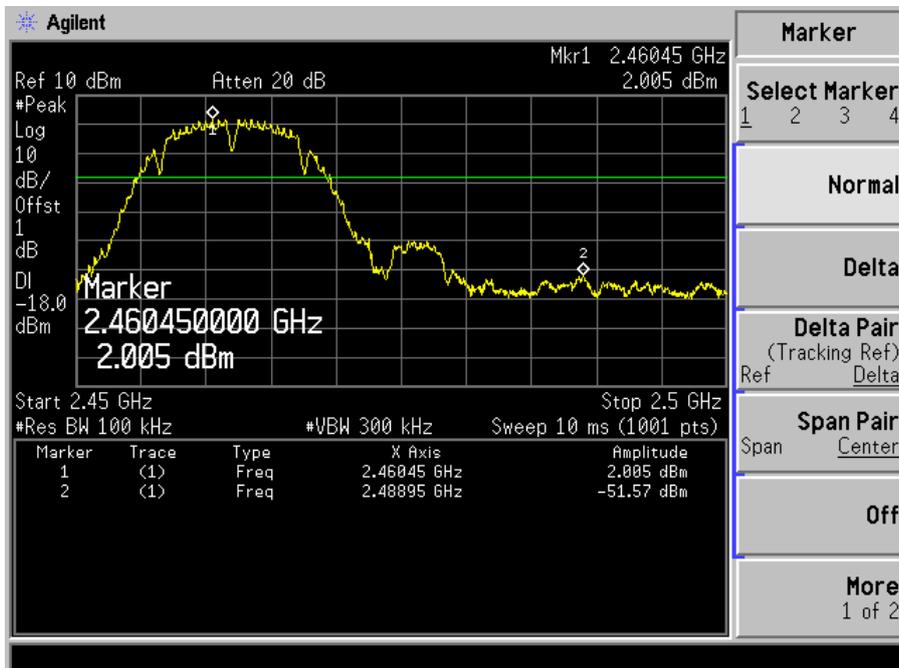


### TX 802.11g Mode

Lowest

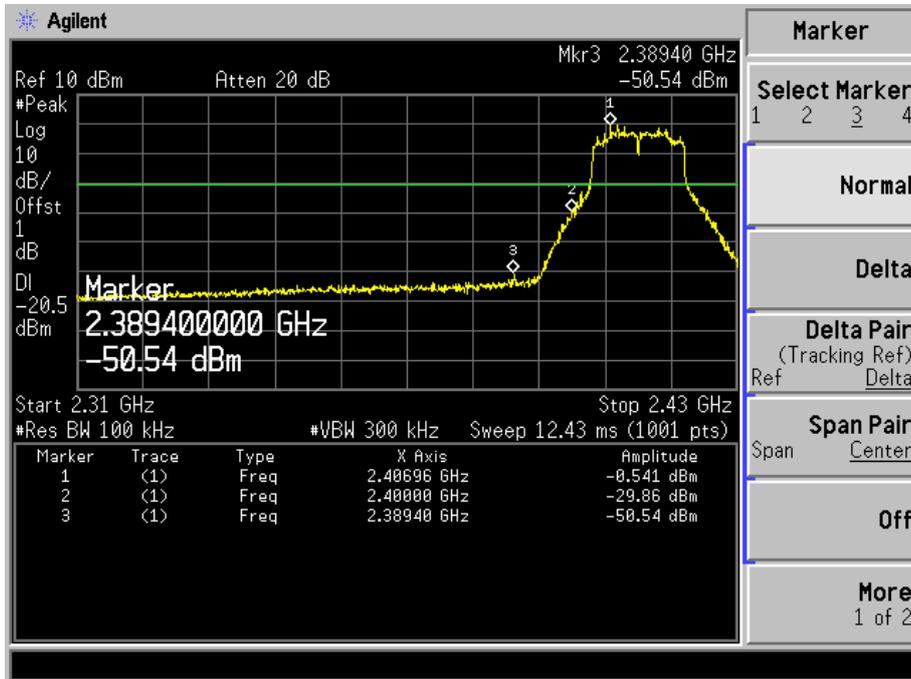


Highest

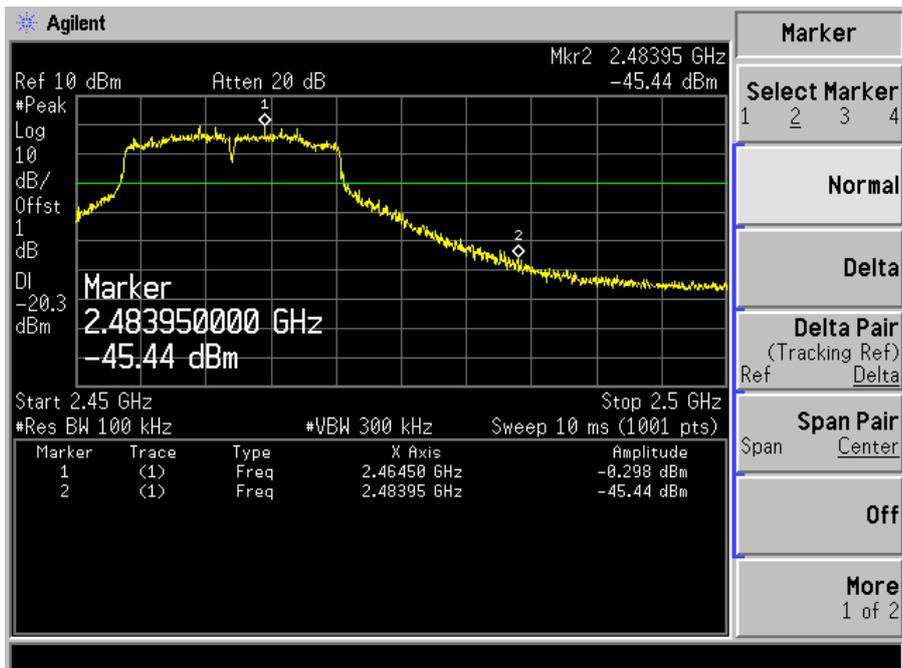


TX 802.11n/HT20 Mode

Lowest

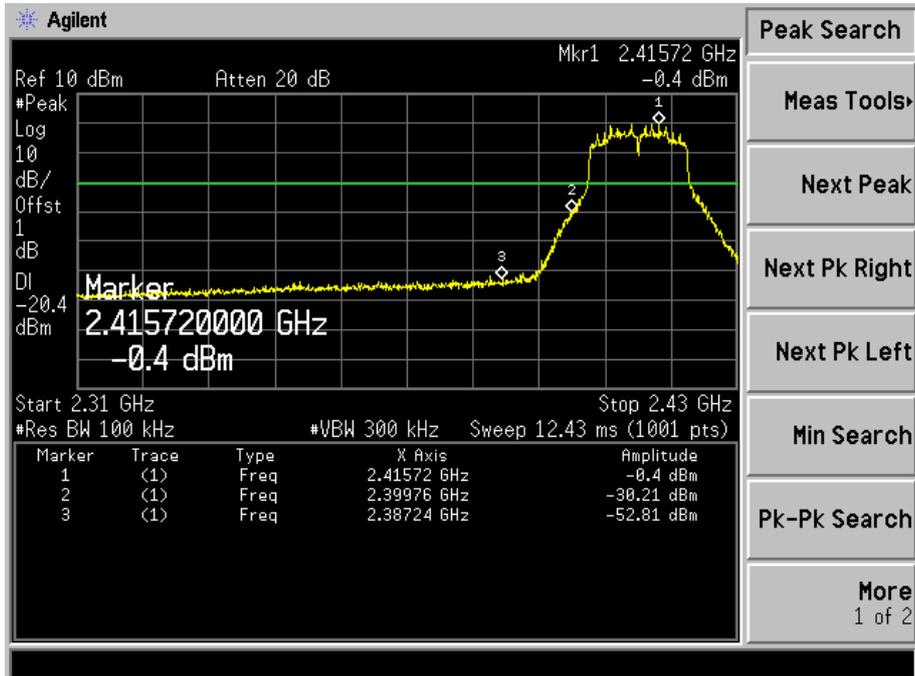


Highest

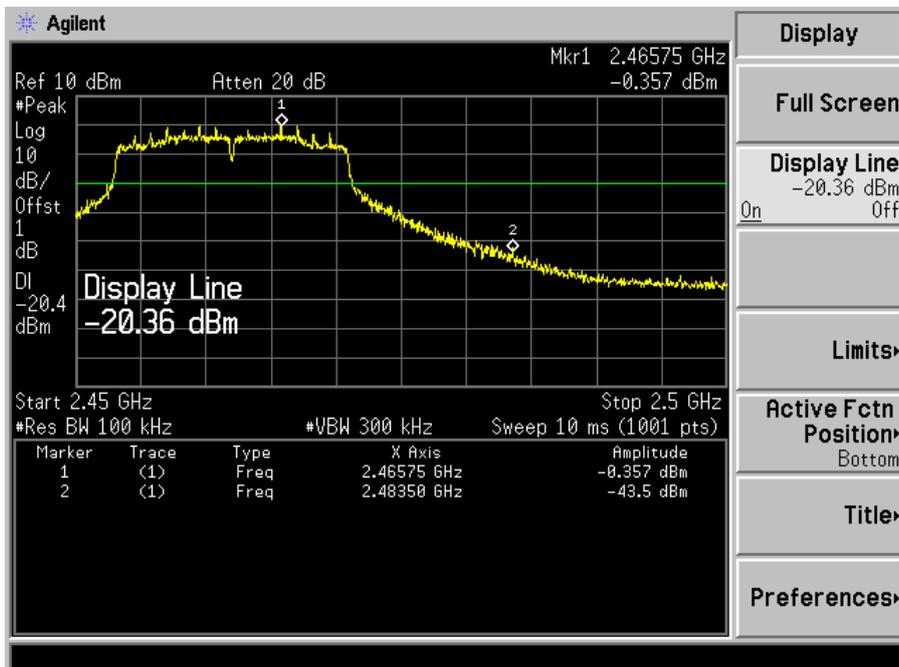


### TX 802.11n/HT40 Mode

Lowest

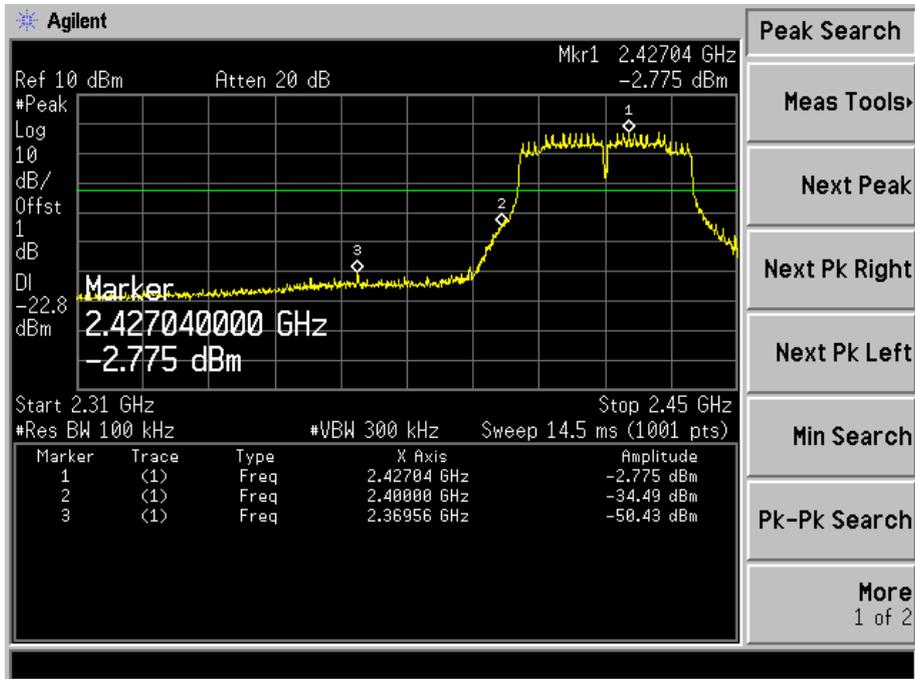

Highest

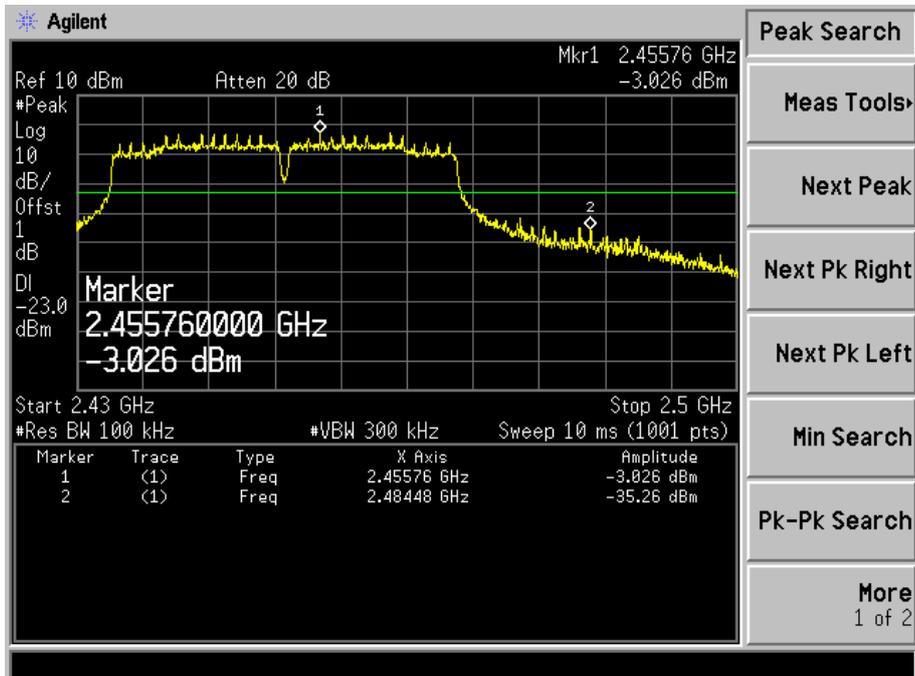

## 10 ANTENNA REQUIREMENT

### Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.249, if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.


### Refer to statement below for compliance.

The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

### Antenna Connected Construction

The antenna used in this product is a Integral Antenna, The directional gains of antenna used for transmitting is 1dBi.

### Antenna

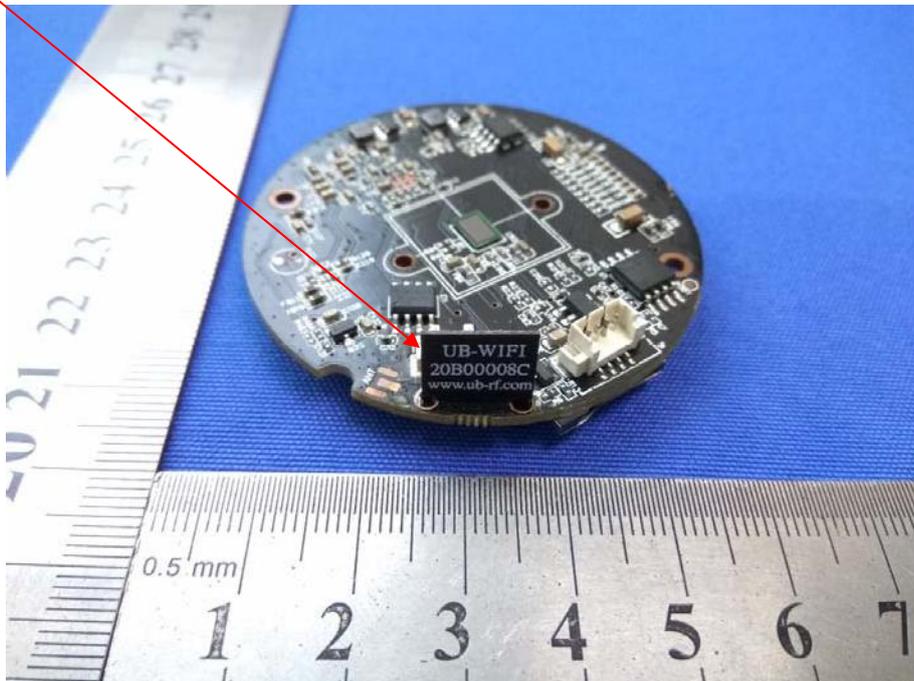

### 11 PHOTOGRAPH OF TEST

#### Radiated Emission



### Conducted Emission

