

TEST REPORT

FCC ID: 2APAURWK-01

Product: Wireless keyboard

Model No.: RWK-01

**Additional Model: MA-118-A, RWK-02, RWK-03, RWK-04, RWK-05, RWK-06,
RWK-07, RWK-08, RWK-09, PCA2-1008-PP1**

Trade Mark: N/A

Report No.: TCT180315E028

Issued Date: Mar. 22, 2018

Issued for:

**Shenzhen Iragile Electronics Co., Ltd.
4F, Building 5, Changfeng Industrial Park, Dongkeng Village, Gongming
Town, Guangming New District, Shenzhen, 518106 China**

Issued By:

**Shenzhen Tongce Testing Lab.
1B/F., Building 1, Yibaolai Industrial Park, Qiaotou, Fuyong, Baoan District,
Shenzhen, Guangdong, China
TEL: +86-755-27673339
FAX: +86-755-27673332**

Note: This report shall not be reproduced except in full, without the written approval of Shenzhen Tongce Testing Lab.

**This document may be altered or revised by Shenzhen Tongce Testing Lab. personnel only, and shall be noted in
the revision section of the document. The test results in the report only apply to the tested sample.**

TABLE OF CONTENTS

1. Test Certification	3
2. Test Result Summary	4
3. EUT Description.....	5
4. General Information.....	7
4.1. Test Environment and Mode	7
4.2. Description of Support Units	7
5. Facilities and Accreditations	8
5.1. Facilities	8
5.2. Location.....	8
5.3. Measurement Uncertainty	8
6. Test Results and Measurement Data	9
6.1. Antenna Requirement	9
6.2. Conducted Emission.....	10
6.3. Radiated Emission Measurement.....	14
6.4. 20dB Occupied Bandwidth.....	23

Appendix A: Photographs of Test Setup**Appendix B: Photographs of EUT**

1. Test Certification

Product:	Wireless keyboard
Model No.:	RWK-01
Additional Model:	MA-118-A, RWK-02, RWK-03, RWK-04, RWK-05, RWK-06, RWK-07, RWK-08, RWK-09, PCA2-1008-PP1
Trade Mark:	N/A
UPC CODE	805106217884
Applicant:	Shenzhen Iragile Electronics Co., Ltd.
Address:	4F, Building 5, Changfeng Industrial Park, Dongkeng Village, Gongming Town, Guangming New District, Shenzhen, 518106 China
Manufacturer:	Shenzhen Iragile Electronics Co., Ltd.
Address:	4F, Building 5, Changfeng Industrial Park, Dongkeng Village, Gongming Town, Guangming New District, Shenzhen, 518106 China
Date of Test:	Mar. 16, 2018 – Mar. 21, 2018
Applicable Standards:	FCC CFR Title 47 Part 15 Subpart C Section 15.249

The above equipment has been tested by Shenzhen Tongce Testing Lab. and found compliance with the requirements set forth in the technical standards mentioned above. The results of testing in this report apply only to the product/system, which was tested. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Tested By:

Garen

Date: Mar. 21, 2018

Garen

Reviewed By:

Beryl Zhao

Date: Mar. 22, 2018

Beryl Zhao

Approved By:

Tomsin

Date: Mar. 22, 2018

Tomsin

2. Test Result Summary

Requirement	CFR 47 Section	Result
Antenna Requirement	§15.203	PASS
AC Power Line Conducted Emission	§15.207	N/A
Field Strength of Fundamental	§15.249 (a)	PASS
Spurious Emissions	§15.249 (a) (d)/ §15.209	PASS
Band Edge	§15.249 (d)/ §15.205	PASS
20dB Occupied Bandwidth	§15.215 (c)	PASS

Note:

1. Pass: Test item meets the requirement.
2. Fail: Test item does not meet the requirement.
3. N/A: Test case does not apply to the test object.
4. The test result judgment is decided by the limit of test standard.

3. EUT Description

Product:	Wireless keyboard
Model No.:	RWK-01
Additional Model:	MA-118-A, RWK-02, RWK-03, RWK-04, RWK-05, RWK-06, RWK-07, RWK-08, RWK-09, PCA2-1008-PP1
UPC CODE	805106217884
Trade Mark:	N/A
Hardware Version:	DLSKB136-2.4G V1.3
Software Version:	2018_01_05_136HYX8368_keyboard_0714_0332_5.3_BI AO
Operation Frequency:	2405MHz - 2470MHz
Number of Channel:	34
Modulation Technology:	GFSK
Antenna Type:	Integral PCB Antenna
Antenna Gain:	0dBi
Power Supply:	DC 3V (AAA 1.5V*2 Battery)
Remark:	All models above are identical in interior structure, electrical circuits and components, and just model names are different for the marketing requirement.

Operation Frequency Each of Channel

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2405MHz	11	2424MHz	21	2444MHz	31	2464MHz
2	2406MHz	12	2426MHz	22	2446MHz	32	2466MHz
3	2408MHz	13	2428MHz	23	2448MHz	33	2468MHz
4	2410MHz	14	2430MHz	24	2450MHz	34	2470MHz
5	2412MHz	15	2432MHz	25	2452MHz		
6	2414MHz	16	2434MHz	26	2454MHz		
7	2416MHz	17	2436MHz	27	2456MHz		
8	2418MHz	18	2438MHz	28	2458MHz		
9	2420MHz	19	2440MHz	29	2460MHz		
10	2422MHz	20	2442MHz	30	2462MHz		

Remark: Channel 1, 14 and 34 are selected to perform the tests.

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The lowest channel	2405MHz
The middle channel	2430MHz
The Highest channel	2470MHz

4. General Information

4.1. Test Environment and Mode

Operating Environment:	
Temperature:	25.0 °C
Humidity:	54 % RH
Atmospheric Pressure:	1010 mbar
Test Mode:	
Engineering mode:	Keep the EUT in continuous transmitting by select channel
<p>The sample was placed (0.8m below 1GHz, 1.5m above 1GHz) above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.</p>	

4.2. Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Equipment	Model No.	Serial No.	FCC ID	Trade Name
/	/	/	/	/

Note:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

5. Facilities and Accreditations

5.1. Facilities

The test facility is recognized, certified, or accredited by the following organizations:

- FCC - Registration No.: 645098

Shenzhen Tongce Testing Lab

The 3m Semi-anechoic chamber has been registered and fully described in a report with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.

- IC - Registration No.: 10668A-1

The 3m Semi-anechoic chamber of Shenzhen TCT Testing Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing

5.2. Location

Shenzhen Tongce Testing Lab

Address: 1B/F., Building 1, Yibaolai Industrial Park, Qiaotou, Fuyong, Baoan District, Shenzhen, Guangdong, China

TEL: +86-755-27673339

5.3. Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	MU
1	Conducted Emission	$\pm 2.56\text{dB}$
2	RF power, conducted	$\pm 0.12\text{dB}$
3	Spurious emissions, conducted	$\pm 0.11\text{dB}$
4	All emissions, radiated(<1GHz)	$\pm 3.92\text{dB}$
5	All emissions, radiated(>1GHz)	$\pm 4.28\text{dB}$
6	Temperature	$\pm 0.1^\circ\text{C}$
7	Humidity	$\pm 1.0\%$


6. Test Results and Measurement Data

6.1. Antenna Requirement

Standard requirement:	FCC Part15 C Section 15.203
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
E.U.T Antenna:	
The EUT antenna is integral PCB antenna which permanently attached, and the best case gain of the antenna is 0dBi.	

6.2. Conducted Emission

6.2.1. Test Specification

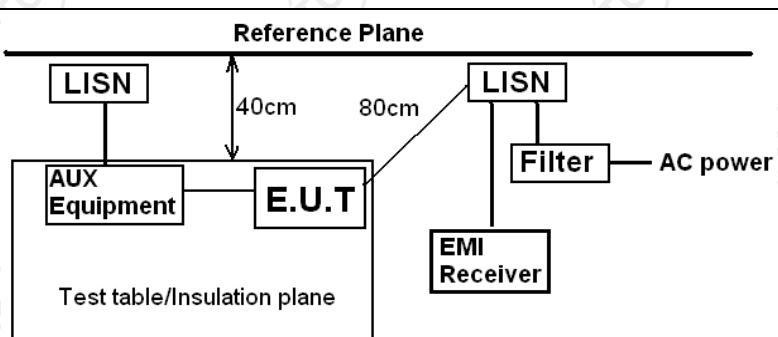Test Requirement:	FCC Part15 C Section 15.207														
Test Method:	ANSI C63.10:2013														
Frequency Range:	150 kHz to 30 MHz														
Receiver setup:	RBW=9 kHz, VBW=30 kHz, Sweep time=auto														
Limits:	<table border="1"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th> <th colspan="2">Limit (dBuV)</th> </tr> <tr> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56*</td> <td>56 to 46*</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table>	Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)														
	Quasi-peak	Average													
0.15-0.5	66 to 56*	56 to 46*													
0.5-5	56	46													
5-30	60	50													
Test Setup:	 <p><i>Remark:</i> E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m</p>														
Test Mode:	Transmitting mode with modulation														
Test Procedure:	<ol style="list-style-type: none"> 1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement. 														
Test Result:	PASS														

6.2.2. Test Instruments


Conducted Emission Shielding Room Test Site (843)				
Equipment	Manufacturer	Model	Serial Number	Calibration Due
Test Receiver	R&S	ESPI	101401	Jun. 12, 2018
LISN	Schwarzbeck	NSLK 8126	8126453	Sep. 27, 2018
Coax cable (9KHz-30MHz)	TCT	CE-05	N/A	Sep. 27, 2018
EMI Test Software	Shurples Technology	EZ-EMC	N/A	N/A

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

6.2.3. Test data

Please refer to following diagram for individual

Conducted Emission on Line Terminal of the power line (150 kHz to 30MHz)

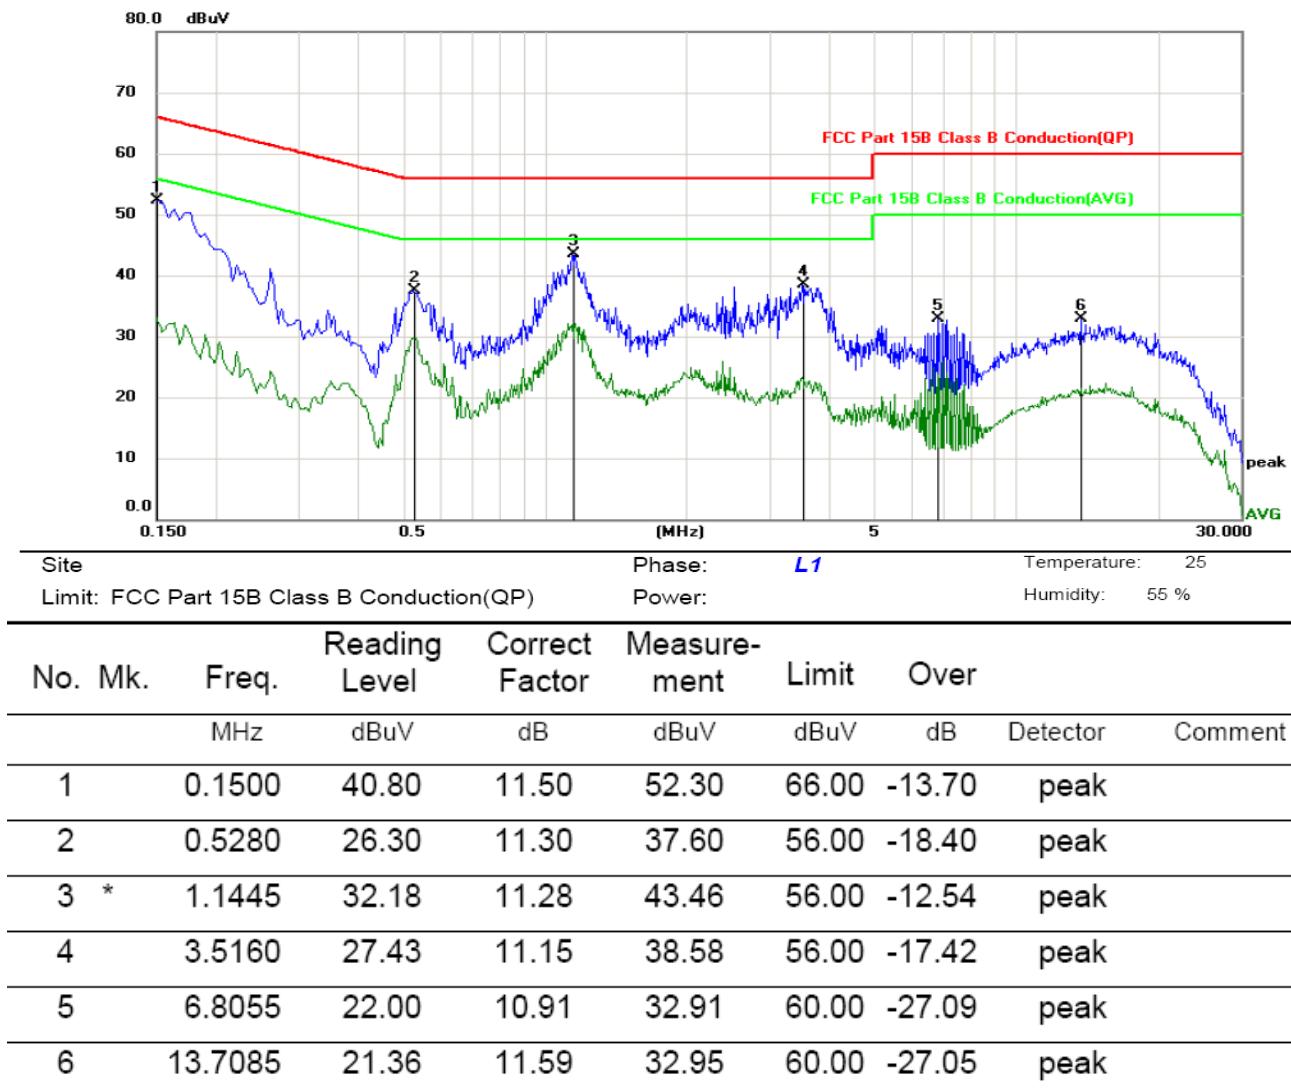

Note:

Freq. = Emission frequency in MHz

Reading level (dB μ V) = Receiver reading

Corr. Factor (dB) = LISN factor + Cable loss

Measurement (dB μ V) = Reading level (dB μ V) + Corr. Factor (dB)

Limit (dB μ V) = Limit stated in standard


Margin (dB) = Measurement (dB μ V) – Limits (dB μ V)

Q.P. = Quasi-Peak

AVG = average

* is meaning the worst frequency has been tested in the frequency range 150 kHz to 30MHz

Conducted Emission on Neutral Terminal of the power line (150 kHz to 30MHz)

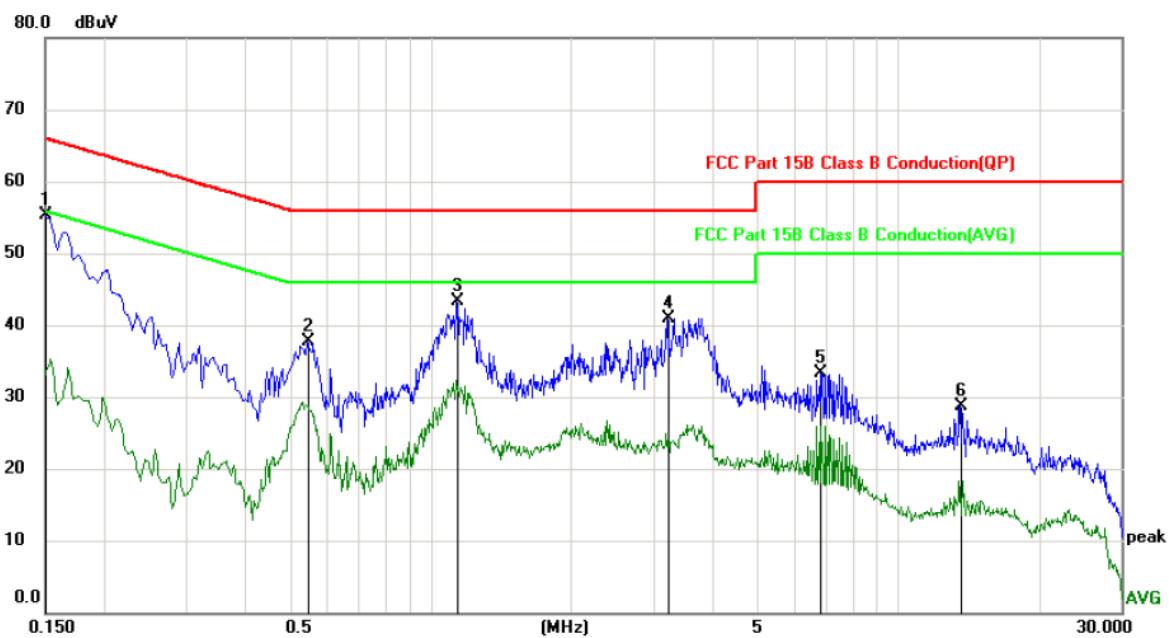

Site		Phase: <i>N</i>		Temperature: 25			
Limit: FCC Part 15B Class B Conduction(QP)		Power:		Humidity: 55 %			
No.	Mk.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV	dB	Detector
1	*	0.1500	43.79	11.50	55.29	66.00	-10.71
2		0.5460	26.39	11.29	37.68	56.00	-18.32
3		1.1400	32.06	11.28	43.34	56.00	-12.66
4		3.2235	29.70	11.26	40.96	56.00	-15.04
5		6.8055	22.48	10.91	33.39	60.00	-26.61
6		13.6095	17.13	11.57	28.70	60.00	-31.30

Note1:

Freq. = Emission frequency in MHz

Reading level (dB μ V) = Receiver reading

Corr. Factor (dB) = LISN factor + Cable loss

Measurement (dB μ V) = Reading level (dB μ V) + Corr. Factor (dB)

Limit (dB μ V) = Limit stated in standard

Margin (dB) = Measurement (dB μ V) – Limits (dB μ V)



Q.P. =Quasi-Peak AVG =average


* is meaning the worst frequency has been tested in the frequency range 150 kHz to 30MHz.

6.3. Radiated Emission Measurement

6.3.1. Test Specification

Test Requirement:	FCC Part15 C Section 15.209								
Test Method:	ANSI C63.10:2013								
Frequency Range:	9 kHz to 25 GHz								
Measurement Distance:	3 m								
Antenna Polarization:	Horizontal & Vertical								
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark				
	9kHz- 150kHz	Quasi-peak	200Hz	1kHz	Quasi-peak Value				
	150kHz- 30MHz	Quasi-peak	9kHz	30kHz	Quasi-peak Value				
	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak Value				
	Above 1GHz	Peak	1MHz	3MHz	Peak Value				
		Peak	1MHz	10Hz	Average Value				
Limit(Field strength of the fundamental signal):	Frequency	Limit (dBuV/m @3m)		Remark					
	2400MHz-2483.5MHz	94.00		Average Value					
		114.00		Peak Value					
Limit(Spurious Emissions):	Frequency	Limit (dBuV/m @3m)		Remark					
	0.009-0.490	2400/F(KHz)		Quasi-peak Value					
	0.490-1.705	24000/F(KHz)		Quasi-peak Value					
	1.705-30	30		Quasi-peak Value					
	30MHz-88MHz	40.0		Quasi-peak Value					
	88MHz-216MHz	43.5		Quasi-peak Value					
	216MHz-960MHz	46.0		Quasi-peak Value					
	960MHz-1GHz	54.0		Quasi-peak Value					
	Above 1GHz	54.0		Average Value					
		74.0		Peak Value					
Limit (band edge) :	Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.								
Test Procedure:	<ol style="list-style-type: none"> 1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber in below 1GHz, 1.5m above the ground in above 1GHz. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make 								

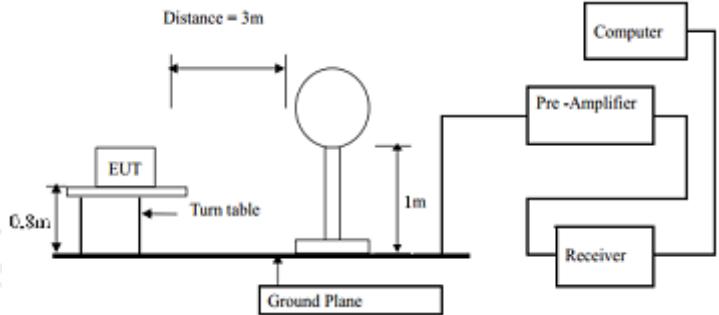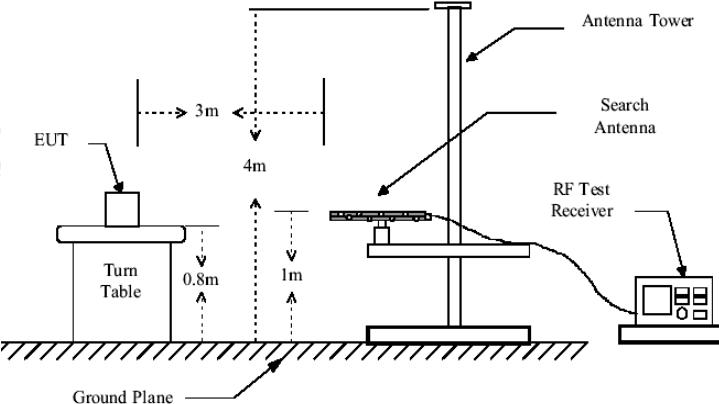	<p>the measurement.</p> <p>4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</p> <p>5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</p> <p>6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</p>
<p>Test setup:</p>	<p>For radiated emissions below 30MHz</p>  <p>30MHz to 1GHz</p>  <p>Above 1GHz</p> <p>(The diagram below shows the test setup that is utilized to make the measurements for emission from 1GHz to the tenth harmonic of the highest fundamental frequency or to 40GHz emissions, whichever is lower.)</p>

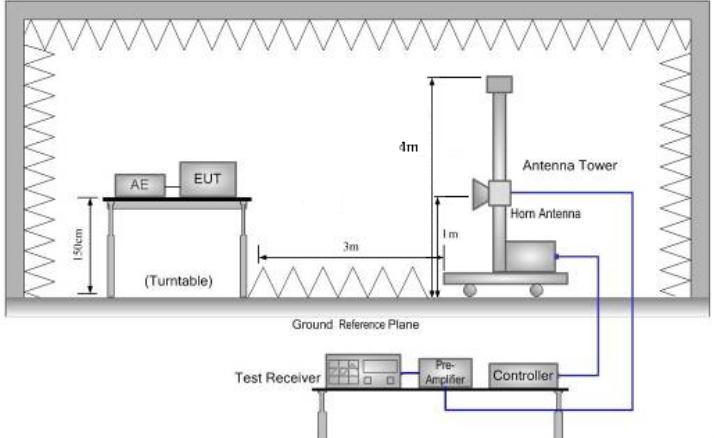	 <p>The diagram illustrates a Faraday cage test chamber for antenna testing. Inside the chamber, a turntable is positioned 1.5m from the left wall. On the turntable, an Antenna Equipment (AE) and the Equipment Under Test (EUT) are placed. The turntable is 3m from the center of the chamber. A vertical Antenna Tower is located 4m from the left wall, with a Horn Antenna mounted on top. The entire setup is positioned 1m above the Ground Reference Plane. A signal path is shown from the Antenna Tower down to a Test Receiver, which is connected to a Pre-Amplifier and a Controller.</p>
Test results:	PASS

6.3.2. Test Instruments

Radiated Emission Test Site (966)				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Test Receiver	ROHDE&SCHW ARZ	ESVD	100008	Sep. 27, 2018
Spectrum Analyzer	ROHDE&SCHW ARZ	FSQ	200061	Sep. 27, 2018
Pre-amplifier	EM Electronics Corporation CO.,LTD	EM30265	07032613	Sep. 27, 2018
Pre-amplifier	HP	8447D	2727A05017	Sep. 27, 2018
Loop antenna	ZHINAN	ZN30900A	12024	Sep. 27, 2018
Broadband Antenna	Schwarzbeck	VULB9163	340	Sep. 27, 2018
Horn Antenna	Schwarzbeck	BBHA 9120D	631	Sep. 27, 2018
Horn Antenna	Schwarzbeck	BBH 9170	582	Jun. 07, 2018
Antenna Mast	Keleto	CC-A-4M	N/A	N/A
Coax cable (9KHz-1GHz)	TCT	RE-low-01	N/A	Sep. 27, 2018
Coax cable (9KHz-40GHz)	TCT	RE-high-02	N/A	Sep. 27, 2018
Coax cable (9KHz-1GHz)	TCT	RE-low-03	N/A	Sep. 27, 2018
Coax cable (9KHz-40GHz)	TCT	RE-high-04	N/A	Sep. 27, 2018
EMI Test Software	Shurples Technology	EZ-EMC	N/A	N/A

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

6.3.3. Test Data

Field Strength of Fundamental

Frequency (MHz)	Emission PK/AV (dBuV/m)	Horizontal /Vertical	Limits PK/AV (dBuV/m)	Margin (dB)
2405	88.62(PK)	H	114/94	-25.38
2405	75.68(AV)	H	114/94	-18.32
2430	87.11(PK)	H	114/94	-26.89
2430	74.63(AV)	H	114/94	-19.37
2470	85.83(PK)	H	114/94	-28.17
2470	71.95(AV)	H	114/94	-22.05
2405	88.22(PK)	V	114/94	-25.78
2405	76.77(AV)	V	114/94	-17.23
2430	86.61(PK)	V	114/94	-27.39
2430	76.56(AV)	V	114/94	-17.44
2470	87.76(PK)	V	114/94	-26.24
2470	75.12(AV)	V	114/94	-18.88

Spurious Emissions

Frequency Range (9 kHz-30MHz)

Frequency (MHz)	Level@3m (dB μ V/m)	Limit@3m (dB μ V/m)
--	--	--
--	--	--
--	--	--
--	--	--

Note: 1. Emission Level=Reading+ Cable loss-Antenna factor-Amp factor

2. The emission levels are 20 dB below the limit value, which are not reported. It is deemed to comply with the requirement


Frequency Range (30MHz-1GHz)

Horizontal:



Site		Polarization: <i>Horizontal</i>				Temperature: 25		
Limit: FCC Part 15B Class B 3M Radiation		Power:				Humidity: 55 %		
No.	Mk.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree
	MHz	dB _{uV}	dB	dB _{uV/m}	dB/m	dB	Detector	cm
1	119.8556	34.93	-14.16	20.77	43.50	-22.73	peak	100
2 *	216.0240	49.29	-12.12	37.17	46.00	-8.83	peak	100
3	381.2487	41.30	-6.33	34.97	46.00	-11.03	peak	100
4	455.9058	40.01	-4.29	35.72	46.00	-10.28	peak	100
5	701.7610	36.90	0.02	36.92	46.00	-9.08	peak	100
6	798.9797	33.96	1.88	35.84	46.00	-10.16	peak	100

Vertical:

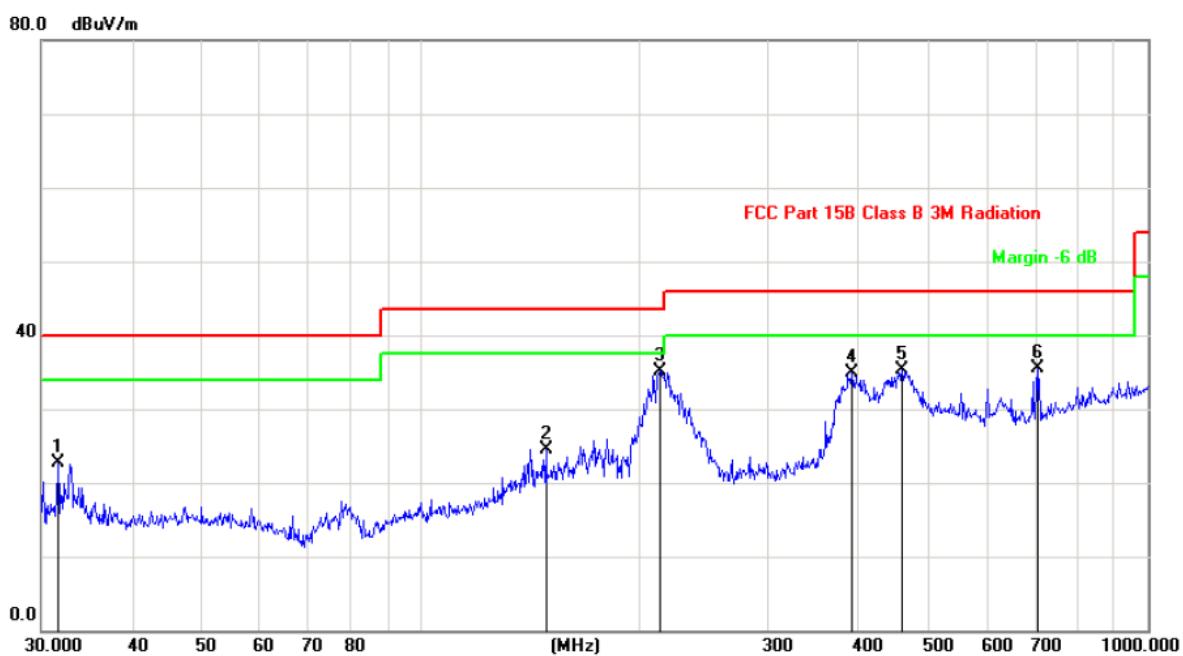

Site		Polarization: Vertical				Temperature: 25		
Limit: FCC Part 15B Class B 3M Radiation		Power:				Humidity: 55 %		
No.	Mk.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree
	MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector	cm
1	31.6202	36.27	-13.63	22.64	40.00	-17.36	peak	100
2	148.4410	40.41	-15.84	24.57	43.50	-18.93	peak	100
3 *	213.0151	47.40	-12.24	35.16	43.50	-8.34	peak	100
4	392.0951	40.96	-6.02	34.94	46.00	-11.06	peak	100
5	459.1144	39.46	-4.20	35.26	46.00	-10.74	peak	100
6	704.2261	35.43	0.06	35.49	46.00	-10.51	peak	100

Note: Measurements were conducted in all channels (high, middle, low), and the worst case (low channel) was submitted only.

Above 1GHz

Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB μ V)	AV reading (dB μ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB μ V/m)	AV limit (dB μ V/m)	Margin (dB)
					Peak (dB μ V/m)	AV (dB μ V/m)			
2387.50	H	54.61	---	-4.20	50.41	---	74.00	54.00	-3.59
2387.50	H	---	48.16	-4.20	---	43.96	74.00	54.00	-10.04
4810.00	H	52.41	---	-3.94	48.47	---	74.00	54.00	-5.53
7215.00	H	47.68	---	0.52	48.2	---	74.00	54.00	-5.8
---	---	---	---	---	---	---	---	---	---
2387.50	V	51.32	---	-4.20	47.12	---	74.00	54.00	-6.88
2387.50	V	---	49.43	-4.20	---	45.23	74.00	54.00	-8.77
4810.00	V	48.67	---	-3.94	44.73	---	74.00	54.00	-9.27
7215.00	V	45.23	---	0.52	45.75	---	74.00	54.00	-8.25
---	---	---	---	---	---	---	---	---	---

Middle channel: 2430 MHz

Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB μ V)	AV reading (dB μ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB μ V/m)	AV limit (dB μ V/m)	Margin (dB)
					Peak (dB μ V/m)	AV (dB μ V/m)			
4860.00	H	53.22	---	-3.98	49.24	---	74.00	54.00	-4.76
7290.00	H	48.87	---	0.57	49.44	---	74.00	54.00	-4.56
---	---	---	---	---	---	---	---	---	---
---	---	---	---	---	---	---	---	---	---
---	---	---	---	---	---	---	---	---	---
4860.00	V	51.14	---	-3.98	47.16	---	74.00	54.00	-6.84
7290.00	V	50.33	---	0.57	50.9	---	74.00	54.00	-3.1
---	---	---	---	---	---	---	---	---	---
---	---	---	---	---	---	---	---	---	---
---	---	---	---	---	---	---	---	---	---

High channel: 2470 MHz

Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB μ V)	AV reading (dB μ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB μ V/m)	AV limit (dB μ V/m)	Margin (dB)
					Peak (dB μ V/m)	AV (dB μ V/m)			
2483.50	H	52.02	---	-2.38	49.64	---	74.00	54.00	-4.36
2483.50	H	---	42.34	-2.38	---	39.96	74.00	54.00	-14.04
4940.00	H	50.66	---	-3.98	46.68	---	74.00	54.00	-7.32
7410.00	H	49.51	---	0.57	50.08	---	74.00	54.00	-3.92
---	---	---	---	---	---	---	---	---	---
2483.50	V	50.65	---	-2.38	48.27	---	74.00	54.00	-5.73
2483.50	V	---	43.25	-2.38	---	40.87	74.00	54.00	-13.13
4940.00	V	51.83	---	-3.98	47.85	---	74.00	54.00	-6.15
7410.00	V	48.27	---	0.57	48.84	---	74.00	54.00	-5.16
---	---	---	---	---	---	---	---	---	---

Note:

1. Emission Level=Peak Reading + Correction Factor; Correction Factor= Antenna Factor + Cable loss – Pre-amplifier
2. Margin (dB) = Emission Level (Peak) (dB μ V/m)-Average limit (dB μ V/m)
3. The emission levels of other frequencies are very lower than the limit and not show in test report.
4. Measurements were conducted from 1 GHz to the 10th harmonic of highest fundamental frequency.
5. Data of measurement shown “---” in the above table mean that the reading of emissions is attenuated more than 20 dB below the limits or the field strength is too small to be measured.

Band Edge Requirement

Low channel: 2405 MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB μ V)	AV reading (dBuV)	Correction Factor (dB/m)	Emission Level		Peak limit (dB μ V/m)	AV limit (dB μ V/m)	Margin (dB)
					Peak (dB μ V/m)	AV (dB μ V/m)			
2400	H	49.17	---	-4.2	44.97	---	74.00	---	-29.03
2400	H	---	42.51	-4.2	---	38.31	---	54.00	-15.69
---	---	---	---	---	---	---	---	---	---
2400	V	48.68	---	-4.2	44.48	---	74.00	---	-29.52
2400	V	---	39.72	-4.2	---	35.52	---	54.00	-18.48
---	---	---	---	---	---	---	---	---	---


High channel: 2470 MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB μ V)	AV reading (dBuV)	Correction Factor (dB/m)	Emission Level		Peak limit (dB μ V/m)	AV limit (dB μ V/m)	Margin (dB)
					Peak (dB μ V/m)	AV (dB μ V/m)			
2483.5	H	50.81	---	-4.2	46.61	---	74.00	---	-27.39
2483.5	H	---	41.67	-4.2	---	37.47	---	54.00	-16.53
---	---	---	---	---	---	---	---	---	---
2483.5	V	49.34	---	-4.2	45.14	---	74.00	---	-28.86
2483.5	V	---	40.88	-4.2	---	36.68	---	54.00	-17.32
---	---	---	---	---	---	---	---	---	---

Note:

1. Emission Level=Peak Reading + Correction Factor; Correction Factor= Antenna Factor + Cable loss – Pre-amplifier
2. Margin (dB) = Emission Level (Peak/Average)(dB μ V/m)-(Peak/Average) limit (dB μ V/m)
3. The emission levels of other frequencies are very lower than the limit and not show in test report.
4. Measurements were conducted from 1 GHz to the 10th harmonic of highest fundamental frequency.
5. Data of measurement shown “---”in the above table mean that the reading of emissions is attenuated more than 20 dB below the limits or the field strength is too small to be measured.

6.4.20dB Occupied Bandwidth

6.4.1. Test Specification

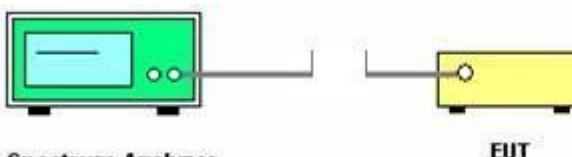Test Requirement:	FCC Part15 C Section 15.215(c)
Test Method:	ANSI C63.10: 2013
Limit:	N/A
	<ol style="list-style-type: none"> 1. According to the follow Test-setup, keep the relative position between the artificial antenna and the EUT. 2. Set to the maximum power setting and enable the EUT transmit continuously. 3. Use the following spectrum analyzer settings for 20dB Bandwidth measurement. Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel; RBW\geq1% of the 20 dB bandwidth; VBW\geqRBW; Sweep = auto; Detector function = peak; Trace = max hold. 4. Measure and record the results in the test report.
Test setup:	 <p>Spectrum Analyzer ————— EUT</p>
Test Mode:	Transmitting mode with modulation
Test results:	PASS

6.4.2. Test Instruments

RF Test Room				
Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	R&S	FSU	200054	Sep. 27, 2018


Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

6.4.3. Test data


Test Channel	20dB Occupy Bandwidth (kHz)	Limit	Conclusion
Lowest	162.66	---	PASS
Middle	150.64	---	PASS
Highest	145.83	---	PASS

Test plots as follows:


Lowest channel

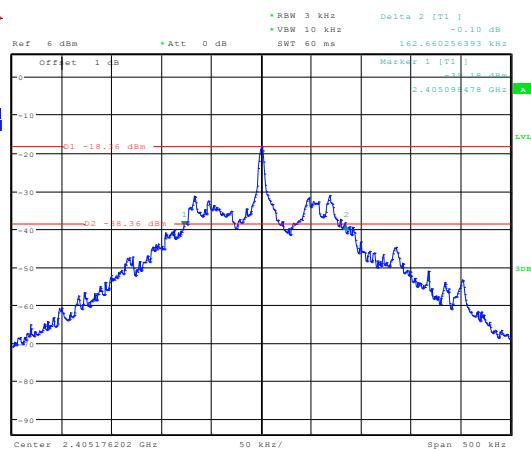

Middle channel

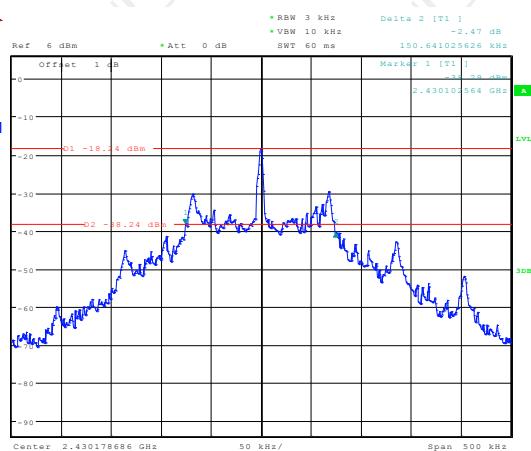

Highest channel

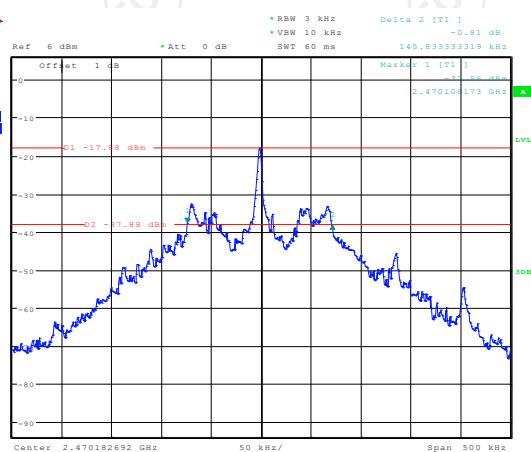



Date: 27.MAY.2011 16:10:22

Appendix A: Photographs of Test Setup

Product: Wireless keyboard

Model: RWK-01

Radiated Emission

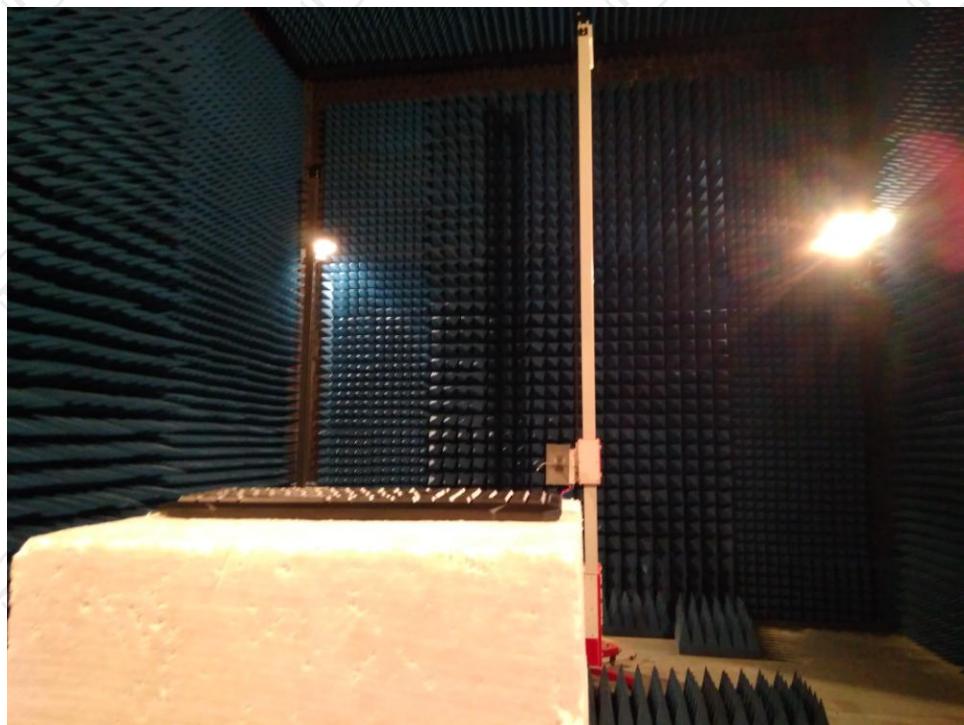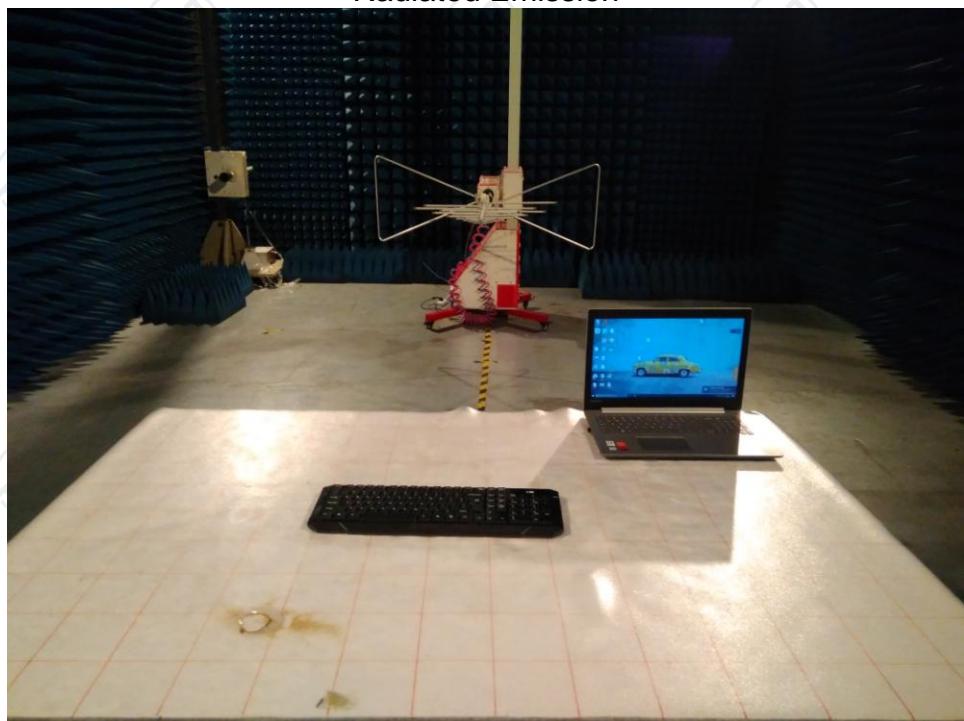

CE






Appendix B: Photographs of EUT


Product: Wireless keyboard


Model: RWK-01

External Photos

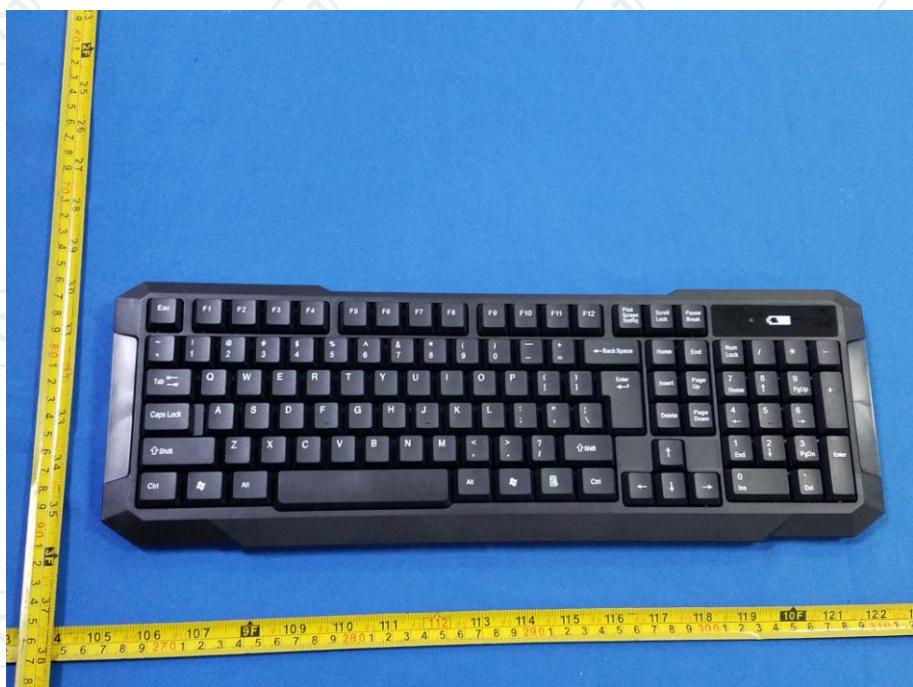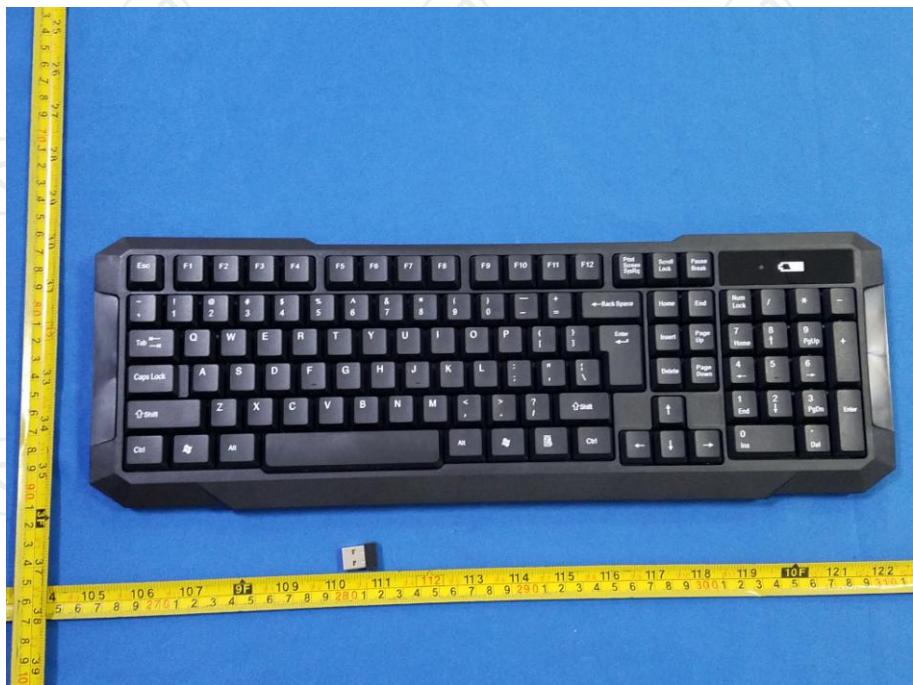

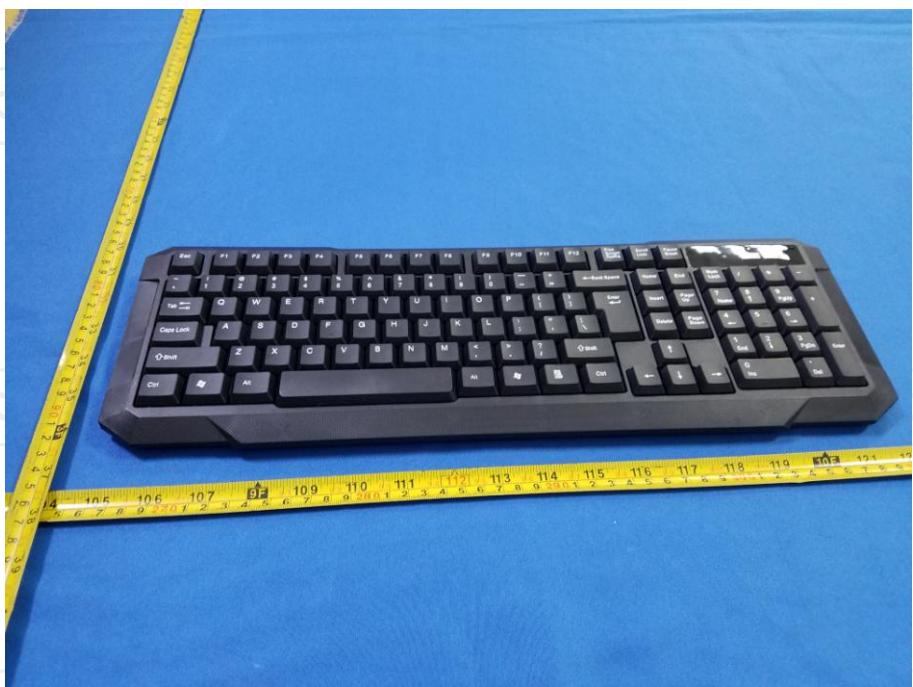

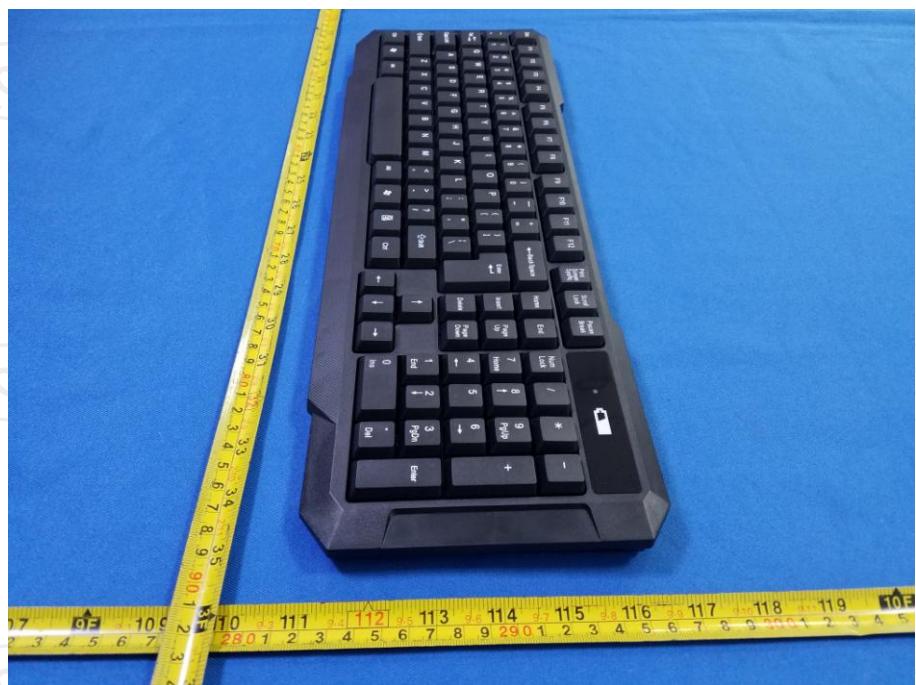


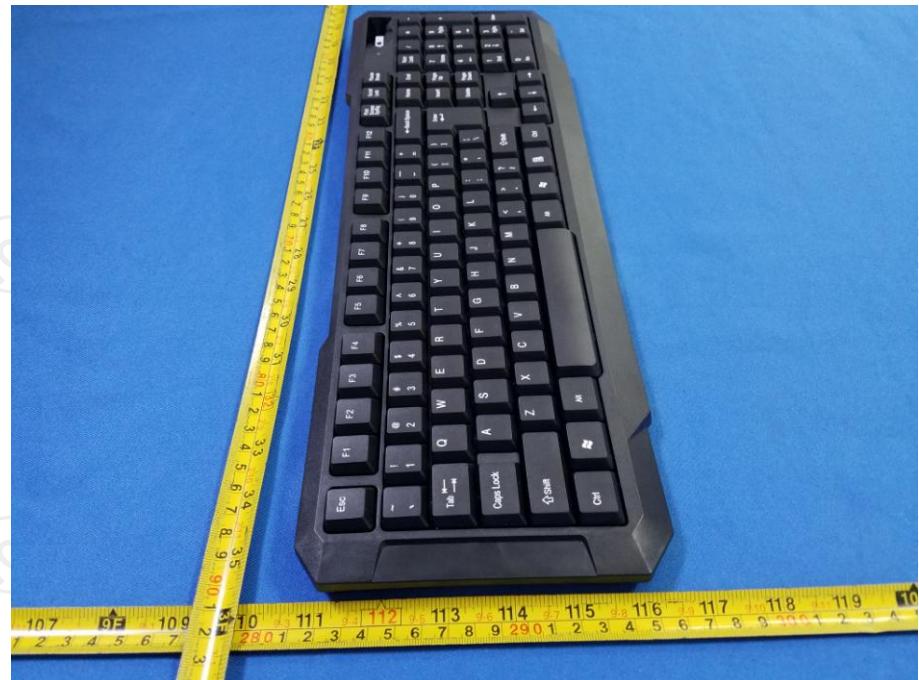


Product: Wireless keyboard

Model: RWK-01

Internal Photos



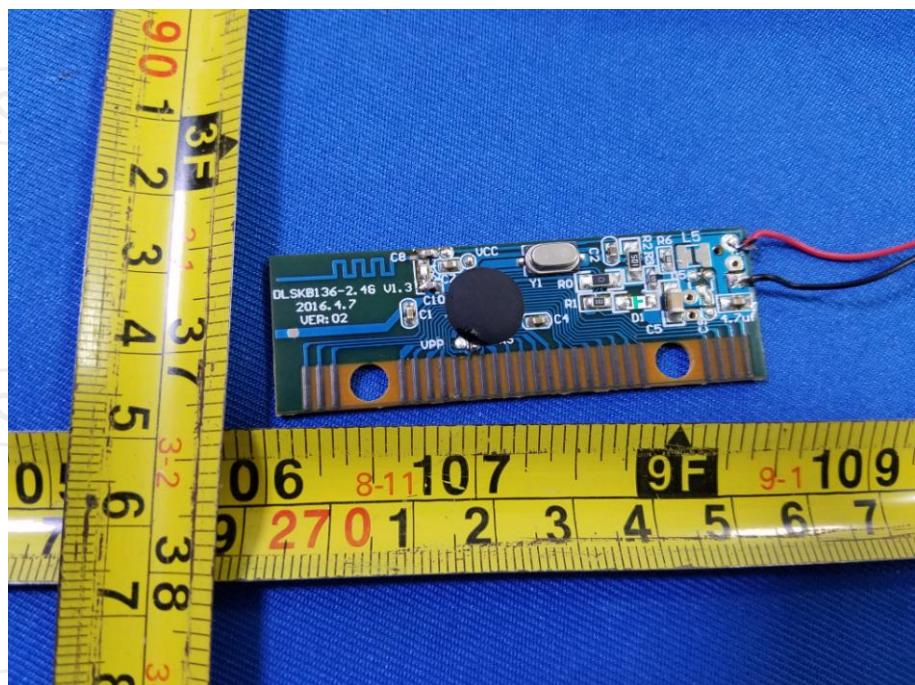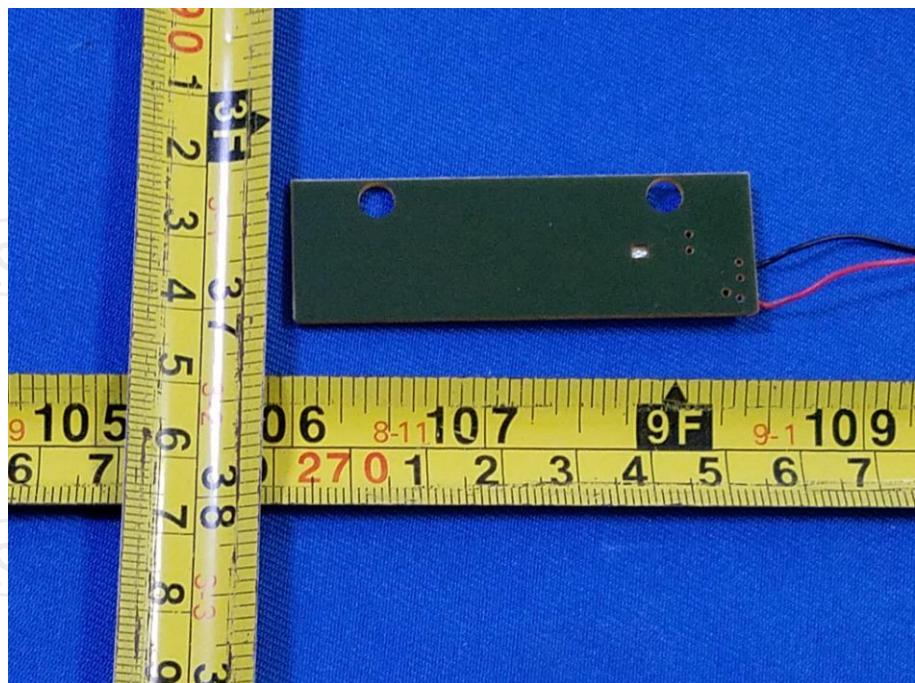

*******END OF REPORT*******