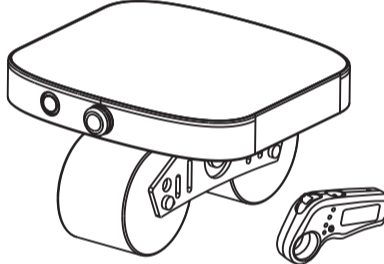
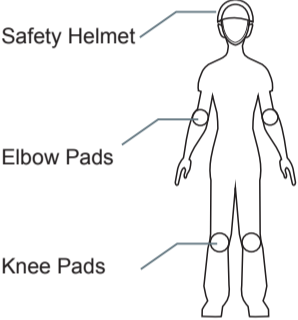
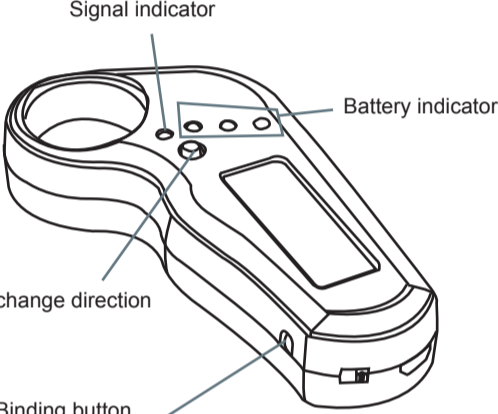
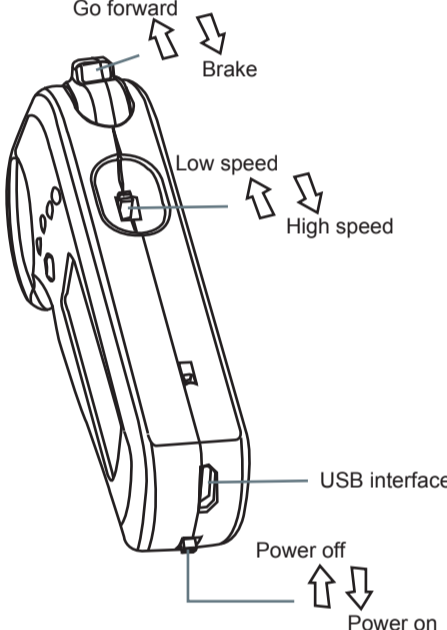
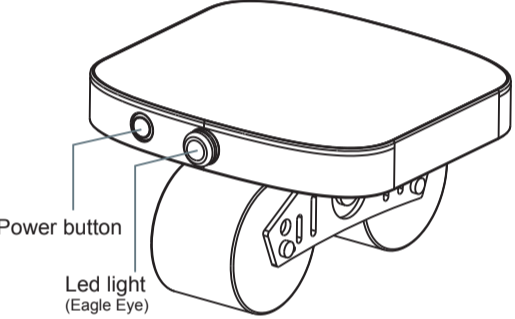


<p>FREE MAN</p> <p>Drifting Board User Manual</p> 	<p>Precautions</p>  <p>WARNING Wear safety gear and read this paper carefully before driving. In low battery state, it will automatically switch to cruise mode. No high speed and high acceleration in low battery status. Use drifting board before, Make sure that the drifting board is fully charged. Wear suitable protective gear. Pay attention to the surrounding environment, as far as possible in a safe place to drive. Please comply with local laws and regulations and use it in places where electric drift plates are allowed.</p>	<p>Remote control function</p>  <p>1. Press and hold the power button on the skateboard for about 10 seconds until the LED starts flashing. 2. Switch on the remote control and use a sharp object to press the binding button on the remote control, until the pairing LED on the remote starts flashing green, indicating successful pairing succeeded. Firstly, Press and hold the power button on the skateboard for about 10 seconds until the LED starts flashing. Secondly, Switch on the remote control and use a sharp object to press the binding button on the remote control, until the pairing LED on the remote starts flashing green, indicating successful pairing succeeded.</p>	<p>Remote control function</p> 	<p>Electric drifting board</p>  <p>Press the power button to turn on the drifting board and the eagle eye light.</p> <p>WARNING Don't move board until the beeps end (in first 5 seconds after the boot).</p>	<p>Specifications</p> <table border="1"> <tr> <td rowspan="2">Capability</td> <td>Mileage</td> <td>10Km</td> </tr> <tr> <td>Low speed mode</td> <td>10Km/h</td> </tr> <tr> <td rowspan="2">Entire board</td> <td>High speed mode</td> <td>15Km/h</td> </tr> <tr> <td>N.W.</td> <td>4.0 Kg</td> </tr> <tr> <td rowspan="2">Board</td> <td>Size</td> <td>180mm*160mm*105</td> </tr> <tr> <td>Material</td> <td>3.5mm Aluminium alloy</td> </tr> <tr> <td rowspan="4">Battery</td> <td>Capacity</td> <td>3200mAh</td> </tr> <tr> <td>Type</td> <td>29.4V Lithium battery</td> </tr> <tr> <td>Weight</td> <td>400g</td> </tr> <tr> <td>Charging time</td> <td>1.5 hours</td> </tr> <tr> <td rowspan="3">Motor</td> <td>Cycle life</td> <td>Above 1000 times</td> </tr> <tr> <td>Type</td> <td>70mm Hub Motor</td> </tr> <tr> <td>Power</td> <td>Single-motor 350w</td> </tr> <tr> <td rowspan="3">Wheel</td> <td>Material</td> <td>PU</td> </tr> <tr> <td>Size</td> <td>70mm*51mm</td> </tr> <tr> <td>Hardness</td> <td>78A</td> </tr> <tr> <td rowspan="2">Remote</td> <td>Capacity</td> <td>500mAh</td> </tr> <tr> <td>Battery type</td> <td>Lithium battery</td> </tr> <tr> <td rowspan="2">Package</td> <td>Charge time</td> <td>2 hours</td> </tr> <tr> <td>Size</td> <td>200mm*200mm*120mm</td> </tr> <tr> <td></td> <td>G.W.</td> <td>4.53KG</td> </tr> </table> <p>CE RoHS UN38.3 MSDS</p>	Capability	Mileage	10Km	Low speed mode	10Km/h	Entire board	High speed mode	15Km/h	N.W.	4.0 Kg	Board	Size	180mm*160mm*105	Material	3.5mm Aluminium alloy	Battery	Capacity	3200mAh	Type	29.4V Lithium battery	Weight	400g	Charging time	1.5 hours	Motor	Cycle life	Above 1000 times	Type	70mm Hub Motor	Power	Single-motor 350w	Wheel	Material	PU	Size	70mm*51mm	Hardness	78A	Remote	Capacity	500mAh	Battery type	Lithium battery	Package	Charge time	2 hours	Size	200mm*200mm*120mm		G.W.	4.53KG
Capability	Mileage	10Km																																																						
	Low speed mode	10Km/h																																																						
Entire board	High speed mode	15Km/h																																																						
	N.W.	4.0 Kg																																																						
Board	Size	180mm*160mm*105																																																						
	Material	3.5mm Aluminium alloy																																																						
Battery	Capacity	3200mAh																																																						
	Type	29.4V Lithium battery																																																						
	Weight	400g																																																						
	Charging time	1.5 hours																																																						
Motor	Cycle life	Above 1000 times																																																						
	Type	70mm Hub Motor																																																						
	Power	Single-motor 350w																																																						
Wheel	Material	PU																																																						
	Size	70mm*51mm																																																						
	Hardness	78A																																																						
Remote	Capacity	500mAh																																																						
	Battery type	Lithium battery																																																						
Package	Charge time	2 hours																																																						
	Size	200mm*200mm*120mm																																																						
	G.W.	4.53KG																																																						

80 X 128MM

(design): Serenity	(quantity): PCS	(model): D1	(colour):
(check):	(units): MM	(name):	(size):
(approve):	(scale): 1:1	(type):	(material):
(version): V1.0	(page): 1	(date): 2018. 2. 28	(surface finish):

FCC Notice

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

NOTE 1: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

NOTE 2: Any changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.