



Shenzhen Yingjia Chuang electronic technology Co., LTD

<http://www.szsyjc.com>

Sample acknowledgement

Supplier: Shenzhen Yingjia Chuang electronic technology Co., LTD

Item number (customer): 1011400-0039

Product specification: 915MHz black FPC built-in antenna, 1.13 black line L=95MM

Sample delivery date: 2024.08.14

Supplier audit column (official seal required)		
PREPARED	CHECKED	APPROVED
Yin feijie	Fang hanfeng	Xiao han



Shenzhen Yingjia Chuang electronic technology Co., LTD

<http://www.szsyjc.com>

APPROVAL SHEET

CUSTOMER NAME	Shenzhen Golden Vision Technology Development Co., Ltd	
CUSTOMER P/N		
PART NAME	915MHz black FPC internal antenna, 1.13 black line L=95MM	
P/ N	YJC-6N095-B47	
APPROVAL REV.	A1	
DELIVERY DATE	2024 年 08 月 14 日	
PREPARED BY	Yin feijie	
CHECKED BY	Fang wenfeng	
APPROVED BY	Xiao han	
Customer Approved		
Prepared By	Checked By	Approved By

Address: Building C, Hongyu Guangming Valley, No. 11, Youma Gang Road, Ma Tian Street, Guangming District, Shenzhen

Dongguan Branch: Yingjiachuang Industrial Park, No. 2 Yinhe 3rd Road, Shishuikou, Qiaotou Town, Dongguan City

Hangzhou Office: 212, Building B, Dahua Jianghong International Innovation Park, No. 369, Internet of Things Street, Binjiang District, Hangzhou City

Mianyang Office: No. 4F-34, Wanxiang High-tech International, No. 35, Mianxing East Road, High-tech Zone, Mianyang City, Sichuan Province

Tel: 0755-27810060

Fax: 0755-27810057

Website: <http://www.szsyjc.com>



Catalogue

1、	Cover-----	1
2、	Catalogue-----	2
3、	Res u m e -----	3
4、	Antenna plan-----	4
5、	Antenna technical parameters and environmental performance test-----	5
6、	Antenna diagram-----	6
7、	Antenna performance test diagram-----	6
8、	2D.3D（915MHz） Test data-----	7-8
9、	ROHS Bill of Material-----	9





Resume:

Edition	Content of change and reasons for change	Date	Release
A0	Initial release	2024. 08. 08	
A1	Update data	2024.8. 14	



Antenna plan:

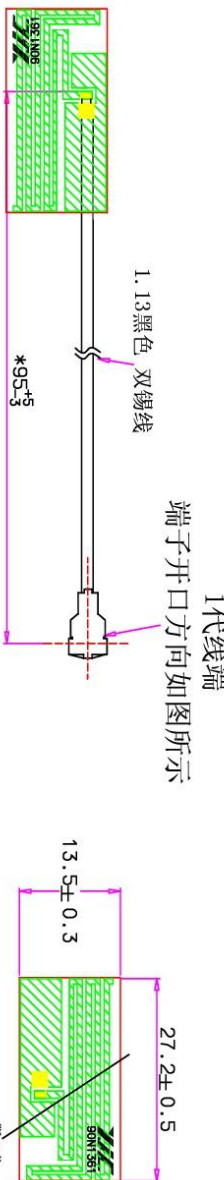A			B			C			D			E			F			G																													
1			2			3			4			5			6			1																													
																		<table border="1"><thead><tr><th>REV</th><th>DATE</th><th>DESCRIPTION</th><th>NAME</th></tr></thead><tbody><tr><td>A0</td><td>2024-08-08</td><td>新版发行</td><td>殷飞杰</td></tr><tr><td>A1</td><td></td><td></td><td></td></tr></tbody></table>			REV	DATE	DESCRIPTION	NAME	A0	2024-08-08	新版发行	殷飞杰	A1																		
REV	DATE	DESCRIPTION	NAME																																												
A0	2024-08-08	新版发行	殷飞杰																																												
A1																																															
																																															
<table border="1"><thead><tr><th>频率范围(Frequency Range)</th><td>915MHz</td></tr><tr><th>增益 (Gain)</th><td>0.97dBi</td></tr><tr><th>电压驻波比(VSWR)</th><td><1.92</td></tr><tr><th>极化 (Polarization)</th><td>Linear .Vertical</td></tr><tr><th>最大功率(Max power rating)</th><td>50W</td></tr><tr><th>特性阻抗 (Impedance)</th><td>50Ω</td></tr></thead></table>																		频率范围(Frequency Range)	915MHz	增益 (Gain)	0.97dBi	电压驻波比(VSWR)	<1.92	极化 (Polarization)	Linear .Vertical	最大功率(Max power rating)	50W	特性阻抗 (Impedance)	50Ω																		
频率范围(Frequency Range)	915MHz																																														
增益 (Gain)	0.97dBi																																														
电压驻波比(VSWR)	<1.92																																														
极化 (Polarization)	Linear .Vertical																																														
最大功率(Max power rating)	50W																																														
特性阻抗 (Impedance)	50Ω																																														
要求: 1. 成品须100%测试导通OK. 2. 成品须100%全检OK. 3. 采用环保制程. 成品 4. 符合ROHS要求. 5. 未注公差请以一般公差为准. 6. *为重点标注尺寸.																																															
 外箱须贴物料标示卡 与ROHS标签各1PCS																																															
<table border="1"><thead><tr><th>零件名称 (PART NAME)</th><th>规格 (SPEC)</th><th>单位 (UNIT)</th><th>比例 (SCALE)</th><th>版本 (REV)</th><th>数量 (SIZE)</th></tr></thead><tbody><tr><td>915MHz 黑色FPC内置天线</td><td>XD 1.13黑色线 (总长1L-95MM)</td><td>mm</td><td></td><td>YJC-6N095-B47</td><td></td></tr><tr><td>设计</td><td>IS.</td><td></td><td></td><td>第1版,共1页</td><td></td></tr><tr><td>审核</td><td>CHK.</td><td></td><td></td><td>2024-08-08</td><td></td></tr><tr><td>批准</td><td>APP.</td><td></td><td></td><td></td><td></td></tr></tbody></table>																		零件名称 (PART NAME)	规格 (SPEC)	单位 (UNIT)	比例 (SCALE)	版本 (REV)	数量 (SIZE)	915MHz 黑色FPC内置天线	XD 1.13黑色线 (总长1L-95MM)	mm		YJC-6N095-B47		设计	IS.			第1版,共1页		审核	CHK.			2024-08-08		批准	APP.				
零件名称 (PART NAME)	规格 (SPEC)	单位 (UNIT)	比例 (SCALE)	版本 (REV)	数量 (SIZE)																																										
915MHz 黑色FPC内置天线	XD 1.13黑色线 (总长1L-95MM)	mm		YJC-6N095-B47																																											
设计	IS.			第1版,共1页																																											
审核	CHK.			2024-08-08																																											
批准	APP.																																														
<table border="1"><thead><tr><th>图例</th><th>说明</th></tr></thead><tbody><tr><td></td><td>1.13mm 间距</td></tr><tr><td></td><td>0.5mm 间距</td></tr><tr><td></td><td>0.25mm 间距</td></tr><tr><td></td><td>0.125mm 间距</td></tr></tbody></table>																		图例	说明		1.13mm 间距		0.5mm 间距		0.25mm 间距		0.125mm 间距																				
图例	说明																																														
	1.13mm 间距																																														
	0.5mm 间距																																														
	0.25mm 间距																																														
	0.125mm 间距																																														
深圳市英佳创电子科技有限公司 SHENZHEN YINGJIA CHUANG ELECTRONIC CO., LTD																																															



Antenna technical parameters and environmental testing:

Electrical technical parameter	
Electrical Specifications	
Frequency Range	900-930MHz
VSWR	<1.92
Input Impedance	50 Ω
Direction	All
Gain	0.97dBi
Mechanical Specifications	
Wire Color	Black
Input connector	XD
Wire Length	95MM
Working Temperature	-20°C~+70°C
Working Humidity	20%~80%

Environmental performance test:

Item	Test condition	Specification
Storage environment	Test temperature, humidity, and air pressure without specifying the following: 1. The temperature ranges from -20°C to +70°C 2. Relative humidity is 45%-85% 3. Air pressure is 86kpa-106kpa	Electrical and mechanical properties are normal
High and low temperature test	The appearance quality is checked after 5 cycles between 70 ° C and -20 ° C, and then 1-2H under normal conditions.	Dimensions shall meet the requirements and shall be satisfied with mechanical and electrical properties
Resistance to constant damp heat test	The relative humidity was 95±3%, and the test temperature was 40°C. After 2H treatment, the electrical properties were measured within 5min after the samples were taken out, and the appearance quality of the samples was checked under normal conditions for 1-2H	Dimensions shall meet the requirements and shall be satisfied with mechanical and electrical properties
Vibration test	Vibration frequency range 10-55HZ, displacement amplitude: 0.35MM, acceleration amplitude: 50.0M/S, frequency sweep cycle: 30 times.	Electrical and mechanical properties are normal
Drop test	Free fall 3 times at 1M altitude in the direction of perpendicular axes	Electrical and mechanical properties are normal




Antenna diagram:



Antenna attachment position

Antenna performance test diagram:

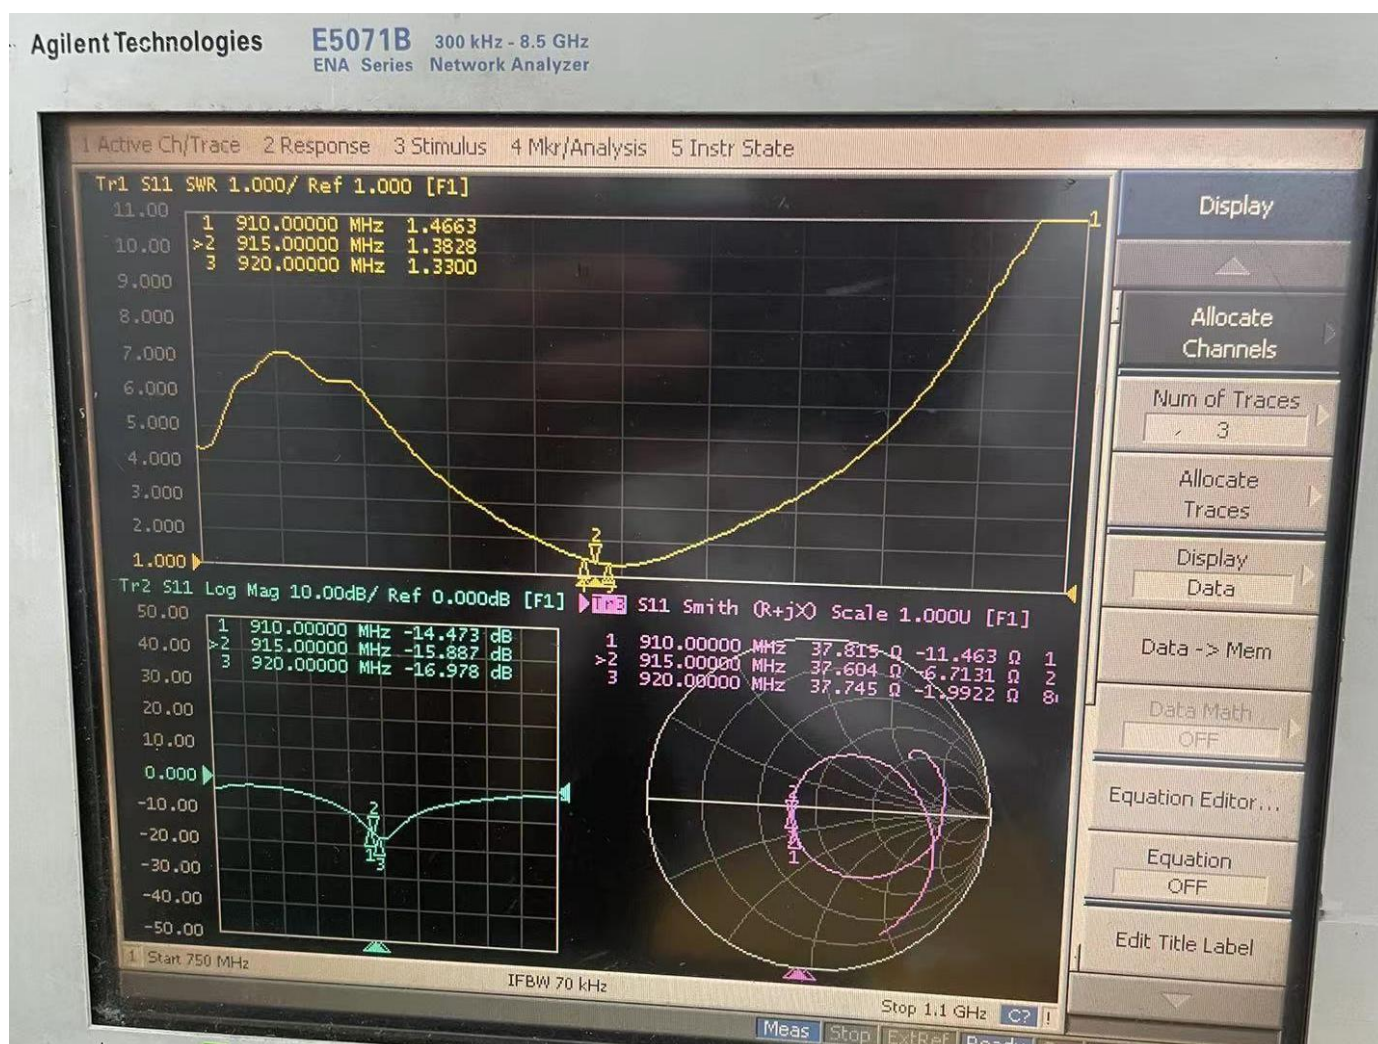





2D, 3D Test data (915MHz):

Frequency	Efficiency (%)	Gain. (dBi)
910MHz	46.11	0.86
915MHz	49.61	0.97
920MHz	44.92	0.79


Phi 0 2D :

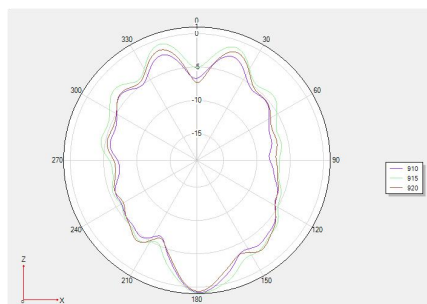




Phi 90 2D

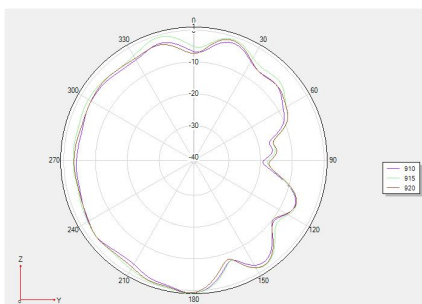




Theta 90 2D

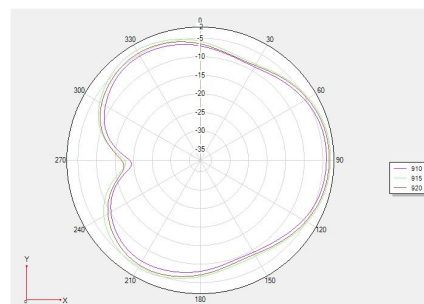

3D 910:

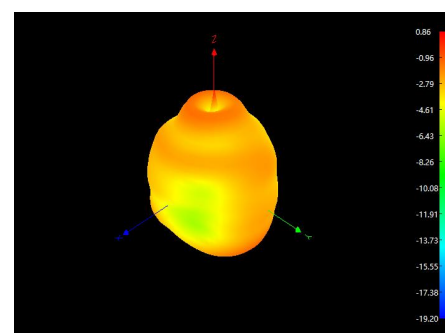
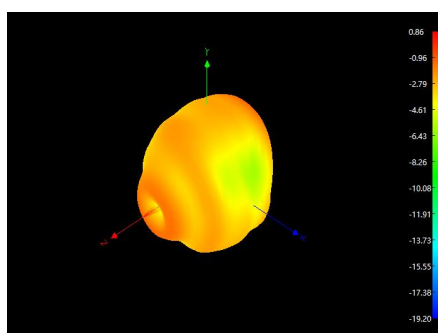
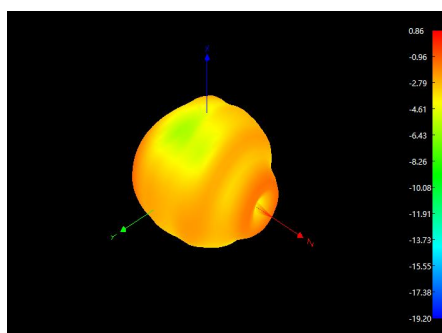


3D 915:

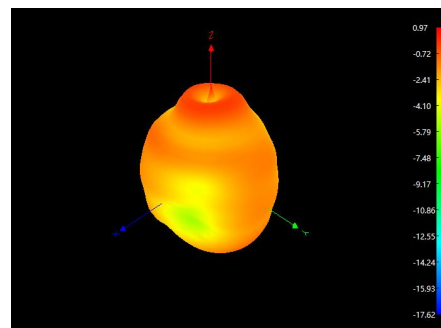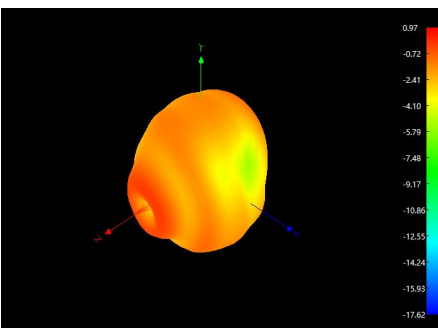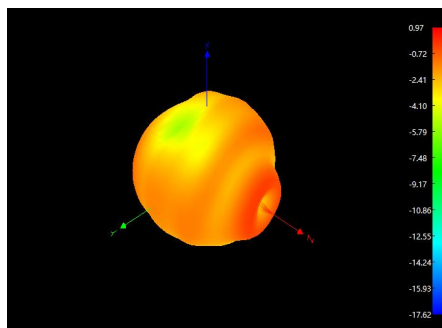



3D 920:

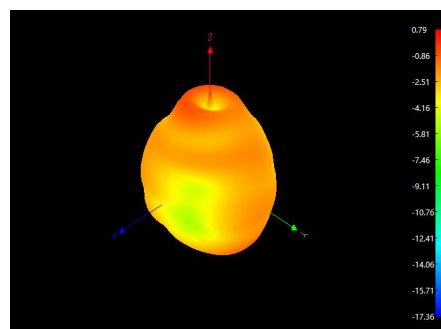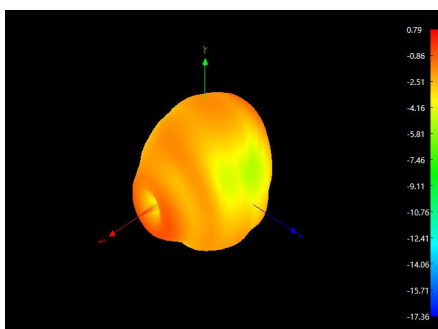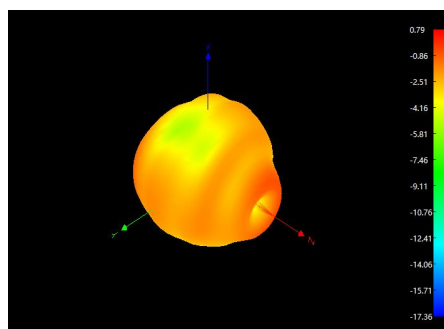



Shenzhen Yingjia Chuang electronic technology Co., LTD

<http://www.szsyjc.com>

ROHS Bill of Material											
This is to certify that the components delivered to your company, the raw materials used in the auxiliary materials, and the additives used in the production engineering comply with the environmental requirements of the RoHS Directive on the Restriction of the use of Hazardous Substances (RoHS Directive 2011/65/EC).											
The components of components, raw materials used in auxiliary materials, packaging materials, and additives used in the production process are reported below:											
Component /Part Name	Material Composition	ICP report #	Test Org.	Test Date	Harmful substance content (ppm)						PASS?
					Cd	Pb	Hg	Cr ⁶⁺	PBB	PBDE	PASS
Wire	Coaxial cable	CANEC24002746206	SGS	24/02/23	ND	ND	ND	ND	ND	ND	PASS
Eco-friendly tin wire	Eco-friendly tin wire	SHAEC24006459102	SGS	24/04/10	ND	78	ND	ND	ND	ND	PASS
terminal	Phosphor bronze	CANEC24000977302	SGS	24/01/22	ND	6	ND	ND	ND	ND	PASS
	Gold coating	A2240410234101001E	CTI	24/07/16	ND	ND	ND	ND	ND	ND	PASS
	Rubber core	A2240126395101003E	CTI	24/03/16	ND	ND	ND	ND	ND	ND	PASS
FPC	Printing ink	A223046640210102ER1	CTI	23/09/13	ND	ND	ND	ND	ND	ND	PASS
	3M9471LE	SHAEC23021627701	SGS	23/12/27	ND	ND	ND	ND	ND	ND	PASS
	Copper foil	A2240082746101006E	CTI	24/03/01	ND	ND	ND	ND	ND	ND	PASS