



---

**FCC 47 CFR PART 15 SUBPART C 15.247**  
**TEST REPORT**  
**FOR**  
**TABLET PC**

Model : MG133-JP

Issued to  
J P Sa Couto SA  
Rua da Guarda, 675 4455-466 Perafita Portugal

Issued by  
WH Technology Corp.



|                                                      |                                 |                                                      |
|------------------------------------------------------|---------------------------------|------------------------------------------------------|
| <b>EMC<br/>Test<br/>Site</b>                         | <b>Xizhi Office<br/>and Lab</b> | <b>Datong Rd. Xizhi Dist. New Taipei City Taiwan</b> |
| <b>Tel.: +886-2-7729-7707 Fax: +886-2- 8648-1311</b> |                                 |                                                      |

*Note: This test refers exclusively to the test presented test model and sample. This report shall not be reproduced except in full, without the written approval of WH Technology Corp. This document may be altered or revised by WH Technology Corp. Personnel only, and shall be noted in the revision section of the document.*



## Contents

|                                                                     |          |
|---------------------------------------------------------------------|----------|
| <b>PHOTOS OF EUT 1. General Information .....</b>                   | <b>3</b> |
| <b>1. General Information.....</b>                                  | <b>3</b> |
| <b>2. Report of Measurements and Examinations .....</b>             | <b>3</b> |
| 2.1 List of Measurements and Examinations .....                     | 3        |
| <b>3. Test Configuration of Equipment under Test.....</b>           | <b>3</b> |
| 3.1 Description of the tested samples .....                         | 3        |
| 3.2 Carrier Frequency of Channels .....                             | 3        |
| 3.3 Test Mode and Test Software .....                               | 3        |
| 3.4 TEST Methodology & General Test Procedures .....                | 3        |
| 3.5 Measurement Uncertainty .....                                   | 3        |
| 3.6 Description of the Support Equipments .....                     | 3        |
| <b>4. Test and measurement equipment.....</b>                       | <b>3</b> |
| 4.1 calibration .....                                               | 3        |
| 4.2 equipment .....                                                 | 3        |
| <b>5. Antenna Requirements.....</b>                                 | <b>3</b> |
| 5.1 Standard Applicable .....                                       | 3        |
| 5.2 Antenna Construction and Directional Gain.....                  | 3        |
| <b>6. Test of Conducted Emission.....</b>                           | <b>3</b> |
| 6.1 Test Limit .....                                                | 3        |
| 6.2 Test Procedures .....                                           | 3        |
| 6.3 Typical Test Setup .....                                        | 3        |
| 6.4 Test Result and Data .....                                      | 3        |
| <b>7. Test of Radiated Emission .....</b>                           | <b>3</b> |
| 7.1 Test Limit .....                                                | 3        |
| 7.2 Test Procedures .....                                           | 3        |
| 7.3 Typical Test Setup .....                                        | 3        |
| 7.4 Test Result and Data (9kHz ~ 30MHz).....                        | 3        |
| 7.5 Test Result and Data (30MHz ~ 1GHz, worst emissions found)..... | 3        |
| 7.6 Test Result and Data (Between 1~25 GHz).....                    | 3        |
| <b>8. 6dB Bandwidth Measurement Data.....</b>                       | <b>3</b> |
| 8.1 Test Limit .....                                                | 3        |
| 8.2 Test Procedures .....                                           | 3        |
| 8.3 Test Setup Layout .....                                         | 3        |
| 8.4 Test Result and Data .....                                      | 3        |
| <b>9. Maximum Output Power .....</b>                                | <b>3</b> |
| 9.1 Test Limit .....                                                | 3        |
| 9.2 Test Procedures .....                                           | 3        |
| 9.3 Test Setup Layout .....                                         | 3        |
| 9.4 Test Result and Data .....                                      | 3        |



---

|                                                    |          |
|----------------------------------------------------|----------|
| <b>10. Power Spectral Density .....</b>            | <b>3</b> |
| 10.1 Test Limit .....                              | 3        |
| 10.2 Test Procedures .....                         | 3        |
| 10.3 Test Setup Layout .....                       | 3        |
| 10.4 Test Result and Data .....                    | 3        |
| <b>11. Band Edges Measurement .....</b>            | <b>3</b> |
| 11.1 Test Limit .....                              | 3        |
| 11.2 Test Procedure .....                          | 3        |
| 11.3 Test Setup Layout .....                       | 3        |
| 11.4 Test Result and Data .....                    | 3        |
| 11.5 Restrict Band Emission Measurement Data ..... | 3        |
| <b>12. Restricted Bands of Operation .....</b>     | <b>3</b> |
| 12.1 Labeling Requirement .....                    | 3        |

**APPENDIX 1 PHOTOS OF TEST CONFIGURATION**  
**PHOTOS OF EUT**



## 1. General Information

**Applicant** : J P Sa Couto SA  
**Address** : Rua da Guarda, 675 4455-466 Perafita Portugal  
**Manufacturer** : Shenzhen Emdoor Digital Technology CO.,LTD  
**Address** : 6 th Floor, Jin Fu Lai Mansion, No.49-1 Dabaolu Rd  
Baoan28 District, Shenzhen, China  
**EUT** : TABLET PC  
**Model Name** : MG133-JP  
**Model Differences** : N/A

Is here with confirmed to comply with the requirements set out in the FCC Rules and Regulations Part 15 Subpart C and the measurement procedures were according to ANSI C63.4-2014. The said equipment in the configuration described in this report shows the maximum emission levels emanating

### FCC part 15 subpart C

Receipt Date : 03/05/2018

Final Test Date : 03/25/2018

**Tested By:**

**Reviewed by:**

Mar. 26, 2018

**Date**

Bing Chang/ Engineer

**Date**

Bell Wei / Manager  
Designation Number: TW2954



## 2. Report of Measurements and Examinations

### 2.1 List of Measurements and Examinations

| FCC Rule            | Description of Test                        | Result |
|---------------------|--------------------------------------------|--------|
| 15.203              | . Antenna Requirement                      | Pass   |
| 15.207              | . Conducted Emission                       | Pass   |
| 15.209<br>15.247(d) | . Radiated Emission                        | Pass   |
| 15.247(a)(2)        | . 6dB Bandwidth                            | Pass   |
| 15.247(b)           | . Maximum Peak Output Power                | Pass   |
| 15.247(d)           | . 100kHz Bandwidth of Frequency Band Edges | Pass   |
| 15.247(e)           | . Power Spectral Density                   | Pass   |



### 3. Test Configuration of Equipment under Test

#### 3.1 Description of the tested samples

EUT Name : TABLET PC

Model Number : MG133-JP

FCCID : 2APDE-MG133-JP

Receipt Date : 03/05/2018

Power From : ☒Inside ☒Outside  
☒Adaptor ☒Battery ☐AC Power Source  
☐DC Power Source ☐Support Unit PC or NB

Adapter : Input: 100-240V~0.5A  
Output: DC 12V/2.5 A

Battery : 7.6V 5950mAh

Operate Frequency : Refer to the channel list as described below

WiFi:

2412 MHz to 2462 MHz for 802.11b/g/n(HT20)

2422 MHz to 2452 MHz for 802.11n(HT40)

Modulation Technique : 802.11b: CCK/QPSK/BPSK  
802.11g/n: BPSK/QPSK/16QAM/64QAM

Number of Channels : 11 Channels for 802.11b/g/n(HT20)  
7 Channels for 802.11n(HT40)

Channel spacing : ☐N/A ☒ 5 MHz

Antenna Type : FPCB Antenna

Antenna gain : 2 dBi



### 3.2 Carrier Frequency of Channels

1. 802.11b/g/n(HT20)

| Channel | Frequency<br>(MHz) | Channel | Frequency<br>(MHz) |
|---------|--------------------|---------|--------------------|
| 1       | 2412               | 7       | 2442               |
| 2       | 2417               | 8       | 2447               |
| 3       | 2422               | 9       | 2452               |
| 4       | 2427               | 10      | 2457               |
| 5       | 2432               | 11      | 2462               |
| 6       | 2437               |         |                    |

2. 802.11n(HT40)

| Channel | Frequency<br>(MHz) | Channel | Frequency<br>(MHz) |
|---------|--------------------|---------|--------------------|
| 3       | 2422               | 7       | 2442               |
| 4       | 2427               | 8       | 2447               |
| 5       | 2432               | 9       | 2452               |
| 6       | 2437               |         |                    |



### **3.3 Test Mode and Test Software**

- a. During testing, the interface cables and equipment positions were varied according to ANSI C63.4.
- b. The complete test system included Notebook and EUT for RF test.
- c. Test Software: Radio Test.exe
- d. New Battery was used for all testing and the worst radiated emission case from X,Y and Z axis evaluation was selected for testing.
- e. Per-test antenna **A** and antenna **B**, find the worst-case is antenna **A**, and record in report.
- f. The following test modes were performed for test:
  - 802.11b/g/n(HT20): CH1: 2412MHz, CH6: 2437MHz, CH11: 2462MHz
  - 802.11n(HT40): CH3: 2422MHz, CH6: 2437MHz, CH9: 2452MHz



---

### **3.4 TEST Methodology & General Test Procedures**

All testing as described bellowed were performed in accordance with ANSI C63.4:2014 and ANSI C63.10:2013.

#### **Conducted Emissions**

The EUT is placed on a wood table, which is at 0.8 m above ground plane acceding to clause 15.207 and requirements of ANSI C63.4:2014. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz are using CISPR Quasi-Peak / Average detectors.

#### **Radiated Emissions**

The EUT is a placed on a turn table, which is 0.8 m above ground plane. The turntable was rotated through 360 degrees to determine the position of maximum emission level. The EUT is placed at 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.

- 1) Putting the EUT on the platform and turning on the EUT (on/off button on the bottom of the EUT).
- 2) Setting test channel described as "Channel setting and operating condition", and testing channel by channel.
- 3) For the maximum output power measurement, we followed the method of measurement KDB558074 D01.
- 4) For the spurious emission test based on ANSI(2014), at the frequency where below 1GHz used quasi-peak detector mode; where above 1GHz used the peak and average detector mode. IF the peak value may be under average limit, the average mode will not be performed.



### 3.5 Measurement Uncertainty

| Measurement Item             | Uncertainty          |
|------------------------------|----------------------|
| Peak Output Power(conducted) | $\pm 1.345\text{dB}$ |
| Power Spectral Density       | $\pm 1.347\text{dB}$ |
| Radiated emission(1G-25GHz)  | $\pm 5.00\text{dB}$  |
| Radiated emission(30M-1GHz)  | $\pm 3.89\text{dB}$  |
| Conducted emission           | $\pm 1.81\text{dB}$  |

### 3.6 Description of the Support Equipments

#### Setup Diagram

See test photographs attached in appendix 1 for the actual connections between EUT and support equipment.

#### Support Equipment

Peripherals Devices:

| OUTSIDE SUPPORT EQUIPMENT |           |       |            |                    |               |            |            |
|---------------------------|-----------|-------|------------|--------------------|---------------|------------|------------|
| No.                       | Equipment | Model | Serial No. | FCC ID/<br>BSMI ID | Trade<br>name | Data Cable | Power Cord |
| 1.                        | N/A       | N/A   | N/A        | N/A                | N/A           | N/A        | N/A        |
| INSIDE SUPPORT EQUIPMENT  |           |       |            |                    |               |            |            |
| No.                       | Equipment | Model | Serial No. | FCC ID/<br>BSMI ID | Trade<br>name | Data Cable | Power Cord |
| 1.                        | N/A       | N/A   | N/A        | N/A                | N/A           | N/A        | N/A        |

**Note:** All the above equipment /cable were placed in worse case position to maximize emission signals during emission test

**Grounding:** Grounding was in accordance with the manufacturer's requirement and conditions for the intended use.



## **4. Test and measurement equipment**

### **4.1 calibration**

The measuring equipment utilized to perform the tests documented in the report has been calibrated once a year or in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

### **4.2 equipment**

The following list contains measurement equipment used for testing. The equipment conforms to the requirement of CISPR 16-1, ANSI C63.2 and. Other required standards.

Calibration of all test and measurement, including any accessories that may effect such calibration, is checked frequently to ensure the accuracy. Adjustments are made and correction factors are applied in accordance with the instructions contained in the respective.



**TABLELIST OF TEST AND MEASUREMENT EQUIPMENT**

| Test Site  | Instrument                               | Manufacturer                      | Model No.               | S/N                      | Next Cal. Date |
|------------|------------------------------------------|-----------------------------------|-------------------------|--------------------------|----------------|
| Conduction | Spectrum (9K--3GHz)                      | R&S                               | FSP3                    | 833387/010               | 2018/09/20     |
|            | EMI Receiver                             | R&S                               | ESHS10                  | 830223/008               | 2018/05/22     |
|            | LISN                                     | Rolf Heine<br>Hochfrequenztechnik | NNB-2/16z               | 98062                    | 2018/05/25     |
|            | ISN                                      | Schwarzbeck                       | 8-Wire ISN<br>CAT5      | CAT5-8158-0094           | 2018/09/21     |
|            | RF Cable                                 | N/A                               | N/A                     | EMI-3                    | 2018/10/19     |
| Radiation  | Bilog antenna(30M-1G)                    | ETC                               | MCTD2786B               | BLB16M04004/J<br>B-5-004 | 2018/05/03     |
|            | Double Ridged Guide Horn antenna(1G-18G) | ETC                               | MCTD 1209               | DRH15N0<br>2009          | 2018/11/23     |
|            | Horn antenna (18G-26G)                   | com-power                         | AH-826                  | 81000                    | 2018/08/15     |
|            | LOOP Antenna (Below 30M)                 | com-power                         | AL-130                  | 17117                    | 2018/10/04     |
|            | Pre amplifier (30M-1G)                   | EMC<br>INSTRUMENT                 | EMC9135                 | 980334                   | 2018/05/04     |
|            | Microwave Preamplifier (1G-18G)          | EMC<br>INSTRUMENT                 | EMC051845               | 980108&AT<br>-18001      | 2018/10/23     |
|            | Pre amplifier (18G~26G)                  | MITEQ                             | JS4-18002600-3<br>0-5A  | 808329                   | 2018/08/10     |
|            | EMI Test Receiver                        | R&S                               | ESVS30<br>(20M-1000MHz) | 826006/002               | 2018/11/28     |
|            | RF Cable                                 | EMCI                              | N male on end           | 30m                      | 2018/10/19     |
|            |                                          |                                   |                         |                          |                |



|    |                         |                       |                            |              |            |
|----|-------------------------|-----------------------|----------------------------|--------------|------------|
|    | (open site)             |                       | of<br>both sides<br>(EMI4) |              |            |
|    | RF CABLE<br>(1~26.5G)   | HARBOUT<br>INDUSTRIES | LL142MI(4M+4M)             | NA           | 2018/03/08 |
|    | RF CABLE<br>(1~26.5G)   | HARBOUR<br>INDUSTRIES | LL142MI(7M)                | NA           | 2018/08/11 |
|    | Spectrum<br>(9K--7GHz)  | R&S                   | FSP7                       | 830180/006   | 2018/03/25 |
|    | Spectrum<br>(9K--40GHz) | AGILENT               | 8564EC                     | 4046A0032    | 2019/03/01 |
| -- | Power Meter             | R&S                   | NRVS                       | 100696       | 2018/08/10 |
| -- | Power<br>Sensor         | R&S                   | URV5-Z4                    | 0395.1619.05 | 2018/08/10 |

**\*CALIBRATION INTERVAL OF INSTRUMENTS LISTED ABOVE IS ONE YEAR**



## **5. Antenna Requirements**

### **5.1 Standard Applicable**

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### **5.2 Antenna Construction and Directional Gain**

Antenna Type: FPCB Antenna

Antenna Gain: 2 dBi



## 6. Test of Conducted Emission

### 6.1 Test Limit

Conducted Emissions were measured from 150 kHz to 30 MHz with a bandwidth of 9 KHz on the 110 VAC power and return leads of the EUT according to the methods defined in ANSI C63.4-2014 Section 3.1. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane as shown in section 2.2. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.

| Frequency<br>(MHz) | Quasi Peak<br>(dB $\mu$ V) | Average<br>(dB $\mu$ V) |
|--------------------|----------------------------|-------------------------|
| 0.15 – 0.5         | 66-56*                     | 56-46*                  |
| 0.5 – 5.0          | 56                         | 46                      |
| 5.0 – 30.0         | 60                         | 50                      |


\*Decreases with the logarithm of the frequency.

### 6.2 Test Procedures

- The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- Connect EUT to the power mains through a line impedance stabilization network (LISN).
- All the support units are connecting to the other LISN.
- The LISN provides 50 ohm coupling impedance for the measuring instrument.
- The FCC states that a 50 ohm, 50 micro-Henry LISN should be used.
- Both sides of AC line were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched.
- Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.




### 6.3 Typical Test Setup

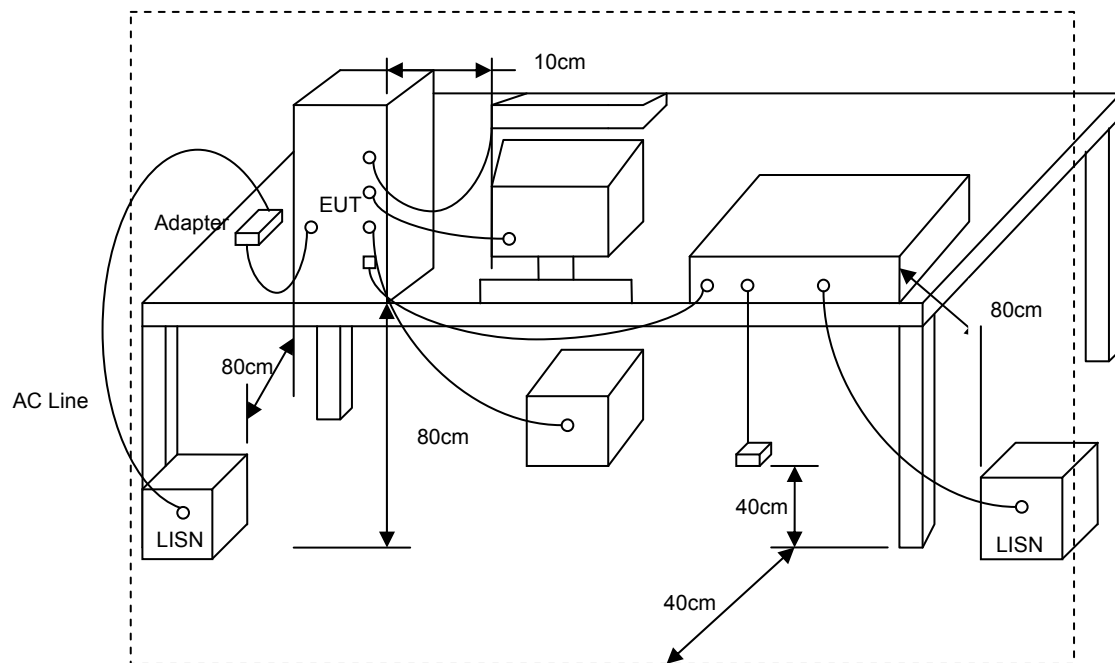



## 6.4 Test Result and Data


|             |                                    |            |         |
|-------------|------------------------------------|------------|---------|
| Power       | : DC 7.6V from battery for adapter | Pol/Phase  | : LINE  |
| Test Mode 1 | : TX CH1 2412MHz(worst-case)       | Temperatur | : 22 °C |
| Humidity    | : 43 %                             |            |         |

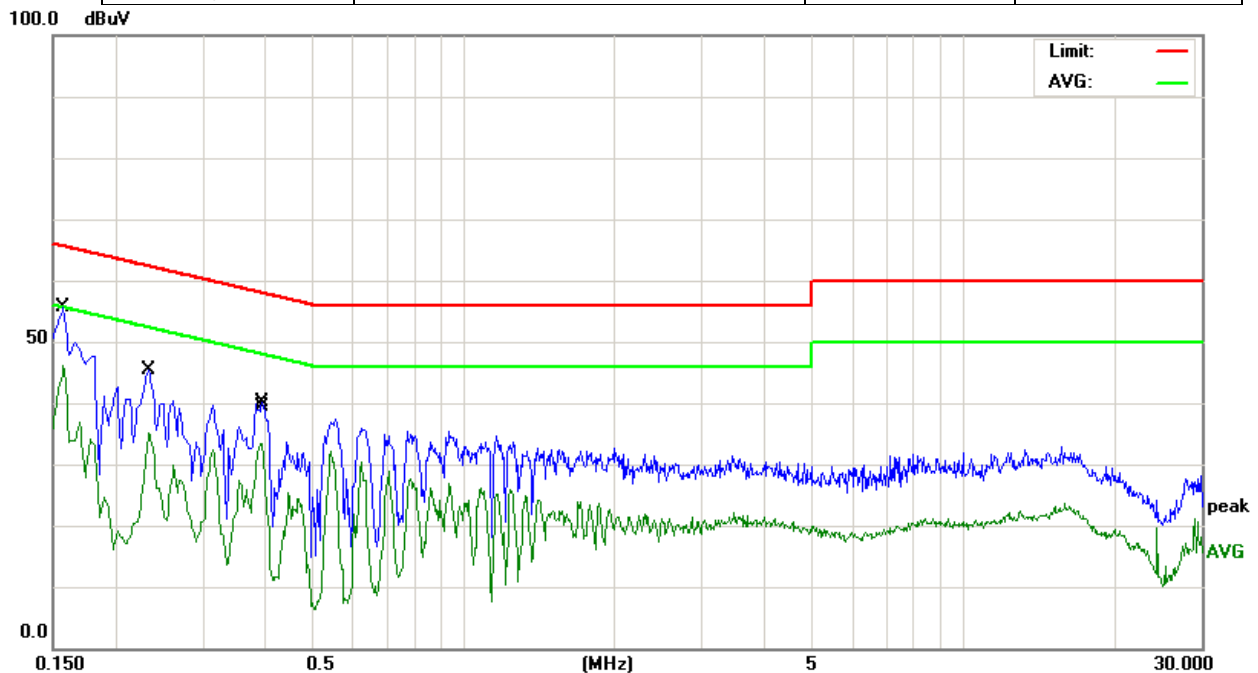

| No. | Mk. | Freq.  | Reading Level | Correct Factor | Measure-ment | Limit | Over   |          |
|-----|-----|--------|---------------|----------------|--------------|-------|--------|----------|
|     |     | MHz    | dBuV          | dB             | dBuV         | dBuV  | dB     | Detector |
| 1   |     | 0.1580 | 43.78         | 11.75          | 55.53        | 65.56 | -10.03 | QP       |
| 2   | *   | 0.1580 | 34.26         | 11.75          | 46.01        | 55.56 | -9.55  | AVG      |
| 3   |     | 0.2340 | 34.42         | 10.94          | 45.36        | 62.30 | -16.94 | QP       |
| 4   |     | 0.2340 | 24.07         | 10.94          | 35.01        | 52.30 | -17.29 | AVG      |
| 5   |     | 0.3899 | 23.33         | 10.13          | 33.46        | 48.06 | -14.60 | AVG      |
| 6   |     | 0.3940 | 30.06         | 10.13          | 40.19        | 57.98 | -17.79 | QP       |



|             |                                    |            |           |
|-------------|------------------------------------|------------|-----------|
| Power       | : DC 7.6V from battery for adapter | Pol/Phase  | : NEUTRAL |
| Test Mode 1 | : TX CH1 2412MHz(worst-case)       | Temperatur | : 22 °C   |
| Humidity    | : 43 %                             |            |           |

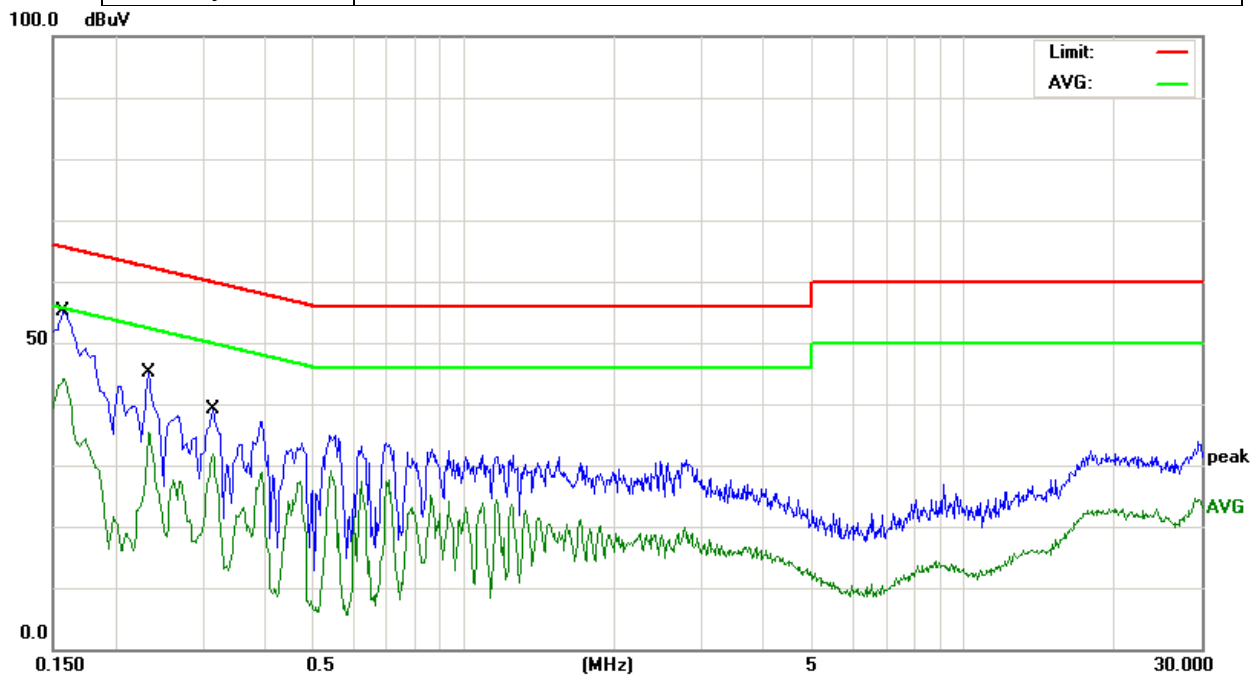

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV | Limit<br>dBuV | Over<br>dB | Detector |
|-----|-----|--------------|--------------------------|-------------------------|--------------------------|---------------|------------|----------|
| 1   | *   | 0.1580       | 43.46                    | 11.75                   | 55.21                    | 65.56         | -10.35     | QP       |
| 2   |     | 0.1580       | 32.37                    | 11.75                   | 44.12                    | 55.56         | -11.44     | AVG      |
| 3   |     | 0.2340       | 34.12                    | 10.94                   | 45.06                    | 62.30         | -17.24     | QP       |
| 4   |     | 0.2340       | 24.35                    | 10.94                   | 35.29                    | 52.30         | -17.01     | AVG      |
| 5   |     | 0.3140       | 28.86                    | 10.20                   | 39.06                    | 59.86         | -20.80     | QP       |
| 6   |     | 0.3140       | 21.76                    | 10.20                   | 31.96                    | 49.86         | -17.90     | AVG      |



## 7. Test of Radiated Emission

### 7.1 Test Limit

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. If the transmitter measurement is based on the maximum conducted output power, the attenuation required under this paragraph shall be 30dB instead of 20dB. In addition, radiated emissions which fall in section 15.205(a) the restricted bands must also comply with the radiated emission limit specified in section 15.209(a).

| Frequency (MHz) | Field Strength (microvolt/meter) | Measurement Distance (meters) |
|-----------------|----------------------------------|-------------------------------|
| 0.009 ~ 0.490   | 2400/F(kHz)                      | 300                           |
| 0.490 ~ 1.705   | 24000/F(kHz)                     | 30                            |
| 1.705 ~ 30.0    | 30                               | 30                            |
| 30 ~ 88         | 100                              | 3                             |
| 88 ~ 216        | 150                              | 3                             |
| 216 ~ 960       | 200                              | 3                             |
| Above 960       | 500                              | 3                             |

### 7.2 Test Procedures

- The EUT was placed on a rotatable table top 0.8 meter above ground.
- The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- The table was rotated 360 degrees to determine the position of the highest radiation.
- The antenna is a broadband antenna and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
- Set the test-receiver system to Peak or CISPR quasi-peak Detect Function and specified bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method and reported.
- For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise,




the emissions will be measured in average mode again and reported.


- i. "Cone of radiation" has been considered to be 3dB bandwidth of the measurement antenna.

## 7.3 Typical Test Setup

For radiated emissions below 30MHz

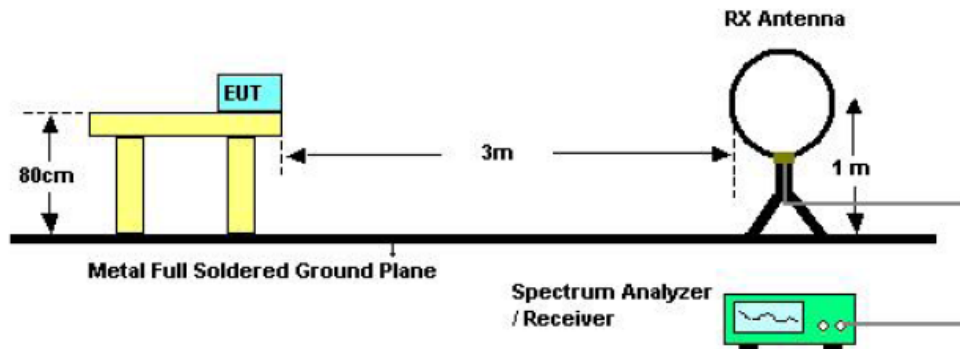

For radiated emissions above 30MHz

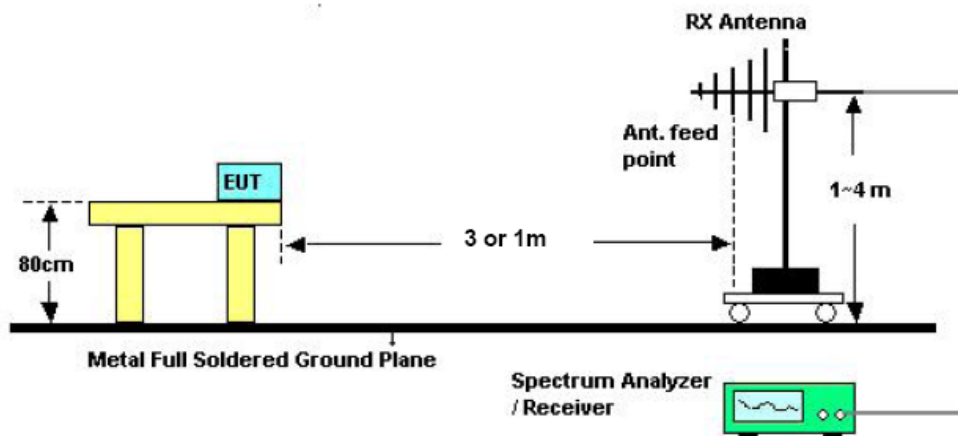

Above 10 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1m.

Distance extrapolation factor =  $20 \log (\text{specific distance [3m]} / \text{test distance [1m]})$  (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [9.54 dB].




## 7.4 Test Result and Data (9kHz ~ 30MHz)

The 9kHz - 30MHz spurious emission is under limit 20dB more.

## 7.5 Test Result and Data (30MHz ~ 1GHz, worst emissions found)


|             |                              |             |              |
|-------------|------------------------------|-------------|--------------|
| Power       | : DC 7.6V from battery       | Pol/Phase   | : HORIZONTAL |
| Test Mode 1 | : TX CH1 2412MHz(worst-case) | Temperature | : 22 °C      |
| Humidity    | : 59%                        |             |              |

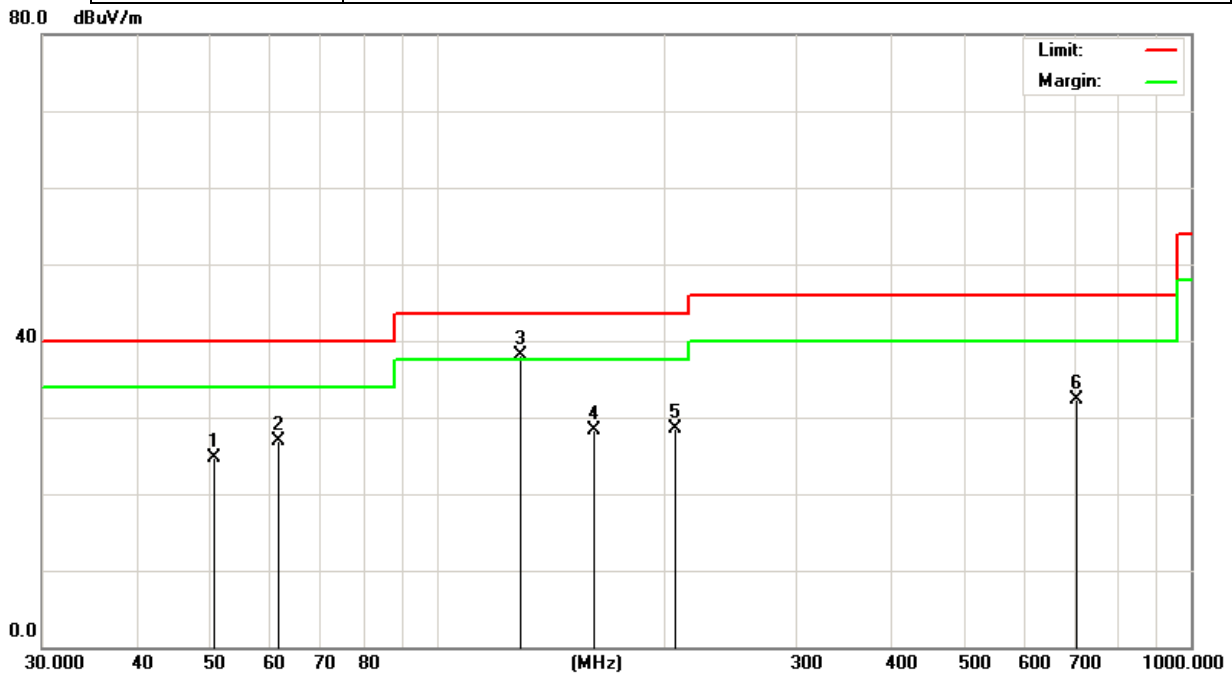

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Over<br>dB | Detector |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|------------|----------|
| 1   |     | 50.7637      | 39.18                    | -14.50                  | 24.68                      | 40.00           | -15.32     | QP       |
| 2   |     | 61.5618      | 45.16                    | -18.30                  | 26.86                      | 40.00           | -13.14     | QP       |
| 3   | *   | 128.5630     | 53.10                    | -15.00                  | 38.10                      | 43.50           | -5.40      | QP       |
| 4   |     | 160.9089     | 43.23                    | -14.91                  | 28.32                      | 43.50           | -15.18     | QP       |
| 5   |     | 207.1226     | 45.25                    | -16.77                  | 28.48                      | 43.50           | -15.02     | QP       |
| 6   |     | 701.7610     | 32.01                    | 0.32                    | 32.33                      | 46.00           | -13.67     | QP       |



|             |                              |             |            |
|-------------|------------------------------|-------------|------------|
| Power       | : DC 7.6V from battery       | Pol/Phase   | : VERTICAL |
| Test Mode 1 | : TX CH1 2412MHz(worst-case) | Temperature | : 22 °C    |
| Humidity    | : 59%                        |             |            |

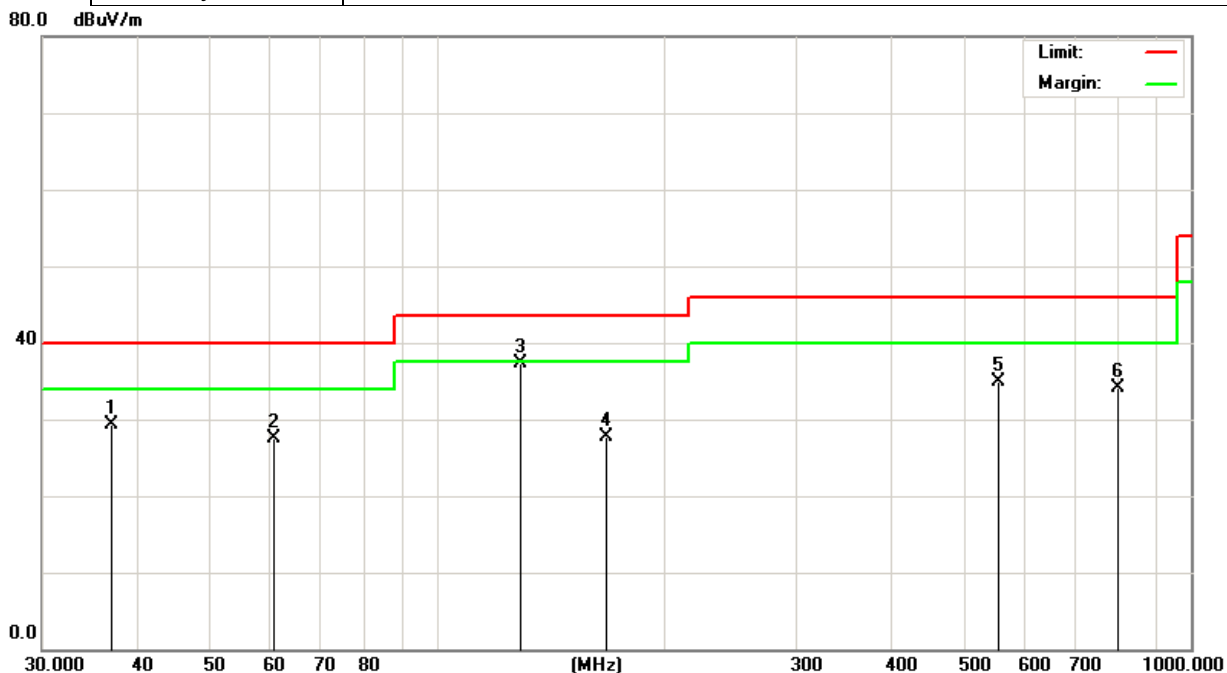

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Over<br>dB | Detector |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|------------|----------|
| 1   |     | 36.8953      | 46.11                    | -16.72                  | 29.39                      | 40.00           | -10.61     | QP       |
| 2   |     | 60.7044      | 46.91                    | -19.38                  | 27.53                      | 40.00           | -12.47     | QP       |
| 3   | *   | 128.5630     | 52.35                    | -15.00                  | 37.35                      | 43.50           | -6.15      | QP       |
| 4   |     | 167.2368     | 42.84                    | -15.04                  | 27.80                      | 43.50           | -15.70     | QP       |
| 5   |     | 554.8254     | 38.32                    | -3.48                   | 34.84                      | 46.00           | -11.16     | QP       |
| 6   |     | 796.1830     | 31.00                    | 3.01                    | 34.01                      | 46.00           | -11.99     | QP       |

Note:

All the modulation modes were tested, the data of the worst mode are recorded in the above pages and the others modulation methods do not exceed the limits.



## 7.6 Test Result and Data (Between 1~25 GHz)

|             |   |                      |             |   |                         |
|-------------|---|----------------------|-------------|---|-------------------------|
| Power       | : | DC 7.6V from battery | Pol/Phase   | : | HORIZONTAL/<br>VERTICAL |
| Test Mode 1 | : | TX 1Mbps CH1         | Temperature | : | 20 °C                   |
| Humidity    | : | 59 %                 |             |   |                         |


### 802.11b mode with 1Mbps data rate

Harmonics & Spurious Emissions. Peak & Average Measurement

| Frequency<br>(MHz) | Meter Reading<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector Type |
|--------------------|-------------------------|----------------|----------------------------|--------------------|----------------|---------------|
| 4824.000           | 44.93                   | 5.08           | 50.01                      | 74.00              | -23.99         |               |
| 4824.000           | 30.52                   | 5.08           | 35.60                      | 54.00              | -18.40         | AVE           |
| 7236.000           | 43.02                   | 7.16           | 50.18                      | 74.00              | -23.82         | PEAK          |
| 7236.000           | 29.49                   | 7.16           | 36.65                      | 54.00              | -17.35         | AVE           |

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

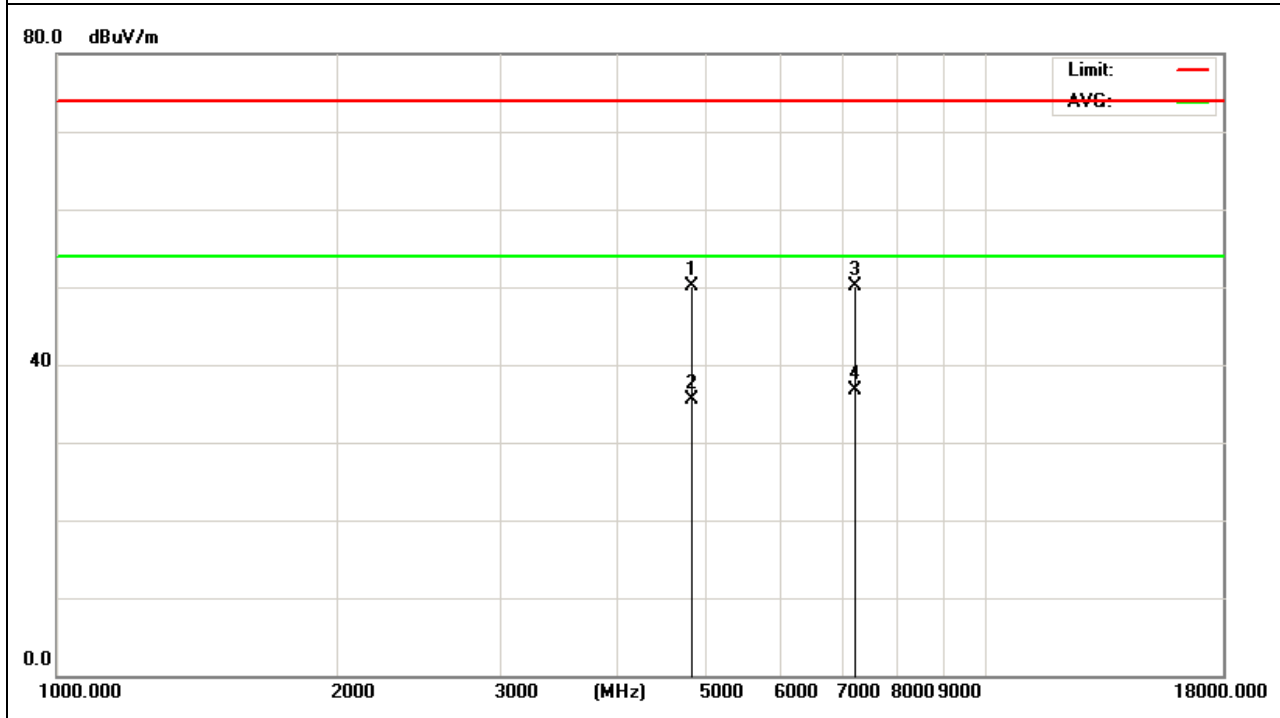




| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 4824.000  | 43.31         | 5.08   | 48.39          | 74.00    | -25.61 | PEAK          |
| 4824.000  | 30.33         | 5.08   | 35.41          | 54.00    | -18.59 | AVE           |
| 7236.000  | 41.65         | 7.55   | 49.20          | 74.00    | -24.80 | PEAK          |
| 7236.000  | 28.12         | 7.55   | 35.67          | 54.00    | -18.33 | AVE           |

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

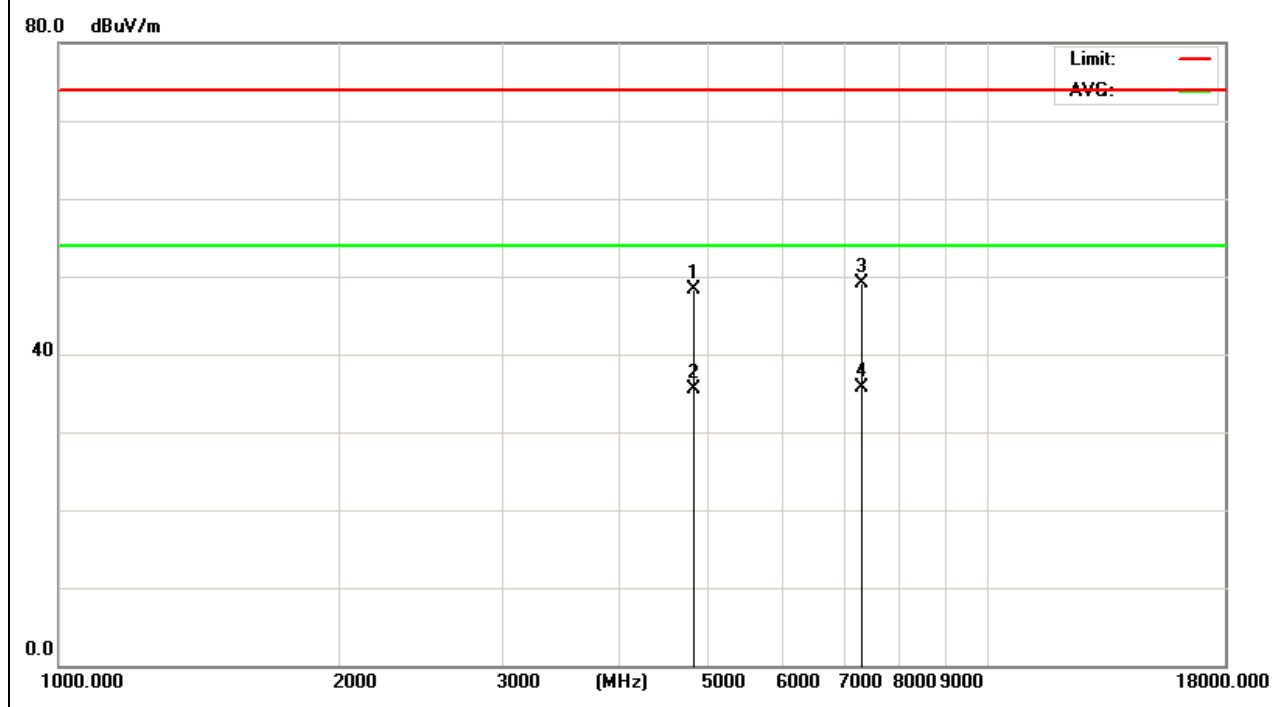

Note:

All the modulation modes were tested, the data of the worst mode are recorded in the above pages and the others modulation methods do not exceed the limits.

The disturbance above 18GHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.




|             |   |                      |             |   |                         |
|-------------|---|----------------------|-------------|---|-------------------------|
| Power       | : | DC 7.6V from battery | Pol/Phase   | : | HORIZONTAL/<br>VERTICAL |
| Test Mode 1 | : | TX 1Mbps CH6         | Temperature | : | 20 °C                   |
| Humidity    | : | 59 %                 |             |   |                         |

## Harmonics & Spurious Emissions. Peak & Average Measurement

| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 4874.000  | 42.95         | 5.13   | 48.08          | 74.00    | -25.92 | PEAK          |
| 4874.000  | 30.09         | 5.13   | 35.22          | 54.00    | -18.78 | AVE           |
| 7311.000  | 40.87         | 7.49   | 48.36          | 74.00    | -25.64 | PEAK          |
| 7311.000  | 27.96         | 7.49   | 35.45          | 54.00    | -18.55 | AVE           |

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

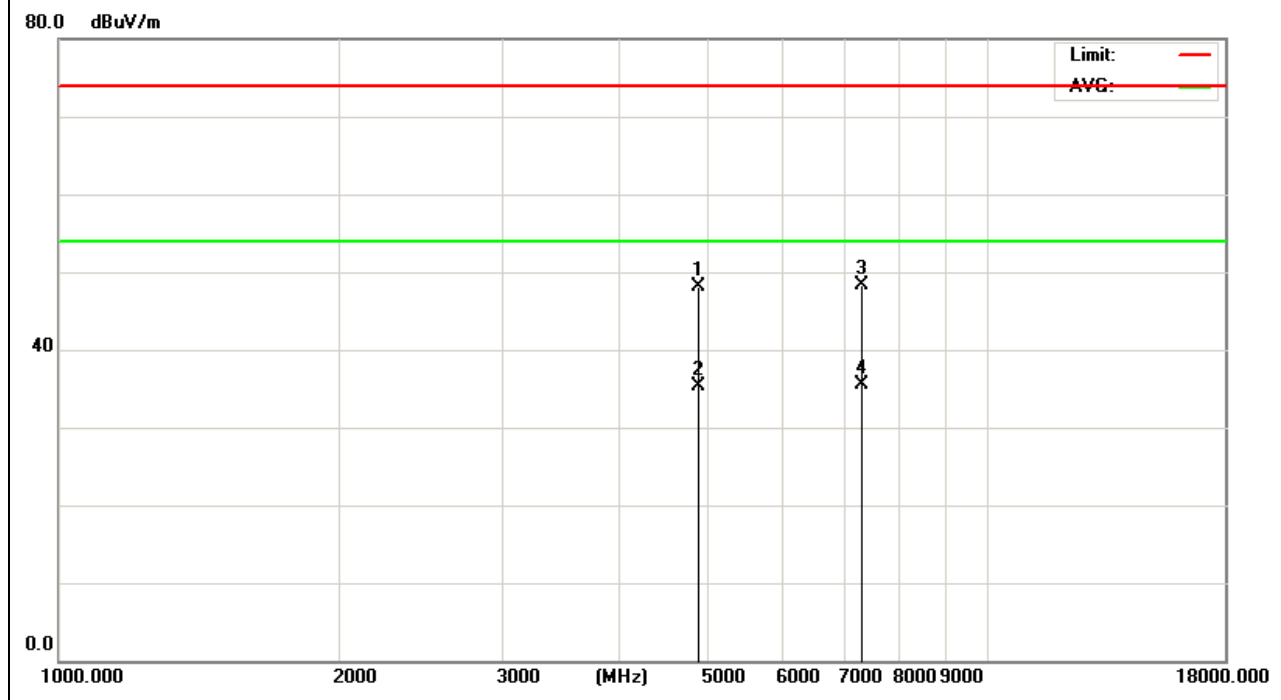




| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 4874.000  | 43.81         | 5.13   | 48.94          | 74.00    | -25.06 | PEAK          |
| 4874.000  | 29.64         | 5.13   | 34.77          | 54.00    | -19.23 | AVE           |
| 7311.000  | 41.33         | 7.49   | 48.82          | 74.00    | -25.18 | PEAK          |
| 7311.000  | 28.53         | 7.49   | 36.02          | 54.00    | -17.98 | AVE           |

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

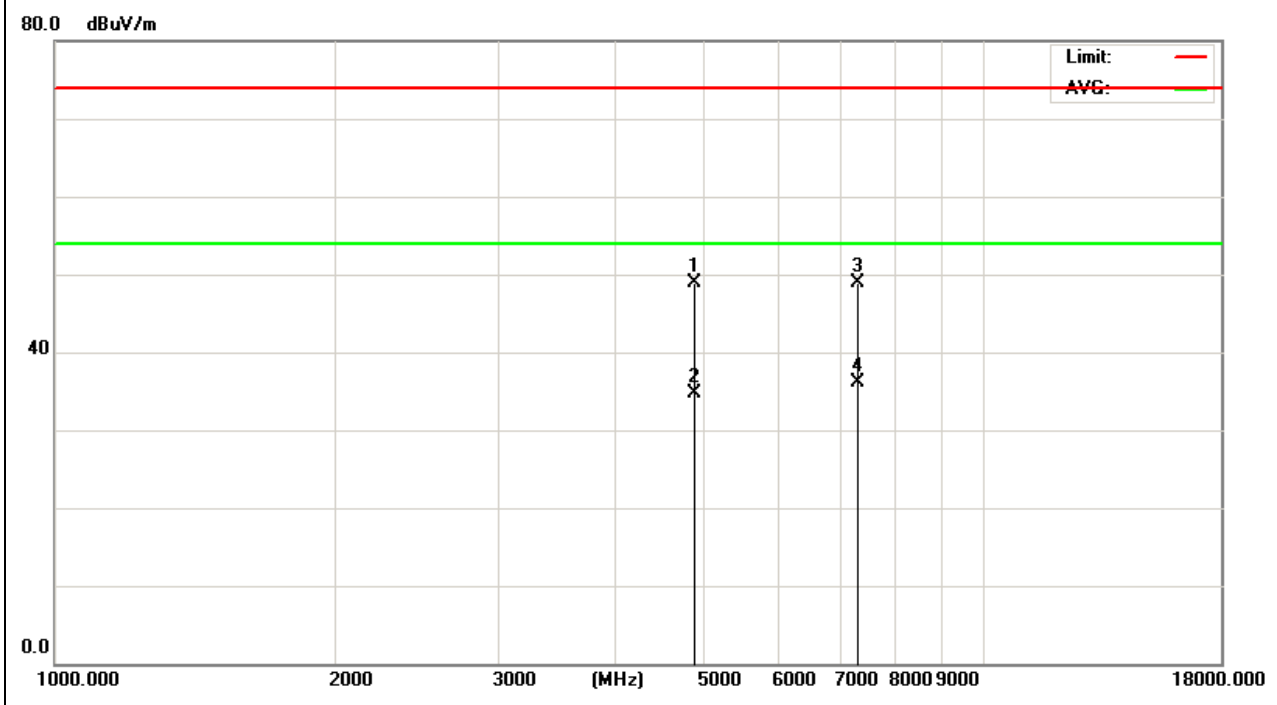

Note:

All the modulation modes were tested, the data of the worst mode are recorded in the above pages and the others modulation methods do not exceed the limits.

The disturbance above 18GHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.




|             |   |                      |             |   |                         |
|-------------|---|----------------------|-------------|---|-------------------------|
| Power       | : | DC 7.6V from battery | Pol/Phase   | : | HORIZONTAL/<br>VERTICAL |
| Test Mode 1 | : | TX 1Mbps CH11        | Temperature | : | 30 °C                   |
| Humidity    | : | 59 %                 |             |   |                         |

## Harmonics & Spurious Emissions. Peak & Average Measurement

| Frequency<br>(MHz) | Meter Reading<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector Type |
|--------------------|-------------------------|----------------|----------------------------|--------------------|----------------|---------------|
| 4924.000           | 44.85                   | 5.18           | 50.03                      | 74.00              | -23.97         | PEAK          |
| 4924.000           | 31.75                   | 5.18           | 36.93                      | 54.00              | -17.07         | AVE           |
| 7386.000           | 41.52                   | 7.82           | 49.34                      | 74.00              | -24.66         | PEAK          |
| 7386.000           | 27.63                   | 7.82           | 35.45                      | 54.00              | -18.55         | AVE           |

### Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

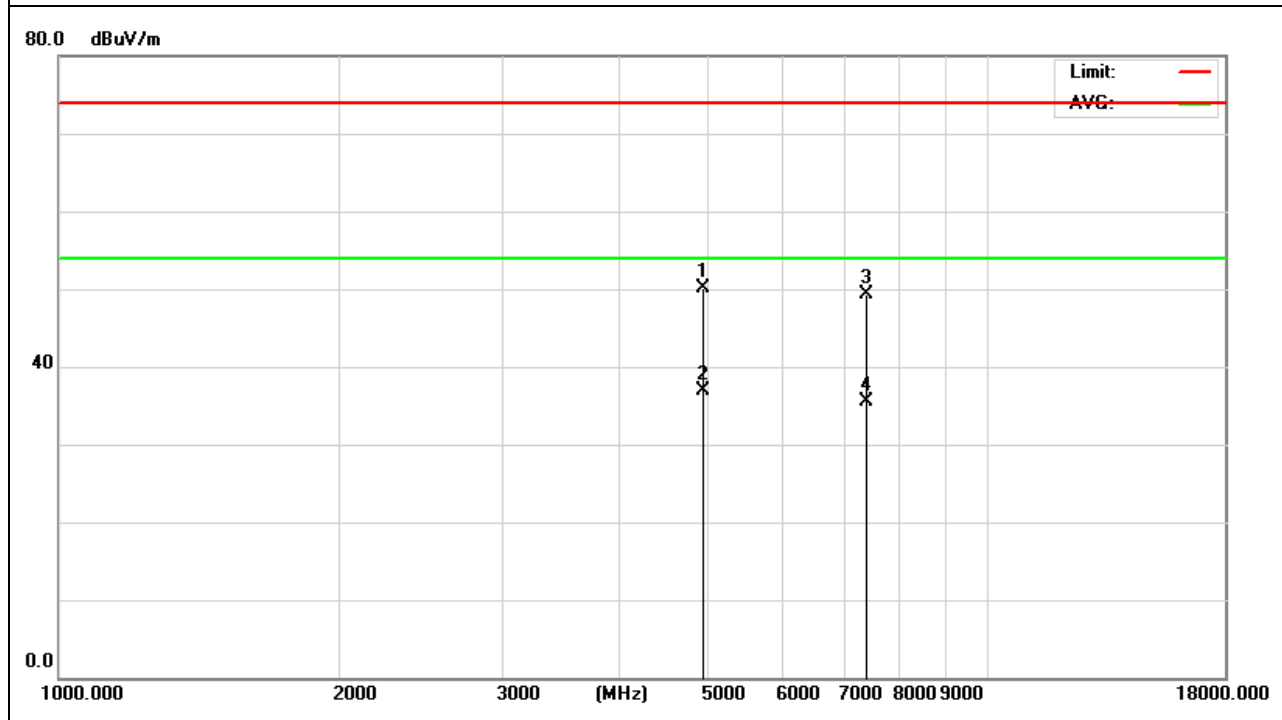




| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 4924.000  | 43.00         | 5.18   | 48.18          | 74.00    | -25.82 | PEAK          |
| 4924.000  | 31.63         | 5.18   | 36.81          | 54.00    | -17.19 | AVE           |
| 7386.000  | 40.86         | 7.82   | 48.68          | 74.00    | -25.32 | PEAK          |
| 7386.000  | 28.65         | 7.82   | 36.47          | 54.00    | -17.53 | AVE           |

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

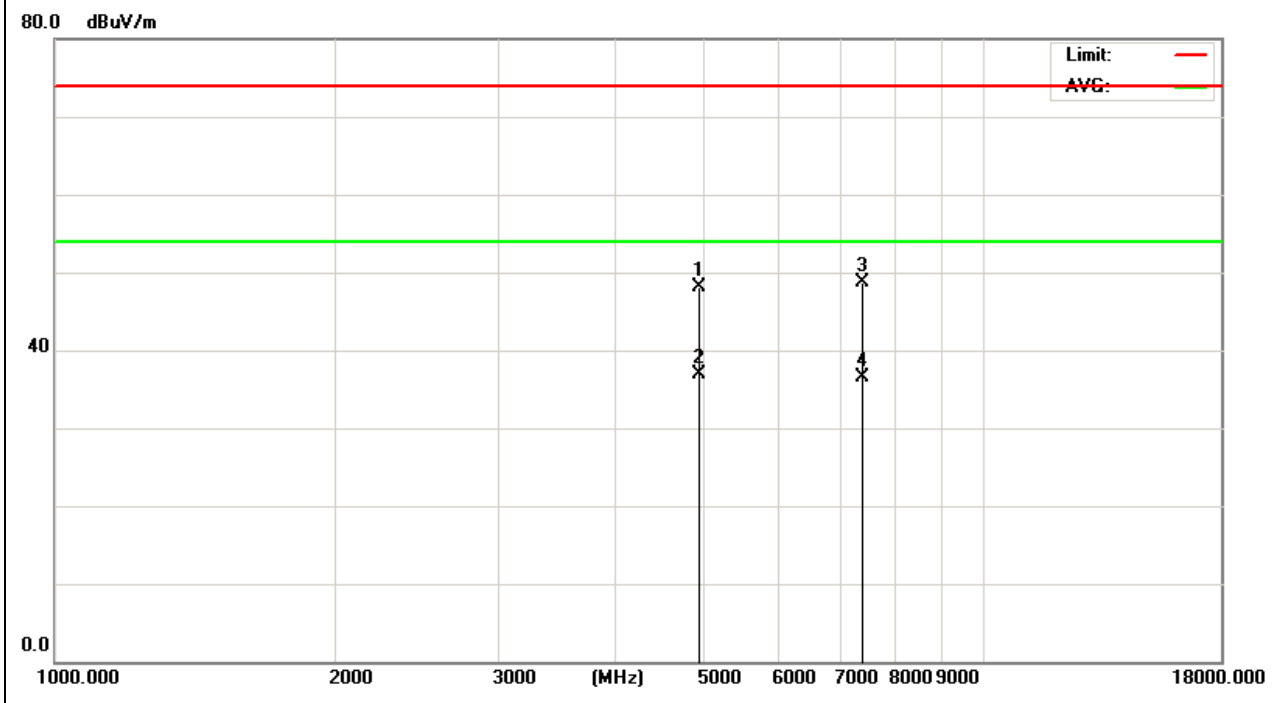

Note:

All the modulation modes were tested, the data of the worst mode are recorded in the above pages and the others modulation methods do not exceed the limits.

The disturbance above 18GHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.



|             |                        |             |                           |
|-------------|------------------------|-------------|---------------------------|
| Power       | : DC 7.6V from battery | Pol/Phase   | : HORIZONTAL/<br>VERTICAL |
| Test Mode 1 | : TX 6Mbps CH1         | Temperature | : 20 °C                   |
| Humidity    | : 59 %                 |             |                           |


## 802.11g mode with 6Mbps data rate

Harmonics & Spurious Emissions. Peak & Average Measurement

| Frequency<br>(MHz) | Meter Reading<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector Type |
|--------------------|-------------------------|----------------|----------------------------|--------------------|----------------|---------------|
| 4824.000           | 43.09                   | 5.08           | 48.17                      | 74.00              | -25.83         | PEAK          |
| 4824.000           | 29.55                   | 5.08           | 34.63                      | 54.00              | -19.37         | AVE           |
| 7236.000           | 40.52                   | 7.16           | 47.68                      | 74.00              | -26.32         | PEAK          |
| 7236.000           | 27.75                   | 7.16           | 34.91                      | 54.00              | -19.09         | AVE           |

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

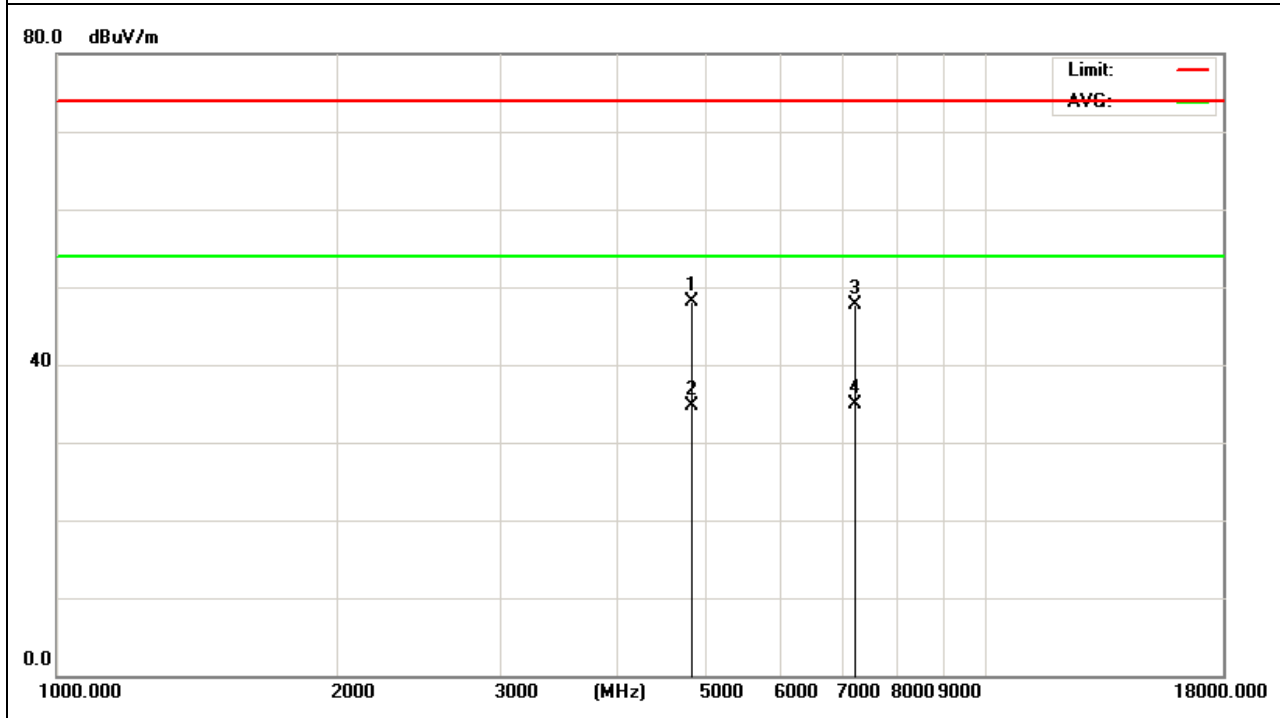




| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 4824.000  | 42.77         | 5.08   | 47.85          | 74.00    | -26.15 | PEAK          |
| 4824.000  | 29.06         | 5.08   | 34.14          | 54.00    | -19.86 | AVE           |
| 7236.000  | 40.68         | 7.55   | 48.23          | 74.00    | -25.77 | PEAK          |
| 7236.000  | 26.93         | 7.55   | 34.48          | 54.00    | -19.52 | AVE           |

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

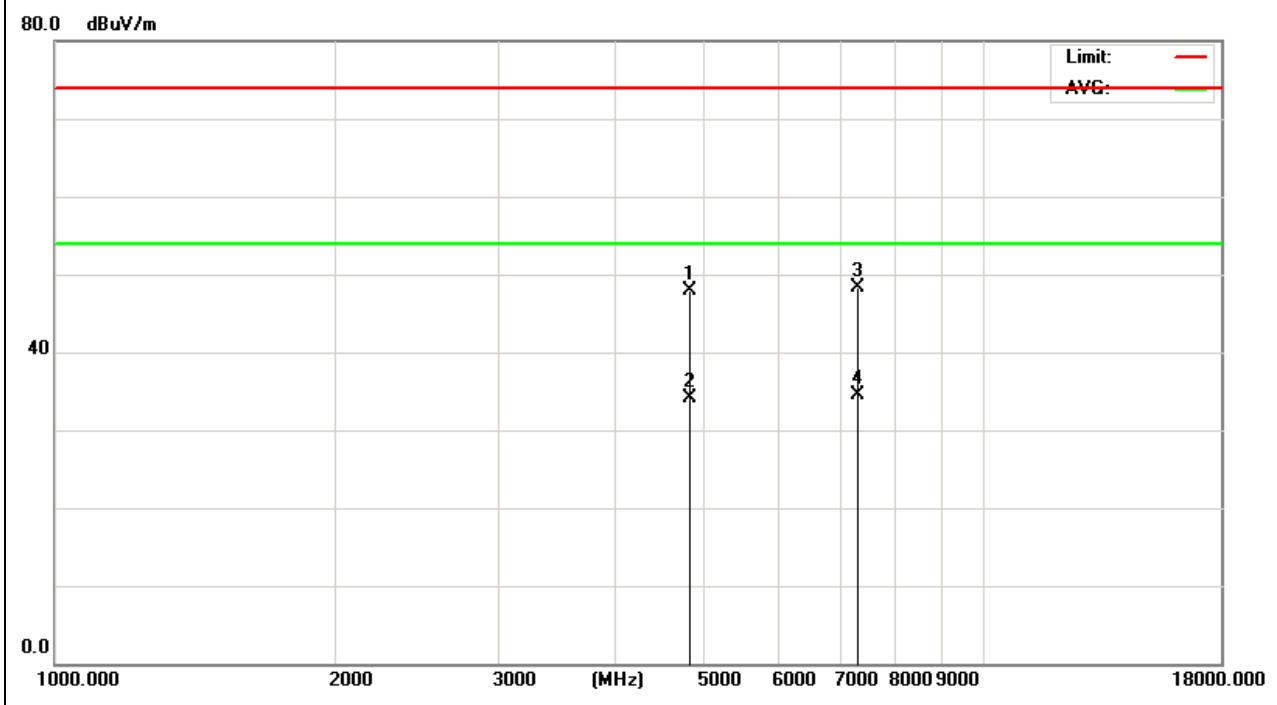

Note:

All the modulation modes were tested, the data of the worst mode are recorded in the above pages and the others modulation methods do not exceed the limits.

The disturbance above 18GHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.




|             |   |                      |             |   |                         |
|-------------|---|----------------------|-------------|---|-------------------------|
| Power       | : | DC 7.6V from battery | Pol/Phase   | : | HORIZONTAL/<br>VERTICAL |
| Test Mode 1 | : | TX 6Mbps CH6         | Temperature | : | 20 °C                   |
| Humidity    | : | 59 %                 |             |   |                         |

## Harmonics & Spurious Emissions. Peak & Average Measurement

| Frequency<br>(MHz) | Meter Reading<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector Type |
|--------------------|-------------------------|----------------|----------------------------|--------------------|----------------|---------------|
| 4874.000           | 41.92                   | 5.13           | 47.05                      | 74.00              | -26.95         | PEAK          |
| 4874.000           | 29.01                   | 5.13           | 34.14                      | 54.00              | -19.86         | AVE           |
| 7311.000           | 39.96                   | 7.49           | 47.45                      | 74.00              | -26.55         | PEAK          |
| 7311.000           | 26.83                   | 7.49           | 34.32                      | 54.00              | -19.68         | AVE           |

### Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

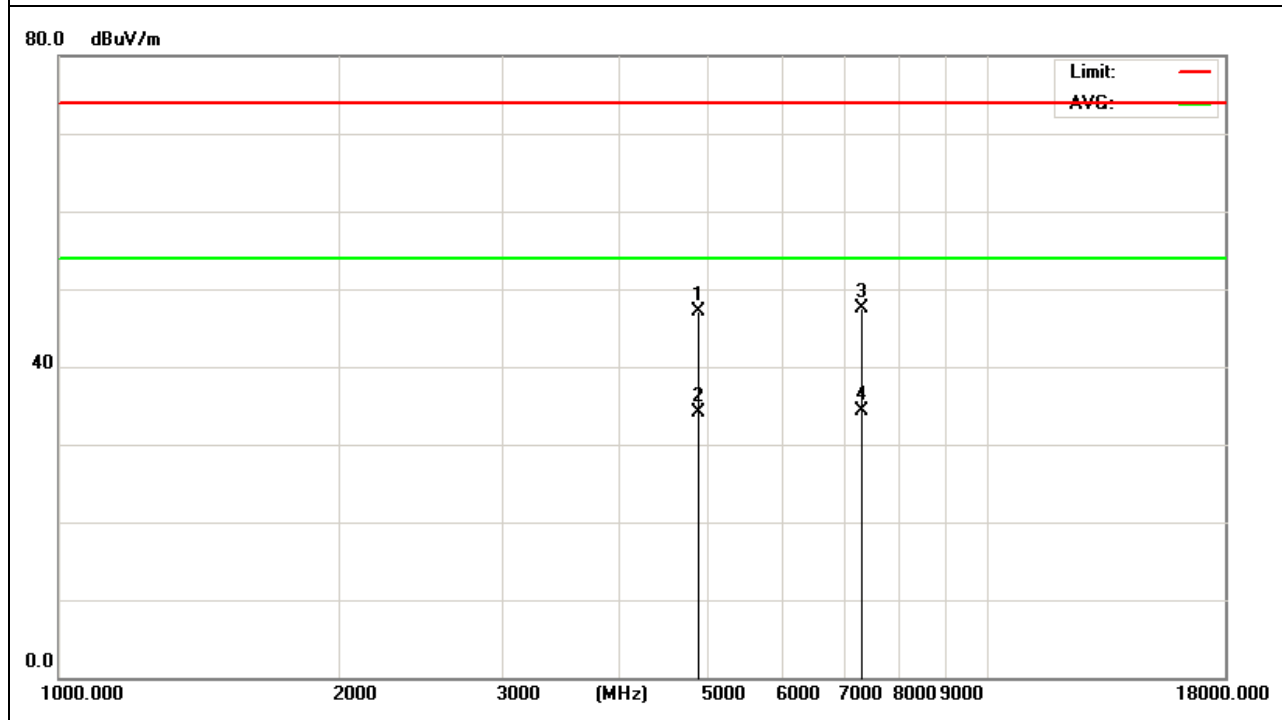




| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 4874.000  | 42.35         | 5.13   | 47.48          | 74.00    | -26.52 | PEAK          |
| 4874.000  | 28.57         | 5.13   | 33.70          | 54.00    | -20.30 | AVE           |
| 7311.000  | 40.03         | 7.49   | 47.52          | 74.00    | -26.48 | PEAK          |
| 7311.000  | 26.86         | 7.49   | 34.35          | 54.00    | -19.65 | AVE           |

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

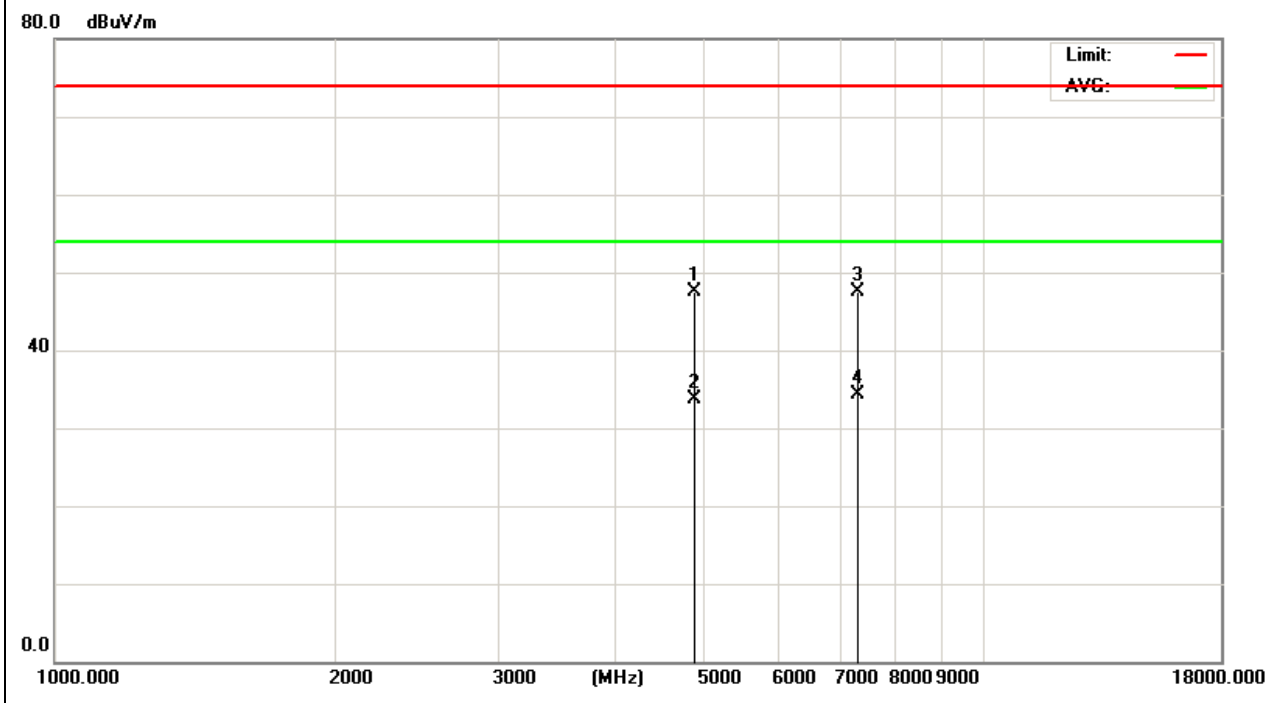

Note:

All the modulation modes were tested, the data of the worst mode are recorded in the above pages and the others modulation methods do not exceed the limits.

The disturbance above 18GHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.




|             |   |                      |             |   |                         |
|-------------|---|----------------------|-------------|---|-------------------------|
| Power       | : | DC 7.6V from battery | Pol/Phase   | : | HORIZONTAL/<br>VERTICAL |
| Test Mode 1 | : | TX 6Mbps CH11        | Temperature | : | 20 °C                   |
| Humidity    | : | 59 %                 |             |   |                         |

## Harmonics & Spurious Emissions. Peak & Average Measurement

| Frequency<br>(MHz) | Meter Reading<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector Type |
|--------------------|-------------------------|----------------|----------------------------|--------------------|----------------|---------------|
| 4924.000           | 43.06                   | 5.18           | 48.24                      | 74.00              | -25.76         | PEAK          |
| 4924.000           | 30.57                   | 5.18           | 35.75                      | 54.00              | -18.25         | AVE           |
| 7386.000           | 40.63                   | 7.82           | 48.45                      | 74.00              | -25.55         | PEAK          |
| 7386.000           | 27.66                   | 7.82           | 35.48                      | 54.00              | -18.52         | AVE           |

### Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

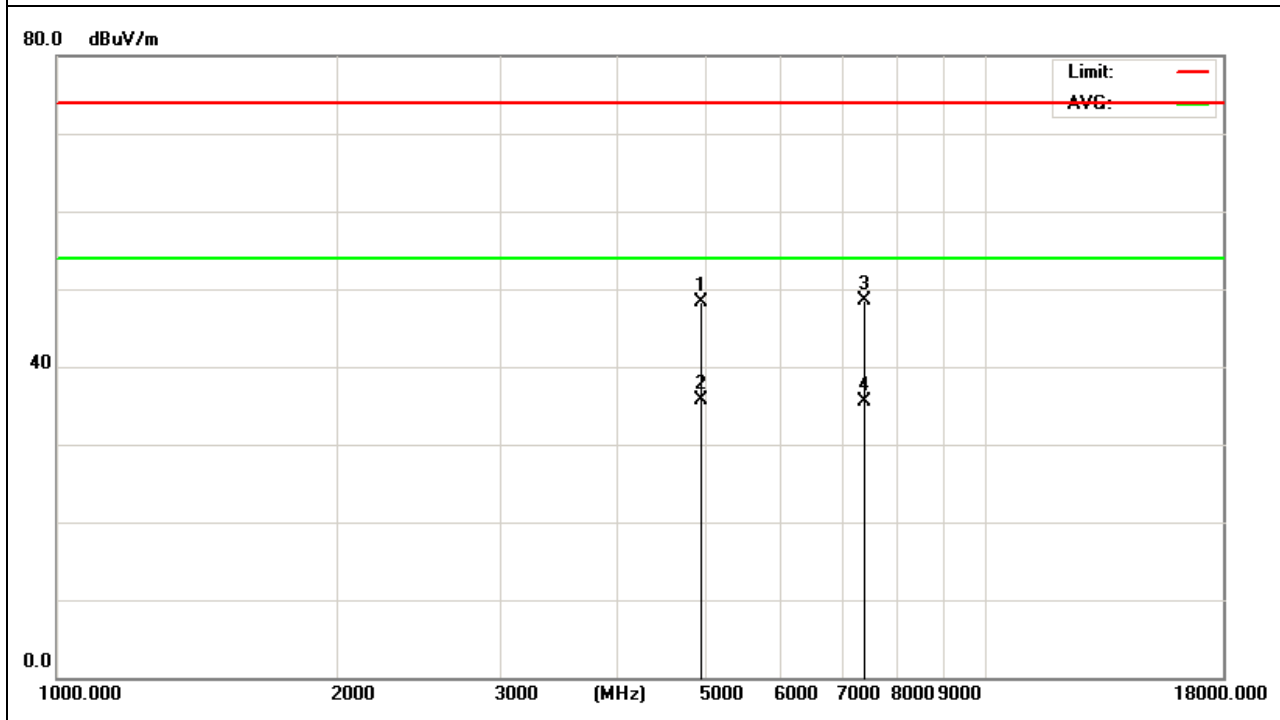




| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 4924.000  | 42.47         | 5.18   | 47.65          | 74.00    | -26.35 | PEAK          |
| 4924.000  | 30.32         | 5.18   | 35.50          | 54.00    | -18.50 | AVE           |
| 7386.000  | 39.09         | 7.82   | 46.91          | 74.00    | -27.09 | PEAK          |
| 7386.000  | 27.22         | 7.82   | 35.04          | 54.00    | -18.96 | AVE           |

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

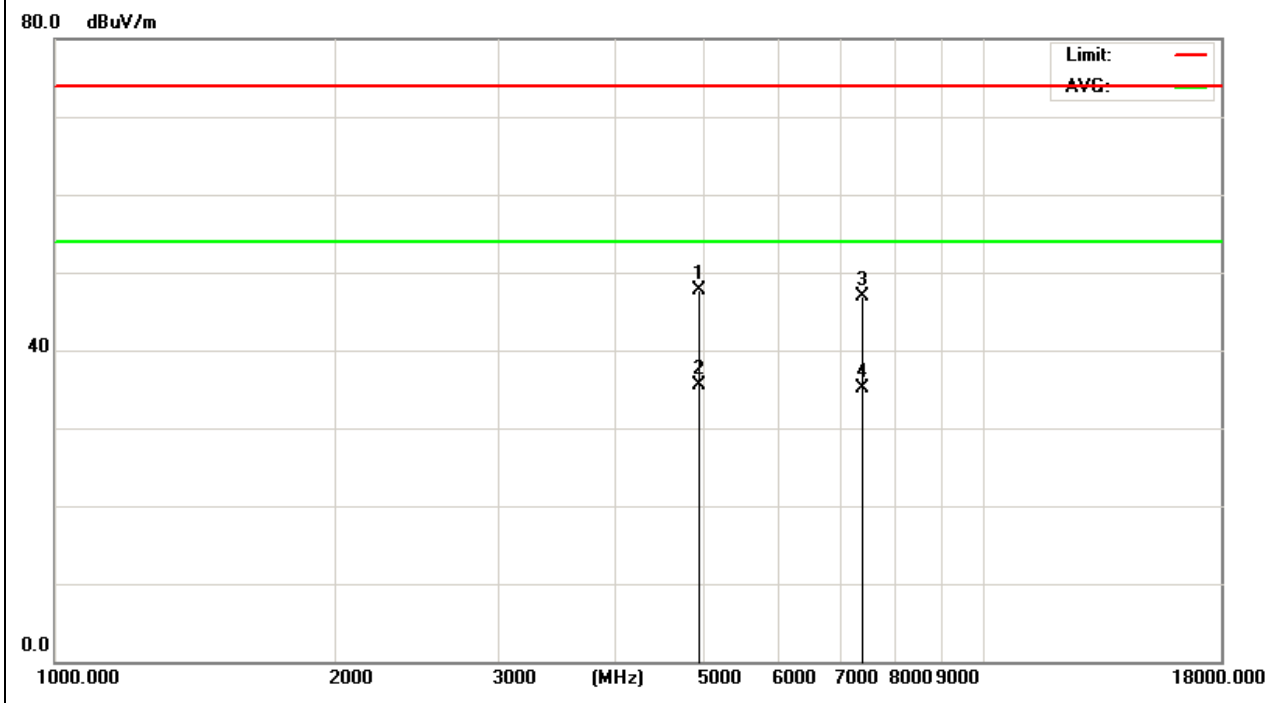

Note:

All the modulation modes were tested, the data of the worst mode are recorded in the above pages and the others modulation methods do not exceed the limits.

The disturbance above 18GHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.



|             |   |                      |             |   |                         |
|-------------|---|----------------------|-------------|---|-------------------------|
| Power       | : | DC 7.6V from battery | Pol/Phase   | : | HORIZONTAL/<br>VERTICAL |
| Test Mode 1 | : | TX 7.2Mbps CH1       | Temperature | : | 20 °C                   |
| Humidity    | : | 59 %                 |             |   |                         |


## 802.11n(HT20) mode with 7.2Mbps data rate

Harmonics & Spurious Emissions. Peak & Average Measurement

| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 4824.000  | 43.78         | 5.08   | 48.86          | 74.00    | -25.14 | PEAK          |
| 4824.000  | 29.85         | 5.08   | 34.93          | 54.00    | -19.07 | AVE           |
| 7236.000  | 41.65         | 7.16   | 48.81          | 74.00    | -25.19 | PEAK          |
| 7236.000  | 27.71         | 7.16   | 34.87          | 54.00    | -19.13 | AVE           |

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

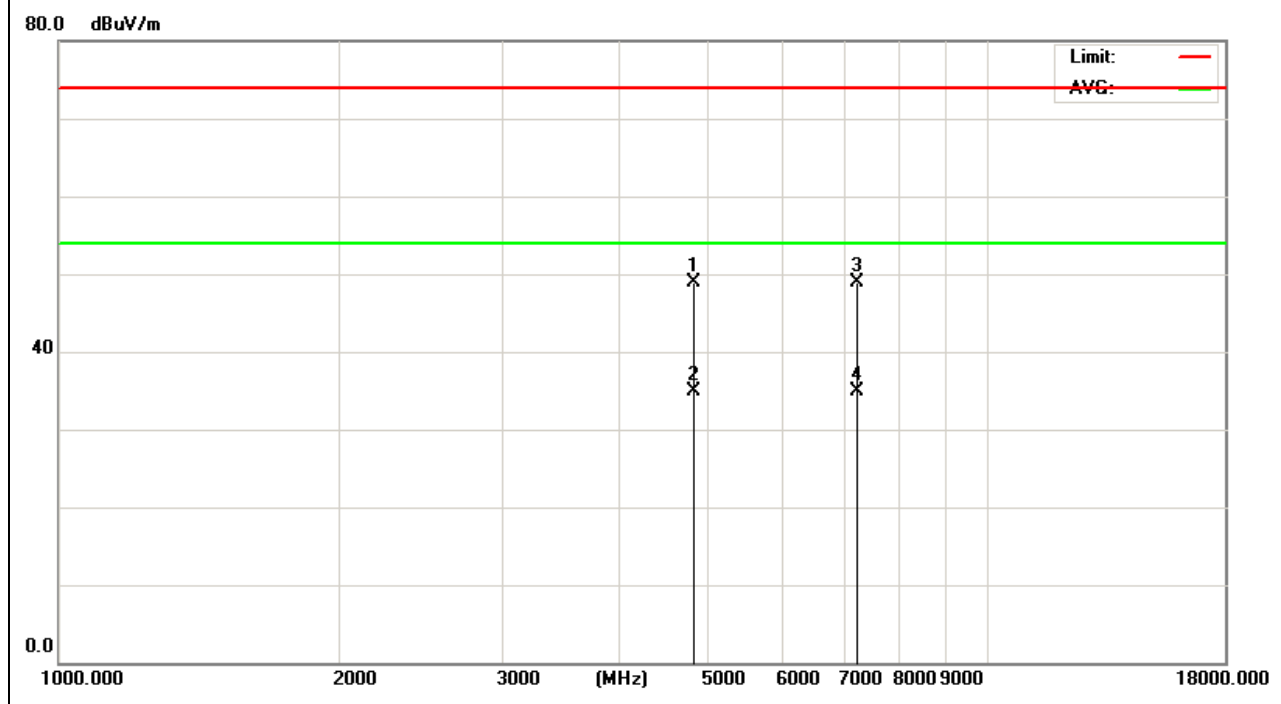




| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 4824.000  | 42.76         | 5.08   | 47.84          | 74.00    | -26.16 | PEAK          |
| 4824.000  | 29.69         | 5.08   | 34.77          | 54.00    | -19.23 | AVE           |
| 7236.000  | 40.80         | 7.55   | 48.35          | 74.00    | -25.65 | PEAK          |
| 7236.000  | 26.85         | 7.55   | 34.40          | 54.00    | -19.60 | AVE           |

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

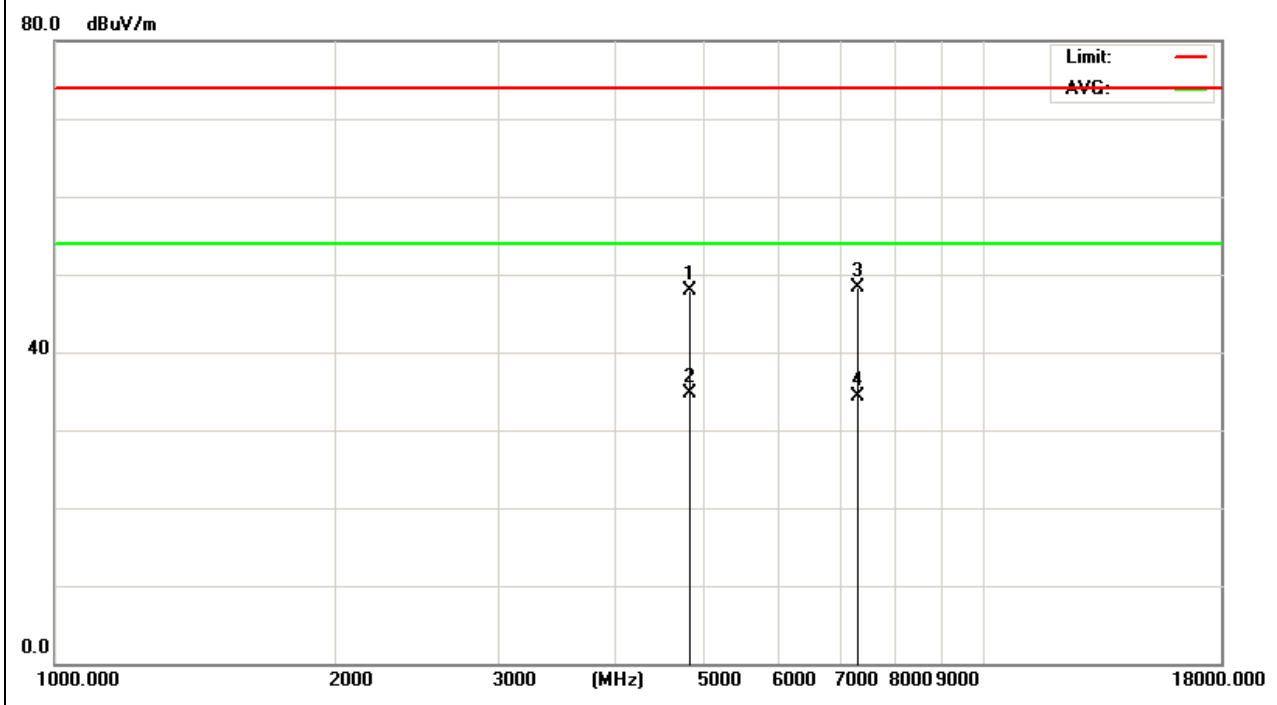

Note:

All the modulation modes were tested, the data of the worst mode are recorded in the above pages and the others modulation methods do not exceed the limits.

The disturbance above 18GHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.




|             |   |                      |             |   |                         |
|-------------|---|----------------------|-------------|---|-------------------------|
| Power       | : | DC 7.6V from battery | Pol/Phase   | : | HORIZONTAL/<br>VERTICAL |
| Test Mode 1 | : | TX 7.2Mbps CH6       | Temperature | : | 20 °C                   |
| Humidity    | : | 59 %                 |             |   |                         |

## Harmonics & Spurious Emissions. Peak & Average Measurement

| Frequency<br>(MHz) | Meter Reading<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector Type |
|--------------------|-------------------------|----------------|----------------------------|--------------------|----------------|---------------|
| 4874.000           | 42.82                   | 5.13           | 47.95                      | 74.00              | -26.05         | PEAK          |
| 4874.000           | 29.35                   | 5.13           | 34.48                      | 54.00              | -19.52         | AVE           |
| 7311.000           | 41.09                   | 7.49           | 48.58                      | 74.00              | -25.42         | PEAK          |
| 7311.000           | 27.63                   | 7.49           | 35.12                      | 54.00              | -18.88         | AVE           |

### Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

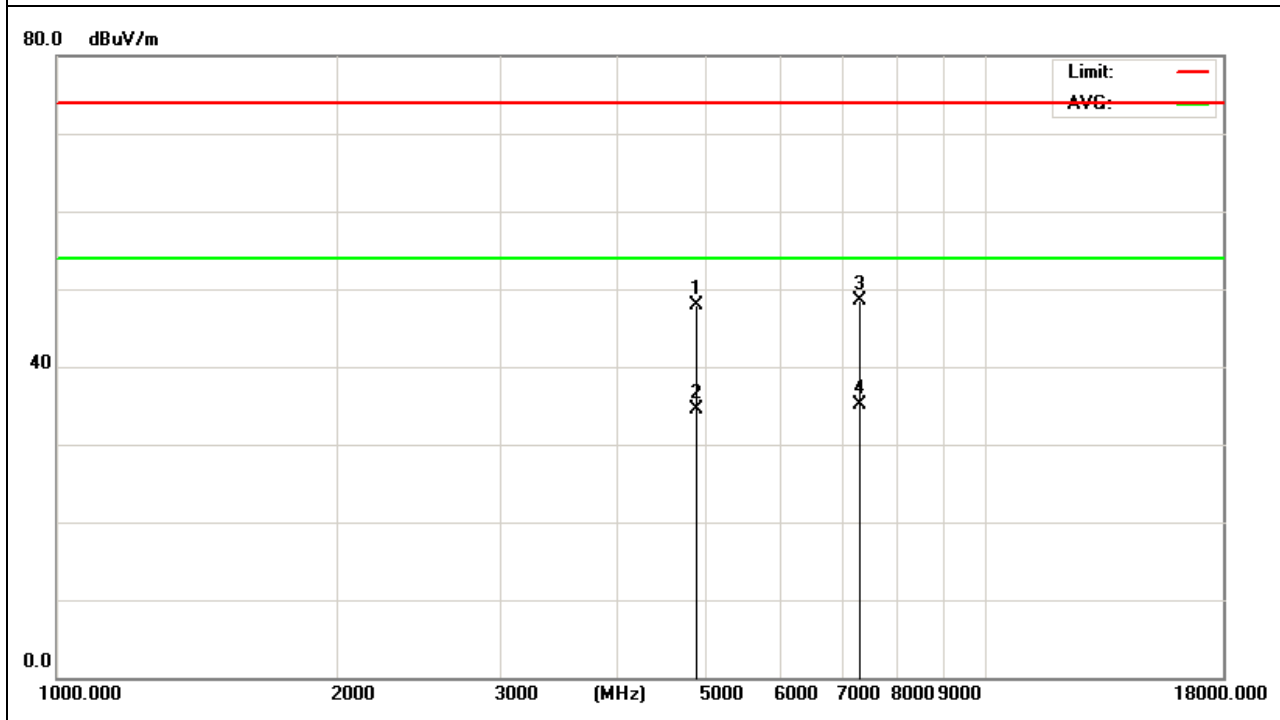




| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 4874.000  | 43.19         | 5.13   | 48.32          | 74.00    | -25.68 | PEAK          |
| 4874.000  | 29.33         | 5.13   | 34.46          | 54.00    | -19.54 | AVE           |
| 7311.000  | 40.08         | 7.49   | 47.57          | 74.00    | -26.43 | PEAK          |
| 7311.000  | 26.74         | 7.49   | 34.23          | 54.00    | -19.77 | AVE           |

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

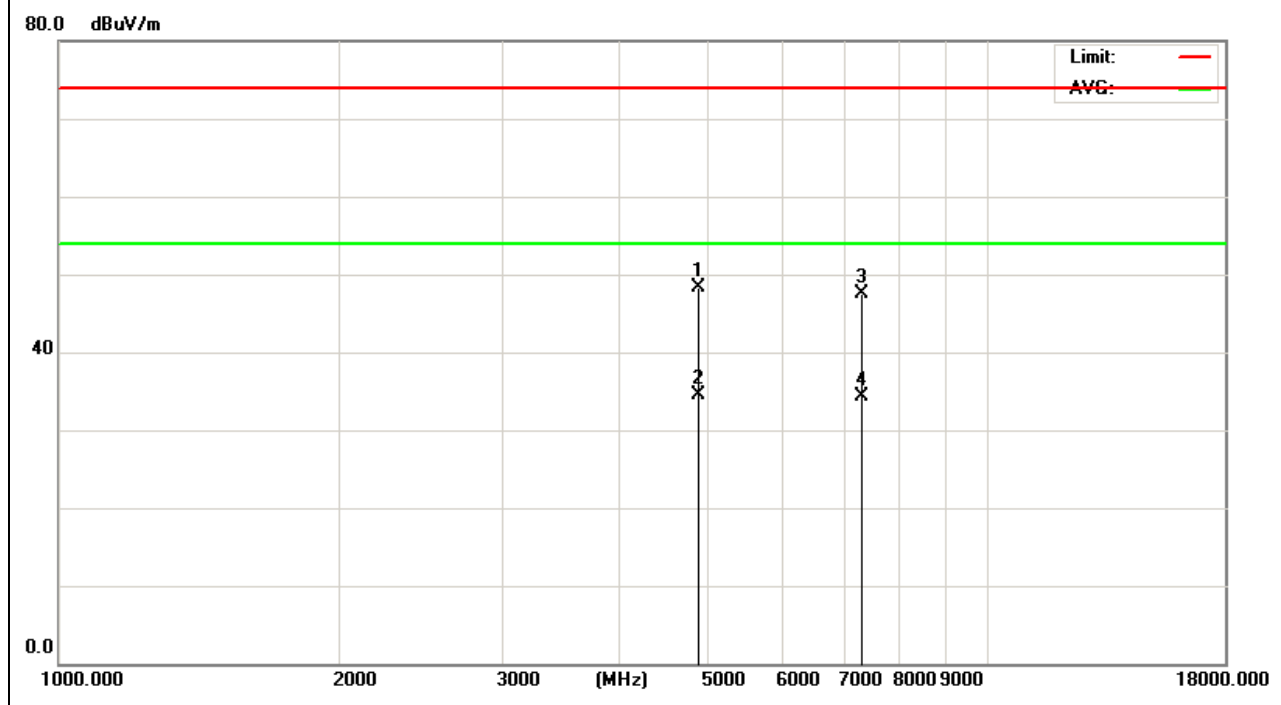

Note:

All the modulation modes were tested, the data of the worst mode are recorded in the above pages and the others modulation methods do not exceed the limits.

The disturbance above 18GHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.




|             |                        |             |                           |
|-------------|------------------------|-------------|---------------------------|
| Power       | : DC 7.6V from battery | Pol/Phase   | : HORIZONTAL/<br>VERTICAL |
| Test Mode 1 | : TX 7.2Mbps CH11      | Temperature | : 20 °C                   |
| Humidity    | : 59 %                 |             |                           |

## 1~25 GHz Harmonics & Spurious Emissions. Peak & Average Measurement

| Frequency<br>(MHz) | Meter Reading<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector Type |
|--------------------|-------------------------|----------------|----------------------------|--------------------|----------------|---------------|
| 4924.000           | 43.73                   | 5.18           | 48.91                      | 74.00              | -25.09         | PEAK          |
| 4924.000           | 31.63                   | 5.18           | 36.81                      | 54.00              | -17.19         | AVE           |
| 7386.000           | 40.76                   | 7.82           | 48.58                      | 74.00              | -25.42         | PEAK          |
| 7386.000           | 27.06                   | 7.82           | 34.88                      | 54.00              | -19.12         | AVE           |

### Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

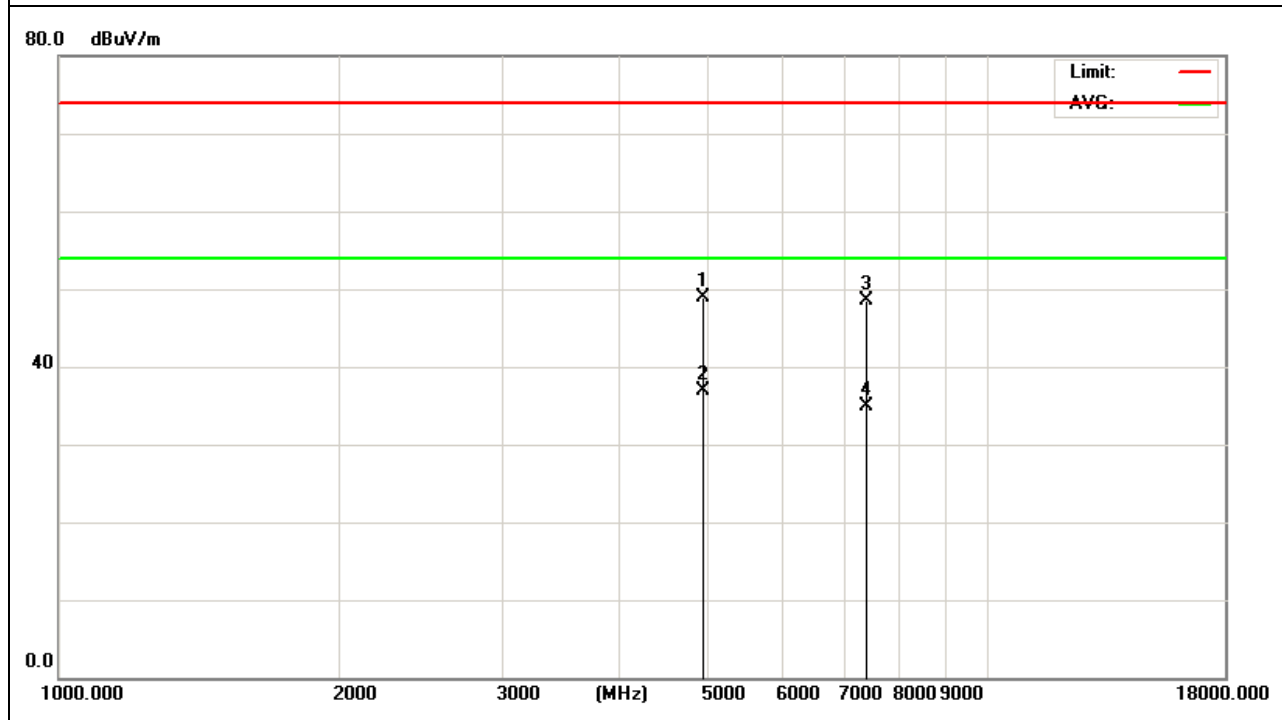




| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 4844.000  | 42.71         | 5.18   | 47.89          | 74.00    | -26.11 | PEAK          |
| 4844.000  | 30.33         | 5.18   | 35.51          | 54.00    | -18.49 | AVE           |
| 7266.000  | 39.79         | 7.82   | 47.61          | 74.00    | -26.39 | PEAK          |
| 7266.000  | 27.82         | 7.82   | 35.64          | 54.00    | -18.36 | AVE           |

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

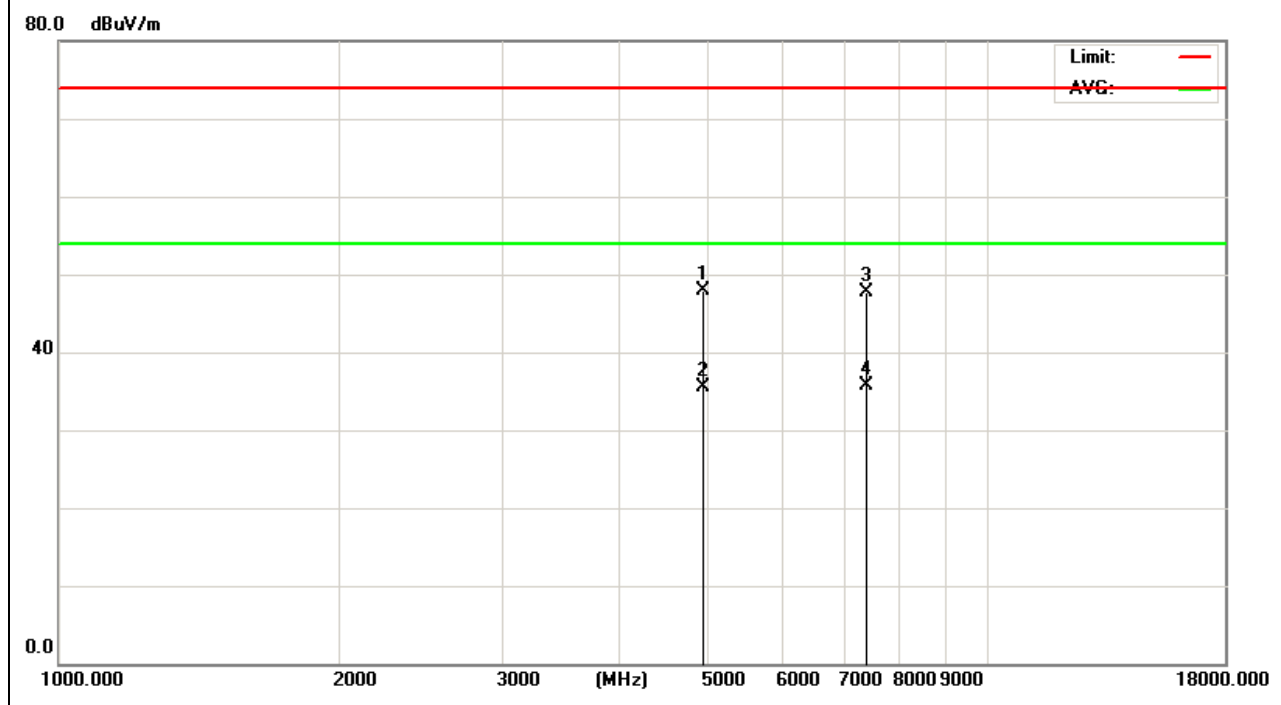

Note:

All the modulation modes were tested, the data of the worst mode are recorded in the above pages and the others modulation methods do not exceed the limits.

The disturbance above 18GHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.



|             |   |                      |             |   |                         |
|-------------|---|----------------------|-------------|---|-------------------------|
| Power       | : | DC 7.6V from battery | Pol/Phase   | : | HORIZONTAL/<br>VERTICAL |
| Test Mode 1 | : | TX 15Mbps CH3        | Temperature | : | 20 °C                   |
| Humidity    | : | 59 %                 |             |   |                         |


## 802.11n(HT40) mode with 15Mbps data rate

Harmonics & Spurious Emissions. Peak & Average Measurement

| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 4844.000  | 43.79         | 5.11   | 48.90          | 74.00    | -25.10 | PEAK          |
| 4844.000  | 29.03         | 5.11   | 34.14          | 54.00    | -19.86 | AVE           |
| 7266.000  | 40.85         | 7.29   | 48.14          | 74.00    | -25.86 | PEAK          |
| 7266.000  | 27.54         | 7.29   | 34.83          | 54.00    | -19.17 | AVE           |

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

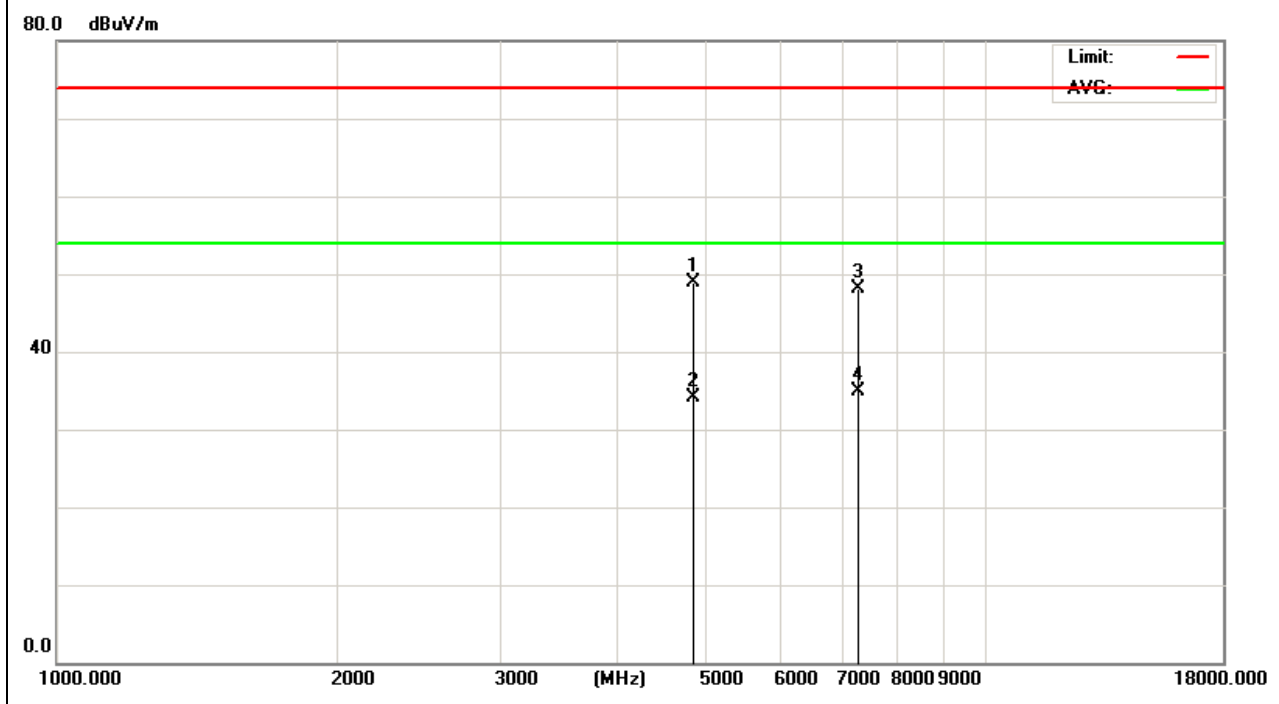




| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 4844.000  | 43.82         | 5.11   | 48.93          | 74.00    | -25.07 | PEAK          |
| 4844.000  | 29.30         | 5.11   | 34.41          | 54.00    | -19.59 | AVE           |
| 7266.000  | 40.75         | 7.29   | 48.04          | 74.00    | -25.96 | PEAK          |
| 7266.000  | 27.09         | 7.29   | 34.38          | 54.00    | -19.62 | AVE           |

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

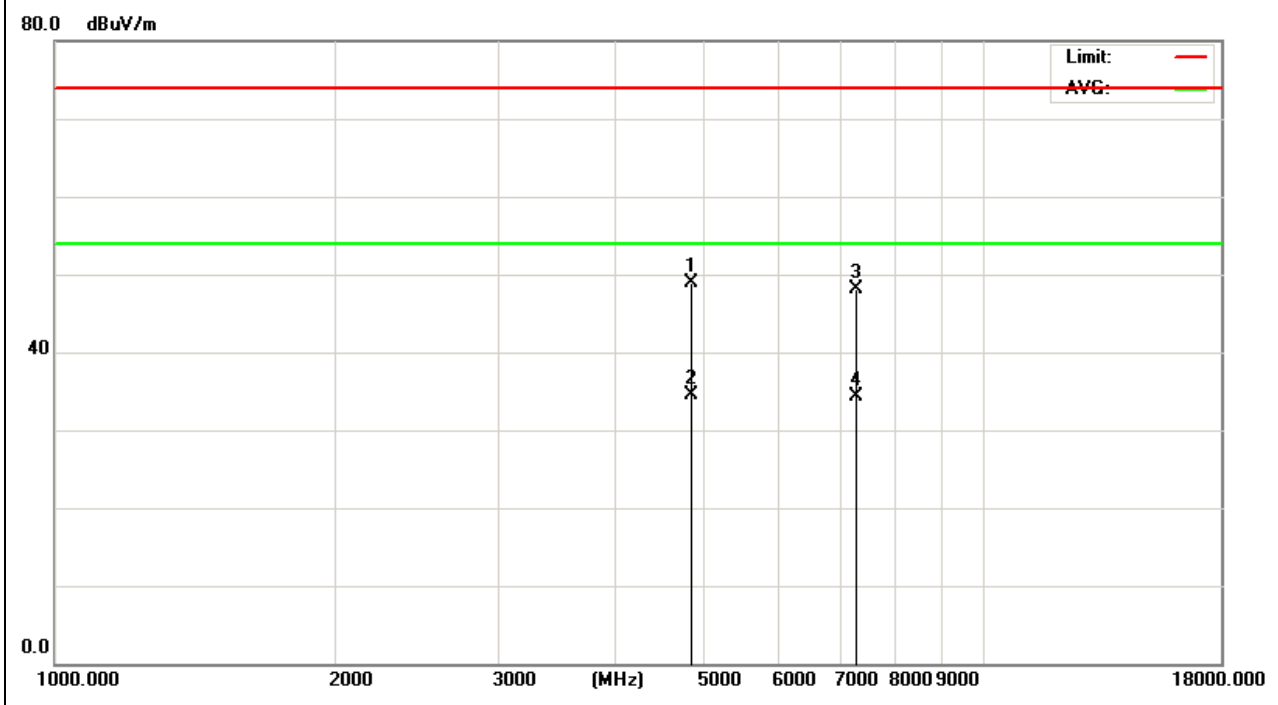




|             |   |                      |             |   |                         |
|-------------|---|----------------------|-------------|---|-------------------------|
| Power       | : | DC 7.6V from battery | Pol/Phase   | : | HORIZONTAL/<br>VERTICAL |
| Test Mode 1 | : | TX 15Mbps CH6        | Temperature | : | 20 °C                   |
| Humidity    | : | 59 %                 |             |   |                         |

| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 4874.000  | 42.09         | 5.13   | 47.22          | 74.00    | -26.78 | PEAK          |
| 4874.000  | 29.19         | 5.13   | 34.32          | 54.00    | -19.68 | AVE           |
| 7311.000  | 40.01         | 7.49   | 47.50          | 74.00    | -26.50 | PEAK          |
| 7311.000  | 27.32         | 7.49   | 34.81          | 54.00    | -19.19 | AVE           |

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

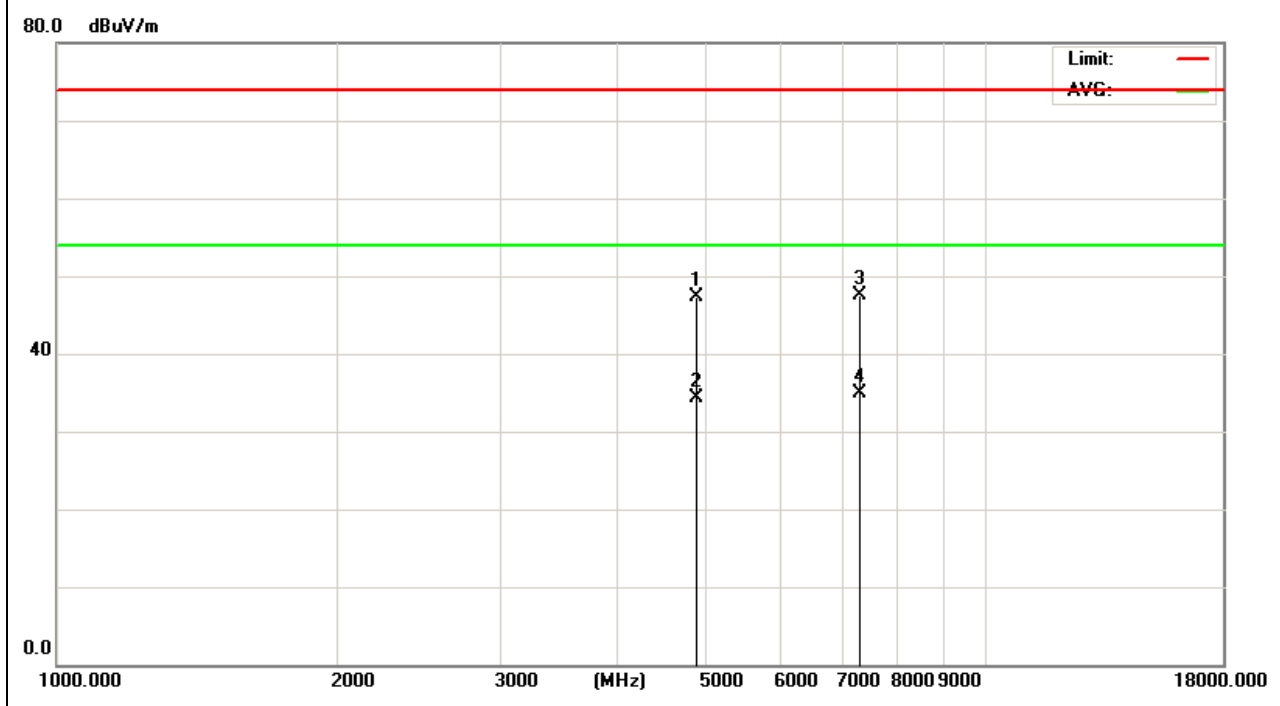




## Harmonics & Spurious Emissions. Peak & Average Measurement

| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 4874.000  | 42.85         | 5.13   | 47.98          | 74.00    | -26.02 | PEAK          |
| 4874.000  | 29.06         | 5.13   | 34.19          | 54.00    | -19.81 | AVE           |
| 7311.000  | 40.86         | 7.49   | 48.35          | 74.00    | -25.65 | PEAK          |
| 7311.000  | 26.93         | 7.49   | 34.42          | 54.00    | -19.58 | AVE           |

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

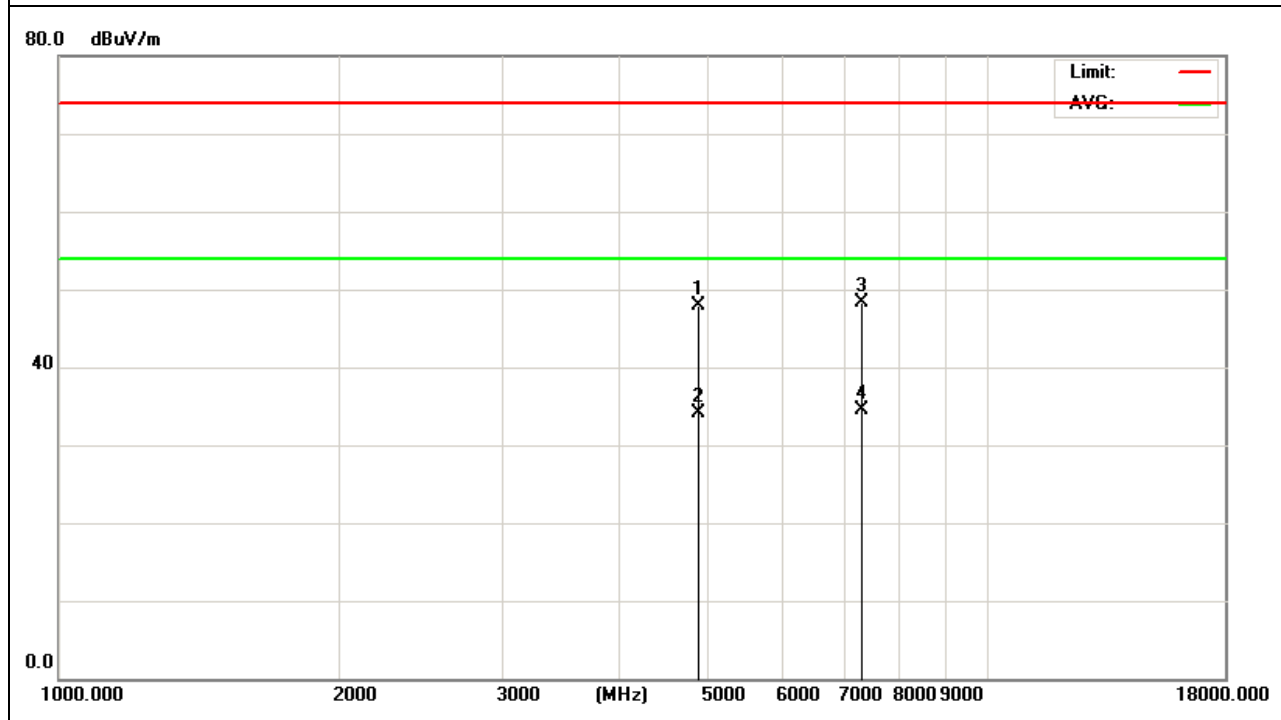

Note:

All the modulation modes were tested, the data of the worst mode are recorded in the above pages and the others modulation methods do not exceed the limits.

The disturbance above 18GHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.




|             |   |                      |             |   |                         |
|-------------|---|----------------------|-------------|---|-------------------------|
| Power       | : | DC 7.6V from battery | Pol/Phase   | : | HORIZONTAL/<br>VERTICAL |
| Test Mode 1 | : | TX 15Mbps CH9        | Temperature | : | 20 °C                   |
| Humidity    | : | 59 %                 |             |   |                         |

## Harmonics & Spurious Emissions. Peak & Average Measurement

| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 4904.000  | 44.72         | 5.16   | 49.88          | 74.00    | -24.12 | peak          |
| 4904.000  | 31.07         | 5.16   | 36.23          | 54.00    | -17.77 | AVE           |
| 7356.000  | 40.63         | 7.69   | 48.32          | 74.00    | -25.68 | peak          |
| 7356.000  | 27.95         | 7.69   | 35.64          | 54.00    | -18.36 | AVE           |

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

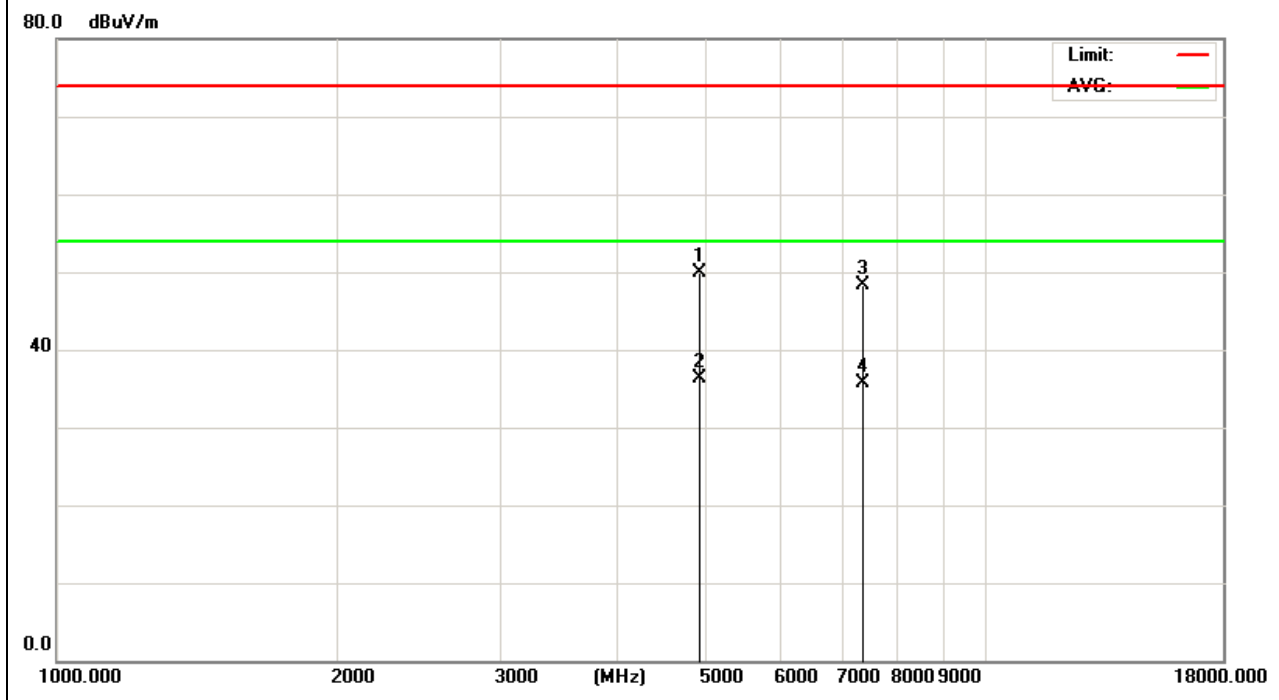




| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 4904.000  | 42.85         | 5.16   | 48.01          | 74.00    | -25.99 | peak          |
| 4904.000  | 30.18         | 5.16   | 35.34          | 54.00    | -18.66 | AVE           |
| 7356.000  | 40.66         | 7.69   | 48.35          | 74.00    | -25.65 | peak          |
| 7356.000  | 27.85         | 7.69   | 35.54          | 54.00    | -18.46 | AVE           |

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

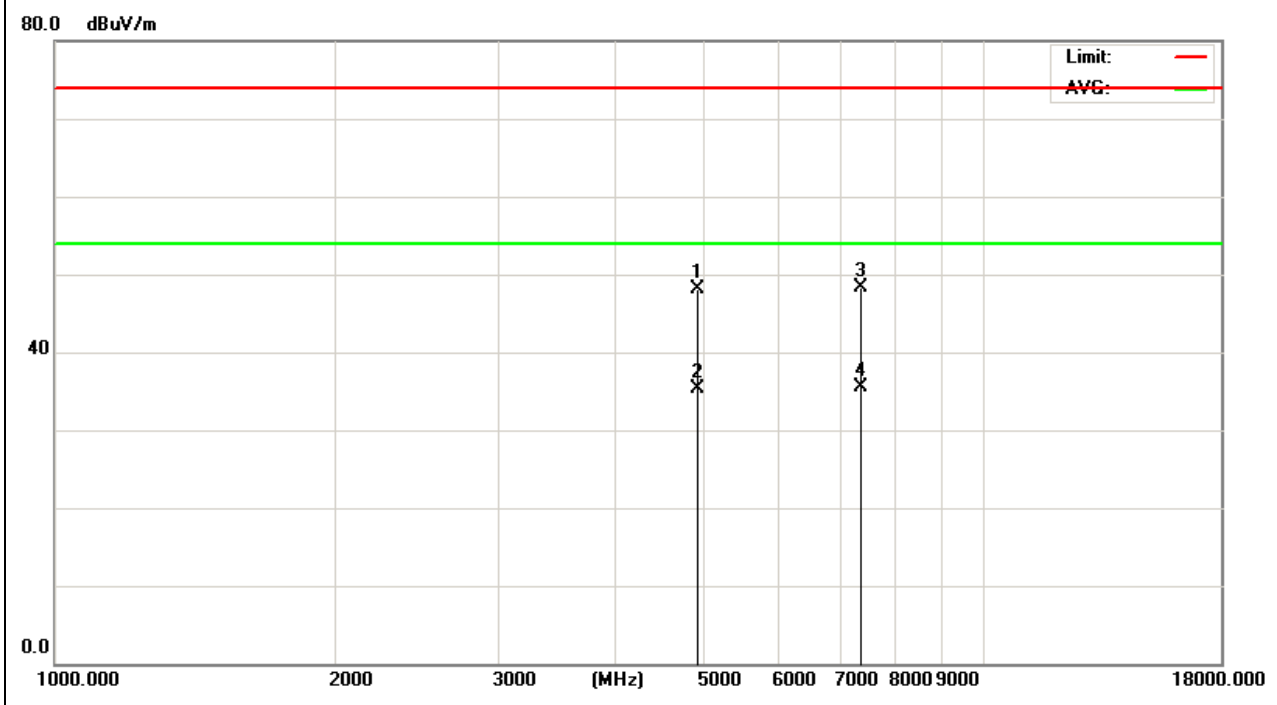

Note:

All the modulation modes were tested, the data of the worst mode are recorded in the above pages and the others modulation methods do not exceed the limits.

The disturbance above 18GHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.



## Antenna B:

|             |   |                      |             |   |                         |
|-------------|---|----------------------|-------------|---|-------------------------|
| Power       | : | DC 7.6V from battery | Pol/Phase   | : | HORIZONTAL/<br>VERTICAL |
| Test Mode 1 | : | TX 1Mbps CH1         | Temperature | : | 20 °C                   |
| Humidity    | : | 59 %                 |             |   |                         |


### 802.11b mode with 1Mbps data rate

Harmonics & Spurious Emissions. Peak & Average Measurement

| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 4824.000  | 44.13         | 5.08   | 49.21          | 74.00    | -24.79 | PEAK          |
| 4824.000  | 30.54         | 5.08   | 35.62          | 54.00    | -18.38 | AVE           |
| 7236.000  | 43.22         | 7.16   | 50.38          | 74.00    | -23.62 | PEAK          |
| 7236.000  | 29.48         | 7.16   | 36.64          | 54.00    | -17.36 | AVE           |

### Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

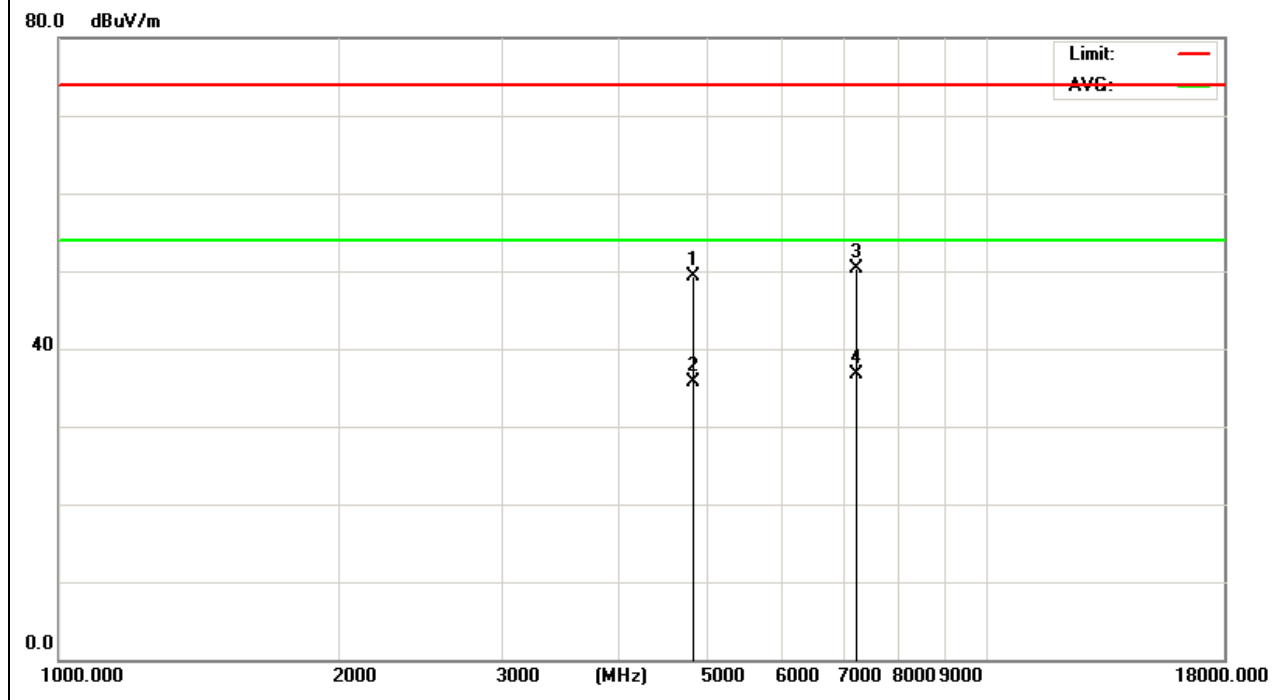




| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 4824.000  | 44.01         | 5.08   | 49.09          | 74.00    | -24.91 | PEAK          |
| 4824.000  | 30.23         | 5.08   | 35.31          | 54.00    | -18.69 | AVE           |
| 7236.000  | 41.75         | 7.55   | 49.3           | 74.00    | -24.70 | PEAK          |
| 7236.000  | 28.22         | 7.55   | 35.77          | 54.00    | -18.23 | AVE           |

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

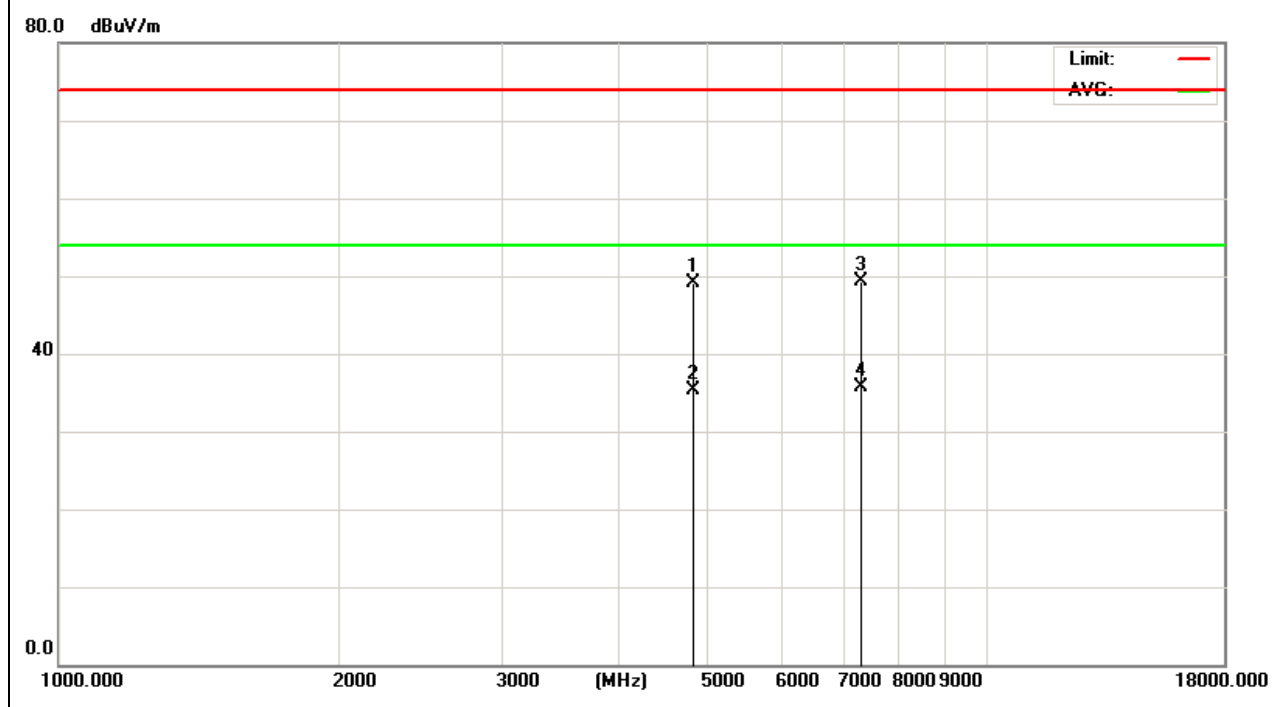

Note:

All the modulation modes were tested, the data of the worst mode are recorded in the above pages and the others modulation methods do not exceed the limits.

The disturbance above 18GHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.




|             |   |                      |             |   |                         |
|-------------|---|----------------------|-------------|---|-------------------------|
| Power       | : | DC 7.6V from battery | Pol/Phase   | : | HORIZONTAL/<br>VERTICAL |
| Test Mode 1 | : | TX 1Mbps CH6         | Temperature | : | 20 °C                   |
| Humidity    | : | 59 %                 |             |   |                         |

## Harmonics & Spurious Emissions. Peak & Average Measurement

| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 4874.000  | 42.95         | 5.13   | 48.08          | 74.00    | -25.92 | PEAK          |
| 4874.000  | 30.09         | 5.13   | 35.22          | 54.00    | -18.78 | AVE           |
| 7311.000  | 40.87         | 7.49   | 48.36          | 74.00    | -25.64 | PEAK          |
| 7311.000  | 28.96         | 7.49   | 36.45          | 54.00    | -17.55 | AVE           |

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

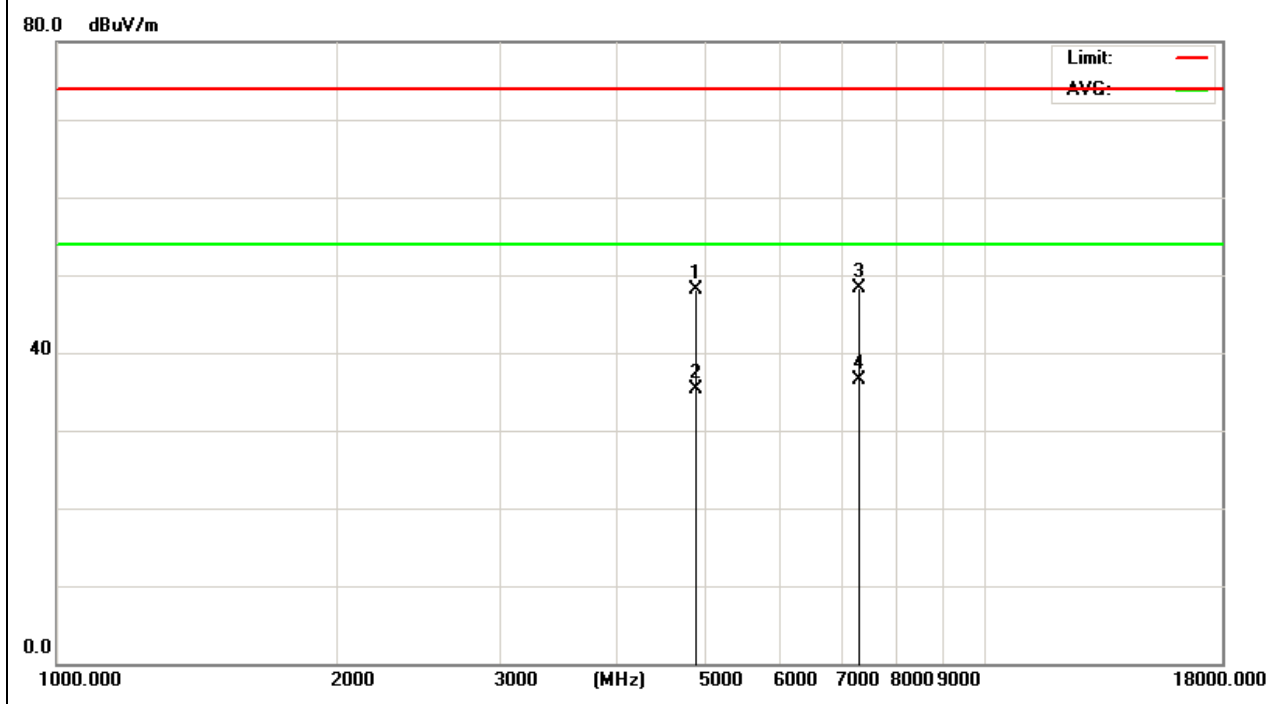




| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 4874.000  | 43.91         | 5.13   | 49.04          | 74.00    | -24.96 | PEAK          |
| 4874.000  | 30.15         | 5.13   | 35.28          | 54.00    | -18.72 | AVE           |
| 7311.000  | 42.01         | 7.49   | 49.5           | 74.00    | -24.5  | PEAK          |
| 7311.000  | 28.91         | 7.49   | 36.40          | 54.00    | -17.60 | AVE           |

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

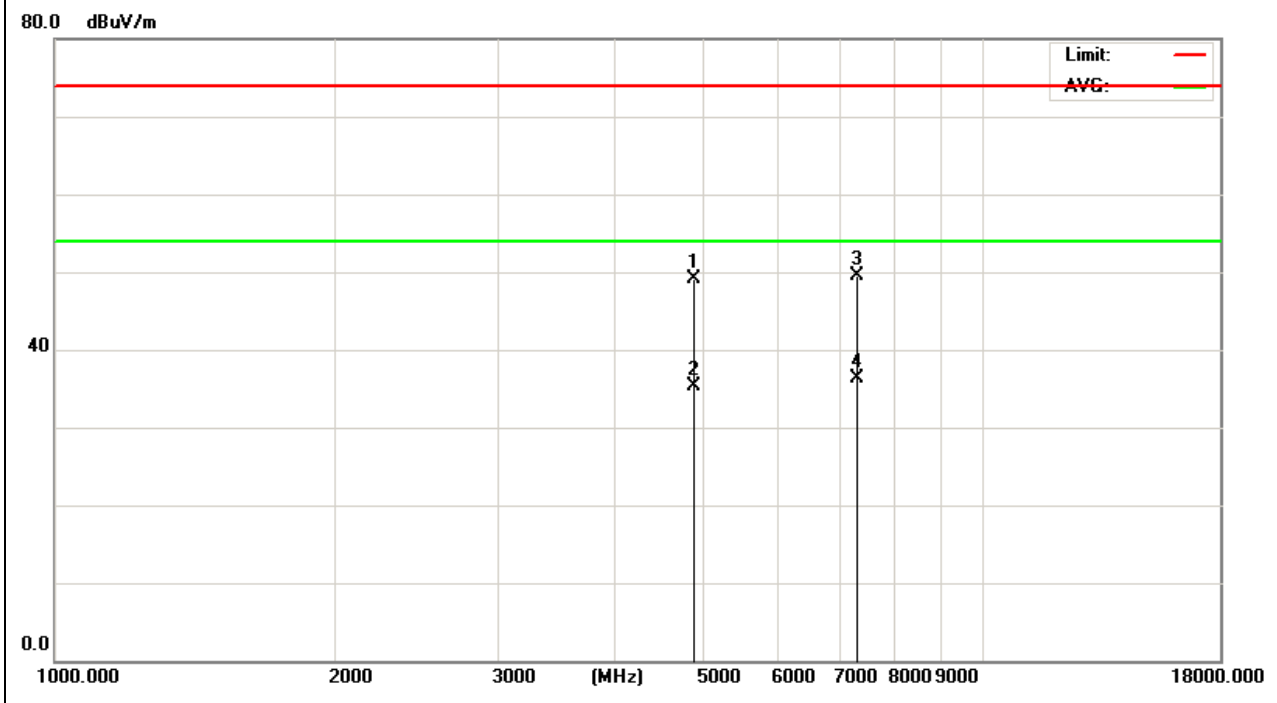

Note:

All the modulation modes were tested, the data of the worst mode are recorded in the above pages and the others modulation methods do not exceed the limits.

The disturbance above 18GHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.




|             |                        |             |                           |
|-------------|------------------------|-------------|---------------------------|
| Power       | : DC 7.6V from battery | Pol/Phase   | : HORIZONTAL/<br>VERTICAL |
| Test Mode 1 | : TX 1Mbps CH11        | Temperature | : 30 °C                   |
| Humidity    | : 59 %                 |             |                           |

## Harmonics & Spurious Emissions. Peak & Average Measurement

| Frequency<br>(MHz) | Meter Reading<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector Type |
|--------------------|-------------------------|----------------|----------------------------|--------------------|----------------|---------------|
| 4924.000           | 44.12                   | 5.18           | 49.3                       | 74.00              | -24.7          | PEAK          |
| 4924.000           | 31.36                   | 5.18           | 36.54                      | 54.00              | -17.46         | AVE           |
| 7386.000           | 41.57                   | 7.82           | 49.39                      | 74.00              | -24.61         | PEAK          |
| 7386.000           | 27.69                   | 7.82           | 35.51                      | 54.00              | -18.49         | AVE           |

### Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

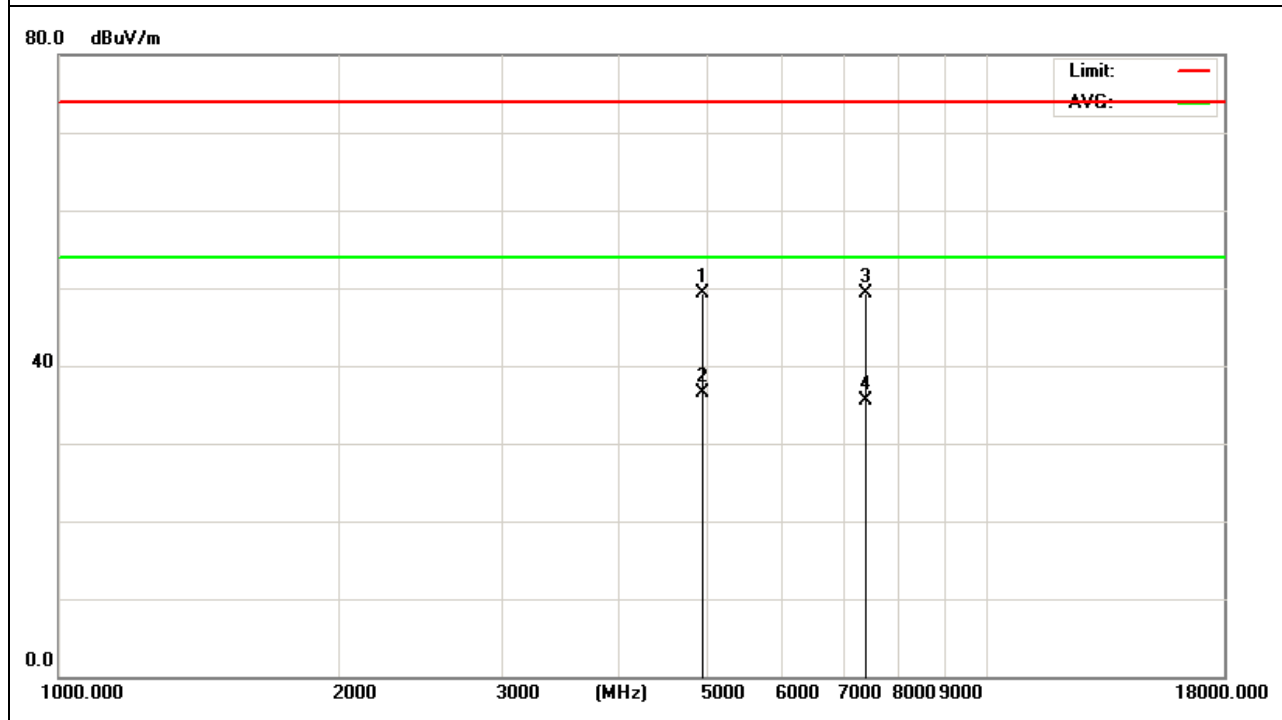




| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 4924.000  | 43.03         | 5.18   | 48.21          | 74.00    | -25.79 | PEAK          |
| 4924.000  | 31.00         | 5.18   | 36.18          | 54.00    | -17.82 | AVE           |
| 7386.000  | 41.02         | 7.82   | 48.84          | 74.00    | -25.16 | PEAK          |
| 7386.000  | 28.69         | 7.82   | 36.51          | 54.00    | -17.49 | AVE           |

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

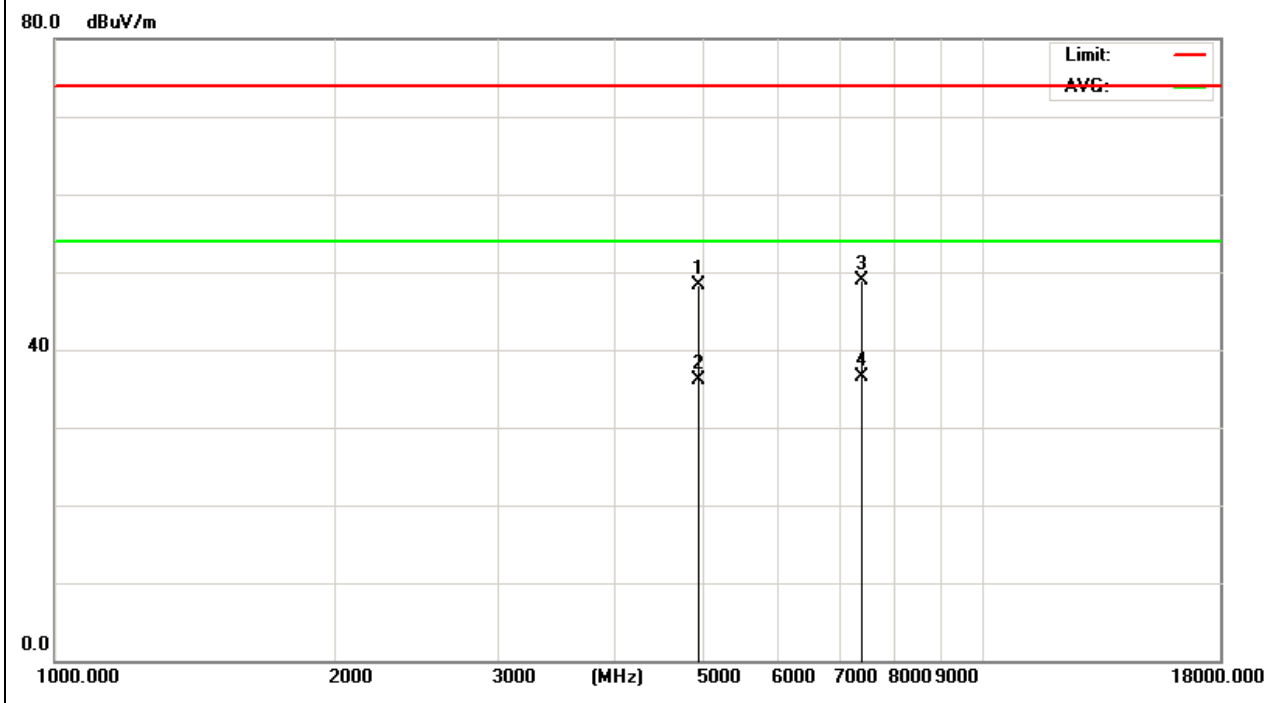

Note:

All the modulation modes were tested, the data of the worst mode are recorded in the above pages and the others modulation methods do not exceed the limits.

The disturbance above 18GHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.



|             |                        |             |                           |
|-------------|------------------------|-------------|---------------------------|
| Power       | : DC 7.6V from battery | Pol/Phase   | : HORIZONTAL/<br>VERTICAL |
| Test Mode 1 | : TX 6Mbps CH1         | Temperature | : 20 °C                   |
| Humidity    | : 59 %                 |             |                           |


## 802.11g mode with 6Mbps data rate

Harmonics & Spurious Emissions. Peak & Average Measurement

| Frequency<br>(MHz) | Meter Reading<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector Type |
|--------------------|-------------------------|----------------|----------------------------|--------------------|----------------|---------------|
| 4824.000           | 43.21                   | 5.08           | 48.29                      | 74.00              | -25.71         | PEAK          |
| 4824.000           | 29.43                   | 5.08           | 34.51                      | 54.00              | -19.49         | AVE           |
| 7236.000           | 41.18                   | 7.16           | 48.34                      | 74.00              | -25.66         | PEAK          |
| 7236.000           | 27.92                   | 7.16           | 35.08                      | 54.00              | -18.92         | AVE           |

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

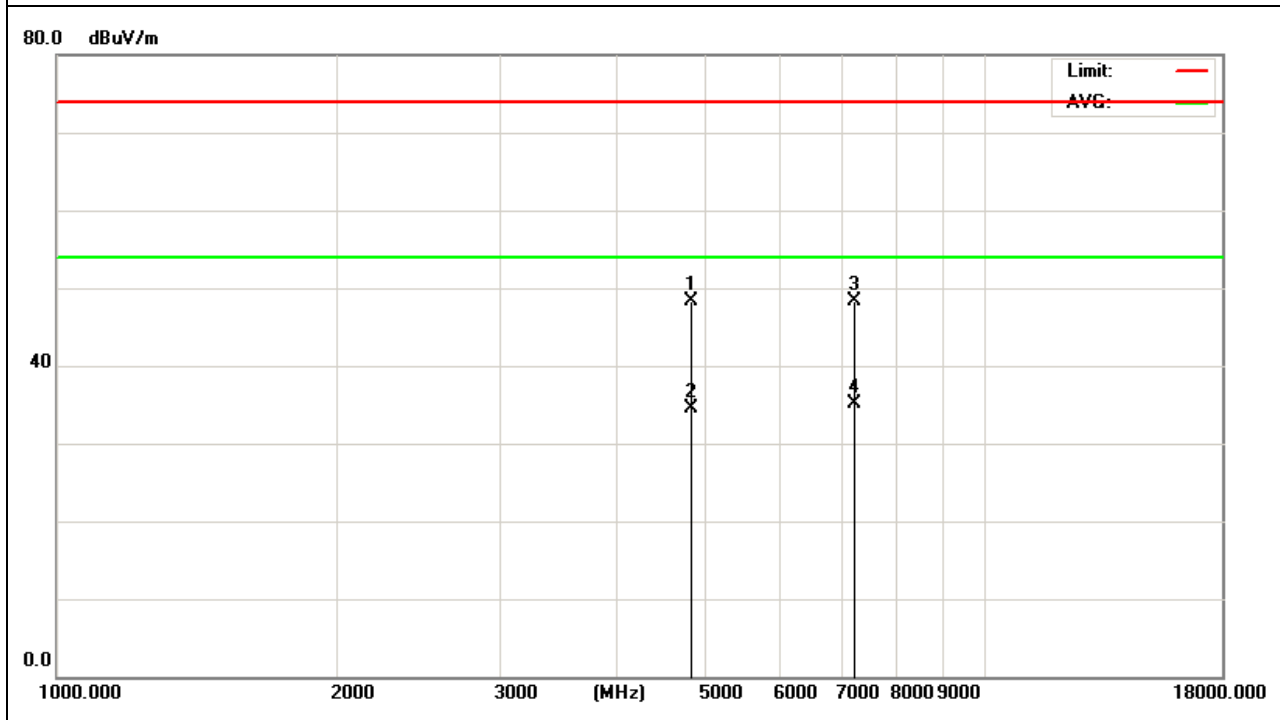




| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 4824.000  | 42.86         | 5.08   | 47.94          | 74.00    | -26.06 | PEAK          |
| 4824.000  | 29.33         | 5.08   | 34.41          | 54.00    | -19.59 | AVE           |
| 7236.000  | 40.96         | 7.55   | 48.51          | 74.00    | -25.49 | PEAK          |
| 7236.000  | 27.33         | 7.55   | 34.88          | 54.00    | -19.12 | AVE           |

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

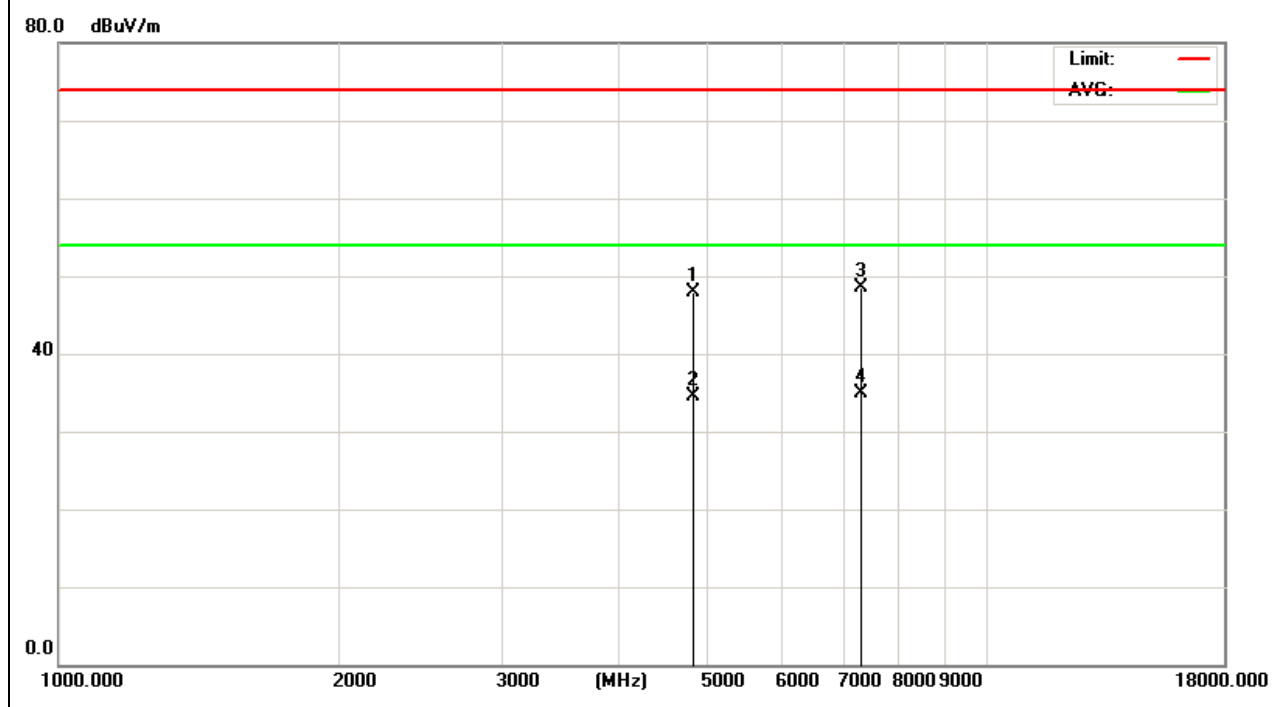

Note:

All the modulation modes were tested, the data of the worst mode are recorded in the above pages and the others modulation methods do not exceed the limits.

The disturbance above 18GHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.




|             |                        |             |                           |
|-------------|------------------------|-------------|---------------------------|
| Power       | : DC 7.6V from battery | Pol/Phase   | : HORIZONTAL/<br>VERTICAL |
| Test Mode 1 | : TX 6Mbps CH6         | Temperature | : 20 °C                   |
| Humidity    | : 59 %                 |             |                           |

## Harmonics & Spurious Emissions. Peak & Average Measurement

| Frequency<br>(MHz) | Meter Reading<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector Type |
|--------------------|-------------------------|----------------|----------------------------|--------------------|----------------|---------------|
| 4874.000           | 42.08                   | 5.13           | 47.21                      | 74.00              | -26.79         | PEAK          |
| 4874.000           | 28.94                   | 5.13           | 34.07                      | 54.00              | -19.93         | AVE           |
| 7311.000           | 40.62                   | 7.49           | 48.11                      | 74.00              | -25.89         | PEAK          |
| 7311.000           | 27.13                   | 7.49           | 34.62                      | 54.00              | -19.38         | AVE           |

### Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

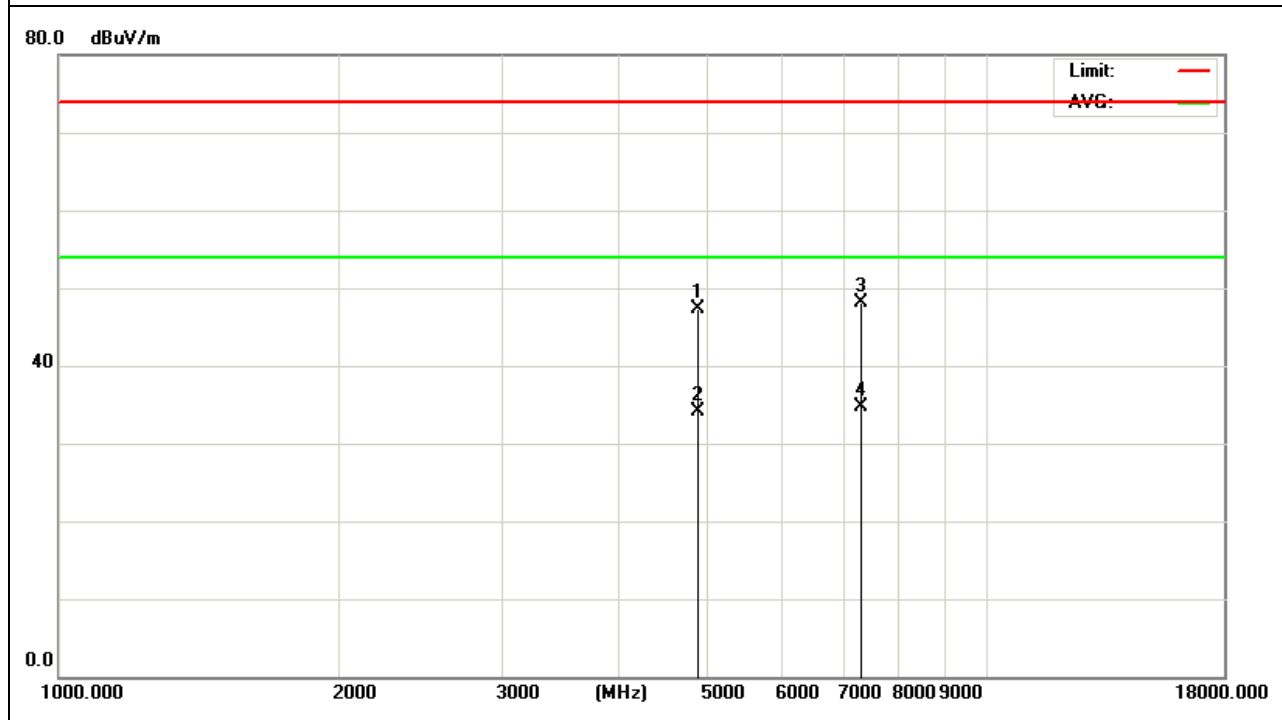




| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 4874.000  | 43.33         | 5.13   | 48.46          | 74.00    | -25.54 | PEAK          |
| 4874.000  | 29.47         | 5.13   | 34.60          | 54.00    | -19.40 | AVE           |
| 7311.000  | 40.13         | 7.49   | 47.62          | 74.00    | -26.38 | PEAK          |
| 7311.000  | 27.14         | 7.49   | 34.63          | 54.00    | -19.37 | AVE           |

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

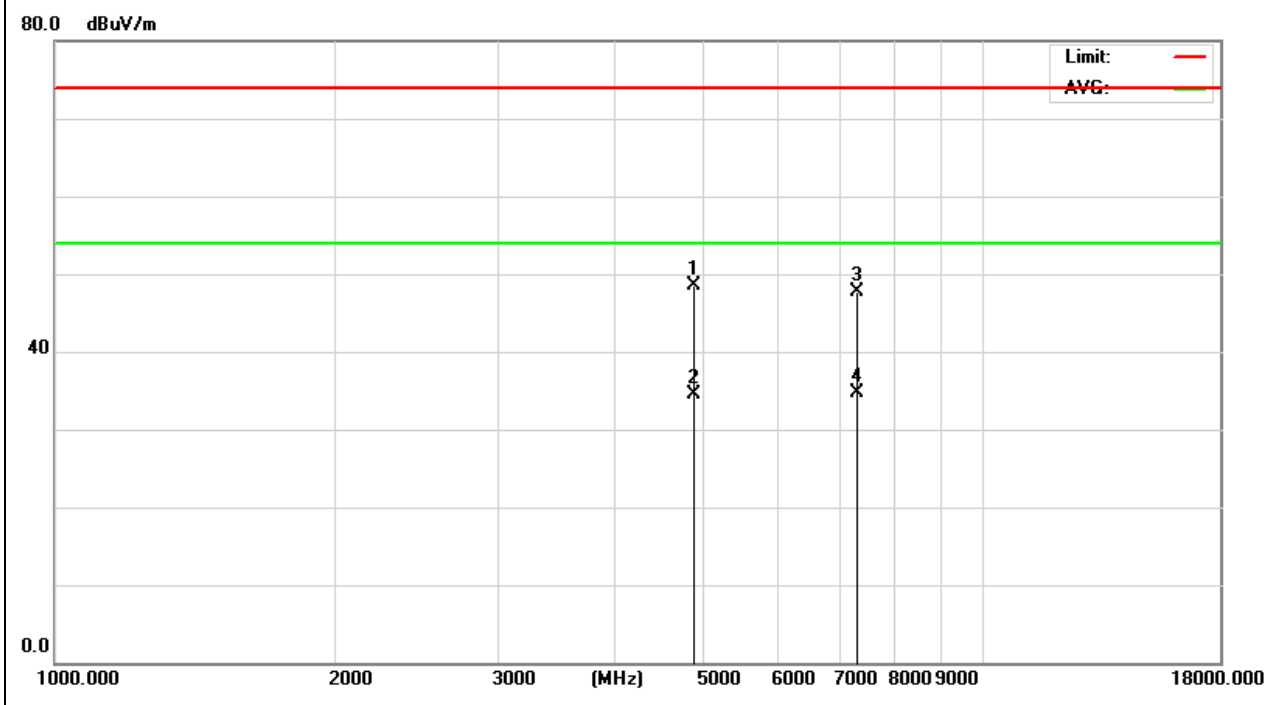

Note:

All the modulation modes were tested, the data of the worst mode are recorded in the above pages and the others modulation methods do not exceed the limits.

The disturbance above 18GHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.




|             |   |                      |             |   |                         |
|-------------|---|----------------------|-------------|---|-------------------------|
| Power       | : | DC 7.6V from battery | Pol/Phase   | : | HORIZONTAL/<br>VERTICAL |
| Test Mode 1 | : | TX 6Mbps CH11        | Temperature | : | 20 °C                   |
| Humidity    | : | 59 %                 |             |   |                         |

## Harmonics & Spurious Emissions. Peak & Average Measurement

| Frequency<br>(MHz) | Meter Reading<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector Type |
|--------------------|-------------------------|----------------|----------------------------|--------------------|----------------|---------------|
| 4924.000           | 43.07                   | 5.18           | 48.25                      | 74.00              | -25.75         | PEAK          |
| 4924.000           | 30.13                   | 5.18           | 35.31                      | 54.00              | -18.69         | AVE           |
| 7386.000           | 40.58                   | 7.82           | 48.40                      | 74.00              | -25.60         | PEAK          |
| 7386.000           | 27.61                   | 7.82           | 35.43                      | 54.00              | -18.57         | AVE           |

### Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

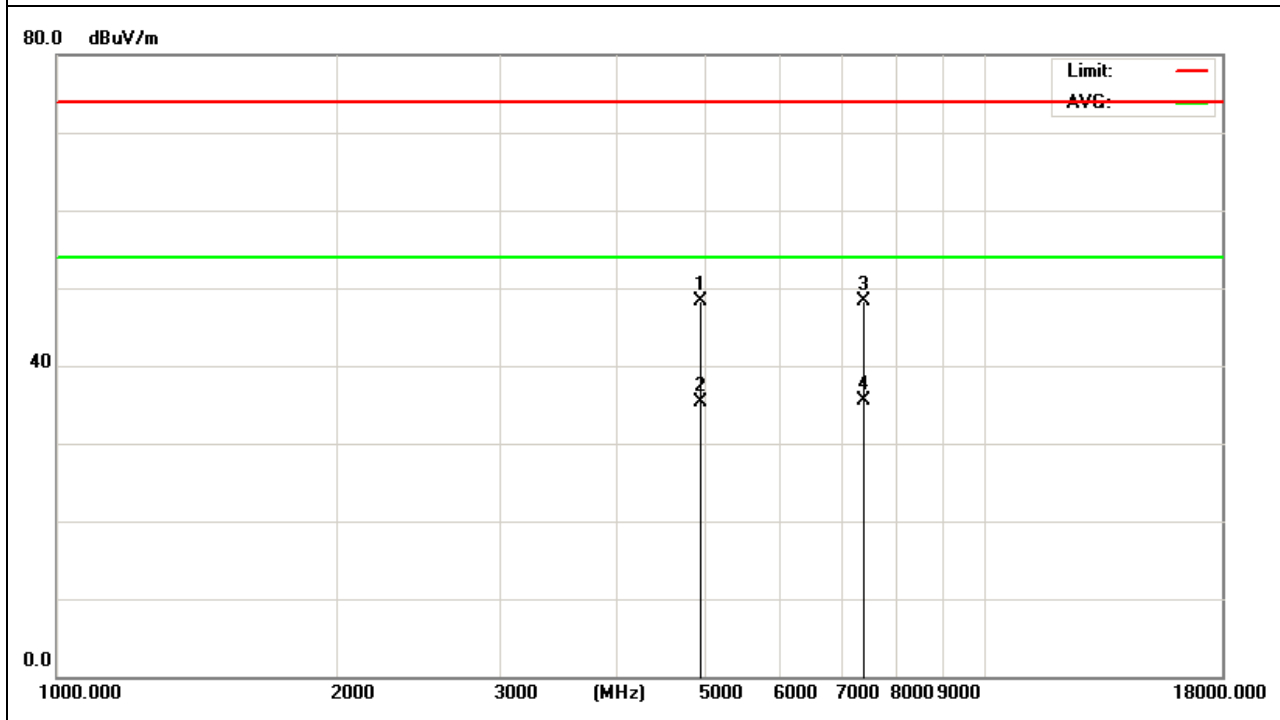




| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 4924.000  | 42.68         | 5.18   | 47.86          | 74.00    | -26.14 | PEAK          |
| 4924.000  | 30.14         | 5.18   | 35.32          | 54.00    | -18.68 | AVE           |
| 7386.000  | 40.01         | 7.82   | 47.83          | 74.00    | -26.17 | PEAK          |
| 7386.000  | 27.11         | 7.82   | 34.93          | 54.00    | -19.07 | AVE           |

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

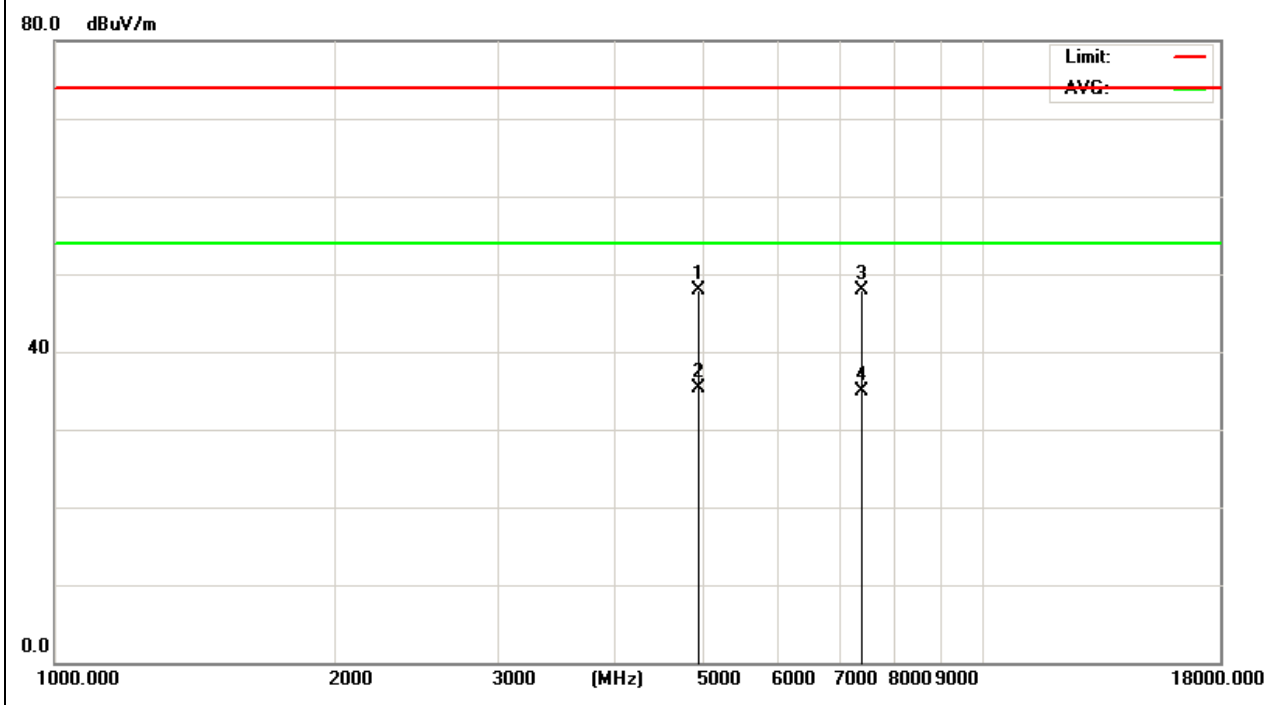

Note:

All the modulation modes were tested, the data of the worst mode are recorded in the above pages and the others modulation methods do not exceed the limits.

The disturbance above 18GHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.



|             |                        |             |                           |
|-------------|------------------------|-------------|---------------------------|
| Power       | : DC 7.6V from battery | Pol/Phase   | : HORIZONTAL/<br>VERTICAL |
| Test Mode 1 | : TX 7.2Mbps CH1       | Temperature | : 20 °C                   |
| Humidity    | : 59 %                 |             |                           |


## 802.11n(HT20) mode with 7.2Mbps data rate

Harmonics & Spurious Emissions. Peak & Average Measurement

| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 4824.000  | 43.30         | 5.08   | 48.38          | 74.00    | -25.62 | PEAK          |
| 4824.000  | 29.64         | 5.08   | 34.72          | 54.00    | -19.28 | AVE           |
| 7236.000  | 41.00         | 7.16   | 48.16          | 74.00    | -25.84 | PEAK          |
| 7236.000  | 27.25         | 7.16   | 34.41          | 54.00    | -19.59 | AVE           |

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

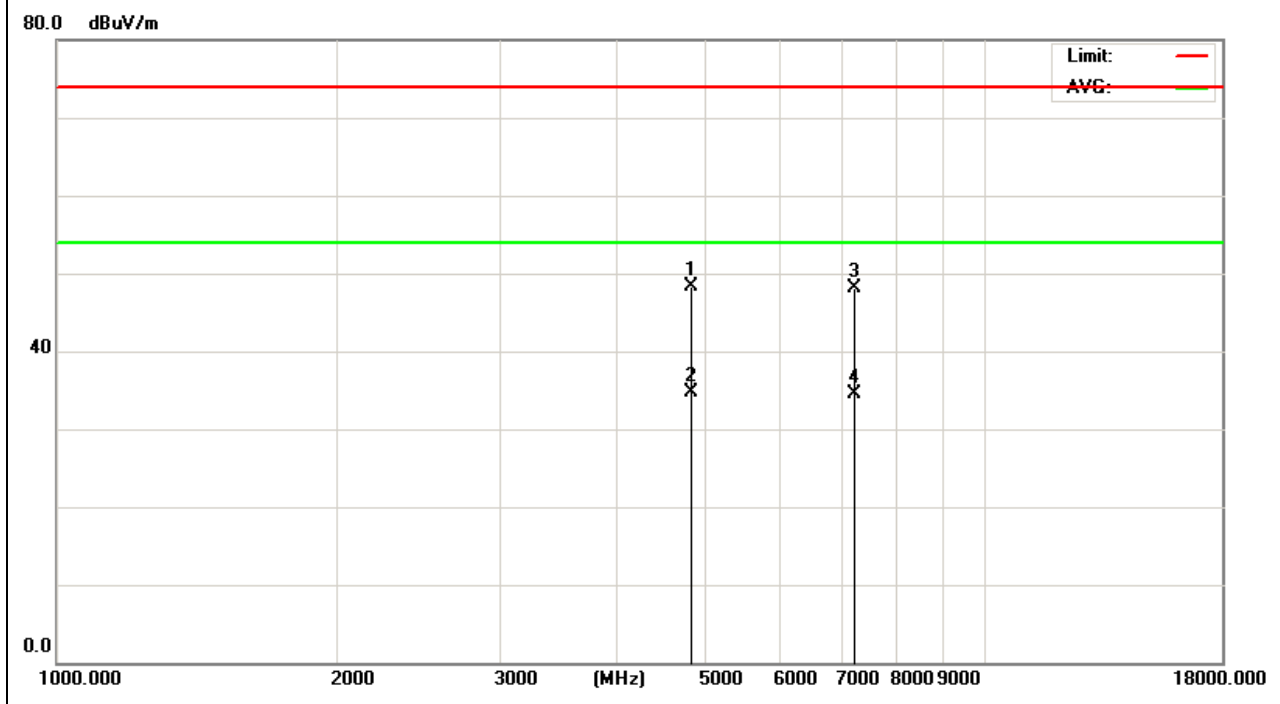




| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 4824.000  | 43.19         | 5.08   | 48.27          | 74.00    | -25.73 | PEAK          |
| 4824.000  | 29.98         | 5.08   | 35.06          | 54.00    | -18.94 | AVE           |
| 7236.000  | 40.15         | 7.55   | 47.70          | 74.00    | -26.30 | PEAK          |
| 7236.000  | 27.14         | 7.55   | 34.69          | 54.00    | -19.31 | AVE           |

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

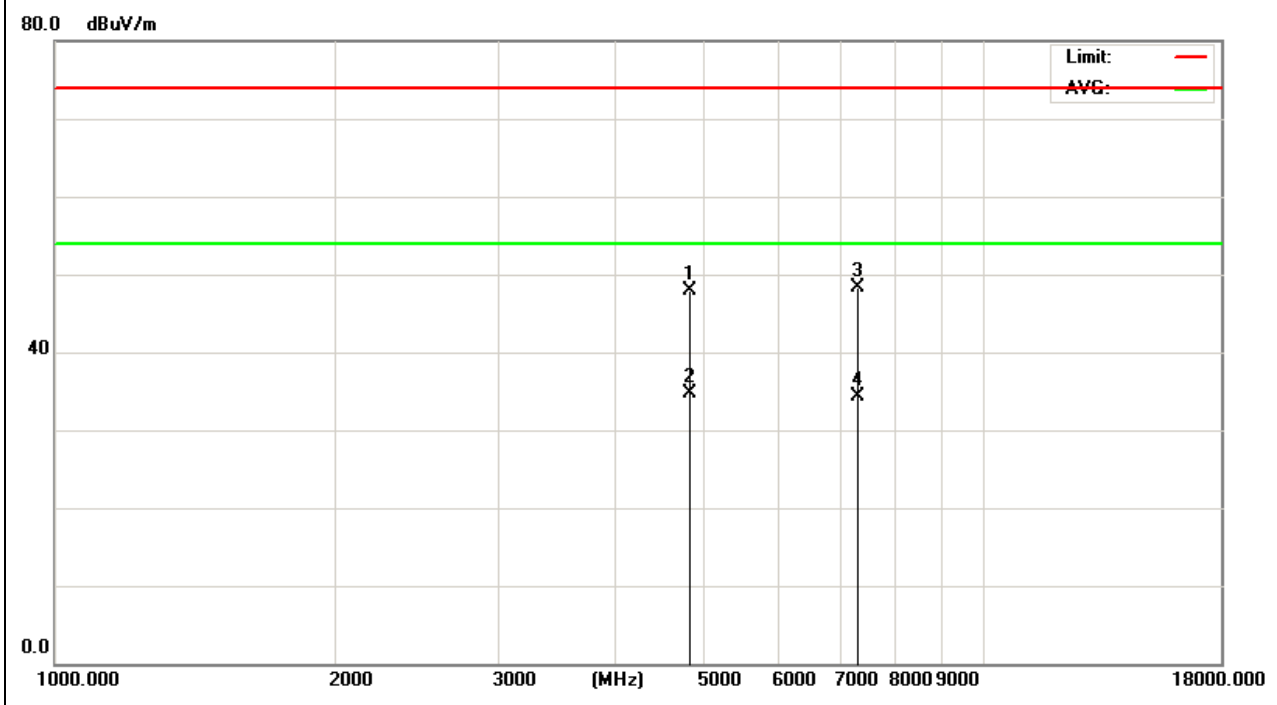

Note:

All the modulation modes were tested, the data of the worst mode are recorded in the above pages and the others modulation methods do not exceed the limits.

The disturbance above 18GHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.




|             |   |                      |             |   |                         |
|-------------|---|----------------------|-------------|---|-------------------------|
| Power       | : | DC 7.6V from battery | Pol/Phase   | : | HORIZONTAL/<br>VERTICAL |
| Test Mode 1 | : | TX 7.2Mbps CH6       | Temperature | : | 20 °C                   |
| Humidity    | : | 59 %                 |             |   |                         |

## Harmonics & Spurious Emissions. Peak & Average Measurement

| Frequency<br>(MHz) | Meter Reading<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector Type |
|--------------------|-------------------------|----------------|----------------------------|--------------------|----------------|---------------|
| 4874.000           | 43.23                   | 5.13           | 48.36                      | 74.00              | -25.64         | PEAK          |
| 4874.000           | 29.41                   | 5.13           | 34.54                      | 54.00              | -19.46         | AVE           |
| 7311.000           | 41.33                   | 7.49           | 48.82                      | 74.00              | -25.18         | PEAK          |
| 7311.000           | 27.64                   | 7.49           | 35.13                      | 54.00              | -18.87         | AVE           |

### Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

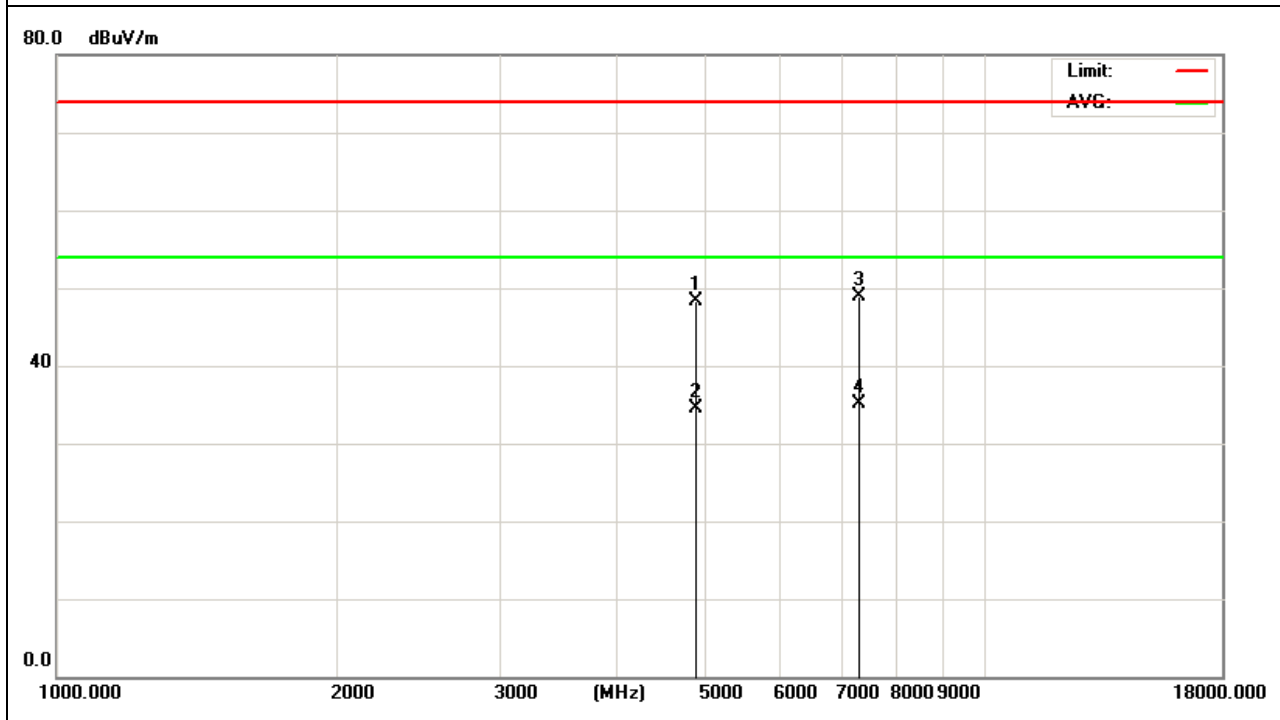




| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 4874.000  | 43.02         | 5.13   | 48.15          | 74.00    | -25.85 | PEAK          |
| 4874.000  | 29.42         | 5.13   | 34.55          | 54.00    | -19.45 | AVE           |
| 7311.000  | 39.84         | 7.49   | 47.33          | 74.00    | -26.67 | PEAK          |
| 7311.000  | 27.31         | 7.49   | 34.80          | 54.00    | -19.20 | AVE           |

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

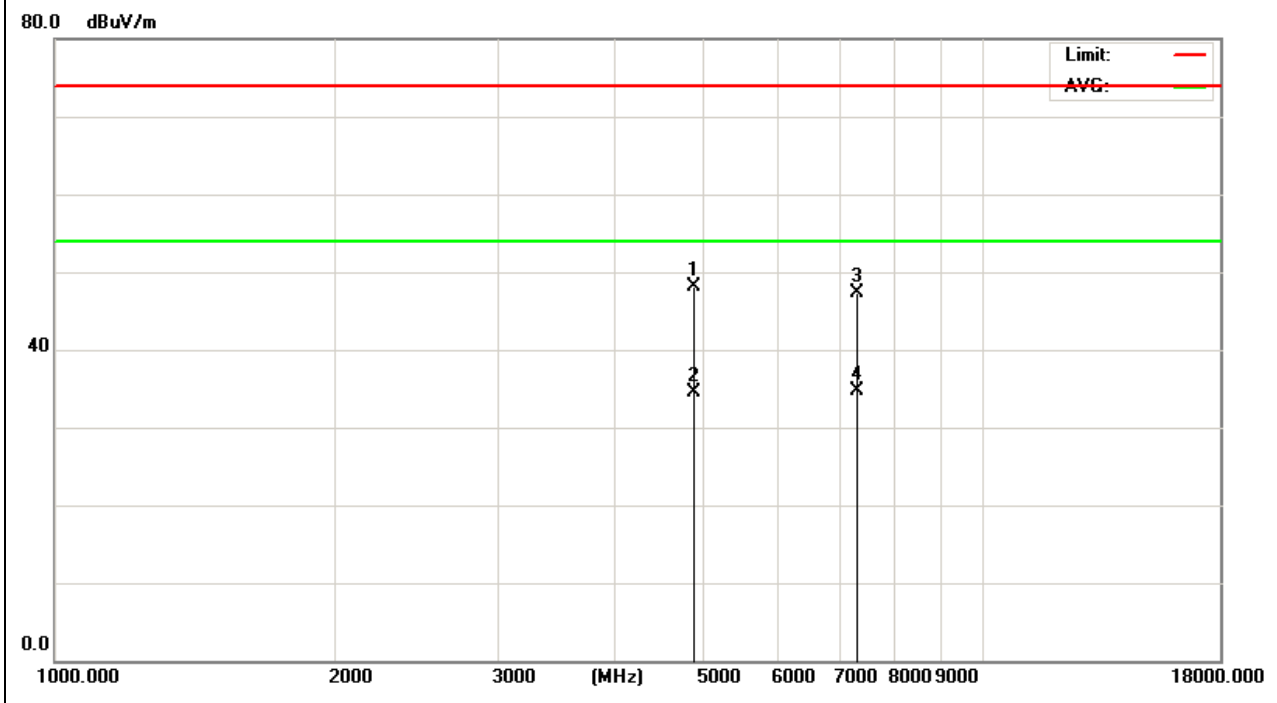

Note:

All the modulation modes were tested, the data of the worst mode are recorded in the above pages and the others modulation methods do not exceed the limits.

The disturbance above 18GHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.




|             |                        |             |                           |
|-------------|------------------------|-------------|---------------------------|
| Power       | : DC 7.6V from battery | Pol/Phase   | : HORIZONTAL/<br>VERTICAL |
| Test Mode 1 | : TX 7.2Mbps CH11      | Temperature | : 20 °C                   |
| Humidity    | : 59 %                 |             |                           |

## 1~25 GHz Harmonics & Spurious Emissions. Peak & Average Measurement

| Frequency<br>(MHz) | Meter Reading<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector Type |
|--------------------|-------------------------|----------------|----------------------------|--------------------|----------------|---------------|
| 4924.000           | 43.43                   | 5.18           | 48.61                      | 74.00              | -25.39         | PEAK          |
| 4924.000           | 31.12                   | 5.18           | 36.30                      | 54.00              | -17.7          | AVE           |
| 7386.000           | 41.02                   | 7.82           | 48.84                      | 74.00              | -25.16         | PEAK          |
| 7386.000           | 27.31                   | 7.82           | 35.13                      | 54.00              | -18.87         | AVE           |

### Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

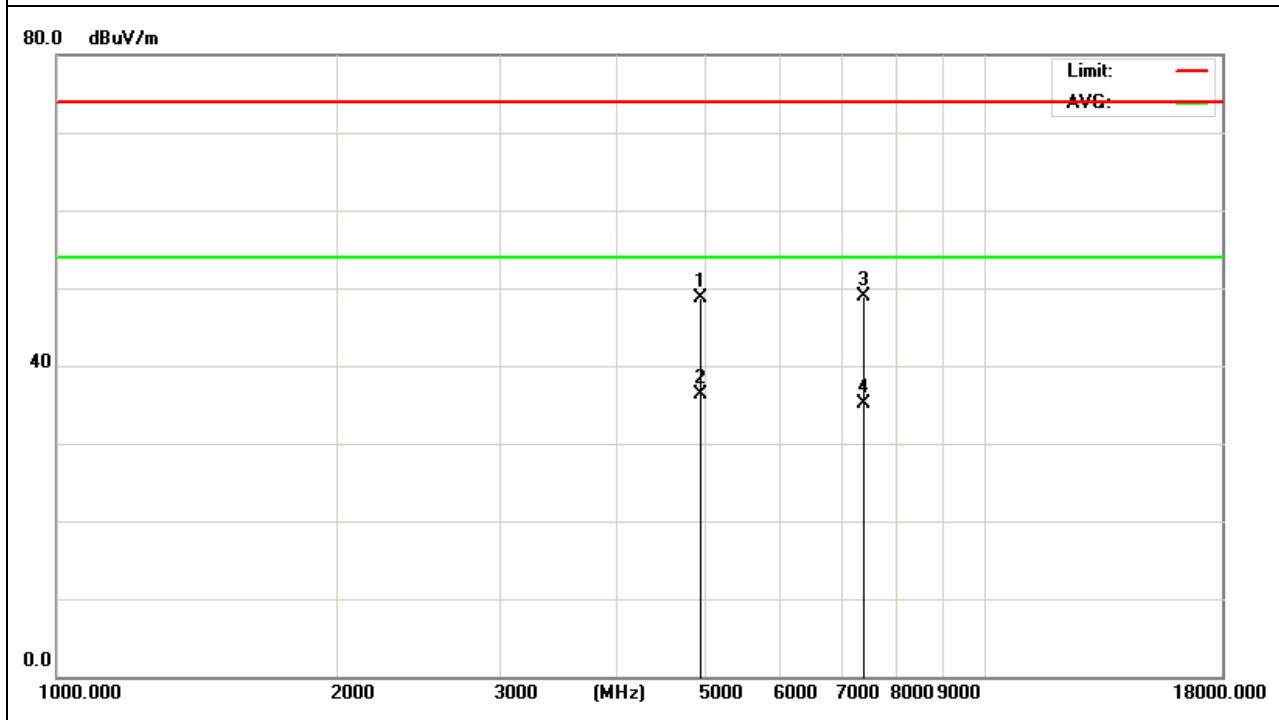




| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 4844.000  | 42.83         | 5.18   | 48.01          | 74.00    | -25.99 | PEAK          |
| 4844.000  | 30.27         | 5.18   | 35.45          | 54.00    | -18.55 | AVE           |
| 7266.000  | 40.10         | 7.82   | 47.92          | 74.00    | -26.08 | PEAK          |
| 7266.000  | 27.56         | 7.82   | 35.38          | 54.00    | -18.62 | AVE           |

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

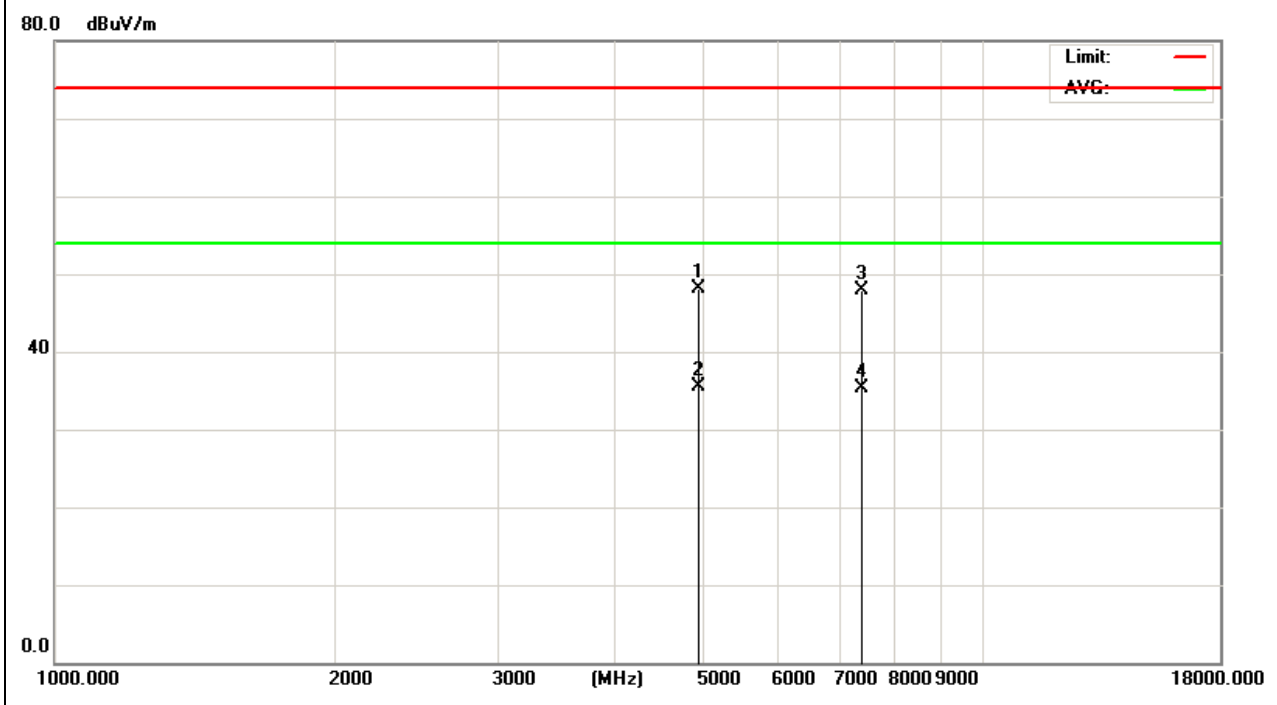

Note:

All the modulation modes were tested, the data of the worst mode are recorded in the above pages and the others modulation methods do not exceed the limits.

The disturbance above 18GHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.



|             |   |                      |             |   |                         |
|-------------|---|----------------------|-------------|---|-------------------------|
| Power       | : | DC 7.6V from battery | Pol/Phase   | : | HORIZONTAL/<br>VERTICAL |
| Test Mode 1 | : | TX 15Mbps CH3        | Temperature | : | 20 °C                   |
| Humidity    | : | 59 %                 |             |   |                         |


## 802.11n(HT40) mode with 15Mbps data rate

Harmonics & Spurious Emissions. Peak & Average Measurement

| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 4844.000  | 43.35         | 5.11   | 48.46          | 74.00    | -25.54 | PEAK          |
| 4844.000  | 29.31         | 5.11   | 34.42          | 54.00    | -19.58 | AVE           |
| 7266.000  | 40.54         | 7.29   | 47.83          | 74.00    | -26.17 | PEAK          |
| 7266.000  | 27.45         | 7.29   | 34.74          | 54.00    | -19.26 | AVE           |

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

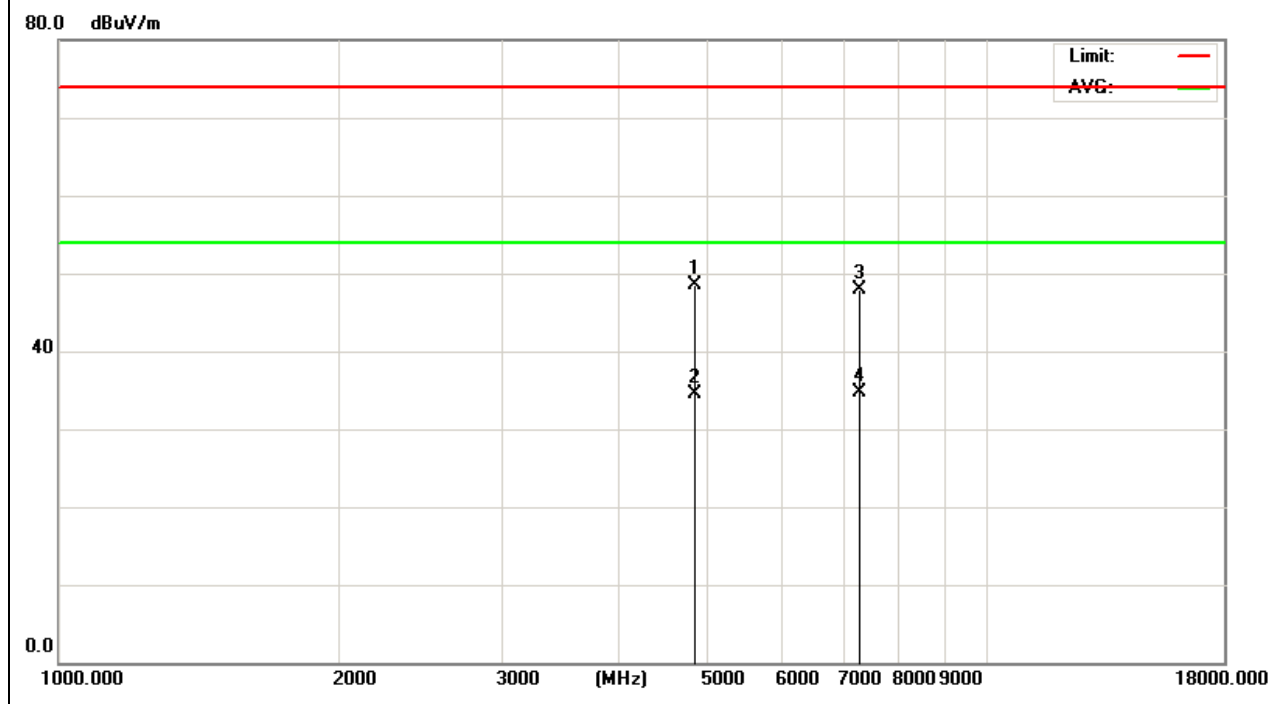




| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 4844.000  | 43.25         | 5.11   | 48.36          | 74.00    | -25.64 | PEAK          |
| 4844.000  | 29.35         | 5.11   | 34.46          | 54.00    | -19.54 | AVE           |
| 7266.000  | 40.26         | 7.29   | 47.55          | 74.00    | -26.45 | PEAK          |
| 7266.000  | 27.11         | 7.29   | 34.40          | 54.00    | -19.60 | AVE           |

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

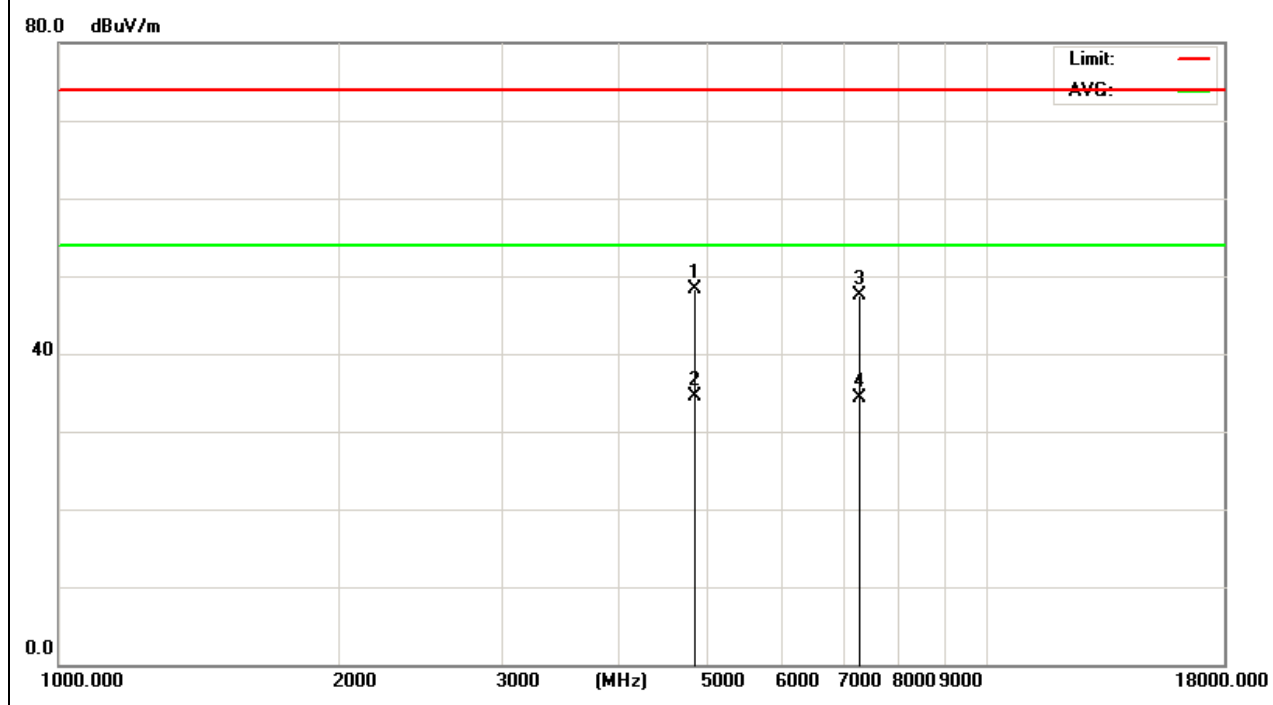




|             |   |                      |             |   |                         |
|-------------|---|----------------------|-------------|---|-------------------------|
| Power       | : | DC 7.6V from battery | Pol/Phase   | : | HORIZONTAL/<br>VERTICAL |
| Test Mode 1 | : | TX 15Mbps CH6        | Temperature | : | 20 °C                   |
| Humidity    | : | 59 %                 |             |   |                         |

| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 4874.000  | 42.46         | 5.13   | 47.59          | 74.00    | -26.41 | PEAK          |
| 4874.000  | 29.34         | 5.13   | 34.47          | 54.00    | -19.53 | AVE           |
| 7311.000  | 40.51         | 7.49   | 48.00          | 74.00    | -26.00 | PEAK          |
| 7311.000  | 27.41         | 7.49   | 34.90          | 54.00    | -19.10 | AVE           |

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

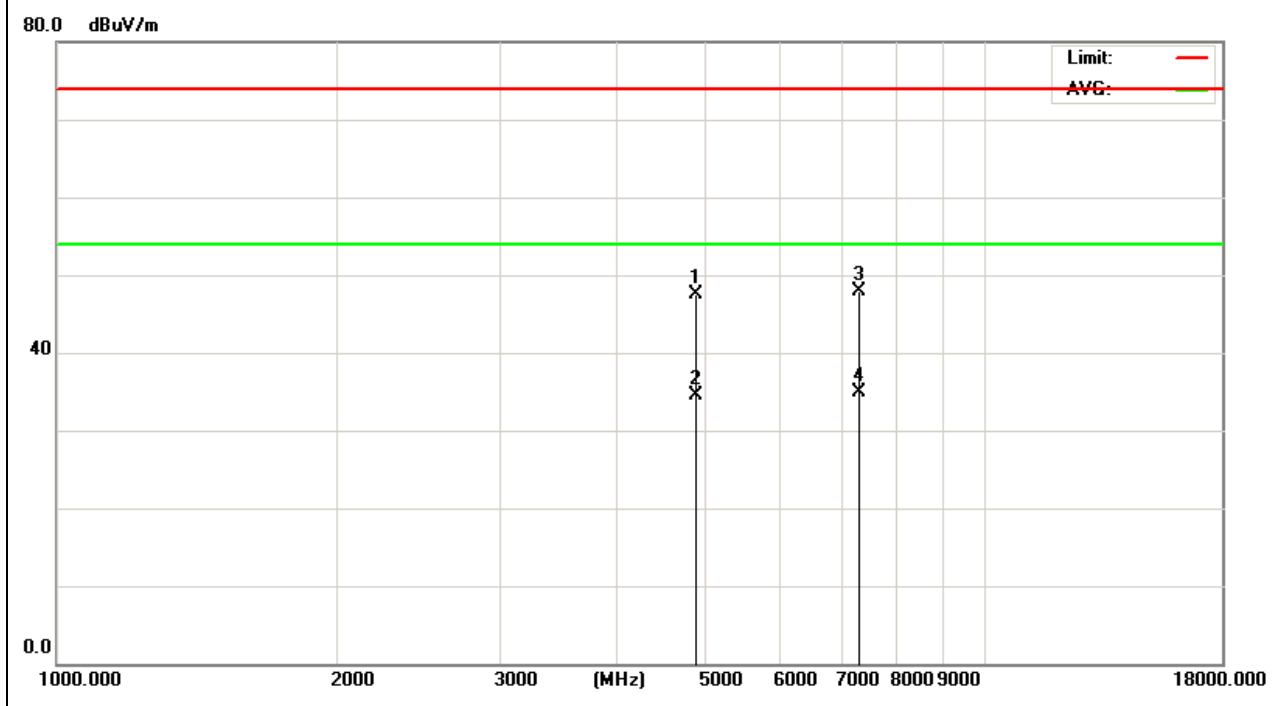




## Harmonics & Spurious Emissions. Peak & Average Measurement

| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 4874.000  | 42.74         | 5.13   | 47.87          | 74.00    | -26.13 | PEAK          |
| 4874.000  | 29.59         | 5.13   | 34.72          | 54.00    | -19.28 | AVE           |
| 7311.000  | 41.31         | 7.49   | 48.80          | 74.00    | -25.20 | PEAK          |
| 7311.000  | 27.02         | 7.49   | 34.51          | 54.00    | -19.49 | AVE           |

### Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

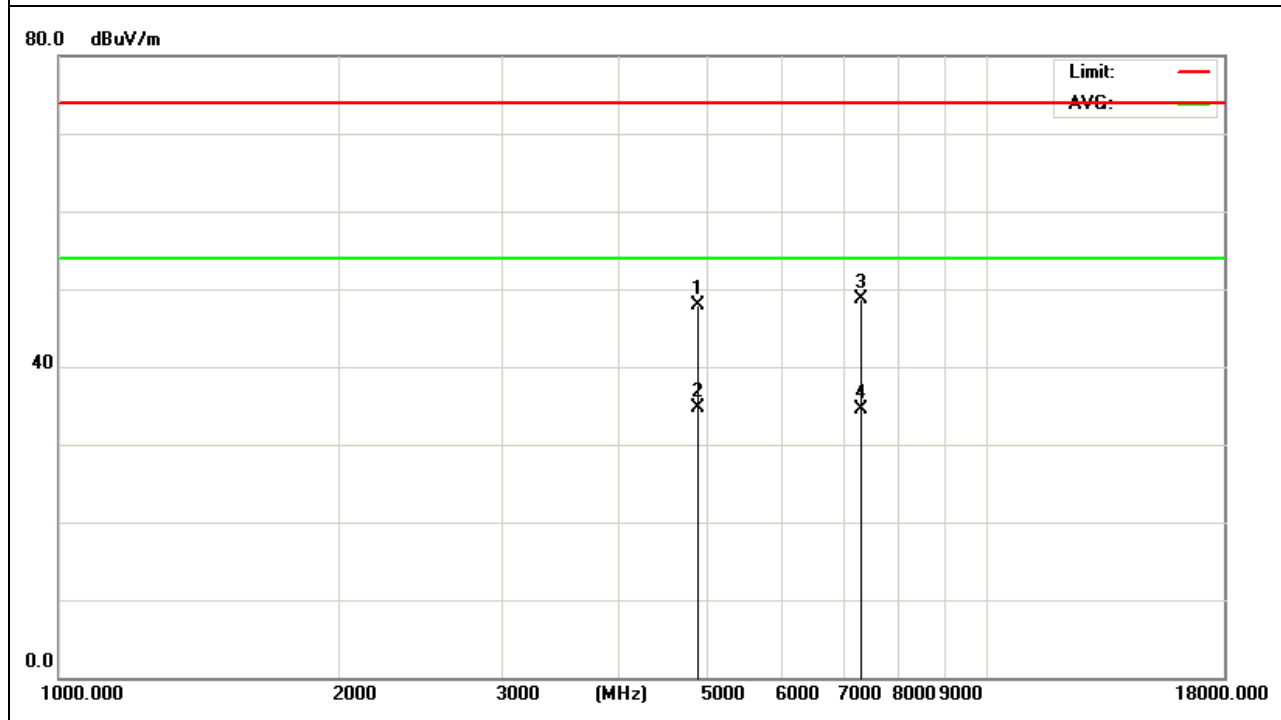

### Note:

All the modulation modes were tested, the data of the worst mode are recorded in the above pages and the others modulation methods do not exceed the limits.

The disturbance above 18GHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.




|             |   |                      |             |   |                         |
|-------------|---|----------------------|-------------|---|-------------------------|
| Power       | : | DC 7.6V from battery | Pol/Phase   | : | HORIZONTAL/<br>VERTICAL |
| Test Mode 1 | : | TX 15Mbps CH9        | Temperature | : | 20 °C                   |
| Humidity    | : | 59 %                 |             |   |                         |

## Harmonics & Spurious Emissions. Peak & Average Measurement

| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 4904.000  | 43.85         | 5.16   | 49.01          | 74.00    | -24.99 | peak          |
| 4904.000  | 30.38         | 5.16   | 35.54          | 54.00    | -18.46 | AVE           |
| 7356.000  | 41.06         | 7.69   | 48.75          | 74.00    | -25.25 | peak          |
| 7356.000  | 27.46         | 7.69   | 35.15          | 54.00    | -18.85 | AVE           |

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

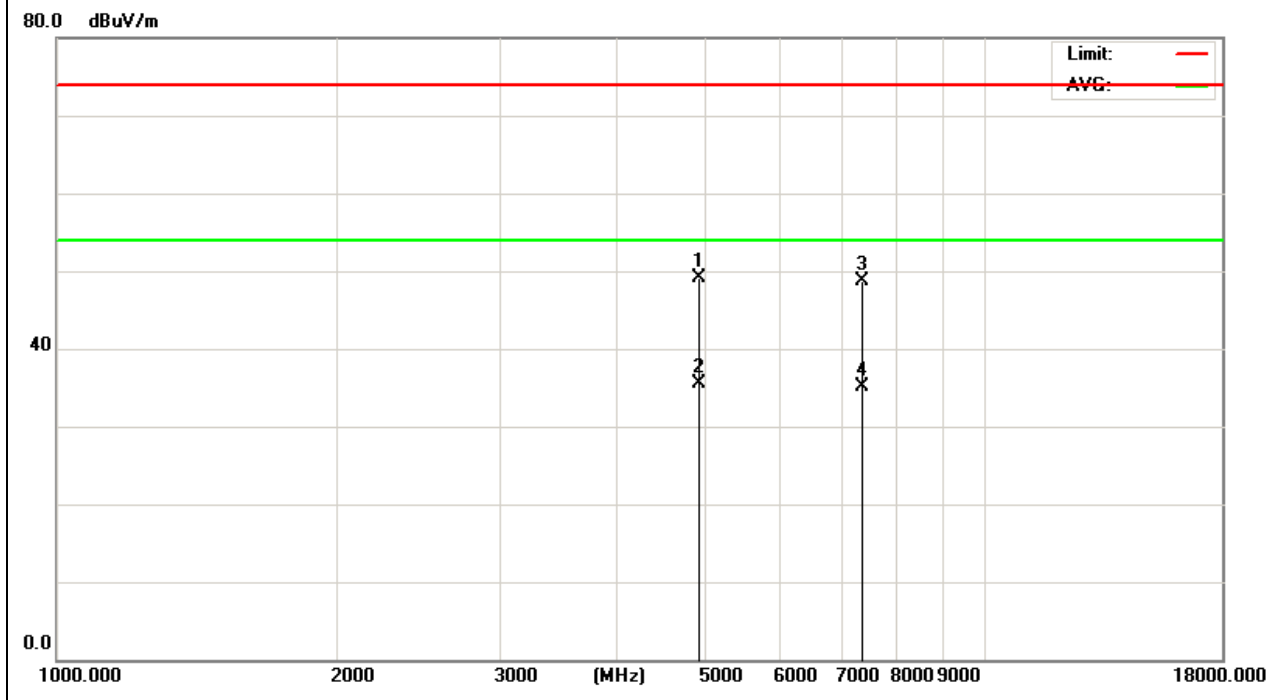




| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 4904.000  | 43.01         | 5.16   | 48.17          | 74.00    | -25.83 | peak          |
| 4904.000  | 29.93         | 5.16   | 35.09          | 54.00    | -18.91 | AVE           |
| 7356.000  | 39.54         | 7.69   | 47.23          | 74.00    | -26.77 | peak          |
| 7356.000  | 27.01         | 7.69   | 34.70          | 54.00    | -19.30 | AVE           |

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

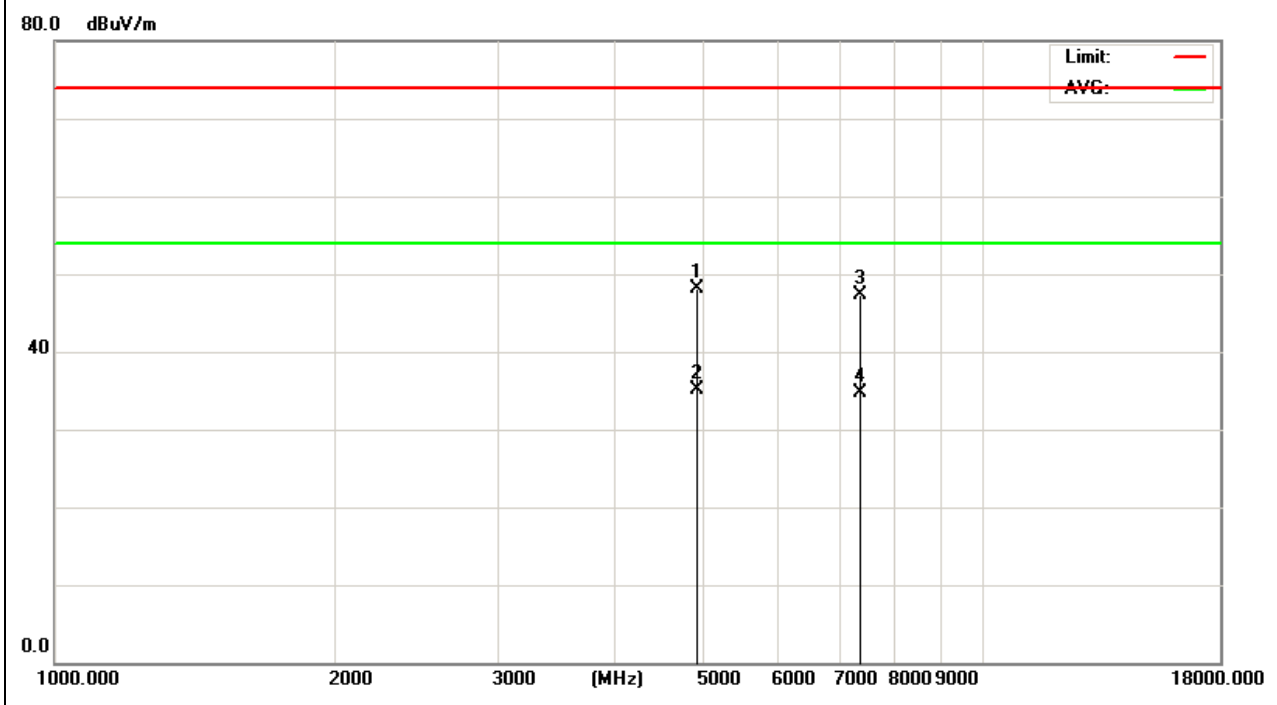

Note:

All the modulation modes were tested, the data of the worst mode are recorded in the above pages and the others modulation methods do not exceed the limits.

The disturbance above 18GHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.



## **8. 6dB Bandwidth Measurement Data**


### **8.1 Test Limit**

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

### **8.2 Test Procedures**

- a. The transmitter output was connected to the spectrum analyzer.
- b. Set RBW of spectrum analyzer to 1~5% of the emission bandwidth and  $VBW \geq 3 \times RBW$ .
- c. The 6 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6 dB.
- d. The 6dB Bandwidth was measured and recorded.

### **8.3 Test Setup Layout**





## 8.4 Test Result and Data

Test Date: Mar. 08, 2018

Temperature: 20°C

Atmospheric pressure: 1000 pha


Humidity: 55%

Note: The worst data is Antenna A, only shown Antenna A Plot.

Antenna A:


| Mode    | Channel | Frequency (MHz) | 6dB Bandwidth (MHz) |
|---------|---------|-----------------|---------------------|
| 802.11b | 1       | 2412            | 9.10                |
|         | 6       | 2437            | 10.01               |
|         | 11      | 2462            | 10.05               |

Channel: 1

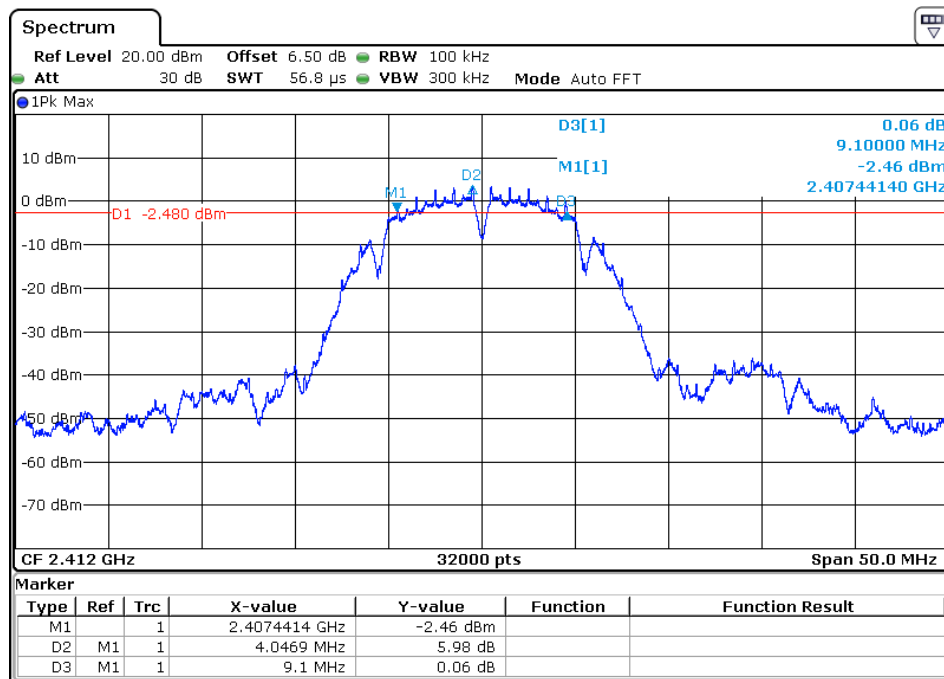




Channel: 6

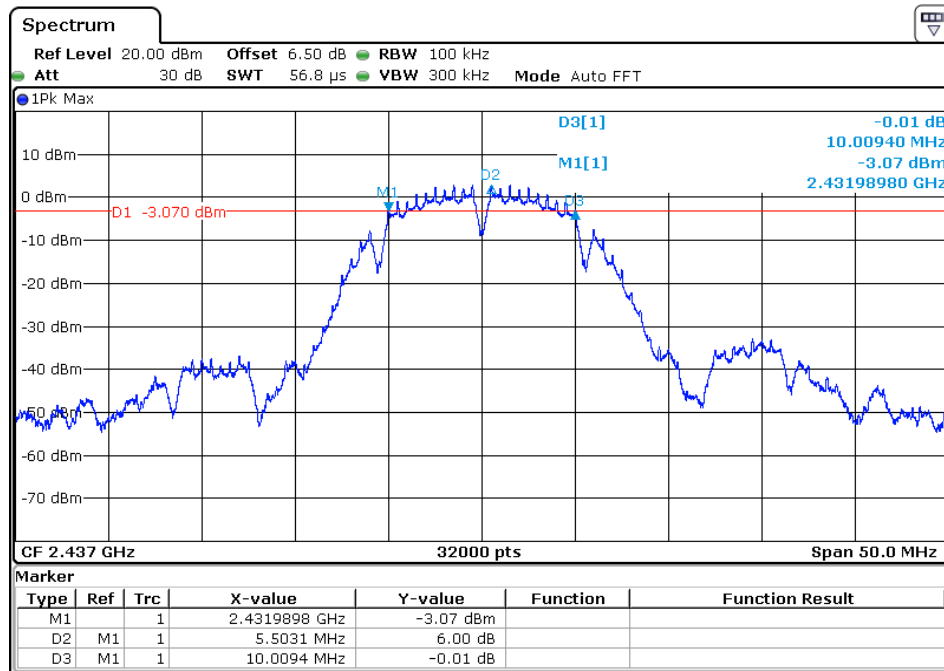


Channel: 11

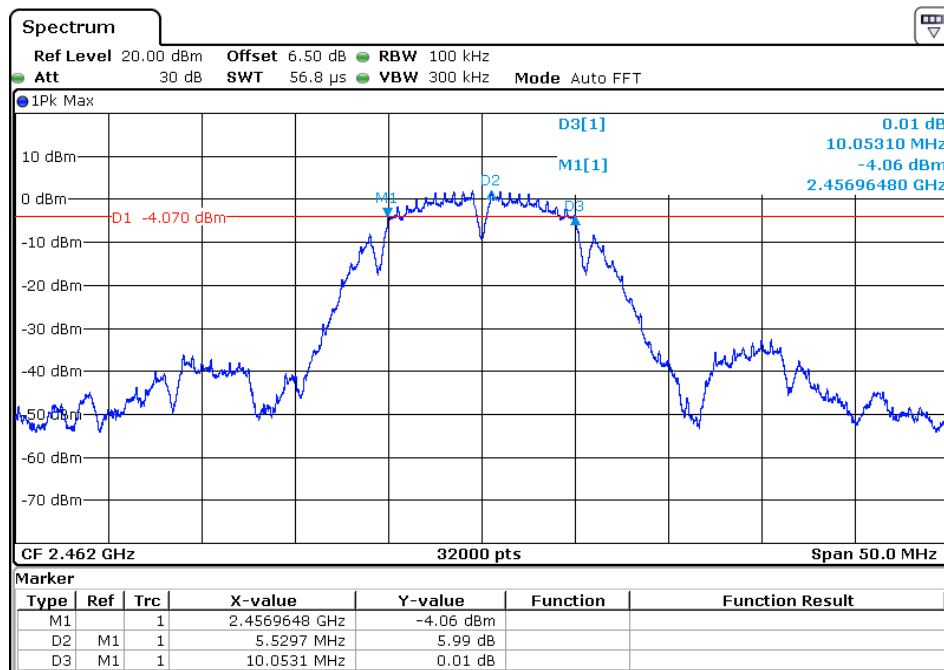




| Mode    | Channel | Frequency (MHz) | 6dB Bandwidth (MHz) |
|---------|---------|-----------------|---------------------|
| 802.11g | 1       | 2412            | 15.12               |
|         | 6       | 2437            | 15.12               |
|         | 11      | 2462            | 15.13               |

Channel: 1

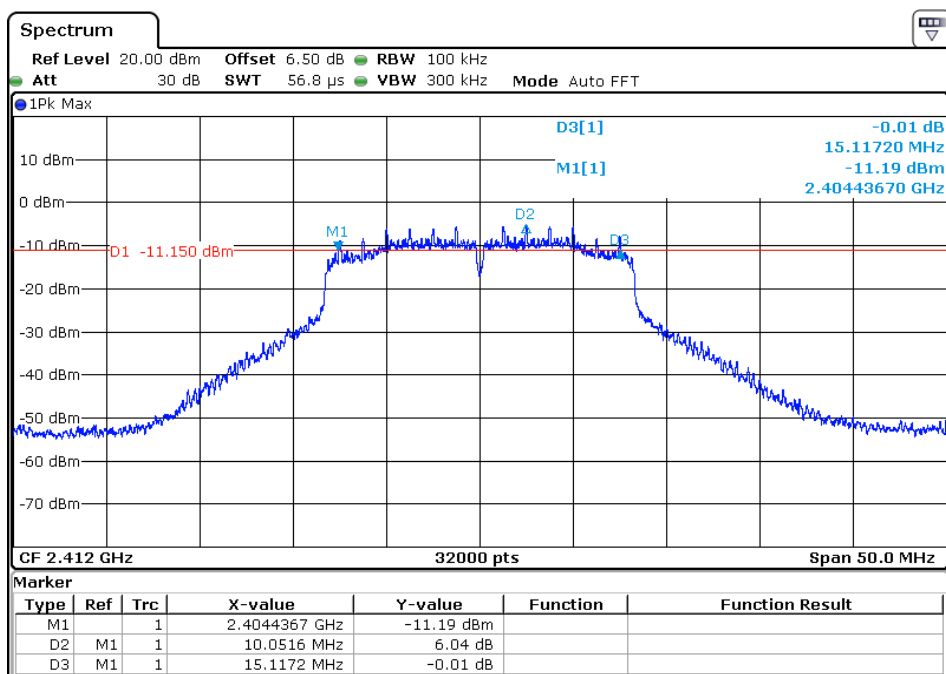




Channel: 6

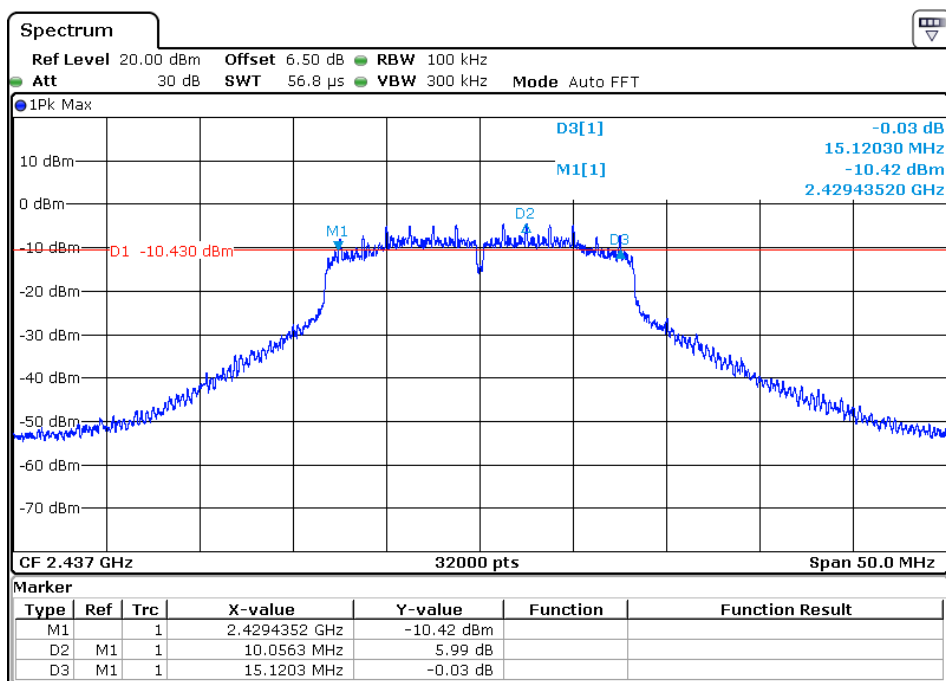


Channel: 11

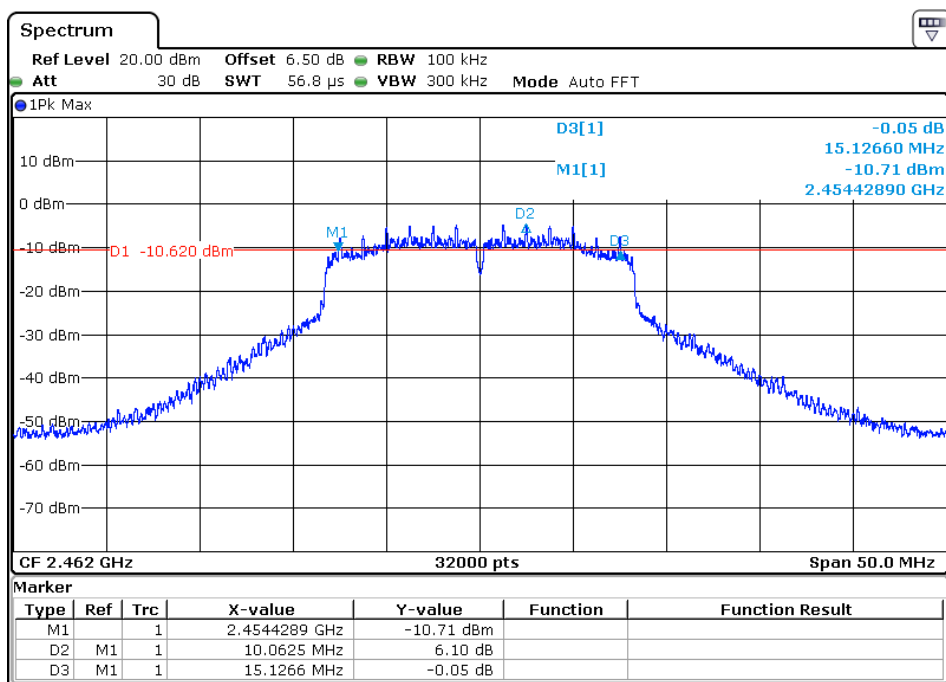




| Mode      | Channel | Frequency (MHz) | 6dB Bandwidth (MHz) |
|-----------|---------|-----------------|---------------------|
| 802.11n20 | 1       | 2412            | 15.12               |
|           | 6       | 2437            | 15.08               |
|           | 11      | 2462            | 15.12               |

Channel: 1

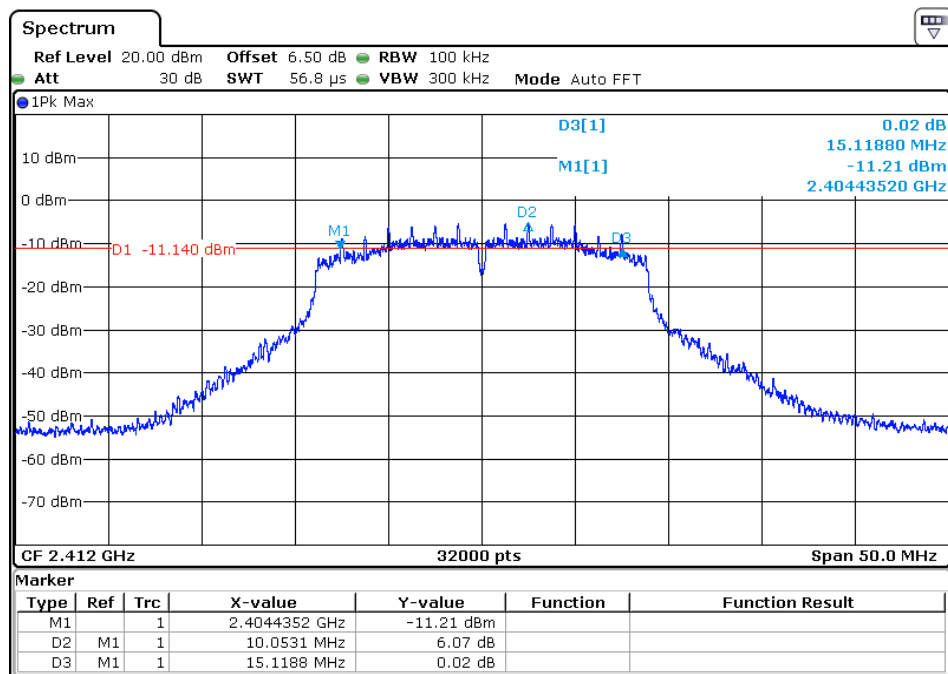




Channel: 6

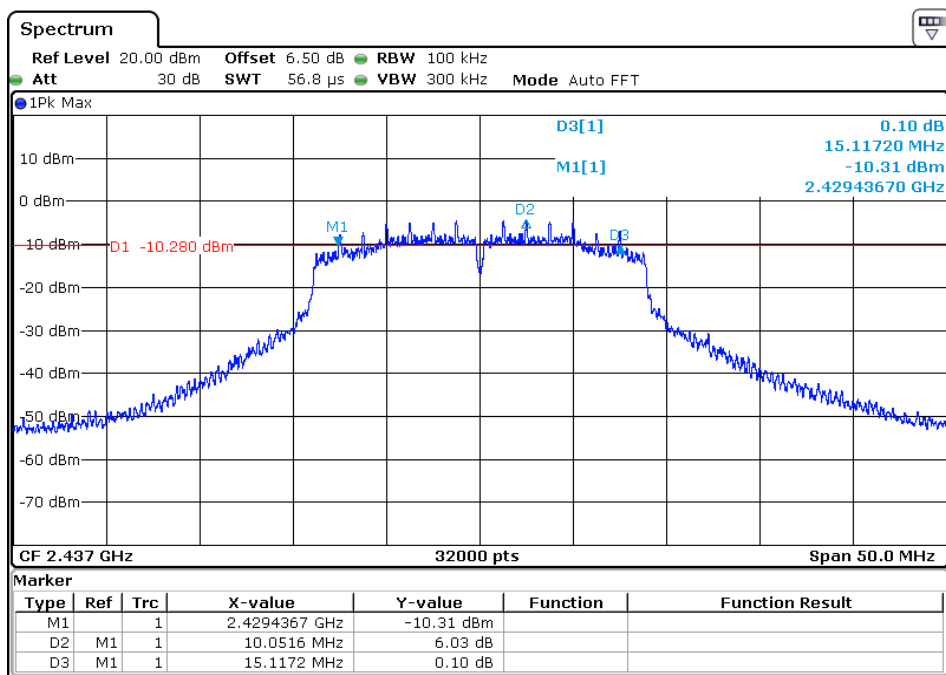


Channel: 11

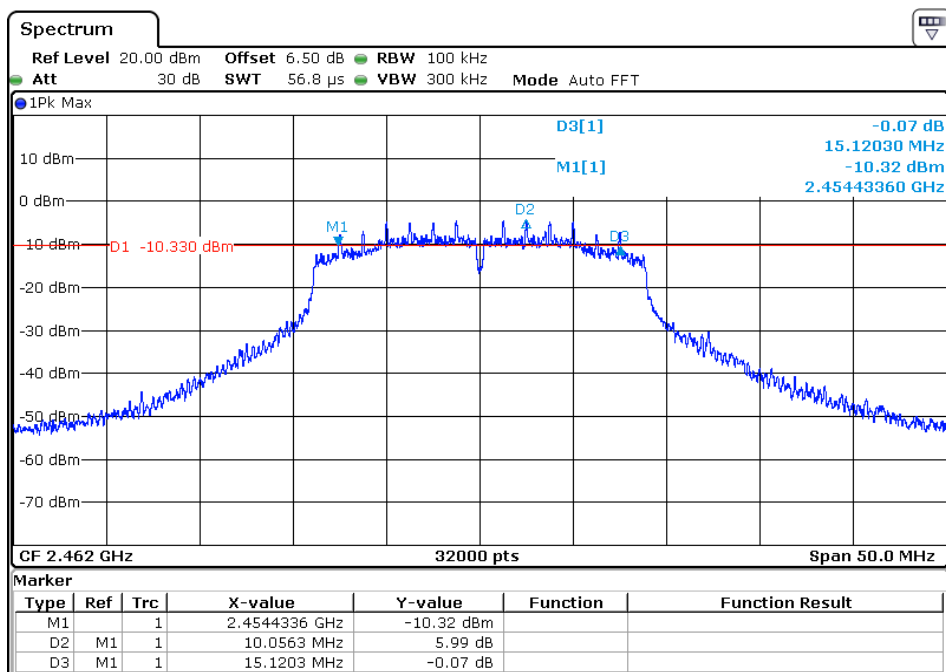




| Mode      | Channel | Frequency (MHz) | 6dB Bandwidth (MHz) |
|-----------|---------|-----------------|---------------------|
| 802.11n40 | 3       | 2422            | 35.09               |
|           | 6       | 2437            | 35.10               |
|           | 9       | 2452            | 35.11               |

Channel: 1

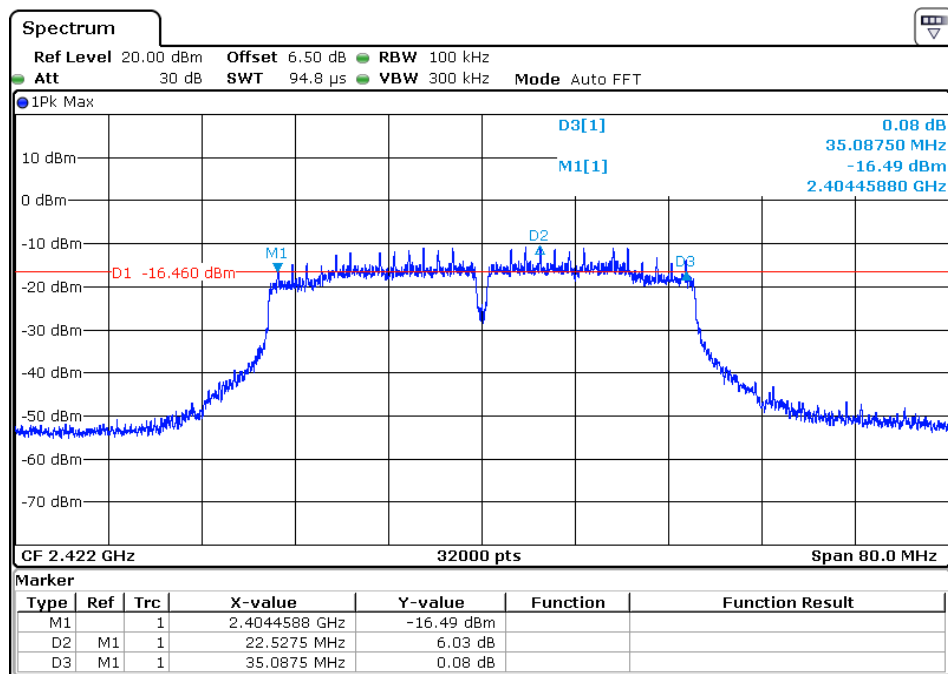




Channel: 6

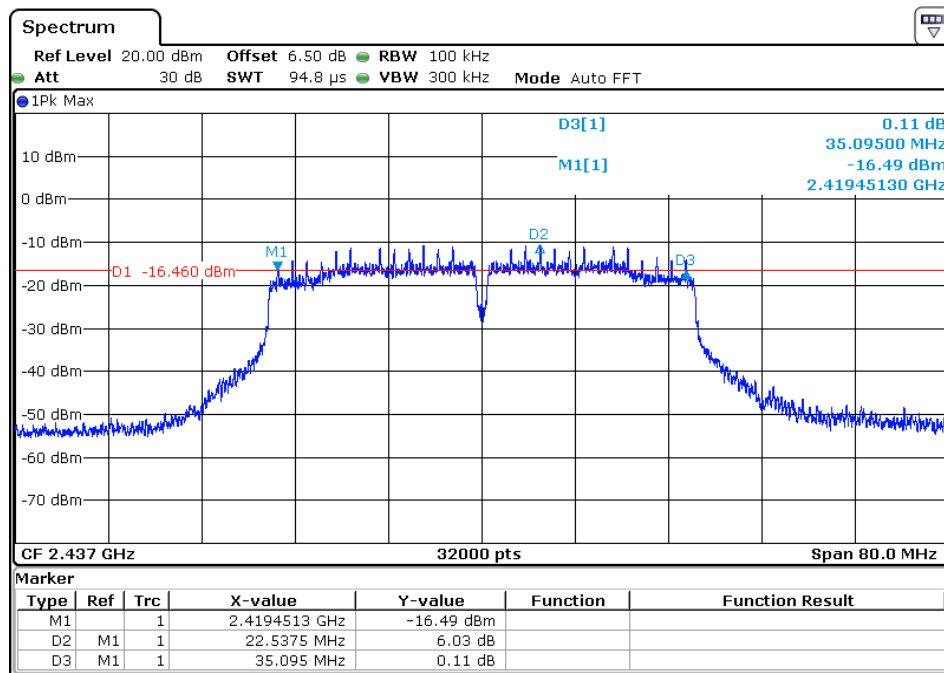

Channel: 11

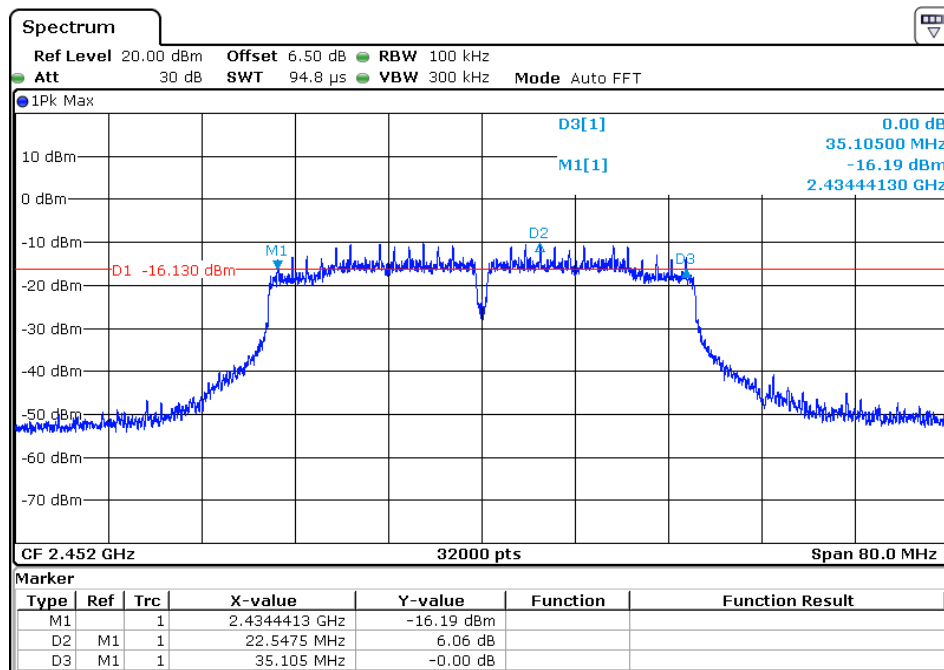



---

## 9. Maximum Output Power

### 9.1 Test Limit

The Maximum Output Power Measurement is 30dBm.

### 9.2 Test Procedures

- a. Peak power is measured using the wideband power meter.
- b. Power is integrated over a bandwidth greater than or equal to the 99% bandwidth.
- c. The Peak Output Power was measured and recorded.

### 9.3 Test Setup Layout





## 9.4 Test Result and Data

Test Date: Mar. 10, 2018

Temperature: 20°C

Atmospheric pressure: 1000hPa

Humidity: 55%

| Antenna A- WLAN(2.4G) - Maximum Average Power |           |         |                 |                     |
|-----------------------------------------------|-----------|---------|-----------------|---------------------|
| Test Mode                                     | Data Rate | Channel | Frequency (MHz) | Average Power (dBm) |
| 802.11b                                       | 11Mbps    | CH 01   | 2412            | 14.76               |
|                                               |           | CH 06   | 2437            | 15.11               |
|                                               |           | CH 11   | 2462            | 14.69               |
| 802.11g                                       | 54Mbps    | CH 01   | 2412            | 13.34               |
|                                               |           | CH 06   | 2437            | 13.90               |
|                                               |           | CH 11   | 2462            | 13.74               |
| 802.11n (20MHz)                               | MCS7      | CH 01   | 2412            | 12.90               |
|                                               |           | CH 06   | 2437            | 12.91               |
|                                               |           | CH 11   | 2462            | 13.08               |
| 802.11n (40MHz)                               | MCS7      | CH 03   | 2422            | 9.47                |
|                                               |           | CH 06   | 2437            | 9.32                |
|                                               |           | CH 09   | 2452            | 9.53                |

| Antenna B- WLAN(2.4G) - Maximum Average Power |           |         |                 |                     |
|-----------------------------------------------|-----------|---------|-----------------|---------------------|
| Test Mode                                     | Data Rate | Channel | Frequency (MHz) | Average Power (dBm) |
| 802.11b                                       | 11Mbps    | CH 01   | 2412            | 14.13               |
|                                               |           | CH 06   | 2437            | 14.51               |
|                                               |           | CH 11   | 2462            | 14.30               |
| 802.11g                                       | 54Mbps    | CH 01   | 2412            | 12.99               |
|                                               |           | CH 06   | 2437            | 13.71               |
|                                               |           | CH 11   | 2462            | 13.44               |
| 802.11n (20MHz)                               | MCS7      | CH 01   | 2412            | 12.40               |
|                                               |           | CH 06   | 2437            | 12.51               |
|                                               |           | CH 11   | 2462            | 12.78               |
| 802.11n (40MHz)                               | MCS7      | CH 03   | 2422            | 9.01                |
|                                               |           | CH 06   | 2437            | 9.48                |
|                                               |           | CH 09   | 2452            | 9.28                |



---

## 10. Power Spectral Density


### 10.1 Test Limit

The Maximum of Power Spectral Density Measurement is 8dBm

### 10.2 Test Procedures

- The transmitter output was connected to spectrum analyzer.
- The spectrum analyzer's resolution bandwidth were set at 3KHz RBW and 30KHz VBW as that of the fundamental frequency. Set the sweep time=auto couple.
- The power spectral density was measured and recorded.

### 10.3 Test Setup Layout





## 10.4 Test Result and Data

Test Date: Mar. 10, 2018

Temperature: 20°C

Atmospheric pressure: 1000 pha


Humidity: 55%

Note: The worst data is Antenna A, only shown Antenna A Plot.

Antenna A:


| Mode    | Channel | Frequency (MHz) | Measured Power Density (dBm) |
|---------|---------|-----------------|------------------------------|
| 802.11b | 1       | 2412            | -12.03                       |
|         | 6       | 2437            | -11.34                       |
|         | 11      | 2462            | -11.55                       |

Channel: 1

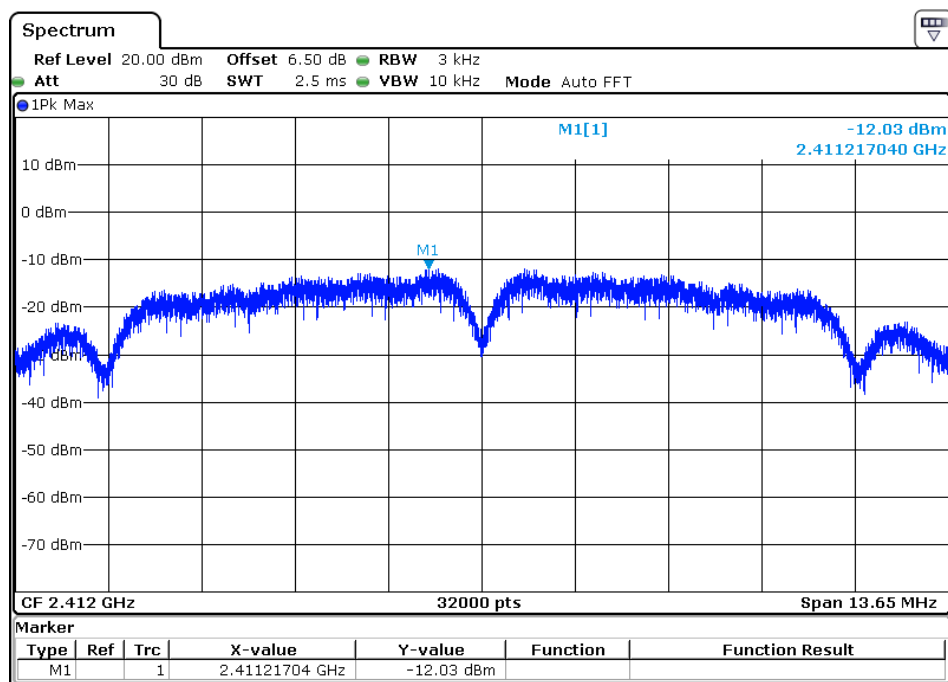




Channel: 6

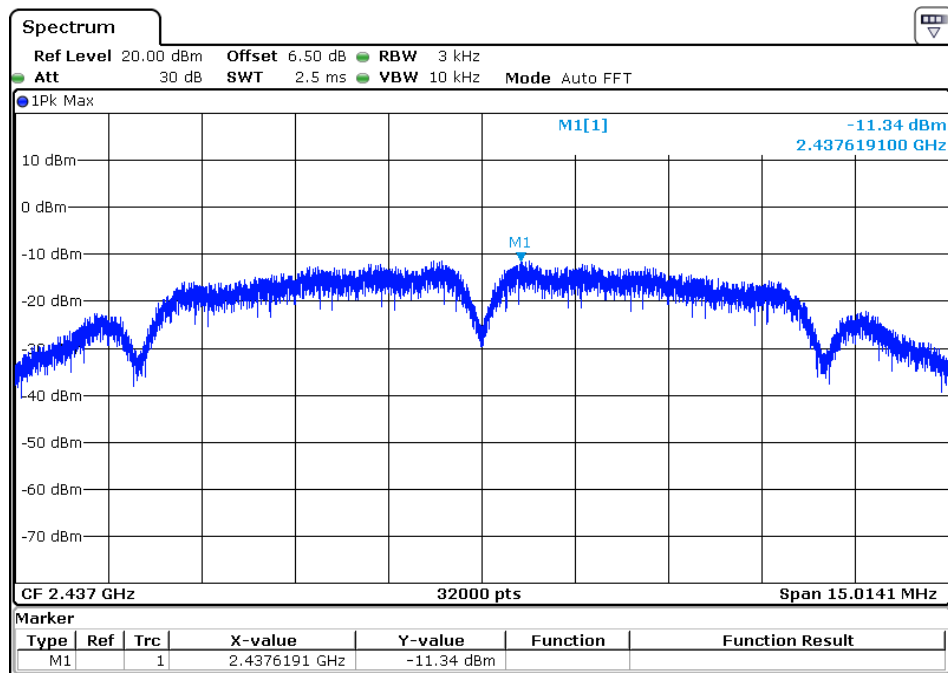


Channel: 11

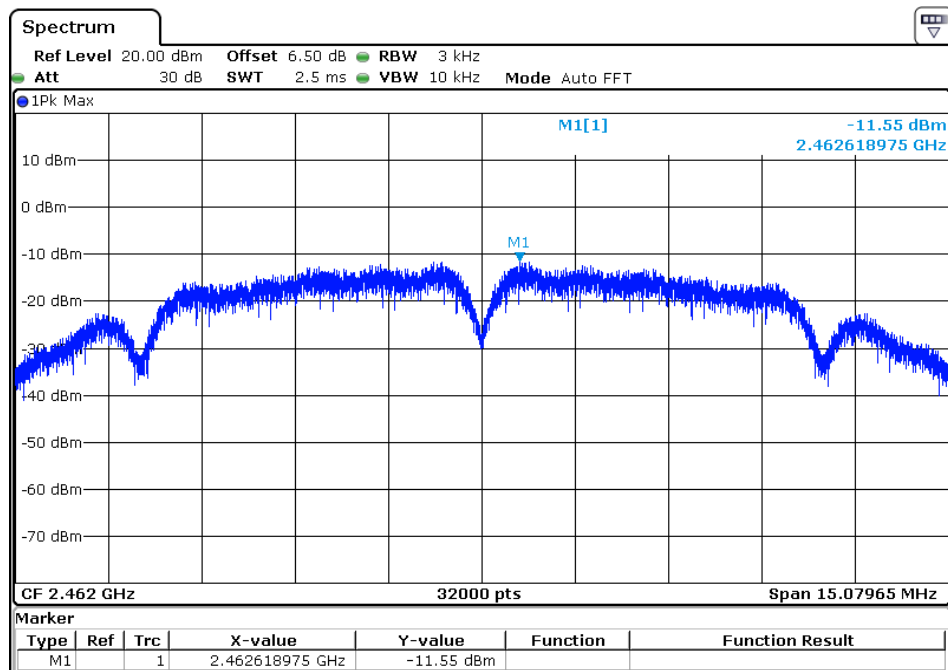




| Mode    | Channel | Frequency (MHz) | Measured Power Density (dBm) |
|---------|---------|-----------------|------------------------------|
| 802.11g | 1       | 2412            | -19.36                       |
|         | 6       | 2437            | -17.91                       |
|         | 11      | 2462            | -18.01                       |

Channel: 1

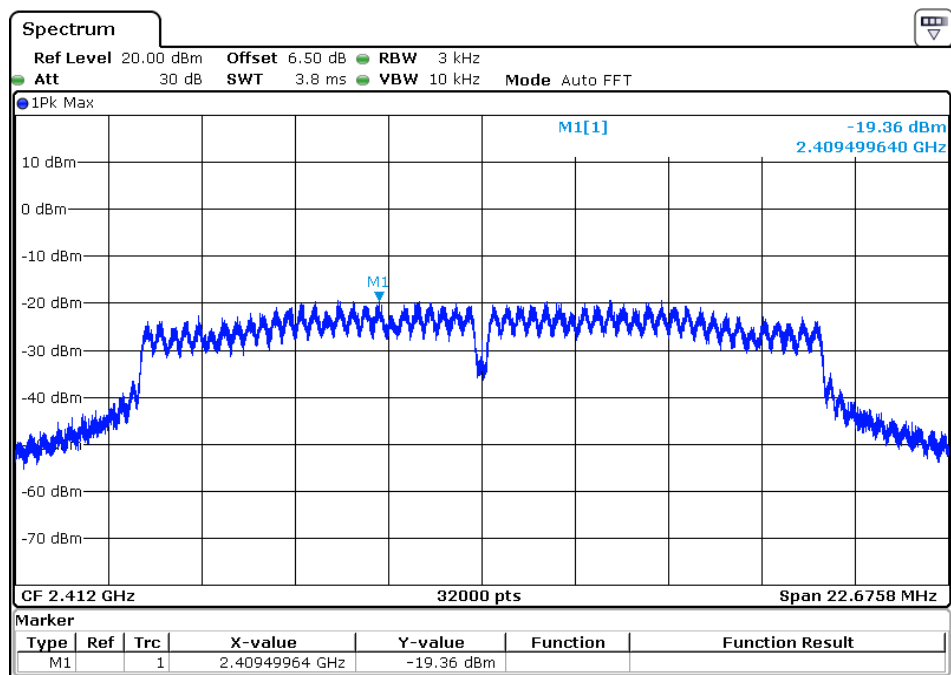




Channel: 6

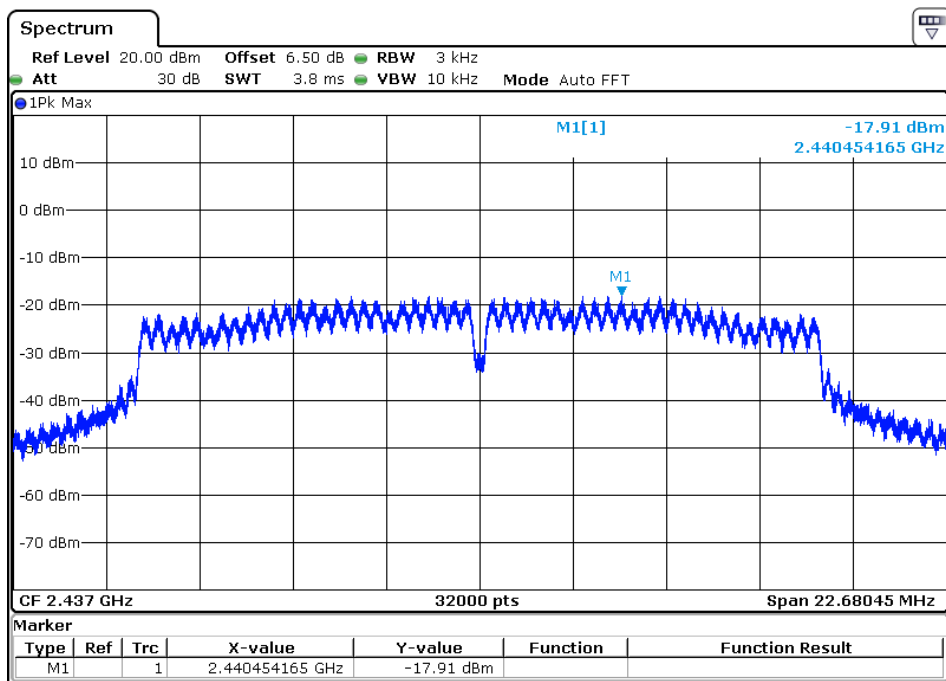


Channel: 11

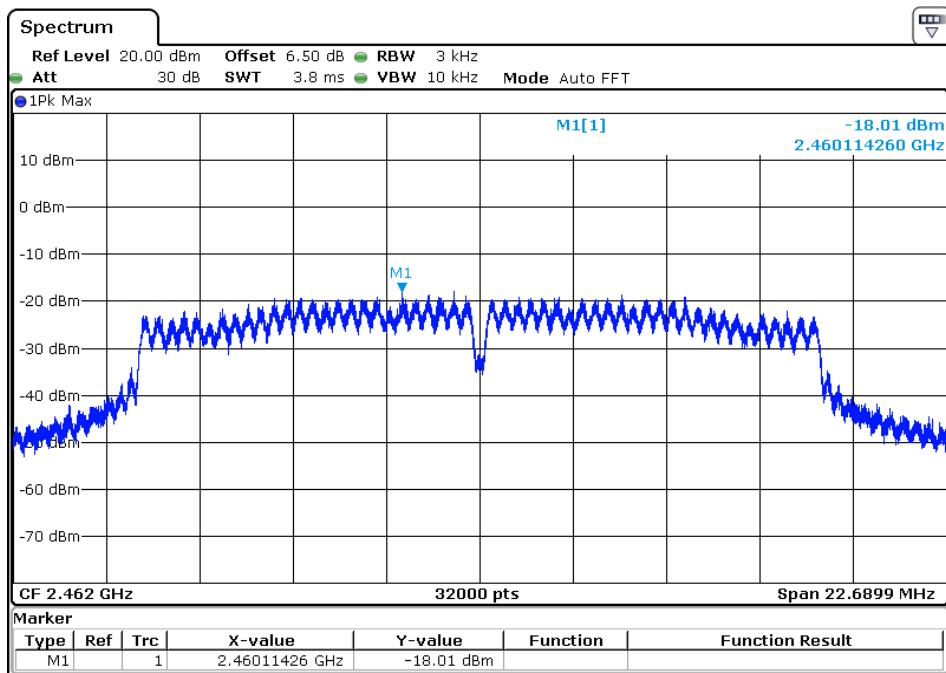




| Mode      | Channel | Frequency (MHz) | Measured Power Density (dBm) |
|-----------|---------|-----------------|------------------------------|
| 802.11n20 | 1       | 2412            | -19.07                       |
|           | 6       | 2437            | -17.65                       |
|           | 11      | 2462            | -17.48                       |

Channel: 1

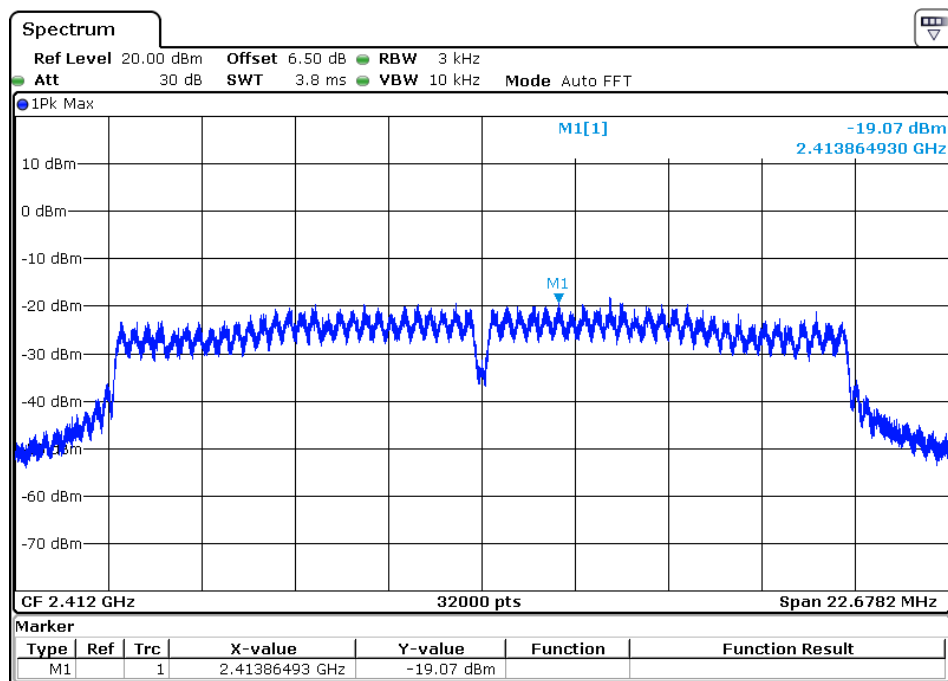




Channel: 6

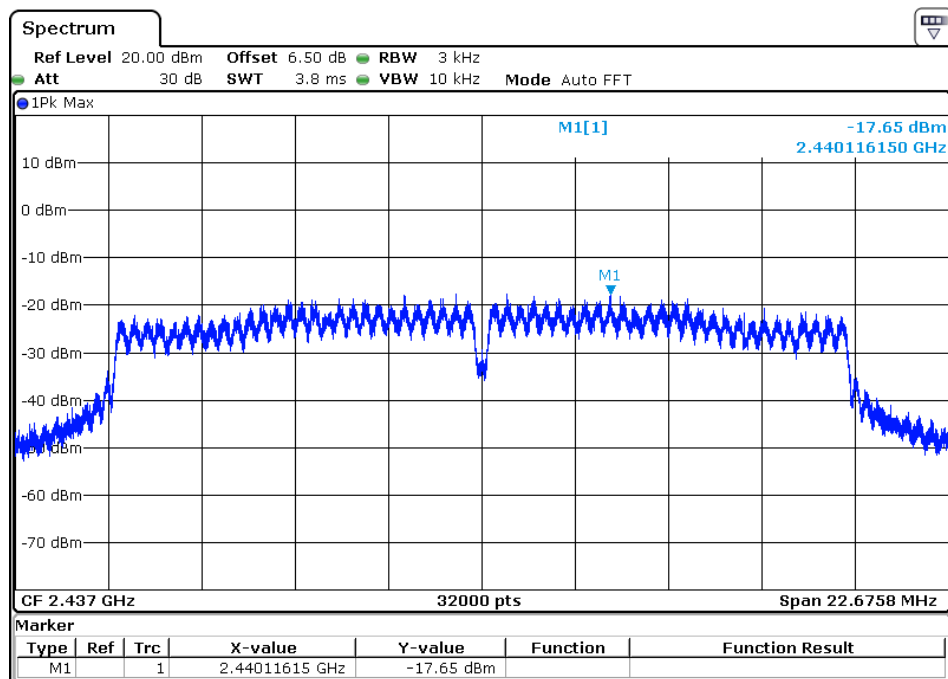


Channel: 11

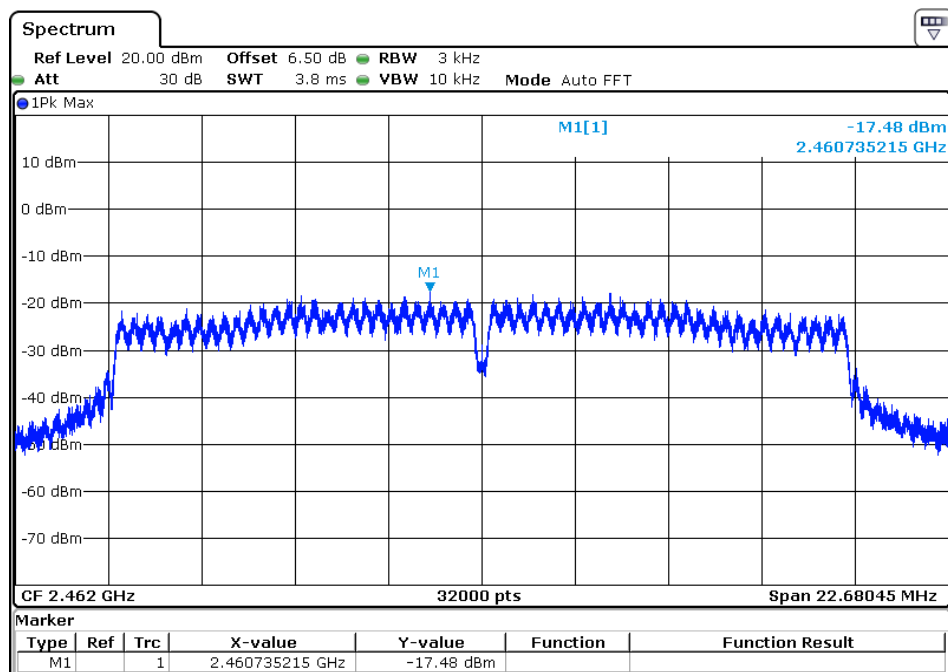




| Mode      | Channel | Frequency (MHz) | Measured Power Density (dBm) |
|-----------|---------|-----------------|------------------------------|
| 802.11n40 | 3       | 2422            | -24.64                       |
|           | 6       | 2437            | -23.64                       |
|           | 9       | 2452            | -23.80                       |

Channel: 1

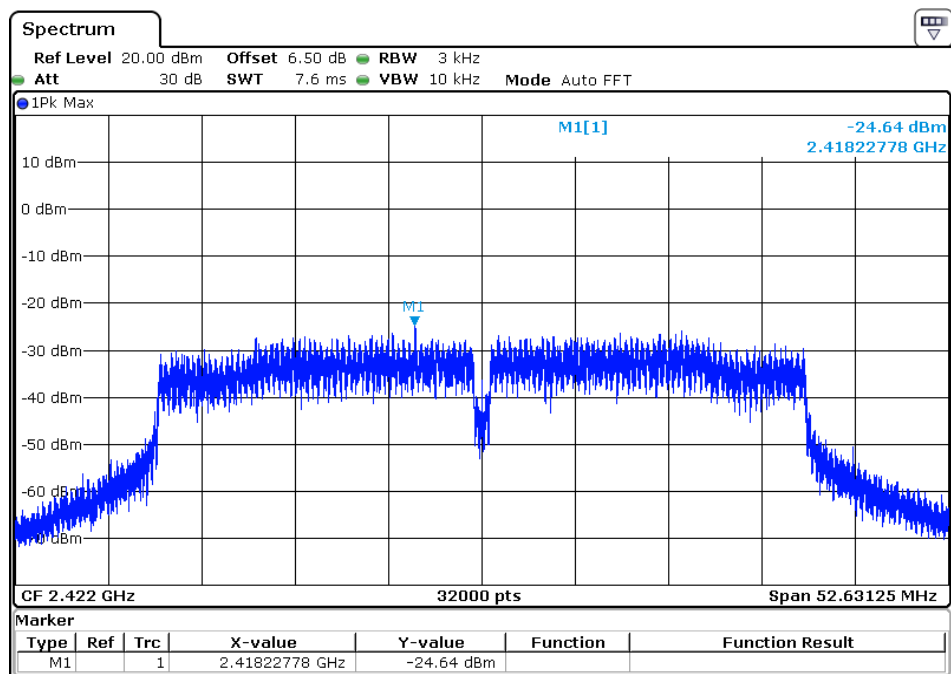




Channel: 6

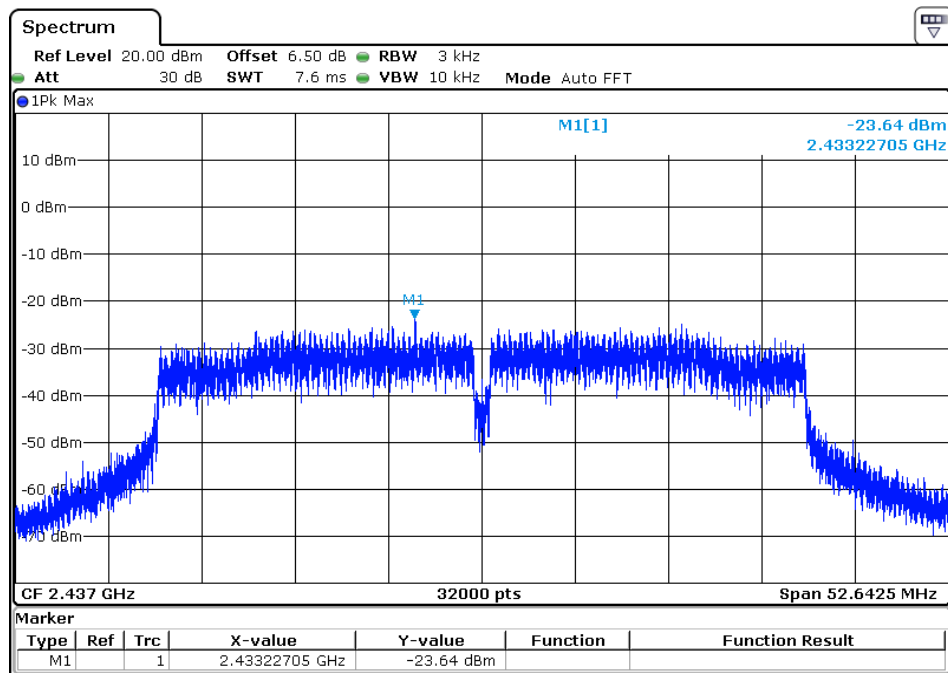

Channel: 11

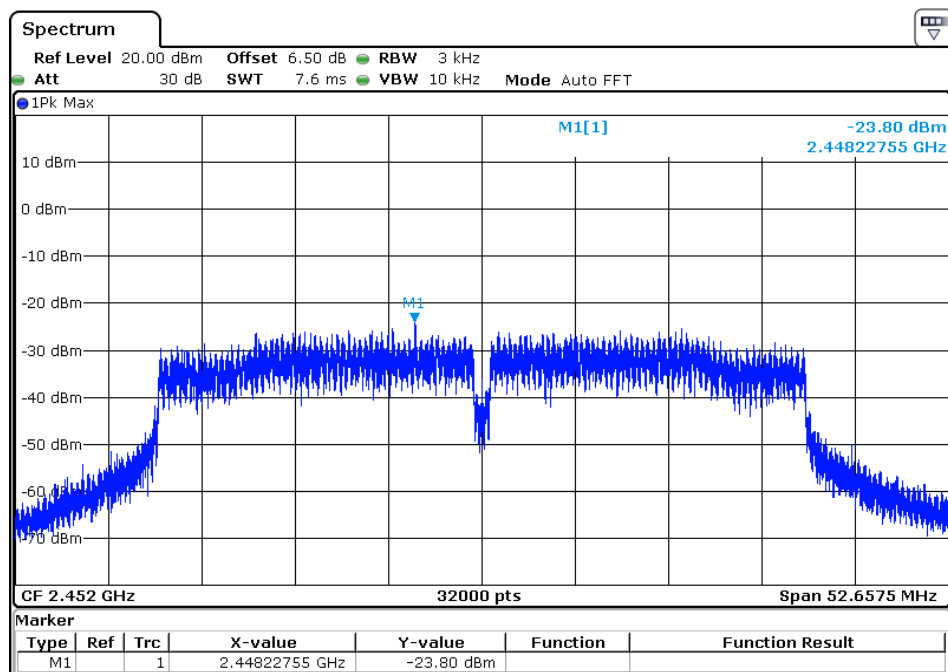

**Antenna B:**

| Mode    | Channel | Frequency (MHz) | Measured Power Density (dBm) |
|---------|---------|-----------------|------------------------------|
| 802.11b | 1       | 2412            | -12.02                       |
|         | 6       | 2437            | -11.39                       |
|         | 11      | 2462            | -11.60                       |

| Mode    | Channel | Frequency (MHz) | Measured Power Density (dBm) |
|---------|---------|-----------------|------------------------------|
| 802.11g | 1       | 2412            | -19.17                       |
|         | 6       | 2437            | -17.97                       |
|         | 11      | 2462            | -18.09                       |

| Mode      | Channel | Frequency (MHz) | Measured Power Density (dBm) |
|-----------|---------|-----------------|------------------------------|
| 802.11n20 | 1       | 2412            | -19.31                       |
|           | 6       | 2437            | -17.63                       |
|           | 11      | 2462            | -17.55                       |

| Mode      | Channel | Frequency (MHz) | Measured Power Density (dBm) |
|-----------|---------|-----------------|------------------------------|
| 802.11n40 | 3       | 2422            | -24.55                       |
|           | 6       | 2437            | -23.66                       |
|           | 9       | 2452            | -23.91                       |



---

## **11. Band Edges Measurement**


### **11.1 Test Limit**

Below -20dB of the highest emission level of operating band (In 100 kHz Resolution Bandwidth)

### **11.2 Test Procedure**

- a. The transmitter output was connected to the spectrum analyzer via a low lose cable.
- b. Set RBW of spectrum analyzer to 100 KHz and VBW of spectrum analyzer to 300 KHz with convenient frequency span including 100 KHz bandwidth from band edge.
- c. Peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20dB relative to the maximum measured in-band peak PSD level.
- d. The band edges was measured and recorded.

### **11.3 Test Setup Layout**






## 11.4 Test Result and Data

Compare with the output power of the lowest frequency, the Lower Edges attenuated more than 20dB


Compare with the output power of the highest frequency, the Upper Edges attenuated more than 20dB.

### 802.11b mode with 1 Mbps data rate

Channel1: 2.412 GHz

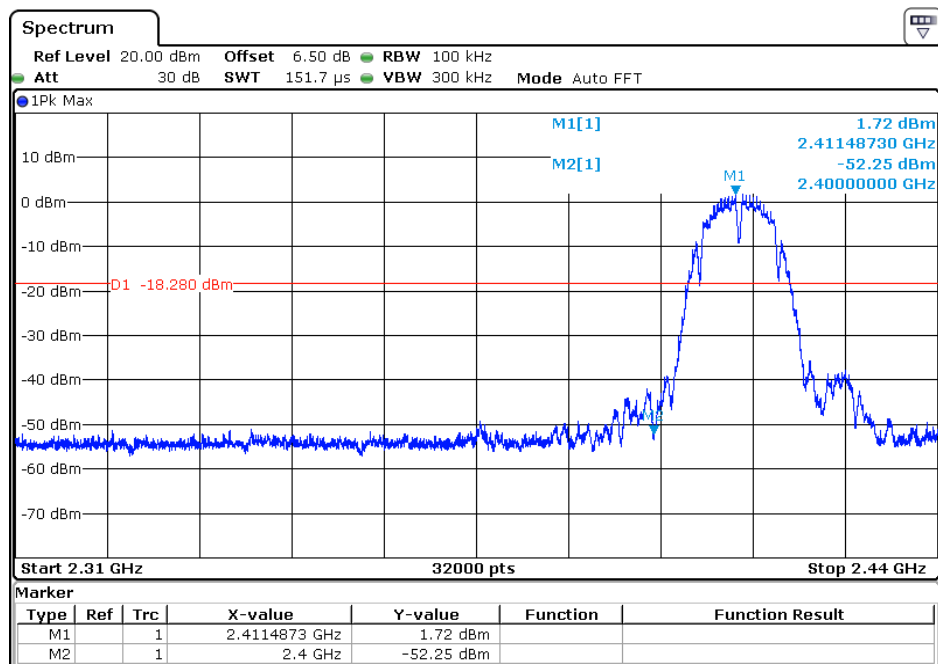


Channel11: 2.462 GHz

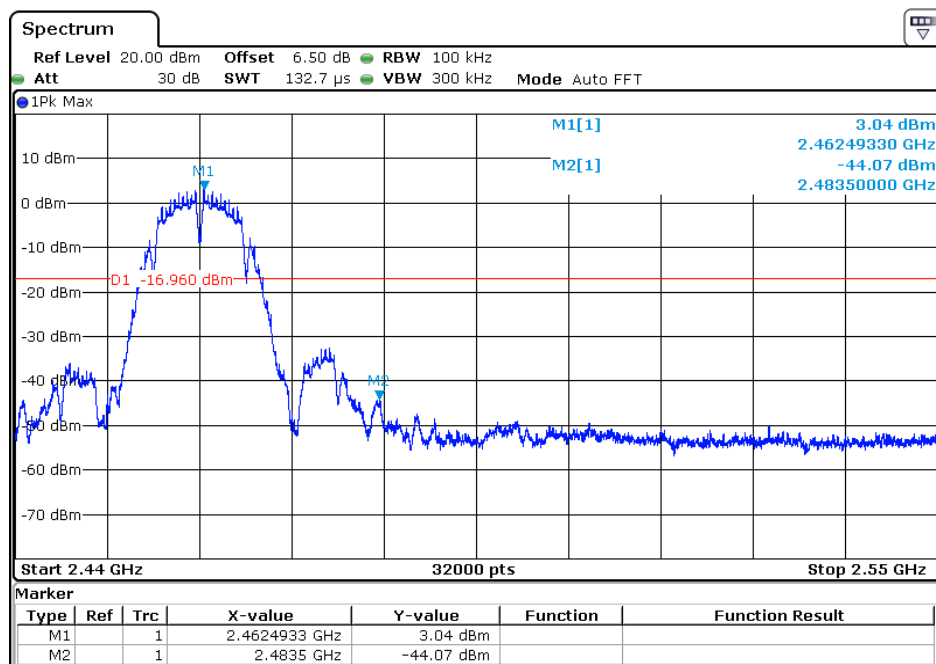




## 802.11g mode with 6 Mbps data rate

Channel1: 2.412 GHz

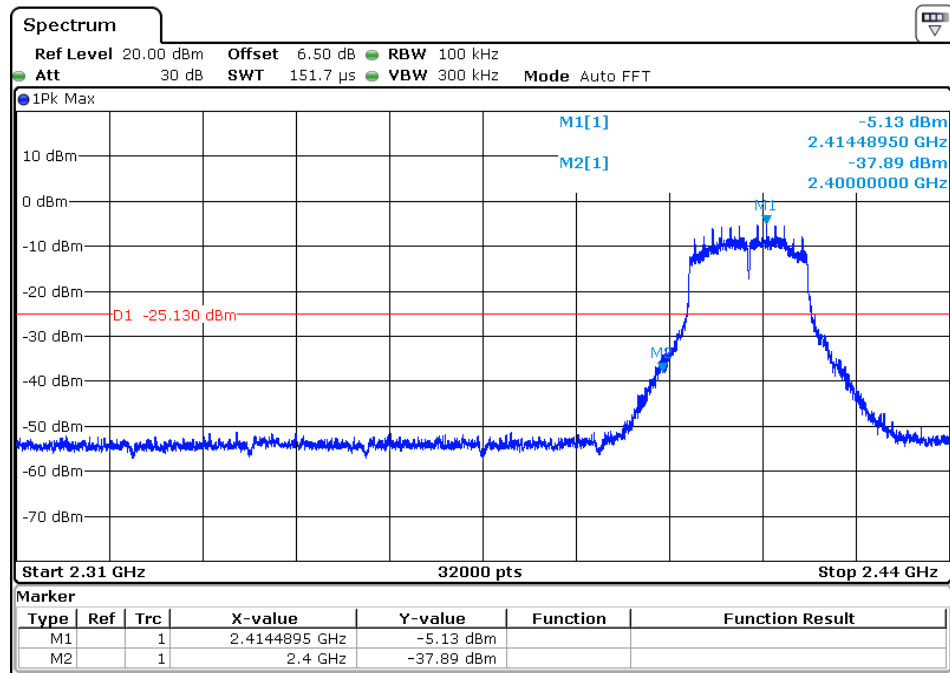


Channel11: 2.462 GHz

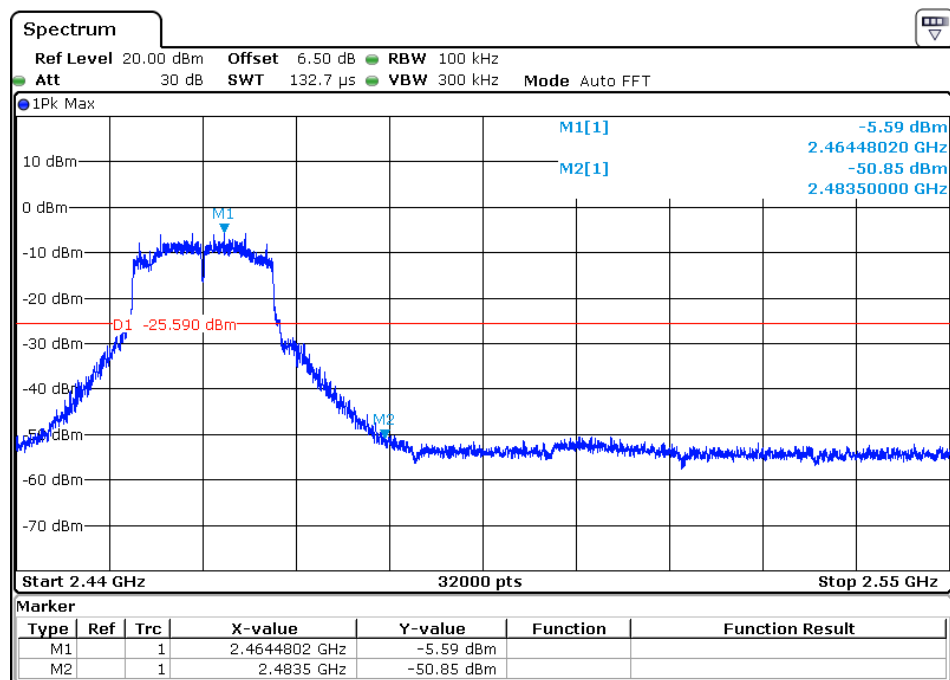




## 802.11n(HT20) mode with 7.2Mbps data rate

Channel1: 2.412 GHz

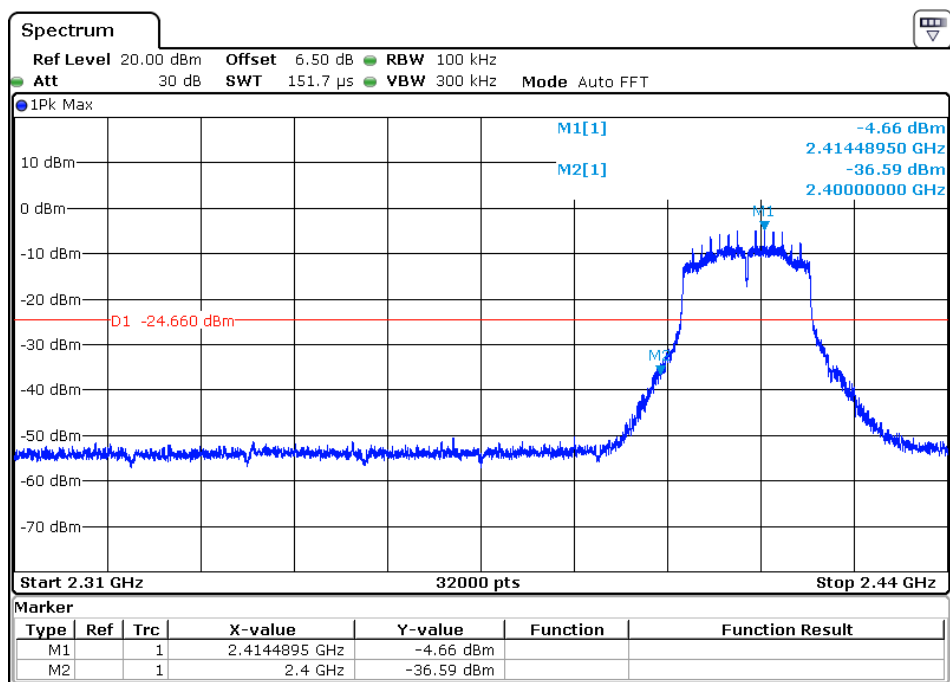


Channel11: 2.462 GHz

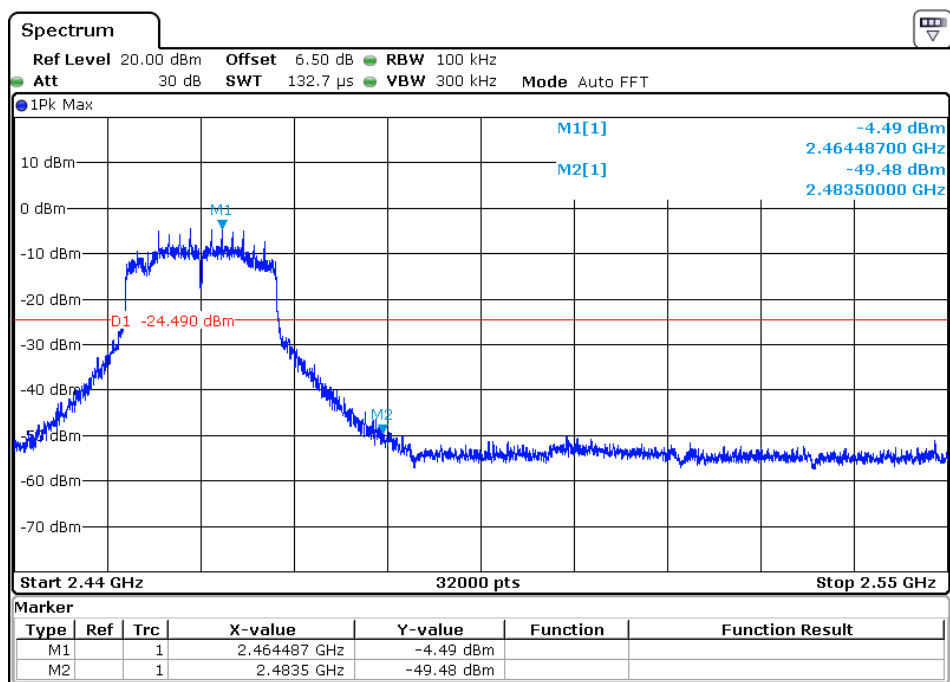




## 802.11n(HT40) mode with 15Mbps data rate

Channel3: 2.422 GHz

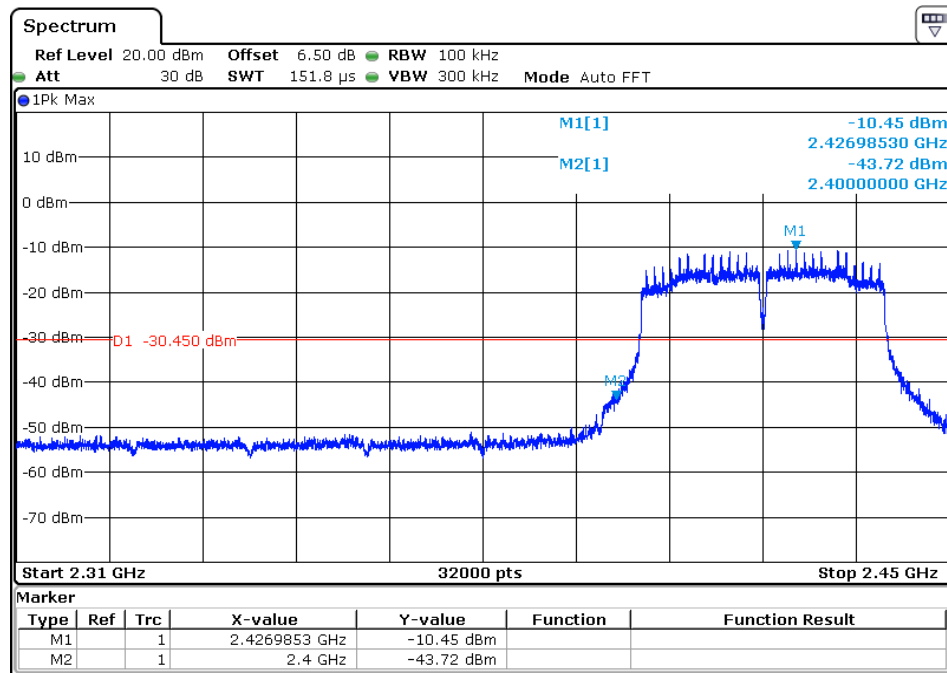

Channel9: 2.452 GHz

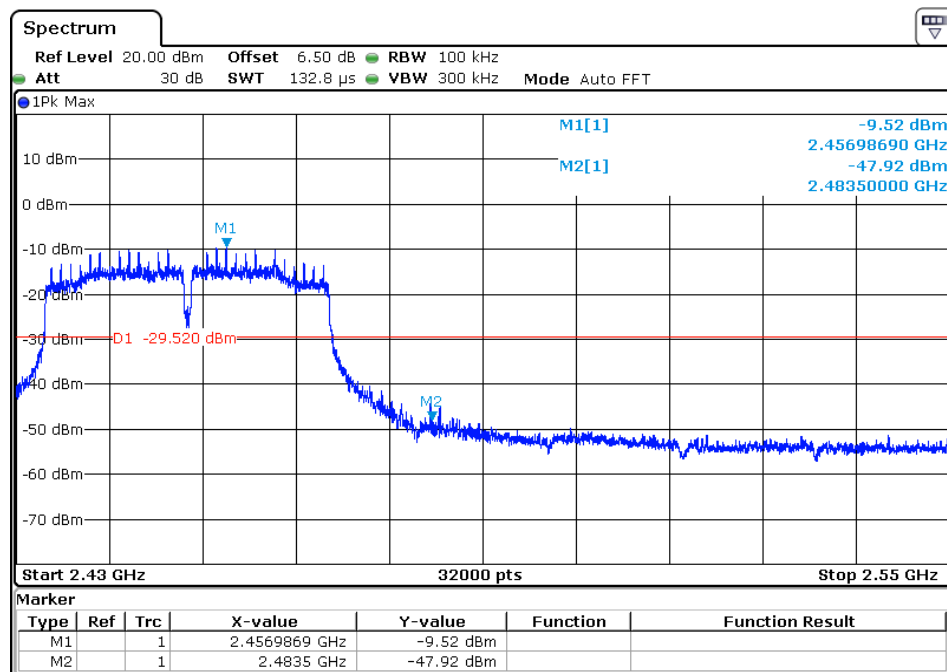

**11.5 Restrict Band Emission Measurement Data**

|             |   |               |             |   |       |
|-------------|---|---------------|-------------|---|-------|
| Power       | : | AC 12V/60Hz   | Pol/Phase   | : | H/V   |
| Test Mode 1 | : | 802.11b       | Temperature | : | 26 °C |
| Test Date   | : | Dec. 18, 2017 | Humidity    | : | 55 %  |

**Note:**

1. The transmitter was setup to transmit at the lowest channel. Then the field strength was measured at 2310-2390 MHz.
2. The transmitter was setup to transmit at the highest channel. Then the field strength was measured at 2483.5-2500 MHz.
3. The data of 2390MHz and 2483.5MHz was the worst.

| Channel 1       |             |                      |                       |                 |        | Fundamental Frequency: 2412 MHz |     |             |            |              |
|-----------------|-------------|----------------------|-----------------------|-----------------|--------|---------------------------------|-----|-------------|------------|--------------|
| Frequency (MHz) | Ant-Pol H/V | Meter Reading (dBuV) | Corrected Factor (dB) | Result (dBuV/m) | Remark | Limit (dBuV/m)                  |     | Margin (dB) | Table Deg. | Ant High (m) |
|                 |             |                      |                       |                 |        | Peak                            | Ave |             |            |              |
| 2390.00         | H           | 41.47                | -5.79                 | 35.68           | Peak   | 74                              | 54  | -38.32      | 140        | 1.50         |
| ---             | H           | ---                  | ---                   | ---             | Ave    | 74                              | 54  | ---         | ---        | ---          |
| 2390.00         | V           | 41.29                | -5.79                 | 35.50           | Peak   | 74                              | 54  | -38.50      | 156        | 1.50         |
| ---             | V           | ---                  | ---                   | ---             | Ave    | 74                              | 54  | ---         | ---        | ---          |

| Channel 11      |             |                      |                       |                 |        | Fundamental Frequency: 2462 MHz |     |             |            |              |
|-----------------|-------------|----------------------|-----------------------|-----------------|--------|---------------------------------|-----|-------------|------------|--------------|
| Frequency (MHz) | Ant-Pol H/V | Meter Reading (dBuV) | Corrected Factor (dB) | Result (dBuV/m) | Remark | Limit (dBuV/m)                  |     | Margin (dB) | Table Deg. | Ant High (m) |
|                 |             |                      |                       |                 |        | Peak                            | Ave |             |            |              |
| 2483.50         | H           | 37.58                | -4.98                 | 32.60           | Peak   | 74                              | 54  | -41.40      | 72         | 1.50         |
| ---             | H           | ---                  | ---                   | ---             | Ave    | 74                              | 54  | ---         | ---        | ---          |
| 2483.50         | V           | 37.48                | -4.98                 | 32.50           | Peak   | 74                              | 54  | -41.50      | 53         | 1.50         |
| ---             | V           | ---                  | ---                   | ---             | Ave    | 74                              | 54  | ---         | ---        | ---          |



|                                                                                                                                                                                                                                                                                                                     |                 |             |         |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|-------------|---------|
| Power                                                                                                                                                                                                                                                                                                               | : AC 12V/60Hz   | Pol/Phase   | : H/V   |
| Test Mode 1                                                                                                                                                                                                                                                                                                         | : 802.11g       | Temperature | : 26 °C |
| Test Date                                                                                                                                                                                                                                                                                                           | : Dec. 18, 2017 | Humidity    | : 55 %  |
| Note:<br>1. The transmitter was setup to transmit at the lowest channel. Then the field strength was measured at 2310-2390 MHz.<br>2. The transmitter was setup to transmit at the highest channel. Then the field strength was measured at 2483.5-2500 MHz.<br>3. The data of 2390MHz and 2483.5MHz was the worst. |                 |             |         |

| Channel 1       |             |                      |                       |                 |        | Fundamental Frequency: 2412 MHz |     |             |            |              |
|-----------------|-------------|----------------------|-----------------------|-----------------|--------|---------------------------------|-----|-------------|------------|--------------|
| Frequency (MHz) | Ant-Pol H/V | Meter Reading (dBuV) | Corrected Factor (dB) | Result (dBuV/m) | Remark | Limit (dBuV/m)                  |     | Margin (dB) | Table Deg. | Ant High (m) |
|                 |             |                      |                       |                 |        | Peak                            | Ave |             |            |              |
| 2390.00         | H           | 41.55                | -5.79                 | 35.76           | Peak   | 74                              | 54  | -38.32      | 140        | 1.50         |
| ---             | H           | ---                  | ---                   | ----            | Ave    | 74                              | 54  | ---         | ---        | ---          |
| 2390.00         | V           | 42.58                | -5.79                 | 36.79           | Peak   | 74                              | 54  | -38.50      | 156        | 1.50         |
| ---             | V           | ---                  | ---                   | ----            | Ave    | 74                              | 54  | ---         | ---        | ---          |
| Channel 11      |             |                      |                       |                 |        | Fundamental Frequency: 2462 MHz |     |             |            |              |
| Frequency (MHz) | Ant-Pol H/V | Meter Reading (dBuV) | Corrected Factor (dB) | Result (dBuV/m) | Remark | Limit (dBuV/m)                  |     | Margin (dB) | Table Deg. | Ant High (m) |
|                 |             |                      |                       |                 |        | Peak                            | Ave |             |            |              |
| 2483.50         | H           | 38.56                | -4.98                 | 33.58           | Peak   | 74                              | 54  | -41.40      | 72         | 1.50         |
| ---             | H           | ---                  | ---                   | ----            | Ave    | 74                              | 54  | ---         | ---        | ---          |
| 2483.50         | V           | 38.36                | -4.98                 | 33.38           | Peak   | 74                              | 54  | -41.50      | 53         | 1.50         |
| ---             | V           | ---                  | ---                   | ----            | Ave    | 74                              | 54  | ---         | ---        | ---          |



|                                                                                                                                                                                                                                                                                                                     |                 |             |         |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|-------------|---------|
| Power                                                                                                                                                                                                                                                                                                               | : AC 12V/60Hz   | Pol/Phase   | : H/V   |
| Test Mode 1                                                                                                                                                                                                                                                                                                         | : 802.11n20     | Temperature | : 26 °C |
| Test Date                                                                                                                                                                                                                                                                                                           | : Dec. 18, 2017 | Humidity    | : 55 %  |
| Note:<br>1. The transmitter was setup to transmit at the lowest channel. Then the field strength was measured at 2310-2390 MHz.<br>2. The transmitter was setup to transmit at the highest channel. Then the field strength was measured at 2483.5-2500 MHz.<br>3. The data of 2390MHz and 2483.5MHz was the worst. |                 |             |         |

| Channel 1       |             |                      |                       |                 |        | Fundamental Frequency: 2412 MHz |     |             |            |              |
|-----------------|-------------|----------------------|-----------------------|-----------------|--------|---------------------------------|-----|-------------|------------|--------------|
| Frequency (MHz) | Ant-Pol H/V | Meter Reading (dBuV) | Corrected Factor (dB) | Result (dBuV/m) | Remark | Limit (dBuV/m)                  |     | Margin (dB) | Table Deg. | Ant High (m) |
|                 |             |                      |                       |                 |        | Peak                            | Ave |             |            |              |
| 2390.00         | H           | 41.65                | -5.79                 | 35.86           | Peak   | 74                              | 54  | -38.32      | 140        | 1.50         |
| ---             | H           | ---                  | ---                   | ----            | Ave    | 74                              | 54  | ---         | ---        | ---          |
| 2390.00         | V           | 41.47                | -5.79                 | 35.68           | Peak   | 74                              | 54  | -38.50      | 156        | 1.50         |
| ---             | V           | ---                  | ---                   | ----            | Ave    | 74                              | 54  | ---         | ---        | ---          |
| Channel 11      |             |                      |                       |                 |        | Fundamental Frequency: 2462 MHz |     |             |            |              |
| Frequency (MHz) | Ant-Pol H/V | Meter Reading (dBuV) | Corrected Factor (dB) | Result (dBuV/m) | Remark | Limit (dBuV/m)                  |     | Margin (dB) | Table Deg. | Ant High (m) |
|                 |             |                      |                       |                 |        | Peak                            | Ave |             |            |              |
| 2483.50         | H           | 38.86                | -4.98                 | 33.88           | Peak   | 74                              | 54  | -41.40      | 72         | 1.50         |
| ---             | H           | ---                  | ---                   | ----            | Ave    | 74                              | 54  | ---         | ---        | ---          |
| 2483.50         | V           | 37.88                | -4.98                 | 32.90           | Peak   | 74                              | 54  | -41.50      | 53         | 1.50         |
| ---             | V           | ---                  | ---                   | ----            | Ave    | 74                              | 54  | ---         | ---        | ---          |



|                                                                                                                                                                                                                                                                                                                     |                 |             |         |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|-------------|---------|
| Power                                                                                                                                                                                                                                                                                                               | : AC 12V/60Hz   | Pol/Phase   | : H/V   |
| Test Mode 1                                                                                                                                                                                                                                                                                                         | : 802.11n40     | Temperature | : 26 °C |
| Test Date                                                                                                                                                                                                                                                                                                           | : Dec. 18, 2017 | Humidity    | : 55 %  |
| Note:<br>1. The transmitter was setup to transmit at the lowest channel. Then the field strength was measured at 2310-2390 MHz.<br>2. The transmitter was setup to transmit at the highest channel. Then the field strength was measured at 2483.5-2500 MHz.<br>3. The data of 2390MHz and 2483.5MHz was the worst. |                 |             |         |

| Channel 3       |             |                      |                       |                 |        | Fundamental Frequency: 2422 MHz |     |             |            |              |
|-----------------|-------------|----------------------|-----------------------|-----------------|--------|---------------------------------|-----|-------------|------------|--------------|
| Frequency (MHz) | Ant-Pol H/V | Meter Reading (dBuV) | Corrected Factor (dB) | Result (dBuV/m) | Remark | Limit (dBuV/m)                  |     | Margin (dB) | Table Deg. | Ant High (m) |
|                 |             |                      |                       |                 |        | Peak                            | Ave |             |            |              |
| 2390.00         | H           | 42.68                | -5.79                 | 36.89           | Peak   | 74                              | 54  | -38.32      | 140        | 1.50         |
| ---             | H           | ---                  | ---                   | ---             | Ave    | 74                              | 54  | ---         | ---        | ---          |
| 2390.00         | V           | 42.04                | -5.79                 | 36.25           | Peak   | 74                              | 54  | -38.50      | 156        | 1.50         |
| ---             | V           | ---                  | ---                   | ---             | Ave    | 74                              | 54  | ---         | ---        | ---          |
| Channel 9       |             |                      |                       |                 |        | Fundamental Frequency: 2452 MHz |     |             |            |              |
| Frequency (MHz) | Ant-Pol H/V | Meter Reading (dBuV) | Corrected Factor (dB) | Result (dBuV/m) | Remark | Limit (dBuV/m)                  |     | Margin (dB) | Table Deg. | Ant High (m) |
|                 |             |                      |                       |                 |        | Peak                            | Ave |             |            |              |
| 2483.50         | H           | 37.36                | -4.98                 | 32.38           | Peak   | 74                              | 54  | -41.40      | 72         | 1.50         |
| ---             | H           | ---                  | ---                   | ---             | Ave    | 74                              | 54  | ---         | ---        | ---          |
| 2483.50         | V           | 38.42                | -4.98                 | 33.44           | Peak   | 74                              | 54  | -41.50      | 53         | 1.50         |
| ---             | V           | ---                  | ---                   | ---             | Ave    | 74                              | 54  | ---         | ---        | ---          |

**Note:**

1. Emission level = Reading level + Correction factor
2. Correction factor: Antenna factor, Cable loss, Pre-Amp, etc.
3. All emissions as described above were determining by rotating the EUT through three orthogonal axes to maximizing the emissions if the EUT belongs to hand-held or body-worn devices.
4. Measurements above 1000 MHz, Peak detector setting:  
1 MHz RBW with 1 MHz VBW (Peak Detector).
5. Measurements above 1000 MHz, Average detector setting:  
1 MHz RBW with 10Hz VBW (AV Detector).
6. Peak detector measurement data will represent the worst case results.
7. Where limits are specified for both average and peak detector functions, if the peak measured value complies with the average limit, it is unnecessary to perform an average measurement.



## 12. Restricted Bands of Operation

Only spurious emissions are permitted in any of the frequency bands listed below:

| MHz                 | MHz                   | MHz             | GHz             |
|---------------------|-----------------------|-----------------|-----------------|
| 0.09000 – 0.11000   | 16.42000 – 16.42300   | 399.9 – 410.0   | 4.500 – 5.150   |
| 0.49500 – 0.505**   | 16.69475 – 16.69525   | 608.0 – 614.0   | 5.350 – 5.460   |
| 2.17350 – 2.19050   | 16.80425 – 16.80475   | 960.0 – 1240.0  | 7.250 – 7.750   |
| 4.12500 – 4.12800   | 25.50000 – 25.67000   | 1300.0 – 1427.0 | 8.025 – 8.500   |
| 4.17725 – 4.17775   | 37.50000 – 38.25000   | 1435.0 – 1626.5 | 9.000 – 9.200   |
| 4.20725 – 4.20775   | 73.00000 – 74.60000   | 1645.5 – 1646.5 | 9.300 – 9.500   |
| 6.21500 – 6.21800   | 74.80000 – 75.20000   | 1660.0 – 1710.0 | 10.600 – 12.700 |
| 6.26775 – 6.26825   | 108.00000 – 121.94000 | 1718.8 – 1722.2 | 13.250 – 13.400 |
| 6.31175 – 6.31225   | 123.00000 – 138.00000 | 2200.0 – 2300.0 | 14.470 – 14.500 |
| 8.29100 – 8.29400   | 149.90000 – 150.05000 | 2310.0 – 2390.0 | 15.350 – 16.200 |
| 8.36200 – 8.36600   | 156.52475 – 156.52525 | 2483.5 – 2500.0 | 17.700 – 21.400 |
| 8.37625 – 8.38675   | 156.70000 – 156.90000 | 2655.0 – 2900.0 | 22.010 – 23.120 |
| 8.41425 – 8.41475   | 162.01250 – 167.17000 | 3260.0 – 3267.0 | 23.600 – 24.000 |
| 12.29000 – 12.29300 | 167.72000 – 173.20000 | 3332.0 – 3339.0 | 31.200 – 31.800 |
| 12.51975 – 12.52025 | 240.00000 – 285.00000 | 3345.8 – 3358.0 | 36.430 – 36.500 |
| 12.57675 – 12.57725 | 322.00000 – 335.40000 | 3600.0 – 4400.0 | Above 38.6      |
| 13.36000 – 13.41000 |                       |                 |                 |

\*\* : Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz

### 12.1 Labeling Requirement

The device shall bear the following statement in a conspicuous location on the device:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.