



TESTING LABORATORY  
CERTIFICATE NUMBER: 3297.02



FCC PART 15, SUBPART C  
ISEDC RSS-247, ISSUE 2, FEBRUARY 2017

## TEST REPORT

For

### Code and Modules Inc.

4701 Patrick Henry Drive, Bldg 22,  
Suite 107, Santa Clara, CA 95054

**FCC ID: 2APEM-PXBD  
IC: 23802-PXBD**

<b>Report Type:</b> Original Report	<b>Product Type:</b> Edge Platform
<b>Prepared By:</b> Vincent Licata Test Engineer	
<b>Report Number:</b> R1803143-247 DSS	
<b>Report Date:</b> 2018-05-10	
<b>Reviewed By:</b> Jin Yang RF Engineer	
	Bay Area Compliance Laboratories Corp. 1274 Anvilwood Avenue, Sunnyvale, CA 94089, USA Tel: (408) 732-9162 Fax: (408) 732-9164

**Note:** This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report **must not** be used by the customer to claim product certification, approval, or endorsement by A2LA\*, NIST, or any agency of the Federal Government.

\* This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk “\*” (a)(2)

## TABLE OF CONTENTS

<b>1 General Description.....</b>	<b>5</b>
1.1 Product Description for Equipment Under Test (EUT) .....	5
1.2 Objective.....	5
1.3 Related Submittal(s)/Grant(s).....	5
1.4 Test Methodology .....	5
1.5 Measurement Uncertainty.....	6
1.6 Test Facility Registrations .....	6
1.7 Test Facility Accreditations .....	6
<b>2 System Test Configuration.....</b>	<b>9</b>
2.1 Justification .....	9
2.2 EUT Exercise Software.....	9
2.3 Duty Cycle Correction Factor .....	9
2.4 Equipment Modifications.....	11
2.5 Local Support Equipment .....	11
2.6 Support Equipment .....	11
2.7 Power Supply/Adapter .....	11
2.8 Interface Ports and Cabling.....	12
<b>3 Summary of Test Results .....</b>	<b>13</b>
<b>4 FCC §15.203 &amp; ISEDC RSS-Gen §6.8 - Antenna Requirements .....</b>	<b>14</b>
4.1 Applicable Standards .....	14
4.2 Antenna Description .....	15
<b>5 FCC §2.1091, §15.247(i) &amp; ISEDC RSS-102 - RF Exposure.....</b>	<b>16</b>
5.1 Applicable Standards .....	16
5.2 MPE Prediction.....	17
5.3 MPE Results .....	17
5.4 RF exposure evaluation exemption for IC .....	20
<b>6 FCC §15.207 &amp; ISEDC RSS-Gen §8.8 - AC Line Conducted Emissions.....</b>	<b>21</b>
6.1 Applicable Standards .....	21
6.2 Test Setup .....	21
6.3 Test Procedure .....	21
6.4 Corrected Amplitude and Margin Calculation.....	22
6.5 Test Equipment List and Details .....	22
6.6 Test Environmental Conditions .....	22
6.7 Summary of Test Results.....	23
6.1 Conducted Emissions Test Plots and Data.....	24
<b>7 FCC §15.209, §15.247(d) &amp; ISEDC RSS-247 §5.5, RSS-Gen §8.9, §8.10 - Spurious Radiated Emissions.....</b>	<b>28</b>
7.1 Applicable Standards .....	28
7.2 Test Setup .....	31
7.3 Test Procedure .....	31
7.4 Corrected Amplitude and Margin Calculation.....	31
7.5 Test Equipment List and Details .....	32
7.6 Test Environmental Conditions .....	32
7.7 Summary of Test Results .....	33
7.8 Radiated Emissions Test Result Data .....	34
<b>8 FCC §15.247(a) (1) &amp; ISEDC RSS-247 §5.1, RSS-Gen §6.6 - Emission Bandwidth.....</b>	<b>44</b>
8.1 Applicable Standards .....	44
8.2 Measurement Procedure.....	44
8.3 Test Equipment List and Details .....	44
8.4 Test Environmental Conditions .....	44
8.5 Test Results.....	45
<b>9 FCC §15.247(b)(1) &amp; ISEDC RSS-247 §5.4 - Output Power .....</b>	<b>49</b>

9.1	Applicable Standards .....	49
9.2	Measurement Procedure.....	49
9.3	Test Equipment List and Details .....	49
9.4	Test Environmental Conditions .....	49
9.5	Test Results.....	50
<b>10</b>	<b>FCC §15.247(d) &amp; ISED RSS-247 §5.5 - 100 kHz Bandwidth of Band Edges.....</b>	<b>54</b>
10.1	Applicable Standards .....	54
10.2	Measurement Procedure.....	54
10.3	Test Equipment List and Details .....	54
10.4	Test Environmental Conditions .....	55
10.5	Test Results.....	55
<b>11</b>	<b>FCC §15.247(a)(1)(iii) &amp; ISED RSS-247 §5.1(4) - Dwell Time .....</b>	<b>59</b>
11.1	Applicable Standards .....	59
11.2	Measurement Procedure.....	59
11.3	Test Equipment List and Details .....	60
11.4	Test Environmental Conditions .....	60
11.5	Test Results.....	61
<b>12</b>	<b>FCC §15.247(a)(1)(iii) &amp; ISED RSS-247 §5.1(4) - Number of Hopping Channels.....</b>	<b>80</b>
12.1	Applicable Standards .....	80
12.2	Test Procedure .....	80
12.3	Test Equipment List and Details .....	80
12.4	Test Environmental Conditions .....	80
12.5	Test Results.....	81
<b>13</b>	<b>FCC §15.247(a)(1) &amp; ISED RSS-247 §5.1(2) - Hopping Channel Separation .....</b>	<b>82</b>
13.1	Applicable Standards .....	82
13.2	Test Procedure .....	82
13.3	Test Equipment List and Details .....	82
13.4	Test Environmental Conditions .....	82
13.5	Test Results.....	83
<b>14</b>	<b>FCC §15.247(d) &amp; ISED RSS-247 §5.5 - Spurious Emissions at Antenna Terminals .....</b>	<b>87</b>
14.1	Applicable Standards .....	87
14.2	Test Procedure .....	87
14.3	Test Equipment List and Details .....	87
14.4	Test Environmental Conditions .....	88
14.5	Test Results.....	88
<b>15</b>	<b>Exhibit A - FCC &amp; ISED Equipment Labeling Requirements.....</b>	<b>93</b>
15.1	FCC ID Label Requirements.....	93
15.2	IC Label Requirements .....	93
12.3	Recommended Label Contents and Location.....	94
<b>16</b>	<b>Annex A (Informative) – Declaration of Similarity Letter .....</b>	<b>97</b>
<b>17</b>	<b>Appendix.....</b>	<b>99</b>
<b>18</b>	<b>Annex D (Informative) - A2LA Electrical Testing Certificate.....</b>	<b>100</b>

## DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	R1803143-247 DSS	Original Report	2018-05-10

## 1 General Description

---

### 1.1 Product Description for Equipment Under Test (EUT)

This test and measurement report was prepared on behalf of *Code & Modules Inc.*, and their product models: *SO-0G-3GG, DO-1G-3GG, PO-2G-LTA and PP-4G-LTA*, FCC ID: 2APEM-PXBD IC: 23802-PXBD or the “EUT” as referred to in this report. The EUT is an Edge Platform.

Please refer to Declaration of Similarity letter provided by the manufacturer in Annex A of this report for the difference between *SO-0G-3GG, DO-1G-3GG, PO-2G-LTA and PP-4G-LTA*. The result in this report was gathered from typical production sample PP-4G-LTA and DO-1G-3GG, serial number: MPA751489001302 and MP8772903000431 assigned by Code & Modules.

### 1.2 Objective

This report is prepared on behalf of *Code & Modules Inc.*, in accordance with Part 2, Subpart J, and Part 15, Subparts B and C of the Federal Communication Commission’s rules and ISED RSS-247 Issue 2, February 2017.

The objective is to determine compliance with FCC Part 15.247 and ISED RSS-247 rules for Output Power, Antenna Requirements, 6 dB Bandwidth, Power Spectral Density, 100 kHz Bandwidth of Band Edges Measurement, Conducted and Radiated Spurious Emissions.

### 1.3 Related Submittal(s)/Grant(s)

FCC 15.247 Report: R1803143-247 DTS

FCC 15.407 Report: R1803143-407

### 1.4 Test Methodology

All measurements contained in this report were conducted in accordance with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices and FCC KDB 558074 D01 DTS Meas Guidance v04: Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247.

## 1.5 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in the field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Parameter	Measurement uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.57 dB
Power Spectral Density, conducted	±1.48dB
Unwanted Emissions, conducted	±1.57dB
All emissions, radiated	±4.0 dB
AC power line Conducted Emission	±2.0 dB
Temperature	±2 ° C
Humidity	±5 %
DC and low frequency voltages	±1.0 %
Time	±2 %
Duty Cycle	±3 %

## 1.6 Test Facility Registrations

BACL's test facilities that are used to perform Radiated and Conducted Emissions tests are currently recognized by the Federal Communications Commission as Accredited with NIST Designation Number US1129.

BACL's test facilities that are used to perform Radiated and Conducted Emissions tests are currently registered with Industry Canada under Registration Numbers: 3062A-1, 3062A-2, and 3062A-3.

BACL is a Chinese Taipei Bureau of Standards Metrology and Inspection (BSMI) validated Conformity Assessment Body (CAB), under Appendix B, Phase I Procedures of the APEC Mutual Recognition Arrangement (MRA). BACL's BSMI Lab Code Number is: SL2-IN-E-1002R

BACL's test facilities that are used to perform AC Line Conducted Emissions, Telecommunications Line Conducted Emissions, Radiated Emissions from 30 MHz to 1 GHz, and Radiated Emissions from 1 GHz to 6 GHz are currently recognized as Accredited in accordance with the Voluntary Control Council for Interference [VCCI] Article 15 procedures under Registration Number A-0027.

## 1.7 Test Facility Accreditations

Bay Area Compliance Laboratories Corp. (BACL) is:

**A- An independent, 3<sup>rd</sup>-Party, Commercial Test Laboratory accredited to ISO/IEC 17025:2005 by A2LA (Test Laboratory Accreditation Certificate Number 3279.02),** in the fields of: Electromagnetic Compatibility and Telecommunications. Unless noted by an Asterisk (\*) in the Compliance Matrix (See Section 3 of this Test Report), BACL's ISO/IEC 17025:2005 Scope of Accreditation includes all of the Test Method Standards and/or the Product Family Standards detailed in this Test Report..

BACL's ISO/IEC 17025:2005 Scope of Accreditation includes a comprehensive suite of EMC Emissions, EMC Immunity, Radio, RF Exposure, Safety and wireline Telecommunications test methods applicable to a wide range of product categories. These product categories include Central Office Telecommunications Equipment

[including NEBS - Network Equipment Building Systems], Unlicensed and Licensed Wireless and RF devices, Information Technology Equipment (ITE); Telecommunications Terminal Equipment (TTE); Medical Electrical Equipment; Industrial, Scientific and Medical Test Equipment; Professional Audio and Video Equipment; Industrial and Scientific Instruments and Laboratory Apparatus; Cable Distribution Systems, and Energy Efficient Lighting.

**B- A Product Certification Body accredited to ISO/IEC 17065:2012 by A2LA (Product Certification Body Accreditation Certificate Number 3279.03) to certify**

- For the USA (Federal Communications Commission):

- 1- All Unlicensed radio frequency devices within FCC Scopes A1, A2, A3, and A4;
- 2- All Licensed radio frequency devices within FCC Scopes B1, B2, B3, and B4;
- 3- All Telephone Terminal Equipment within FCC Scope C.

- For the Canada (Industry Canada):

- 1 All Scope 1-Licence-Exempt Radio Frequency Devices;
- 2 All Scope 2-Licensed Personal Mobile Radio Services;
- 3 All Scope 3-Licensed General Mobile & Fixed Radio Services;
- 4 All Scope 4-Licensed Maritime & Aviation Radio Services;
- 5 All Scope 5-Licensed Fixed Microwave Radio Services
- 6 All Broadcasting Technical Standards (BETS) in the Category I Equipment Standards List.

- For Singapore (Info-Communications Development Authority (IDA)):

- 1 All Line Terminal Equipment: All Technical Specifications for Line Terminal Equipment – Table 1 of IDA MRA Recognition Scheme: 2011, Annex 2
2. All Radio-Communication Equipment: All Technical Specifications for Radio-Communication Equipment – Table 2 of IDA MRA Recognition Scheme: 2011, Annex 2

- For the Hong Kong Special Administrative Region:

- 1 All Radio Equipment, per KHCA 10XX-series Specifications;
- 2 All GMDSS Marine Radio Equipment, per HKCA 12XX-series Specifications;
- 3 All Fixed Network Equipment, per HKCA 20XX-series Specifications.

- For Japan:

- 1 MIC Telecommunication Business Law (Terminal Equipment):
  - All Scope A1 - Terminal Equipment for the Purpose of Calls;
  - All Scope A2 - Other Terminal Equipment
- 2 Radio Law (Radio Equipment):
  - All Scope B1 - Specified Radio Equipment specified in Article 38-2-2, paragraph 1, item 1 of the Radio Law
  - All Scope B2 - Specified Radio Equipment specified in Article 38-2-2, paragraph 1, item 2 of the Radio Law
  - All Scope B3 - Specified Radio Equipment specified in Article 38-2-2, paragraph 1, item 3 of the Radio Law

**C- A Product Certification Body accredited to ISO/IEC 17065:2012 by A2LA (Product Certification Body Accreditation Certificate Number 3279.01) to certify Products to USA's Environmental Protection Agency (EPA) ENERGY STAR Product Specifications for:**

- 1 Electronics and Office Equipment:
  - for Telephony (ver. 3.0)
  - for Audio/Video (ver. 3.0)
  - for Battery Charging Systems (ver. 1.1)
  - for Set-top Boxes & Cable Boxes (ver. 4.1)
  - for Televisions (ver. 6.1)
  - for Computers (ver. 6.0)
  - for Displays (ver. 6.0)

- for Imaging Equipment (ver. 2.0)
- for Computer Servers (ver. 2.0)
- 2 Commercial Food Service Equipment
  - for Commercial Dishwashers (ver. 2.0)
  - for Commercial Ice Machines (ver. 2.0)
  - for Commercial Ovens (ver. 2.1)
  - for Commercial Refrigerators and Freezers
- 3 Lighting Products
  - For Decorative Light Strings (ver. 1.5)
  - For Luminaires (including sub-components) and Lamps (ver. 1.2)
  - For Compact Fluorescent Lamps (CFLs) (ver. 4.3)
  - For Integral LED Lamps (ver. 1.4)
- 4 Heating, Ventilation, and AC Products
  - for Residential Ceiling Fans (ver. 3.0)
  - for Residential Ventilating Fans (ver. 3.2)
- 5 Other
  - For Water Coolers (ver. 3.0)

**D- A NIST Designated Phase-I and Phase-II Conformity Assessment Body (CAB) for the following economies and regulatory authorities under the terms of the stated MRAs/Treaties:**

- Australia: ACMA (Australian Communication and Media Authority) – APEC Tel MRA -Phase I;
- Canada: (Innovation, Science and Economic development Canada - ISEDC) Foreign Certification Body – FCB – APEC Tel MRA -Phase I & Phase II;
- Chinese Taipei (Republic of China – Taiwan):
  - o BSMI (Bureau of Standards, Metrology and Inspection) APEC Tel MRA -Phase I;
  - o NCC (National Communications Commission) APEC Tel MRA -Phase I;
- European Union:
  - o EMC Directive 2014/30/EU US-EU EMC & Telecom MRA CAB (NB)
  - o Radio & Teleterminal Equipment (R&TTE) Directive 1995/5/EC US -EU EMC & Telecom MRA CAB (NB)
  - o Radio Equipment (RE) Directive 2014/53/EU US-EU EMC & Telecom MRA CAB (NB)
  - o Low Voltage Directive (LVD) 2014/35/EU
- Hong Kong Special Administrative Region: (Office of the Telecommunications Authority – OFTA) APEC Tel MRA -Phase I & Phase II
- Israel – US-Israel MRA Phase I
- Republic of Korea (Ministry of Communications - Radio Research Laboratory) APEC Tel MRA -Phase I
- Singapore: (Infocomm Media Development Authority - IMDA) APEC Tel MRA -Phase I & Phase II;
- Japan: VCCI - Voluntary Control Council for Interference US-Japan Telecom Treaty VCCI Side Letter-
- USA:
  - o ENERGY STAR Recognized Test Laboratory – US EPA
  - o Telecommunications Certification Body (TCB) – US FCC;
  - o Nationally Recognized Test Laboratory (NRTL) – US OSHA
- Vietnam: APEC Tel MRA -Phase I;

## 2 System Test Configuration

### 2.1 Justification

The EUT was configured for testing in accordance to ANSI C63.10-2013

The worst-case data rates are determined by measuring the peak power across all data rates.

### 2.2 EUT Exercise Software

The test firmware used was Putty and Lab tool, provided by *Code & Modules Inc.*, the software is compliant with the standard requirements being tested against.

Modulation	Frequency (MHz)	Power Setting
GFSK	2402	2
	2441	2
	2480	2
$\pi/4$ -DQPSK	2402	2
	2441	2
	2480	2
8PSK	2402	2
	2441	2
	2480	2

### 2.3 Duty Cycle Correction Factor

According to ANSI C63.10-2013 section 7.5:

Unless otherwise specified, when the radiated emission limits are expressed in terms of the average value of the emission, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 s (100 ms). In cases where the pulse train exceeds 0.1 s, the measured field strength shall be determined during a 0.1 s interval. The following procedure is an example of how the average value may be determined. The average field strength may be found by measuring the peak pulse amplitude (in log equivalent units) and determining the duty cycle correction factor (in dB) associated with the pulse modulation as shown in following equation:

$$\delta(\text{dB}) = 20\log(\Delta)$$

where:  $\delta$  is the duty cycle correction factor (dB)  
 $\Delta$  is the duty cycle (dimensionless)


Radio Mode	On Time (μs)	Period (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)
GFSK	386.7	1.247	31.10	10.06
$\pi/4$ -DQPSK	393.3	1.253	31.38	10.17
8DPSK	3.867	1.247	31.10	10.17

Duty Cycle = On Time (ms)/ Period (ms)


Please refer to the following plots.

### GFSK Mode

#### Pulses in 100 ms

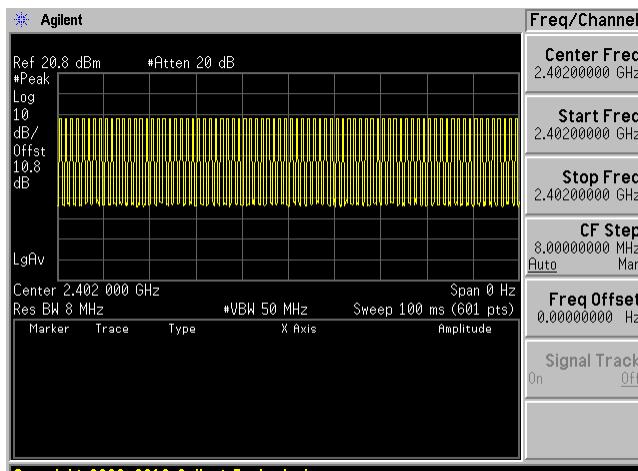


#### Pulse Width

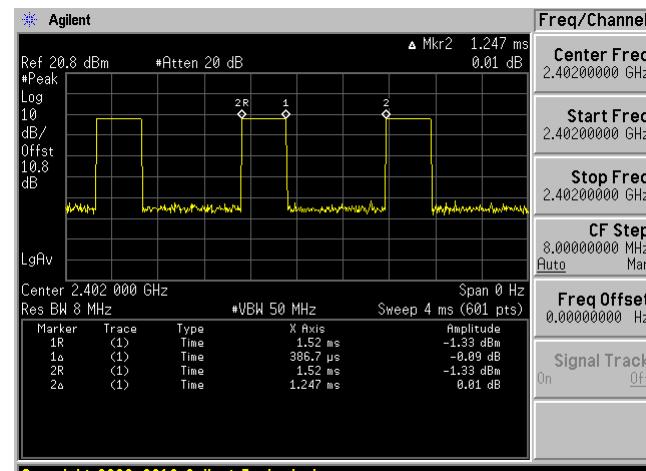


### $\pi/4$ -DQPSK Mode

#### Pulses in 100 ms

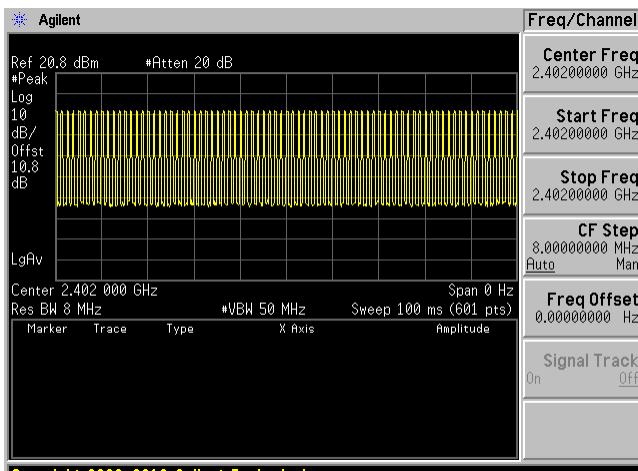



#### Pulse Width

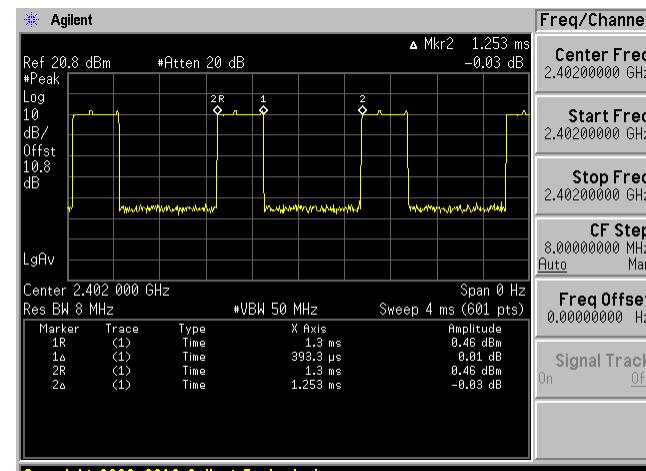

## 8DPSK Mode

Pulses in 100 ms

Pulse Width

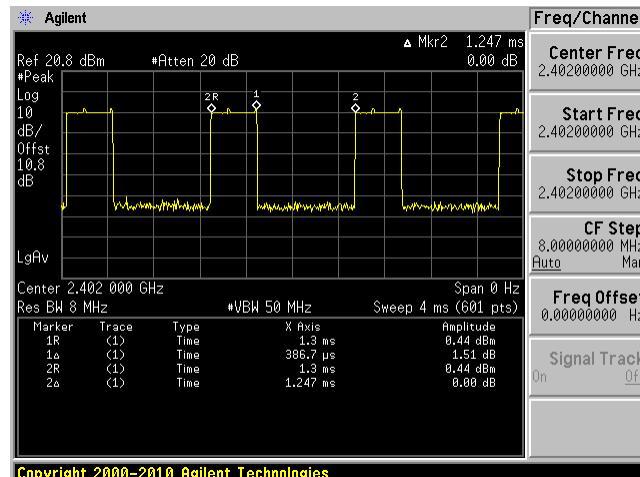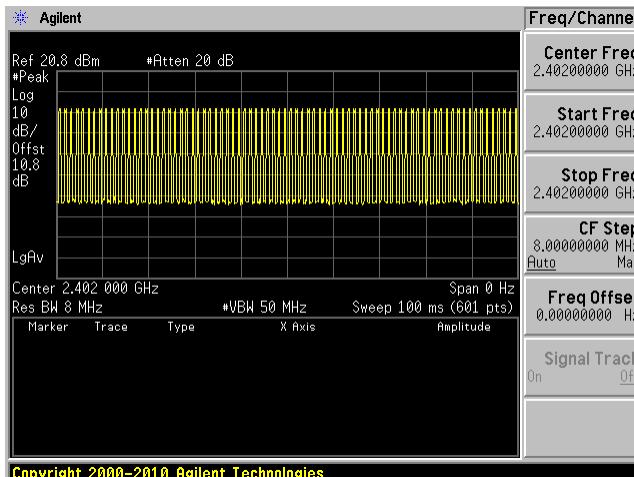

## 2.4 Equipment Modifications

N/A

## 2.5 Local Support Equipment

Manufacturer	Description	Model	Serial Number
Dell	Laptop	Latitude E6410	3CKRAQ1

## 2.6 Support Equipment

There was no support equipment included, or intended for use with EUT during these tests.

## 2.7 Power Supply/Adapter

Manufacturer	Description	Model
TRIAD	AC adapter	WS2U050-2000

## 2.8 Interface Ports and Cabling

Description	Length (m)	To	From
U.F.L to SMA	< 1 m	PSA	EUT
USB to Ethernet adapter	< 1 m	Laptop	Ethernet cable
Ethernet Cable	< 1 m	Ethernet adapter	Ethernet adapter
Ethernet adapter to USB	< 1 m	EUT	Ethernet cable

### 3 Summary of Test Results

Results reported relate only to the product tested.

FCC and ISEDC Rules	Description of Test	Results
FCC §15.203 ISEDC RSS-Gen §6.8	Antenna Requirement	Compliant
FCC §15.207 ISEDC RSS-Gen §8.8	AC Line Conducted Emissions	Compliant
FCC §2.1093/1, §15.247(i) ISEDC RSS-102	RF Exposure	Compliant
FCC §2.1051, §15.247(d) ISEDC RSS-247 §5.5	Spurious Emissions at Antenna Port	Compliant
FCC §2.1053, §15.205, §15.209, §15.247(d) ISEDC RSS-247 §5.5 ISEDC RSS-Gen §8.9, §8.10	Radiated Spurious Emissions	Compliant
FCC §15.247(a)(1) ISEDC RSS-247 §5.1(1) ISEDC RSS-Gen §6.6	20 dB and 99% Emission Bandwidth	Compliant
FCC §15.247(b)(1) ISEDC RSS-247 §5.4	Maximum Peak Output Power	Compliant
FCC §15.247(d) ISEDC RSS-247 §5.5	100 kHz Bandwidth of Frequency Band Edge	Compliant
FCC §15.247(a)(1)(iii) ISEDC RSS-247 §5.1(4)	Number of Hopping Channels	Compliant
FCC §15.247(a)(1) ISEDC RSS-247 §5.1(2)	Hopping Channel Separation	Compliant
FCC §15.247(a)(1)(iii) ISEDC RSS-247 §5.1 (4)	Dwell Time	Compliant

## 4 FCC §15.203 & ISED RSS-Gen §6.8 - Antenna Requirements

### 4.1 Applicable Standards

According to FCC §15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

According to ISED RSS-Gen §6.8: Transmitter Antenna

The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

For expediting the testing, measurements may be performed using only the antenna with highest gain of each combination of transmitter and antenna type, with the transmitter output power set at the maximum level. However, the transmitter shall comply with the applicable requirements under all operational conditions and when in combination with any type of antenna from the list provided in the test report (and in the notice to be included in the user manual, provided below).

When measurements at the antenna port are used to determine the RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna's manufacturer.

The test report shall state the RF power, output power setting and spurious emission measurements with each antenna type that is used with the transmitter being tested.

For licence-exempt equipment with detachable antennas, the user manual shall also contain the following notice in a conspicuous location:

This radio transmitter [enter the device's ISED certification number] has been approved by Innovation, Science and Economic Development Canada to operate with the antenna types listed below, with the maximum permissible gain indicated. Antenna types not included in this list that have a gain greater than the maximum gain indicated for any type listed are strictly prohibited for use with this device.

Immediately following the above notice, the manufacturer shall provide a list of all antenna types which can be used with the transmitter, indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna type.

#### 4.2 Antenna Description

The antennas used by the EUT have nonstandard U.FL Connectors.

Antenna usage	Frequency Range (MHz)	Maximum Antenna Gain (dBi)
Wi-Fi/Bluetooth	2400-2500	2.0
Wi-Fi	4900-6000	2.5
3G/4G	850/900/1800/1900/2110	5.1

## 5 FCC §2.1091, §15.247(i) & ISED RSS-102 - RF Exposure

### 5.1 Applicable Standards

According to FCC §15.247(i) and §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

#### Limits for General Population/Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm <sup>2</sup> )	Averaging Time (minutes)
Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	* (100)	30
1.34-30	824/f	2.19/f	* (180/f <sup>2</sup> )	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

f = frequency in MHz

\* = Plane-wave equivalent power density

According to ISED RSS-102 Issue 5:

### 2.5.2 Exemption Limits for Routine Evaluation – RF Exposure Evaluation

RF exposure evaluation is required if the separation distance between the user and/or bystander and the device's radiating element is greater than 20 cm, except when the device operates as follows:

- below 20 MHz<sup>6</sup> and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than 1 W (adjusted for tune-up tolerance);
- at or above 20 MHz and below 48 MHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than  $4.49/f^{0.5}$  W (adjusted for tune-up tolerance), where f is in MHz;
- at or above 48 MHz and below 300 MHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than 0.6 W (adjusted for tune-up tolerance);
- at or above 300 MHz and below 6 GHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than  $1.31 \times 10^{-2} f^{0.6834}$  W (adjusted for tune-up tolerance), where f is in MHz;
- at or above 6 GHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than 5 W (adjusted for tune-up tolerance).

In these cases, the information contained in the RF exposure technical brief may be limited to information that demonstrates how the e.i.r.p. was derived.

## 5.2 MPE Prediction

Predication of MPE limit at a given distance, Equation from OET Bulletin 65, Edition 97-01

$$S = PG/4\pi R^2$$

Where: S = power density

P = power input to antenna

G = power gain of the antenna in the direction of interest relative to an isotropic radiator

R = distance to the center of radiation of the antenna

## 5.3 MPE Results

### 2.4 GHz Wi-Fi

<u>Maximum output power at antenna input terminal (dBm):</u>	<u>11.68</u>
<u>Maximum output power at antenna input terminal (mW):</u>	<u>14.723</u>
<u>Prediction distance (cm):</u>	<u>20</u>
<u>Prediction frequency (MHz):</u>	<u>2412</u>
<u>Maximum Antenna Gain, typical (dBi):</u>	<u>2.0</u>
<u>Maximum Antenna Gain (numeric):</u>	<u>1.585</u>
<u>Power density of prediction frequency at 20.0 cm (mW/cm<sup>2</sup>):</u>	<u>0.004642</u>
<u>FCC MPE limit for uncontrolled exposure at prediction frequency (mW/cm<sup>2</sup>):</u>	<u>1.0</u>

The device is compliant with the requirement MPE limit for uncontrolled exposure. The maximum power density at the distance of 20 cm is 0.004642 mW/cm<sup>2</sup>. Limit is 1.0 mW/cm<sup>2</sup>.

### 2.4 GHz BLE

<u>Maximum peak output power at antenna input terminal (dBm):</u>	<u>-3.04</u>
<u>Maximum peak output power at antenna input terminal (mW):</u>	<u>0.497</u>
<u>Prediction distance (cm):</u>	<u>20</u>
<u>Prediction frequency (MHz):</u>	<u>2480</u>
<u>Maximum Antenna Gain, typical (dBi):</u>	<u>2.0</u>
<u>Maximum Antenna Gain (numeric):</u>	<u>1.585</u>
<u>Power density of prediction frequency at 20.0 cm (mW/cm<sup>2</sup>):</u>	<u>0.000157</u>
<u>FCC MPE limit for uncontrolled exposure at prediction frequency (mW/cm<sup>2</sup>):</u>	<u>1.0</u>

The device is compliant with the requirement MPE limit for uncontrolled exposure. The maximum power density at the distance of 20 cm is 0.000157 mW/cm<sup>2</sup>. Limit is 1.0 mW/cm<sup>2</sup>.

**3G/4G**

Pixieboard Version	Mode	Mobile Module	FCC ID	IC ID
<i>PixieBoard Core</i>	<i>SO-0G-3GG</i>	UMTS/HSPA+3G Module	XMR201510UC20	1022A-201510UC20
<i>PixieBoard DUO</i>	<i>DO-1G-3GG,</i>	UMTS/HSPA+3G Module	XMR201510UC20	1022A-201510UC20
<i>PixieBoard PRO</i>	<i>PO-2G-LTA</i>	LTE Module	XMR201605EC25A	10224A-201611EC25A
<i>PixieBoard PRO+</i>	<i>PP-4G-LTA</i>	LTE Module	XMR201605EC25A	10224A-201611EC25A

Mode	Frequency (MHz)	Target Power (dBm)	Target Power (mW)	Maximum Antenna Gain (dBi)	Numeric Antenna Gain	Evaluation Distance (cm)	Power density @20cm (mW/cm^2)	FCC MPE Limit (mW/cm^2)
WCDMA (Band V)	826.4-846.6	23.5	223.87	5.1	3.236	20	0.144122	0.551
WCDMA (Band II)	1852.4-1907.6	23.5	223.87	5.1	3.236	20	0.144122	1.0
WCDMA (Band IV)	1712.4-1752.6	23.5	223.87	5.1	3.236	20	0.144122	1.0
LTE (Band II)	1850.7-1909.3	24	251.19	5.1	3.236	20	0.161708	1.0
LTE (Band IV)	1710.7-1754.3	24	251.19	5.1	3.236	20	0.161708	1.0
LTE (Band XII)	699.7-715.3	24	251.19	5.1	3.236	20	0.161708	0.466

Note: Worst Case module was evaluated for 3G/4G.

**2.4 GHz Classic Bluetooth**

Maximum peak output power at antenna input terminal (dBm): 1.47  
Maximum peak output power at antenna input terminal (mW): 1.403  
Prediction distance (cm): 20  
Prediction frequency (MHz): 2480  
Maximum Antenna Gain, typical (dBi): 2.0  
Maximum Antenna Gain (numeric): 1.585  
Power density of prediction frequency at 20.0 cm (mW/cm<sup>2</sup>): 0.000442  
FCC MPE limit for uncontrolled exposure at prediction frequency (mW/cm<sup>2</sup>): 1.0

The device is compliant with the requirement MPE limit for uncontrolled exposure. The maximum power density at the distance of 20 cm is 0.000442 mW/cm<sup>2</sup>. Limit is 1.0 mW/cm<sup>2</sup>.

**5 GHz Wi-Fi**

<u>Maximum output power at antenna input terminal (dBm):</u>	<u>14.40</u>
<u>Maximum output power at antenna input terminal (mW):</u>	<u>27.542</u>
<u>Prediction distance (cm):</u>	<u>20</u>
<u>Prediction frequency (MHz):</u>	<u>5745</u>
<u>Maximum Antenna Gain, typical (dBi):</u>	<u>2.5</u>
<u>Maximum Antenna Gain (numeric):</u>	<u>1.778</u>
<u>Power density of prediction frequency at 20.0 cm (mW/cm<sup>2</sup>):</u>	<u>0.009744</u>
<u>FCC MPE limit for uncontrolled exposure at prediction frequency (mW/cm<sup>2</sup>):</u>	<u>1.0</u>

The device is compliant with the requirement MPE limit for uncontrolled exposure. The maximum power density at the distance of 20 cm is 0.00974 mW/cm<sup>2</sup>. Limit is 1.0 mW/cm<sup>2</sup>.

**Worst case colocation 2.4 GHz Wi-Fi, 3G/4G, 2.4 GHz Classic Bluetooth, and 5 GHz Wi-Fi.**

Frequency Band	Max Conducted Power(dBm)	Evaluated Distance (cm)	Worst-Case MPE (mW/cm <sup>2</sup> )	MPE Limit (mW/cm <sup>2</sup> )	Worst-Case MPE Ratios	Sum of MPE Ratios	Limit
<b>Worst Case</b>							
2.4 GHz WiFi	11.68	20	0.004642	1.0	0.464 %		
2.4 GHz Classic Bluetooth	1.47	20	0.000442	1.0	0.044 %	35.21 %	100%
LTE (Band XII)	24	20	0.161708	0.466	34.701 %		

Frequency Band	Max Conducted Power(dBm)	Evaluated Distance (cm)	Worst-Case MPE (mW/cm <sup>2</sup> )	MPE Limit (mW/cm <sup>2</sup> )	Worst-Case MPE Ratios	Sum of MPE Ratios	Limit
<b>Worst Case</b>							
2.4 GHz Classic Bluetooth	1.47	20	0.000442	1.0	0.044 %		
5 GHz WiFi	14.40	20	0.009744	1.0	0.974 %	35.72 %	100%
LTE (Band XII)	24	20	0.161708	0.466	34.701 %		

Note: Worst Case module was evaluated for 3G/4G.

**5.4 RF exposure evaluation exemption for IC****2.4 GHz Classic Bluetooth**

$$1.47 + 2.0 \text{ dBi} = 3.47 \text{ dBm} < 1.31 \times 10^{-2} f^{0.6834} = 2.736 \text{ W} = 34.370 \text{ dBm}$$

Therefore the RF exposure is not required.

## 6 FCC §15.207 & ISEDC RSS-Gen §8.8 - AC Line Conducted Emissions

### 6.1 Applicable Standards

As per FCC §15.207 and ISEDC RSS-Gen §8.8 Conducted limits:

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequencies ranges.

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15-0.5	66 to 56 <sup>Note 1</sup>	56 to 46 <sup>Note 2</sup>
0.5-5	56	46
5-30	60	50

*Note 1: Decreases with the logarithm of the frequency.*

*Note 2: A linear average detector is required*

### 6.2 Test Setup

The measurement was performed at shield room, using the setup per ANSI C63.10-2013 measurement procedure. The specification used was FCC §15.207 and ISEDC RSS-Gen §8.8 limits.

External I/O cables were draped along the edge of the test table and bundle when necessary.

The AC/DC power adapter of the EUT was connected with LISN-1 which provided 120 V / 60 Hz AC power.

### 6.3 Test Procedure

During the conducted emissions test, the power cord of the EUT host system was connected to the mains outlet of the LISN-1 and the power cords of support equipment were connected to LISN-2.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data were recorded in the peak detection mode, quasi-peak, and average detection mode. Quasi-Peak readings are distinguished with a “QP.” Average readings are distinguished with an “Ave”.

## 6.4 Corrected Amplitude and Margin Calculation

The Corrected Amplitude (CA) is calculated by adding the Cable Loss (CL), the Attenuator Factor (Atten) to indicated Amplitude (Ai) reading. The basic equation is as follows:

$$CA = Ai + CL + Atten$$

For example, a corrected amplitude of 46.2 dBuV = Indicated Reading (32.5 dBuV) + Cable Loss (3.7 dB) + Attenuator (10 dB)

The “Margin” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of -7 dB means the emission is 7 dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corrected Amplitude} - \text{Limit}$$

## 6.5 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
Rohde and Schwarz	Receiver, EMI Test	ESCI 1166.5950K03	100338	2016-06-23	2 years
Rohde and Schwarz	Impulse Limiter	ESH3-Z2	101963	2018-02-07	1 year
Keysight Technologies	RF Limiter	11867A	MY42242932	2018-01-15	1 year
Solar Electronics Company	High Pass Filter	Type 7930-100	7930150202	2018-02-27	1 year
Suirong	30 ft conductive emission cable	LMR 400	-	N/R	N/A
FCC	LISN	FCC-LISN-50-25-2-10-CISPR16	160129	2017-04-24	1 year
Vasona	Test software	V6.0 build 11	10400213	N/R	N/R

**Statement of Traceability:** BACL Corp. attests that all of the calibrations on the equipment items listed above were traceable to NIST or to another internationally recognized National Metrology Institute (NMI), and were compliant with A2LA Policy P102 (dated 9 June 2016) “A2LA Policy on Metrological Traceability”.

## 6.6 Test Environmental Conditions

<b>Temperature:</b>	23° C
<b>Relative Humidity:</b>	42 %
<b>ATM Pressure:</b>	101.31 kPa

The testing was performed by Vincent Licata on 2018-04-12 in 5 chamber 3.

## 6.7 Summary of Test Results

According to the recorded data in following table, the EUT complied with the FCC 15C and ISEDC RSS-Gen standard's conducted emissions limits, with the margin reading of:


Connection: AC/DC adapter connected to 120 V/60 Hz, AC			
Margin (dB)	Frequency (MHz)	Conductor Mode (Line/Neutral)	Range (MHz)
-17.84	0.150141	Line	0.15-30

## 6.1 Conducted Emissions Test Plots and Data

### PP-4G-LTA

2.4 GHz Wi-Fi, b mode (2412 MHz), BT (2480 MHz), WCDMA (1888.4 MHz)


#### 120 V, 60 Hz – Line

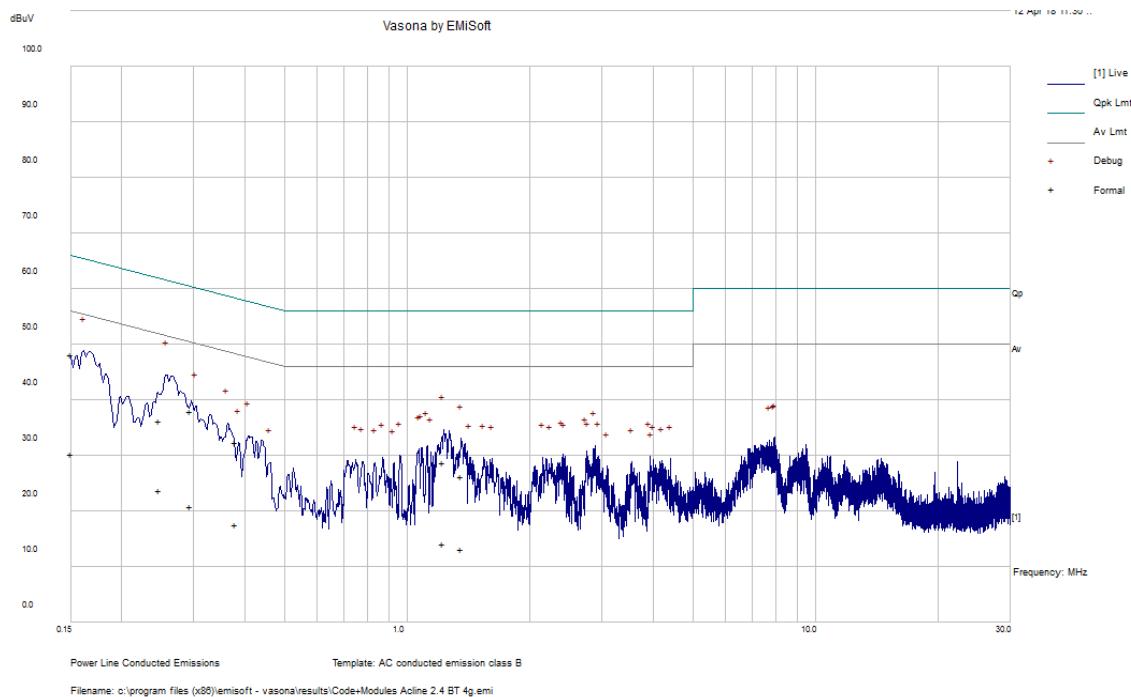

Frequency (MHz)	Corrected Amplitude (dBuV)	Conductor (Line/Neutral)	Limit (dBuV)	Margin (dB)	Detector (QP/Ave.)
0.150141	48.15	Line	65.99	-17.84	QP
0.247417	36.21	Line	61.84	-25.63	QP
1.225458	28.85	Line	56	-27.15	QP
0.294205	37.99	Line	60.4	-22.41	QP
0.378831	32.38	Line	58.31	-25.93	QP
1.35755	26.21	Line	56	-29.79	QP

Frequency (MHz)	Corrected Amplitude (dBuV)	Conductor (Line/Neutral)	Limit (dBuV)	Margin (dB)	Detector (QP/Ave.)
0.150141	30.37	Line	55.99	-25.62	Ave.
0.247417	23.71	Line	51.84	-28.14	Ave.
1.225458	14.26	Line	46	-31.74	Ave.
0.294205	20.95	Line	50.4	-29.45	Ave.
0.378831	17.7	Line	48.31	-30.6	Ave.
1.35755	13.15	Line	46	-32.85	Ave.

## 120 V, 60 Hz – Neutral

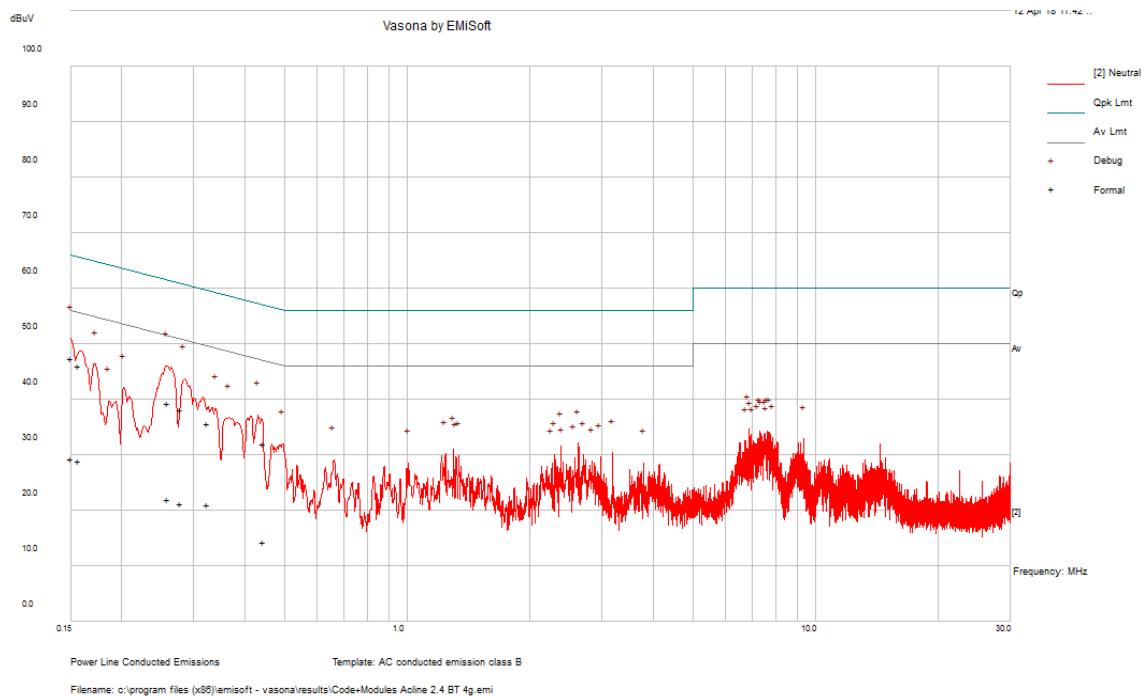


Frequency (MHz)	Corrected Amplitude (dBuV)	Conductor (Line/Neutral)	Limit (dBuV)	Margin (dB)	Detector (QP/Ave.)
0.150318	47.5	Neutral	65.98	-18.49	QP
0.258685	39.27	Neutral	61.47	-22.2	QP
0.27951	38.17	Neutral	60.83	-22.66	QP
0.15696	46.14	Neutral	65.62	-19.48	QP
0.443985	32.11	Neutral	56.99	-24.88	QP
0.325323	35.76	Neutral	59.57	-23.81	QP

Frequency (MHz)	Corrected Amplitude (dBuV)	Conductor (Line/Neutral)	Limit (dBuV)	Margin (dB)	Detector (QP/Ave.)
0.150318	29.36	Neutral	55.98	-26.62	Ave.
0.258685	22.13	Neutral	51.47	-29.35	Ave.
0.27951	21.33	Neutral	50.83	-29.5	Ave.
0.15696	28.96	Neutral	55.62	-26.66	Ave.
0.443985	14.45	Neutral	46.99	-32.53	Ave.
0.325323	21.19	Neutral	49.57	-28.38	Ave.

## DO-1G-3GG

2.4 GHz Wi-Fi, b mode (2412 MHz), BT (2480 MHz), WCDMA (1888.4 MHz)


120 V, 60 Hz – Line

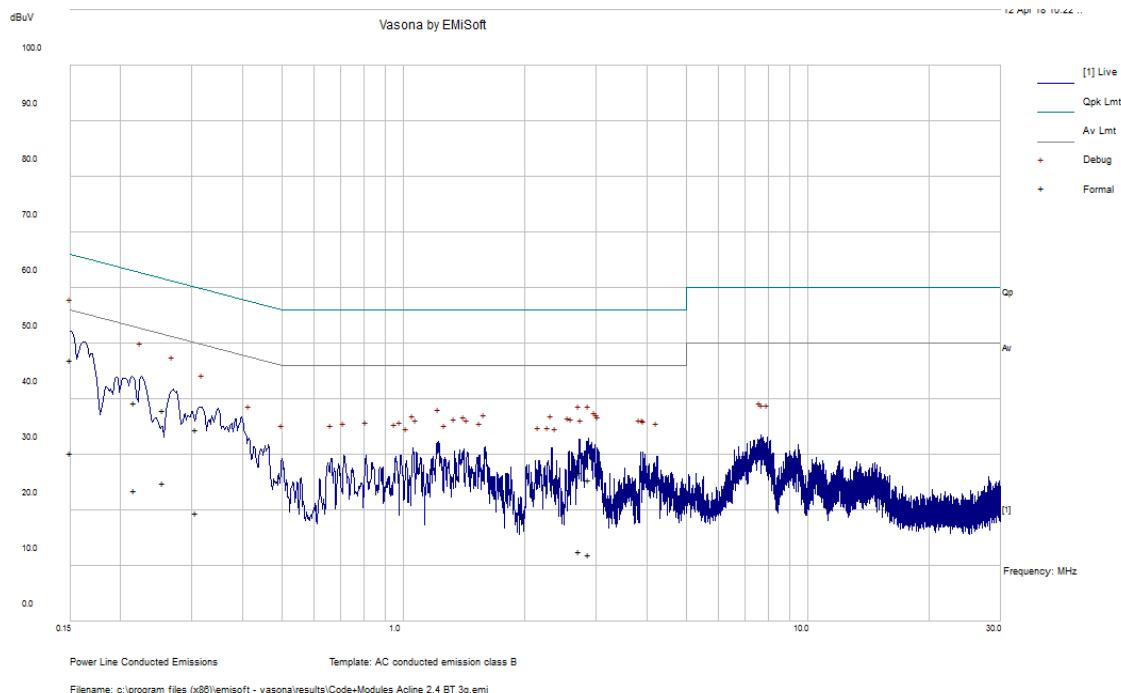

Frequency (MHz)	Corrected Amplitude (dBuV)	Conductor (Line/Neutral)	Limit (dBuV)	Margin (dB)	Detector (QP/Ave.)
0.150196	47.13	Line	65.99	-18.86	QP
0.215674	39.3	Line	62.98	-23.68	QP
0.25474	38.1	Line	61.6	-23.51	QP
0.306663	34.47	Line	60.06	-25.6	QP
2.874609	25.48	Line	56	-30.52	QP
2.729167	26.83	Line	56	-29.17	QP

Frequency (MHz)	Corrected Amplitude (dBuV)	Conductor (Line/Neutral)	Limit (dBuV)	Margin (dB)	Detector (QP/Ave.)
0.150196	30.37	Line	55.99	-25.62	Ave.
0.215674	23.59	Line	52.98	-29.39	Ave.
0.25474	25.03	Line	51.6	-26.57	Ave.
0.306663	19.56	Line	50.06	-30.5	Ave.
2.874609	11.98	Line	46	-34.02	Ave.
2.729167	12.73	Line	46	-33.27	Ave.

## 120 V, 60 Hz – Neutral

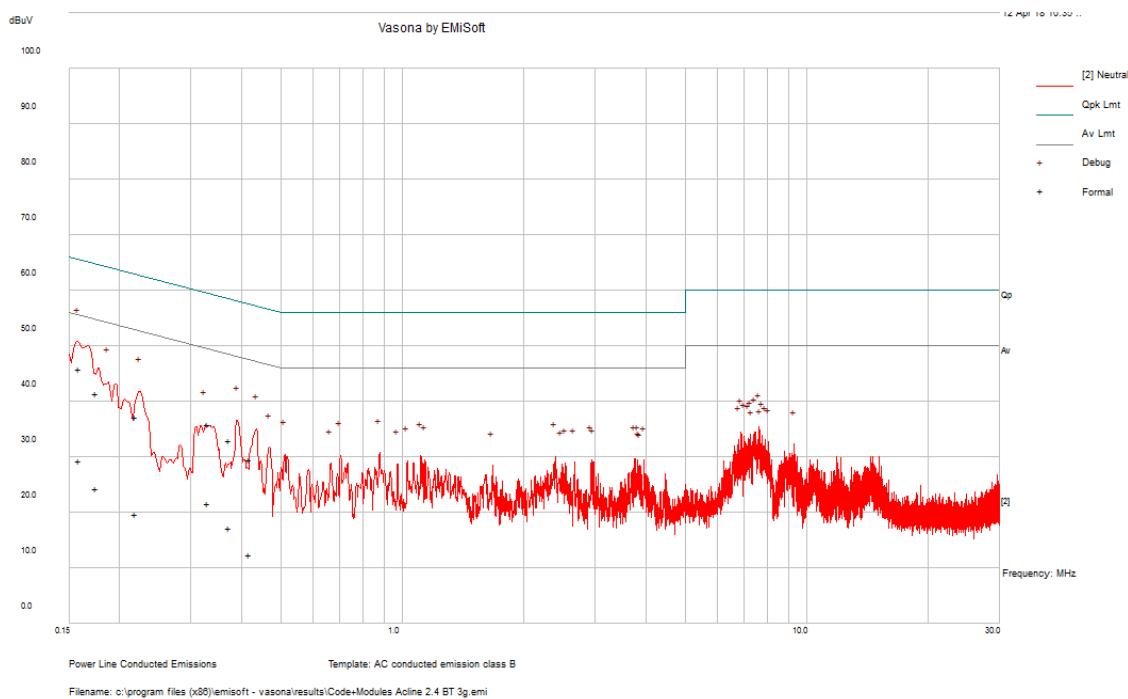

Frequency (MHz)	Corrected Amplitude (dBuV)	Conductor (Line/Neutral)	Limit (dBuV)	Margin (dB)	Detector (QP/Ave.)
0.158272	45.98	Neutral	65.55	-19.58	QP
0.174584	41.54	Neutral	64.74	-23.2	QP
0.219166	37.17	Neutral	62.85	-25.68	QP
0.372704	32.92	Neutral	58.44	-25.52	QP
0.419114	29.52	Neutral	57.47	-27.95	QP
0.329875	35.96	Neutral	59.45	-23.5	QP

Frequency (MHz)	Corrected Amplitude (dBuV)	Conductor (Line/Neutral)	Limit (dBuV)	Margin (dB)	Detector (QP/Ave.)
0.158272	29.42	Neutral	55.55	-26.13	Ave.
0.174584	24.37	Neutral	54.74	-30.37	Ave.
0.219166	19.75	Neutral	52.85	-33.1	Ave.
0.372704	17.25	Neutral	48.44	-31.19	Ave.
0.419114	12.44	Neutral	47.47	-35.03	Ave.
0.329875	21.61	Neutral	49.45	-27.84	Ave.

## 7 FCC §15.209, §15.247(d) & ISEDC RSS-247 §5.5, RSS-Gen §8.9, §8.10 - Spurious Radiated Emissions

### 7.1 Applicable Standards

As per FCC §15.35(d): Unless otherwise specified, on any frequency or frequencies above 1000 MHz, the radiated emission limits are based on the use of measurement instrumentation employing an average detector function. Unless otherwise specified, measurements above 1000 MHz shall be performed using a minimum resolution bandwidth of 1 MHz.

As Per FCC §15.205(a) and RSS-Gen except as show in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 – 0.110	16.42 – 16.423	960 – 1240	4.5 – 5.15
0.495 – 0.505	16.69475 – 16.69525	1300 – 1427	5.35 – 5.46
2.1735 – 2.1905	25.5 – 25.67	1435 – 1626.5	7.25 – 7.75
4.125 – 4.128	37.5 – 38.25	1645.5 – 1646.5	8.025 – 8.5
4.17725 – 4.17775	73 – 74.6	1660 – 1710	9.0 – 9.2
4.20725 – 4.20775	74.8 – 75.2	1718.8 – 1722.2	9.3 – 9.5
6.215 – 6.218	108 – 121.94	2200 – 2300	10.6 – 12.7
6.26775 – 6.26825	123 – 138	2310 – 2390	13.25 – 13.4
6.31175 – 6.31225	149.9 – 150.05	2483.5 – 2500	14.47 – 14.5
8.291 – 8.294	156.52475 – 156.52525	2690 – 2900	15.35 – 16.2
8.362 – 8.366	156.7 – 156.9	3260 – 3267	17.7 – 21.4
8.37625 – 8.38675	162.0125 – 167.17	3.332 – 3.339	22.01 – 23.12
8.41425 – 8.41475	167.72 – 173.2	3.3458 – 3.358	23.6 – 24.0
12.29 – 12.293	240 – 285	3.600 – 4.400	31.2 – 31.8
12.51975 – 12.52025	322 – 335.4		36.43 – 36.5
12.57675 – 12.57725	399.9 – 410		Above 38.6
13.36 – 13.41	608 – 614		

ISED RSS-Gen §8.10 Restricted Frequency Bands

MHz	MHz	MHz	GHz
0.090 - 0.110	12.36 - 13.41	608 - 614	
2.135 - 2.1905	16.42-16.432	960 - 1427	
3.020 - 3.026	6.42-16.432	1435 - 1626.5	9.0 - 9.2
4.125 - 4.128	16.69475 - 16.69525	1660 - 1710	9.3 - 9.5
4.17725 - 4.17775	16.80425 - 12.80475	1718.8-1722.22	10.6 - 12.7
4.20725 - 4.20775	25.5 - 25.67	2200 - 2300	13.25 - 13.4
5.677 - 5.683	37 - 38.25	2310 - 2390	14.47 - 14.5
6.215 - 6.218	73 - 74.6	2655 - 2900	15.36 - 16.2
6.26775 - 6.26825	74-75.2	3260 - 3267	17.7 - 21.4
6.31175 - 6.31225	108 - 138	3332 - 3339	22.01 -23.12
8.291 - 8.294	156.52475 - 156.52525	3345.8 - 3358	23.6 - 24.0
8.362 - 8.366	156.7 - 156.9	3500 - 4400	31.2 - 36.5
8.37625 - 8.38675	240 - 285	4500 - 5150	Above 38.6
8.41425 - 8.41475	322 - 335.4	5350 - 5460	
12.29 - 12.293	399.9 - 410	7250 - 7750	
12.57675 - 12.57725		8025 -8500	

As per FCC §15.209(a): Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (micro volts/meter)	Measurement Distance (meters)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100**	3
88 - 216	150**	3
216 - 960	200**	3
Above 960	500	3

\*\* Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

As per FCC §15.247 (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

As per ISED RSS-Gen 8.9,

Except when the requirements applicable to a given device state otherwise, emission from licence-exempt transmitters shall comply with the field strength limits shown in the table below. Additional, the level of any transmitter emission shall not exceed the level of the transmitter's fundamental emission.

#### General Field Strength Limits for Licence-Exemption Transmitters at Frequencies above 30 Mhz

Frequency (MHz)	Field Strength (μv/m at 3 meters)
30-88	100
88-216	150
216-960	200
Above 960*	500

\* Unless otherwise specified, for all frequencies greater than 1 GHz, the radiated emission limits for licence-exempt radio apparatus stated in applicable RSSs (including RSS-Gen) are based on measurements using a linear average detector function having a minimum resolution bandwidth of 1 MHz. If an average limit is specified for the EUT, then the peak emission shall also be measured with instrumentation properly adjusted for such factors as pulse desensitization to ensure the peak emission is less than 20 dB above the average limit.

Note: Transmitting devices are not permitted in restricted frequency bands unless stated otherwise in the specific RSS.

As per ISED RSS-247 §5.5, in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under Section 5.4(4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

## 7.2 Test Setup

The radiated emissions tests were performed in the 5-meter Chamber, using the setup in accordance with ANSI C63.10-2013. The specification used was the FCC 15 Subpart C and ISED RSS-247 limits.

The spacing between the peripherals was 10 centimeters.

External I/O cables were draped along the edge of the test table and bundle when necessary.

## 7.3 Test Procedure

For the radiated emissions test, the EUT host, and all support equipment power cords was connected to the AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

The EUT was set 3 meter away from the testing antenna, which was varied from 1-4 meter, and the EUT was placed on a turntable, which was 0.8 meter and 1.5 meter above the ground plane for below and above 1000 MHz measurements, the table shall be rotated for 360 degrees to find out the highest emission. The receiving antenna should be changed the polarization both of horizontal and vertical.

The spectrum analyzer or receiver is set as:

Below 1000 MHz:

$$\text{RBW} = 100 \text{ kHz} / \text{VBW} = 300 \text{ kHz} / \text{Sweep} = \text{Auto}$$

Above 1000 MHz:

- (1) Peak:  $\text{RBW} = 1 \text{ MHz} / \text{VBW} = 1 \text{ MHz} / \text{Sweep} = 100 \text{ ms}$
- (2) Average:  $\text{RBW} = 1 / T / \text{Sweep} = \text{Auto}$

## 7.4 Corrected Amplitude and Margin Calculation

The Corrected Amplitude (CA) is calculated by adding the Antenna Factor (AF), the Cable Loss (CL), the Attenuator Factor (Atten) and subtracting the Amplifier Gain (Ga) to indicated Amplitude (Ai) reading. The basic equation is as follows:

$$\text{CA} = \text{Ai} + \text{AF} + \text{CL} + \text{Atten} - \text{Ga}$$

For example, a corrected amplitude of 40.3 dBuV/m = Indicated Reading (32.5 dBuV) + Antenna Factor (+23.5dB) + Cable Loss (3.7 dB) + Attenuator (10 dB) - Amplifier Gain (29.4 dB)

The “Margin” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of -7 dB means the emission is 7 dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corrected Amplitude} - \text{Limit}$$

## 7.5 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
Rohde and Schwarz	Receiver, EMI Test	ESCI 1166.5950K03	100044	2017-09-19	2 years
Agilent	Analyzer, Spectrum	E4446A	US44300386	2017-04-20	1 year
Rohde & Schwarz	Analyzer, Spectrum	FSQ26	200749	2017-06-08	2 years
Sunol Sciences	System Controller	SC99V	011003-1	N/R	N/A
Sunol Sciences	Antenna, Biconi-Log	JB1	A013105-3	2018-02-26	2 years
Wisewave	Antenna, Horn	ARH-4223-02	10555-02	2017-12-15	2 years
Agilent	Amplifier, Pre	8447D	2944A10187	2018-04-02	1 year
IW	AOBOR Hi frequency Co AX Cable	DC 1531	KPS-1501A3960KPS	2017-08-05	1 year
-	SMA cable	-	C00011	Each time <sup>1</sup>	N/A
-	N-Type Cable	-	C00012	Each time <sup>1</sup>	N/A
-	N-Type Cable	-	C00014	Each time <sup>1</sup>	N/A
HP	Pre-Amplifier	8449B	3147A00400	2018-02-02	1 year
Sunol Sciences	Antenna, Horn	DRH-118	A052704	2017-03-27	2 years
Vasona	Test software	V6.0 build 11	10400213	N/R	N/R

Note<sup>1</sup>: cable and attenuator included in the test set-up will be checked each time before testing.

**Statement of Traceability:** BACL Corp. attests that all of the calibrations on the equipment items listed above were traceable to NIST or to another internationally recognized National Metrology Institute (NMI), and were compliant with A2LA Policy P102 (dated 9 June 2016) "A2LA Policy on Metrological Traceability".

## 7.6 Test Environmental Conditions

<b>Temperature:</b>	22-24 °C
<b>Relative Humidity:</b>	40-41 %
<b>ATM Pressure:</b>	103.1-104.1 kPa

The testing was performed by Chin Ming Lui and Vincent Licata 2018-04-03 to 2018-04-12 in 5m chamber 3.

## 7.7 Summary of Test Results

According to the data hereinafter, the EUT complied with FCC Title 47, Part 15C and ISEDC RSS-247 standard's radiated emissions limits, and had the worst margin of:

<b>Mode: Transmitting</b>			
<b>Margin (dB)</b>	<b>Frequency (MHz)</b>	<b>Polarization (Horizontal/Vertical)</b>	<b>Mode, Channel</b>
-0.35	198.82	Horizontal	DO-1G-3GG Colocation


Please refer to the following table and plots for specific test result details.

## 7.8 Radiated Emissions Test Result Data

### 30 MHz – 1 GHz Worst Case, Measured at 3 meters

#### PP-4G-LTA


#### 5.8 GHz Wi-Fi, ac20 mode (5745 MHz), BT (2480 MHz), WCDMA (1888.4 MHz)

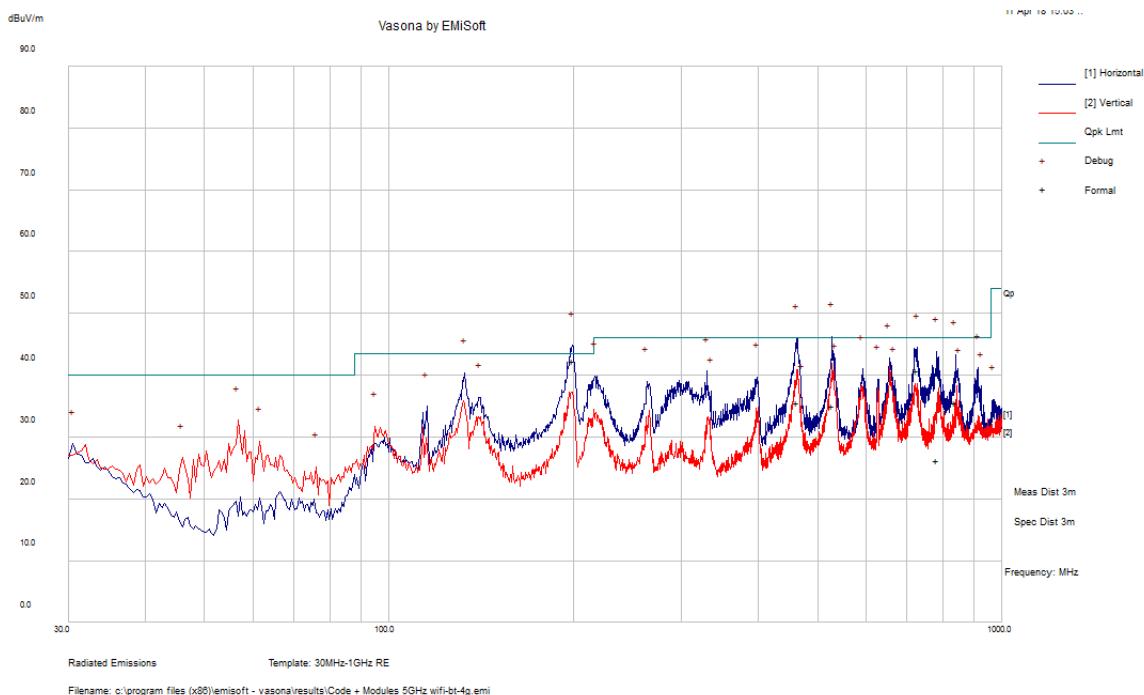

Frequency (MHz)	Corrected Amplitude (dB $\mu$ V/m)	Antenna Height (cm)	Antenna Polarity (H/V)	Turntable Azimuth (degrees)	Limit (dB $\mu$ V/m)	Margin (dB)	Comment
199.0683	42.4	110	H	261	43.5	-1.1	QP
527.9333	35.06	276	H	321	46	-10.94	QP
462.2495	35.66	193	H	94	46	-10.34	QP
726.7858	40.85	121	H	359	46	-5.15	QP
782.3085	26.19	234	H	162	46	-19.81	QP
839.475	35.62	99	H	258	46	-10.38	QP

## DO-1G-3GG

5.8 GHz Wi-Fi, ac20 mode (5745 MHz), BT (2480 MHz), WCDMA (1888.4 MHz)

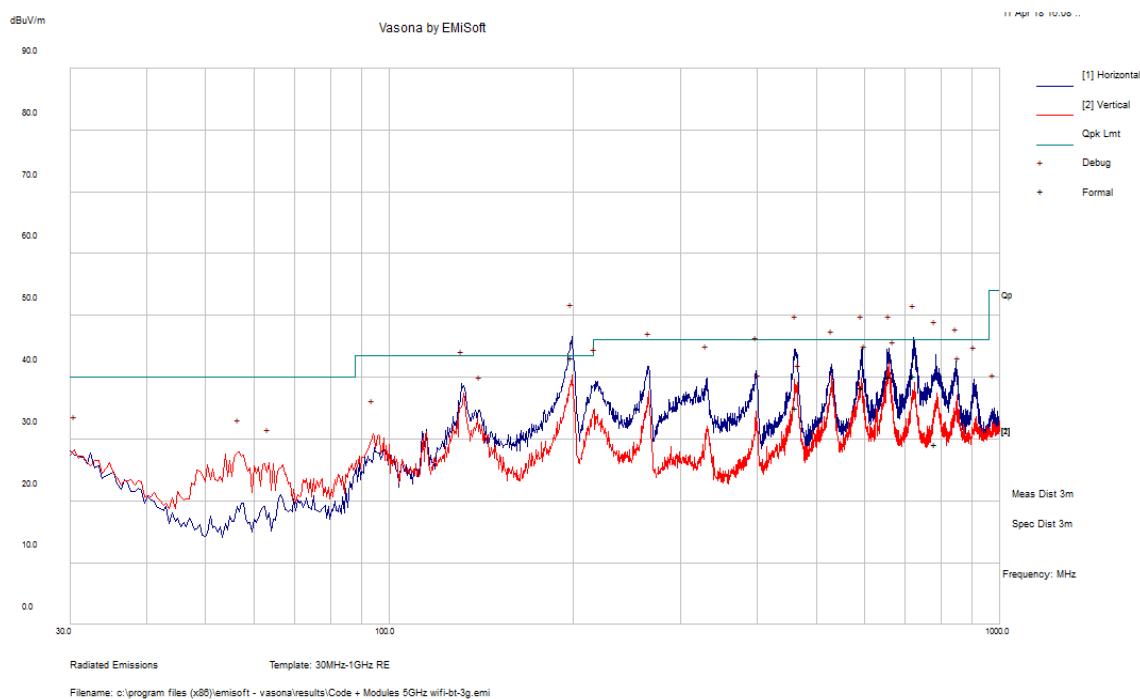

Frequency (MHz)	Corrected Amplitude (dB $\mu$ V/m)	Antenna Height (cm)	Antenna Polarity (H/V)	Turntable Azimuth (degrees)	Limit (dB $\mu$ V/m)	Margin (dB)	Comment
198.8198	43.15	150	H	193	43.5	-0.35	QP
721.8788	40.28	147	H	15	46	-5.72	QP
594.1688	38.42	136	H	342	46	-7.58	QP
657.855	40.11	145	H	152	46	-5.89	QP
462.9845	35.03	112	H	321	46	-10.97	QP
784.0788	29.22	194	H	148	46	-16.78	QP

## 2) 1-25 GHz Measured at 3 meters

GFSK mode



Frequency (MHz)	S.A. Reading (dB $\mu$ V)	Turntable Azimuth (degrees)	Test Antenna			Cable Loss (dB)	Pre-Amp. (dB)	Cord. Reading (dB $\mu$ V/m)	FCC/ISEDC		Comments
			Height (cm)	Polarity (H/V)	Factor (dB/m)				Limit (dB $\mu$ V/m)	Margin (dB)	
Low Channel 2402 MHz (power setting: 2)											
2402	60.92	49	196	H	28.93	5.76	0	95.61	-	-	PK
2402	60.05	49	196	H	28.93	5.76	0	94.74	-	-	AV
2402	57.52	200	298	V	28.93	5.76	0	92.21	-	-	PK
2402	56.54	200	298	V	28.93	5.76	0	91.23	-	-	AV
2390	55.20	50	230	H	28.93	6.524	32.207	58.45	74.00	-15.55	PK
2390	33.81	50	230	H	28.93	6.524	32.207	37.06	54.00	-16.94	AV
2390	53.04	190	300	V	28.93	6.524	32.207	56.29	74.00	-17.71	PK
2390	33.43	190	300	V	28.93	6.524	32.207	36.68	54.00	-17.32	AV
4804	45.85	0	100	H	32.56	9.36	32.993	54.78	74.00	-19.22	PK
4804	33.00	0	100	H	32.56	9.36	32.993	41.93	54.00	-12.07	AV
4804	46.79	0	100	V	32.56	9.36	32.993	55.72	74.00	-18.28	PK
4804	33.10	0	100	V	32.56	9.36	32.993	42.03	54.00	-11.97	AV
7206	46.05	0	100	H	36.88	12.01	33.248	61.69	74.00	-12.31	PK
7206	32.84	0	100	H	36.88	12.01	33.248	48.48	54.00	-5.52	AV
7206	46.77	0	100	V	36.88	12.01	33.248	62.41	74.00	-11.59	PK
7206	33.09	0	100	V	36.88	12.01	33.248	48.73	54.00	-5.27	AV
Middle Channel 2441 MHz (power setting: 2)											
2441	63.30	50	165	H	28.93	5.76	0	97.99	-	-	PK
2441	62.53	50	165	H	28.93	5.76	0	97.22	-	-	AV
2441	59.25	200	289	V	28.93	5.76	0	93.94	-	-	PK
2441	58.39	200	289	V	28.93	5.76	0	93.08	-	-	AV
4882	45.47	0	100	H	32.53	9.46	32.993	54.46	74.00	-19.54	PK
4882	32.57	0	100	H	32.53	9.46	32.993	41.56	54.00	-12.44	AV
4882	46.31	0	100	V	32.53	9.46	32.993	55.30	74.00	-18.70	PK
4882	32.73	0	100	V	32.53	9.46	32.993	41.72	54.00	-12.28	AV
High Channel 2480 MHz (power setting: 2)											
2480	61.56	45	142	H	29.19	5.86	0	96.61	-	-	PK
2480	60.91	45	142	H	29.19	5.86	0	95.96	-	-	AV
2480	58.44	189	282	V	29.19	5.86	0	93.49	-	-	PK
2480	57.57	189	282	V	29.19	5.86	0	92.62	-	-	AV
2483.5	62.17	200	150	H	29.18	6.62	32.413	65.55	74.00	-8.45	PK
2483.5	42.21	200	150	H	29.18	6.62	32.413	45.59	54.00	-8.41	AV
2483.5	57.92	215	112	V	29.18	6.62	32.413	61.30	74.00	-12.70	PK
2483.5	38.67	215	112	V	29.18	6.62	32.413	42.05	54.00	-11.95	AV
4960	44.28	0	100	H	32.70	9.42	32.993	53.40	74.00	-20.60	PK
4960	31.46	0	100	H	32.70	9.42	32.993	40.58	54.00	-13.42	AV
4960	44.64	0	100	V	32.70	9.42	32.993	53.76	74.00	-20.24	PK
4960	31.39	0	100	V	32.70	9.42	32.993	40.51	54.00	-13.49	AV

$\pi/4$ -DQPSK Mode



Frequency (MHz)	S.A. Reading (dB $\mu$ V)	Turntable Azimuth (degrees)	Test Antenna			Cable Loss (dB)	Pre-Amp. (dB)	Cord. Reading (dB $\mu$ V/m)	FCC/ISEDC		Comments
			Height (cm)	Polarity (H/V)	Factor (dB/m)				Limit (dB $\mu$ V/m)	Margin (dB)	
Low Channel 2402 MHz (power setting: 2)											
2402	63.15	52	197	H	28.93	5.76	0	97.84	-	-	PK
2402	61.07	52	197	H	28.93	5.76	0	95.76	-	-	AV
2402	60.39	180	300	V	28.93	5.76	0	95.08	-	-	PK
2402	58.42	180	300	V	28.93	5.76	0	93.11	-	-	AV
2390	53.49	200	240	H	28.93	6.524	32.207	56.74	74.00	-17.26	PK
2390	33.92	200	240	H	28.93	6.524	32.207	37.17	54.00	-16.83	AV
2390	51.64	180	300	V	28.93	6.524	32.207	54.89	74.00	-19.11	PK
2390	33.52	180	300	V	28.93	6.524	32.207	36.77	54.00	-17.23	AV
4804	46.37	0	100	H	32.56	9.36	32.993	55.30	74.00	-18.70	PK
4804	33.01	0	100	H	32.56	9.36	32.993	41.94	54.00	-12.06	AV
4804	46.65	0	100	V	32.56	9.36	32.993	55.58	74.00	-18.42	PK
4804	33.16	0	100	V	32.56	9.36	32.993	42.09	54.00	-11.91	AV
Middle Channel 2441 MHz (power setting: 2)											
2441	64.42	46	155	H	28.93	5.76	0	99.11	-	-	PK
2441	62.45	46	155	H	28.93	5.76	0	97.14	-	-	AV
2441	61.49	196	288	V	28.93	5.76	0	96.18	-	-	PK
2441	59.27	196	288	V	28.93	5.76	0	93.96	-	-	AV
4882	46.25	0	100	H	32.53	9.46	32.993	55.24	74.00	-18.76	PK
4882	32.70	0	100	H	32.53	9.46	32.993	41.69	54.00	-12.31	AV
4882	45.95	0	100	V	32.53	9.46	32.993	54.94	74.00	-19.06	PK
4882	32.62	0	100	V	32.53	9.46	32.993	41.61	54.00	-12.39	AV
High Channel 2480 MHz (power setting: 2)											
2480	64.82	38	185	H	29.19	5.86	0	99.87	-	-	PK
2480	62.98	38	185	H	29.19	5.86	0	98.03	-	-	AV
2480	60.56	188	284	V	29.19	5.86	0	95.61	-	-	PK
2480	58.60	188	284	V	29.19	5.86	0	93.65	-	-	AV
2483.5	61.92	35	190	H	29.18	6.62	32.413	65.30	74.00	-8.70	PK
2483.5	49.57	35	190	H	29.18	6.62	32.413	52.95	54.00	-1.05	AV
2483.5	59.07	200	300	V	29.18	6.62	32.413	62.45	74.00	-11.55	PK
2483.5	45.18	200	300	V	29.18	6.62	32.413	48.56	54.00	-5.44	AV
4960	44.14	0	100	H	32.70	9.42	32.993	53.26	74.00	-20.74	PK
4960	31.40	0	100	H	32.70	9.42	32.993	40.52	54.00	-13.48	AV
4960	44.56	0	100	V	32.70	9.42	32.993	53.68	74.00	-20.32	PK
4960	31.41	0	100	V	32.70	9.42	32.993	40.53	54.00	-13.47	AV



## 8DPSK mode



Frequency (MHz)	S.A. Reading (dB $\mu$ V)	Turntable Azimuth (degrees)	Test Antenna			Cable Loss (dB)	Pre-Amp. (dB)	Cord. Reading (dB $\mu$ V/m)	FCC/ISEDC		Comments
			Height (cm)	Polarity (H/V)	Factor (dB/m)				Limit (dB $\mu$ V/m)	Margin (dB)	
Low Channel 2402 MHz (power setting: 2)											
2402	63.05	50	194	H	28.93	5.76	0	97.74	-	-	PK
2402	61.01	50	194	H	28.93	5.76	0	95.70	-	-	AV
2402	60.39	177	300	V	28.93	5.76	0	95.08	-	-	PK
2402	58.33	177	300	V	28.93	5.76	0	93.02	-	-	AV
2390	49.73	65	300	H	28.93	6.524	32.207	52.98	74.00	-21.02	PK
2390	33.38	65	300	H	28.93	6.524	32.207	36.63	54.00	-17.37	AV
2390	48.28	215	100	V	28.93	6.524	32.207	51.53	74.00	-22.47	PK
2390	33.36	215	100	V	28.93	6.524	32.207	36.61	54.00	-17.39	AV
4804	46.33	0	100	H	32.56	9.36	32.993	55.26	74.00	-18.74	PK
4804	32.89	0	100	H	32.56	9.36	32.993	41.82	54.00	-12.18	AV
4804	46.79	0	100	V	32.56	9.36	32.993	55.72	74.00	-18.28	PK
4804	32.80	0	100	V	32.56	9.36	32.993	41.73	54.00	-12.27	AV
Middle Channel 2441 MHz (power setting: 2)											
2441	64.38	50	163	H	28.93	5.76	0	99.07	-	-	PK
2441	62.50	50	163	H	28.93	5.76	0	97.19	-	-	AV
2441	61.79	199	290	V	28.93	5.76	0	96.48	-	-	PK
2441	59.72	199	290	V	28.93	5.76	0	94.41	-	-	AV
4882	45.65	0	100	H	32.53	9.46	32.993	54.64	74.00	-19.36	PK
4882	32.60	0	100	H	32.53	9.46	32.993	41.59	54.00	-12.41	AV
4882	45.87	0	100	V	32.53	9.46	32.993	54.86	74.00	-19.14	PK
4882	32.75	0	100	V	32.53	9.46	32.993	41.74	54.00	-12.26	AV
High Channel 2480 MHz (power setting: 2)											
2480	63.82	44	143	H	29.19	5.86	0	98.87	-	-	PK
2480	61.93	44	143	H	29.19	5.86	0	96.98	-	-	AV
2480	60.80	189	281	V	29.19	5.86	0	95.85	-	-	PK
2480	58.77	189	281	V	29.19	5.86	0	93.82	-	-	AV
2483.5	60.37	209	114	H	29.18	6.62	32.413	63.75	74.00	-10.25	PK
2483.5	45.45	209	114	H	29.18	6.62	32.413	48.83	54.00	-5.17	AV
2483.5	58.61	210	274	V	29.18	6.62	32.413	61.99	74.00	-12.01	PK
2483.5	44.08	210	274	V	29.18	6.62	32.413	47.46	54.00	-6.54	AV
4960	44.30	0	100	H	32.70	9.42	32.993	53.42	74.00	-20.58	PK
4960	31.36	0	100	H	32.70	9.42	32.993	40.48	54.00	-13.52	AV
4960	44.56	0	100	V	32.70	9.42	32.993	53.68	74.00	-20.32	PK
4960	31.32	0	100	V	32.70	9.42	32.993	40.44	54.00	-13.56	AV

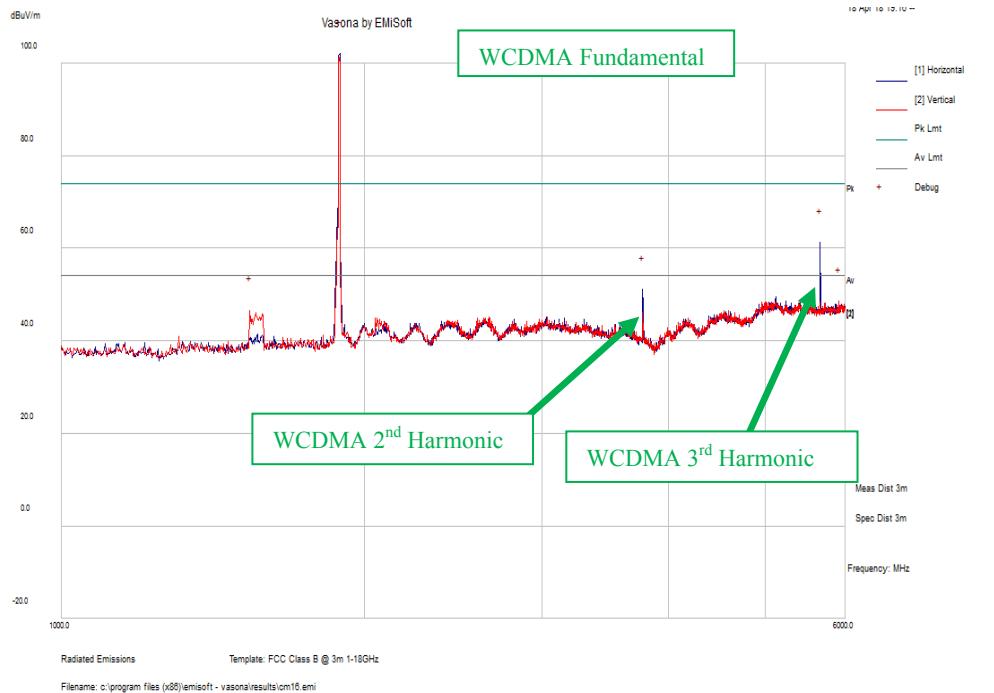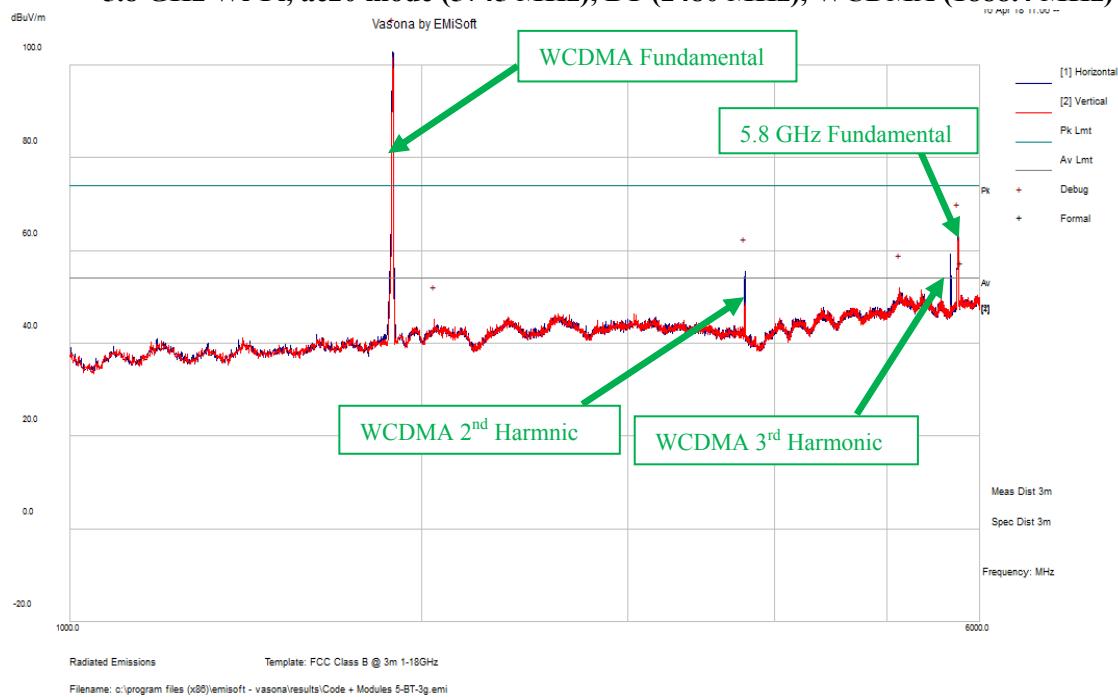**1-6 GHz****PP-4G-LTA****5.8 GHz Wi-Fi, ac20 mode (5745 MHz), BT (2480 MHz), WCDMA (1888.4 MHz)****DO-1G-3GG****5.8 GHz Wi-Fi, ac20 mode (5745 MHz), BT (2480 MHz), WCDMA (1888.4 MHz)**

Note: After verification, the 2<sup>nd</sup> and 3<sup>rd</sup> Harmonics from the WCDMA signal was not due to colocation so therefore were not evaluated.

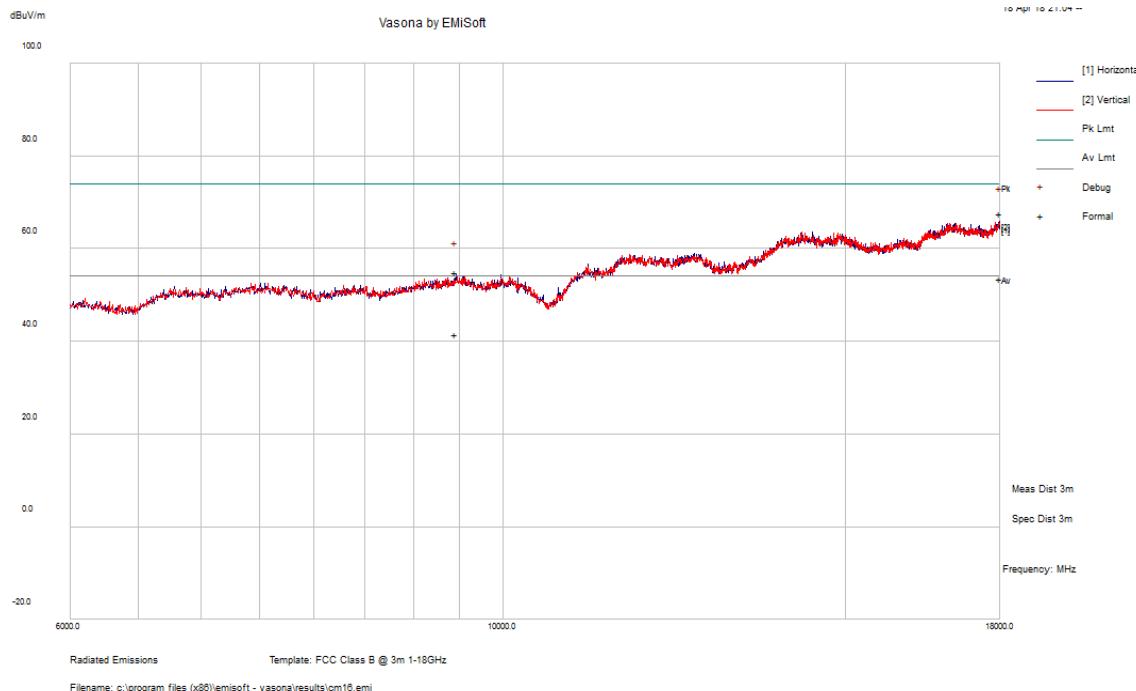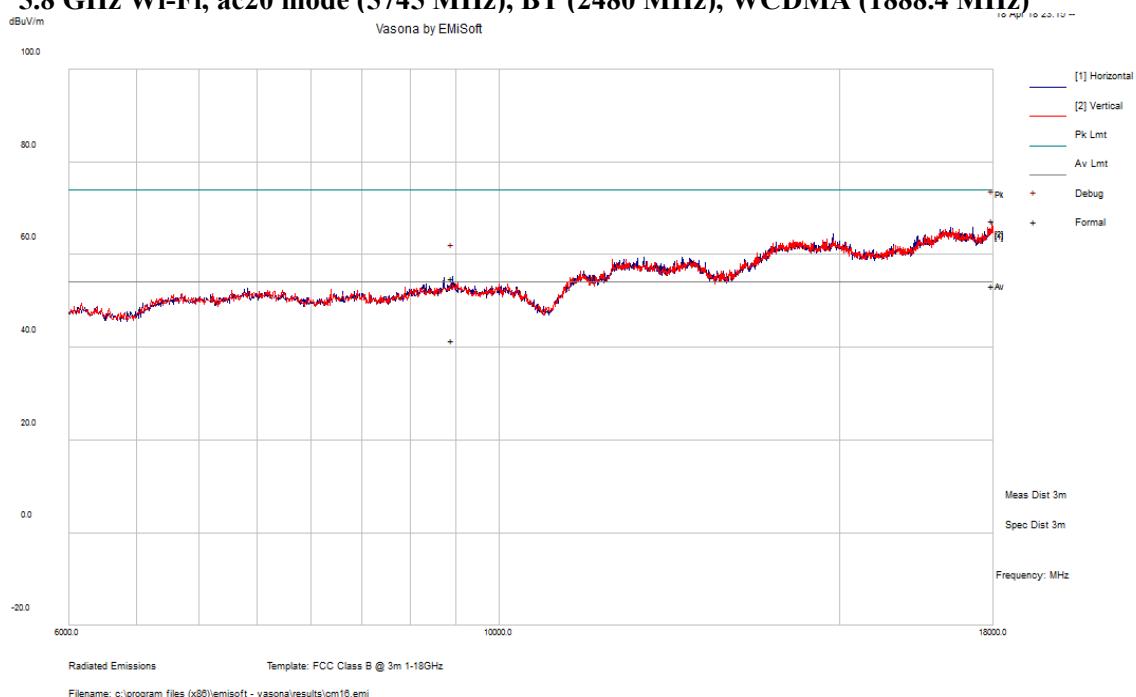**6-18 GHz****PP-4G-LTA****5.8 GHz Wi-Fi, ac20 mode (5745 MHz), BT (2480 MHz), WCDMA (1888.4 MHz)****DO-1G-3GG****5.8 GHz Wi-Fi, ac20 mode (5745 MHz), BT (2480 MHz), WCDMA (1888.4 MHz)**

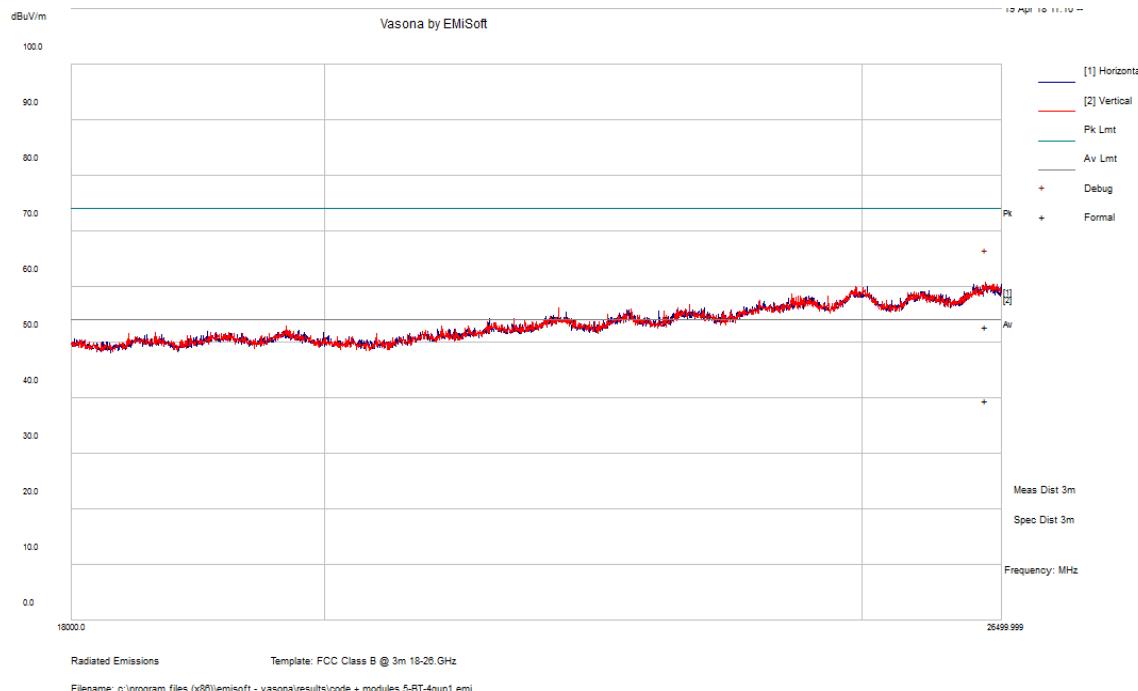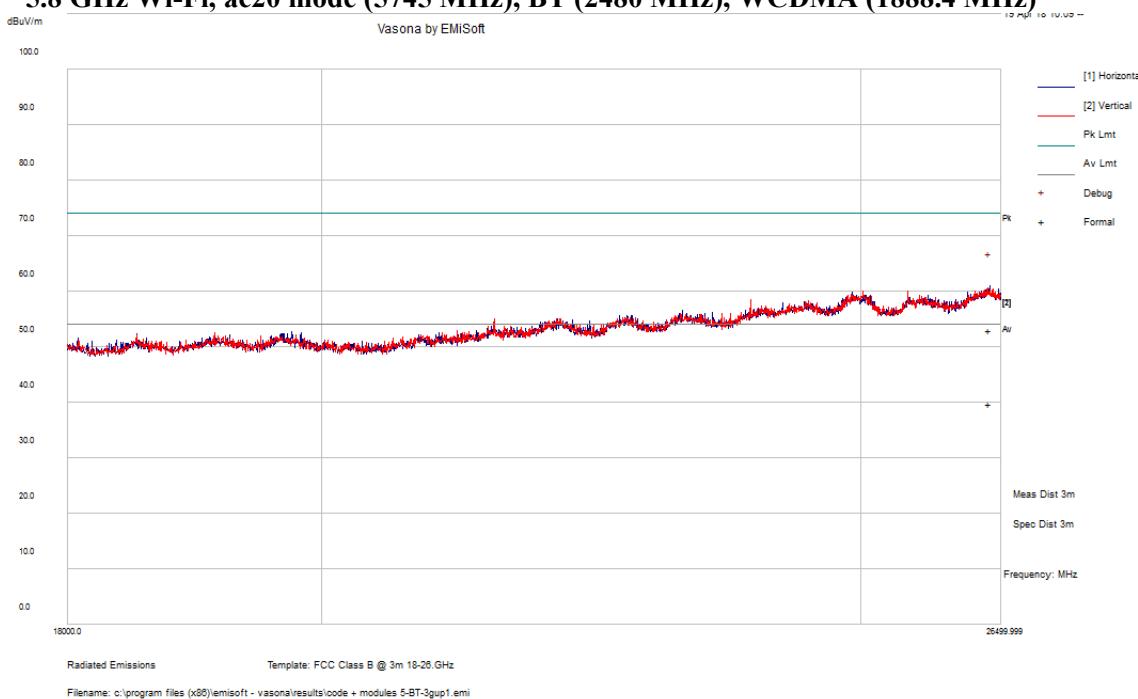**18-26.5 GHz****PP-4G-LTA****5.8 GHz Wi-Fi, ac20 mode (5745 MHz), BT (2480 MHz), WCDMA (1888.4 MHz)****DO-1G-3GG****5.8 GHz Wi-Fi, ac20 mode (5745 MHz), BT (2480 MHz), WCDMA (1888.4 MHz)**

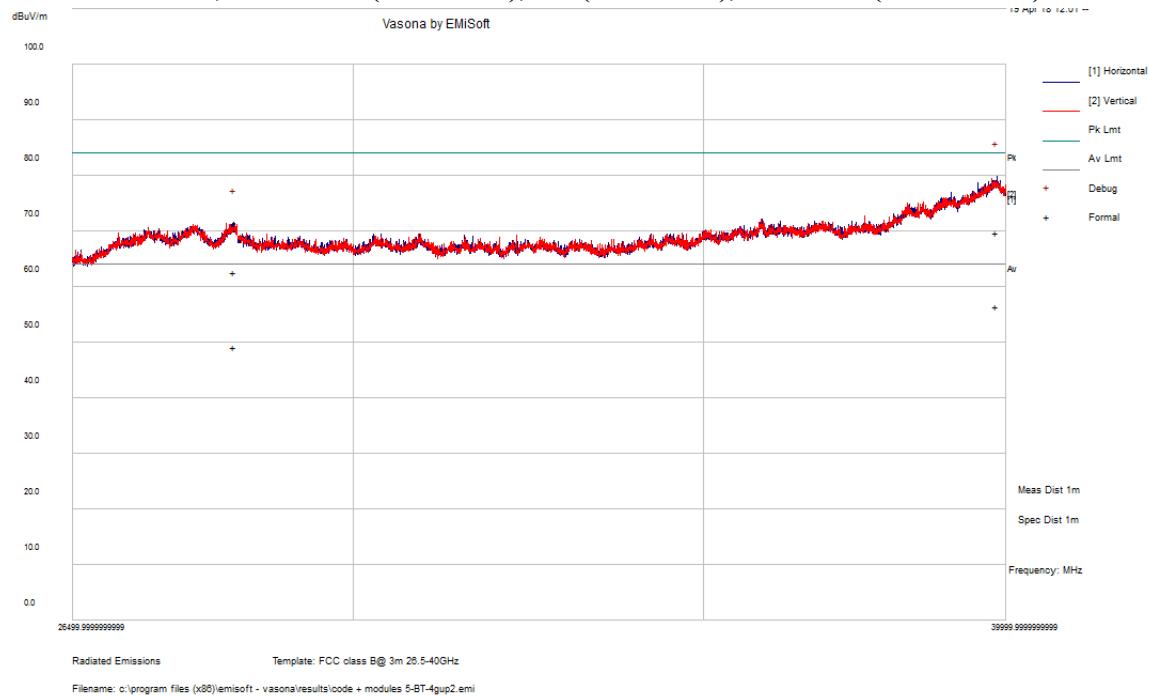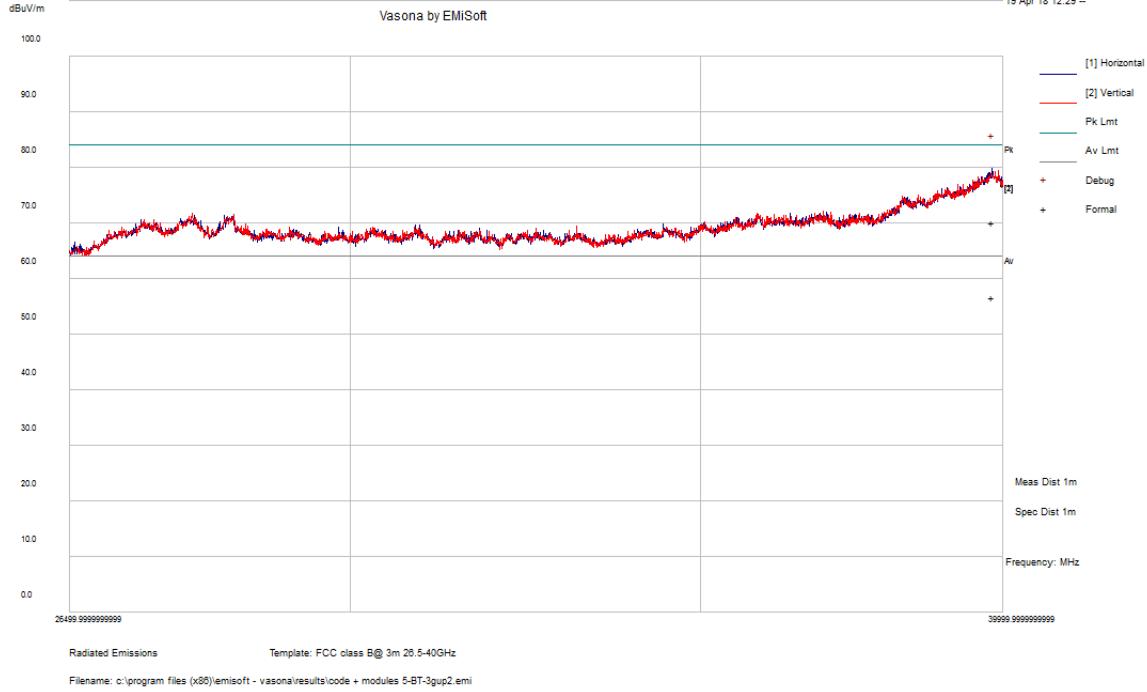**26.5-40 GHz****PP-4G-LTA****5.8 GHz Wi-Fi, ac20 mode (5745 MHz), BT (2480 MHz), WCDMA (1888.4 MHz)****P DO-1G-3GG****5.8 GHz Wi-Fi, ac20 mode (5745 MHz), BT (2480 MHz), WCDMA (1888.4 MHz)**

## 8 FCC §15.247(a) (1) & ISEDC RSS-247 §5.1, RSS-Gen §6.6 - Emission Bandwidth

### 8.1 Applicable Standards

According to FCC §15.247(a) (1) and ISEDC RSS-247 §5.1: the maximum 20 dB bandwidth of the hopping channel shall be presented.

### 8.2 Measurement Procedure

Span = approximately 2 to 5 times the 99% occupied bandwidth, centered on a hopping channel

RBW = 1% to 5 % of the 99% occupied bandwidth

VBW = 3RBW

Sweep = auto

Detector function = peak

Trace = max hold

### 8.3 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
Agilent	Analyzer, Spectrum	E4446A	US44300386	2017-04-20	1 year
-	RF cable	-	-	Each time <sup>1</sup>	N/A
-	10dB attenuator	-	-	Each time <sup>1</sup>	N/A

Note<sup>1</sup>: cable and attenuator included in the test set-up will be checked each time before testing.

**Statement of Traceability:** BACL Corp. attests that all of the calibrations on the equipment items listed above were traceable to NIST or to another internationally recognized National Metrology Institute (NMI), and were compliant with A2LA Policy P102 (dated 9 June 2016) "A2LA Policy on Metrological Traceability".

### 8.4 Test Environmental Conditions

Temperature:	23° C
Relative Humidity:	42 %
ATM Pressure:	102.7 KPa

*The testing was performed by Chin Ming Lui from 2018-04-05 to 2018-04-06 in RF site.*


## 8.5 Test Results

Channel	Frequency (MHz)	99% OBW (kHz)	20 dB OBW (kHz)
GFSK			
Low	2402	802.00	801.67
Middle	2441	801.85	800.43
High	2480	798.91	800.29
$\pi/4$ -DQPSK			
Low	2402	1063.5	1114
Middle	2441	1064.3	1114
High	2480	1064.7	1114
8DPSK			
Low	2402	1101.4	1157
Middle	2441	1101.5	1157
High	2480	1101.3	1157


Please refer to the following plots for detailed test results.

## GFSK

Low Channel 2402 MHz

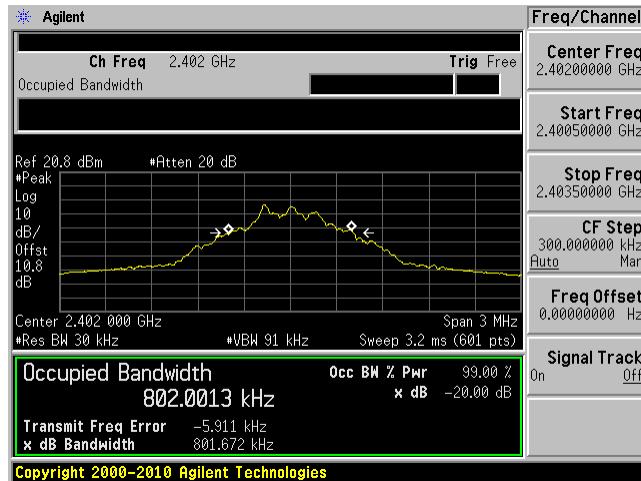

Middle Channel 2441 MHz

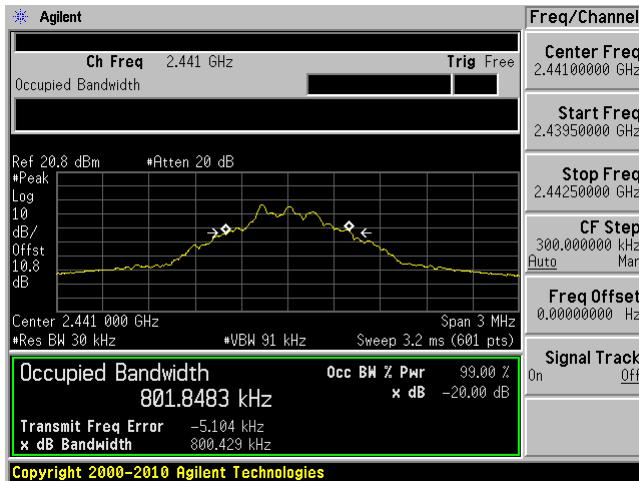

High Channel 2480



$\pi/4$ -DQPSK

Low Channel 2402 MHz



Middle Channel 2441 MHz



High Channel 2480



## 8DPSK

Low Channel 2402 MHz



Middle Channel 2441 MHz



High Channel 2480



## 9 FCC §15.247(b)(1) & ISEDC RSS-247 §5.4 - Output Power

### 9.1 Applicable Standards

According to FCC §15.247(b) (1): For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

According to RSS-247 §5.4: For frequency hopping systems operating in the band 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1.0 W and the e.i.r.p. shall not exceed 4 W if the hopset uses 75 or more hopping channels; the maximum peak conducted output power shall not exceed 0.125 W and the e.i.r.p. shall not exceed 0.5 W if the hopset uses less than 75 hopping channels.

### 9.2 Measurement Procedure

Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel  
RBW > the 20 dB bandwidth of the emission being measured

VBW  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold

### 9.3 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
Agilent	Analyzer, Spectrum	E4446A	US44300386	2017-04-20	1 year
-	RF cable	-	-	Each time <sup>1</sup>	N/A
-	10dB attenuator	-	-	Each time <sup>1</sup>	N/A

Note<sup>1</sup>: cable and attenuator included in the test set-up will be checked each time before testing.

**Statement of Traceability:** BACL Corp. attests that all of the calibrations on the equipment items listed above were traceable to NIST or to another internationally recognized National Metrology Institute (NMI), and were compliant with A2LA Policy P102 (dated 9 June 2016) "A2LA Policy on Metrological Traceability".

### 9.4 Test Environmental Conditions

Temperature:	23° C
Relative Humidity:	42 %
ATM Pressure:	102.7 KPa

The testing was performed by Chin Ming Lui from 2018-04-05 to 2018-04-06 in RF site.


## 9.5 Test Results

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Limit (dBm)
GFSK			
Low	2402	-2.76	30
Middle	2441	-2.57	30
High	2480	-1.89	30
$\pi/4$ -DQPSK			
Low	2402	0.81	30
Middle	2441	1.09	30
High	2480	1.41	30
8DPSK			
Low	2402	0.84	30
Middle	2441	1.15	30
High	2480	1.47	30


Please refer to the following plots for detailed test results.

## GFSK


Low Channel 2402 MHz

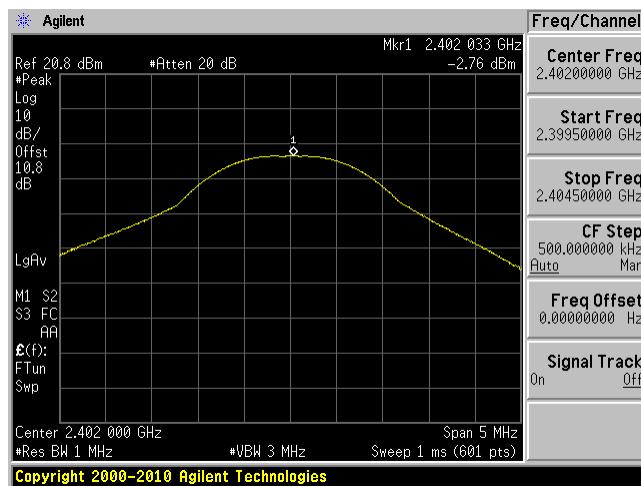

Middle Channel 2441 MHz

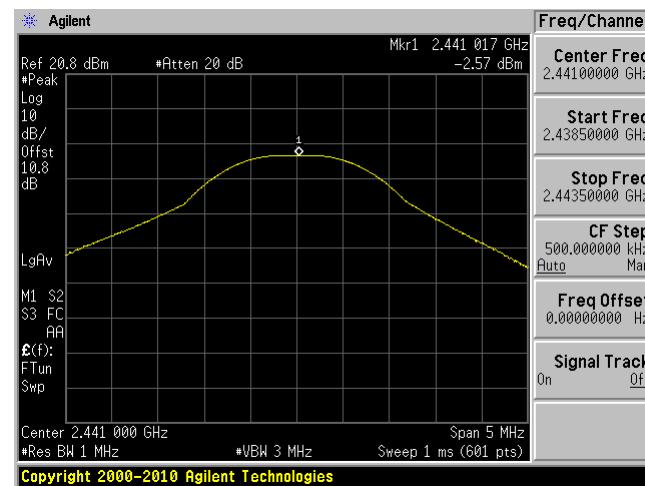


High Channel 2480

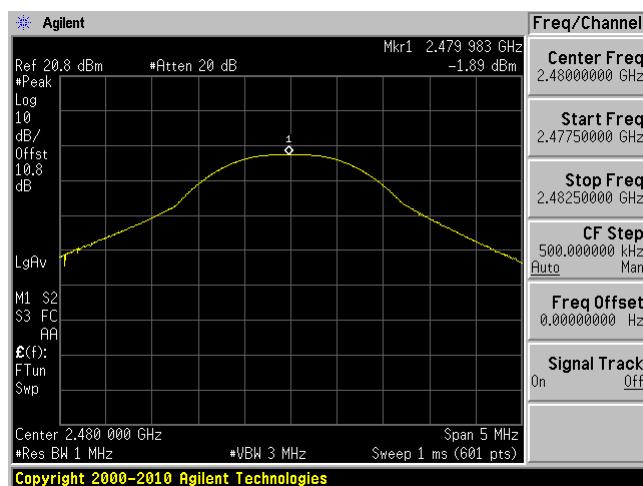


$\pi/4$ -DQPSK


Low Channel 2402 MHz

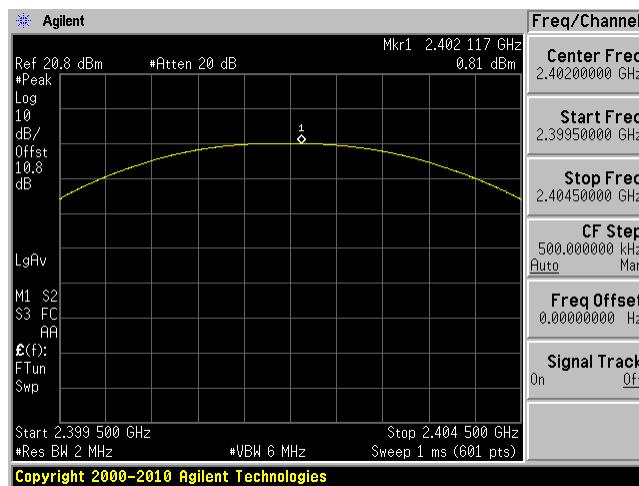

Middle Channel 2441 MHz

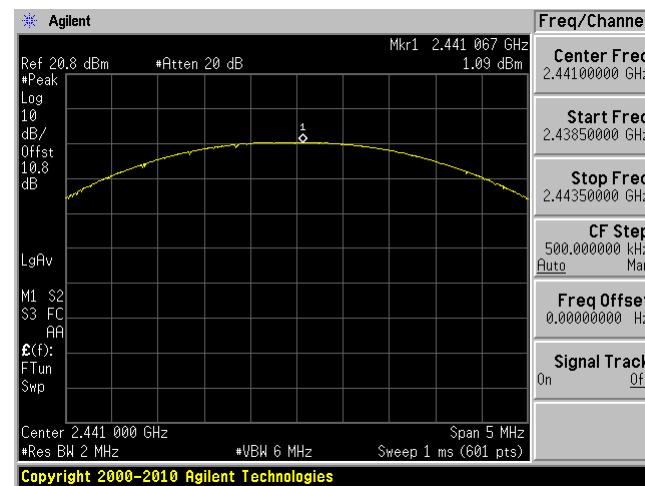


High Channel 2480

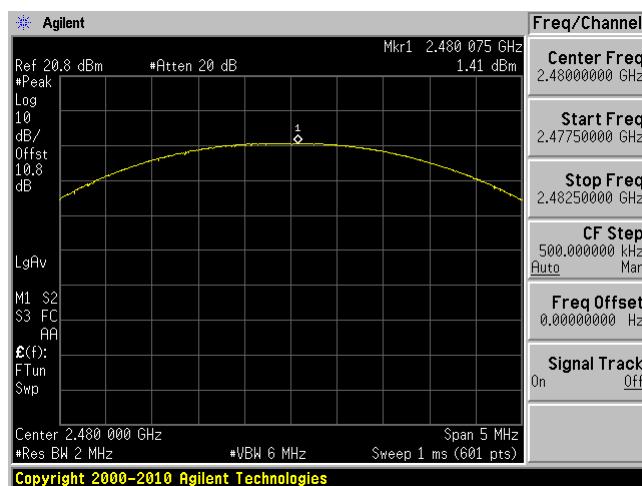


## 8DPSK


Low Channel 2402 MHz

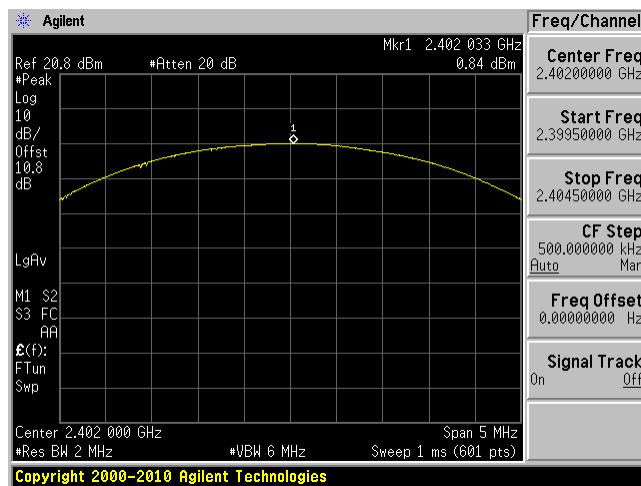

Middle Channel 2441 MHz

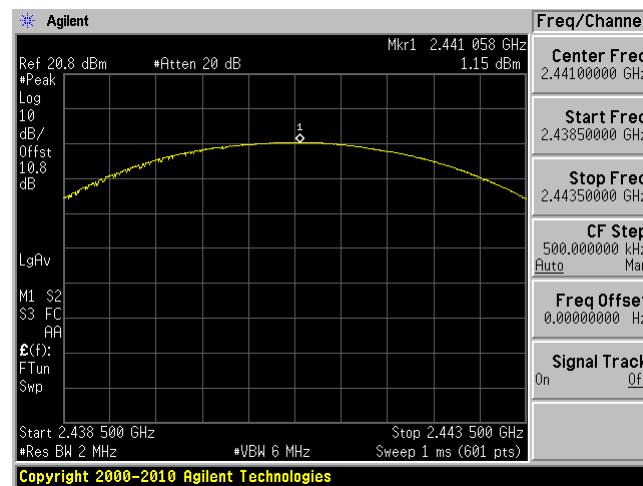

High Channel 2480 MHz

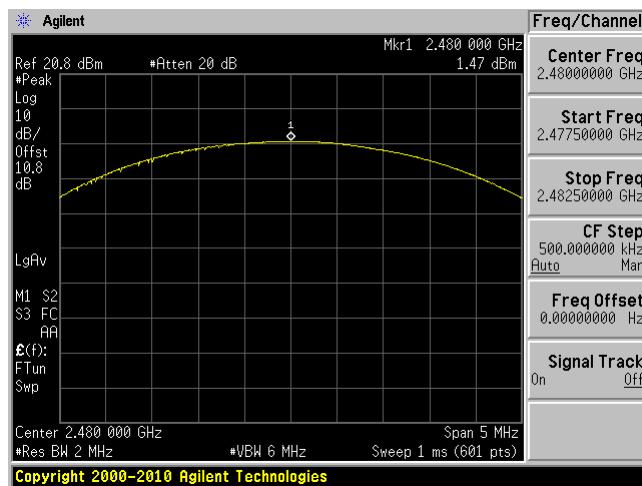

## 10 FCC §15.247(d) & ISEDC RSS-247 §5.5 - 100 kHz Bandwidth of Band Edges

### 10.1 Applicable Standards

According to FCC §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emissions limits specified in §15.209(a) see §15.205(c).

According to ISEDC RSS-247 §5.5. In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under Section 5.4(4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

### 10.2 Measurement Procedure

Span = wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products which fall outside of the authorized band of operation

RBW = 100 kHz

VBW = 300 kHz

Sweep = coupled

Detector function = peak

Trace = max hold

### 10.3 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
Agilent	Analyzer, Spectrum	E4446A	US44300386	2017-04-20	1 year
-	RF cable	-	-	Each time <sup>1</sup>	N/A
-	10dB attenuator	-	-	Each time <sup>1</sup>	N/A

Note<sup>1</sup>: cable and attenuator included in the test set-up will be checked each time before testing.

**Statement of Traceability:** BACL Corp. attests that all of the calibrations on the equipment items listed above were traceable to NIST or to another internationally recognized National Metrology Institute (NMI), and were compliant with A2LA Policy P102 (dated 9 June 2016) "A2LA Policy on Metrological Traceability".

## 10.4 Test Environmental Conditions


<b>Temperature:</b>	23° C
<b>Relative Humidity:</b>	42 %
<b>ATM Pressure:</b>	102.7 KPa

The testing was performed by Chin Ming Lui from 2018-04-05 to 2018-04-06 in RF site.


## 10.5 Test Results

### GFSK (Fixed Channel)

Low Channel 2402 MHz

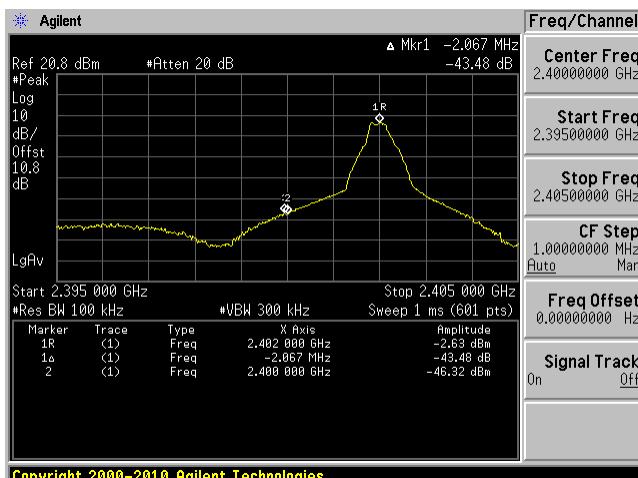


High Channel 2480 MHz

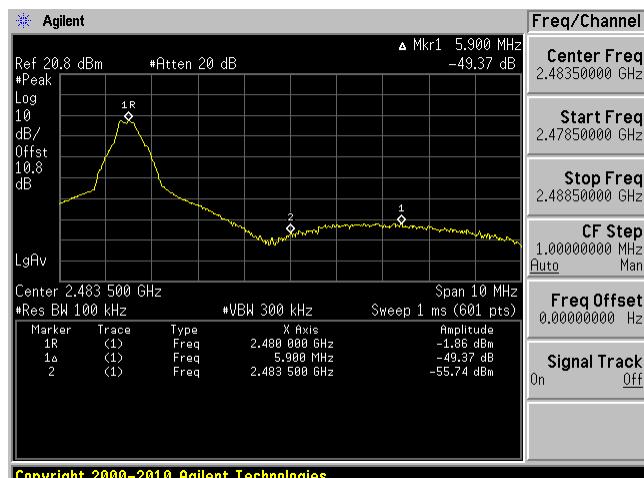


### $\pi/4$ -DQPSK (Fixed Channel)

Low Channel 2402 MHz

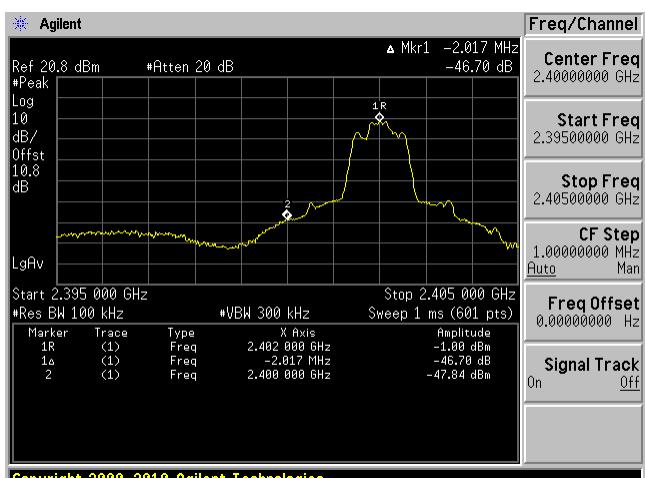


High Channel 2480 MHz

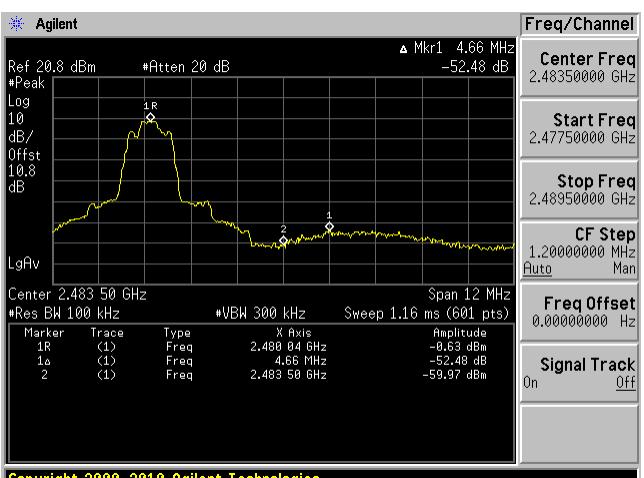


**8DPSK (Fixed Channel)**

Low Channel 2402 MHz

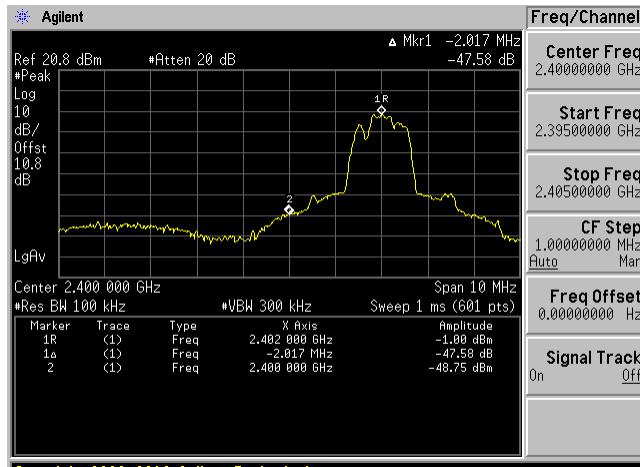

High Channel 2480 MHz

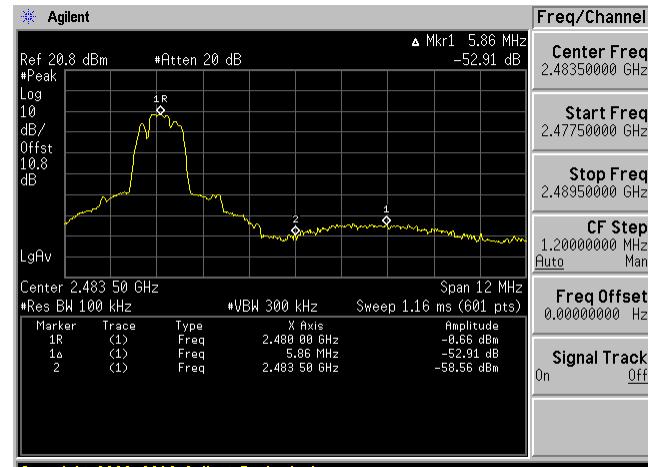


Copyright 2000-2010 Agilent Technologies

Copyright 2000-2010 Agilent Technologies


**GFSK (Hopping)**

Low Channel 2402 MHz

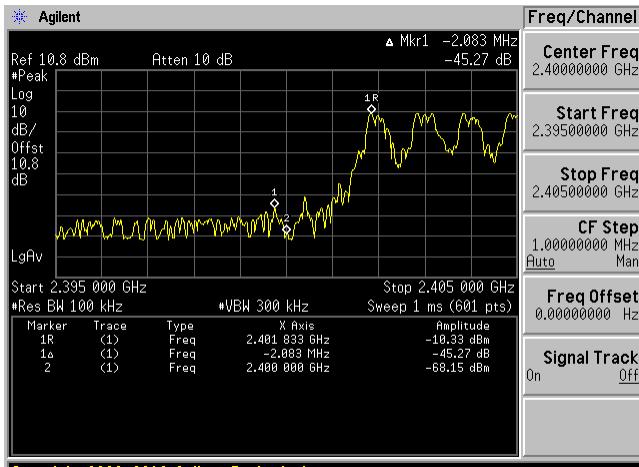

Copyright 2000–2010 Agilent Technologies


High Channel 2480 MHz

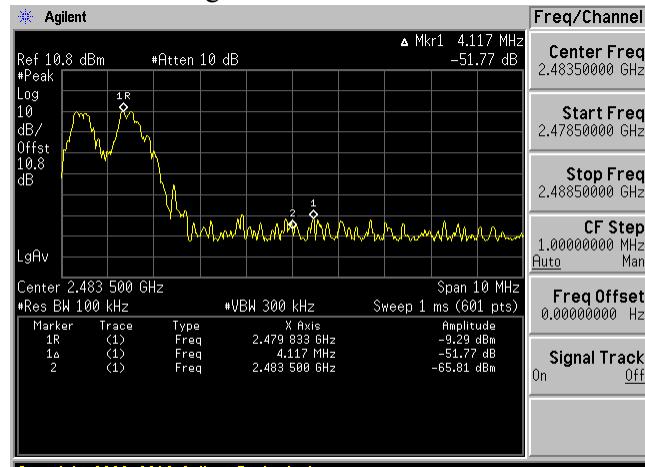

Copyright 2000–2010 Agilent Technologies


 **$\pi/4$ -DQPSK (Hopping)**

Low Channel 2402 MHz

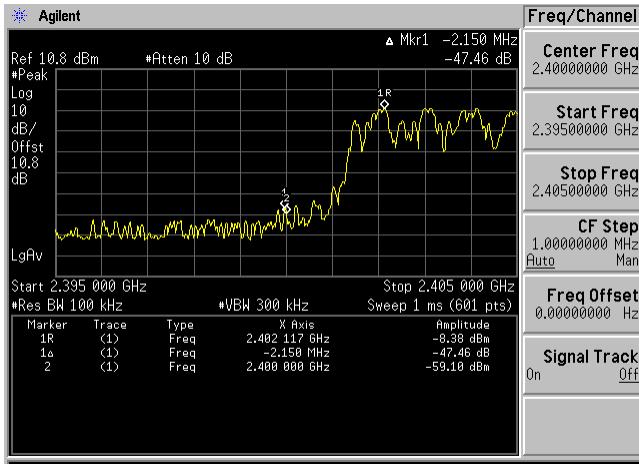

Copyright 2000–2010 Agilent Technologies


High Channel 2480 MHz

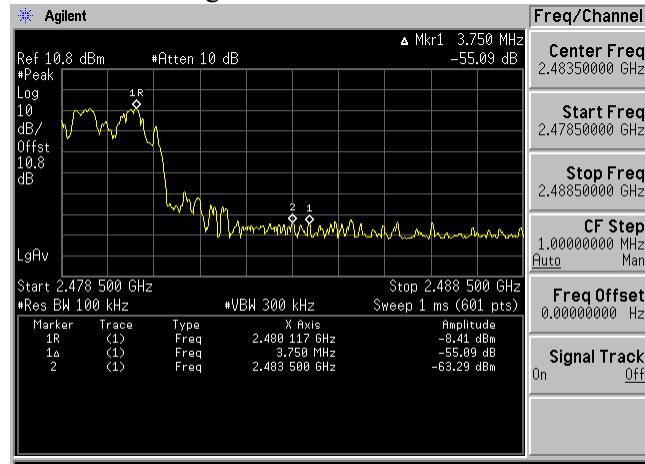


Copyright 2000–2010 Agilent Technologies

## 8DPSK (Hopping)

Low Channel 2402 MHz

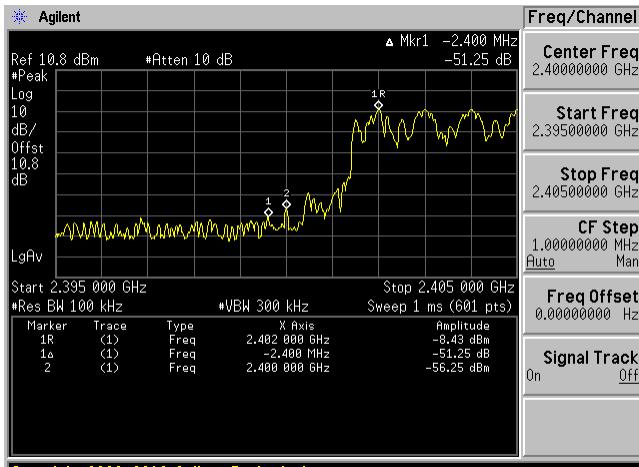

High Channel 2480 MHz

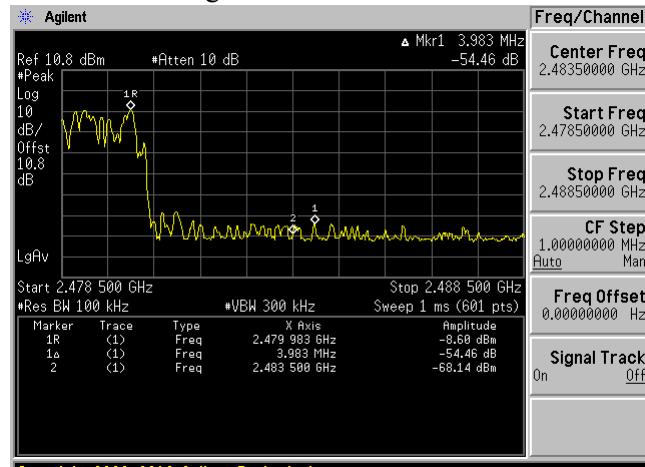

## **11 FCC §15.247(a)(1)(iii) & ISEDC RSS-247 §5.1(4) - Dwell Time**

### **11.1 Applicable Standards**

According to FCC §15.247(a)(1)(iii) and RSS-247 §5.1(4), Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

### **11.2 Measurement Procedure**

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = zero span, centered on a hopping channel

RBW  $\leq$  channel spacing and where possible RBW should be set  $\gg 1/T$ , where  $T$  is the expected dwell time per channel

Sweep = as necessary to capture the entire dwell time per hopping channel

Detector function = peak

Trace = max hold

Use the marker-delta function to determine the transmit time per hop. If this value varies with different modes of operation (data rate, modulation format, number of hopping channels, etc.), then repeat this test for each variation in transmit time.

Repeat the measurement using a longer sweep time to determine the number of hops over the period specified in the requirements. The sweep time shall be equal to, or less than, the period specified in the requirements. Determine the number of hops over the sweep time and calculate the total number of hops in the period specified in the requirements, using the following equation:

(Number of hops in the period specified in the requirements) =

(Number of hops on spectrum analyzer) x (period specified in the requirements / analyzer sweep time)

The average time of occupancy is calculated from the transmit time per hop multiplied by the number of hops in the period specified. If the number of hops in a specific time varies with different modes of operation (data rate, modulation format, number of hopping channels, etc.), then repeat this test for each variation.

### 11.3 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
Agilent	Analyzer, Spectrum	E4446A	US44300386	2017-04-20	1 year
-	RF cable	-	-	Each time <sup>1</sup>	N/A
-	10dB attenuator	-	-	Each time <sup>1</sup>	N/A

Note<sup>1</sup>: cable and attenuator included in the test set-up will be checked each time before testing.

**Statement of Traceability:** BACL Corp. attests that all of the calibrations on the equipment items listed above were traceable to NIST or to another internationally recognized National Metrology Institute (NMI), and were compliant with A2LA Policy P102 (dated 9 June 2016) "A2LA Policy on Metrological Traceability".

### 11.4 Test Environmental Conditions

Temperature:	23° C
Relative Humidity:	42 %
ATM Pressure:	102.7 KPa

The testing was performed by Chin Ming Lui from 2018-04-05 to 2018-04-06 in RF site.


## 11.5 Test Results

Channel	Pulse Width (ms)	Number of Hops in the Period Specified in the Requirements	Average Time of Occupancy (s)	Limit (sec)	Results
GFSK, DH1					
Low	0.380	320	0.1216	0.4	compliant
Middle	0.375	320	0.1200	0.4	compliant
High	0.380	320	0.1216	0.4	compliant
GFSK, DH3					
Low	1.627	170	0.2766	0.4	compliant
Middle	1.627	200	0.3254	0.4	compliant
High	1.627	160	0.2603	0.4	compliant
GFSK, DH5					
Low	2.88	130	0.3744	0.4	compliant
Middle	2.88	135	0.3888	0.4	compliant
High	2.88	125	0.3600	0.4	compliant
$\pi/4$ -DQPSK, DH1					
Low	0.390	350	0.1365	0.4	compliant
Middle	0.390	320	0.1248	0.4	compliant
High	0.390	320	0.1248	0.4	compliant
$\pi/4$ -DQPSK, DH3					
Low	1.627	190	0.3091	0.4	compliant
Middle	1.627	160	0.2603	0.4	compliant
High	1.627	170	0.2766	0.4	compliant
$\pi/4$ -DQPSK, DH5					
Low	2.88	130	0.3744	0.4	compliant
Middle	2.88	115	0.3312	0.4	compliant
High	2.88	130	0.3744	0.4	compliant
8DPSK, DH1					
Low	0.380	350	0.1216	0.4	compliant
Middle	0.380	320	0.1216	0.4	compliant
High	0.380	320	0.1216	0.4	compliant
8DPSK, DH3					
Low	1.627	210	0.3417	0.4	compliant
Middle	1.627	170	0.2766	0.4	compliant
High	1.627	160	0.2603	0.4	compliant
8DPSK, DH5					
Low	2.88	125	0.3600	0.4	compliant
Middle	2.88	120	0.3456	0.4	compliant
High	2.88	120	0.3456	0.4	compliant


Please refer to the following plots for detailed test results.

## GFSK, DH1 Pulse Width


Low Channel 2402 MHz

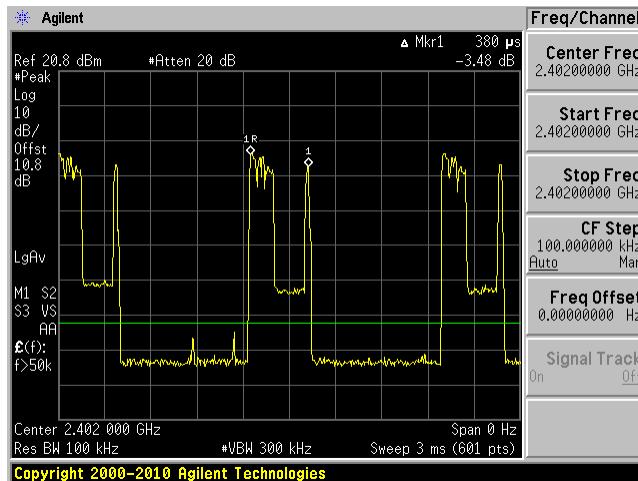

Middle Channel 2441 MHz

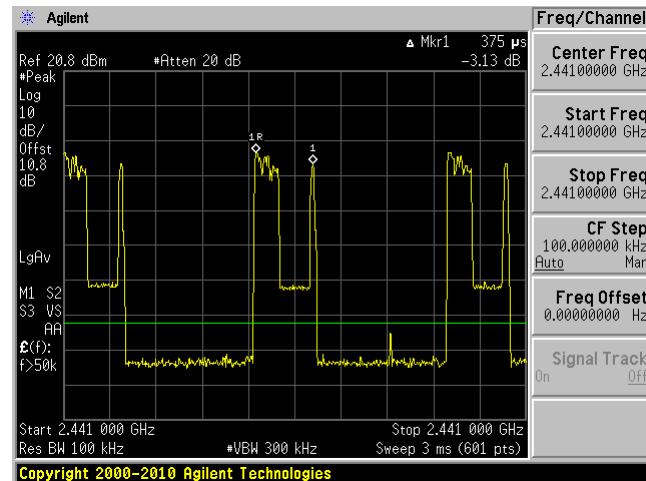


High Channel 2480 MHz

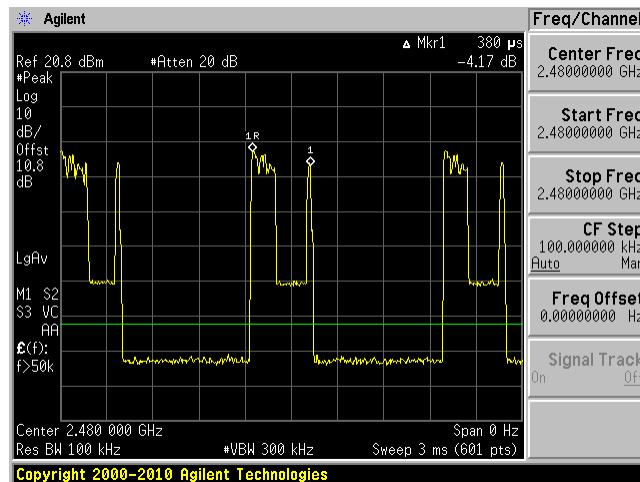


## GFSK, DH1 Number of Pulses within a Specified Time


Low Channel 2402 MHz

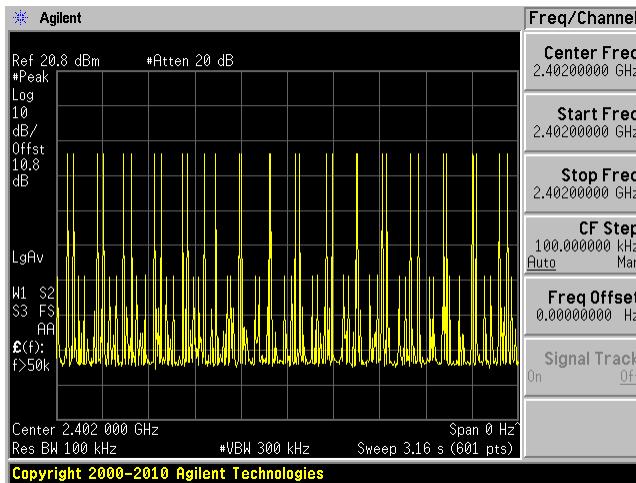

Middle Channel 2441 MHz

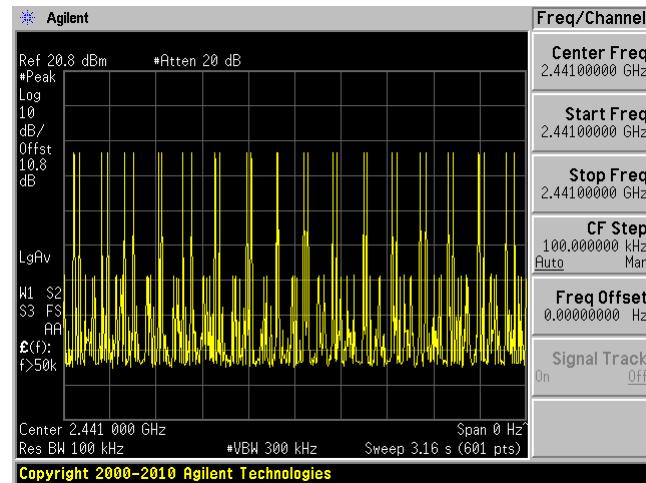


High Channel 2480 MHz

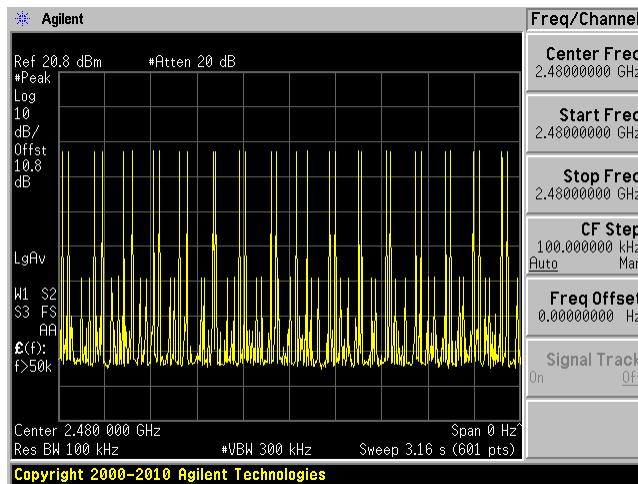


## GFSK, DH3 Pulse Width


Low Channel 2402 MHz

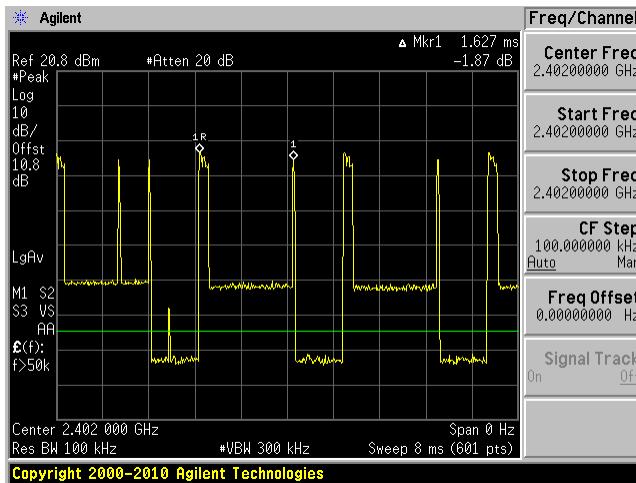

Middle Channel 2441 MHz

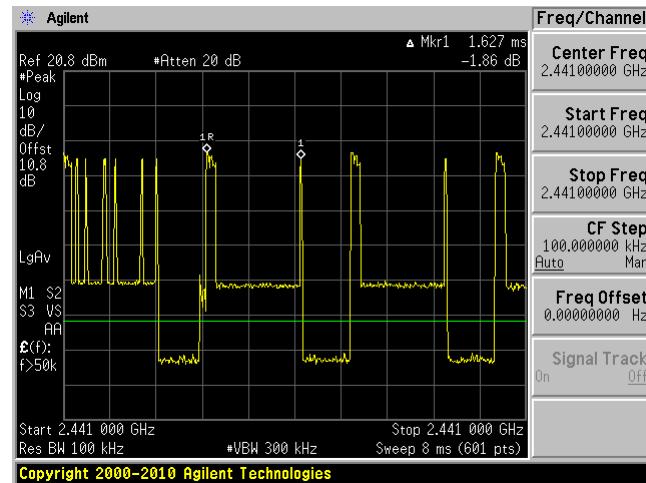


High Channel 2480 MHz

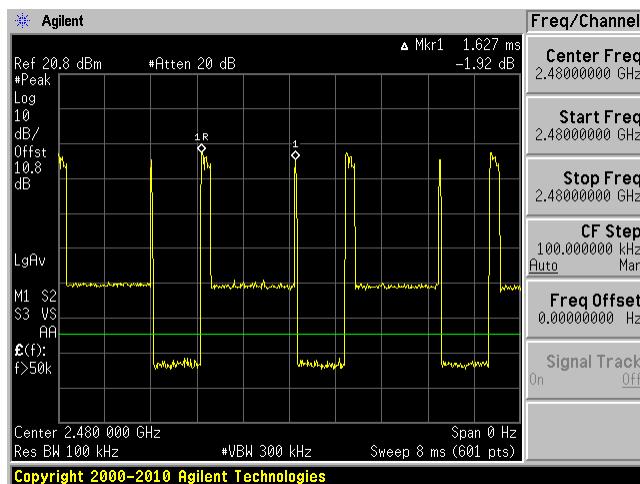


### GFSK, DH3 Number of Pulses within a Specified Time


Low Channel 2402 MHz

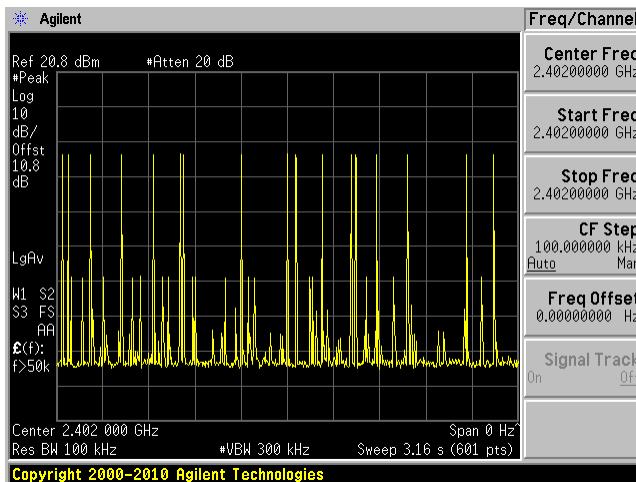

Middle Channel 2441 MHz

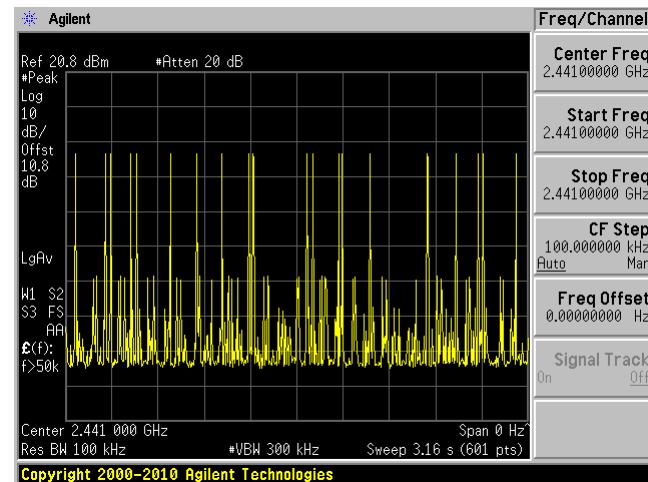


High Channel 2480 MHz

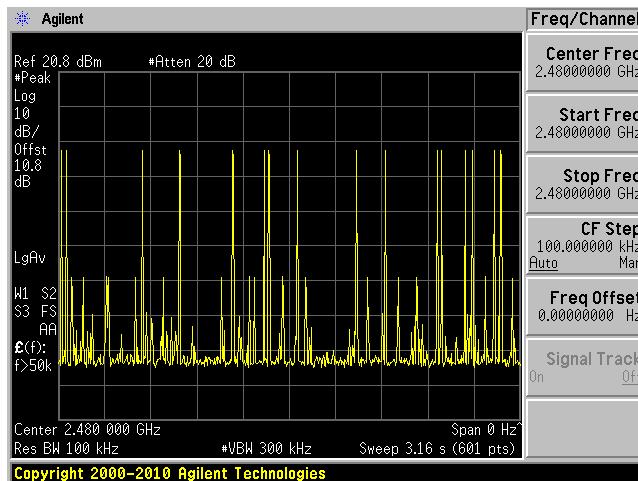


## GFSK, DH5 Pulse Width


Low Channel 2402 MHz

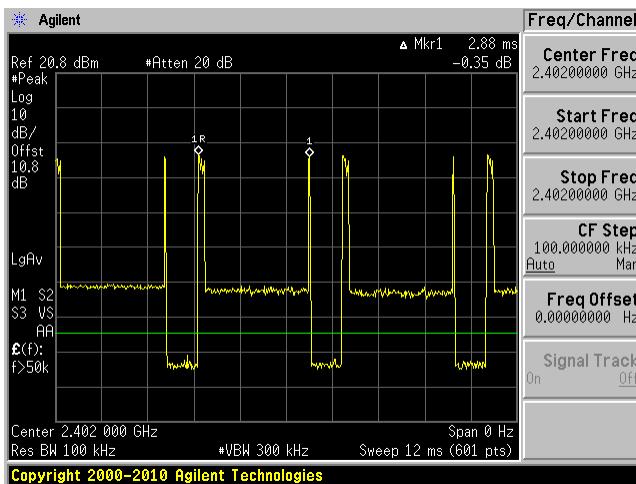

Middle Channel 2441 MHz

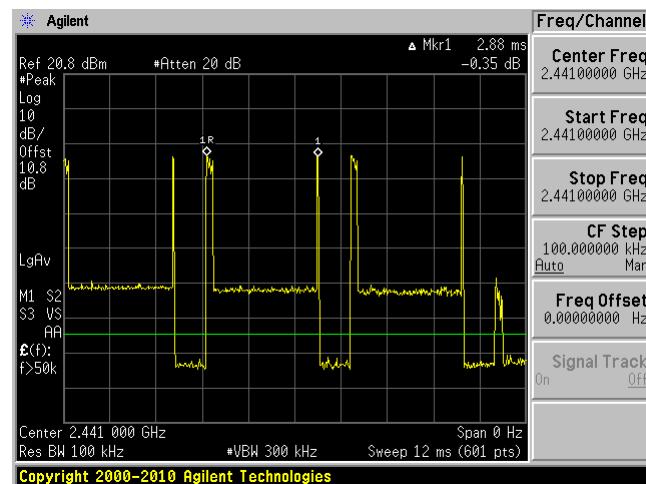


High Channel 2480 MHz

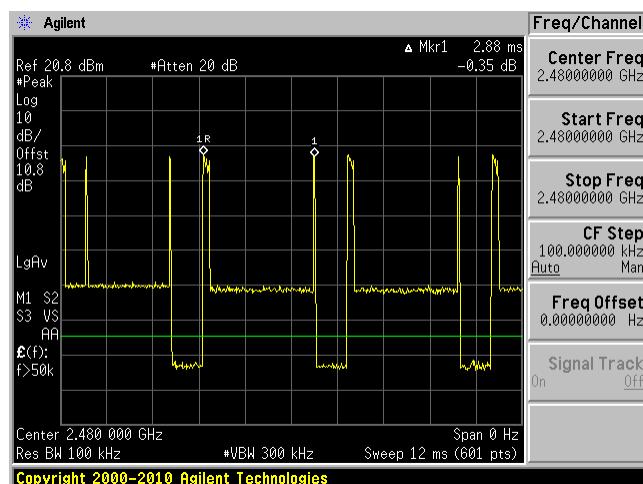


**GFSK, DH5 Number of Pulses within a Specified Time**


Low Channel 2402 MHz

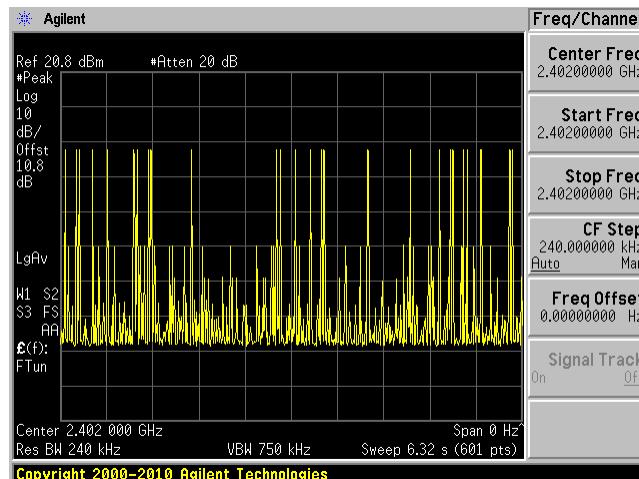

Middle Channel 2441 MHz

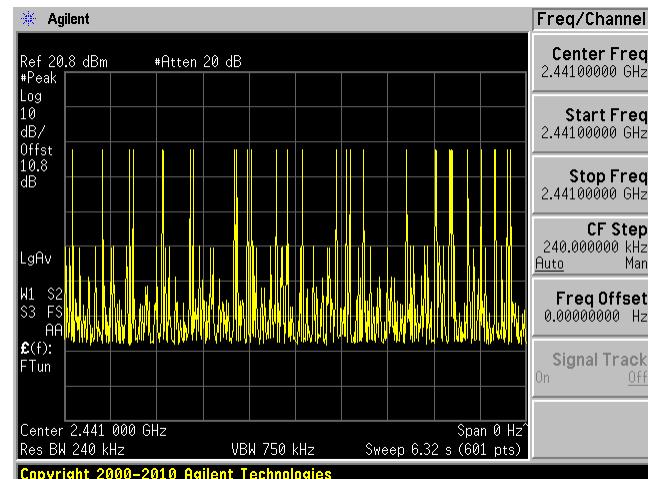


High Channel 2480 MHz

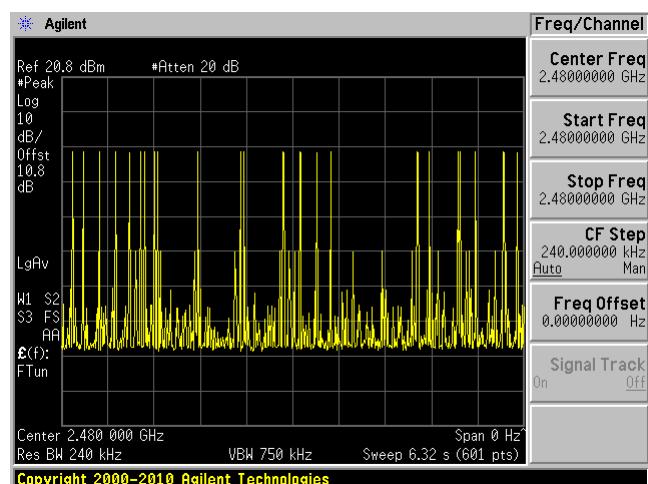


**$\pi/4$ -DQPSK, DH1 Pulse Width**


Low Channel 2402 MHz

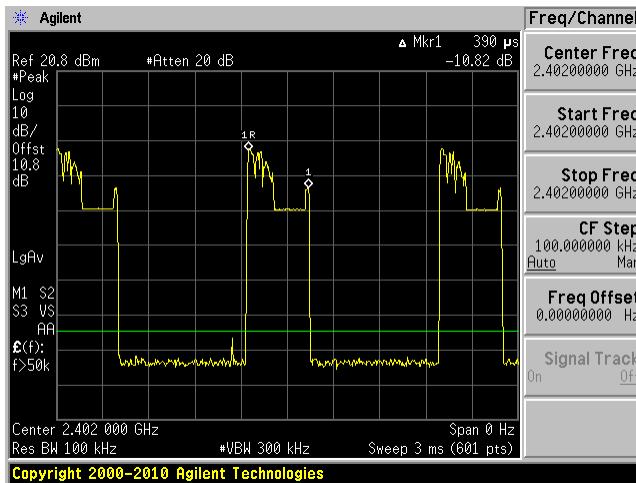

Middle Channel 2441 MHz

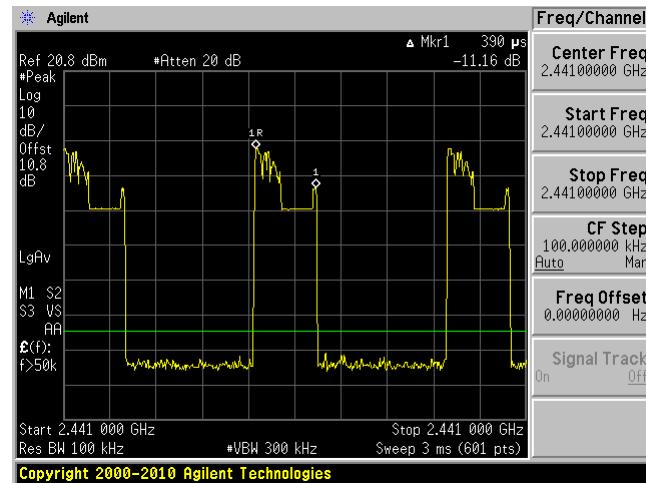


High Channel 2480 MHz

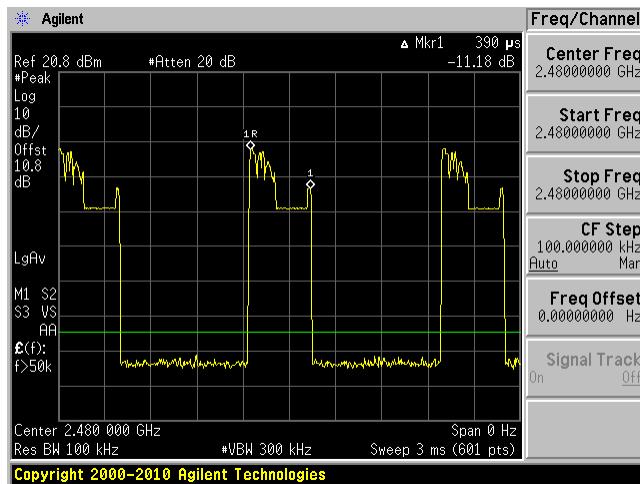


**$\pi/4$ -DQPSK, DH1 Number of Pulses within a Specified Time**


Low Channel 2402 MHz

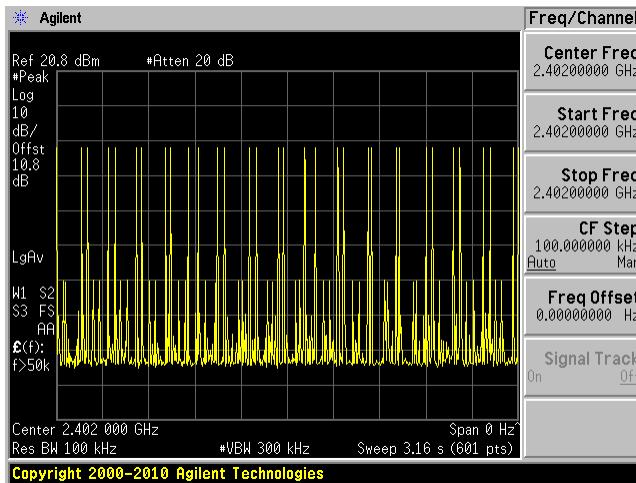

Middle Channel 2441 MHz

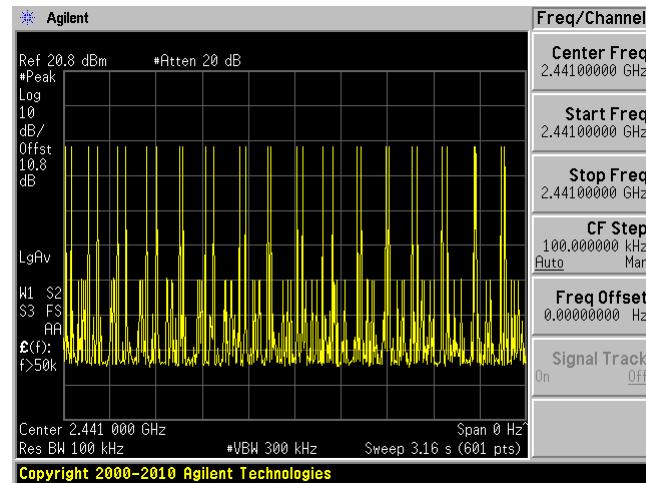


High Channel 2480 MHz

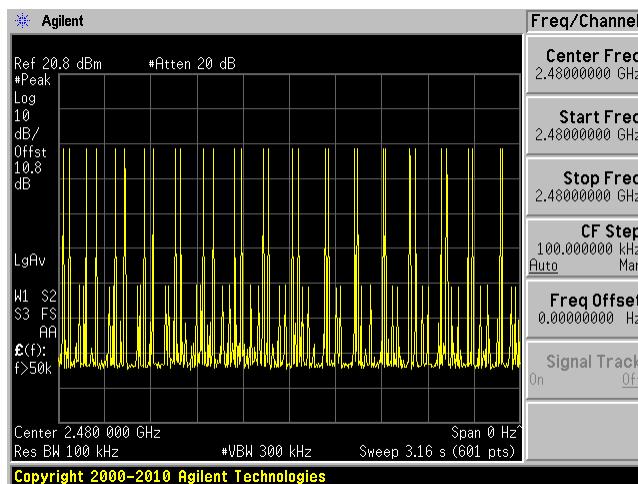


**$\pi/4$ -DQPSK, DH3 Pulse Width**


Low Channel 2402 MHz

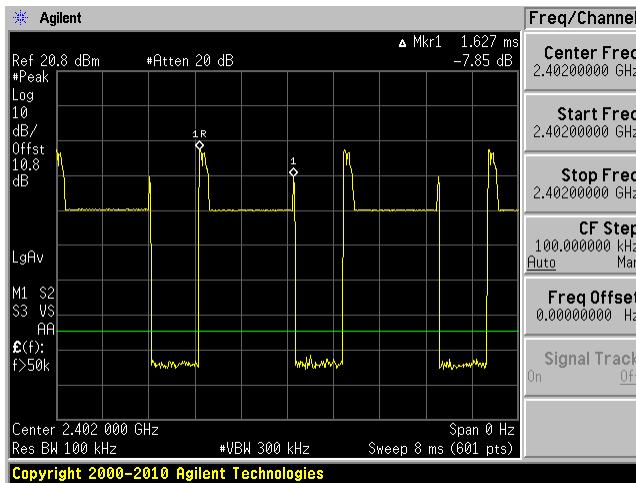

Middle Channel 2441 MHz

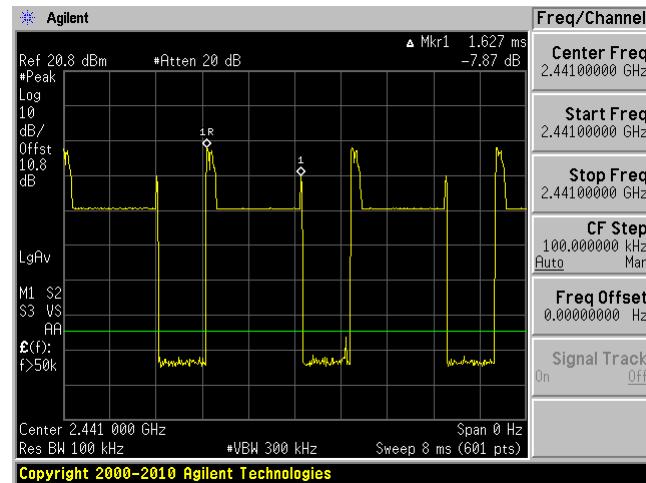


High Channel 2480 MHz

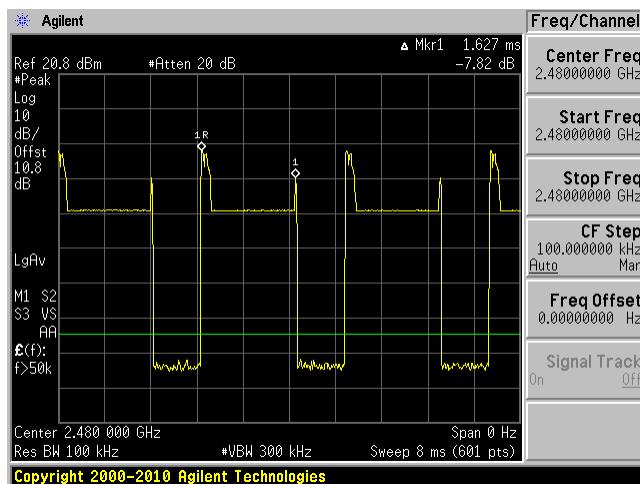


**$\pi/4$ -DQPSK, DH3 Number of Pulses within a Specified Time**


Low Channel 2402 MHz

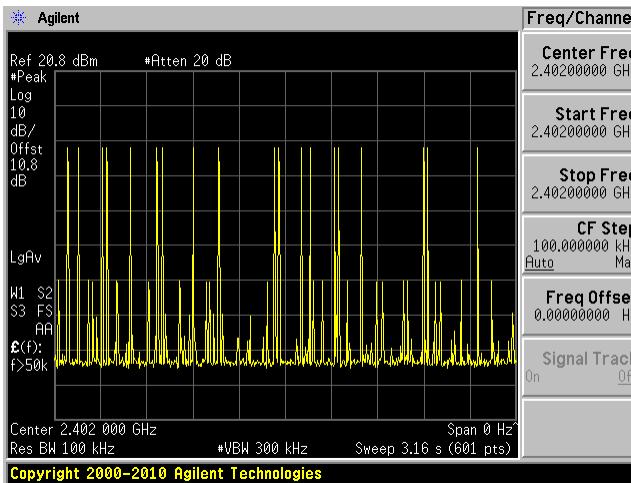

Middle Channel 2441 MHz

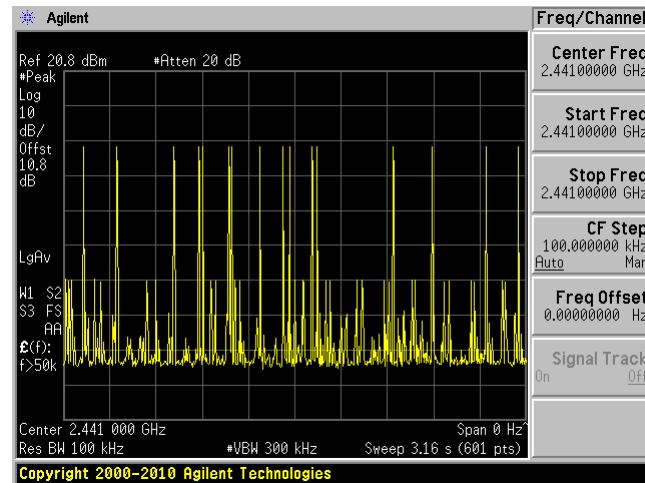


High Channel 2480 MHz

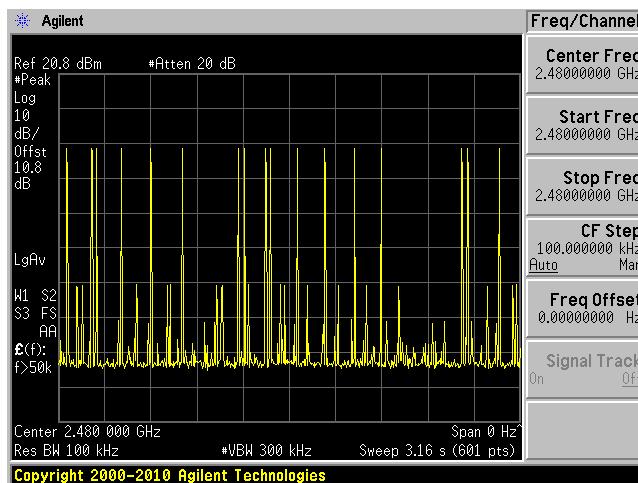


**$\pi/4$ -DQPSK, DH5 Pulse Width**


Low Channel 2402 MHz

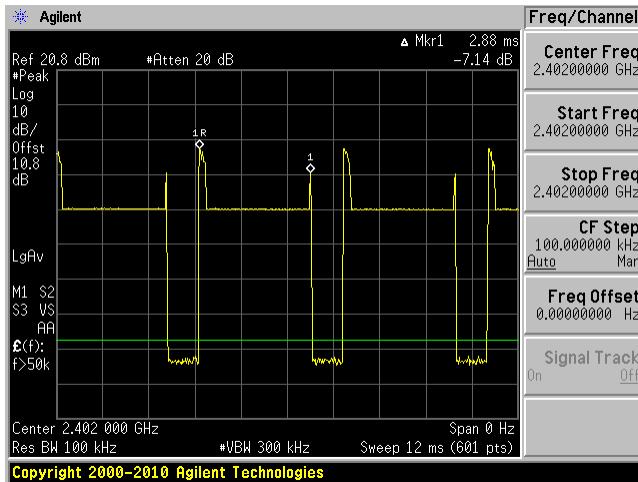

Middle Channel 2441 MHz

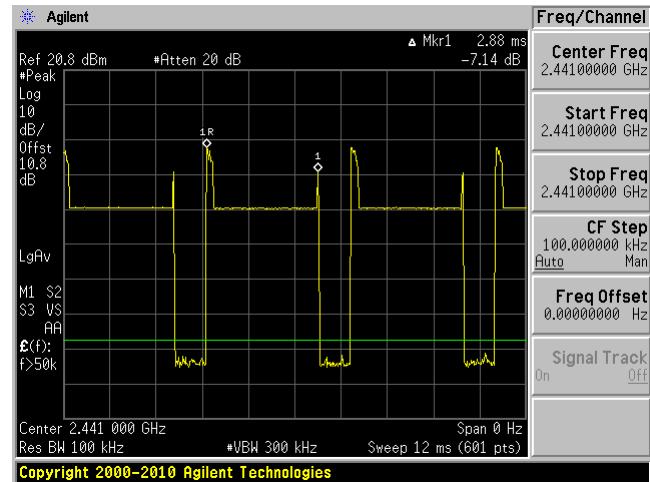


High Channel 2480 MHz

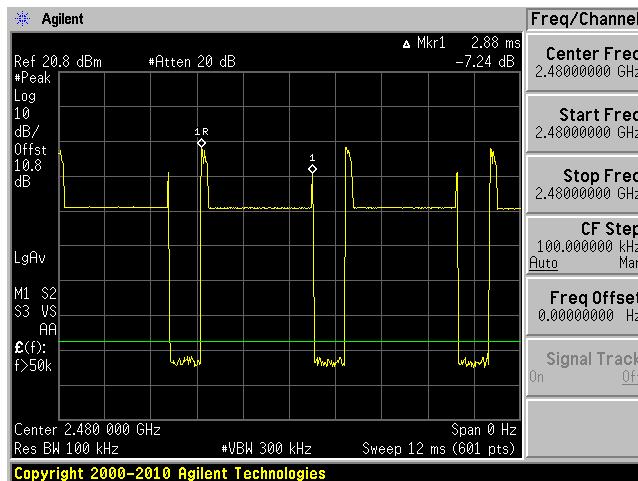


**$\pi/4$ -DQPSK, DH5 Number of Pulses within a Specified Time**


Low Channel 2402 MHz

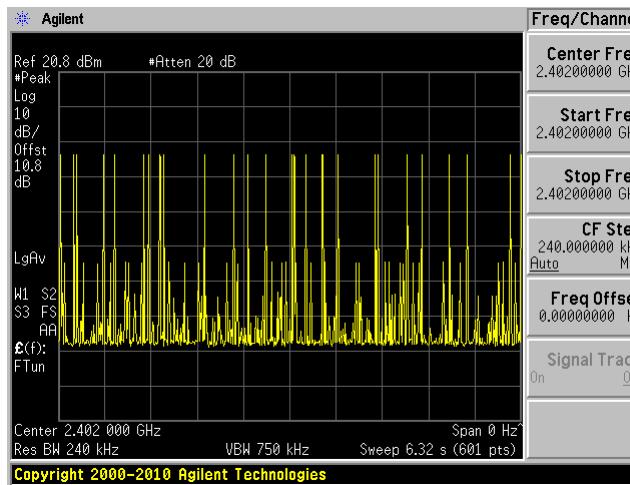

Middle Channel 2441 MHz

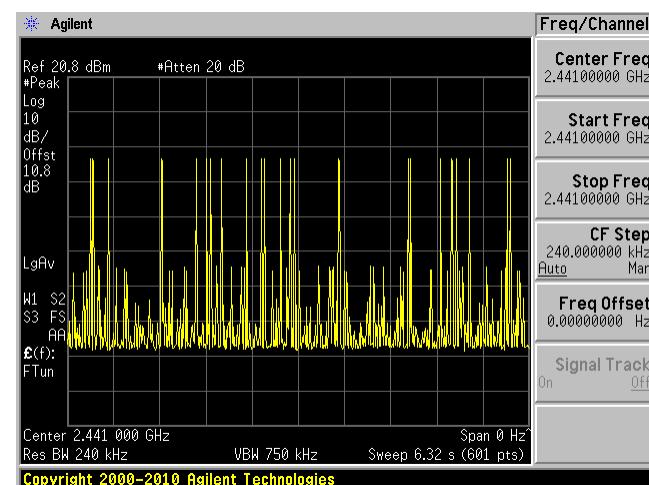


High Channel 2480 MHz

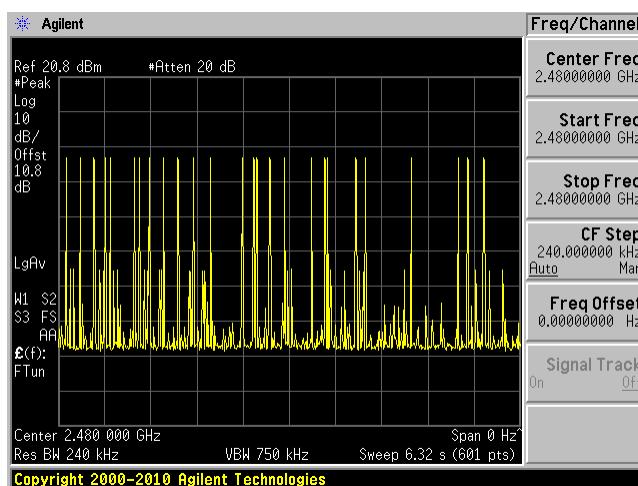


## 8DPSK, DH1 Pulse Width


Low Channel 2402 MHz

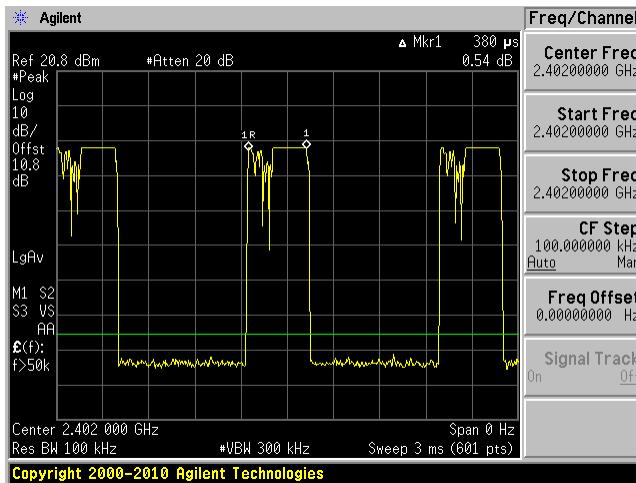

Middle Channel 2441 MHz

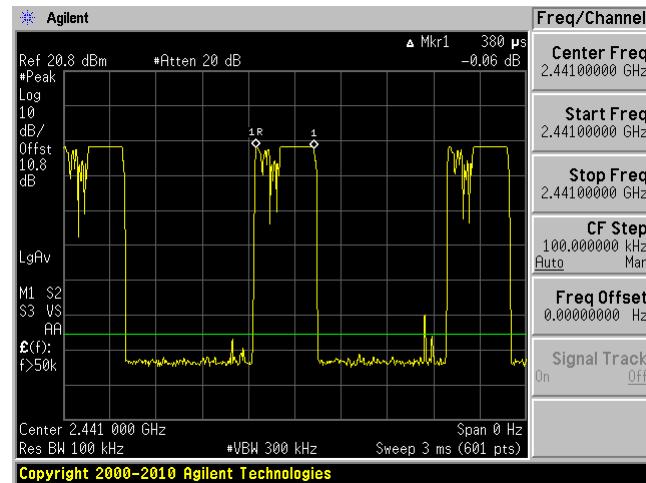


High Channel 2480 MHz

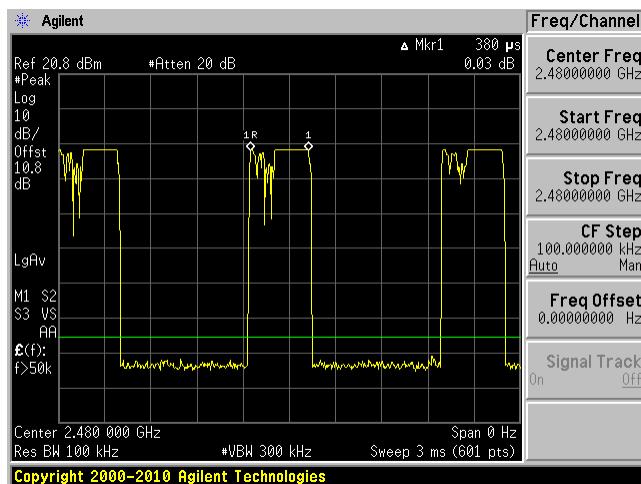


## 8DPSK, DH1 Number of Pulses within a Specified Time


Low Channel 2402 MHz

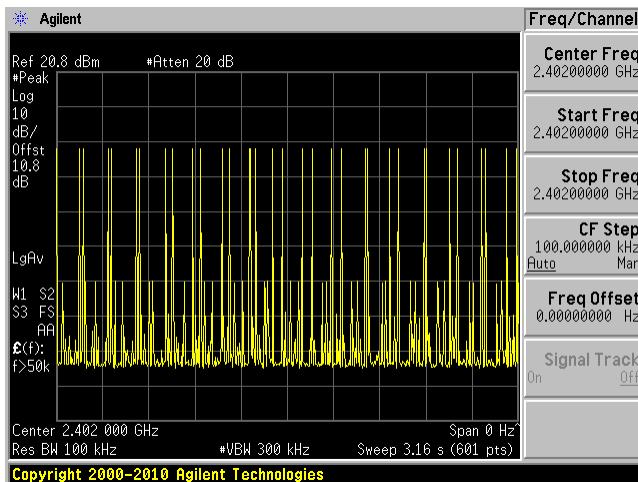

Middle Channel 2441 MHz

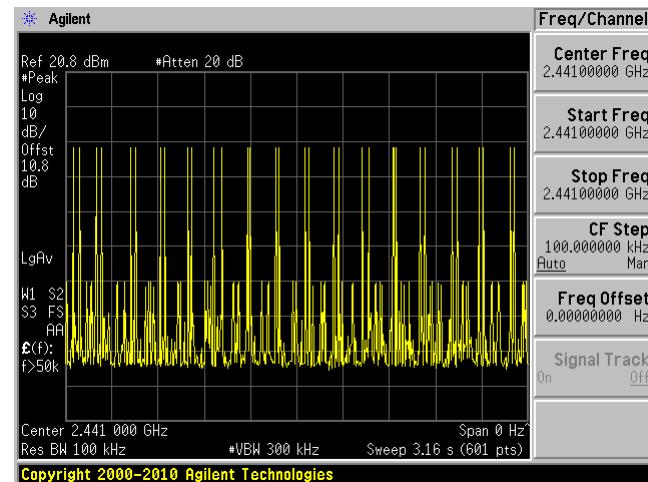


High Channel 2480 MHz

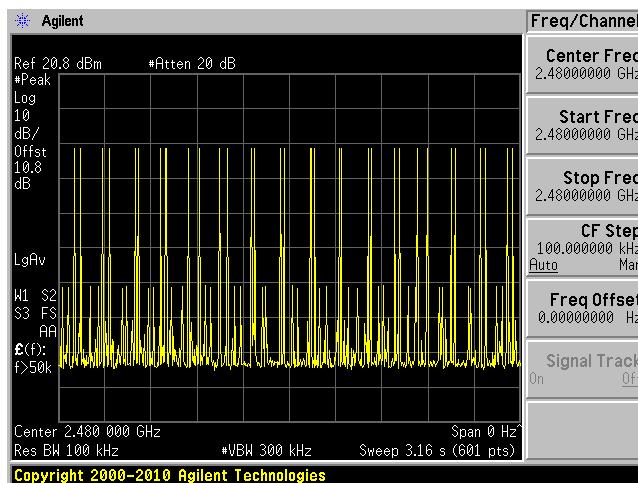


## 8DPSK, DH3 Pulse Width


Low Channel 2402 MHz

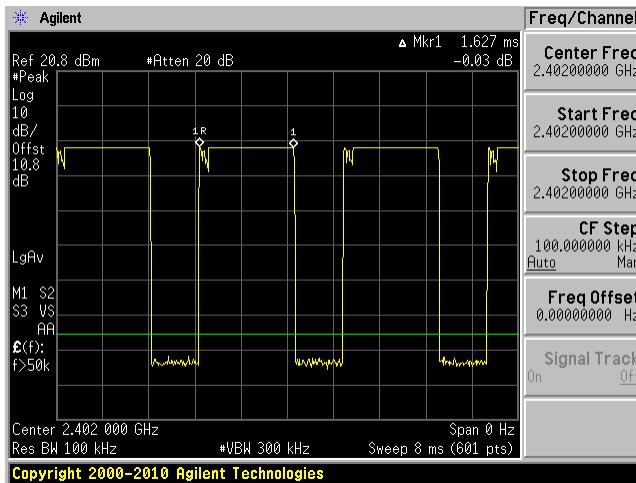

Middle Channel 2441 MHz

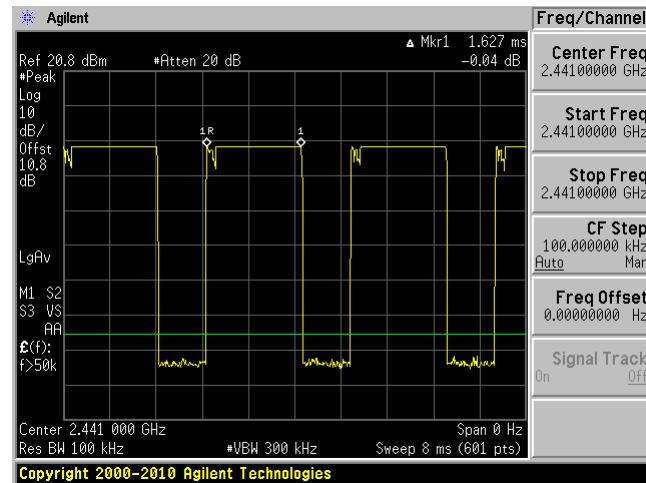


High Channel 2480 MHz

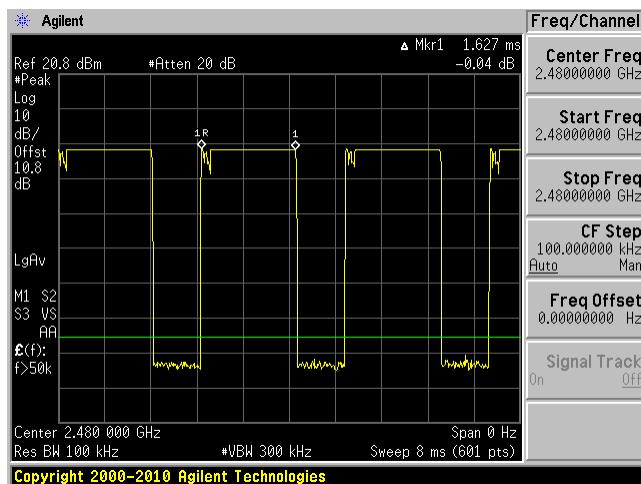


## 8DPSK, DH3 Number of Pulses within a Specified Time


Low Channel 2402 MHz

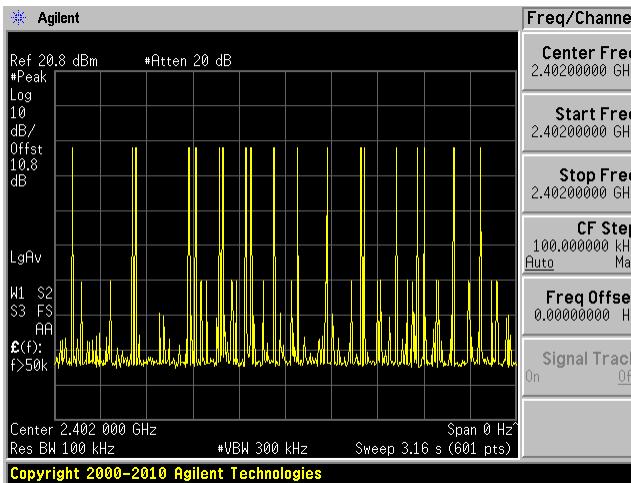

Middle Channel 2441 MHz

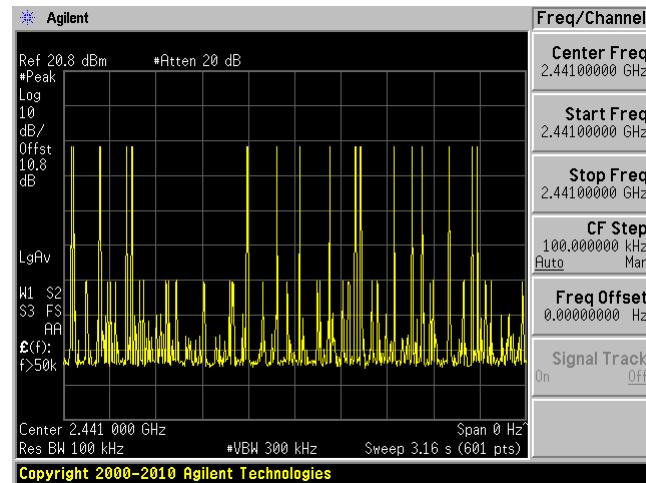


High Channel 2480 MHz

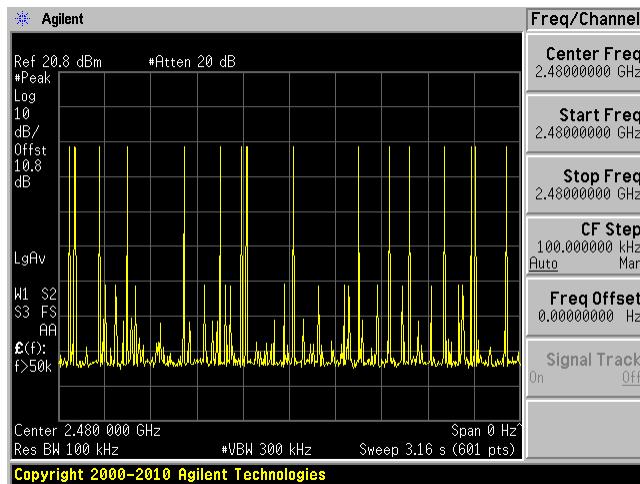


## 8DPSK, DH5 Pulse Width


Low Channel 2402 MHz

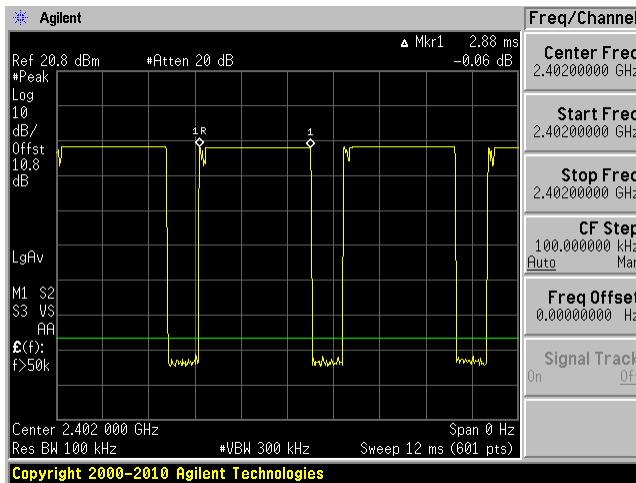

Middle Channel 2441 MHz

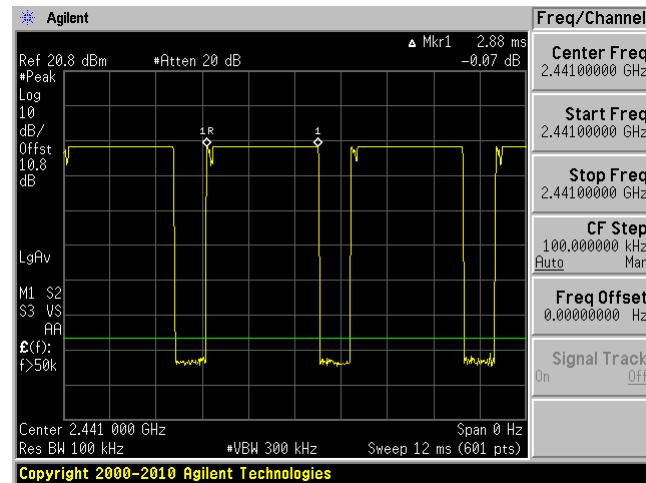


High Channel 2480 MHz

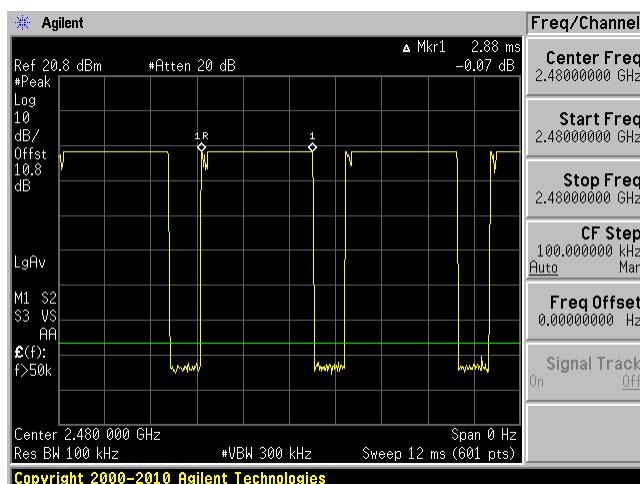


## 8DPSK, DH5 Number of Pulses within a Specified Time


Low Channel 2402 MHz

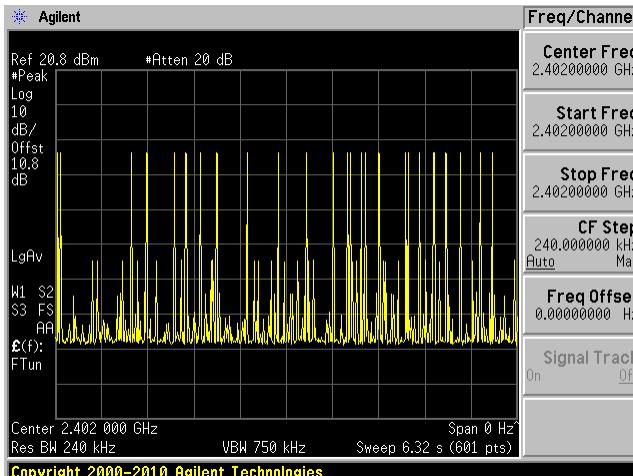

Middle Channel 2441 MHz

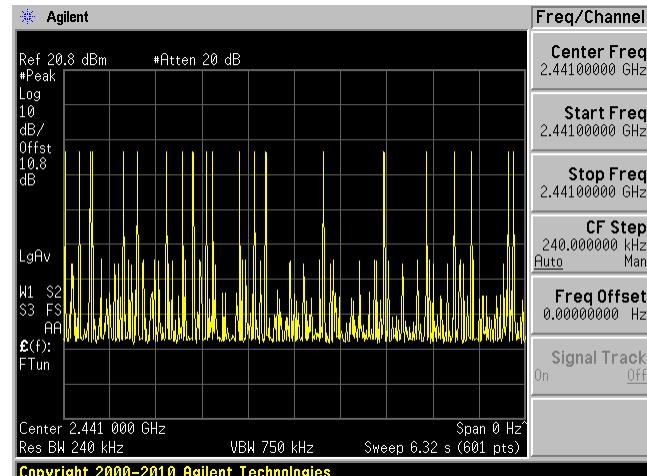

High Channel 2480 MHz

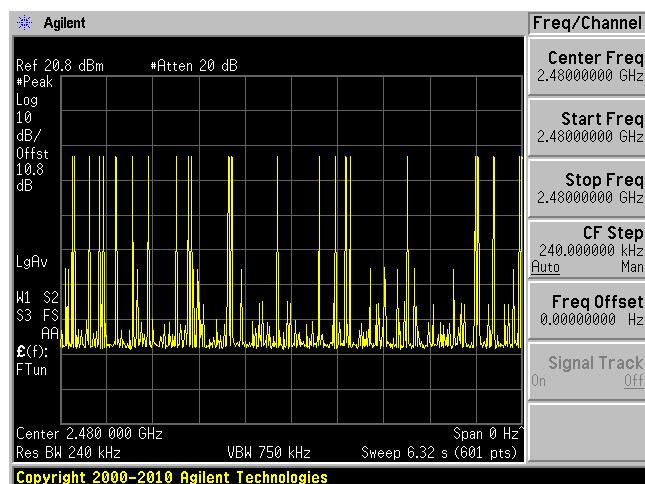

## 12 FCC §15.247(a)(1)(iii) & ISEDC RSS-247 §5.1(4) - Number of Hopping Channels

### 12.1 Applicable Standards

According to FCC §15.247(a) (1) (iii) and RSS-247 §5.1(4): Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

### 12.2 Test Procedure

Span = the frequency band of operation

RBW < 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller

VBW  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold

### 12.3 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
Agilent	Analyzer, Spectrum	E4446A	US44300386	2017-04-20	1 year
-	RF cable	-	-	Each time <sup>1</sup>	N/A
-	10dB attenuator	-	-	Each time <sup>1</sup>	N/A

Note<sup>1</sup>: cable and attenuator included in the test set-up will be checked each time before testing.

**Statement of Traceability:** BACL Corp. attests that all of the calibrations on the equipment items listed above were traceable to NIST or to another internationally recognized National Metrology Institute (NMI), and were compliant with A2LA Policy P102 (dated 9 June 2016) "A2LA Policy on Metrological Traceability".

### 12.4 Test Environmental Conditions

<b>Temperature:</b>	23° C
<b>Relative Humidity:</b>	42 %
<b>ATM Pressure:</b>	102.7 KPa


The testing was performed by Chin Ming Lui from 2018-04-05 to 2018-04-06 in RF site.

## 12.5 Test Results


Total 79 channels; please refer to the plots hereinafter.

### GFSK

39 Channels between 2400 to 2441 MHz

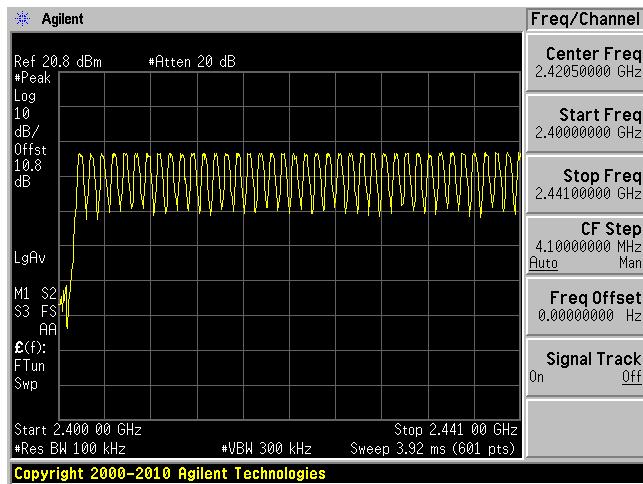

40 Channels Between 2441 to 2483.5 MHz

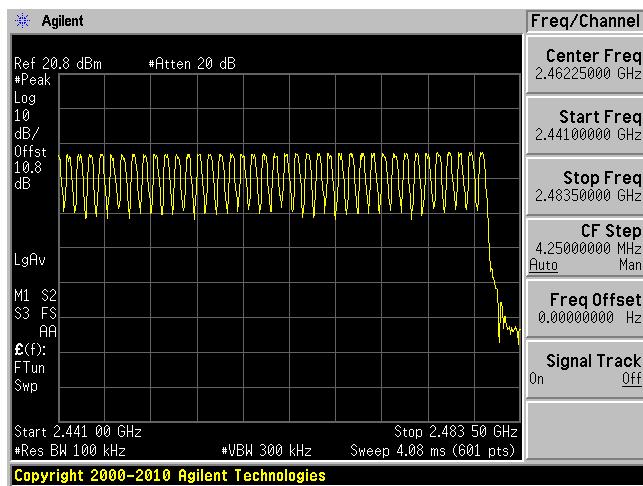

## 13 FCC §15.247(a)(1) & ISED RSS-247 §5.1(2) - Hopping Channel Separation

### 13.1 Applicable Standards

According to FCC §15.247(a) (1) and RSS-247 §5.1(2): Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

### 13.2 Test Procedure

Span = wide enough to capture the peaks of two adjacent channels

Resolution (or IF) Bandwidth (RBW)  $\approx$  30% of the channel spacing, adjust as necessary to best identify the center of each individual channel

Video (or Average) Bandwidth (VBW)  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold

### 13.3 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
Agilent	Analyzer, Spectrum	E4446A	US44300386	2017-04-20	1 year
-	RF cable	-	-	Each time <sup>1</sup>	N/A
-	10dB attenuator	-	-	Each time <sup>1</sup>	N/A

Note<sup>1</sup>: cable and attenuator included in the test set-up will be checked each time before testing.

**Statement of Traceability:** BACL Corp. attests that all of the calibrations on the equipment items listed above were traceable to NIST or to another internationally recognized National Metrology Institute (NMI), and were compliant with A2LA Policy P102 (dated 9 June 2016) "A2LA Policy on Metrological Traceability".

### 13.4 Test Environmental Conditions

<b>Temperature:</b>	23° C
<b>Relative Humidity:</b>	42 %
<b>ATM Pressure:</b>	102.7 KPa

The testing was performed by Chin Ming Lui from 2018-04-05 to 2018-04-06 in RF site.


### 13.5 Test Results

Channel	Frequency (MHz)	Channel Separation (kHz)	Limit > 2/3 20 dB OBW (kHz)
GFSK			
Low	2402	992	534.45
Middle	2441	1008	533.62
High	2480	1000	533.53
π/4-DQPSK			
Low	2402	1000	742.67
Middle	2441	1008	742.67
High	2480	1000	742.67
8DPSK			
Low	2402	1008	771.33
Middle	2441	1008	771.33
High	2480	1000	771.33


Please refer to following plots.

**GFSK**


Low Channel 2402 MHz

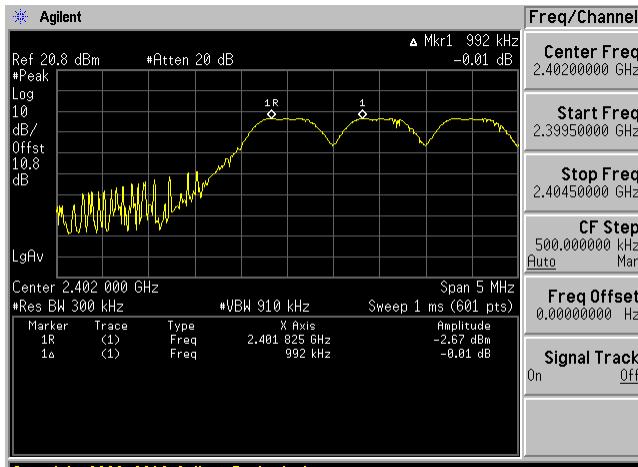

Middle Channel 2441 MHz

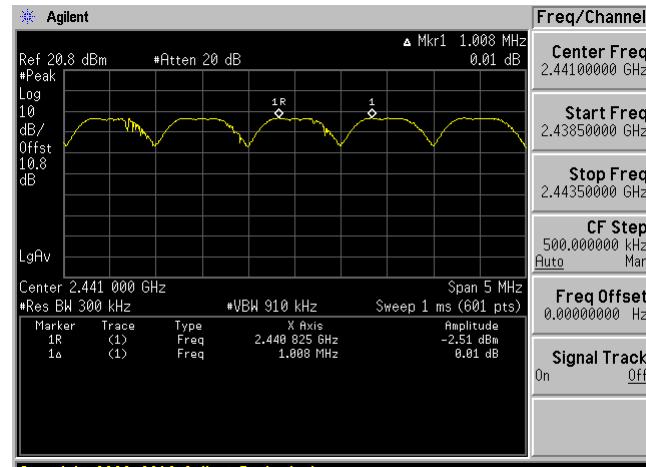


High Channel 2480 MHz

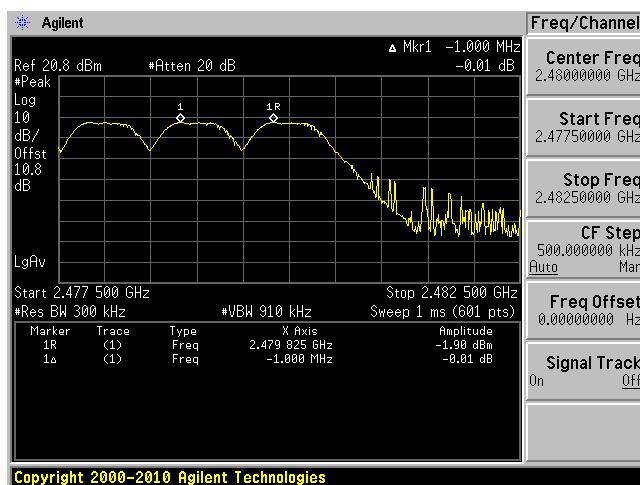


$\pi/4$ -DQPSK


Low Channel 2402 MHz

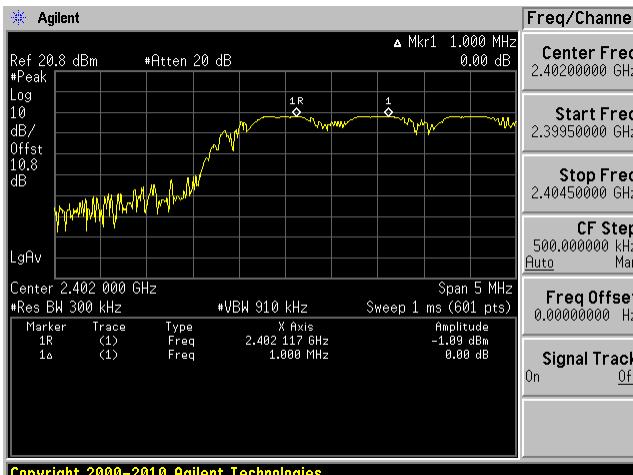

Middle Channel 2441 MHz

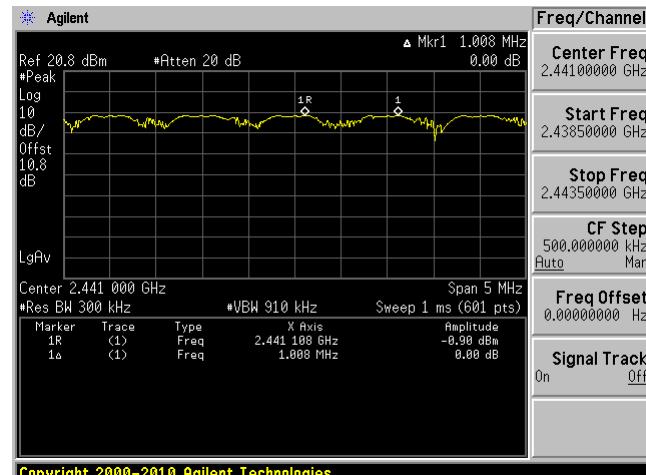


High Channel 2480 MHz

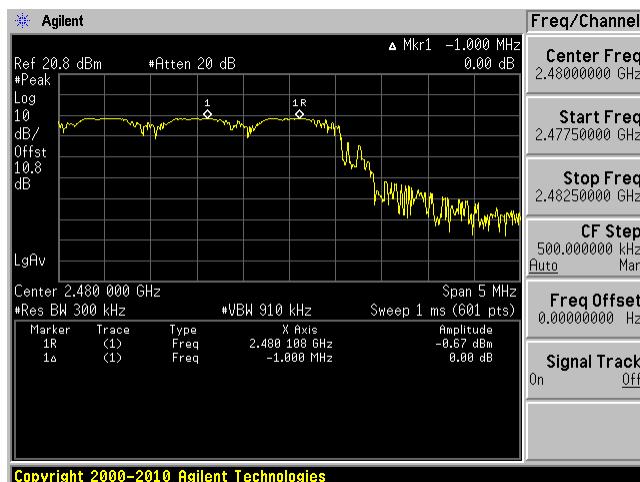


## 8DPSK


Low Channel 2402 MHz

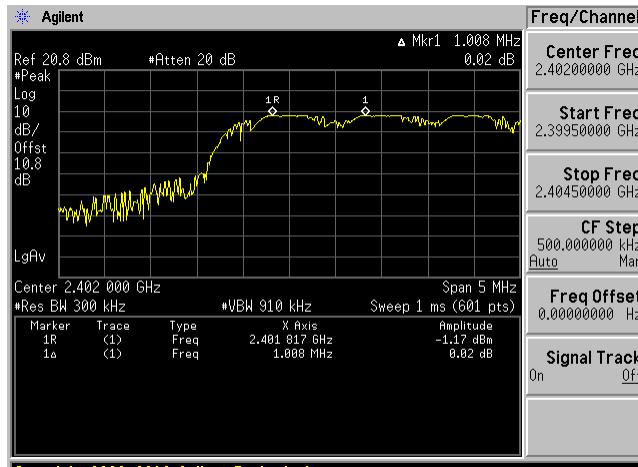

Middle Channel 2441 MHz

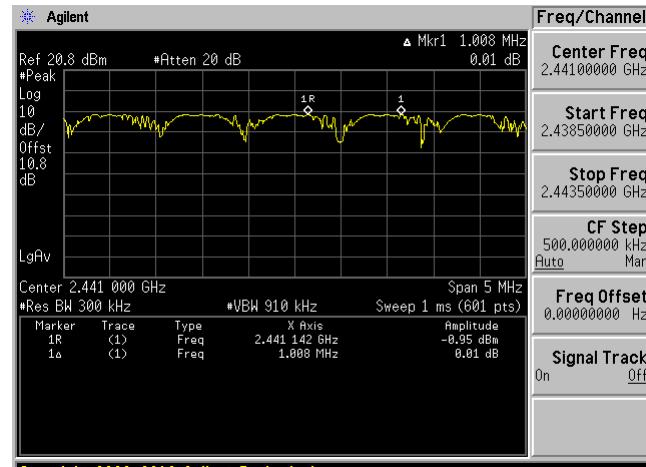

High Channel 2480 MHz

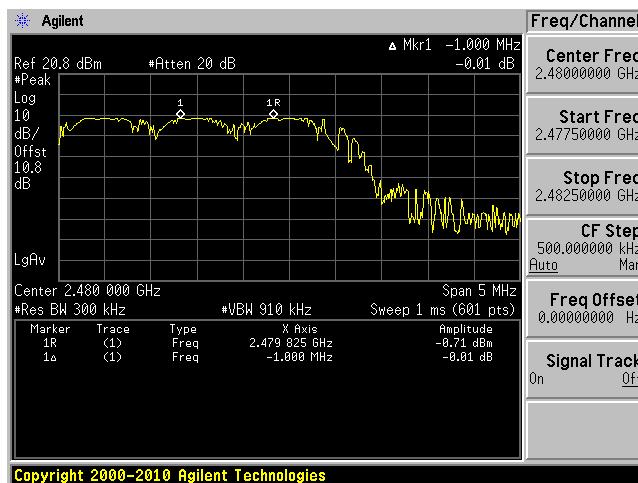

## 14 FCC §15.247(d) & ISEDC RSS-247 §5.5 - Spurious Emissions at Antenna Terminals

### 14.1 Applicable Standards

For FCC §15.247(d) in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

As per ISEDC RSS-247 §5.5, in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under Section 5.4(4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

### 14.2 Test Procedure

The RF output of the EUT was connected to a spectrum analyzer through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 100 kHz. Sufficient scans were taken to show any out of band emissions up to 10th harmonic.

### 14.3 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
Agilent	Analyzer, Spectrum	E4446A	US44300386	2017-04-20	1 year
-	RF cable	-	-	Each time <sup>1</sup>	N/A
-	10dB attenuator	-	-	Each time <sup>1</sup>	N/A

Note<sup>1</sup>: cable and attenuator included in the test set-up will be checked each time before testing.

**Statement of Traceability:** BACL Corp. attests that all of the calibrations on the equipment items listed above were traceable to NIST or to another internationally recognized National Metrology Institute (NMI), and were compliant with A2LA Policy P102 (dated 9 June 2016) "A2LA Policy on Metrological Traceability".

## 14.4 Test Environmental Conditions

<b>Temperature:</b>	23° C
<b>Relative Humidity:</b>	42 %
<b>ATM Pressure:</b>	102.7 KPa


The testing was performed by Chin Ming Lui from 2018-04-05 to 2018-04-06 in RF site.

## 14.5 Test Results


Please refer to following plots.

### GFSK


Low Channel 30 MHz – 1 GHz

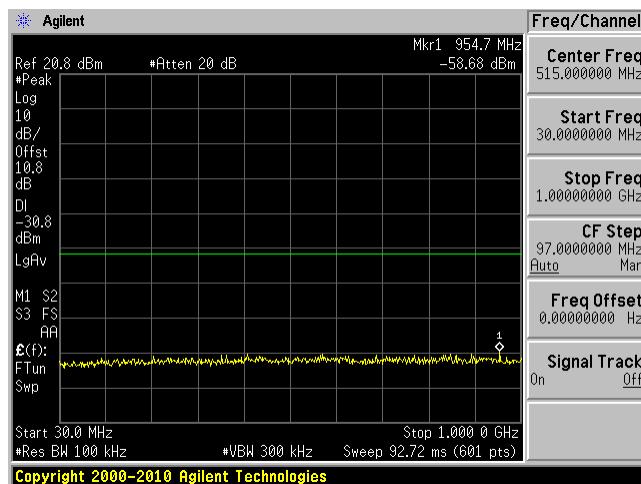


Low Channel 1 GHz – 25 GHz

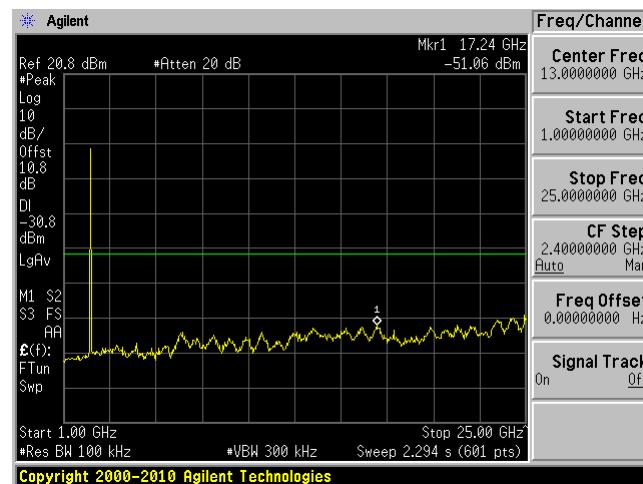


## Middle Channel 30 MHz – 1 GHz

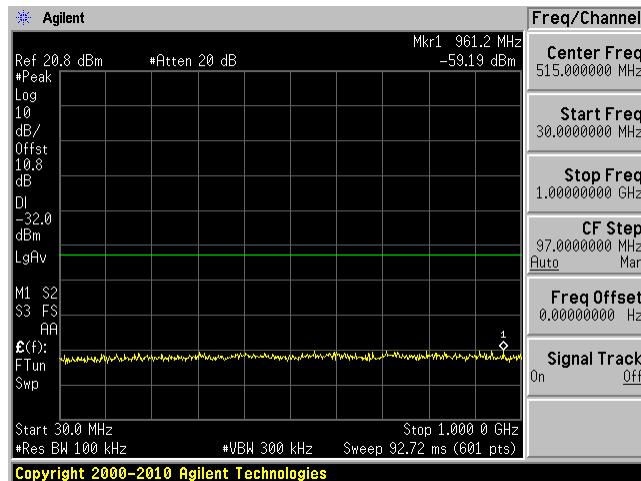


## Middle Channel 1 GHz – 25 GHz

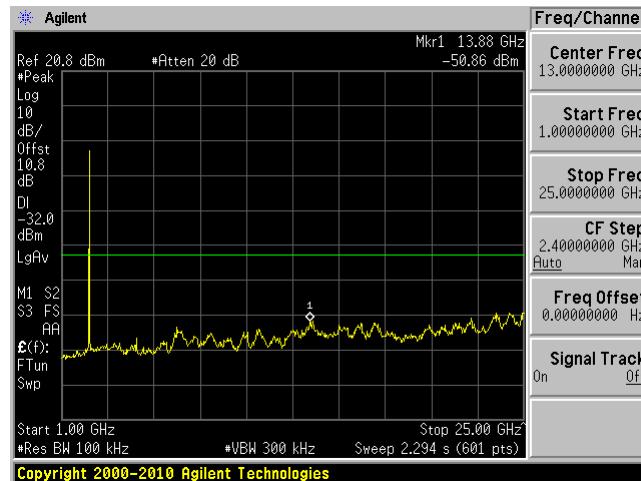

## High Channel 30 MHz – 1 GHz

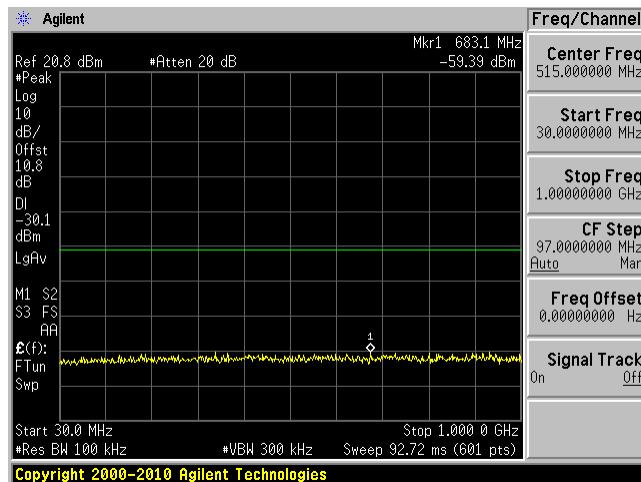



## High Channel 1 GHz – 25 GHz

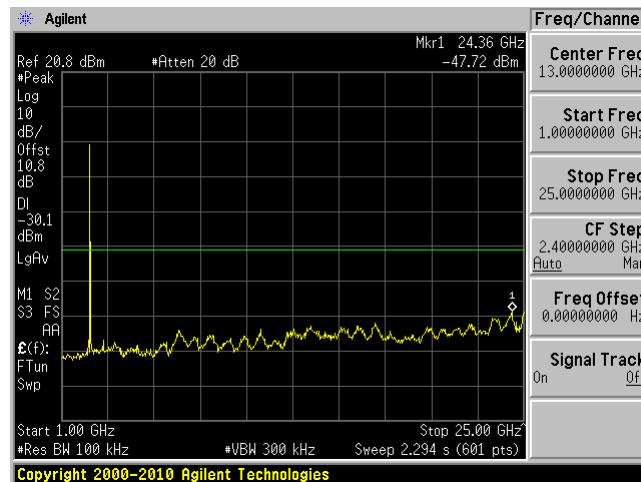

$\pi/4$ -DQPSK



Low Channel 30 MHz – 1 GHz

Low Channel 1 GHz – 25 GHz

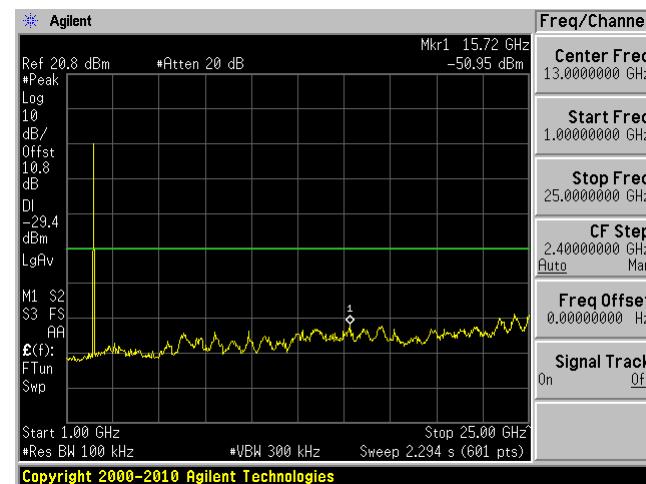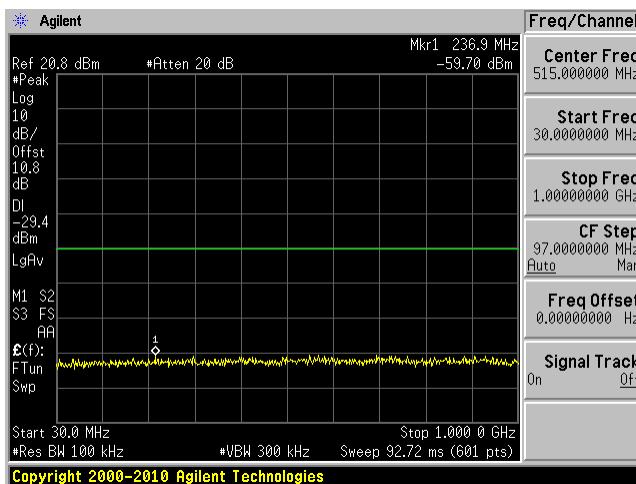


Middle Channel 30 MHz – 1 GHz


Middle Channel 1 GHz – 25 GHz

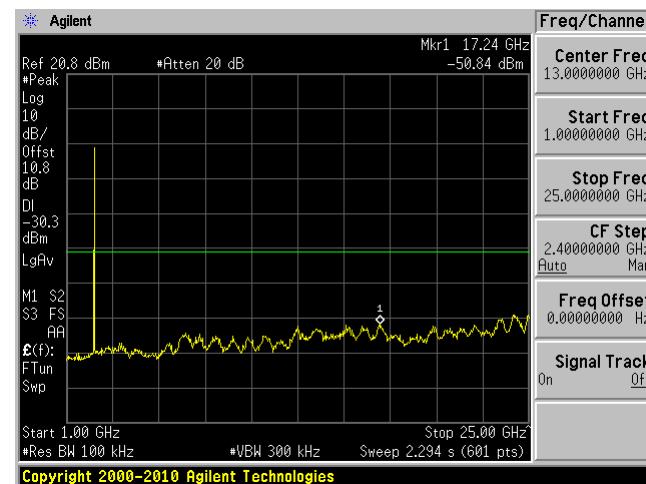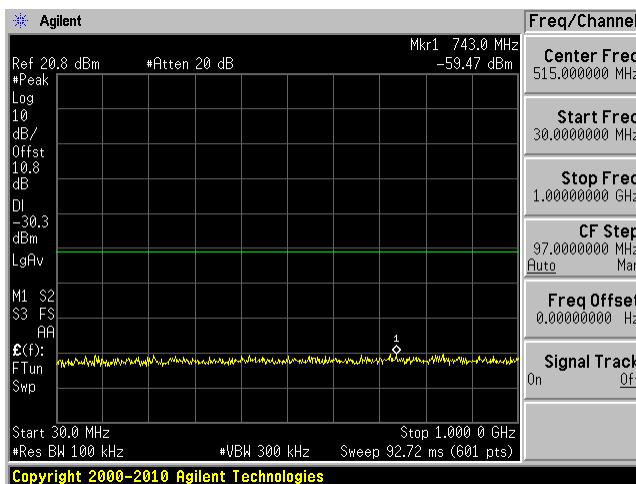

## High Channel 30 MHz – 1 GHz

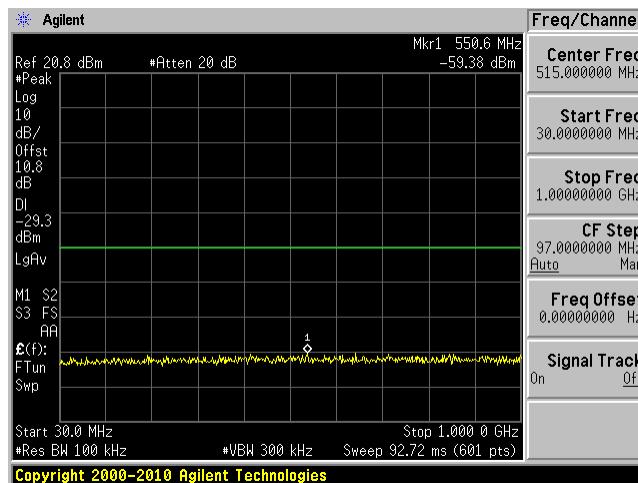


## High Channel 1 GHz – 25 GHz

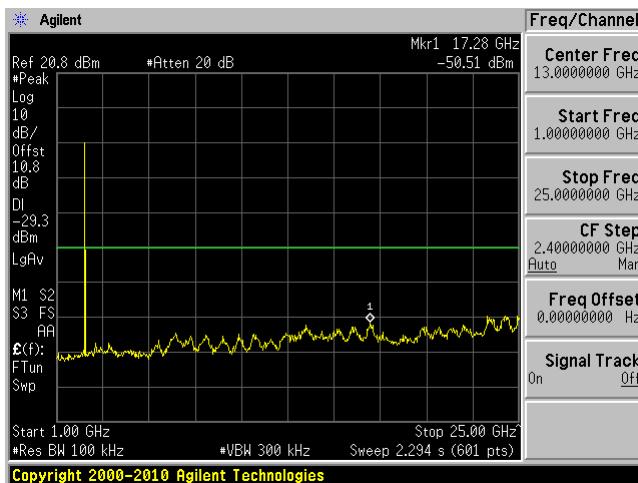


## 8DPSK


## Low Channel 30 MHz – 1 GHz

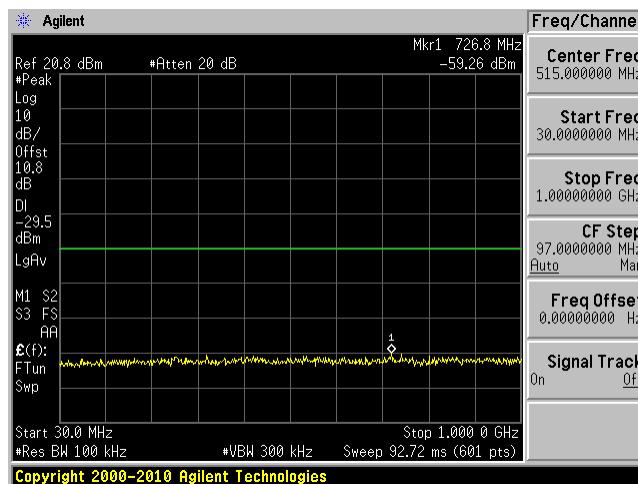


## Low Channel 1 GHz – 25 GHz

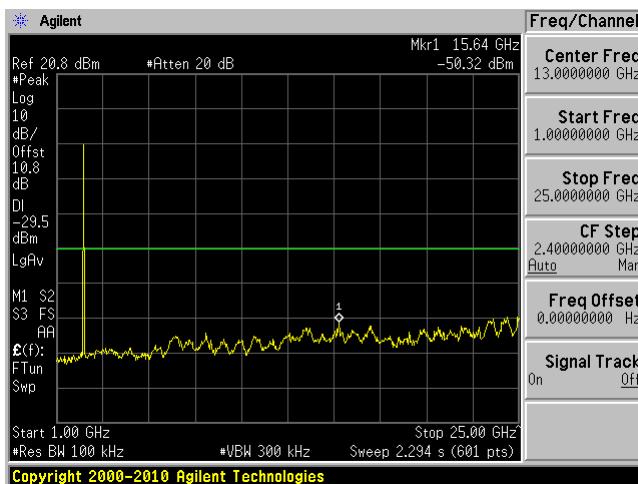


## Middle Channel 30 MHz – 1 GHz

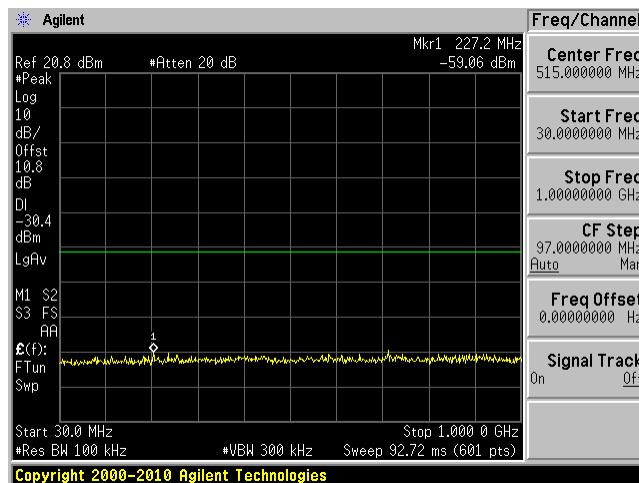


## Middle Channel 1 GHz – 25 GHz

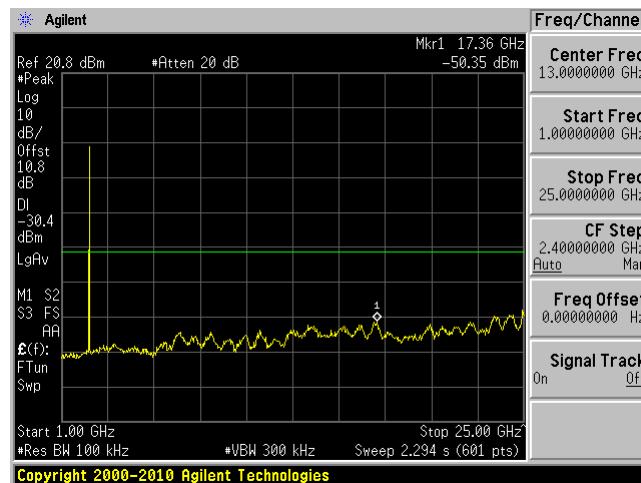

## High Channel 30 MHz – 1 GHz

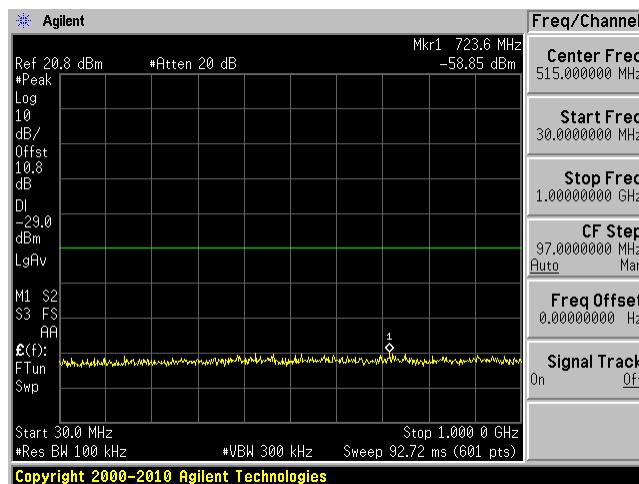

## High Channel 1 GHz – 25 GHz

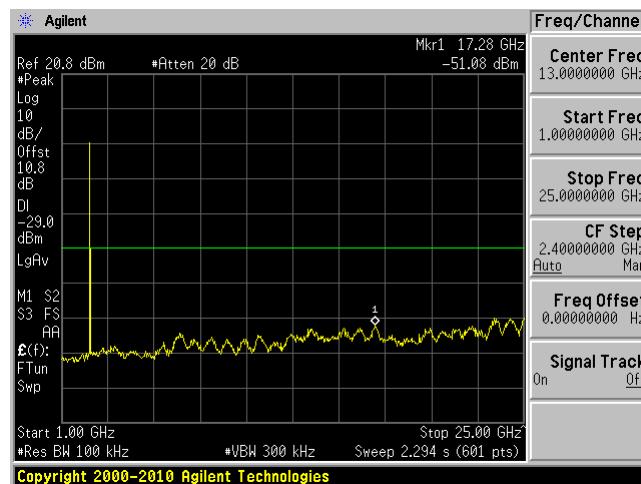

## 15 Exhibit A - FCC & ISED Equipment Labeling Requirements

### 15.1 FCC ID Label Requirements

**As per FCC §2.925,**

(a) Each equipment covered in an application for equipment authorization shall bear a nameplate or label listing the following:

(1) FCC Identifier consisting of the two elements in the exact order specified in §2.926. The FCC Identifier shall be preceded by the term FCC ID in capital letters on a single line, and shall be of a type size large enough to be legible without the aid of magnification.

Example: FCC ID: XXX123

Where: XXX—Grantee Code, 123—Equipment Product Code

**As per FCC §15.19,**

(a) In addition to the requirements in part 2 of this chapter, a device subject to certification, or verification shall be labeled as follows:

(3) All other devices shall bear the following statement in a conspicuous location on the device:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

(4) Where a device is constructed in two or more sections connected by wires and marketed together, the statement specified above is required to be affixed only to the main control unit. If the EUT is integrated within another device then a label affixed to the host shall also state, “Contains FCC ID: XXXXXX”

(5) When the device is so small or for such use that it is not practicable to place the statement specified under paragraph (a) of this section on it, the information required by this paragraph shall be placed in a prominent location in the instruction manual or pamphlet supplied to the user or, alternatively, shall be placed on the container in which the device is marketed. However, the FCC identifier or the unique identifier, as appropriate, must be displayed on the device.

### 15.2 IC Label Requirements

As per IC RSP-100 Section 3.1, the certification number shall appear as follows:

IC: XXXXXX-YYYYYYYY

Where:

- The letters “IC:” indicate that this is an Innovation, Science and Economic Development Canada’s certification number, but they are not part of the certification number. XXXXXXYYYYYYYYYYYY is the ISED certification number.
- XXXXXX is the CN assigned by Innovation, Science and Economic Development Canada. Newly assigned CNs will be made up of five numeric characters (e.g. “20001”) whereas existing CNs may consist of up to five numeric characters followed by an alphabetic character (e.g. “21A” or “15589J”).
- YYYYYYYYYYYY is the Unique Product Number (UPN) assigned by the applicant, made up of a maximum of 11 alphanumeric characters.
- The CN and UPN are limited to capital alphabetic characters (A-Z) and numerals (0-9) only. The use of punctuation marks or other symbols, including “wildcard” characters, is not permitted.


- The HVIN may contain punctuation marks or symbols but they shall not represent any indeterminate (“wildcard”) characters.



As per RSS-Gen §2.1 Equipment Labeling:


The application for equipment certification shall be submitted in accordance with Industry Canada's Radio Standards Procedure RSP-100, Radio Equipment Certification Procedure which sets out the requirements for certification and labelling of radio apparatus. RSP-100 shall be used in conjunction with RSS-Gen and other Radio Standards Specifications (RSSs) specifically applicable to the type of radio apparatus for which certification is sought.

### 12.3 Recommended Label Contents and Location


**SO-0G-3GG**

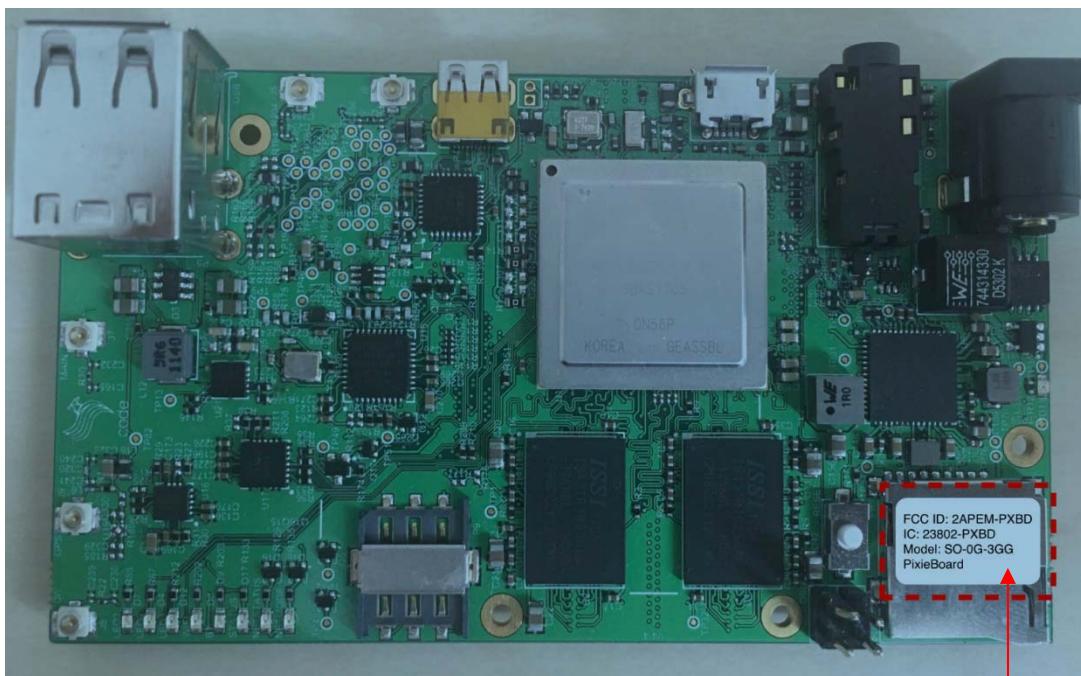

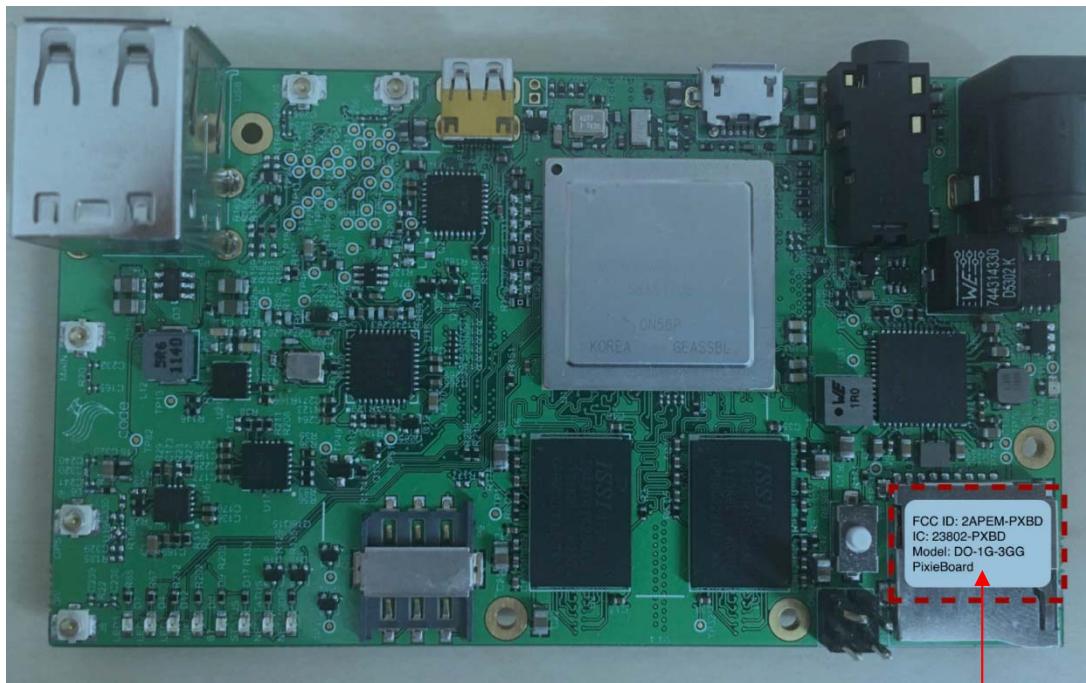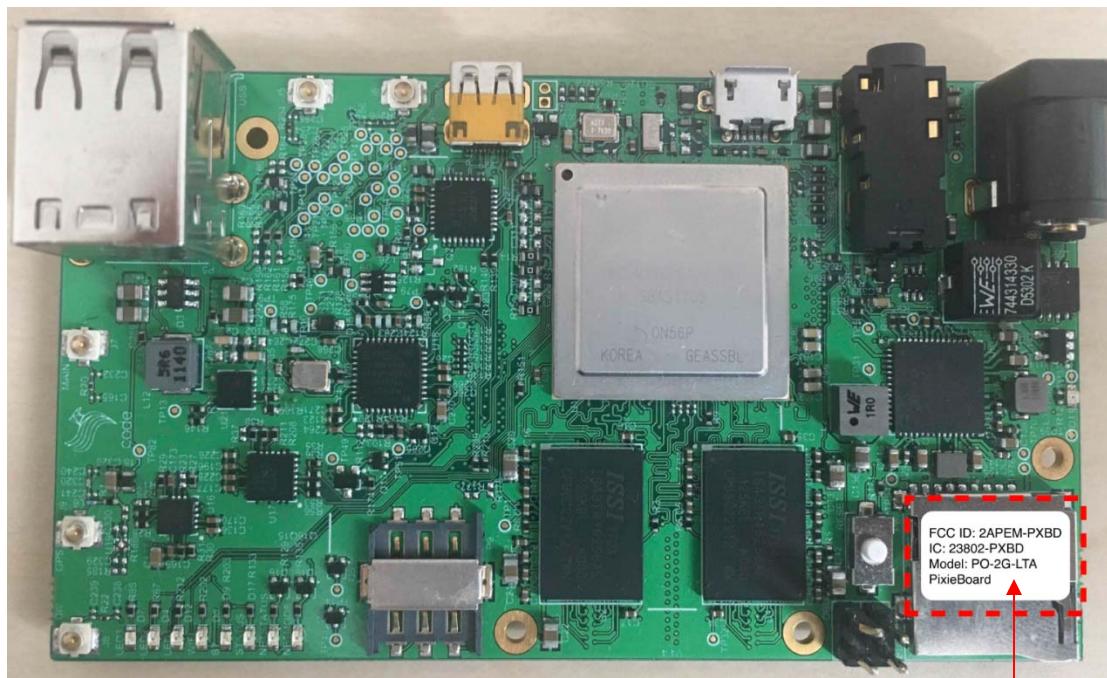**DO-1G-3GG****PO-2G-LTA**

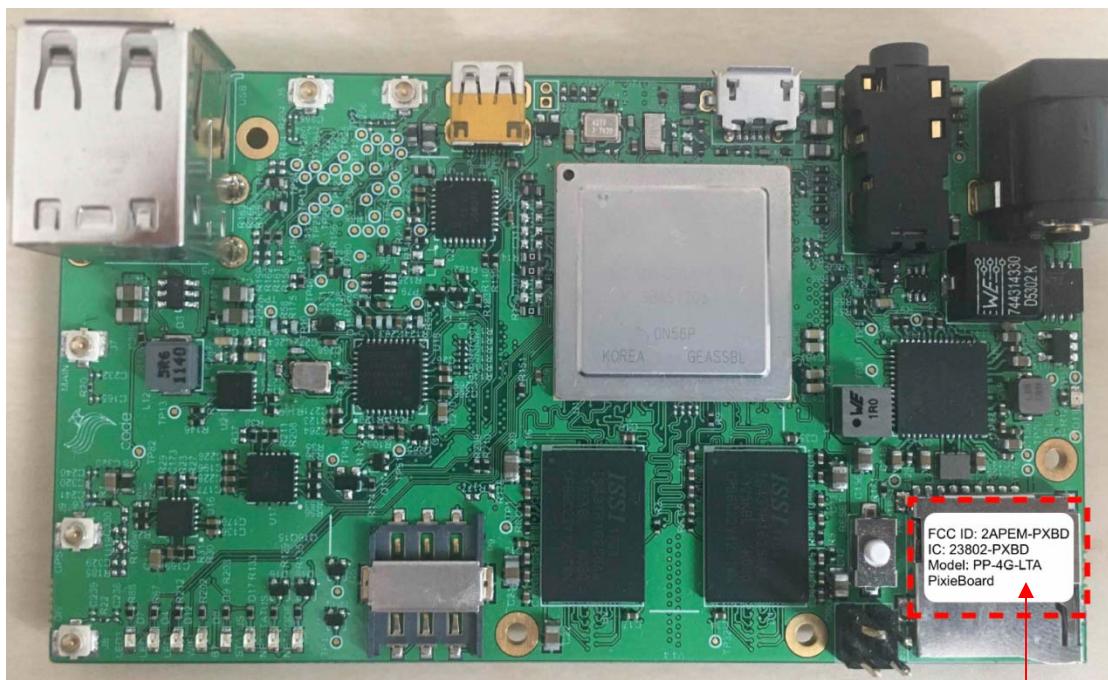**PP-4G-LTA**

## 16 Annex A (Informative) – Declaration of Similarity Letter



### DECLARATION OF SIMILARITY

May 10, 2018

To:  
FEDERAL COMMUNICATIONS COMMISSIONS  
Authorization and Evaluation Division  
7435 Oakland Mills Road  
Columbia, MD 21046

Dear Sir or Madam:

We *Code & Modules* hereby declare that product: *PixieBoard*, model(s): *SO-0G-3GG and PO-2G-LTA* is/are electrically identical with the same electromagnetic emissions and electromagnetic compatibility characteristics as model: *PP-4G-LTA and DO-1G-3GG* tested by BACL, the results of which are featured in BACL project: R1803143.

A description of the differences between the tested model and those that are declared similar are as follows:

*SO-0G-3GG: i.MX6 Solo processor, 516 MB of RAM and 3G module*  
*DO-1G-3GG: i.MX6 Dual lite processor, 1 GB of RAM and 3G module*  
*PO-2G-LTA: i.MX6 Quad processor, 2 GB of RAM and 4G/3G module*  
*PP-4G-LTA: i.MX6 QuadPlus processor, 4 GB of RAM and 4G/3G module*


Please contact me should there be need for any additional clarification or information.

Best Regards,

*Roberto Himmelbauer, Director of  
Consulting Solutions*  
4701 Patrick Henry Drive, Bldg 22,  
Suite 107 Santa Clara, CA 95054

QA-FR-227-A

11/05/2013



## DECLARATION OF SIMILARITY

May 10, 2018

To:  
Innovation, Science and Economic Development Canada  
Certification and Engineering Bureau  
P.O. Box 11490, Station 'H'  
3701 Carling Ave., Building 94  
Ottawa, Ontario K2H 8S2

Dear Sir or Madam:

We *Code & Modules* hereby declare that product: *PixieBoard*, model(s): *SO-0G-3GG and PO-2G-LTA* is/are electrically identical with the same electromagnetic emissions and electromagnetic compatibility characteristics as model: *PP-4G-LTA and DO-1G-3GG* tested by BACL, the results of which are featured in BACL project: *R1803143*.

A description of the differences between the tested model and those that are declared similar are as follows:

*SO-0G-3GG: i.MX6 Solo processor, 516 MB of RAM and 3G module*  
*DO-1G-3GG: i.MX6 Dual lite processor, 1 GB of RAM and 3G module*  
*PO-2G-LTA: i.MX6 Quad processor, 2 GB of RAM and 4G/3G module*  
*PP-4G-LTA: i.MX6 QuadPlus processor, 4 GB of RAM and 4G/3G module*

Please contact me should there be need for any additional clarification or information.

Best Regards,

A handwritten signature in black ink, appearing to read "Roberto Himmelbauer".

*Roberto Himmelbauer, Director of  
Consulting Solutions*

4701 Patrick Henry Drive, Bldg 22,  
Suite 107 Santa Clara, CA 95054

QA-FR-227-A

11/05/2013

## **17 Appendix**

Please see attachments:

Annex B – EUT Test Setup Photographs

Annex C – EUT Photographs

## 18 Annex D (Informative) - A2LA Electrical Testing Certificate



### Accredited Laboratory

A2LA has accredited

### BAY AREA COMPLIANCE LABORATORIES CORP.

Sunnyvale, CA

for technical competence in the field of

### Electrical Testing

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 General requirements for the competence of testing and calibration laboratories. This laboratory also meets the requirements of A2LA R222 - Specific Requirements - EPA ENERGY STAR Accreditation Program. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated 8 January 2009).

Presented this 30th day of August 2016.

A handwritten signature in blue ink, appearing to read 'Jim R. Bent'.

Senior Director of Quality & Communications  
For the Accreditation Council  
Certificate Number 3297.02  
Valid to September 30, 2018



For the tests to which this accreditation applies, please refer to the laboratory's Electrical Scope of Accreditation.

----- END OF REPORT -----