

# Test Report

**Report No.** : MTi250612003-0102E2  
**Date of Issue** : 2025-07-21  
**Applicant** : Electronic Silk Road (Shenzhen) Tech Co., Ltd  
**Product** : ESR Magnetic Car Charger  
**Model(s)** : 2B528, 2B529, 2B528-01  
**FCC ID** : 2APEW-2B528

**Shenzhen Microtest Co., Ltd.**

# TEST REPORT

Report No.: MTi250612003-0102E2

## Table of contents

<b>1 General Description .....</b>	<b>4</b>
1.1 Description of the EUT .....	4
1.2 Description of test modes .....	5
1.3 Description of support units .....	6
<b>2 Measurement uncertainty .....</b>	<b>6</b>
<b>3 Test facilities and accreditations .....</b>	<b>7</b>
3.1 Test laboratory .....	7
<b>4 List of test equipment .....</b>	<b>8</b>
<b>5 Test result .....</b>	<b>9</b>
5.2 Test setup .....	10
5.3 Test Procedures .....	10
5.4 Information of test equipment .....	11
5.5 Test results .....	12
<b>Photographs of the Test Setup .....</b>	<b>14</b>
<b>Photographs of the EUT .....</b>	<b>14</b>

**TEST REPORT**

Report No.: MTi250612003-0102E2

<b>Test Result Certification</b>	
Applicant	Electronic Silk Road (Shenzhen) Tech Co., Ltd
Applicant Address	Room 1601, Building 1D, Creative City, Liu Xian Avenue, Nan Shan District, Shenzhen, Guangdong, China
Manufacturer	Electronic Silk Road (Shenzhen) Tech Co., Ltd
Manufacturer Address	Room 1601, Building 1D, Creative City, Liu Xian Avenue, Nan Shan District, Shenzhen, Guangdong, China
<b>Product description</b>	
Product name	ESR Magnetic Car Charger
Trademark	ESR
Model name	2B528
Series Model(s)	2B529, 2B528-01
Standards	47 CFR PART 1, § 1.1310 part2.1091
Test method	KDB 680106 D01 Wireless Power Transfer v04
<b>Testing Information</b>	
Date of test	2025-07-09 to 2025-07-11
Test Result	Pass
Prepared by:	Maleah Deng
Reviewed by:	David Lee
Approved by:	Lewis Lian

## 1 General Description

### 1.1 Description of the EUT

Product name:	ESR Magnetic Car Charger
Model name:	2B528
Series Model(s):	2B529, 2B528-01
Model difference:	All the models are the same circuit and module, except the model name and bracket.
Electrical rating:	Input: DC 12V/2.75A, DC 15V/2.2A Wireless Output: 5W/7.5W/10W/15W/25W
Accessories:	Cable: USB-C to USB-C cable 100cm*1  ESR 58W Car charger Model: M9C0903 Input: DC 12V-24V, 7A Output: USB-A: DC 5V/3A, DC 9V/2A, DC 12V/1.5A; USB-C: DC 5V/3A, DC 9V/3A, DC 12V/3A, DC 15V/2.66A, DC 20/2A, PSS: DC 5-16V/2.5A Total Output: 58W
Hardware version:	V1.0
Software version:	V1.0
Test sample(s) number:	MTi250612003-02-R001

### RF specification

Operating frequency range:	115-205kHz(5W, 7.5W, 10W, 15W(EPP)); 360kHz(15W(MPP), 25W)
Modulation type:	ASK
Antenna(s) type:	Coil Antenna

# TEST REPORT

Report No.: MTi250612003-0102E2

## 1.2 Description of test modes

All the test modes were carried out with the EUT in normal operation, the final test mode of the EUT was the worst test mode for emission test, which was shown in this report and defined as:

No.	Emission test modes
Mode1	Powered by Accumulator(12V)+Wireless Output(5W)
Mode2	Powered by Accumulator(12V)+Wireless Output(7.5W)
Mode3	Powered by Accumulator(12V)+Wireless Output(10W)
Mode4	Powered by Accumulator(12V)+Wireless Output(15W EPP)
Mode5	Powered by Accumulator(12V)+Wireless Output(15W MPP)
Mode6	Powered by Accumulator(12V)+Wireless Output(25W)
Mode7	Powered by Accumulator(24V)+Wireless Output(5W)
Mode8	Powered by Accumulator(24V)+Wireless Output(7.5W)
Mode9	Powered by Accumulator(24V)+Wireless Output(10W)
Mode10	Powered by Accumulator(24V)+Wireless Output(15W EPP)
Mode11	Powered by Accumulator(24V)+Wireless Output(15W MPP)
Mode12	Powered by Accumulator(24V)+Wireless Output(25W)
Mode13	Powered by Accumulator(12V)+Standby
Mode14	Powered by Accumulator(24V)+Standby

# TEST REPORT

Report No.: MTi250612003-0102E2

## 1.3 Description of support units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

<b>Support equipment list</b>			
Description	Model	Serial No.	Manufacturer
Mobile phone	iPhone 16 pro max	/	Apple
Accumulator	6-QW-45(370)-L	/	Camel Group Co., Ltd.
Mobile phone	Find X3	/	OPPO

<b>Support cable list</b>			
Description	Length (m)	From	To
/	/	/	/

## 2 Measurement uncertainty

Parameter	Expanded Uncertainty
Magnetic field measurements(3kHz~10MHz)	±14.8%
Electric field measurements(3kHz~10MHz)	±17.5%

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

# TEST REPORT

Report No.: MTi250612003-0102E2

## 3 Test facilities and accreditations

### 3.1 Test laboratory

Test laboratory:	Shenzhen Microtest Co., Ltd.
Test site location:	101, No. 7, Zone 2, Xinxing Industrial Park, Fuhai Avenue, Xinhe Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China
Telephone:	(86-755)88850135
Fax:	(86-755)88850136
CNAS Registration No.:	CNAS L5868
FCC Registration No.:	448573

# TEST REPORT

Report No.: MTi250612003-0102E2

## 4 List of test equipment

No.	Equipment	Manufacturer	Model	Serial No.	Cal. date	Cal. Due
MTI-E143	Near-field Electric and Magnetic Field Sensor System	SPEAG	MAGPy-8H3 D+ED3	3101	2024/3/12	2027/3/11

No.	Equipment	Manufacturer	Model	Software version:	Cal. date	Cal. Due
MTI-E016S	MPE test software	SPEAG	MAGPY 2.6	2.6	/	/

# TEST REPORT

Report No.: MTI250612003-0102E2

## 5 Test result

### 5.1.1 Requirement

§1.1310: The criteria listed in the following table shall be used to evaluate the environment impact of human exposure to radio frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of FCC part 2.1093 of this chapter.

**Table 1 to §1.1310(e)(1) - Limits for Maximum Permissible Exposure (MPE)**

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm <sup>2</sup> )	Averaging time (minutes)
<b>(i) Limits for Occupational/Controlled Exposure</b>				
0.3-3.0	614	1.63	*(100)	≤6
3.0-30	1842/f	4.89/f	*(900/f <sup>2</sup> )	<6
30-300	61.4	0.163	1.0	<6
300-1500			f/300	<6
1500-100000			5	<6
<b>(ii) Limits for General Population/Uncontrolled Exposure</b>				
0.3-1.34	614	1.63	*(100)	<30
1.34-30	824/f	2.19/f	*(180/f <sup>2</sup> )	<30
30-300	27.5	0.073	0.2	<30
300-1500			f/1500	<30
1500-100000			1.0	<30


f = frequency in MHz

\* = Plane-wave equivalent power density

**Note 1:** Occupational/controlled exposure limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure.

**Note 2:** General population/uncontrolled exposure limits apply in situations in which the general public may be exposed, or in which persons who are exposed as a consequence of their employment may not be fully aware of the potential for exposure or cannot exercise control over their exposure.

## 5.2 Test setup

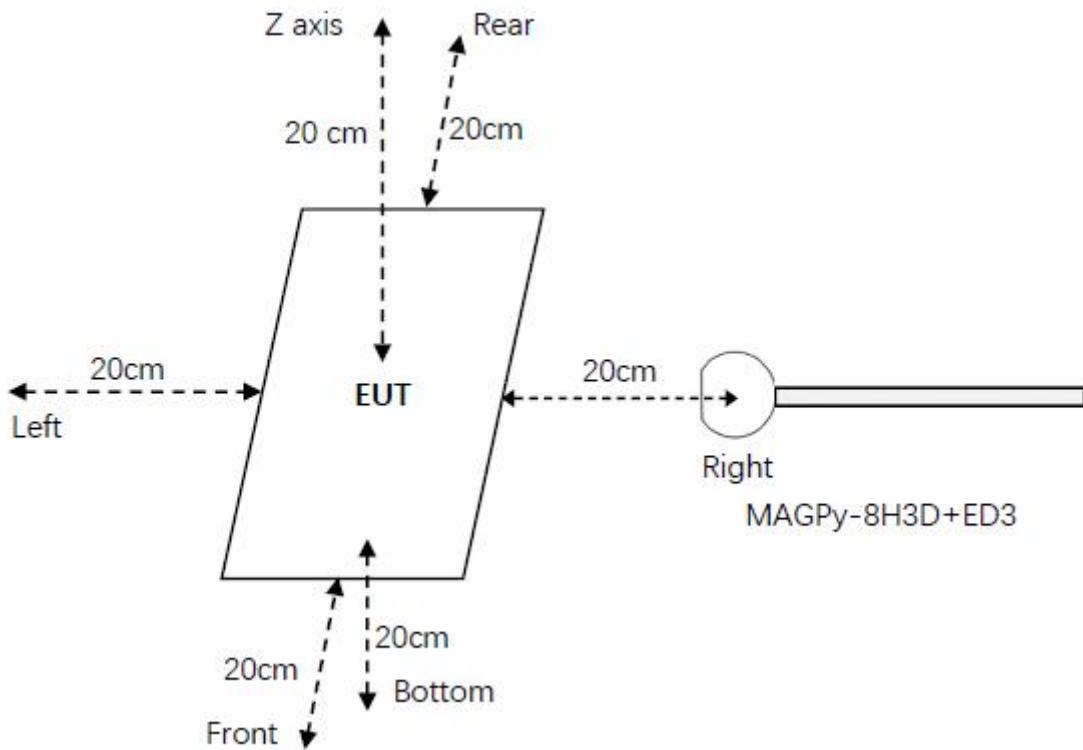

## 5.3 Test Procedures

- The RF exposure test was performed in anechoic chamber.
- E and H-field measurements should be made with these devices considered to meet the § 2.1091-Mobile conditions ("generally be used in such a way that a separation distance of at least 20 centimeters is normally maintained between the RF source's radiating structure(s) and [the nearest person]").
- The highest emission level was recorded and compared with limit.
- The EUT was measured according to the dictates of KDB 680106 D01 Wireless Power Transfer v04.

# TEST REPORT

Report No.: MTi250612003-0102E2

## 5.4 Information of test equipment

Test equipment: MAGPy-8H3D+ED3	
Diameter	60mm
8 isotropic H-field sensors	Concentric loops of 1cm <sup>2</sup> arranged at the corner of a cube of 22mm side length
1 isotropic E-field sensor	Orthogonal dipole/monopole (arm length: 50mm)
Measurement center	18.5mm from the probe tip
Dimensions	110*635*35mm (MAGPy-8H3D+E3D V2 & MAGPy-DAS V2)


Test probe, without the casing

# TEST REPORT

Report No.: MTi250612003-0102E2

## 5.5 Test results

### Test condition 1: Mode 4 operating mode with client device (1 % battery status of client device)

Probe Position	E-field (V/m)			H-field (A/m)		
	Measurement	Limit	Percentage (%)	Measurement	Limit	Percentage (%)
Z axis	0.25	614	0.17%	0.008	1.63	1.23%
Left	1.02			0.02		
Right	0.44			0.008		
Front	0.40			0.009		
Rear	0.19			0.009		
Bottom	0.56			0.008		

### Test condition 2: Mode 4 operating mode with client device (50 % battery status of client device)

Probe Position	E-field (V/m)			H-field (A/m)		
	Measurement	Limit	Max. Percentage (%)	Measurement	Limit	Max. Percentage (%)
Z axis	0.27	614	0.18%	0.009	1.63	1.35%
Left	1.10			0.022		
Right	0.48			0.009		
Front	0.43			0.011		
Rear	0.21			0.010		
Bottom	0.60			0.009		

### Test condition 3: Mode 4 operating mode with client device (99 % battery status of client device)

Probe Position	E-field (V/m)			H-field (A/m)		
	Measurement	Limit	Percentage (%)	Measurement	Limit	Percentage (%)
Z axis	0.24	614	0.16%	0.008	1.63	1.17%
Left	0.96			0.019		
Right	0.41			0.008		
Front	0.38			0.009		
Rear	0.18			0.008		
Bottom	0.53			0.007		

# TEST REPORT

Report No.: MTi250612003-0102E2

## Test condition 1: Mode 6 operating mode with client device (1 % battery status of client device)

Probe Position	E -field (V/m)			H-field (A/m)		
	Measurement	Limit	Percentage (%)	Measurement	Limit	Percentage (%)
Z axis	0.49	614	0.13%	0.003	1.63	0.43%
Left	0.77			0.004		
Right	0.37			0.004		
Front	0.25			0.007		
Rear	0.23			0.006		
Bottom	0.54			0.004		

## Test condition 2: Mode 6 operating mode with client device (50 % battery status of client device)

Probe Position	E -field (V/m)			H-field (A/m)		
	Measurement	Limit	Max. Percentage (%)	Measurement	Limit	Max. Percentage (%)
Z axis	0.51	614	0.13%	0.004	1.63	0.49%
Left	0.81			0.005		
Right	0.39			0.005		
Front	0.26			0.008		
Rear	0.24			0.007		
Bottom	0.57			0.005		

## Test condition 3: Mode 6 operating mode with client device (99 % battery status of client device)

Probe Position	E -field (V/m)			H-field (A/m)		
	Measurement	Limit	Percentage (%)	Measurement	Limit	Percentage (%)
Z axis	0.47	614	0.12%	0.003	1.63	0.37%
Left	0.74			0.004		
Right	0.36			0.004		
Front	0.24			0.006		
Rear	0.22			0.006		
Bottom	0.52			0.004		



# TEST REPORT

Report No.: MTi250612003-0102E2

## Photographs of the Test Setup

See the Appendix - Test Setup Photos.



## Photographs of the EUT

See the Appendix - EUT Photos.



## Statement

1. This report is invalid without the seal and signature of the laboratory.
2. The test results of this report are only responsible for the samples submitted. Client shall be responsible for representativeness of the sample and authenticity of the material.
3. The report shall not be partially reproduced without the written consent of the Laboratory.
4. This report is invalid if transferred, altered or tampered with in any form without authorization.
5. The observations or tests with special mark fall outside the scope of accreditation, and are only used for purpose of commission, research, training, internal quality control etc.
6. Any objection to this report shall be submitted to the laboratory within 15 days from the date of receipt of the report.

\*\*\*\*\* END OF REPORT \*\*\*\*\*