



FCC Part 15C Test Report

FCC ID: 2APJICAMERA

Product Name:	Indoor Security Camera
Trademark:	N/A
Model Name :	C1 Indoor Camera
Prepared For :	People Power Company
Address :	GSVLabs, 585 Broadway Street Redwood City, CA 94063 USA
Prepared By :	Shenzhen BCTC Testing Co., Ltd.
Address :	BCTC Building & 1-2F, East of B Building, Pengzhou Industrial, Fuyuan 1st Road, Qiaotou Community, Fuyong Street, Bao'an District, Shenzhen, China
Test Date:	Mar. 14 - Mar. 21, 2018
Date of Report :	Mar. 21, 2018
Report No.:	BCTC-LH180200358E



TEST RESULT CERTIFICATION

Applicant's name..... : **People Power Company**

Address..... : GSVLabs, 585 Broadway Street Redwood City, CA 94063 USA

Manufacture's Name..... : **People Power Company**

Address..... : GSVLabs, 585 Broadway Street Redwood City, CA 94063 USA

Product description

Product name..... : **Indoor Security Camera**

Model and/or type reference : C1 Indoor Camera

Standards..... : FCC Part15.247
ANSI C63.10:2013

This device described above has been tested by BCTC, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of BCTC, this document may be altered or revised by BCTC, personal only, and shall be noted in the revision of the document.

Prepared by(Engineer): Eric Yang

Reviewer(Supervisor): Jade Yang

Approved(Manager): Carson Zhang



**Table of Contents**

	Page
1 . SUMMARY OF TEST RESULTS	5
1.1 TEST FACILITY	6
1.2 MEASUREMENT UNCERTAINTY	6
2 . GENERAL INFORMATION	7
2.1 GENERAL DESCRIPTION OF EUT	7
2.2 DESCRIPTION OF TEST MODES	8
2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	9
2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	9
2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	10
3 . EMC EMISSION TEST	11
3.1 CONDUCTED EMISSION MEASUREMENT	11
3.1.1 POWER LINE CONDUCTED EMISSION LIMITS	11
3.1.2 TEST PROCEDURE	11
3.1.3 DEVIATION FROM TEST STANDARD	11
3.1.4 TEST SETUP	12
3.1.5 EUT OPERATING CONDITIONS	12
3.1.6 TEST RESULTS	13
3.2 RADIATED EMISSION MEASUREMENT	19
3.2.1 RADIATED EMISSION LIMITS	19
3.2.2 TEST PROCEDURE	20
3.2.3 DEVIATION FROM TEST STANDARD	20
3.2.4 TEST SETUP	20
3.2.5 EUT OPERATING CONDITIONS	21
3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)	22
3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ)	23
3.3 RADIATED BAND EMISSION MEASUREMENT	33
3.3.1 TEST REQUIREMENT:	33
3.3.2 TEST PROCEDURE	33
3.3.3 DEVIATION FROM TEST STANDARD	34
3.3.4 TEST SETUP	34
3.3.5 EUT OPERATING CONDITIONS	34
4 . POWER SPECTRAL DENSITY TEST	36
4.1 APPLIED PROCEDURES / LIMIT	36
4.1.1 TEST PROCEDURE	36
4.1.2 DEVIATION FROM STANDARD	36

**Table of Contents**

	Page
4.1.3 TEST SETUP	36
4.1.4 EUT OPERATION CONDITIONS	36
4.1.5 TEST RESULTS	37
5 . BANDWIDTH TEST	45
5.1 APPLIED PROCEDURES / LIMIT	45
5.1.1 TEST PROCEDURE	45
5.1.2 DEVIATION FROM STANDARD	45
5.1.3 TEST SETUP	45
5.1.4 EUT OPERATION CONDITIONS	45
5.1.5 TEST RESULTS	46
6 . PEAK OUTPUT POWER TEST	54
6.1 APPLIED PROCEDURES / LIMIT	54
6.1.1 TEST PROCEDURE	54
6.1.2 DEVIATION FROM STANDARD	54
6.1.3 TEST SETUP	54
6.1.4 EUT OPERATION CONDITIONS	54
6.1.5 TEST RESULTS	55
7 . 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE	56
7.1 APPLICABLE STANDARD	56
7.2 TEST PROCEDURE	56
7.3 DEVIATION FROM STANDARD	56
7.4 TEST SETUP	56
7.5 EUT OPERATION CONDITIONS	56
7.1 TEST RESULTS	56
8 . DUTY CYCLE OF TEST SIGNAL	65
8.1 STANDARD REQUIREMENT	65
8.2 FORMULA:	65
9 . ANTENNA REQUIREMENT	68
9.1 STANDARD REQUIREMENT	68
9.2 EUT ANTENNA	68
10 . EUT TEST PHOTO	69
11 . EUT PHOTO	71
APPENDIX-PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS	



1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.247) , Subpart C			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	
15.247 (a)(2)	6dB Bandwidth	PASS	
15.247 (b)	Peak Output Power	PASS	
15.247 (c)	Radiated Spurious Emission	PASS	
15.247 (d)	Power Spectral Density	PASS	
15.205	Restricted Band of Operation	PASS	
15.247 (d)	Band Edge (Out of Band Emissions)	PASS	
15.203	Antenna Requirement	PASS	

NOTE:

(1) "N/A" denotes test is not applicable in this Test Report



1.1 TEST FACILITY

Shenzhen BCTC Testing Co., Ltd.

Add. : BCTC Building & 1-2F, East of B Building, Pengzhou Industrial, Fuyuan 1st Road, Qiaotou Community, Fuyong Street, Bao'an District, Shenzhen, China

Test Firm Registration Number: 712850

IC Registered No.: 23583

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95 %**.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 1.38\text{dB}$
2	RF power,conducted	$\pm 0.16\text{dB}$
3	Spurious emissions,conducted	$\pm 0.21\text{dB}$
4	All emissions,radiated(<1G)	$\pm 4.68\text{dB}$
5	All emissions,radiated(>1G)	$\pm 4.89\text{dB}$
6	Temperature	$\pm 0.5^{\circ}\text{C}$
7	Humidity	$\pm 2\%$



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	Indoor Security Camera	
Trade Name	N/A	
Model Name	C1 Indoor Camera	
Serial Model	N/A	
Model Difference	N/A	
Product Description	Operation Frequency:	802.11b/g/n20MHz:2412~2462 MHz 802.11n40MHz:2422~2452 MHz
	Modulation Type:	WIFI: OFDM/DSSS
	Bit Rate of Transmitter	802.11b:11/5.5/2/1 Mbps 802.11g:54/48/36/24/18/12/9/6Mbps 802.11n Up to 150Mbps
	Number Of Channel	802.11b/g/n20MHz:11 CH 802.11n40MHz: 7 CH
	Antenna Designation:	Please see Note 3.
	Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual.	
Channel List	Please refer to the Note 2.	
Power Source	Main unit: DC 5V External adaptor: Input:AC100-240V~50/60Hz 0.3A Output:5V2A	
hardware version	--	
Software version	--	
Serial number	--	
Connecting I/O Port(s)	Please refer to the User's Manual	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.



2.

Channel List for 802.11b/g/n(20)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	04	2427	07	2442	10	2457
02	2417	05	2432	08	2447	11	2462
03	2422	06	2437	09	2452		

Channel List for 802.11n(40)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
03	2422	05	2432	07	2442	09	2452
04	2427	06	2437	08	2447		

3.

Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Gain (dBi)	NOTE
1	N/A	N/A	FPCB Antenna	1	

2.2 DESCRIPTION OF TEST MODES

Pretest Mode	Description
Mode 1	802.11b CH1/ CH6/ CH11
Mode 2	802.11g CH1/ CH6/ CH11
Mode 3	802.11n20 CH1/ CH6/ CH11
Mode 4	802.11n40 CH3/ CH6/ CH9
Mode 5	Link Mode

Conducted Emission	
Final Test Mode	Description
Mode 5	Link Mode

For Radiated Emission	
Final Test Mode	Description
Mode 1	802.11b CH1/ CH6/ CH11
Mode 2	802.11g CH1/ CH6/ CH11
Mode 3	802.11n20 CH1/ CH6/ CH11
Mode 4	802.11n40 CH3/ CH6/ CH9


Note:

(1) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported.



2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Conducted/ Radiated Spurious Emission Test



2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	Indoor Security Camera	N/A	C1 Indoor Camera	N/A	EUT
E-2	Adapter1	N/A	XED-UL050200CC	N/A	
E-2	Adapter2	N/A	XED-UL050200C	N/A	
E-2	Adapter3	N/A	ZZU1001-200050	N/A	

Item	Shielded Type	Ferrite Core	Length	Note
C1	NO	NO	1M	DC cable unshielded (form adapter1)
C1	NO	NO	1.8M	DC cable unshielded (form adapter2)
C1	NO	NO	2M	DC cable unshielded (form adapter3)

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.



2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation Test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	Agilent	E4407B	MY45108040	2017.08.27	2018.08.26
2	Test Receiver (9kHz-7GHz)	R&S	ESPI	101318	2017.08.27	2018.08.26
3	Bilog Antenna (30MHz-1GHz)	R&S	VULB 9168	VULB91 68-438	2017.08.27	2018.08.26
4	Horn Antenna (1GHz-18GHz)	SCHWARZBECK	BBHA9120D	1201	2017.09.03	2018.09.02
5	Horn Antenna (14GHz-40GHz)	SCHWARZBECK	BBHA 9170	9170-181	2017.09.03	2018.09.02
6	Amplifier (9KHz-6GHz)	SCHWARZBECK	BBV9744	9744-0037	2017.08.27	2018.08.26
7	Amplifier (1GHz-18GHz)	SCHWARZBECK	BBV9718	9718-309	2017.08.27	2018.08.26
8	Amplifier (18GHz-40GHz)	SCHWARZBECK	BBV 9721	9721-205	2017.08.27	2018.08.26
9	Loop Antenna (9KHz-30MHz)	SCHWARZBECK	FMZB1519B	00014	2017.09.03	2018.09.02
10	RF cables1 (9kHz-1GHz)	R&S	R203	R20X	2017.08.27	2018.08.26
11	RF cables2 (1GHz-40GHz)	R&S	R204	R21X	2017.08.27	2018.08.26
12	Antenna connector	Florida RF Labs	N/A	RF 01#	2017.08.27	2018.08.26
13	Power Metter	ANRITSU	ML2487A	6K00001568	2017.08.27	2018.08.26
14	Power Sensor (AV)	ANRITSU	ML2491A	030989	2017.08.27	2018.08.26
15	Signal Analyzer 9kHz-26.5GHz	Agilent	N9010A	MY48030494	2017.08.27	2018.08.26
16	Test Receiver 20kHz-40GHz	R&S	ESU 40	100376	2017.08.27	2018.08.26
17	D.C. Power Supply	LongWei	PS-305D	010964729	2017.08.27	2018.08.26

Conduction Test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Test Receiver	R&S	ESCI	1166.5950K03-1011 65-ha	2017.08.27	2018.08.26
2	LISN	SCHWARZBECK	NSLK8127	8127739	2017.08.27	2018.08.26
3	LISN	R&S	NSLK8126	8126487	2017.08.27	2018.08.26
4	RF cables	R&S	R204	R20X	2017.08.27	2018.08.26
5	Attenuator	R&S	ESH3-Z2	143206	2017.08.27	2018.08.26



3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Limit (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


3.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 DEVIATION FROM TEST STANDARD

No deviation

3.1.4 TEST SETUP

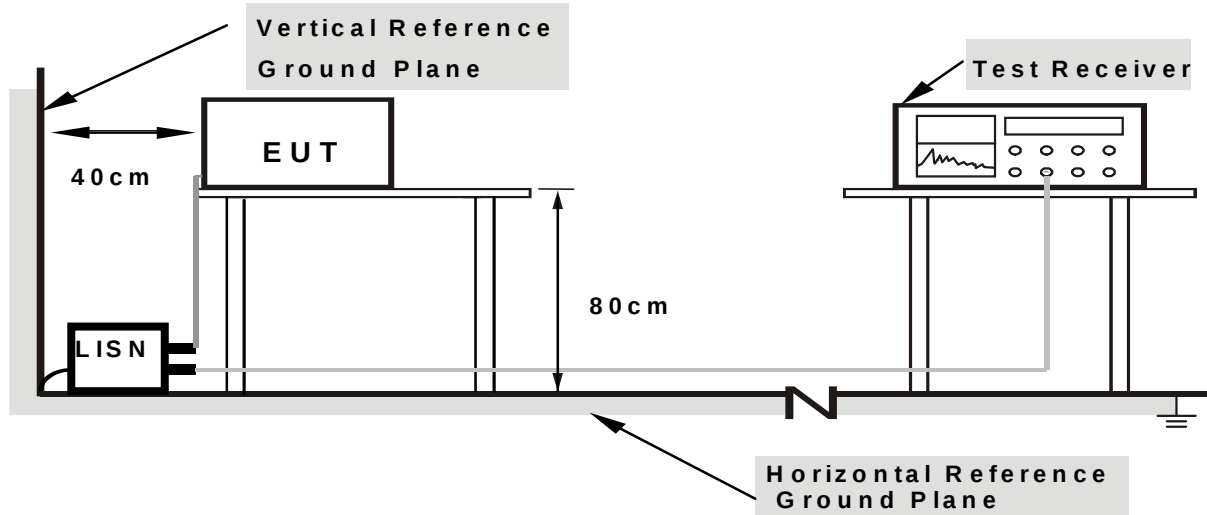

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

3.1.5 EUT OPERATING CONDITIONS


The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

We pretest AC 120V and AC 240V, the worst voltage was AC 120V and the data recording in the report.



3.1.6 TEST RESULTS

Temperature :	26℃	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	L
Test Voltage :	AC 120V/60Hz(adapter1)	Test Mode :	Mode 5

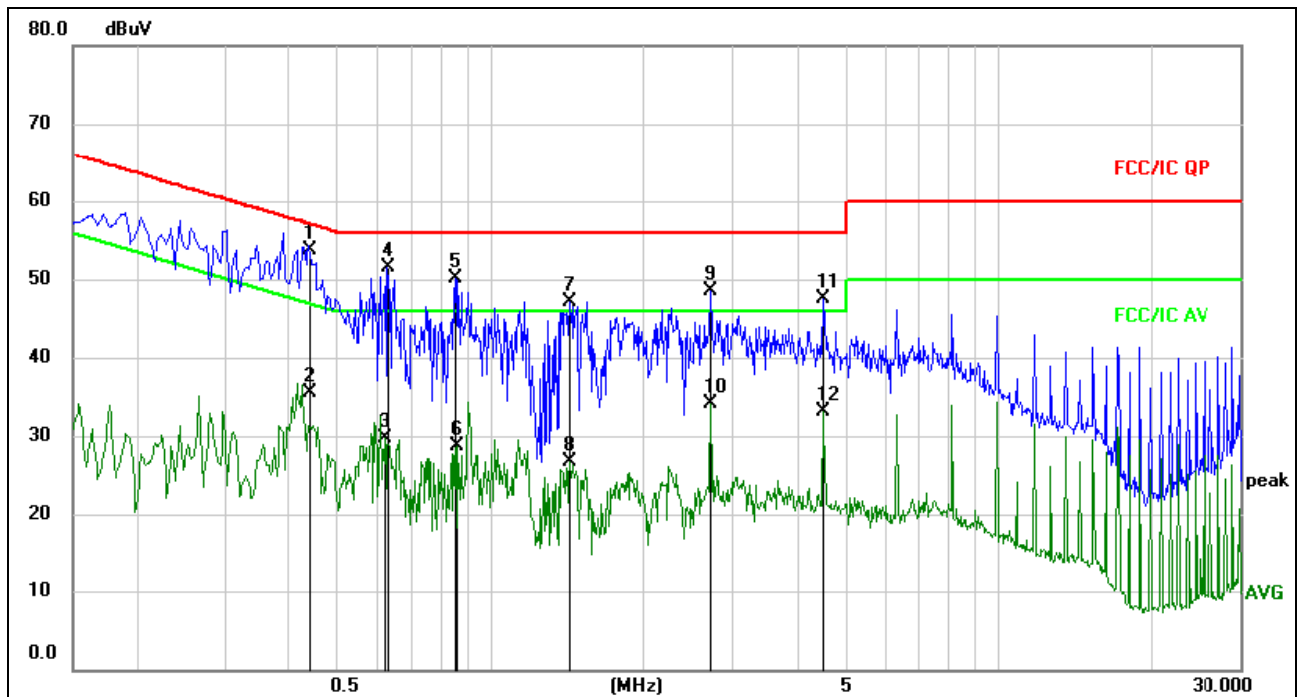


Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	0.4402	44.06	9.67	53.73	57.06	-3.33	QP	
2		0.4402	25.83	9.67	35.50	47.06	-11.56	AVG	
3		0.6180	19.98	9.68	29.66	46.00	-16.34	AVG	
4		0.6270	41.76	9.68	51.44	56.00	-4.56	QP	
5		0.8520	40.32	9.69	50.01	56.00	-5.99	QP	
6		0.8610	18.98	9.69	28.67	46.00	-17.33	AVG	
7		1.4370	37.44	9.70	47.14	56.00	-8.86	QP	
8		1.4370	16.98	9.70	26.68	46.00	-19.32	AVG	
9		2.7150	38.77	9.72	48.49	56.00	-7.51	QP	
10		2.7150	24.31	9.72	34.03	46.00	-11.97	AVG	
11		4.5240	37.72	9.73	47.45	56.00	-8.55	QP	
12		4.5240	23.44	9.73	33.17	46.00	-12.83	AVG	



Temperature :	26℃	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	N
Test Voltage :	AC 120V/60Hz(adapter1)	Test Mode :	Mode 5

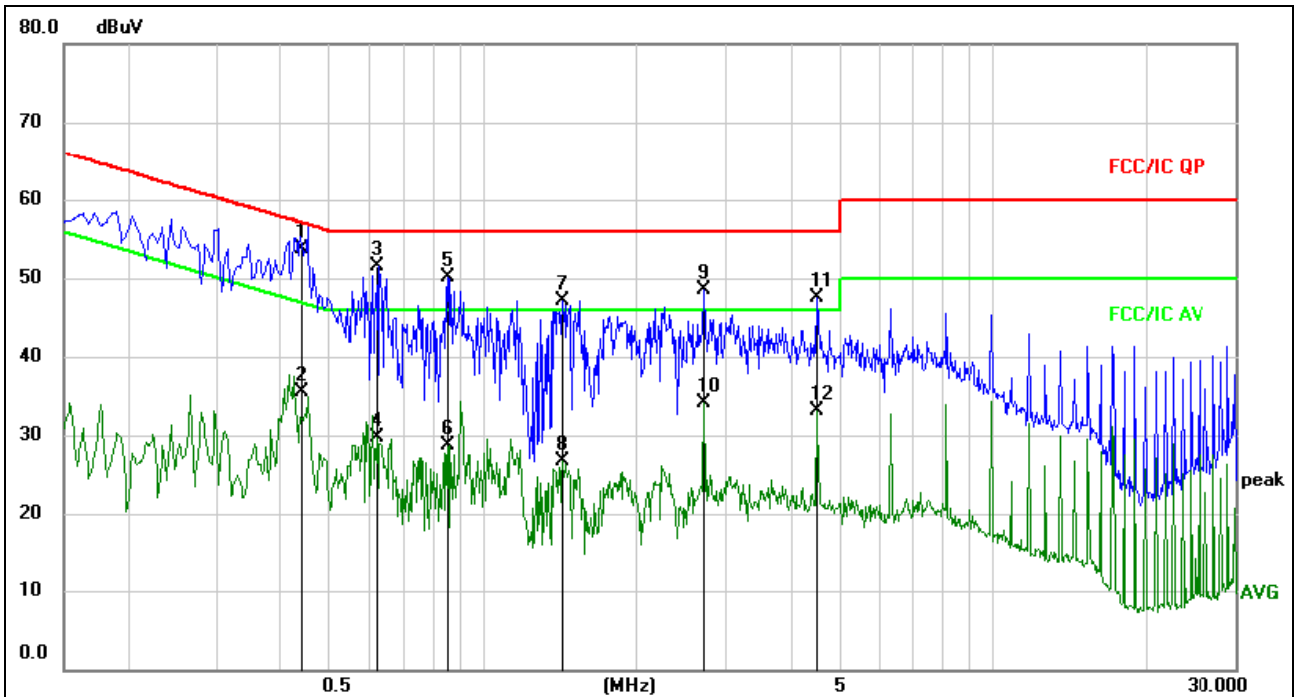


Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	0.4402	44.06	9.67	53.73	57.06	-3.33	QP	
2		0.4402	25.83	9.67	35.50	47.06	-11.56	AVG	
3		0.6180	41.76	9.68	51.44	56.00	-4.56	QP	
4		0.6180	19.98	9.68	29.66	46.00	-16.34	AVG	
5		0.8520	40.32	9.69	50.01	56.00	-5.99	QP	
6		0.8520	18.98	9.69	28.67	46.00	-17.33	AVG	
7		1.4370	37.44	9.70	47.14	56.00	-8.86	QP	
8		1.4370	16.98	9.70	26.68	46.00	-19.32	AVG	
9		2.7150	38.77	9.72	48.49	56.00	-7.51	QP	
10		2.7150	24.31	9.72	34.03	46.00	-11.97	AVG	
11		4.5240	37.72	9.73	47.45	56.00	-8.55	QP	
12		4.5240	23.44	9.73	33.17	46.00	-12.83	AVG	



Temperature :	26℃	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	L
Test Voltage :	AC 120V/60Hz(adapter2)	Test Mode :	Mode 5

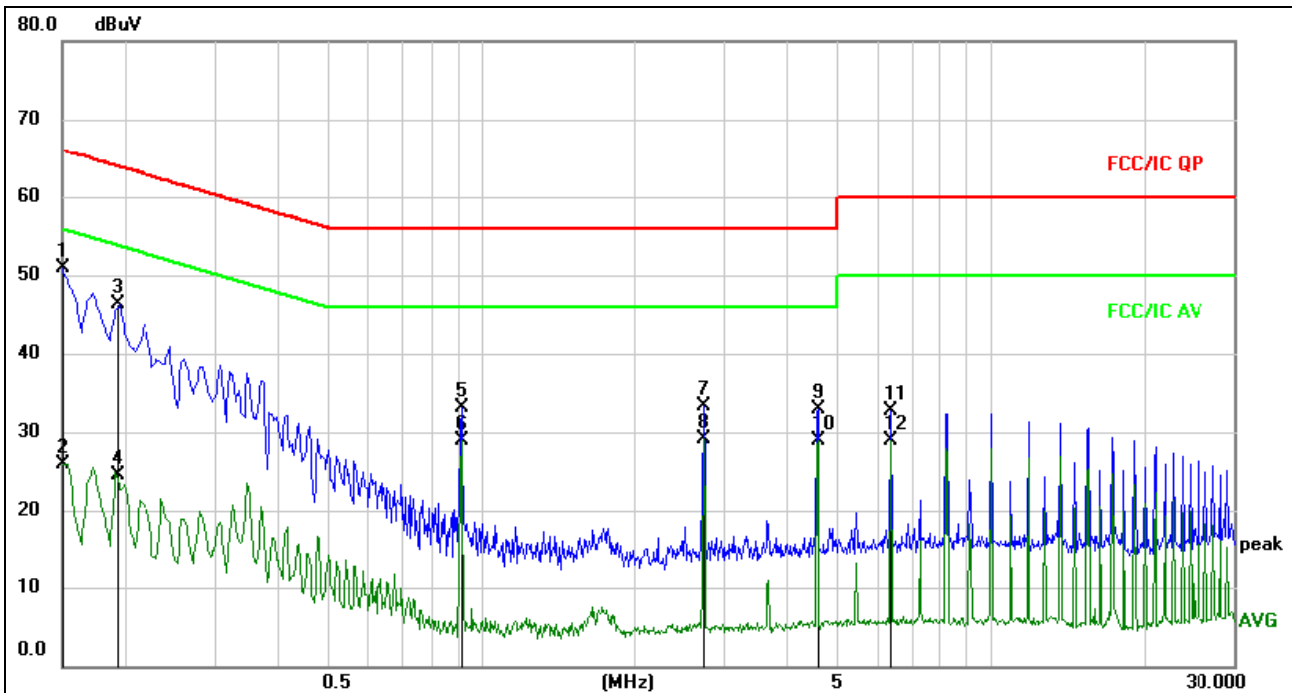


Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	0.1500	41.22	9.67	50.89	66.00	-15.11	QP	
2		0.1500	16.15	9.67	25.82	56.00	-30.18	AVG	
3		0.1914	36.63	9.65	46.28	63.98	-17.70	QP	
4		0.1914	14.84	9.65	24.49	53.98	-29.49	AVG	
5		0.9105	23.45	9.69	33.14	56.00	-22.86	QP	
6		0.9105	19.29	9.69	28.98	46.00	-17.02	AVG	
7		2.7285	23.61	9.72	33.33	56.00	-22.67	QP	
8		2.7285	19.33	9.72	29.05	46.00	-16.95	AVG	
9		4.5510	23.10	9.73	32.83	56.00	-23.17	QP	
10		4.5510	19.10	9.73	28.83	46.00	-17.17	AVG	
11		6.3735	22.90	9.78	32.68	60.00	-27.32	QP	
12		6.3735	19.11	9.78	28.89	50.00	-21.11	AVG	



Temperature :	26℃	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	N
Test Voltage :	AC 120V/60Hz(adapter2)	Test Mode :	Mode 5

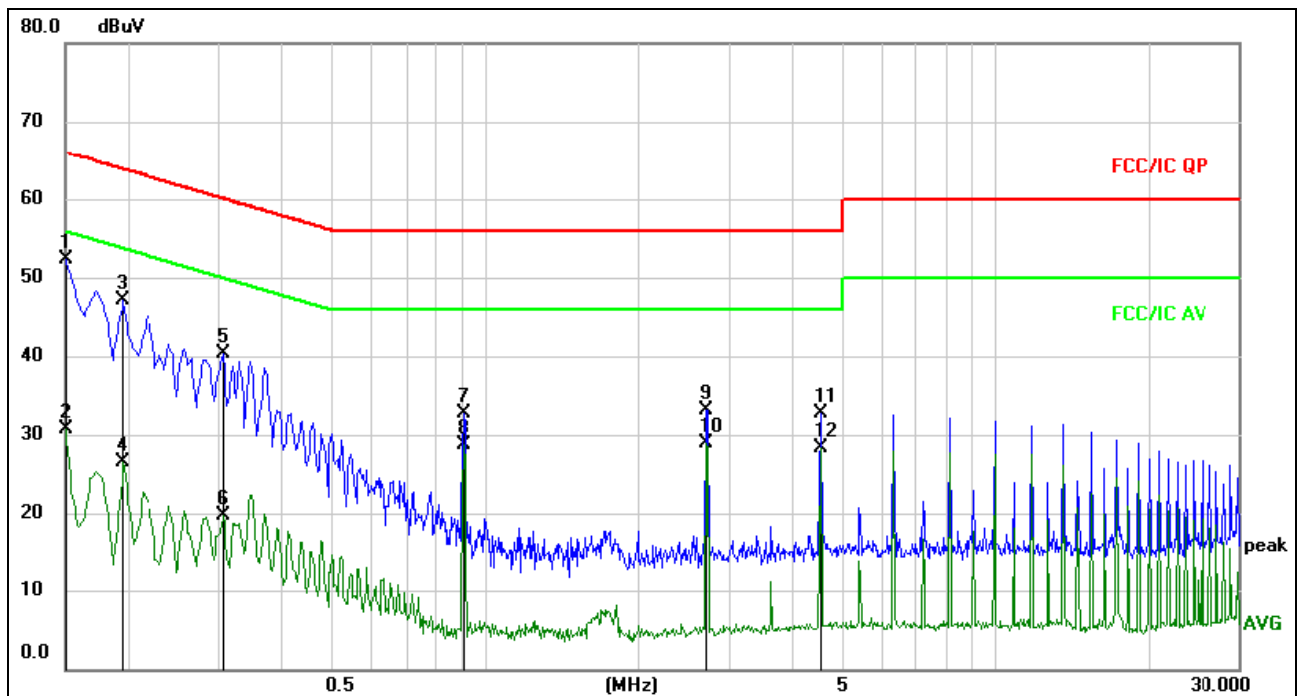


Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	0.1500	42.62	9.67	52.29	66.00	-13.71	QP	
2		0.1500	21.12	9.67	30.79	56.00	-25.21	AVG	
3		0.1949	37.36	9.65	47.01	63.83	-16.82	QP	
4		0.1949	16.80	9.65	26.45	53.83	-27.38	AVG	
5		0.3075	30.59	9.66	40.25	60.04	-19.79	QP	
6		0.3075	9.97	9.66	19.63	50.04	-30.41	AVG	
7		0.9060	23.11	9.69	32.80	56.00	-23.20	QP	
8		0.9060	18.92	9.69	28.61	46.00	-17.39	AVG	
9		2.7195	23.44	9.72	33.16	56.00	-22.84	QP	
10		2.7195	19.10	9.72	28.82	46.00	-17.18	AVG	
11		4.5329	22.97	9.73	32.70	56.00	-23.30	QP	
12		4.5329	18.53	9.73	28.26	46.00	-17.74	AVG	



Temperature :	26℃	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	L
Test Voltage :	AC 120V/60Hz(adapter3)	Test Mode :	Mode 5

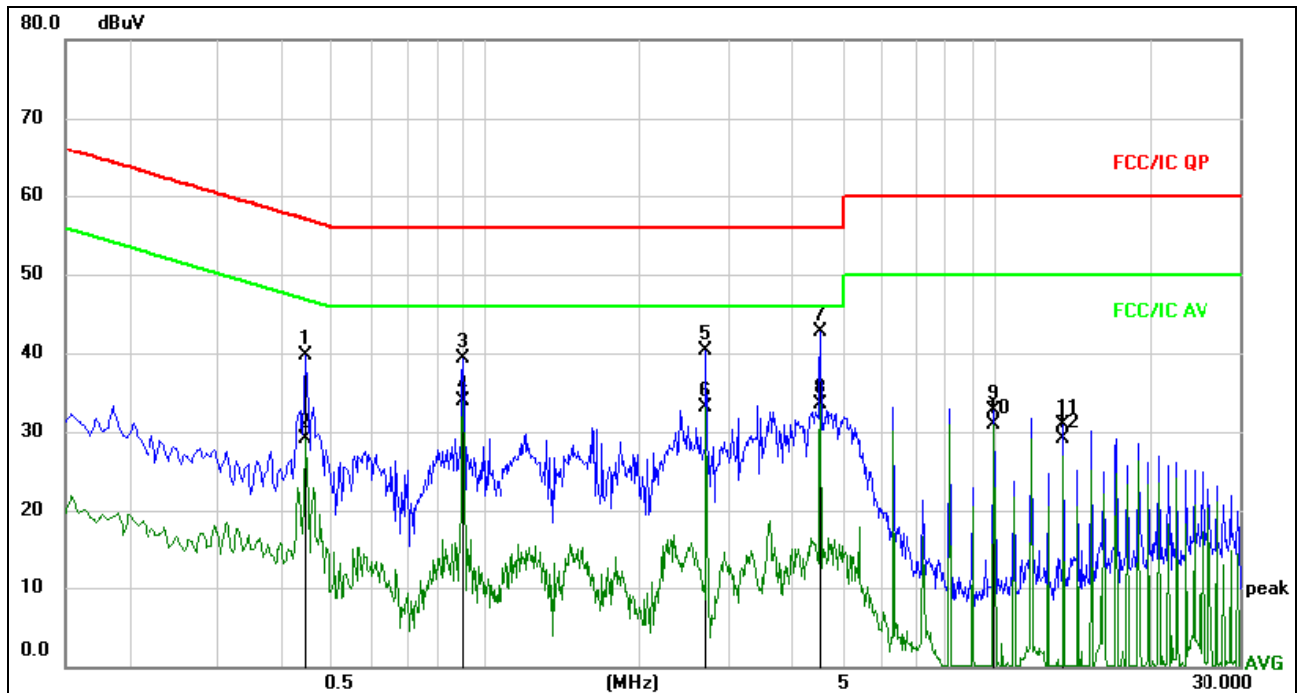

Remark:


1. All readings are Quasi-Peak and Average values.

2. Factor = Insertion Loss + Cable Loss.

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.4425	29.94	9.67	39.61	57.01	-17.40	QP	
2		0.4425	19.35	9.67	29.02	47.01	-17.99	AVG	
3		0.9015	29.54	9.69	39.23	56.00	-16.77	QP	
4	*	0.9015	24.20	9.69	33.89	46.00	-12.11	AVG	
5		2.7015	30.49	9.72	40.21	56.00	-15.79	QP	
6		2.7015	23.46	9.72	33.18	46.00	-12.82	AVG	
7		4.5015	33.06	9.73	42.79	56.00	-13.21	QP	
8		4.5015	23.81	9.73	33.54	46.00	-12.46	AVG	
9		9.9060	22.80	9.83	32.63	60.00	-27.37	QP	
10		9.9060	21.12	9.83	30.95	50.00	-19.05	AVG	
11		13.5150	21.03	9.84	30.87	60.00	-29.13	QP	
12		13.5150	19.23	9.84	29.07	50.00	-20.93	AVG	



Temperature :	26℃	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	N
Test Voltage :	AC 120V/60Hz(adapter3)	Test Mode :	Mode 5

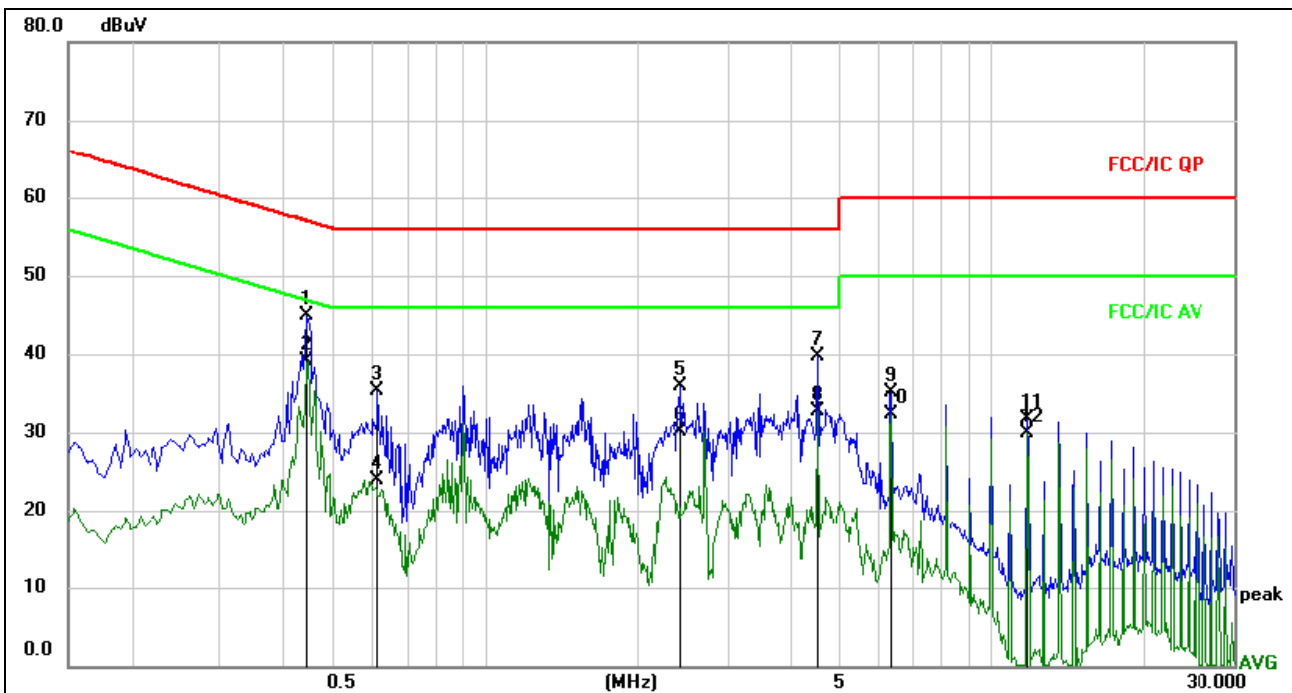

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.4425	35.15	9.67	44.82	57.01	-12.19	QP	
2	*	0.4425	29.39	9.67	39.06	47.01	-7.95	AVG	
3		0.6134	25.60	9.68	35.28	56.00	-20.72	QP	
4		0.6134	14.28	9.68	23.96	46.00	-22.04	AVG	
5		2.4135	26.16	9.72	35.88	56.00	-20.12	QP	
6		2.4135	20.38	9.72	30.10	46.00	-15.90	AVG	
7		4.5104	29.95	9.73	39.68	56.00	-16.32	QP	
8		4.5104	23.02	9.73	32.75	46.00	-13.25	AVG	
9		6.3195	25.31	9.78	35.09	60.00	-24.91	QP	
10		6.3195	22.61	9.78	32.39	50.00	-17.61	AVG	
11		11.7420	21.84	9.82	31.66	60.00	-28.34	QP	
12		11.7420	20.02	9.82	29.84	50.00	-20.16	AVG	



3.2 RADIATED EMISSION MEASUREMENT

3.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	25GHz
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

3.2.2 TEST PROCEDURE

Below 1GHz test procedure as below:

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 metre to 1.5 metre(Above 18GHz the distance is 1 meter and table is 1.5 metre).
- Test the EUT in the lowest channel ,the middle channel ,the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested
and performed pretest to three orthogonal axis. The worst case emissions were reported

3.2.3 DEVIATION FROM TEST STANDARD


No deviation

3.2.4 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

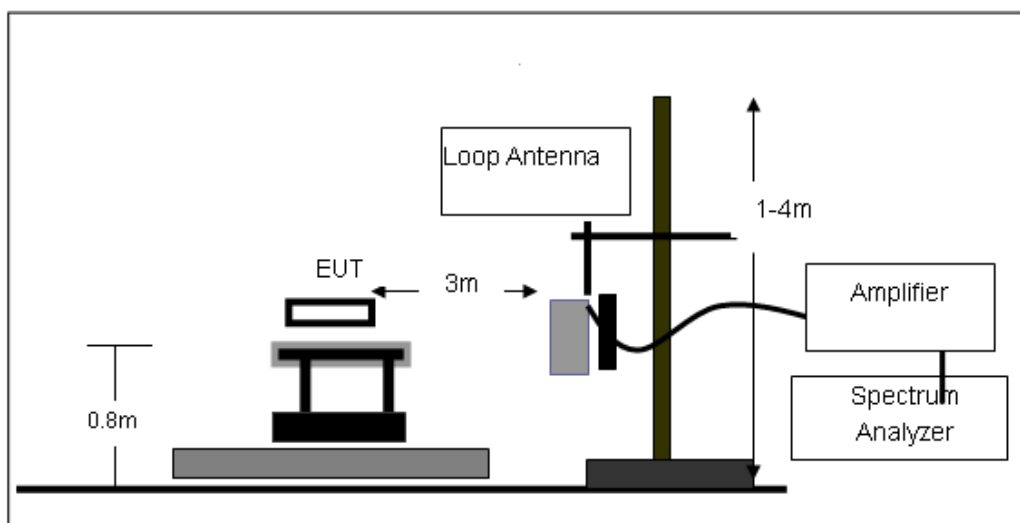

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

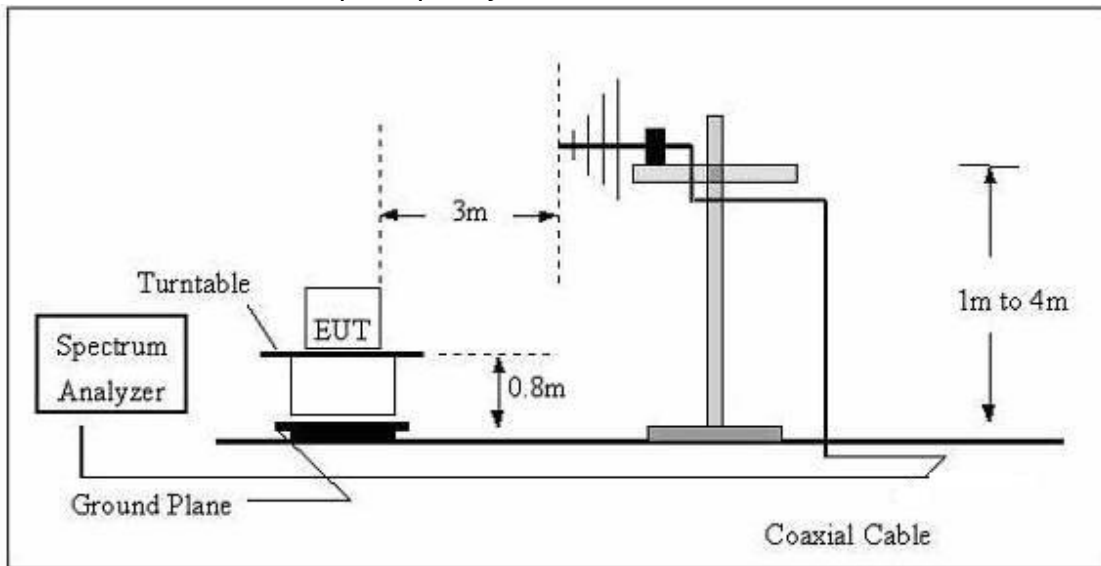

(C) Radiated Emission Test-Up Frequency Above 1GHz

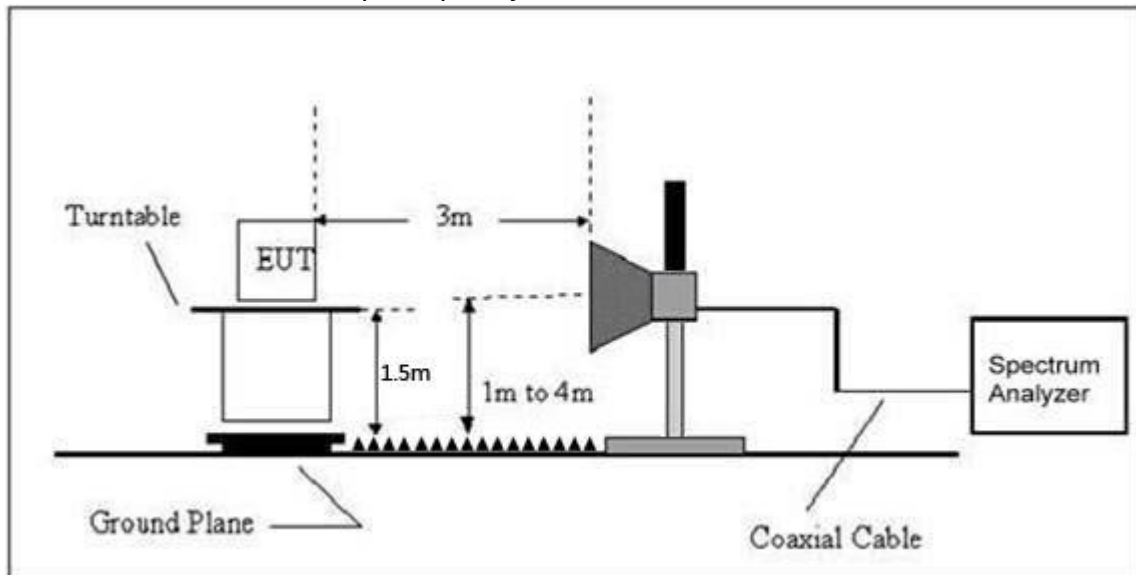

3.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

**3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)**

Temperature:	20℃	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Mode 5	Polarization :	--

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	PASS
--	--	--	--	PASS

NOTE:


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance/test distance})$ (dB);

Limit line = specific limits(dBuv) + distance extrapolation factor.

**3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ)**

Temperature :	26℃	Relative Humidity :	54%
Pressure :	1010 hPa	Polarization :	Horizontal
Test Voltage :	AC 120V/60Hz(adapter1)		
Test Mode :	Mode 5		

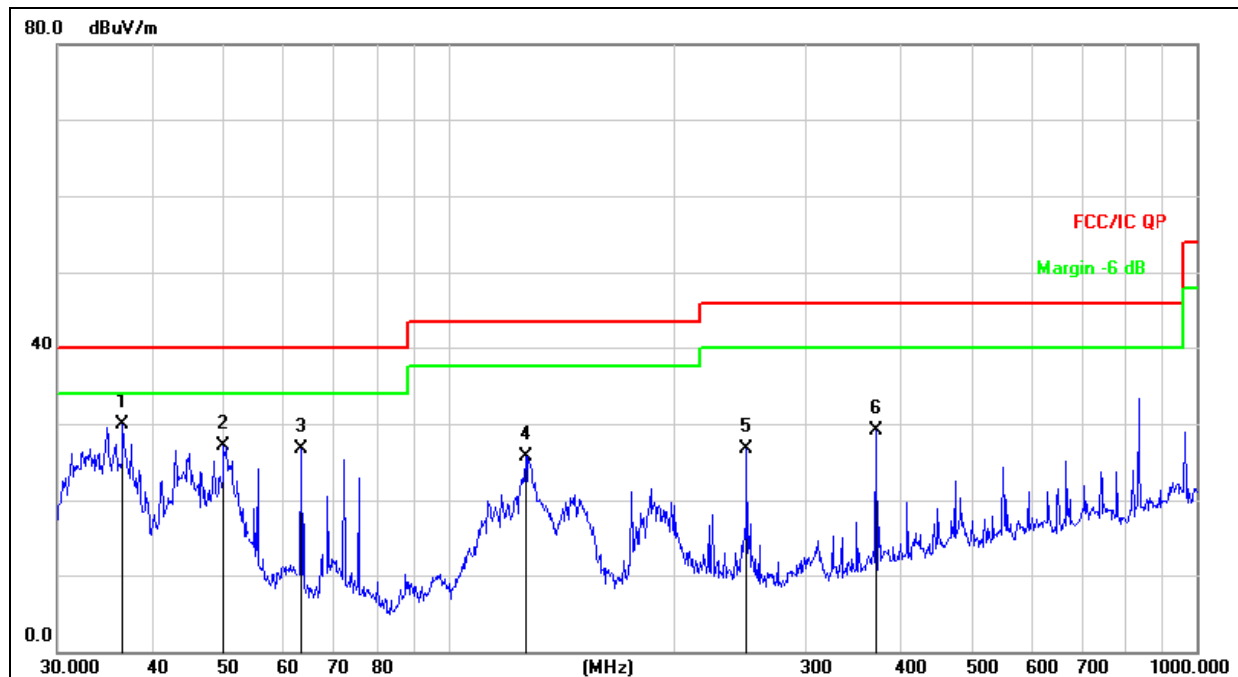


Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1	*	36.6375	45.91	-15.91	30.00	40.00	-10.00	QP
2		49.8814	41.09	-13.95	27.14	40.00	-12.86	QP
3		63.5356	43.03	-16.30	26.73	40.00	-13.27	QP
4		126.7723	44.19	-18.54	25.65	43.50	-17.85	QP
5		250.3012	41.85	-15.10	26.75	46.00	-19.25	QP
6		372.0045	41.27	-12.19	29.08	46.00	-16.92	QP



Temperature :	26℃	Relative Humidity :	54%
Pressure :	1010 hPa	Polarization :	Vertical
Test Voltage :	AC 120V/60Hz(adapter1)		
Test Mode :	Mode 5		

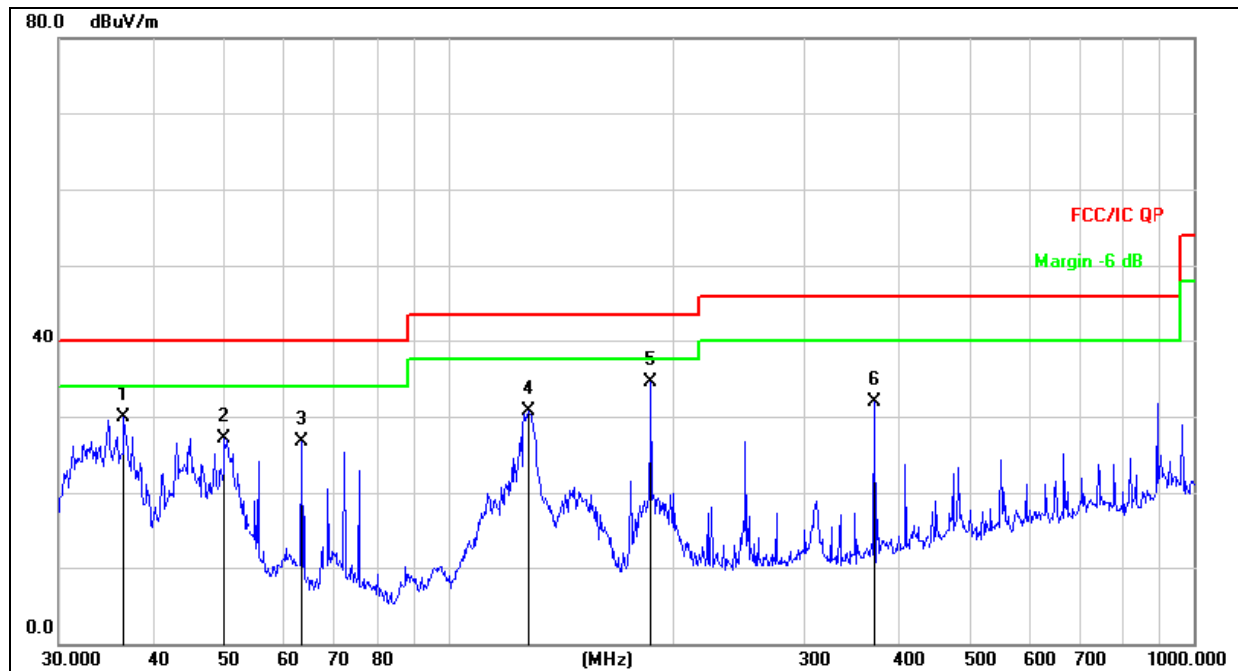


Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		36.6375	45.91	-15.91	30.00	40.00	-10.00	QP
2		49.8813	41.09	-13.95	27.14	40.00	-12.86	QP
3		63.5356	43.03	-16.30	26.73	40.00	-13.27	QP
4		128.1129	49.50	-18.76	30.74	43.50	-12.76	QP
5	*	186.4408	52.00	-17.44	34.56	43.50	-8.94	QP
6		372.0045	44.04	-12.19	31.85	46.00	-14.15	QP



Temperature :	26℃	Relative Humidity :	54%
Pressure :	1010 hPa	Polarization :	Horizontal
Test Voltage :	AC 120V/60Hz(adapter2)		
Test Mode :	Mode 5		

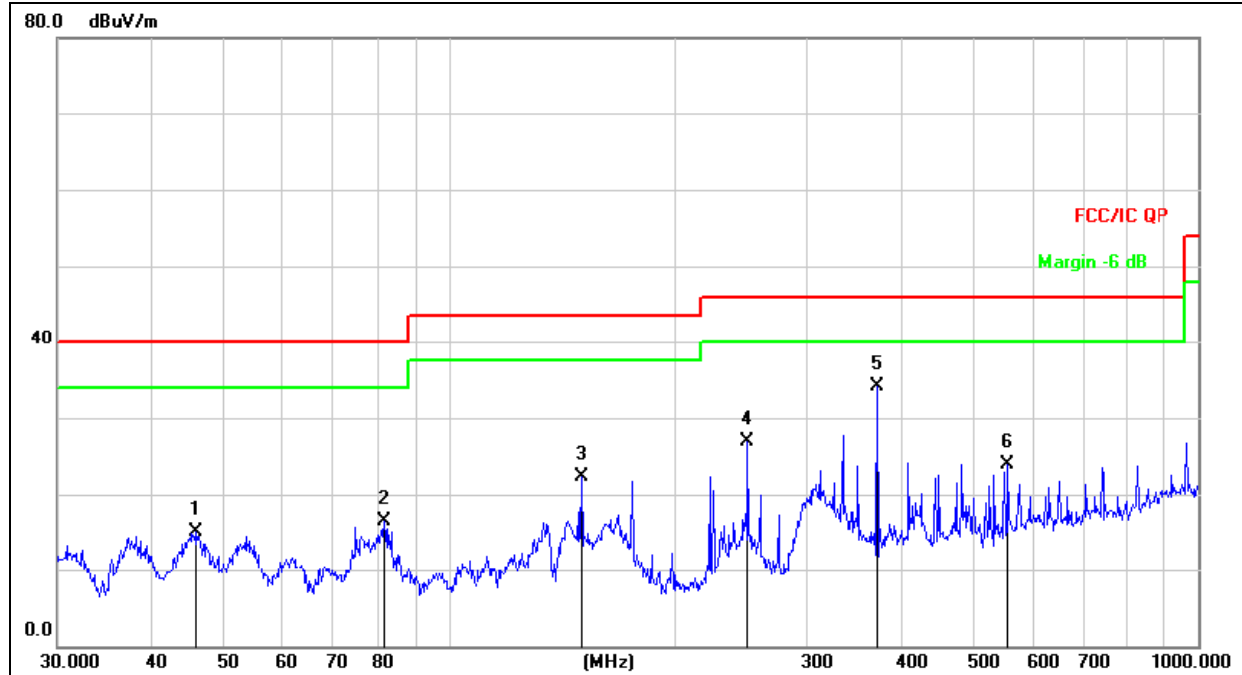


Remark:
Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		45.6948	29.16	-14.03	15.13	40.00	-24.87	QP
2		81.7833	35.82	-19.23	16.59	40.00	-23.41	QP
3		150.0108	41.28	-18.97	22.31	43.50	-21.19	QP
4		250.3012	41.98	-15.10	26.88	46.00	-19.12	QP
5	*	372.0045	46.38	-12.19	34.19	46.00	-11.81	QP
6		556.7744	31.99	-8.05	23.94	46.00	-22.06	QP



Temperature :	26℃	Relative Humidity :	54%
Pressure :	1010 hPa	Polarization :	Vertical
Test Voltage :	AC 120V/60Hz(adapter2)		
Test Mode :	Mode 5		

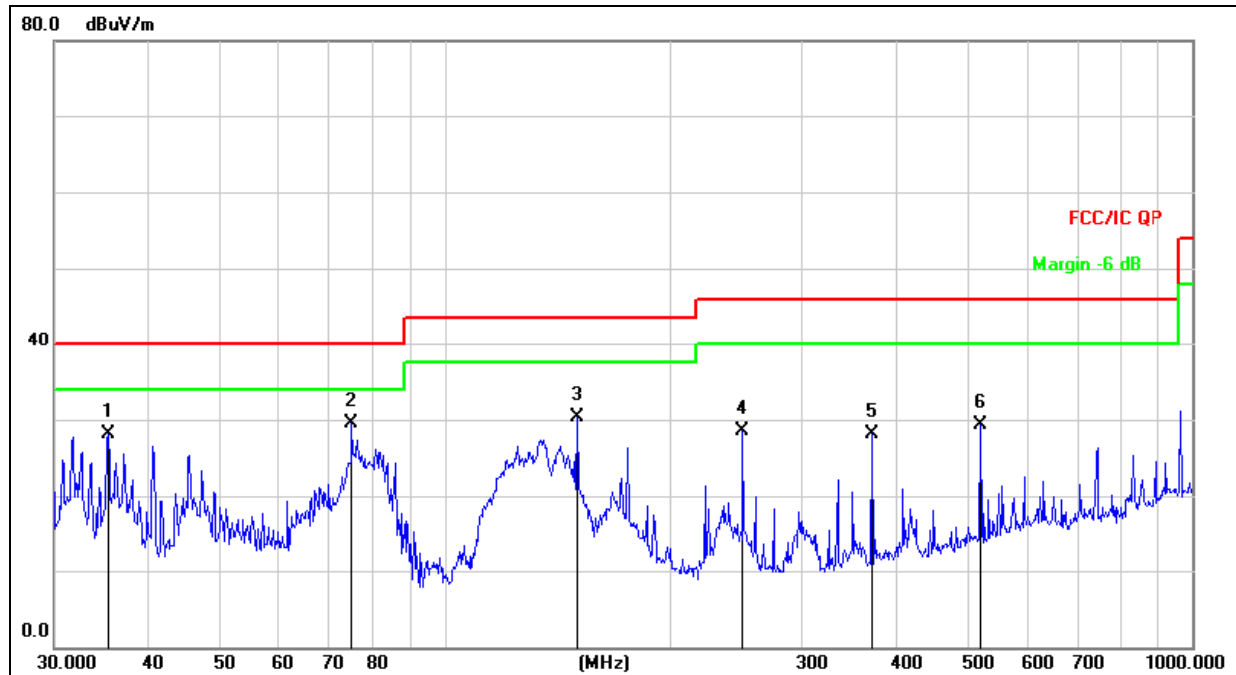


Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		35.3750	44.42	-16.36	28.06	40.00	-11.94	QP
2	*	74.9191	48.15	-18.59	29.56	40.00	-10.44	QP
3		150.0108	49.31	-18.97	30.34	43.50	-13.16	QP
4		250.3012	43.58	-15.10	28.48	46.00	-17.52	QP
5		372.0045	40.22	-12.19	28.03	46.00	-17.97	QP
6		520.8882	38.29	-9.01	29.28	46.00	-16.72	QP



Temperature :	26℃	Relative Humidity :	54%
Pressure :	1010 hPa	Polarization :	Horizontal
Test Voltage :	AC 120V/60Hz(adapter3)		
Test Mode :	Mode 5		

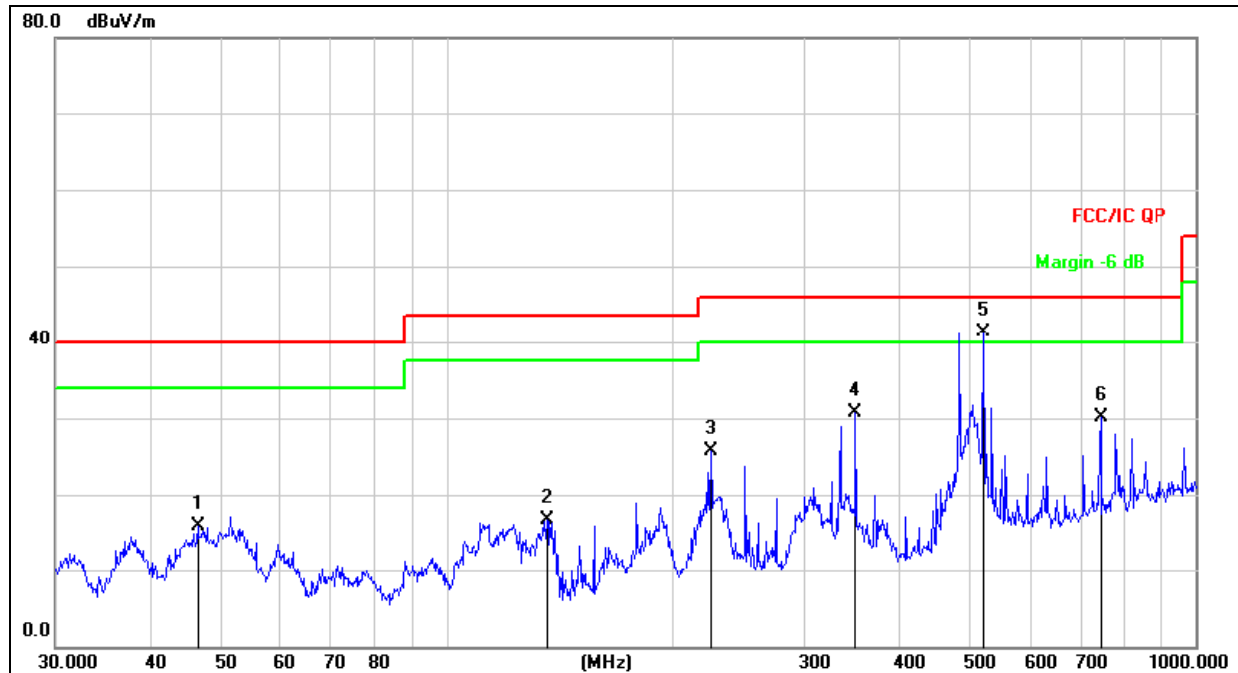


Remark:
Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		46.3402	29.86	-14.01	15.85	40.00	-24.15	QP
2		135.9822	36.07	-19.30	16.77	43.50	-26.73	QP
3		225.3080	41.87	-16.13	25.74	46.00	-20.26	QP
4		350.4768	42.94	-12.17	30.77	46.00	-15.23	QP
5	*	520.8882	50.27	-9.01	41.26	46.00	-4.74	QP
6		744.8661	35.15	-5.04	30.11	46.00	-15.89	QP



Temperature :	26°C	Relative Humidity :	54%
Pressure :	1010 hPa	Polarization :	Vertical
Test Voltage :	AC 120V/60Hz(adapter3)		
Test Mode :	Mode 5		

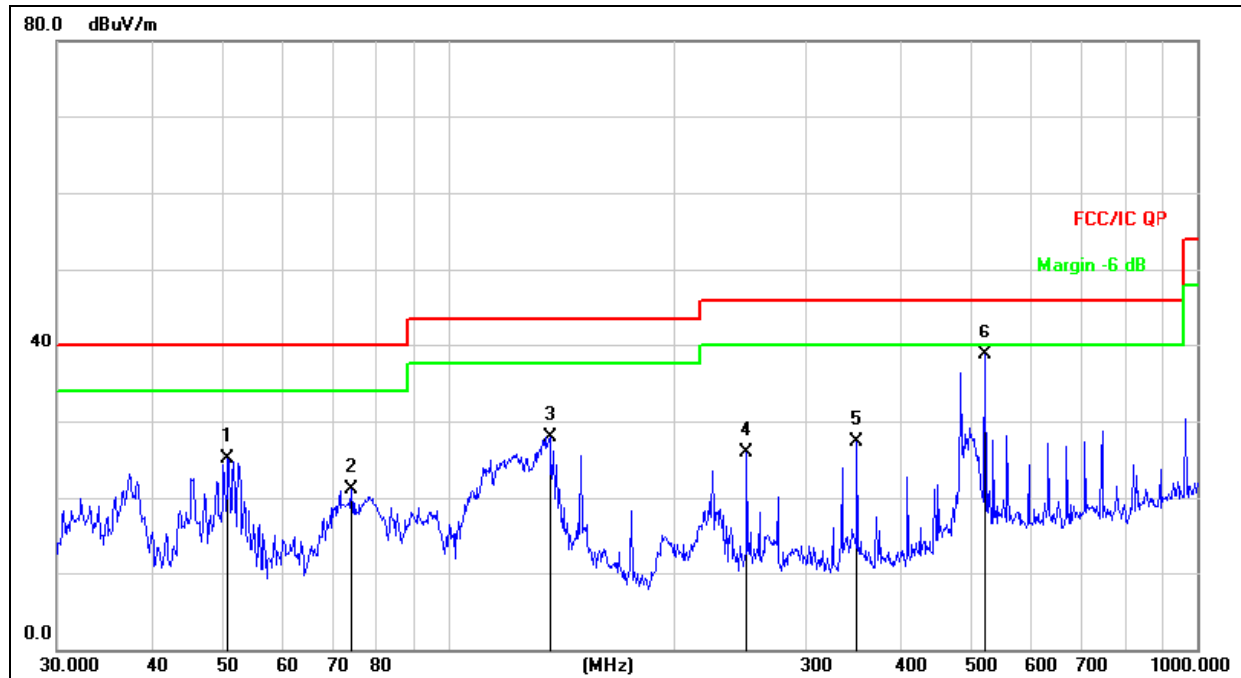

Remark:
Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		50.5860	39.07	-14.05	25.02	40.00	-14.98	QP
2		74.1351	39.54	-18.43	21.11	40.00	-18.89	QP
3		136.4598	47.23	-19.32	27.91	43.50	-15.59	QP
4		250.3012	41.01	-15.10	25.91	46.00	-20.09	QP
5		350.4768	39.44	-12.17	27.27	46.00	-18.73	QP
6	*	520.8882	47.81	-9.01	38.80	46.00	-7.20	QP

**3.2.8 TEST RESULTS (1ghz~25ghz)****802.11b**

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
		Low Channel:2412							
V	4824.00	68.40	39.55	7.85	25.66	62.36	74.00	-11.64	PK
V	4824.00	49.98	39.55	7.85	25.66	43.94	54.00	-10.06	AV
V	7236.00	68.62	38.33	7.52	24.55	62.36	74.00	-11.64	PK
V	7236.00	49.06	38.33	7.52	24.55	42.80	54.00	-11.20	AV
V	15450.00	45.97	35.23	6.75	26.59	44.08	74.00	-29.92	PK
H	4824.00	69.03	39.55	7.85	25.66	62.99	74.00	-11.01	PK
H	4824.00	50.97	39.55	7.85	25.66	44.93	54.00	-9.07	AV
H	7236.00	69.26	38.33	7.52	23.55	62.00	74.00	-12.00	PK
H	7236.00	45.77	38.33	7.52	23.22	38.18	54.00	-15.82	AV
H	15450.00	48.25	35.45	6.75	27.88	47.43	74.00	-26.57	PK

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
		Middle Channel:2437							
V	4864.00	69.43	38.89	7.57	25.45	63.56	74.00	-10.44	PK
V	4864.00	51.76	38.89	7.57	25.45	45.89	54.00	-8.11	AV
V	7317.00	68.78	38.78	7.35	24.78	62.13	74.00	-11.87	PK
V	7317.00	48.71	38.78	7.35	24.78	42.06	54.00	-11.94	AV
V	15430.00	47.48	35.89	6.42	26.47	44.48	74.00	-29.52	PK
H	4864.00	67.44	38.89	7.57	25.45	61.57	74.00	-12.43	PK
H	4864.00	50.13	38.89	7.57	25.45	44.26	54.00	-9.74	AV
H	7317.00	70.79	38.78	7.35	24.78	64.14	74.00	-9.86	PK
H	7317.00	49.38	38.78	7.35	24.78	42.73	54.00	-11.27	AV
H	15430.00	46.01	36.68	6.42	26.65	42.40	74.00	-31.60	PK

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
		High Channel:2462							
V	4926.00	68.52	38.75	7.46	25.45	62.68	74.00	-11.32	PK
V	4926.00	50.96	38.75	7.46	25.45	45.12	54.00	-8.88	AV
V	7375.00	67.32	38.65	7.22	24.78	60.67	74.00	-13.33	PK
V	7375.00	49.27	38.65	7.22	24.78	42.62	54.00	-11.38	AV
V	15450.00	47.55	35.58	6.35	26.47	44.79	74.00	-29.21	PK
H	4926.00	65.71	38.75	7.46	25.45	59.87	74.00	-14.13	PK
H	4926.00	49.75	38.75	7.46	25.45	43.91	54.00	-10.09	AV
H	7375.00	70.41	38.65	7.22	24.78	63.76	74.00	-10.24	PK
H	7375.00	48.02	38.65	7.22	24.78	41.37	54.00	-12.63	AV
H	15450.00	47.14	36.42	6.32	26.65	43.69	74.00	-30.31	PK

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11g

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
		Low Channel:2412							
V	4824.00	67.95	39.55	7.85	25.66	61.91	74.00	-12.09	PK
V	4824.00	49.65	39.55	7.85	25.66	43.61	54.00	-10.39	AV
V	7236.00	68.17	38.33	7.52	24.55	61.91	74.00	-12.09	PK
V	7236.00	48.73	38.33	7.52	24.55	42.47	54.00	-11.53	AV
V	15450.00	45.66	35.23	6.75	26.59	43.77	74.00	-30.23	PK
H	4824.00	68.57	39.55	7.85	25.66	62.53	74.00	-11.47	PK
H	4824.00	50.63	39.55	7.85	25.66	44.59	54.00	-9.41	AV
H	7236.00	68.81	38.33	7.52	23.55	61.55	74.00	-12.46	PK
H	7236.00	45.47	38.33	7.52	23.22	37.88	54.00	-16.12	AV
H	15450.00	47.93	35.45	6.75	27.88	47.11	74.00	-26.89	PK

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
		Middle Channel:2437							
V	4864.00	68.97	38.89	7.57	25.45	63.10	74.00	-10.90	PK
V	4864.00	51.42	38.89	7.57	25.45	45.55	54.00	-8.45	AV
V	7317.00	68.32	38.78	7.35	24.78	61.67	74.00	-12.33	PK
V	7317.00	48.39	38.78	7.35	24.78	41.74	54.00	-12.26	AV
V	15430.00	47.17	35.89	6.42	26.47	44.17	74.00	-29.83	PK
H	4864.00	67.00	38.89	7.57	25.45	61.13	74.00	-12.87	PK
H	4864.00	49.79	38.89	7.57	25.45	43.92	54.00	-10.08	AV
H	7317.00	70.32	38.78	7.35	24.78	63.67	74.00	-10.33	PK
H	7317.00	49.06	38.78	7.35	24.78	42.41	54.00	-11.59	AV
H	15430.00	45.70	36.68	6.42	26.65	42.09	74.00	-31.91	PK

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
		High Channel:2462							
V	4926.00	68.07	38.75	7.46	25.45	62.23	74.00	-11.77	PK
V	4926.00	50.62	38.75	7.46	25.45	44.78	54.00	-9.22	AV
V	7375.00	66.88	38.65	7.22	24.78	60.23	74.00	-13.77	PK
V	7375.00	48.94	38.65	7.22	24.78	42.29	54.00	-11.71	AV
V	15450.00	47.24	35.58	6.35	26.47	44.48	74.00	-29.52	PK
H	4926.00	65.27	38.75	7.46	25.45	59.43	74.00	-14.57	PK
H	4926.00	49.42	38.75	7.46	25.45	43.58	54.00	-10.42	AV
H	7375.00	69.95	38.65	7.22	24.78	63.30	74.00	-10.70	PK
H	7375.00	47.70	38.65	7.22	24.78	41.05	54.00	-12.95	AV
H	15450.00	46.82	36.42	6.32	26.65	43.37	74.00	-30.63	PK

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11n(20MHz)

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
		Low Channel:2412							
V	4824.00	66.72	39.55	7.85	25.66	60.68	74.00	-13.32	PK
V	4824.00	48.76	39.55	7.85	25.66	42.72	54.00	-11.28	AV
V	7236.00	66.94	38.33	7.52	24.55	60.68	74.00	-13.32	PK
V	7236.00	47.85	38.33	7.52	24.55	41.59	54.00	-12.41	AV
V	15450.00	44.84	35.23	6.75	26.59	42.95	74.00	-31.05	PK
H	4824.00	67.34	39.55	7.85	25.66	61.30	74.00	-12.70	PK
H	4824.00	49.72	39.55	7.85	25.66	43.68	54.00	-10.32	AV
H	7236.00	67.57	38.33	7.52	23.55	60.31	74.00	-13.69	PK
H	7236.00	44.65	38.33	7.52	23.22	37.06	54.00	-16.94	AV
H	15450.00	47.07	35.45	6.75	27.88	46.25	74.00	-27.75	PK

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
		Middle Channel:2437							
V	4864.00	67.72	38.89	7.57	25.45	61.85	74.00	-12.15	PK
V	4864.00	50.49	38.89	7.57	25.45	44.62	54.00	-9.38	AV
V	7317.00	67.09	38.78	7.35	24.78	60.44	74.00	-13.56	PK
V	7317.00	47.52	38.78	7.35	24.78	40.87	54.00	-13.13	AV
V	15430.00	46.32	35.89	6.42	26.47	43.32	74.00	-30.68	PK
H	4864.00	65.79	38.89	7.57	25.45	59.92	74.00	-14.08	PK
H	4864.00	48.90	38.89	7.57	25.45	43.03	54.00	-10.97	AV
H	7317.00	69.05	38.78	7.35	24.78	62.40	74.00	-11.60	PK
H	7317.00	48.17	38.78	7.35	24.78	41.52	54.00	-12.48	AV
H	15430.00	44.88	36.68	6.42	26.65	41.27	74.00	-32.73	PK

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
		High Channel:2462							
V	4926.00	66.84	38.75	7.46	25.45	61.00	74.00	-13.00	PK
V	4926.00	49.71	38.75	7.46	25.45	43.87	54.00	-10.13	AV
V	7375.00	65.67	38.65	7.22	24.78	59.02	74.00	-14.98	PK
V	7375.00	48.06	38.65	7.22	24.78	41.41	54.00	-12.59	AV
V	15450.00	46.39	35.58	6.35	26.47	43.63	74.00	-30.37	PK
H	4926.00	64.09	38.75	7.46	25.45	58.25	74.00	-15.75	PK
H	4926.00	48.53	38.75	7.46	25.45	42.69	54.00	-11.31	AV
H	7375.00	68.69	38.65	7.22	24.78	62.04	74.00	-11.96	PK
H	7375.00	46.84	38.65	7.22	24.78	40.19	54.00	-13.81	AV
H	15450.00	45.98	36.42	6.32	26.65	42.53	74.00	-31.47	PK

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11n(40MHz)

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
Low Channel:2422									
V	4855	67.61	39.55	7.77	25.66	61.49	74.00	-12.51	PK
V	4855	49.33	39.55	7.77	25.66	43.21	54.00	-10.79	AV
V	7233	67.55	38.33	7.30	24.55	61.07	74.00	-12.93	PK
V	7233	47.20	38.33	7.30	24.55	40.72	54.00	-13.28	AV
V	15440	49.17	35.23	6.60	26.59	47.13	74.00	-26.87	PK
H	4855	68.68	39.55	7.77	25.66	62.56	74.00	-11.44	PK
H	4855	44.51	39.55	7.77	25.66	38.39	54.00	-15.61	AV
H	7233	64.73	38.33	7.30	23.55	57.25	74.00	-16.75	PK
H	7233	48.35	38.33	7.30	23.22	40.54	54.00	-13.46	AV
H	15440	47.43	35.45	6.60	27.88	46.46	74.00	-27.54	PK

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
Middle Channel:2437									
V	4880.00	67.68	38.89	7.57	25.45	61.81	74.00	-12.19	PK
V	4880.00	50.01	38.89	7.57	25.45	44.14	54.00	-9.86	AV
V	7315.00	70.81	38.78	7.35	24.78	64.16	74.00	-9.84	PK
V	7315.00	50.32	38.78	7.35	24.78	43.67	54.00	-10.33	AV
V	15440.00	49.70	35.89	6.42	26.47	46.70	74.00	-27.30	PK
H	4880.00	69.57	38.89	7.57	25.45	63.70	74.00	-10.30	PK
H	4880.00	49.94	38.89	7.57	25.45	44.07	54.00	-9.93	AV
H	7315.00	67.47	38.78	7.35	24.78	60.82	74.00	-13.18	PK
H	7315.00	50.52	38.78	7.35	24.78	43.87	54.00	-10.13	AV
H	15440.00	47.94	36.68	6.42	26.65	44.33	74.00	-29.67	PK

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
High Channel:2452									
V	4905.00	68.71	38.75	7.38	25.45	62.79	74.00	-11.21	PK
V	4905.00	49.23	38.75	7.38	25.45	43.31	54.00	-10.69	AV
V	7357.00	64.93	38.65	7.15	24.78	58.21	74.00	-15.79	PK
V	7357.00	48.23	38.65	7.15	24.78	41.51	54.00	-12.49	AV
V	15440.00	49.62	35.58	6.25	26.47	46.76	74.00	-27.24	PK
H	4905.00	69.47	38.75	7.38	25.45	63.55	74.00	-10.45	PK
H	4905.00	45.40	38.75	7.38	25.45	39.48	54.00	-14.52	AV
H	7357.00	60.44	38.65	7.15	24.78	53.72	74.00	-20.28	PK
H	7357.00	47.48	38.65	7.15	24.78	40.76	54.00	-13.24	AV
H	15440.00	47.02	36.42	6.25	26.65	43.50	74.00	-30.50	PK

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



3.3 RADIATED BAND EMISSION MEASUREMENT

3.3.1 TEST REQUIREMENT:

FCC Part15 C Section 15.209 and 15.205

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	2300MHz
Stop Frequency	2520
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

3.3.2 TEST PROCEDURE

Above 1GHz test procedure as below:

- a. 1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel,the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

3.3.3 DEVIATION FROM TEST STANDARD

No deviation

3.3.4 TEST SETUP

Radiated Emission Test-Up Frequency Above 1GHz

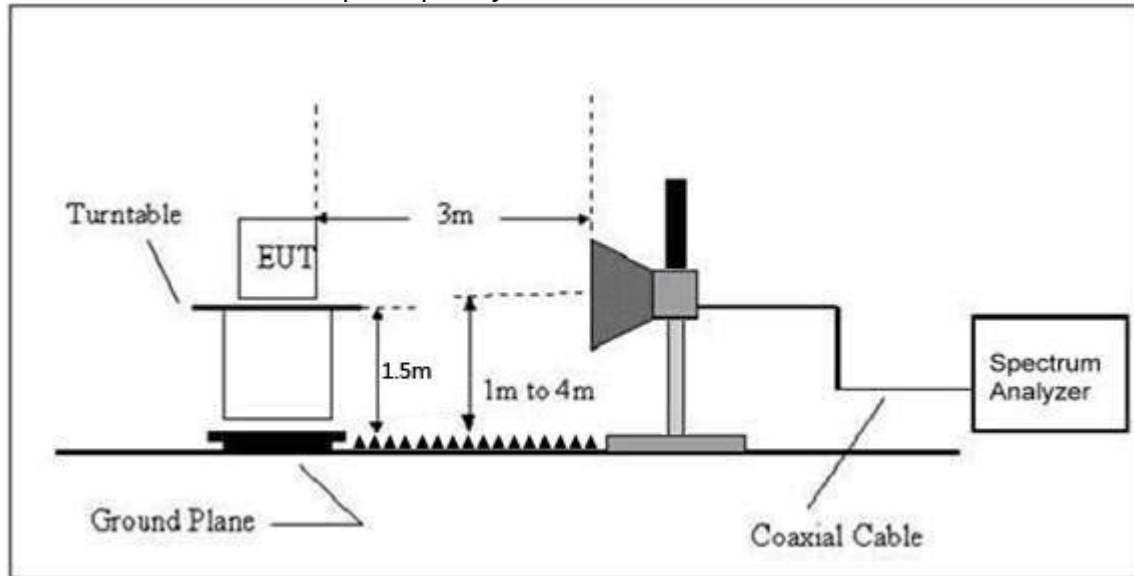

3.3.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.



3.3.6 TEST RESULT

	Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission evel (dBuV/m)	Limits (dBuV/m)		Result
							PK	PK	AV	
802.11b	Low Channel 2412MHz									
	H	2390.00	57.20	38.06	7.42	20.15	46.71	74.00	54.00	PASS
	H	2400.00	62.15	38.06	7.42	20.15	51.66	74.00	54.00	PASS
	V	2390.00	61.00	38.06	7.42	20.15	50.51	74.00	54.00	PASS
	V	2400.00	63.39	38.06	7.42	20.15	52.90	74.00	54.00	PASS
	High Channel 2462MHz									
	H	2483.50	61.97	38.17	7.45	20.54	51.79	74.00	54.00	PASS
	H	2485.50	59.52	38.17	7.45	20.54	49.34	74.00	54.00	PASS
	V	2483.50	62.46	38.20	7.45	20.54	52.25	74.00	54.00	PASS
	V	2485.50	60.34	38.20	7.45	20.54	50.13	74.00	54.00	PASS
802.11g	Low Channel 2412MHz									
	H	2390.00	60.07	38.06	7.42	20.15	49.58	74.00	54.00	PASS
	H	2400.00	62.91	38.06	7.42	20.15	52.42	74.00	54.00	PASS
	V	2390.00	60.22	38.06	7.42	20.15	49.73	74.00	54.00	PASS
	V	2400.00	61.79	38.06	7.42	20.15	51.30	74.00	54.00	PASS
	High Channel 2462MHz									
	H	2483.50	61.77	38.17	7.45	20.54	51.59	74.00	54.00	PASS
	H	2485.50	59.04	38.17	7.45	20.54	48.86	74.00	54.00	PASS
	V	2483.50	62.88	38.20	7.45	20.54	52.67	74.00	54.00	PASS
	V	2485.50	57.60	38.20	7.45	20.54	47.39	74.00	54.00	PASS
802.11N20	Low Channel 2412MHz									
	H	2390.00	60.94	38.06	7.42	20.15	50.45	74.00	54.00	PASS
	H	2400.00	63.48	38.06	7.42	20.15	52.99	74.00	54.00	PASS
	V	2390.00	60.17	38.06	7.42	20.15	49.68	74.00	54.00	PASS
	V	2400.00	62.75	38.06	7.42	20.15	52.26	74.00	54.00	PASS
	High Channel 2462MHz									
	H	2483.50	60.55	38.17	7.45	20.54	50.37	74.00	54.00	PASS
	H	2485.50	60.10	38.17	7.45	20.54	49.92	74.00	54.00	PASS
	V	2483.50	61.90	38.20	7.45	20.54	51.69	74.00	54.00	PASS
	V	2485.50	60.64	38.20	7.45	20.54	50.43	74.00	54.00	PASS
802.11N40	Low Channel 2422MHz									
	H	2390.00	57.48	38.06	7.42	20.15	46.99	74.00	54.00	PASS
	H	2400.00	57.81	38.06	7.42	20.15	47.32	74.00	54.00	PASS
	V	2390.00	56.72	38.06	7.42	20.15	46.23	74.00	54.00	PASS
	V	2400.00	58.46	38.06	7.42	20.15	47.97	74.00	54.00	PASS
	High Channel 2452MHz									
	H	2483.50	57.53	38.17	7.45	20.54	47.35	74.00	54.00	PASS
	H	2485.50	56.70	38.17	7.45	20.54	46.52	74.00	54.00	PASS
	V	2483.50	58.02	38.20	7.45	20.54	47.81	74.00	54.00	PASS
	V	2485.50	57.09	38.20	7.45	20.54	46.88	74.00	54.00	PASS
Remark:										
1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit										
2. If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit.										



4. POWER SPECTRAL DENSITY TEST

4.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS


4.1.1 TEST PROCEDURE

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

4.1.2 DEVIATION FROM STANDARD

No deviation.

4.1.3 TEST SETUP

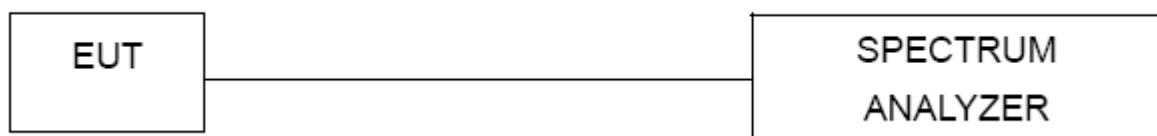

4.1.4 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.1 Unless otherwise a special operating condition is specified in the follows during the testing.



4.1.5 TEST RESULTS


Temperature :	25°C	Relative Humidity :	60%
Pressure :	1015 hPa	Test Voltage :	DC 5V
Test Mode :	TX b Mode		

Frequency	Power Density (dBm)	Limit (dBm)	Result
2412 MHz	-10.52	8	PASS
2437 MHz	-8.428	8	PASS
2462 MHz	-8.973	8	PASS

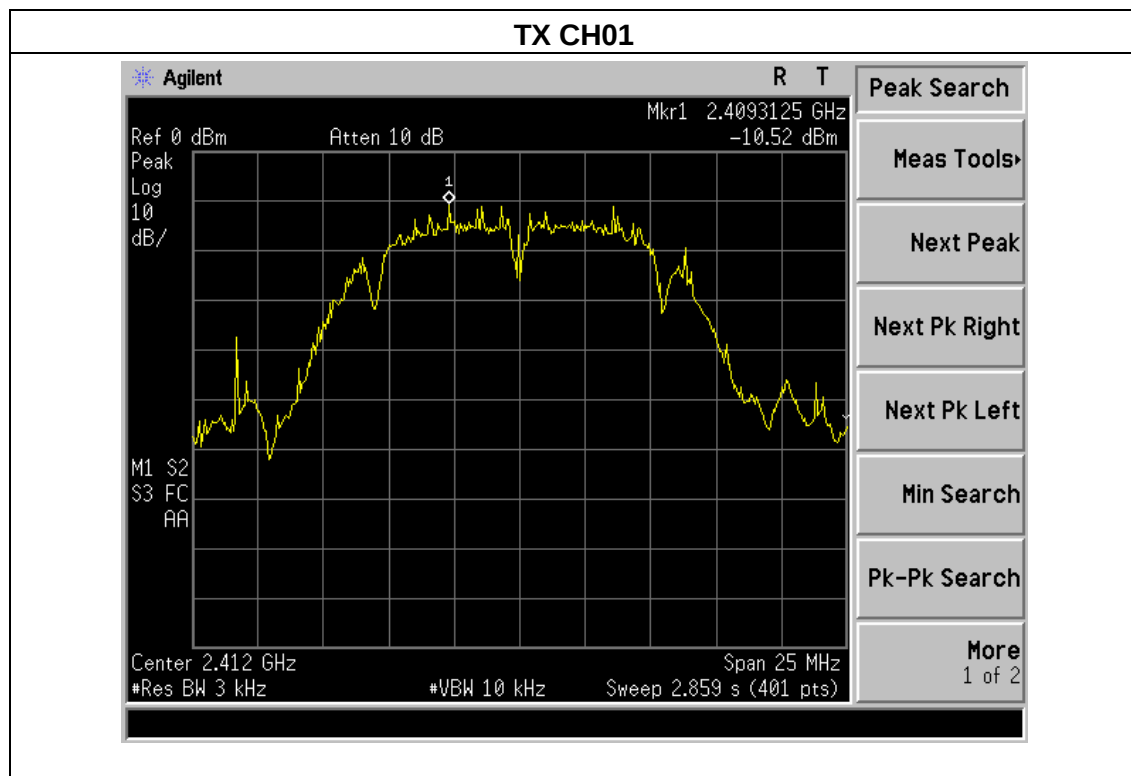




TX CH06

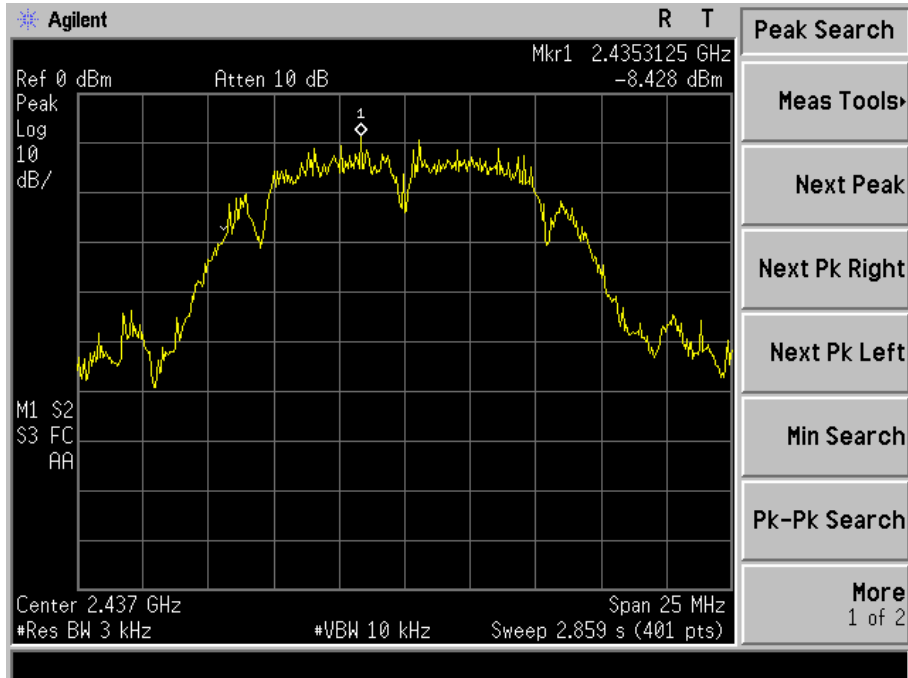


TX CH11


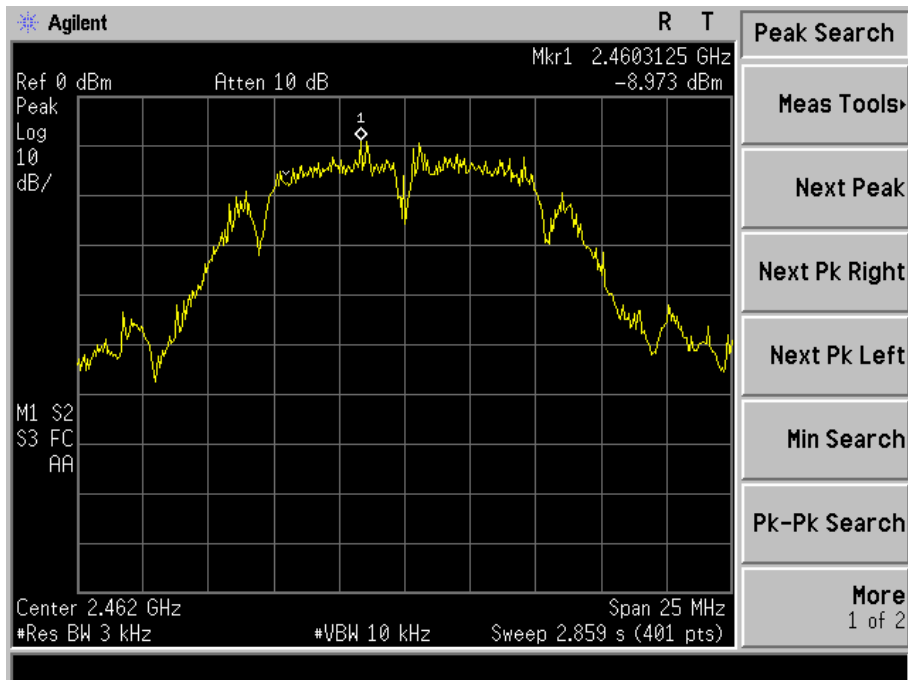




Temperature :	25°C	Relative Humidity :	60%
Pressure :	1015 hPa	Test Voltage :	DC 5V
Test Mode :	TX g Mode		

Frequency	Power Density (dBm)	Limit (dBm)	Result
2412 MHz	-13.74	8	PASS
2437 MHz	-12.78	8	PASS
2462 MHz	-13.19	8	PASS

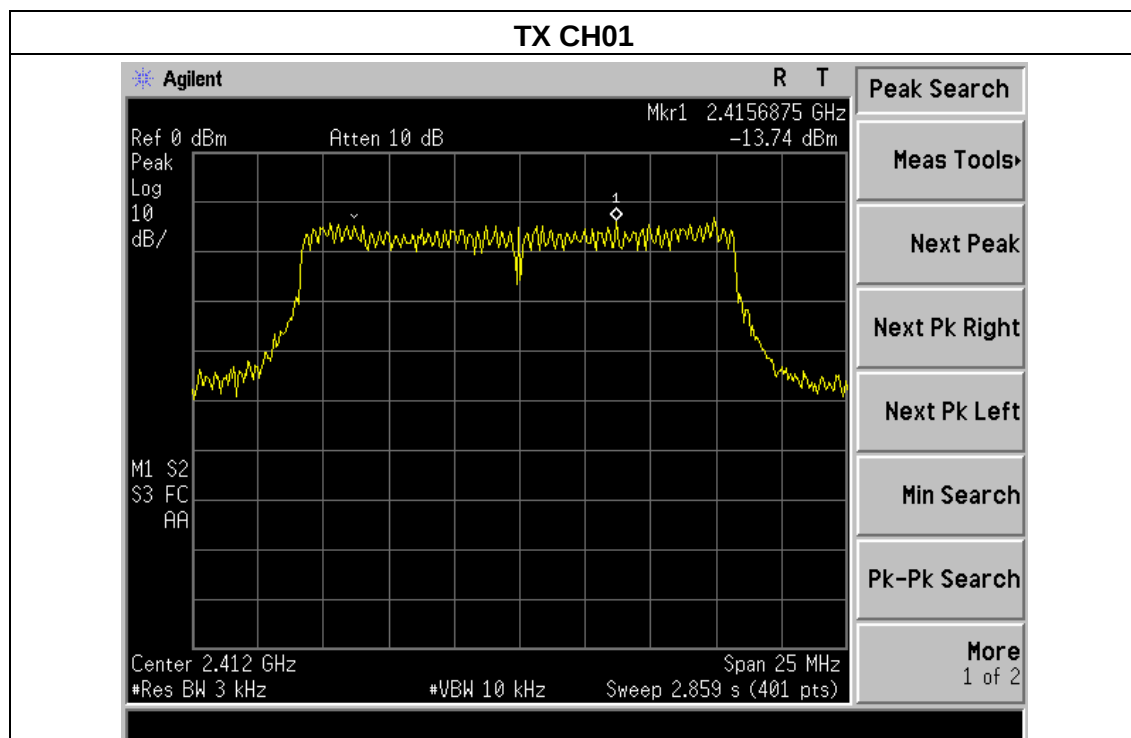


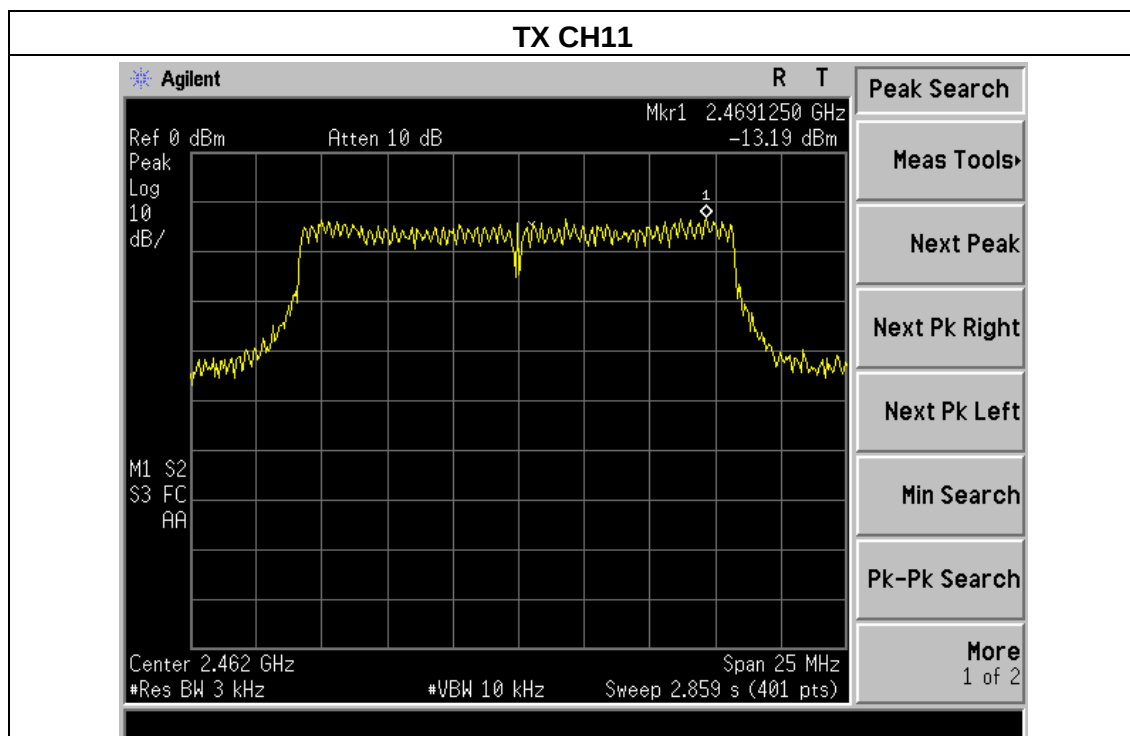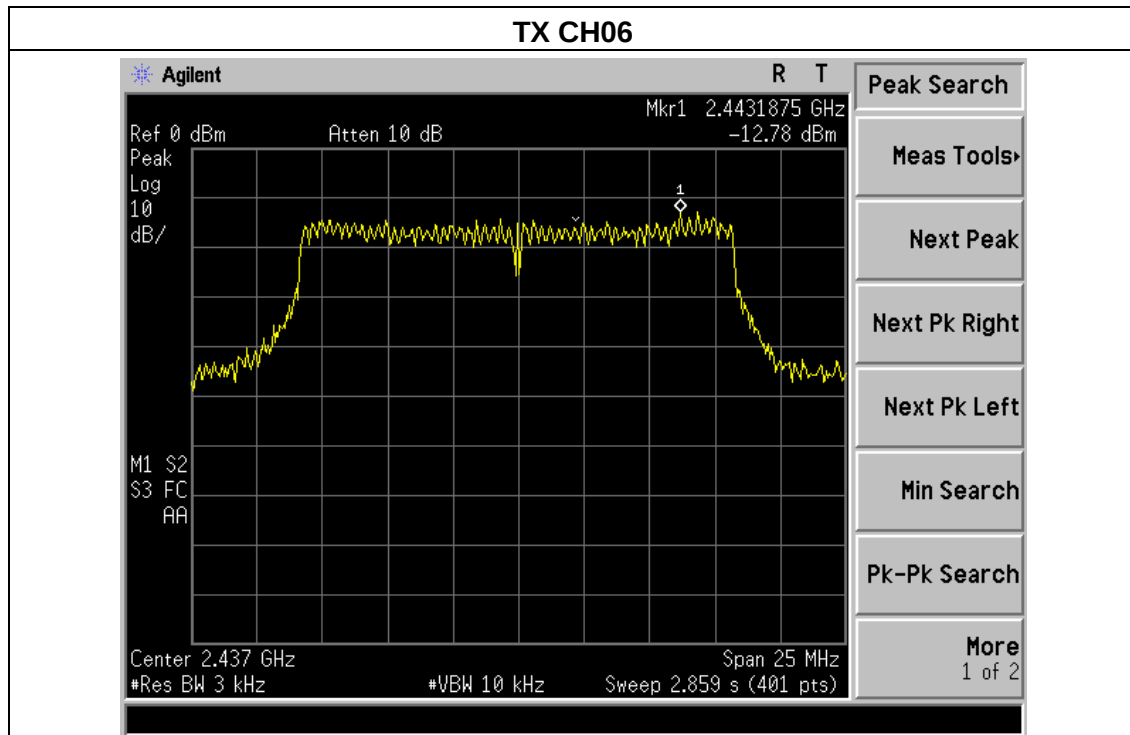




Temperature :	25°C	Relative Humidity :	60%
Pressure :	1015 hPa	Test Voltage :	DC 5V
Test Mode :	TX n Mode(20M)		


Frequency	Power Density (dBm)	Limit (dBm)	Result
2412 MHz	-11.9	8	PASS
2437 MHz	-13.2	8	PASS
2462 MHz	-13.05	8	PASS

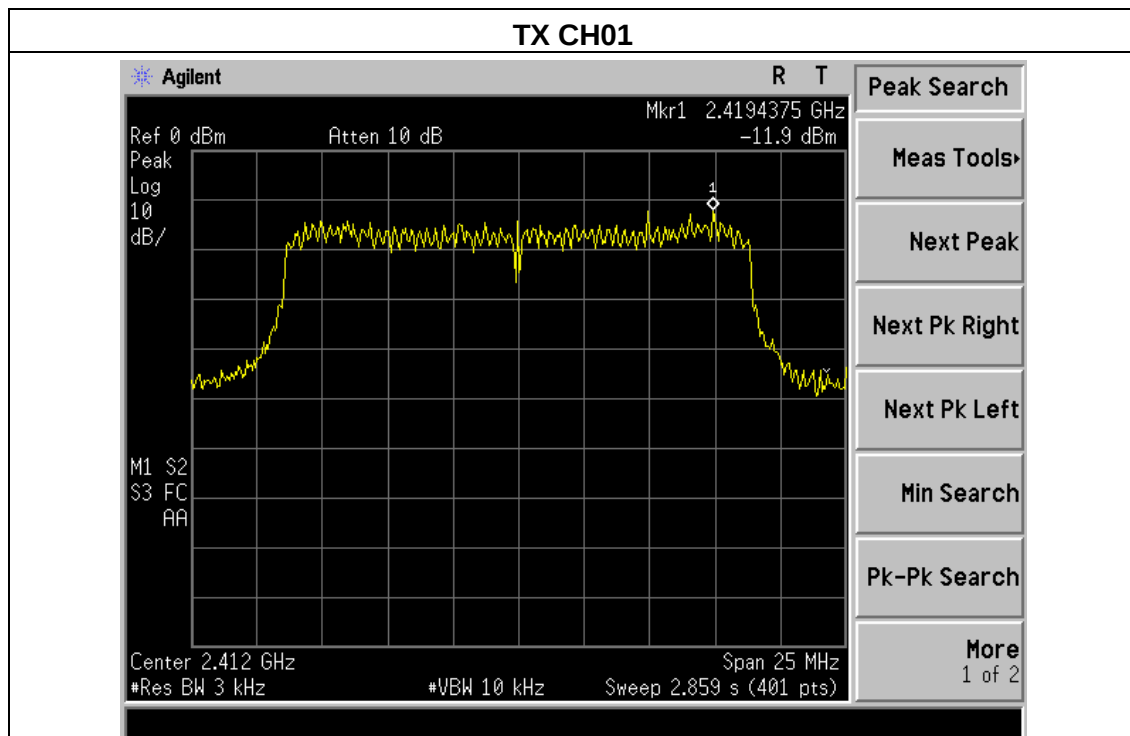

TX CH06

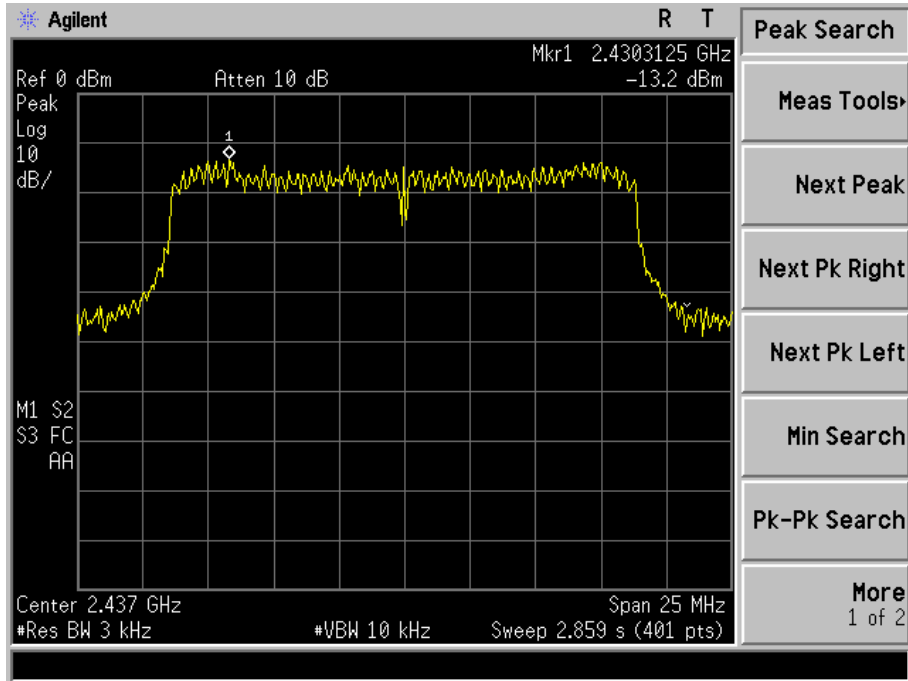


TX CH11

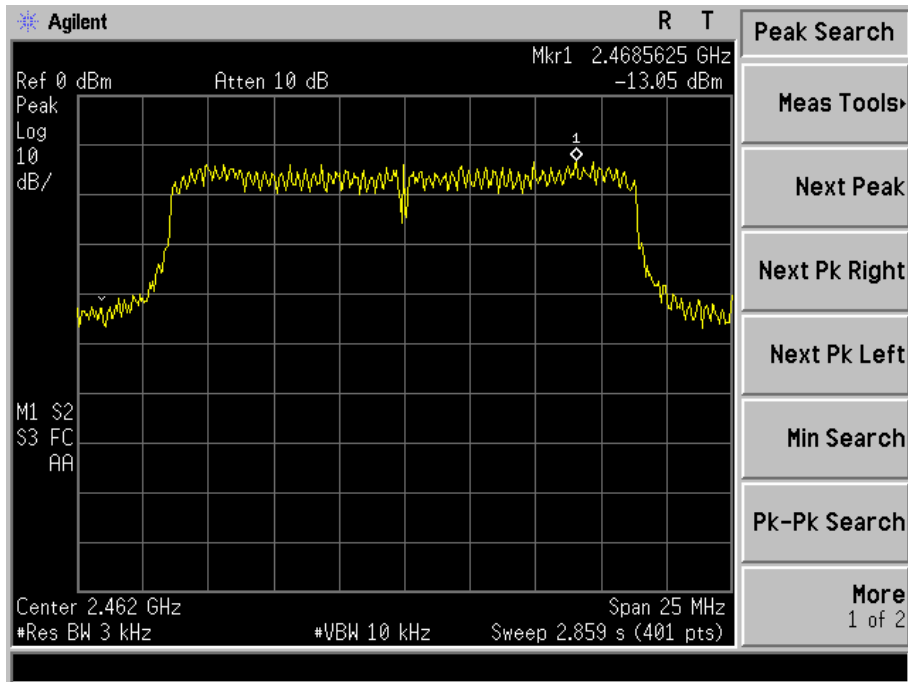




Temperature :	25°C	Relative Humidity :	60%
Pressure :	1015 hPa	Test Voltage :	DC 5V
Test Mode :	TX n Mode(40M)		


Frequency	Power Density (dBm)	Limit (dBm)	Result
2422 MHz	-13.96	8	PASS
2437 MHz	-13.93	8	PASS
2452 MHz	-13.09	8	PASS

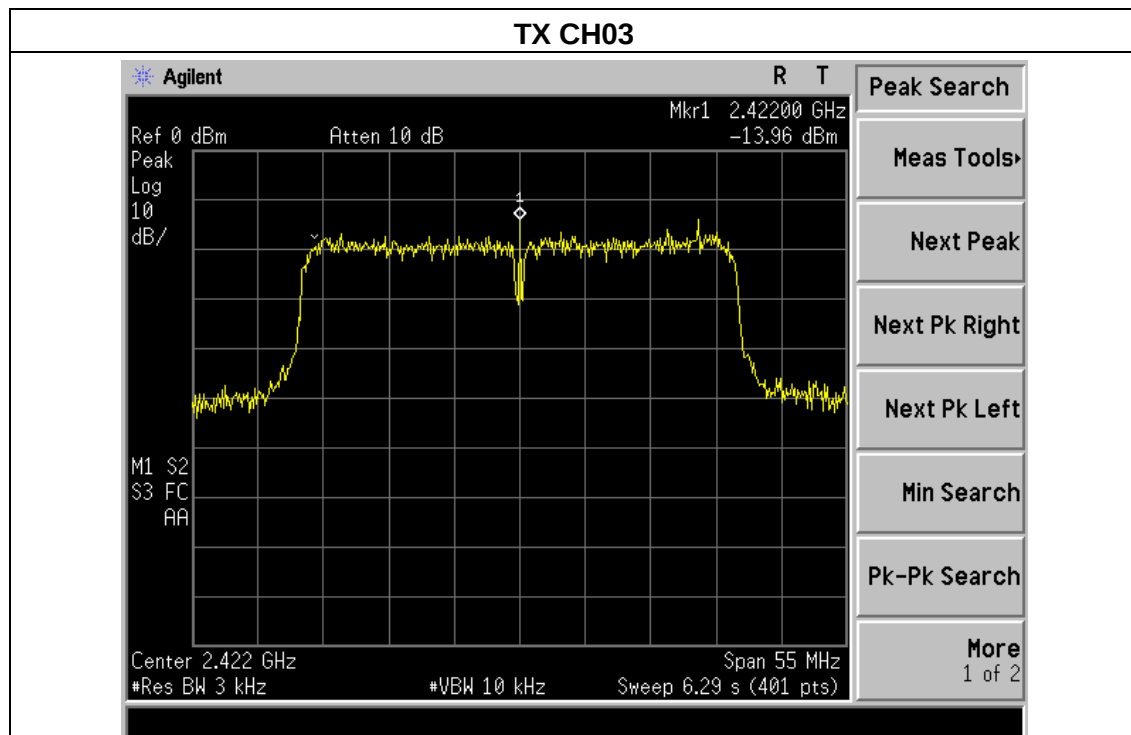

TX CH06

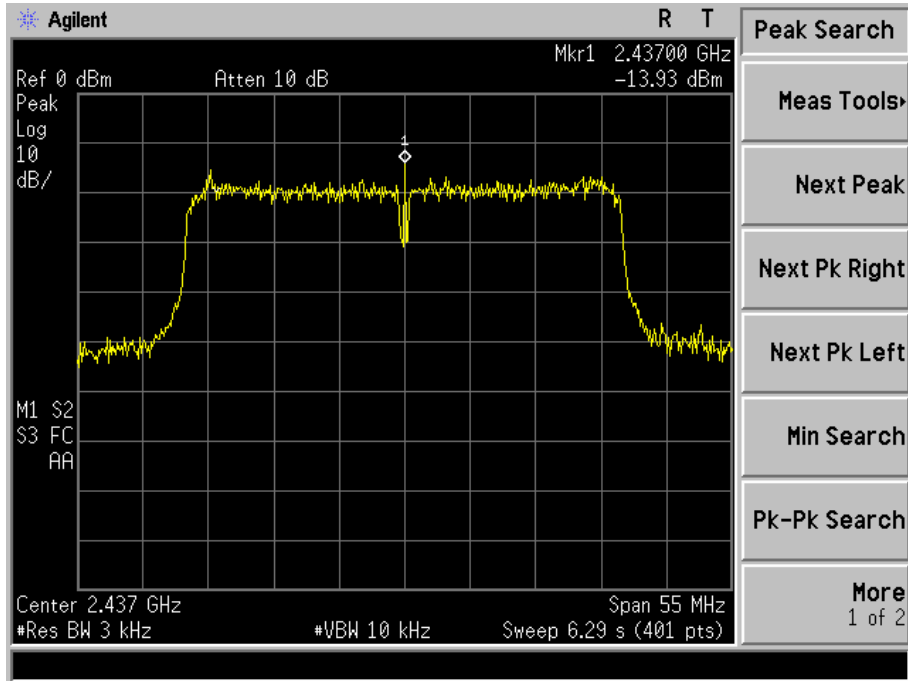

TX CH09

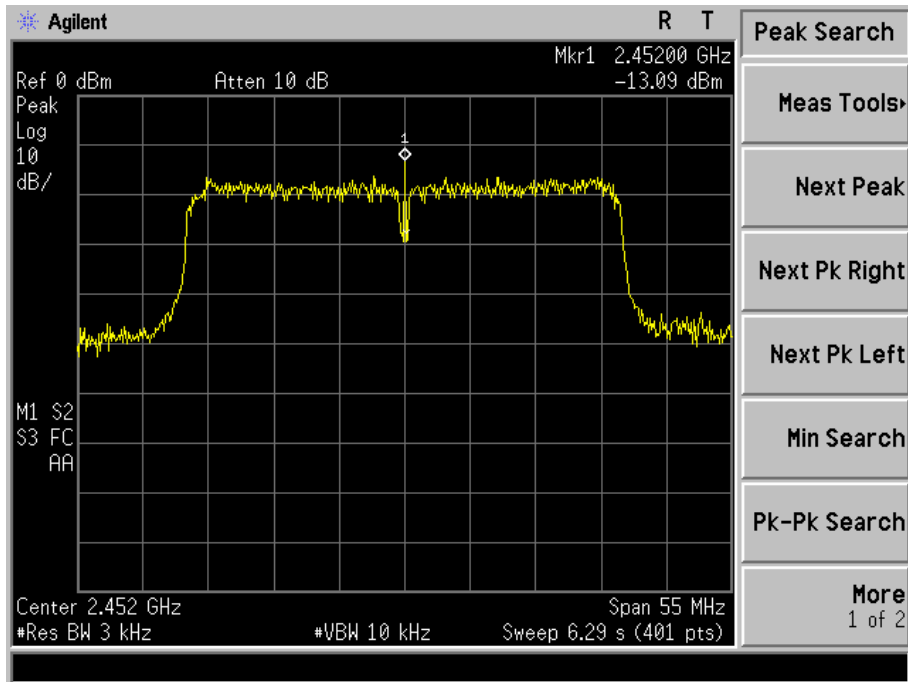



5. BANDWIDTH TEST

5.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS

5.1.1 TEST PROCEDURE

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times \text{RBW}$.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

5.1.2 DEVIATION FROM STANDARD

No deviation.

5.1.3 TEST SETUP



5.1.4 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.



5.1.5 TEST RESULTS


Temperature :	25°C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 5V
Test Mode :	TX b Mode		

Channel	Frequency (MHz)	6dB bandwidth (MHz)	Limit (kHz)	Result
Low	2412	10.083	500	Pass
Middle	2437	10.110	500	Pass
High	2462	10.103	500	Pass

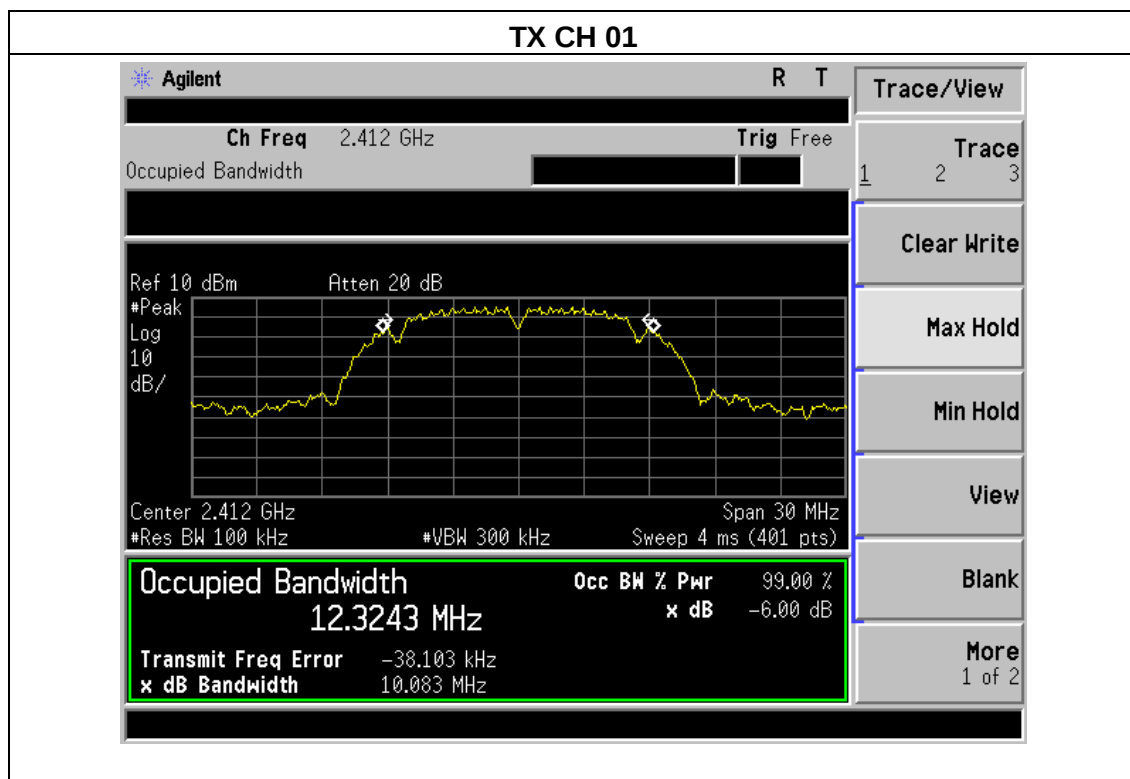




TX CH 06

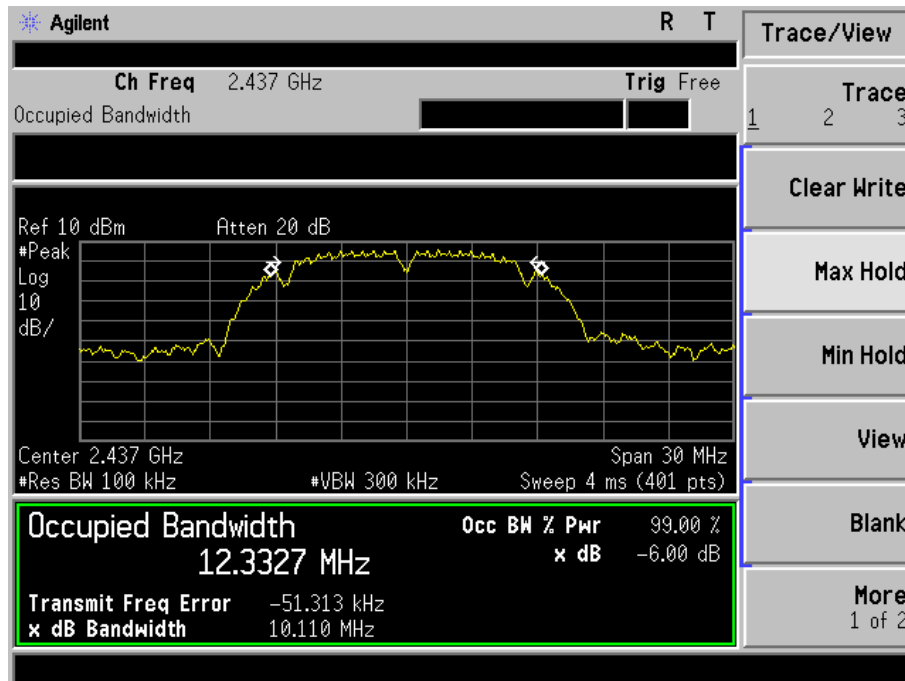


TX CH 11

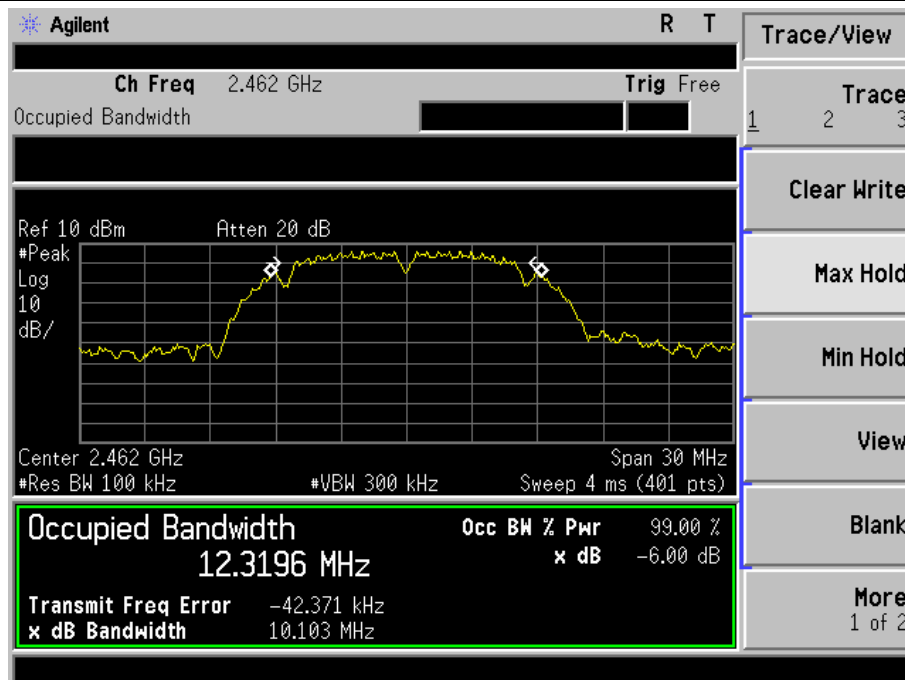




Temperature :	25°C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 5V
Test Mode :	TX g Mode		

Channel	Frequency (MHz)	6dB bandwidth (MHz)	Limit (kHz)	Result
Low	2412	16.345	500	Pass
Middle	2437	16.445	500	Pass
High	2462	16.418	500	Pass

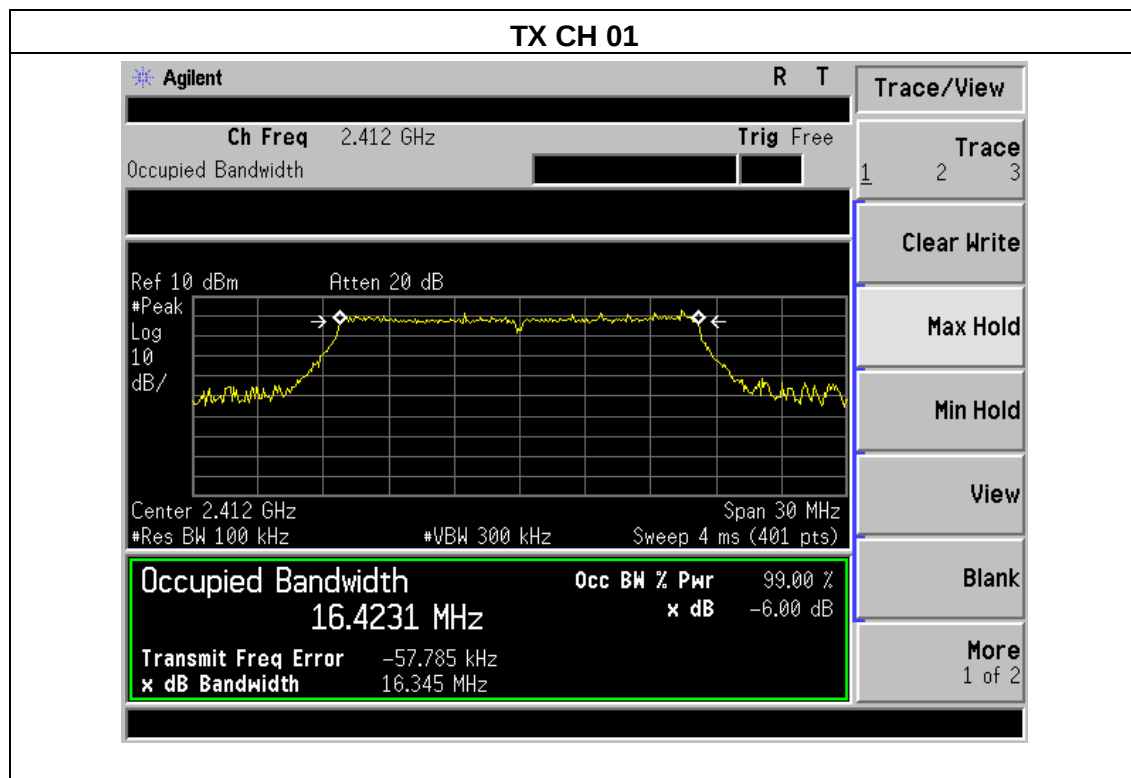




TX CH 06

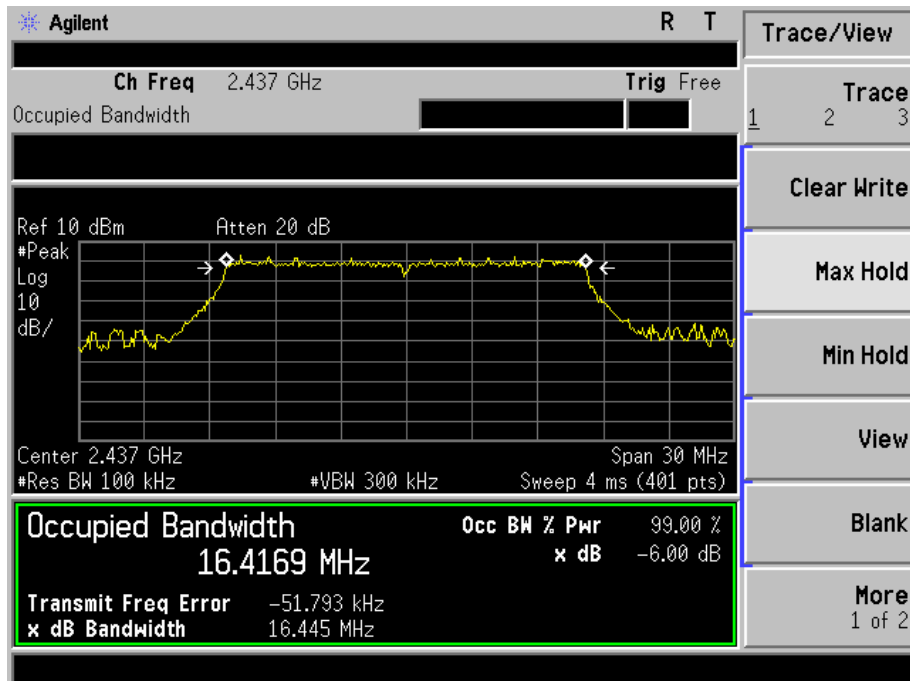


TX CH 11

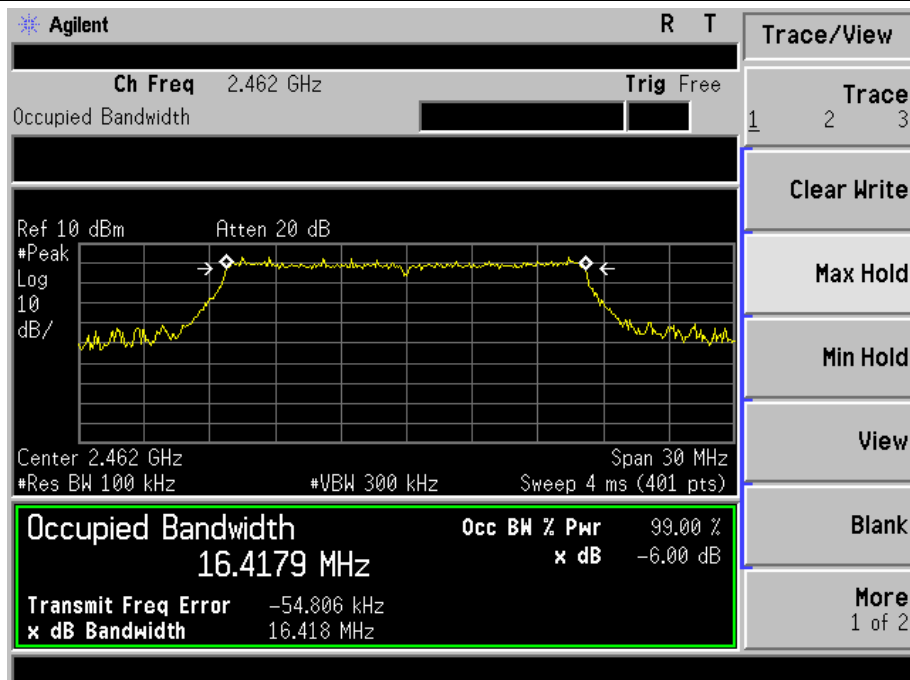




Temperature :	25°C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 5V
Test Mode :	TX n Mode(20M)		

Channel	Frequency (MHz)	6dB bandwidth (MHz)	Limit (kHz)	Result
Low	2412	17.136	500	Pass
Middle	2437	17.157	500	Pass
High	2462	17.156	500	Pass

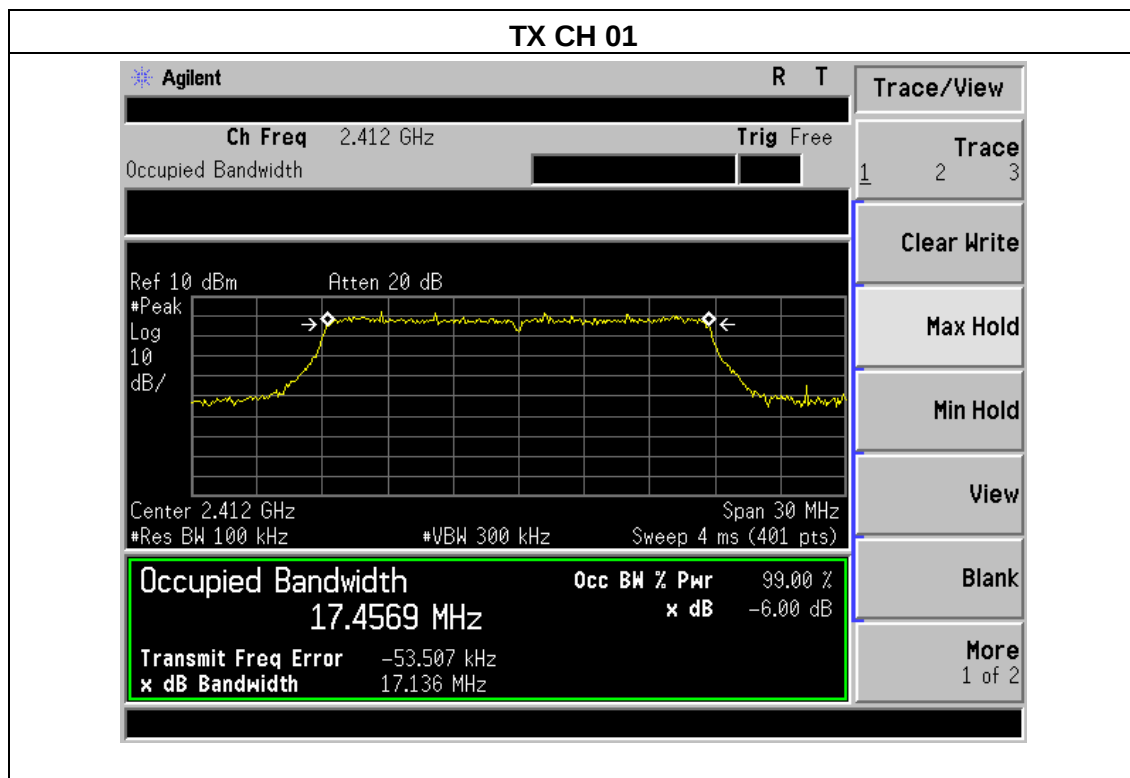




TX CH 06

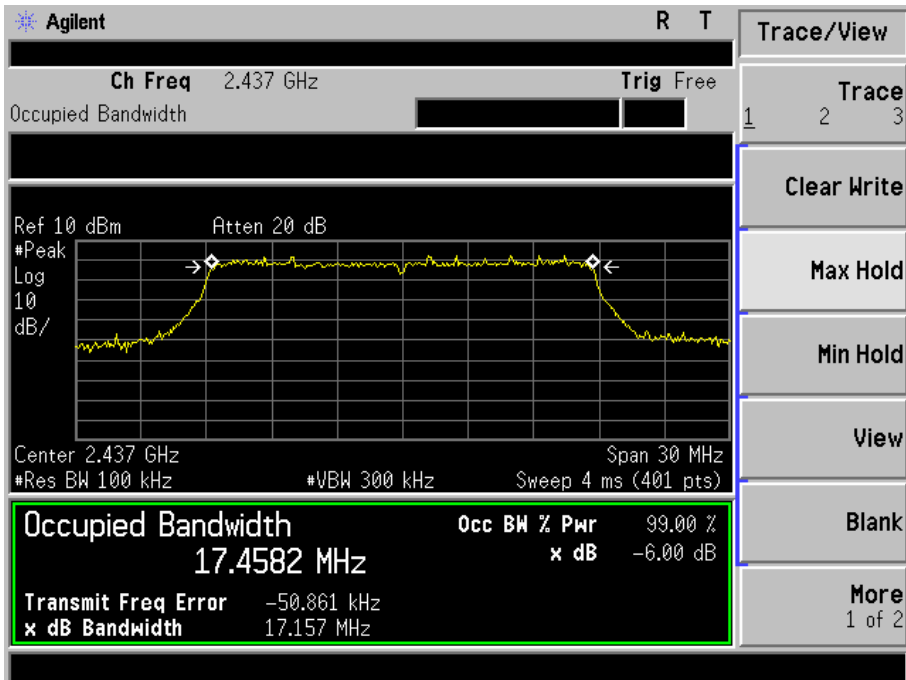


TX CH 11

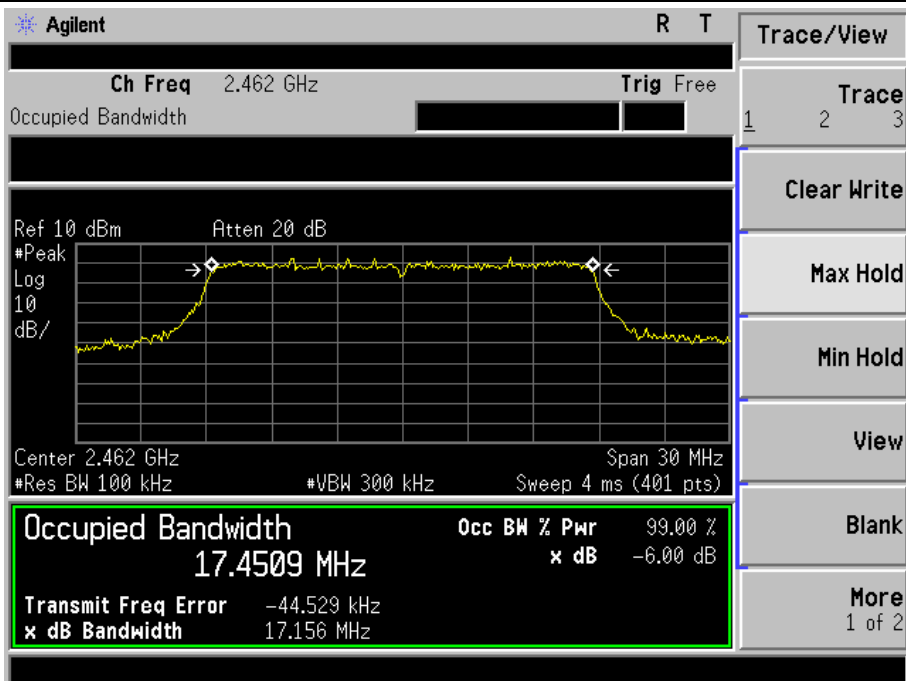




Temperature :	25°C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 5V
Test Mode :	TX n Mode(40M)		

Channel	Frequency (MHz)	6dB bandwidth (MHz)	Limit (kHz)	Result
Low	2422	35.384	500	Pass
Middle	2437	35.386	500	Pass
High	2452	35.251	500	Pass

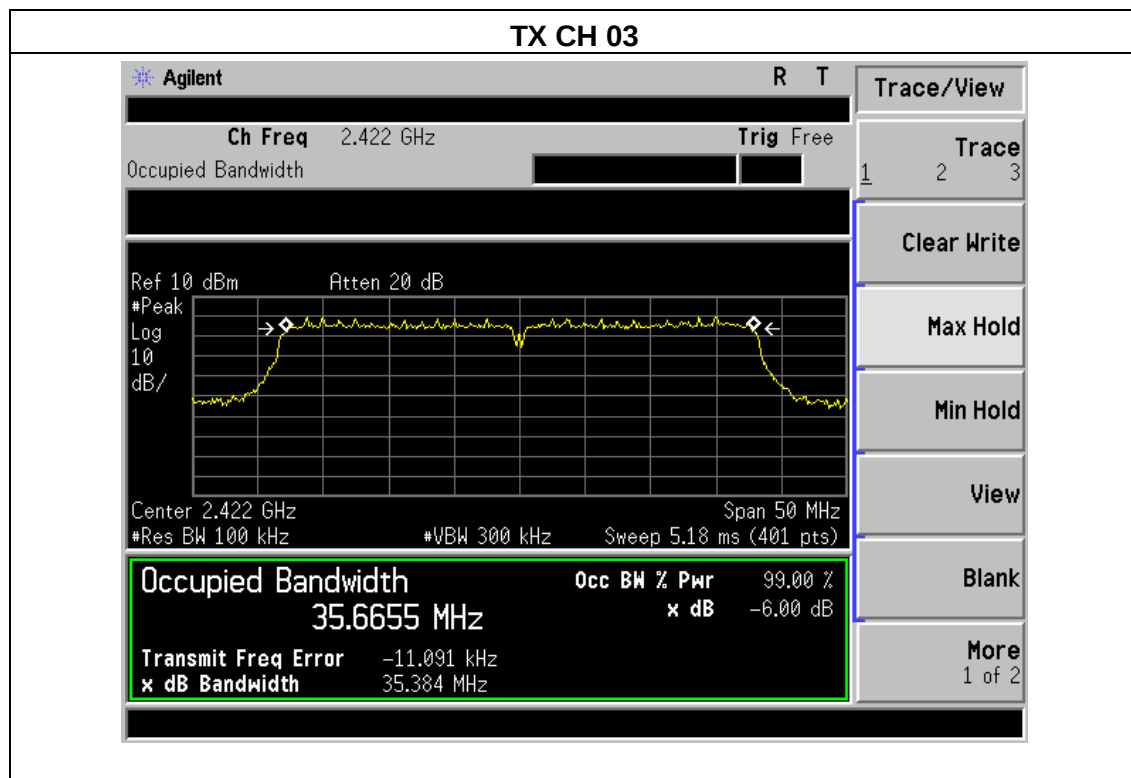

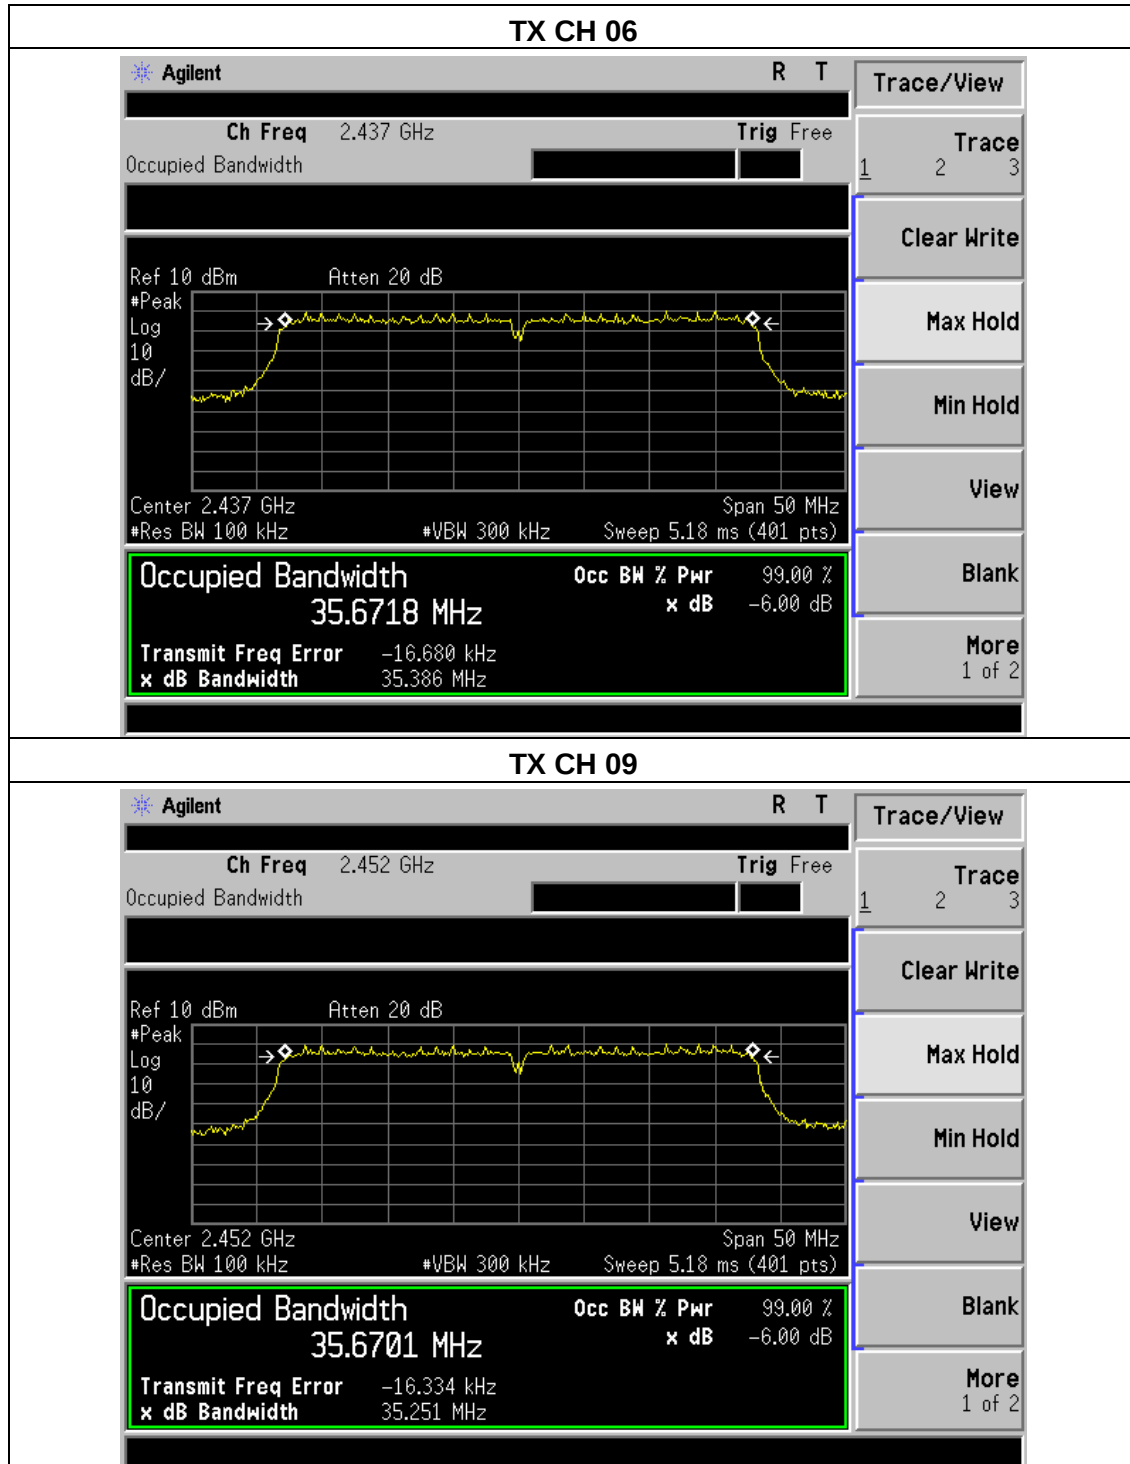



6. PEAK OUTPUT POWER TEST

6.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS

6.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the Power meter

6.1.2 DEVIATION FROM STANDARD

No deviation.

6.1.3 TEST SETUP



6.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

**6.1.5 TEST RESULTS**

Temperature :	25℃	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 5V

Test Channe	Frequency	Maximum Conducted Output Power(PK)	LIMIT
	(MHz)	(dBm)	dBm
802.11b Mode			
CH01	2412	12.95	30
CH06	2437	12.64	30
CH11	2462	12.37	30
802.11g Mode			
CH01	2412	11.86	30
CH06	2437	11.42	30
CH11	2462	11.23	30
802.11n-HT20 Mode			
CH01	2412	11.68	30
CH06	2437	11.59	30
CH11	2462	11.79	30
802.11n-HT40 Mode			
CH03	2422	10.62	30
CH06	2437	10.45	30
CH09	2452	10.24	30

7. 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE

7.1 APPLICABLE STANDARD

in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in§15.205(a), must also comply with the radiated emission limits specified in15.209(a).

7.2 TEST PROCEDURE

Using the following spectrum analyzer setting:

- a) Set the RBW = 100KHz.
- b) Set the VBW = 300KHz.
- c) Sweep time = auto couple.
- d) Detector function = peak.
- e) Trace mode = max hold.
- f) Allow trace to fully stabilize.

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP




7.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.


7.1 TEST RESULTS



802.11b: Band Edge, Left Side

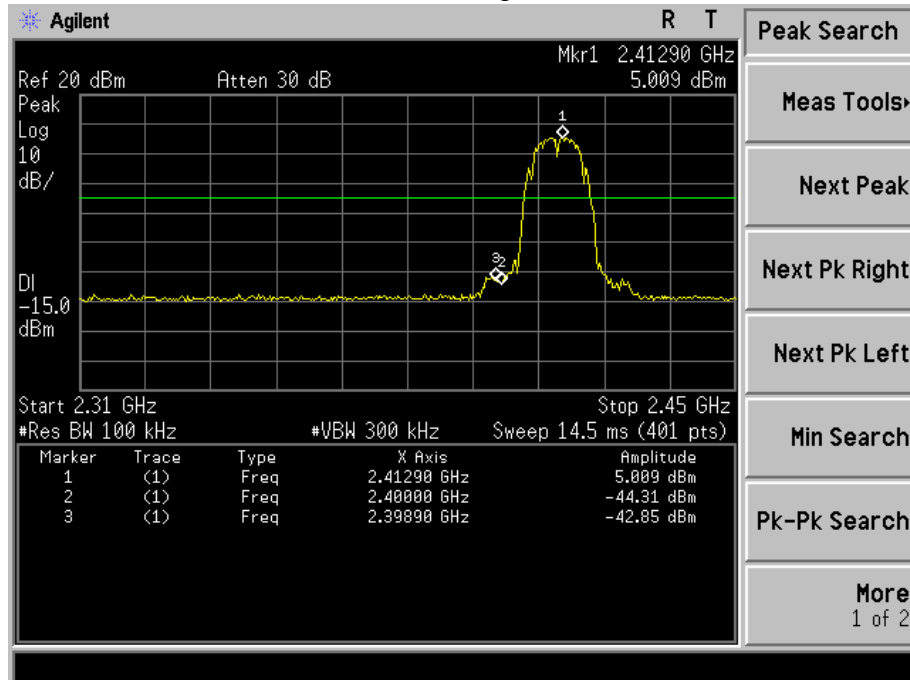


802.11b: Band Edge, Right Side

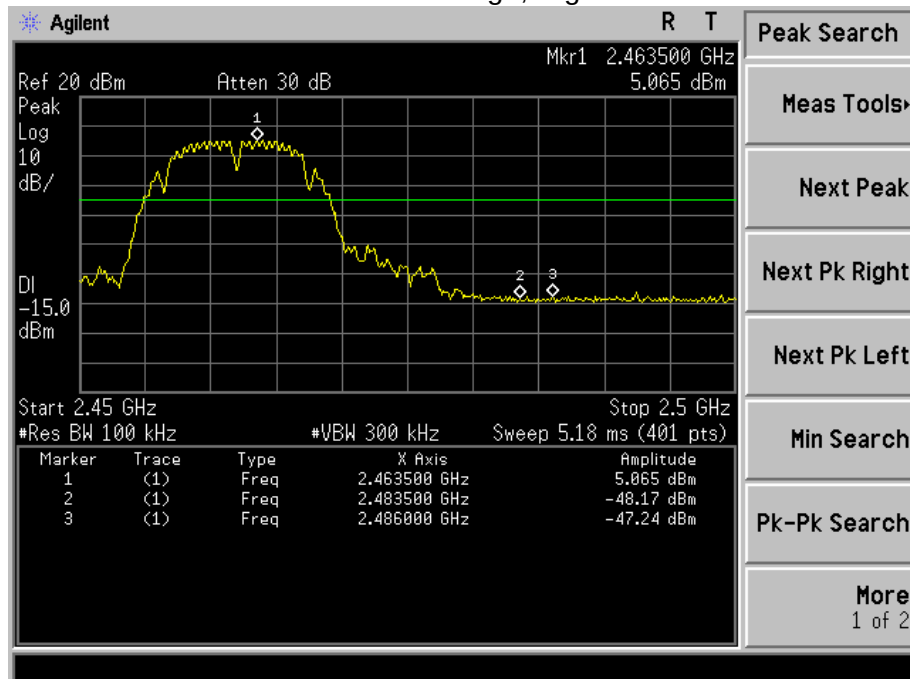




802.11g: Band Edge, Left Side

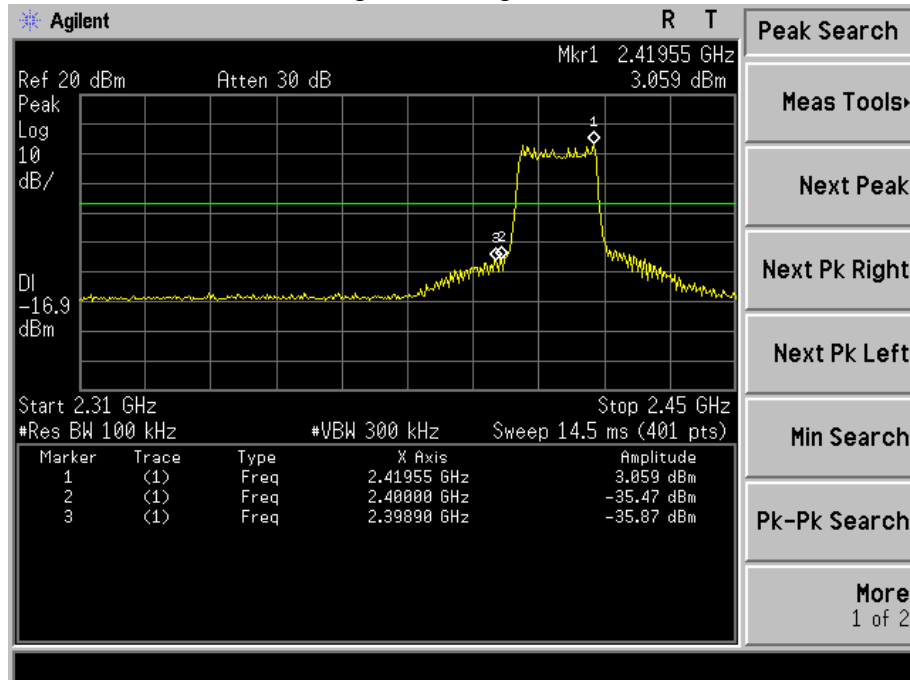


802.11g: Band Edge, Right Side

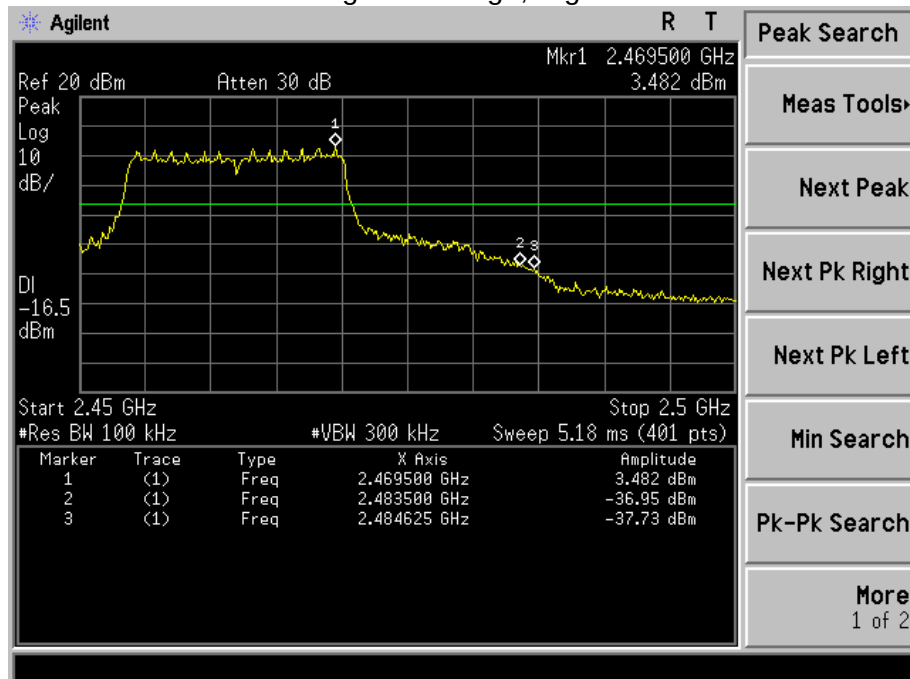




802.11n-HT20: Band Edge, Left Side

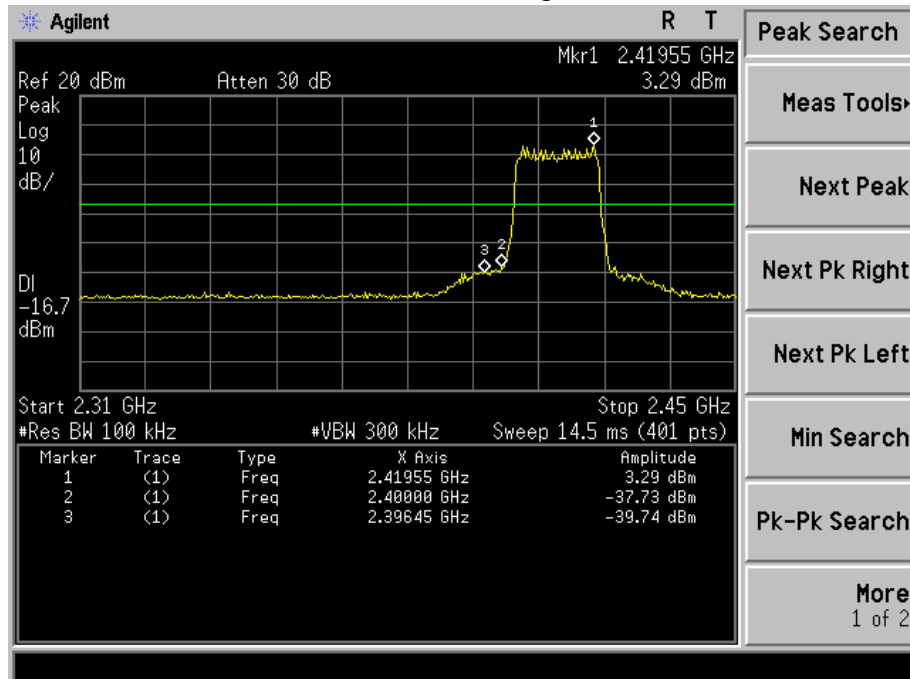


802.11n-HT20: Band Edge, Right Side

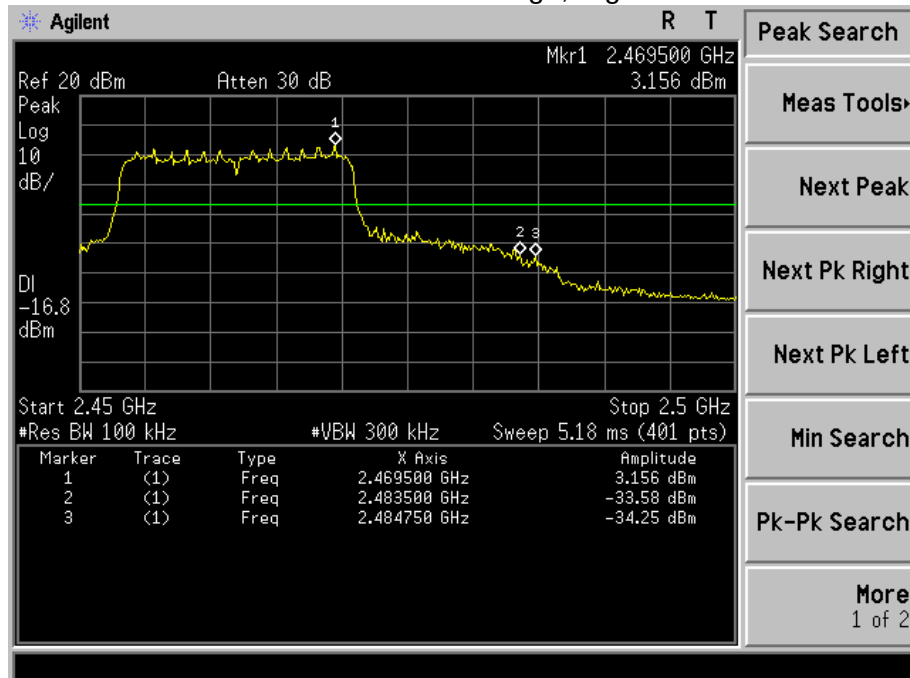




802.11n-HT40: Band Edge, Left Side






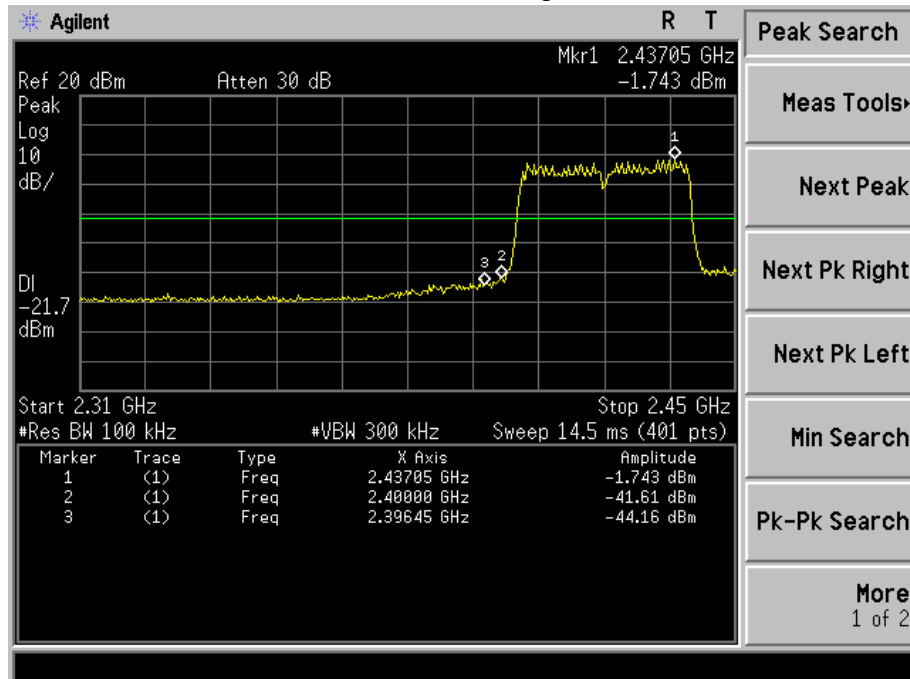


802.11n-HT40: Band Edge, Right Side

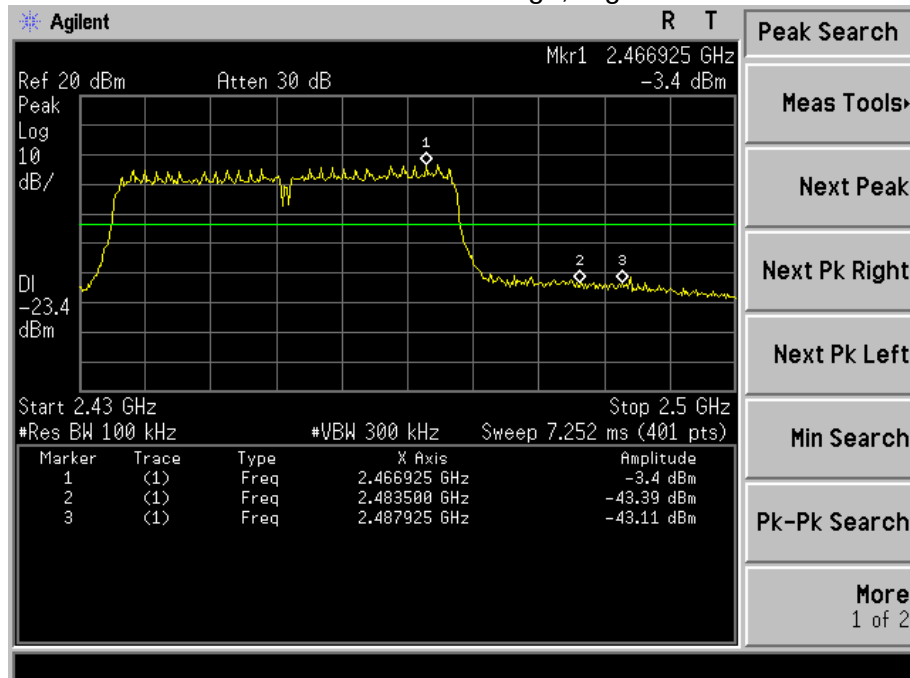

**CONDUCTED EMISSION MEASUREMENT**



802.11b

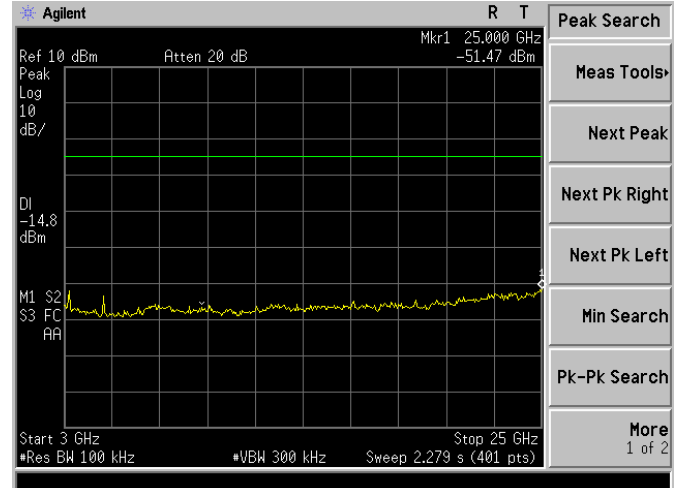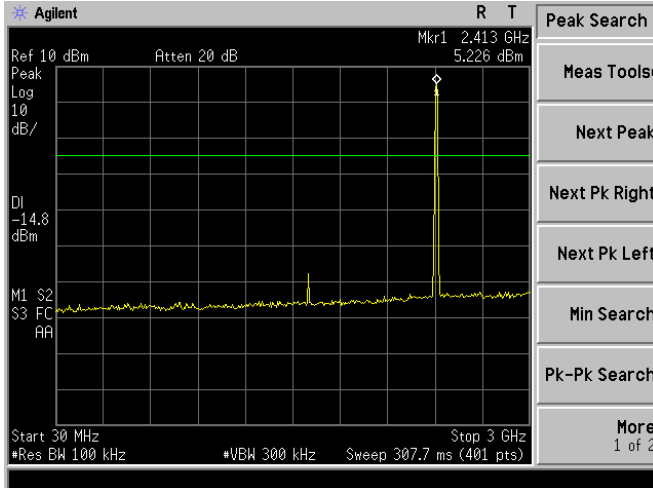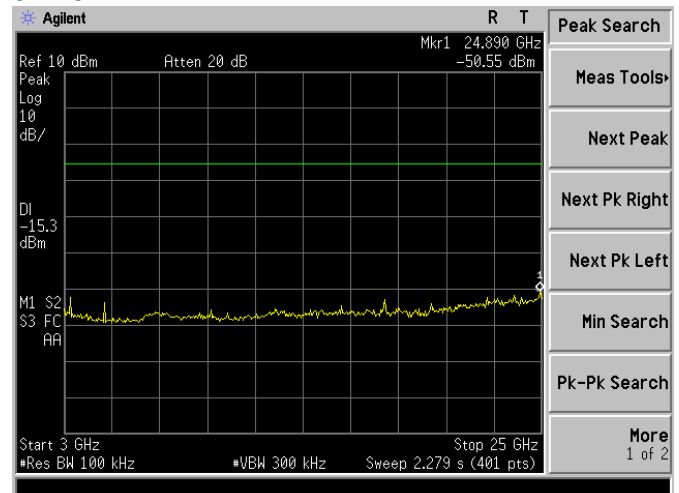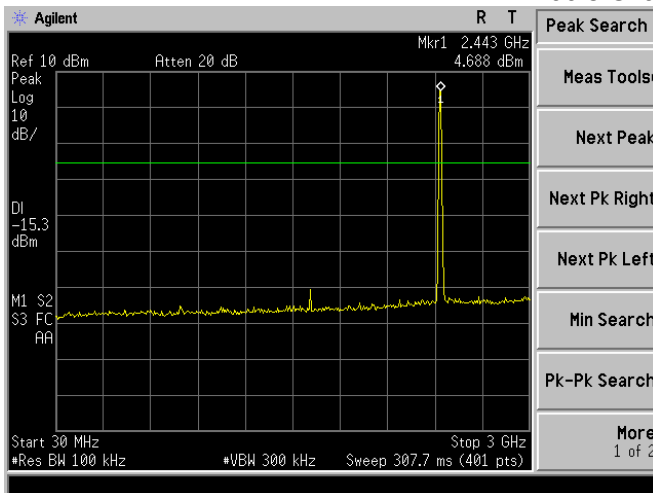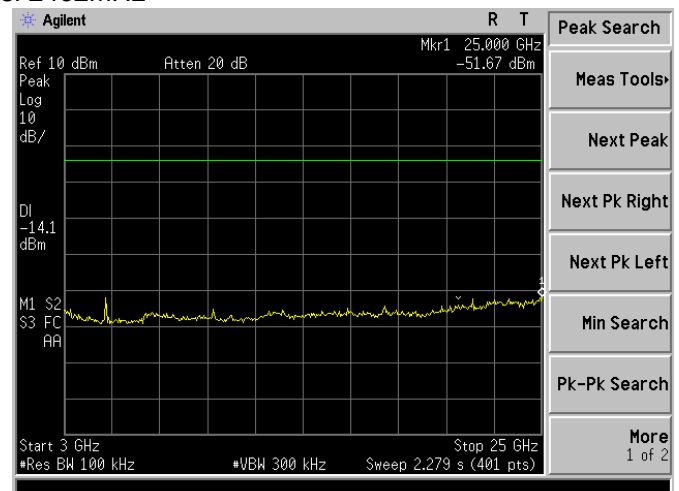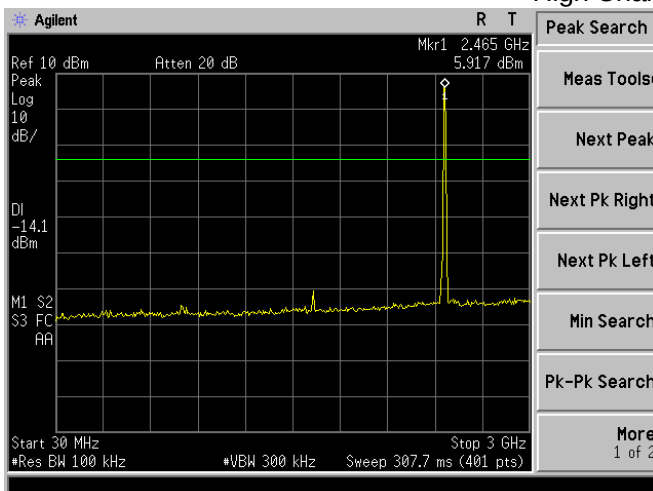Low Channel 2412MHz**Middle Channel 2437MHz****High Channel 2462MHz**





802.11g



Low Channel 2412MHz

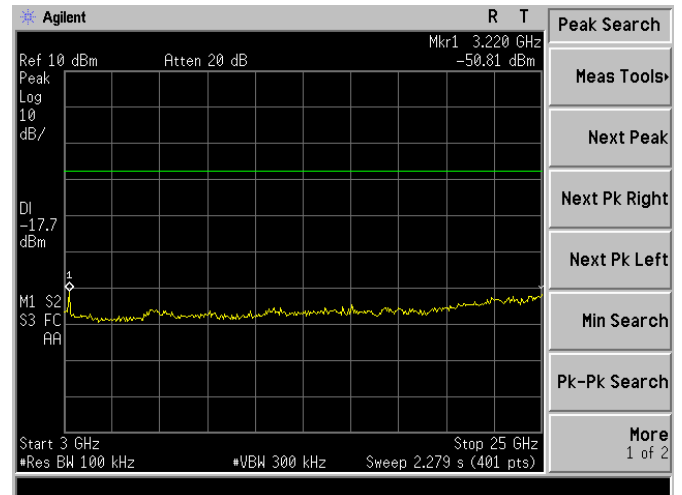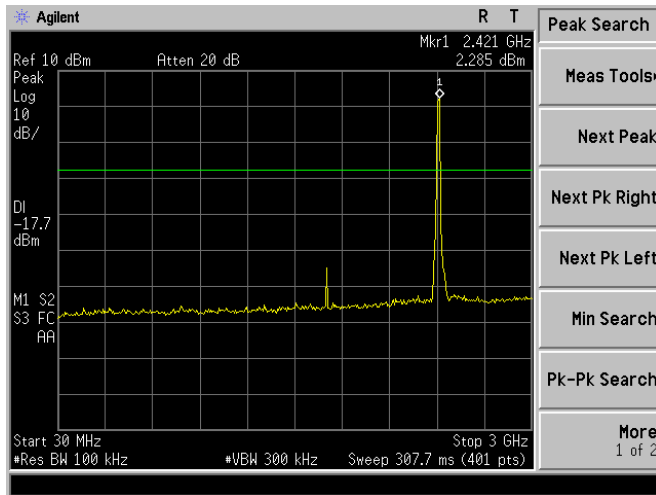

Middle Channel 2437MHz

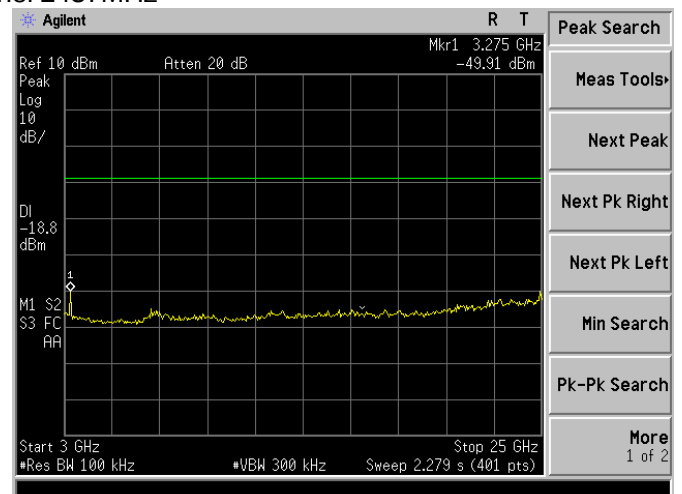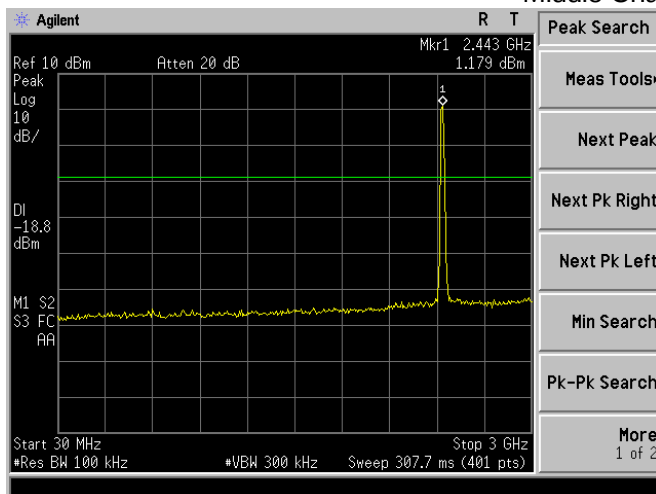



High Channel 2462MHz

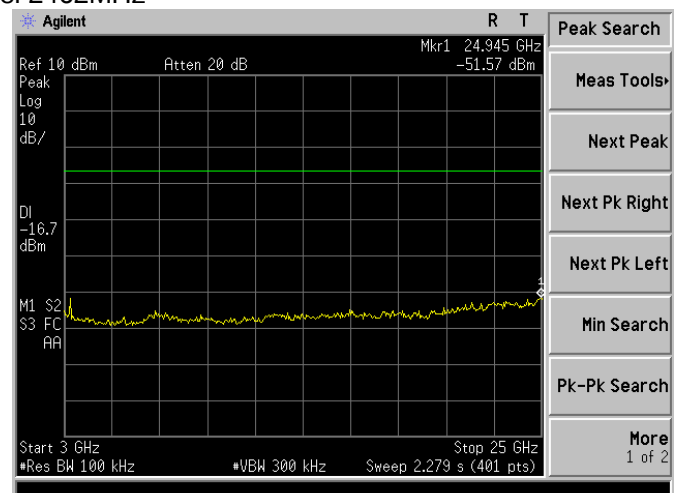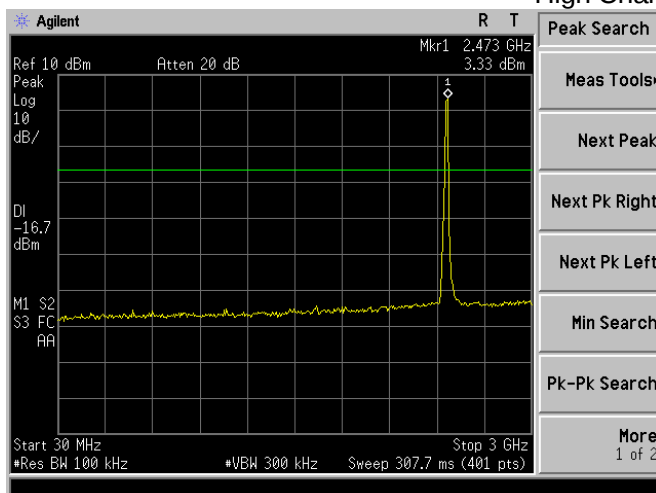





802.11n20



Low Channel 2412MHz

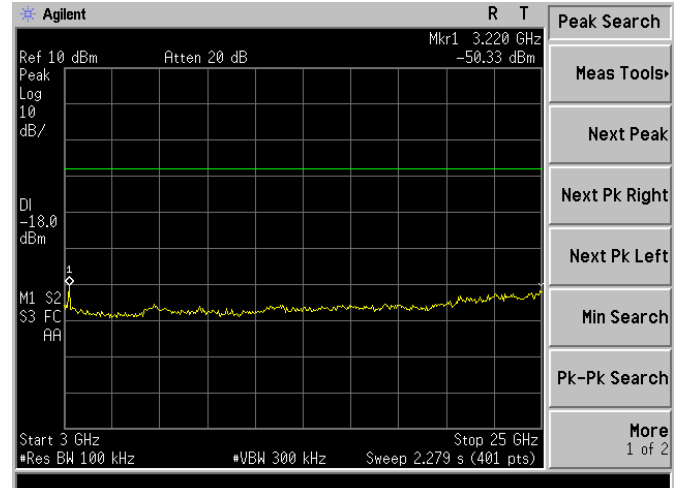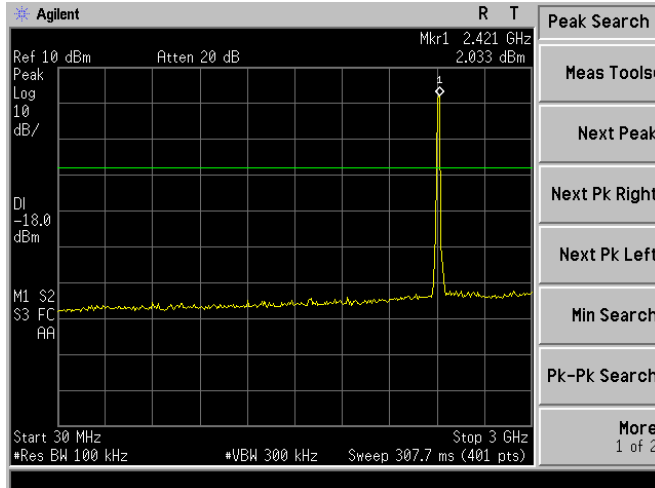

Middle Channel 2437MHz

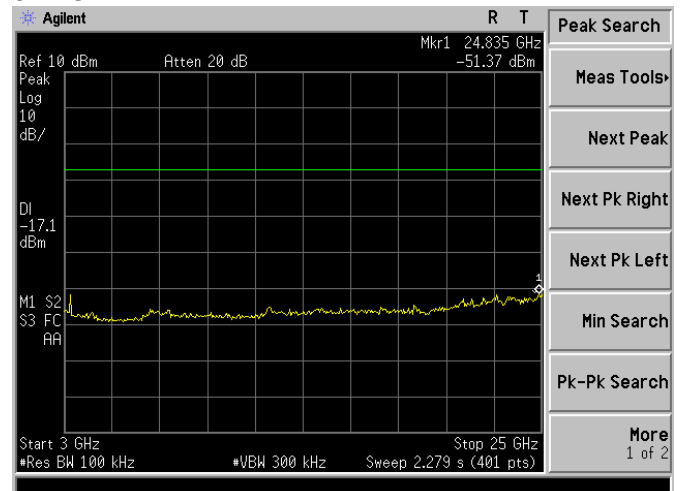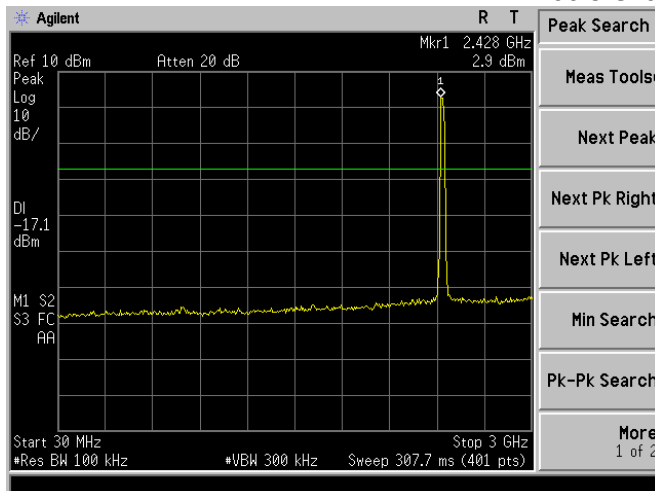



High Channel 2462MHz

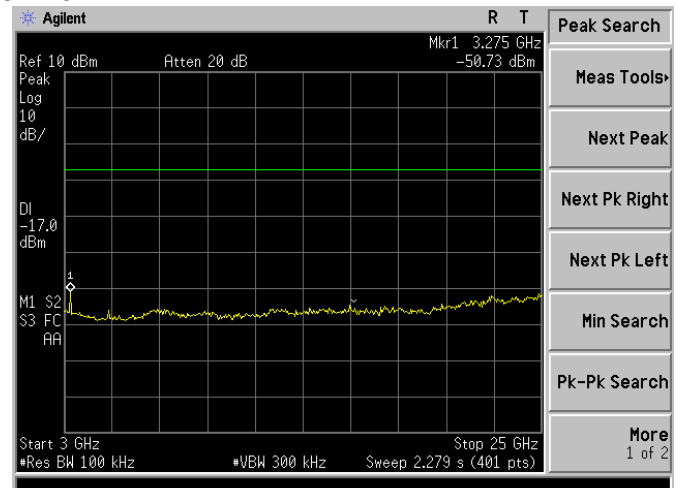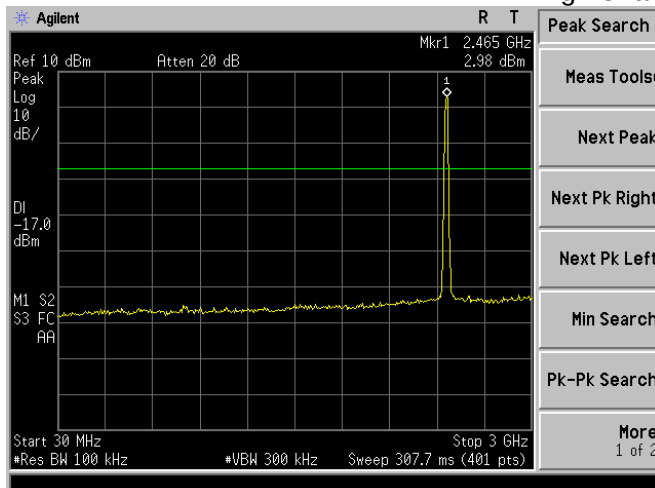





802.11n40



Low Channel 2422MHz

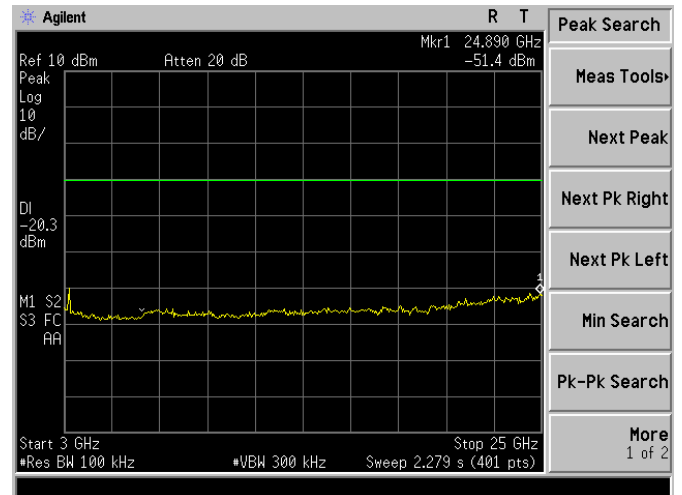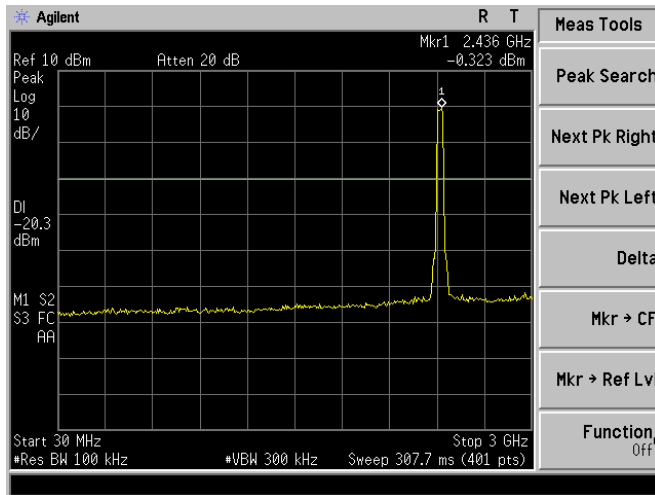

Middle Channel 2437MHz

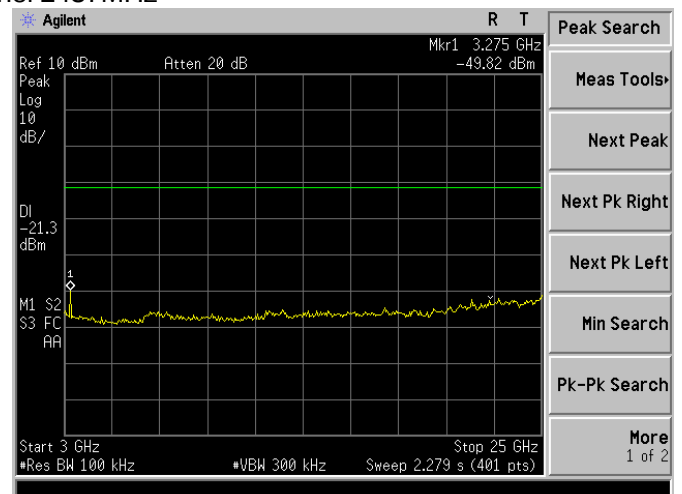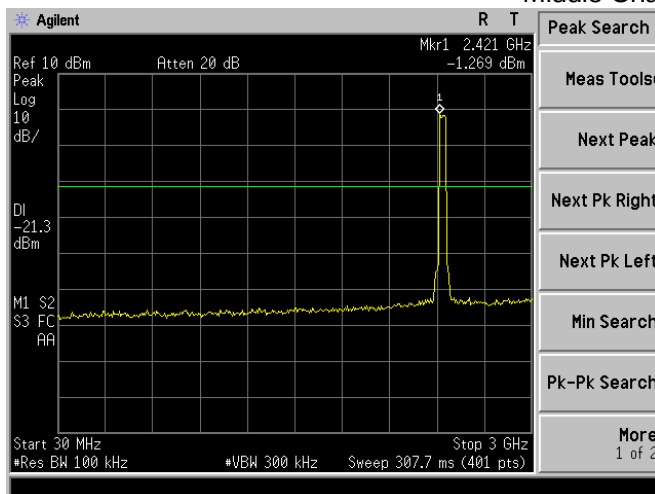

High Channel 2452MHz

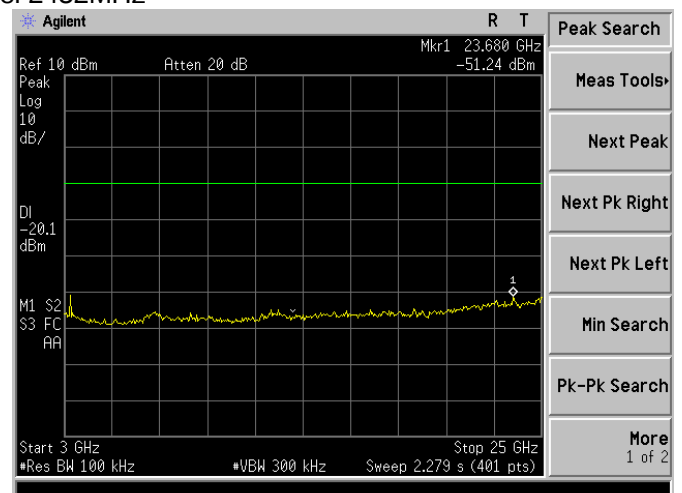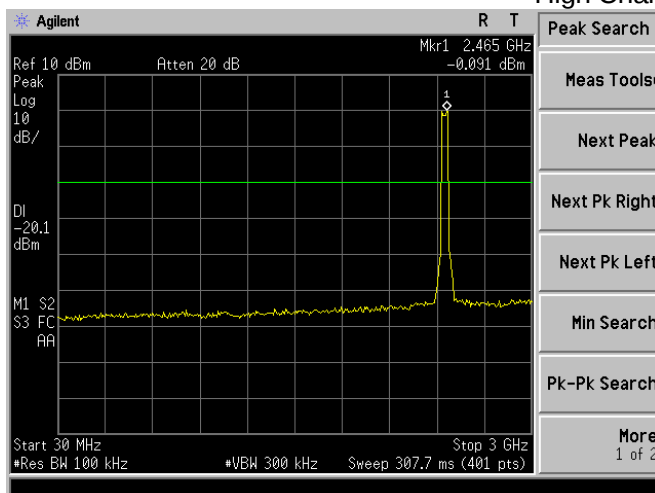



8. DUTY CYCLE OF TEST SIGNAL

8.1 STANDARD REQUIREMENT

Pre-analysis Check: While conducting average power measurement, duty cycle of each mode shall be checked to ensure its duty cycle in order to compensate for the loss due to insufficient ratio of duty cycle.

All duty cycle is pre-scanned, and result as obtained below shows only the most representative ones where duty cycle is conducted as the given transmission with given virtual operation that expresses the percentage.

8.2 FORMULA:

Duty Cycle = $T_{on} / (T_{on} + T_{off})$


Measurement Procedure:

1. Set span = Zero
2. RBW = 8MHz
3. VBW = 8MHz,
4. Detector = Peak

Duty Cycle:


	Duty Cycle	Duty Fator (dB)
802.11b	1	0
802.11g	1	0
802.11n(HT20)	1	0
802.11n(HT40)	1	0

802.11b

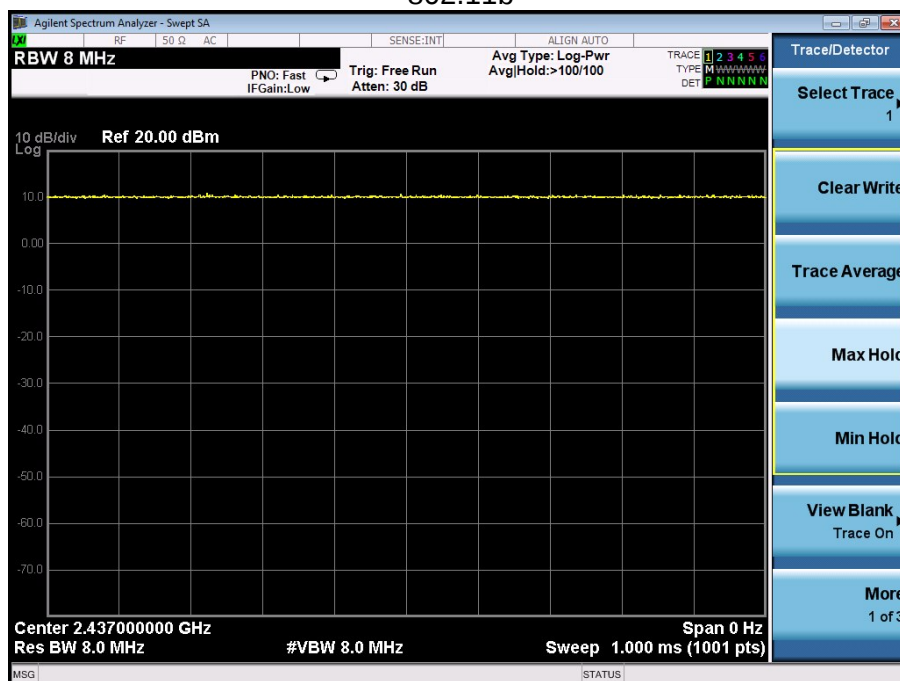




802.11g

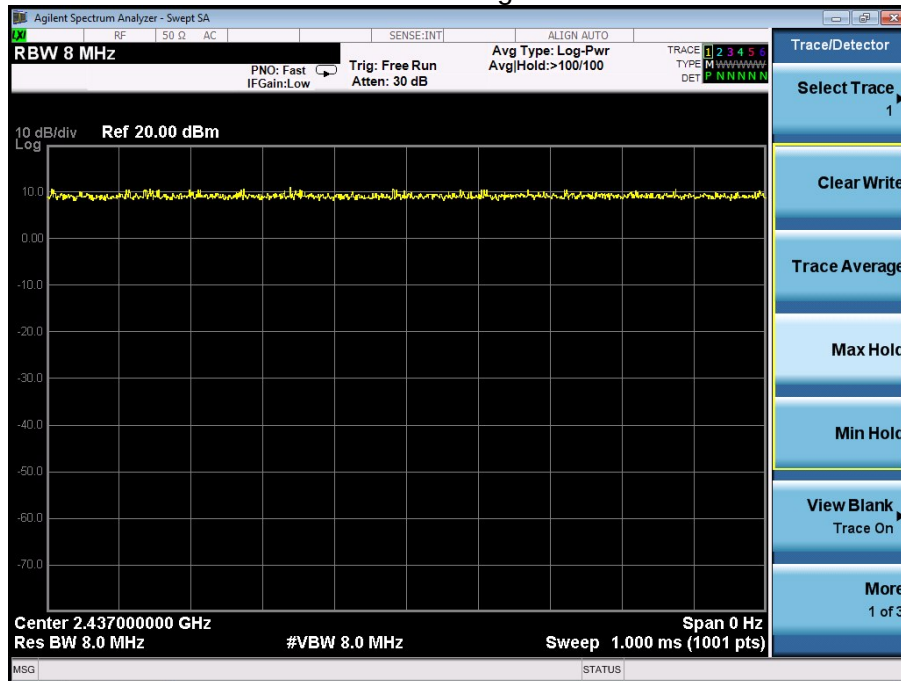


802.11n(HT20)

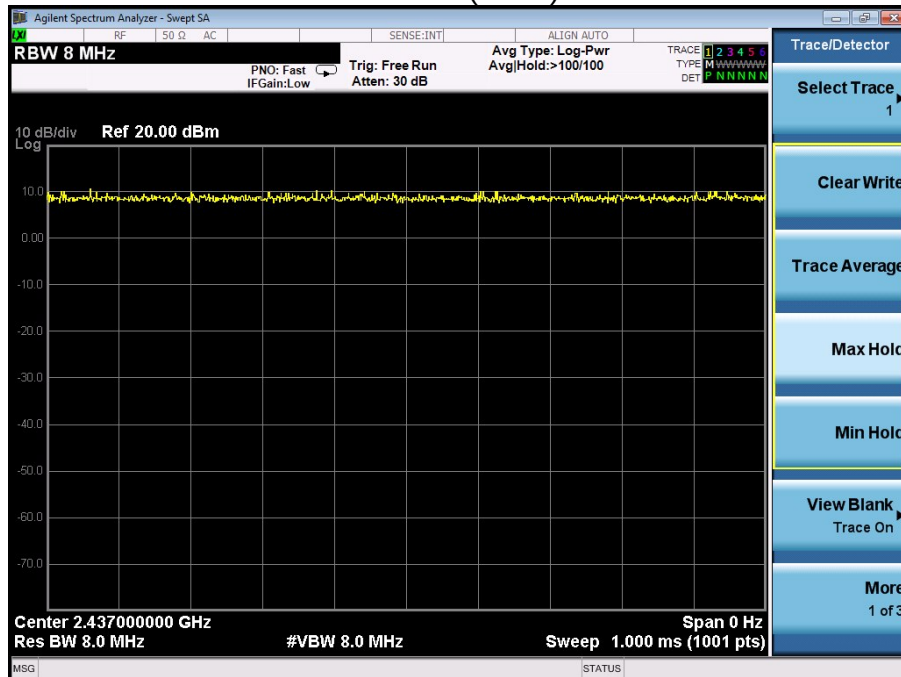



802.11n(HT40)

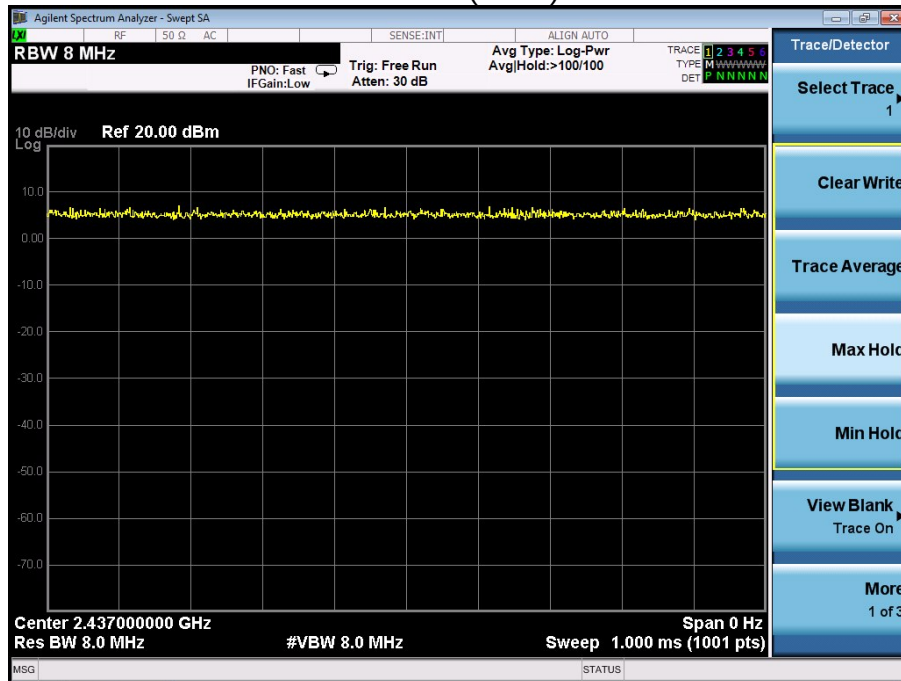



9. ANTENNA REQUIREMENT

9.1 STANDARD REQUIREMENT


15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

9.2 EUT ANTENNA


The EUT antenna is FPCB Antenna. It complies with the standard requirement.

10. EUT TEST PHOTO


Conducted Measurement Photos

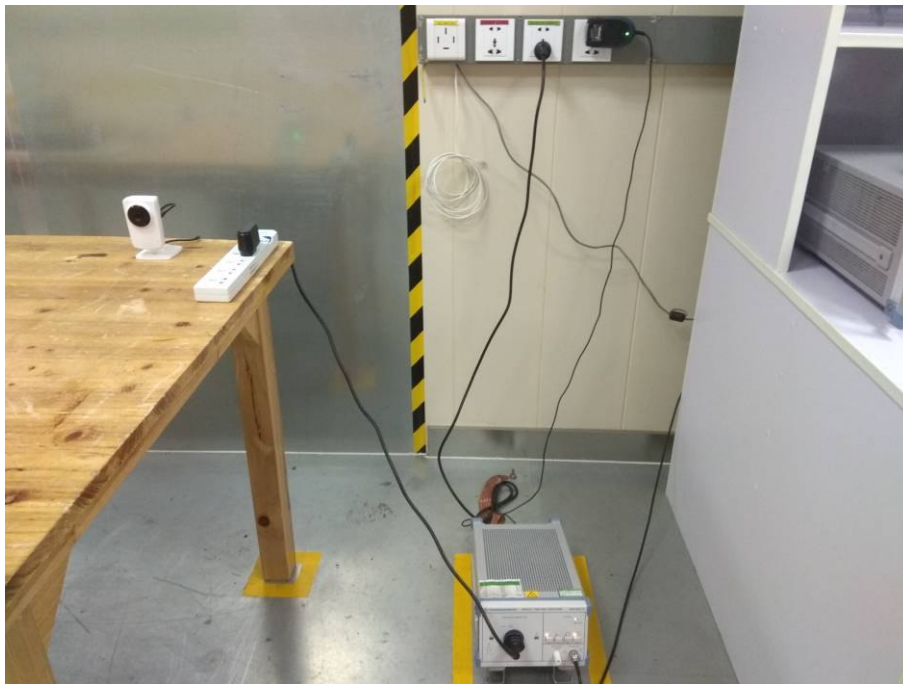

Radiated Measurement Photos

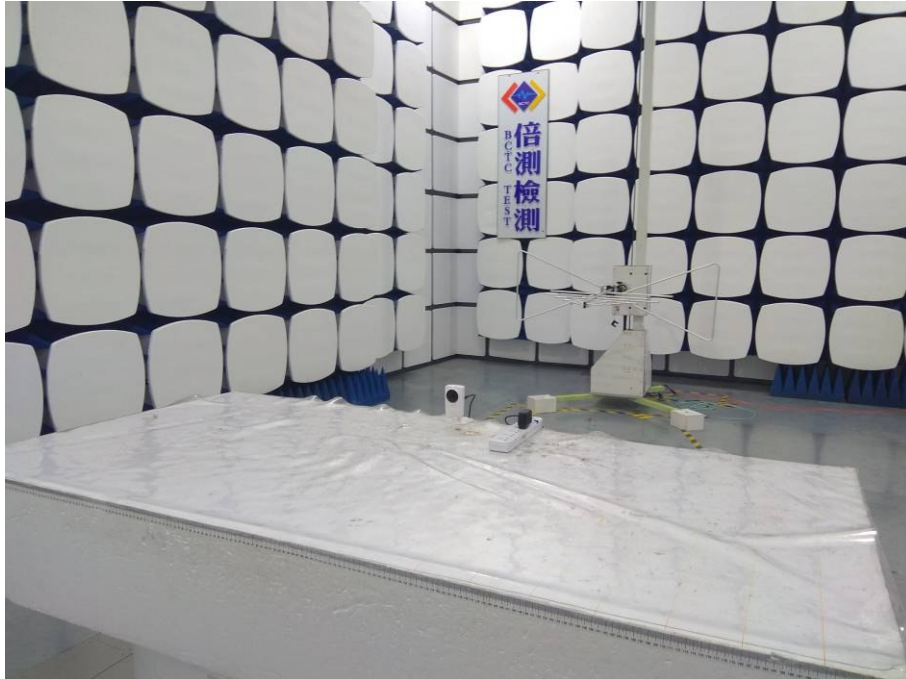

Radiated Measurement Photos

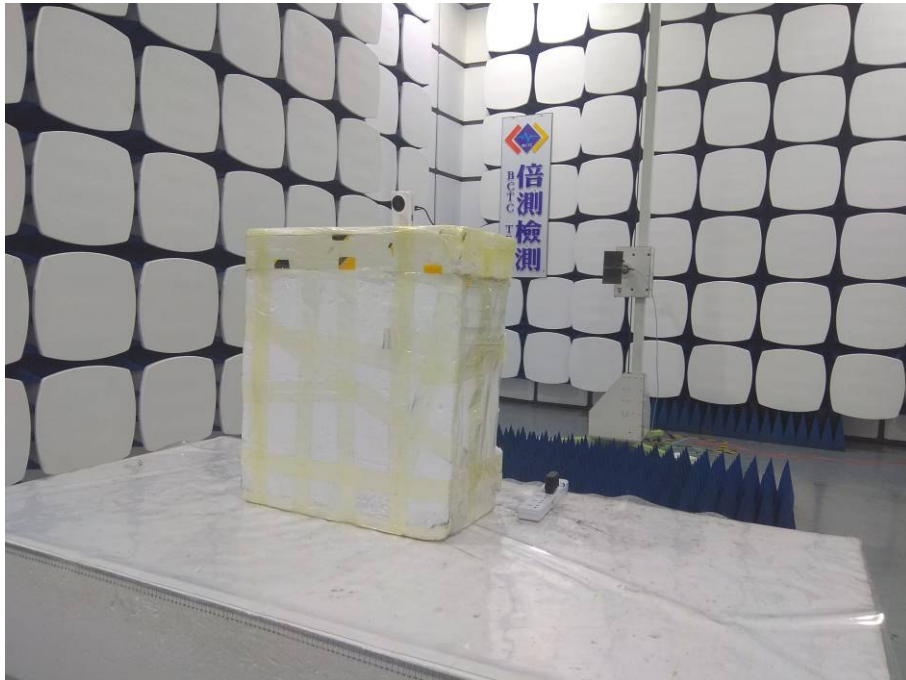

11. EUT PHOTO



***** END OF REPORT *****