



RF Exposure Report

**Test report
On Behalf of
Travis GT b.v.
For
WIRELESS CHARGING PAD**

Model No.: QWZ6

FCC ID: 2APJY-QWZ6

Prepared for : Travis GT b.v.
Stationsplein 45, 3013 AK Rotterdam, The Netherlands, Rotterdam,
Netherlands

Prepared By : Shenzhen HUAKE Testing Technology Co., Ltd.
1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping
Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

Date of Test: Jan. 19, 2019 to Jan. 25, 2019

Date of Report: Jan. 25, 2019

Report Number: HK1901250238E



TEST RESULT CERTIFICATION

Applicant's name: Travis GT b.v.
Address: Stationsplein 45, 3013 AK Rotterdam, The Netherlands, Rotterdam, Netherlands
Manufacture's Name: Travis GT b.v.
Address: Stationsplein 45, 3013 AK Rotterdam, The Netherlands, Rotterdam, Netherlands
Factory's Name: Dongguan Zhongzhenglihe Electronics Co., Ltd
Address: 3rdFloor, No.1 Building, Kengzikou Road, Daping Community, Tangxia Town, Dongguan, China

Product description
Trade Mark: Travis
Product name.....: WIRELESS CHARGING PAD
Model and/or type reference : QWZ6

Standards: KDB 680106 D01 RF Exposure Wireless Charging Base App v03

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen HUAKE Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen HUAKE Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Date of Test:
Date (s) of performance of tests: Jan. 19, 2019 to Jan. 25, 2019
Date of Issue.....: Jan. 25, 2019
Test Result.....: **Pass**

Testing Engineer :

(Gary Qian)

Technical Manager :

(Eden Hu)

Authorized Signatory :

(Jason Zhou)



Table of Contents	Page
1 . TEST SUMMARY	4
2. GENERAL INFORMATION	5
2.1. PRODUCT DESCRIPTION	5
2.2 OPERATION OF EUT DURING TESTING	6
2.3 DESCRIPTION OF TEST SETUP	6
5. TEST EQUIPMENT LIST	7
6. RADIO FREQUENCY (RF) EXPOSURE TEST	8
6.1. LIMITS	8
6.2. TEST SETUP	8
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	12



1. TEST SUMMARY

1.1 TEST PROCEDURES AND RESULTS

DESCRIPTION OF TEST	RESULT
E and H field strength measurements	Compliant

1.2 TEST FACILITY

Test Firm : Shenzhen HUAKE Testing Technology Co., Ltd.

Address : 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road,
Heping Community, Fuhai Street, Bao'an District, Shenzhen,
Guangdong, China

IC Registration No.: 21210

FCC Registration No.: CN1229

Test Firm Registration Number : 616276

1.3 MEASUREMENT UNCERTAINTY

Measurement Uncertainty

Conducted Emission Expanded Uncertainty = 2.23dB, k=2

Radiated emission expanded uncertainty(9kHz-30MHz) = 3.08dB, k=2

Radiated emission expanded uncertainty(30MHz-1000MHz) = 4.42dB, k=2

Radiated emission expanded uncertainty(Above 1GHz) = 4.06dB, k=2



2. GENERAL INFORMATION

2.1. PRODUCT DESCRIPTION

A major technical description of EUT is described as following

Operation Frequency	116.9kHz
Maximum field strength	55.65dBuV/m(Peak)@3m
Number of channels	1
Antenna Designation	Integrated Antenna (Met 15.203 Antenna requirement)
Hardware Version	V1.0
Software Version	V1.0
Power Supply	DC 5V or DC 9V(Worst case)




2.2 OPERATION OF EUT DURING TESTING

NO.	TEST MODE DESCRIPTION
1	Wireless charging Mode(Full load)
2	Wireless charging Mode(half load)
3	Wireless charging Mode(Null load)
Note: 1. The mode 1 was the worst case and only the data of the worst case record in this report.	

2.3 DESCRIPTION OF TEST SETUP

Configure :

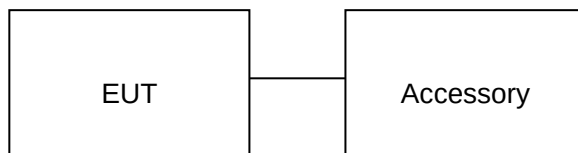

Item	Equipment	Model No.	ID or Specification	Remark
1	Adapter	RP-PC007	DC 5V3A or DC 9V/2A	Support
2	Wireless Load	N/A	10W	Support



3. TEST EQUIPMENT LIST

Description	Manufacturer	Model	S/N	Cal. Date	Cal. Due
Broadband Field Meter	Narda Safety Test Solutions GmbH	NBM-550	J-0004	June 12, 2018	June 11, 2019
Probe FHP	Narda Safety Test Solutions GmbH	EHP-50F	J-0015	June 12, 2018	June 11, 2019




4. RADIO FREQUENCY (RF) EXPOSURE TEST

4.1. LIMITS

For devices designed for typical desktop applications, such as wireless charging pads, RF exposure evaluation should be conducted assuming a user separation distance of 15 cm. E and H field strength measurements or numerical modeling may be used to demonstrate compliance. Measurements should be made from all sides and the top of the primary/client pair, with the 15 cm measured from the center of the probe(s) to the edge of the device. Emissions between 100 kHz to 300 kHz should be assessed versus the limits at 300 kHz in Table 1 of Section 1.1310: 614 V/m and 1.63 A/m.

4.2. TEST SETUP

Position A: Front of EUT; Position B: Left of EUT; Position C: back of EUT; Position D: Right of EUT; Position E: Top of EUT(20 cm measure distance);

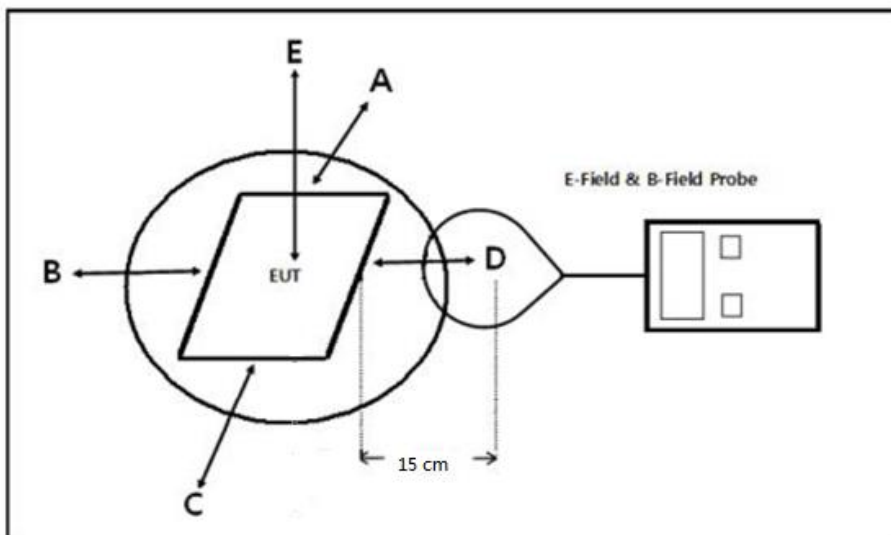



4.3. TEST PROCEDURE

The EUT was placed on a non-conductive table top and the ancillary equipment (e.g. mobile phone) was placed on the EUT for charging.

Maximum E-field and H-field measurements were tested 15cm from each side of the EUT. For top side the measure distance is 15cm.

Along the side of the EUT to center of E-field probe and H-field probe were positioned at the location to search maximum field strength.



4.4. TEST RESULT

Test condition: Mode 1

E-field strength test result:

Frequency Range	Probe Position A (V/m)	Probe Position B (V/m)	Probe Position C (V/m)	Probe Position D (V/m)	Probe Position E (V/m)	FCC Limit (V/m)
116.9kHz	0.16	0.16	0.16	0.16	2.62	614

H-field strength test result:

Frequency Range	Probe Position A (A/m)	Probe Position B (A/m)	Probe Position C (A/m)	Probe Position D (A/m)	Probe Position E (A/m)	FCC Limit (A/m)
116.9kHz	0.18	0.18	0.18	0.18	0.59	1.63

Test condition: Mode 2

E-field strength test result:

Frequency Range	Probe Position A (V/m)	Probe Position B (V/m)	Probe Position C (V/m)	Probe Position D (V/m)	Probe Position E (V/m)	FCC Limit (V/m)
126.8kHz	0.14	0.14	0.14	0.14	2.14	614

H-field strength test result:

Frequency Range	Probe Position A (A/m)	Probe Position B (A/m)	Probe Position C (A/m)	Probe Position D (A/m)	Probe Position E (A/m)	FCC Limit (A/m)
126.8kHz	0.12	0.12	0.12	0.12	0.42	1.63



Test condition: Mode 3

E-field strength test result:


Frequency Range	Probe Position A (V/m)	Probe Position B (V/m)	Probe Position C (V/m)	Probe Position D (V/m)	Probe Position E (V/m)	FCC Limit (V/m)
131.9kHz	0.16	0.16	0.16	0.16	1.67	614

H-field strength test result:

Frequency Range	Probe Position A (A/m)	Probe Position B (A/m)	Probe Position C (A/m)	Probe Position D (A/m)	Probe Position E (A/m)	FCC Limit (A/m)
131.9kHz	0.13	0.13	0.13	0.13	0.35	1.63

APPENDIX A: PHOTOGRAPHS OF TEST SETUP

Position E

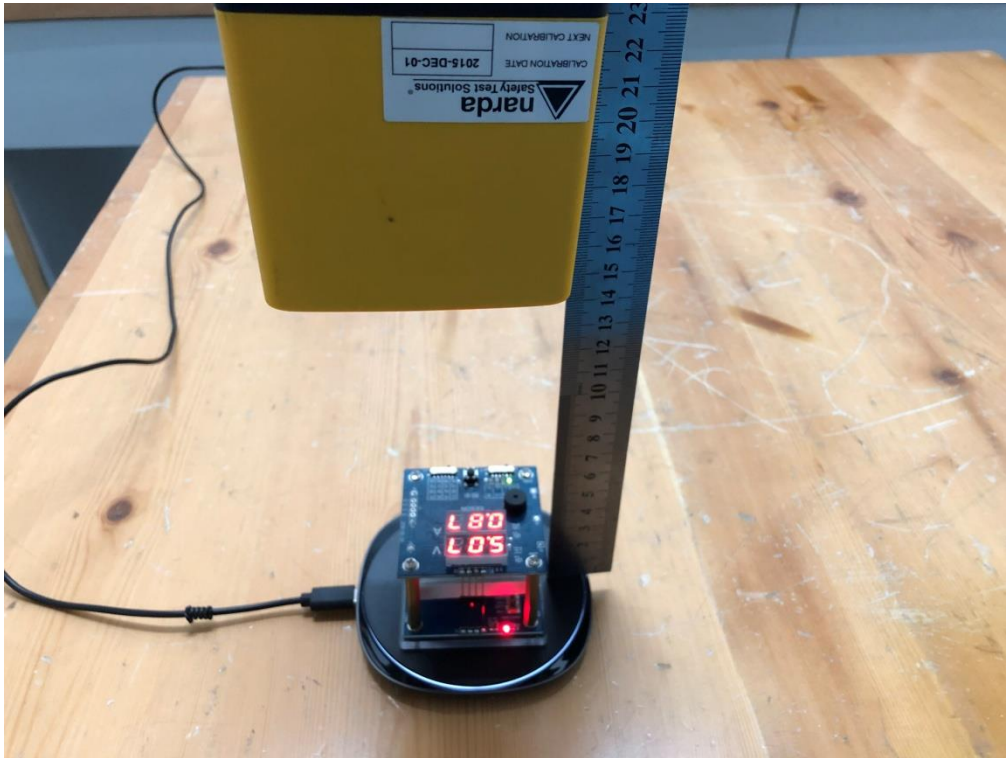

Position A



Position B



Position C





Position D



----END OF REPORT----