

TEST REPORT

Report Number: 104468298MPK-004

Project Numbers: G104468298

December 11, 2020

Testing performed on the

RFID Reader

Model: 922194627

FCC ID: 2APK7-922194627V10

IC: 23979-92219462710

To

FCC Part 15 Subpart C (15.247)

Industry Canada RSS-247 Issue 2

For

Fastenal Company

Test Performed by:

Intertek

1365 Adams Court

Menlo Park, CA 94025 USA

Test Authorized by:

Fastenal Company

8918 Beckett Rd.

West Chester, OH 45069 USA

Prepared by:


Aaron Chang

Date: December 11, 2020

Reviewed by:


Krishna K Vemuri

Date: December 11, 2020

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to copy or distribute this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program. This report must not be used to claim product endorsement by A2LA, NIST nor any other agency of the U.S. Government.

Report No. 104468298MPK-004

Equipment Under Test:

Trade Name:

Model Number:

RFID Reader

Fastenal Company

922194627

Applicant:

Contact:

Address:

Fastenal Company

Tony McIntosh

Fastenal Company

8918 Beckett Rd.

West Chester, OH 45069

Country

USA

Tel. Number:

Email:

(513) 644-0074

Mmcintos@fastenal.com

Applicable Regulation:

FCC Part 15 Subpart C (15.247)


Industry Canada RSS-247 Issue 2

Date of Test:


March 5-30 & April 4, 2018 &

November 22-26, 2020

We attest to the accuracy of this report:



Aaron Chang
Project Engineer

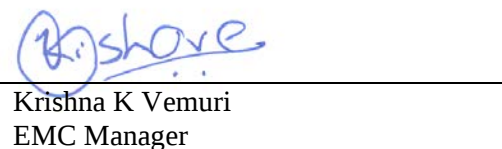

Krishna K Vemuri
EMC Manager

TABLE OF CONTENTS

1.0	Introduction.....	5
1.1	Summary of Tests	5
2.0	General Description	6
2.1	Product Description	6
2.2	Related Submittal(s) Grants.....	7
2.3	Test Methodology	7
2.4	Test Facility	7
3.0	System Test Configuration.....	8
3.1	Support Equipment	8
3.2	Block Diagram of Test Setup.....	8
3.3	Justification	9
3.4	Mode of Operation During Test.....	9
3.5	Modifications Required for Compliance	9
3.6	Additions, Deviations and Exclusions from Standards.....	9
4.0	Transmitter Emissions Measurement Results.....	10
4.1	20dB Bandwidth, and 99% Occupied Bandwidth	10
4.1.1	Procedure	10
4.1.2	Test Result	11
4.2	Conducted Output Power at Antenna Terminals	15
4.2.1	Requirement.....	15
4.2.2	Procedure	15
4.2.3	Test Result	16
4.3	Carrier Frequency Separation	20
4.3.1	Requirement.....	20
4.3.2	Procedure	20
4.3.3	Test Result	21
4.4	Number of Channels	23
4.4.1	Requirement.....	23
4.4.2	Procedure	23
4.4.3	Test Result	24
4.5	Average Channel Occupancy Time	25
4.5.1	Requirement.....	25
4.5.2	Procedure	25
4.5.3	Test Results.....	26
4.6	Out-of-Band Conducted Emissions	28
4.6.1	Requirement.....	28
4.6.2	Procedure	28
4.6.3	Test Result	29
4.7	Transmitter Radiated Emissions	37
4.7.1	Requirement.....	37
4.7.2	Procedure	37
4.7.3	Field Strength Calculation	38
4.7.4	Test Results.....	38
4.7.5	Test Setup Photographs	48
4.8	AC Line Conducted Emission	51

4.8.1	Requirement.....	51
4.8.2	Procedure	52
4.8.3	Test Result	53
4.8.4	Test Configuration Photographs	55
5.0	List of Test Equipment	56
6.0	Document History	57

1.0 Introduction

This report is designed to show compliance of the 900 MHz transceiver with the requirements of FCC Part 15 Subpart C (15.247) and RSS-247. This test report covers only the FHSS radio.

1.1 Summary of Tests

TEST	Reference FCC	Reference Industry Canada	RESULTS
RF Output Power	15.247(b)	RSS-247, 5.4.b)	Complies
20-dB Bandwidth	15.247(a)(1)	RSS-247, 5.1.a)	Complies
Channel Separation	15.247(a)(1)	RSS-247, 5.1.b)	Complies
Number of Hopping Channels	15.247(a)(1)	RSS-247, 5.14	Complies
Average Channel Occupancy Time	15.247(a)(1)	RSS-247, 5.14	Complies
Out-of-Band Antenna Conducted Emission	15.247(d)	RSS-247, 5.5	Complies
Transmitter Radiated Emissions	15.247(d), 15.209, 15.205	RSS-GEN	Complies
RF Exposure	15.247(i)	RSS-102	Complies
AC Conducted Emission	15.207	RSS-GEN	Complies
Antenna Requirement	15.203	RSS-GEN	Complies (Internal Antenna)

EUT receive date: March 05, 2018, November 22, 2020

EUT receive condition: The pre-production version of the EUT was received in good condition with no apparent damage. As declared by the Applicant, it is identical to the production units.

Test start date: March 05, 2018, November 22, 2020

Test completion date: April 04, 2018, November 26, 2020

The test results in this report pertain only to the item tested.

2.0 General Description

2.1 Product Description

Fastenal Company supplied the following description of the EUT:

Device that takes an inventory of RFID tagged Bins and forwards this data to an in-range Controller via LoRa.

For more information, see user's manual provided by the manufacturer.

Information about the LoRa FHSS radio is presented below:

For more information, refer to the following product specification, declared by the manufacturer.

Information about the 900 MHz radio is presented below:

Applicant	Fastenal Company
Model No.	922194627
FCC Identifier	2APK7-922194627V10
IC Identifier	23979-92219462710
Type of Transmission	Frequency Hopping Spread Spectrum
Rated RF Output	12.32 dBm
Antenna(s) & Gain	Internal Antenna, Gain: 5.5 dBi
Frequency Range	902.7 – 927.2 MHz
Number of Channel(s)	50
Modulation Type	FSK
Applicant Name & Address	Fastenal Company 8918 Beckett Rd. West Chester, OH 45069 USA

2.2 Related Submittal(s) Grants

None.

2.3 Test Methodology

Antenna conducted measurements were performed according to the procedure from FCC Publication 558074 D01 15.247 Meas Guidance v05r02 & ANSI C63.10:2013 for Frequency Hopping Spread Spectrum Systems

Radiated emissions measurements were performed according to the procedures in ANSI C63.10: 2013. Radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the "**Data Sheet**" of this Application.

All other measurements were made in accordance with the procedures in part 2 of CFR 47.

Following is the channel test plan:

Channels in 900 MHz band			
Test Channel		Frequency, MHz	Tested
Low	1	902.7	√
Middle	25	915	√
High	50	927.2	√

2.4 Test Facility

The test site used to collect the radiated data is site 1 (10-m semi-anechoic chamber). This test facility and site measurement data have been fully placed on file with the FCC, IC and A2LA accredited.

3.0 System Test Configuration


3.1 Support Equipment

No support equipment was used for testing.

3.2 Block Diagram of Test Setup

Equipment Under Test			
Description	Manufacturer	Model Number	Serial Number
Reader	Fastenal Company	922194627	9705082
AC/DC Power Supply	CUI Inc	SDI18-5-UD	No markings

Antenna was removed and co-axial connector with a cable was installed for Conducted Measurements.

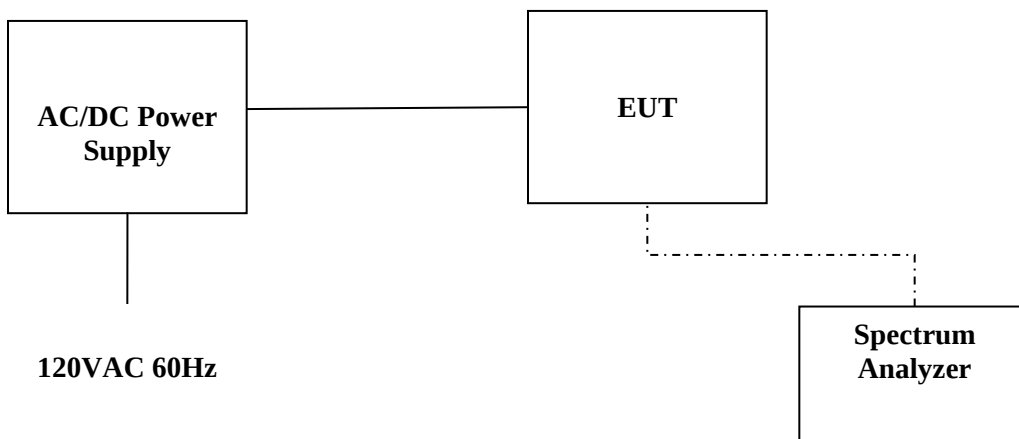

S = Shielded	F = With Ferrite
U = Unshielded	m = Length in Meters

3.3 Justification

For radiated emission measurements the EUT is placed on a non-conductive table. The EUT is attached to peripherals and they are connected and operational (as typical as possible). The EUT is wired to transmit full power. During testing, all cables are manipulated to produce worst-case emissions.

LoRa transmitter is identical to certification, FCC ID: 2APK7-9705082V1-0, IC: 23979-9705082V10. Antenna port Conducted Test data in section 4.1, 4.3, 4.4, 4.5, 4.6 were borrowed from original report, 103436674MPK-004 and all other tests were performed.

3.4 Mode of Operation During Test

During transmitter testing, the transmitter was setup to transmit continuously at maximum RF power on the low channel, middle channel, high channel and with hopping channels enabled.

3.5 Modifications Required for Compliance

Intertek installed no modifications during compliance testing in order to bring the product into compliance.

3.6 Additions, Deviations and Exclusions from Standards

No additions, deviations or exclusions from the standard were made.

4.0 Transmitter Emissions Measurement Results

4.1 20dB Bandwidth, and 99% Occupied Bandwidth FCC Rule 15.247(a)(1)

4.1.1 Procedure

The Procedure described in the FCC Publication 558074 D01 15.247 Meas Guidance v05r02 & ANSI C63.10:2013 for Frequency Hopping Spread Spectrum Systems was used to determine the 20dB bandwidth.

- Span = Approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel
- RBW = 1% of the 20 dB bandwidth
- VBW = 3 x RBW
- Sweep = Auto
- Detector function = Peak
- Trace = Max hold

The EUT should be transmitting at its maximum data rate. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker delta function to measure 20 dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is the 20 dB bandwidth of the emission. If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).

For 99% power bandwidth measurement, the bandwidth was determined by using the built-in 99% occupied bandwidth function of the spectrum analyzer.


The antenna port of the EUT was connected to the input of a spectrum analyzer (SA). For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. A Peak output reading was taken, a Display line was drawn for 20dB lower than Peak level. The 20dB bandwidth was determined from where the channel output spectrum intersected the display line.

Tested By:	Aaron Chang
Test Date:	March 21, 2018

4.1.2 Test Result


Frequency MHz	20 dB FCC Bandwidth, MHz	99% Bandwidth, MHz	Plot #
902.7	0.117	0.111	1.1
915	0.118	0.111	1.2
927.2	0.118	0.111	1.3

Plot 1. 1 – 20dB Bandwidth Low Channel

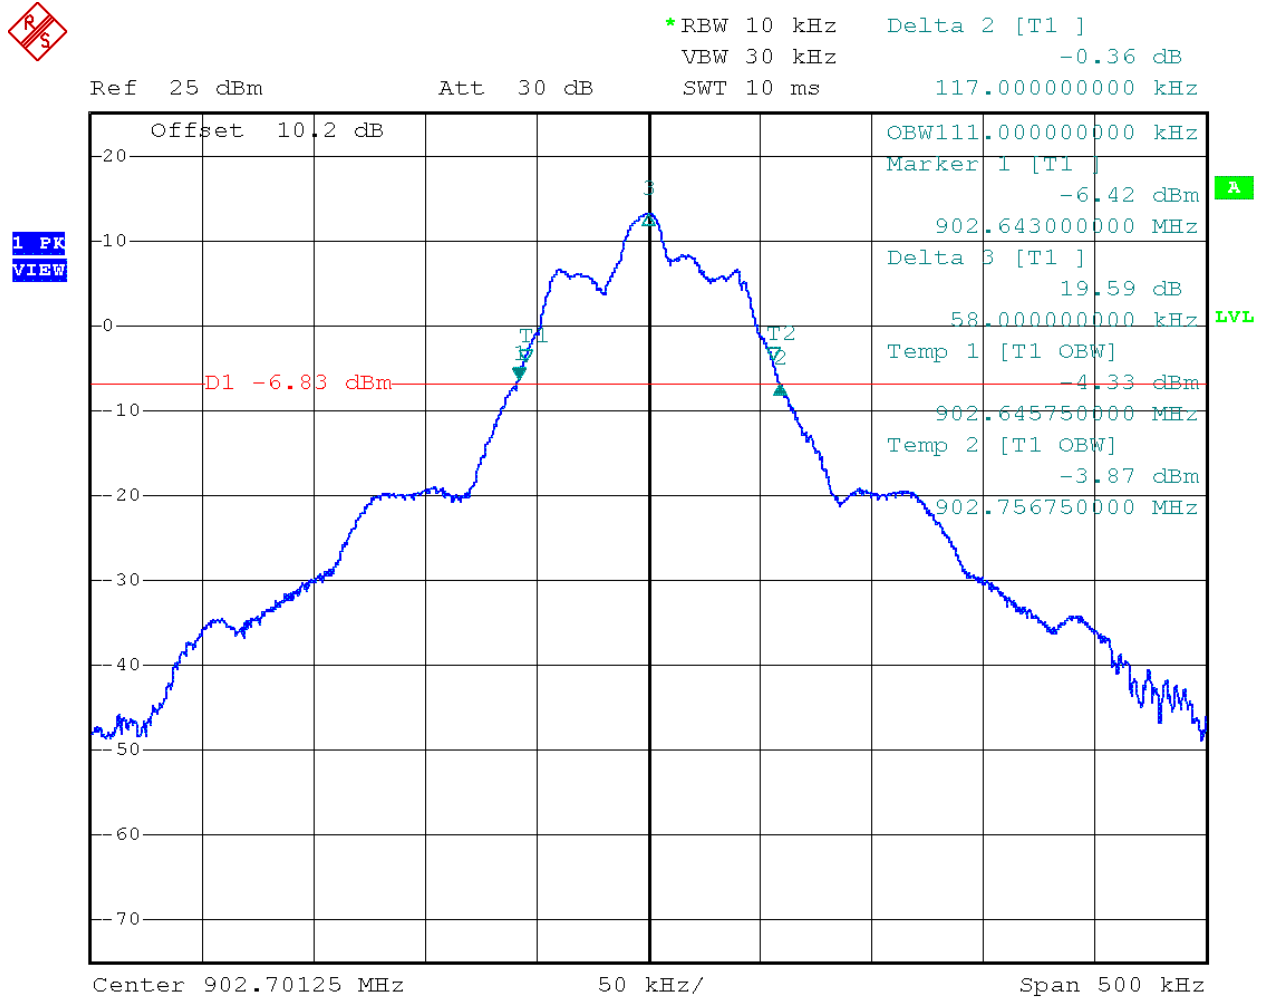


Date: 21.MAR.2018 08:53:42

Plot 1. 2 – 20dB Bandwidth Middle Channel

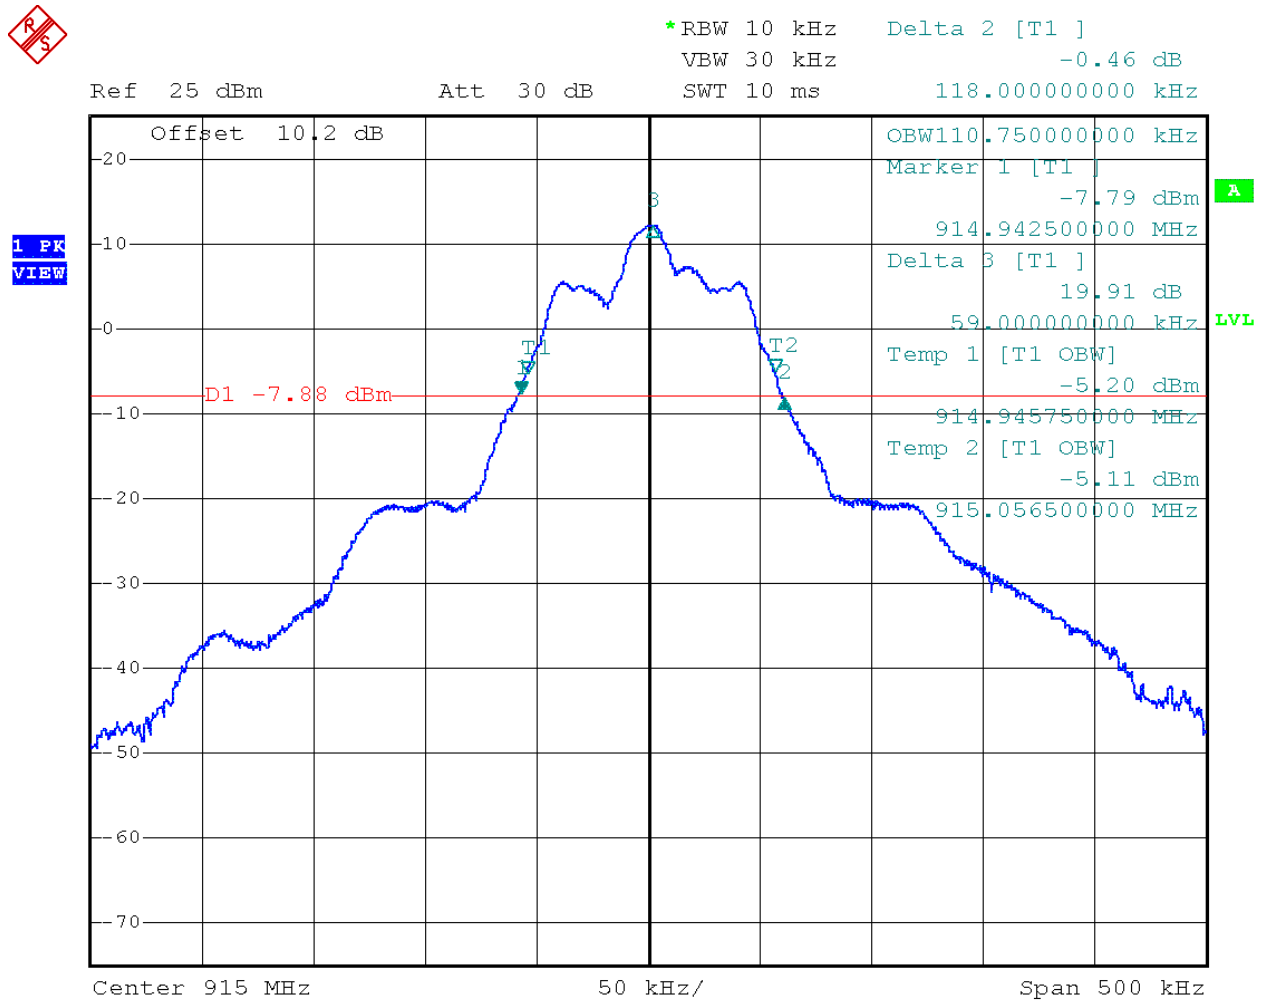

Date: 21.MAR.2018 08:58:39

Plot 1. 3 – 20dB Bandwidth High Channel

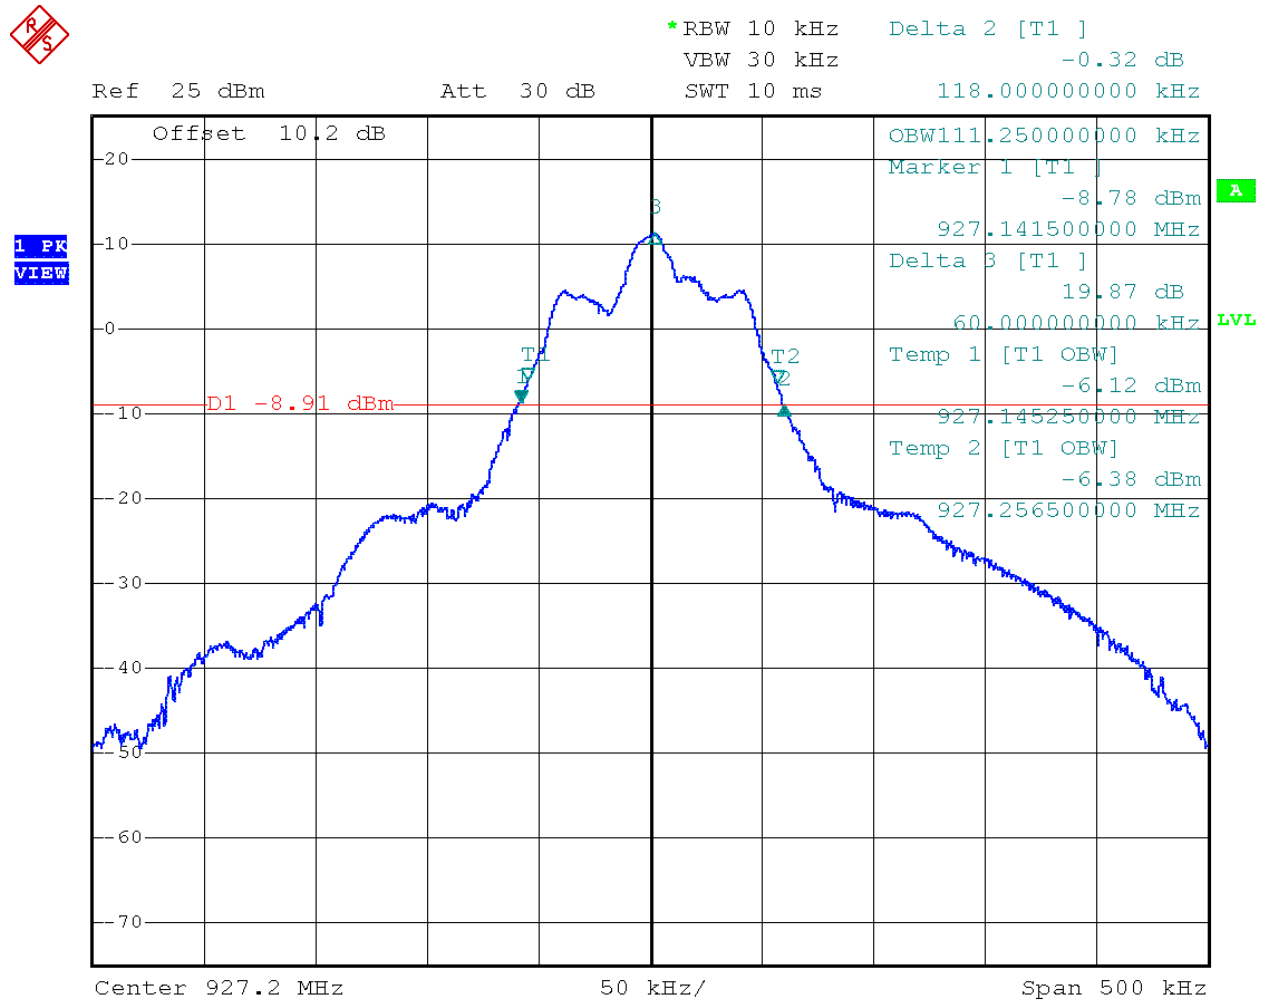

Date: 21.MAR.2018 09:02:08

4.2 Conducted Output Power at Antenna Terminals FCC Rule 15.247(b)(1)

4.2.1 Requirement

For frequency hopping systems operating in the 902-928 MHz band: 1 watt for systems employing at least 50 hopping channels; and, 0.25 watts for systems employing less than 50 hopping channels, but at least 25 hopping channels

4.2.2 Procedure

The Procedure described in the FCC Publication 558074 D01 15.247 Meas Guidance v05r02 & ANSI C63.10:2013 for Frequency Hopping Spread Spectrum Systems was used to determine the RF Output Power.

- Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel
- RBW > the 20 dB bandwidth of the emission being measured
- VBW = 3 x RBW
- Sweep = auto
- Detector function = peak
- Trace = max hold

Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power (see the NOTE above regarding external attenuation and cable loss). The limit is specified in one of the subparagraphs of this Section. Submit this plot.

The antenna port of the EUT was connected to the input of a spectrum analyzer. Power was read directly from the spectrum analyzer and cable loss correction was added to the reading to obtain the power at the antenna terminals.

Tested By:	Aaron Chang
Test Date:	November 25, 2020


4.3.3 Test Result

Refer to the following plots for the test result:

Frequency MHz	Conducted Peak Power dBm	Conducted Peak Power mW	Plot #
902.7	12.32	17.06	2.1
915	11.62	14.52	2.2
927.2	11.56	14.32	2.3


Results	Complies
----------------	-----------------

Plot 2. 2 – Output Power Low Channel

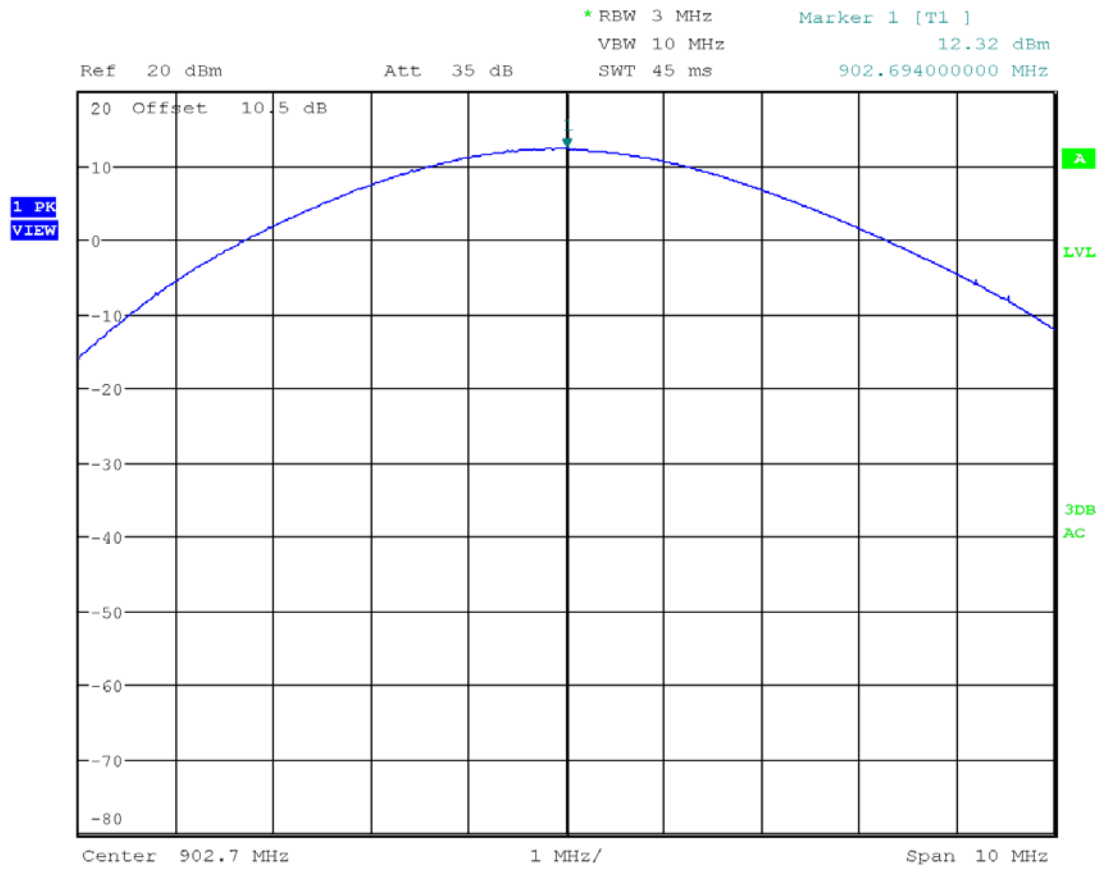


Date: 25.NOV.2020 16:12:28

Plot 2. 2 – Output Power Middle Channel

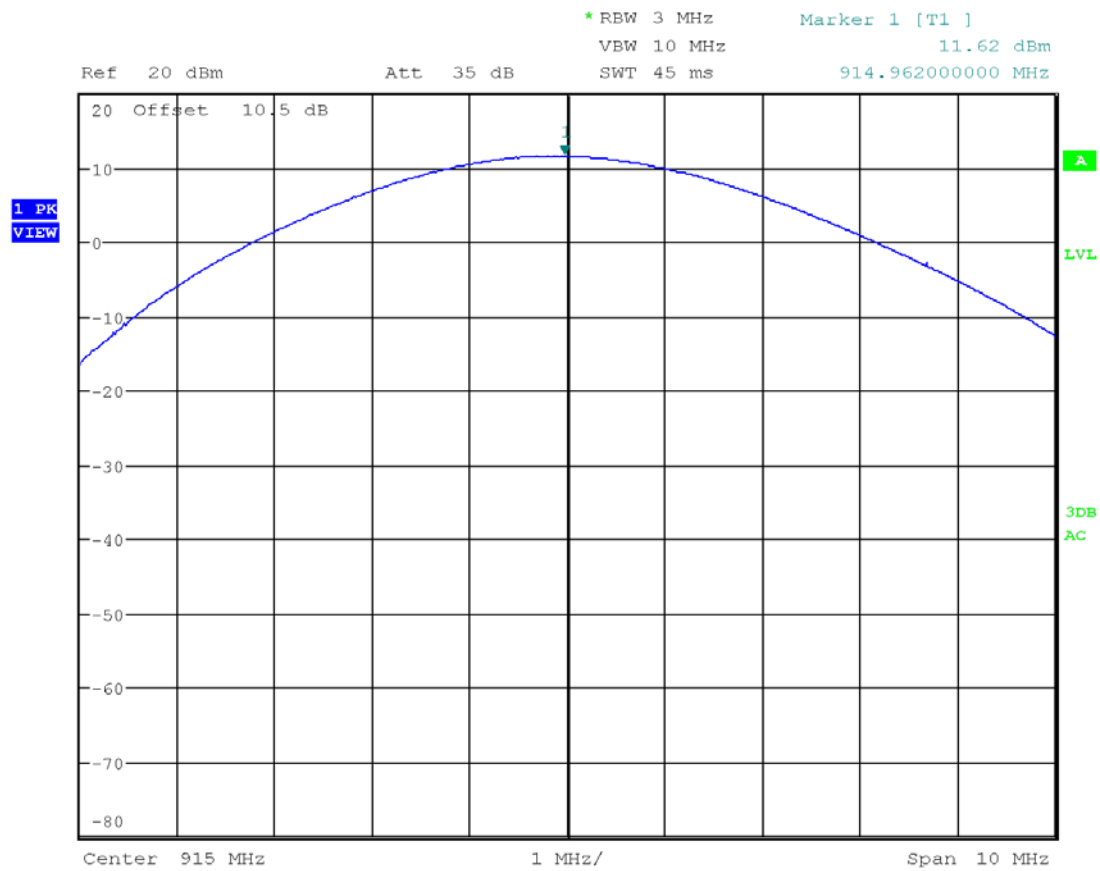

Date: 25.NOV.2020 16:13:31

Plot 2. 3 – Output Power High Channel

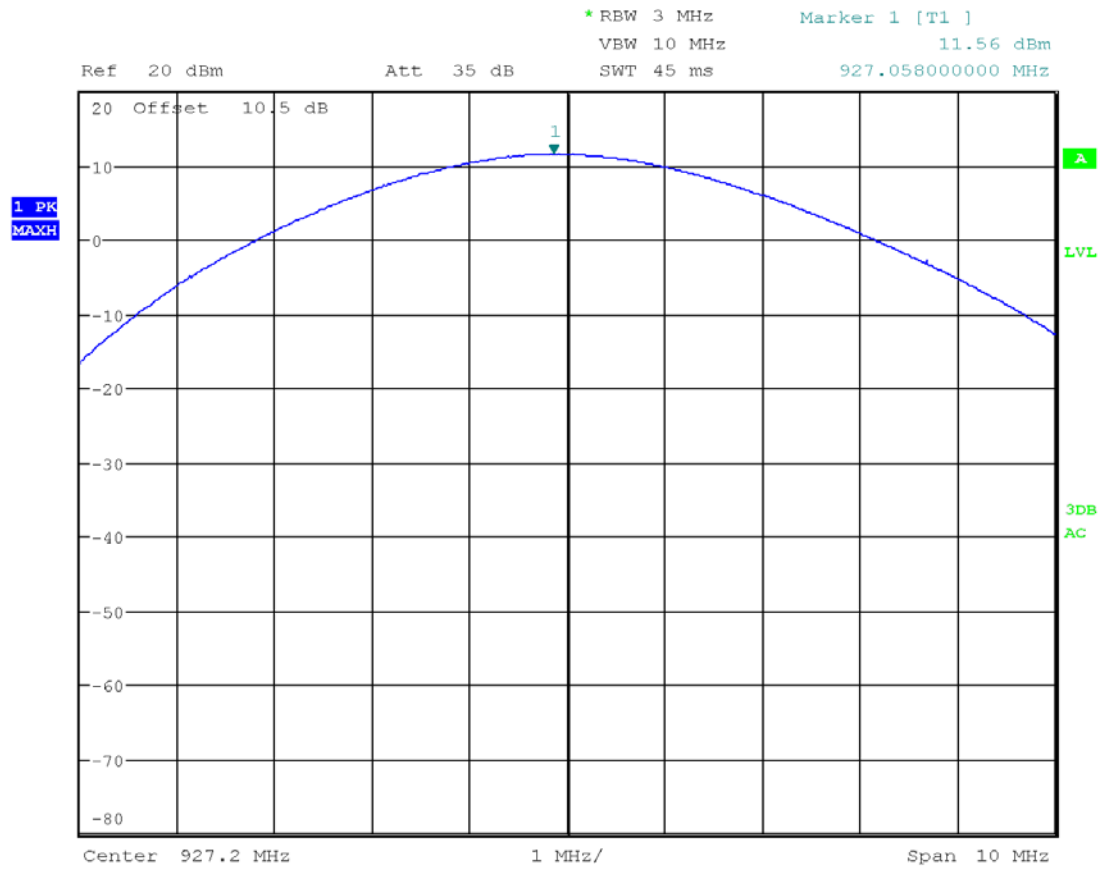

Date: 25.NOV.2020 16:09:59

4.3 Carrier Frequency Separation FCC 15.247 (a)(1)

4.3.1 Requirement

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

4.3.2 Procedure

The Procedure described in the FCC Publication 558074 D01 15.247 Meas Guidance v05r02 & ANSI C63.10:2013 for Frequency Hopping Spread Spectrum Systems was used to determine the Carrier Frequency Separation.

- The EUT must have its hopping function enabled
- Span = wide enough to capture the peaks of two adjacent channels
- Resolution (or IF) Bandwidth (RBW) = 1% of the span
- Video (or Average) Bandwidth (VBW) = 3 x RBW
- Sweep = auto
- Detector function = peak
- Trace = max hold

Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

Tested By:	Aaron Chang
Test Date:	March 21, 2018


4.3.3 Test Result

The worst case 20dB Bandwidth is 118 kHz.

The minimum Carrier Frequency Separation is 118 kHz, therefore meets the minimum requirement.
Please refer to spectrum analyzer plot 3.1 below for the test result.

Results	Complies
----------------	-----------------

Plot 3.1– Channel Separation

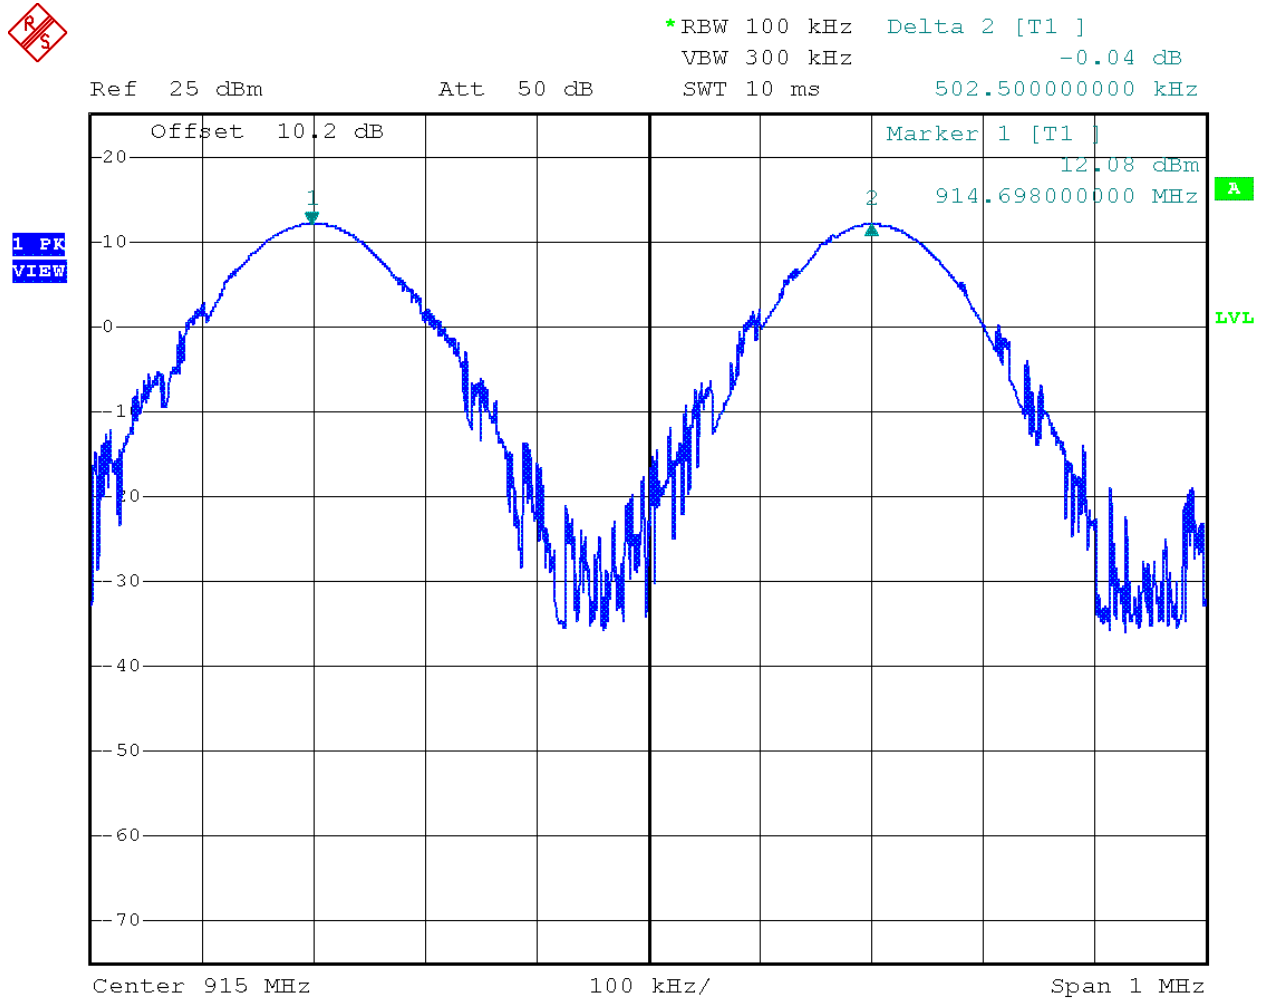

Date: 21.MAR.2018 09:13:42

4.4 Number of Channels
FCC 15.247 (a)(1)(iii)

4.4.1 Requirement

For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

4.4.2 Procedure

The Procedure described in the ANSI C63.10:2013 for Frequency Hopping Spread Spectrum Systems was used to determine the Number of Channels.

- The EUT must have its hopping function enabled.
- Span = the frequency band of operation
- RBW = 1% of the span
- VBW = 3 x RBW
- Sweep = auto
- Detector function = peak
- Trace = max hold

Allow the trace to stabilize. It may prove necessary to break the span up to sections, in order to clearly show all of the hopping frequencies.


With the analyzer set to MAX HOLD, readings were taken once channels were filled in. The channel peaks were recorded and compared to the minimum number of channels required in the regulation.

Tested By:	Aaron Chang
Test Date:	March 26, 2018

4.4.3 Test Result

Results	50 Channels -Complies
----------------	------------------------------

Plot 4.1 - Number of hopping channels

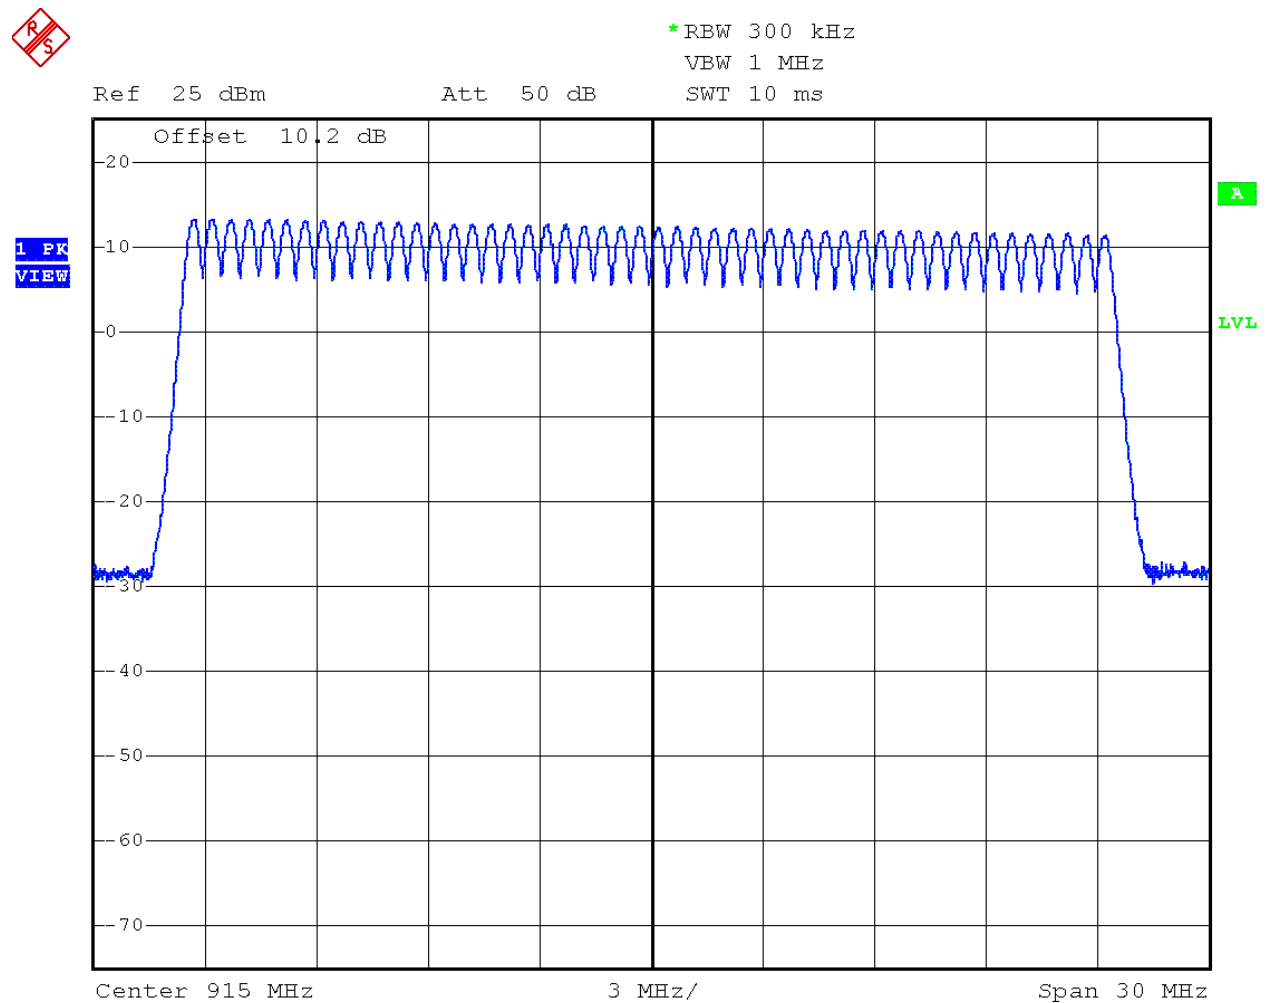

Date: 21.MAR.2018 09:25:08

4.5 Average Channel Occupancy Time
FCC 15.247(a)(1)

4.5.1 Requirement

For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

4.5.2 Procedure

The Procedure described in the ANSI C63.10:2013 for Frequency Hopping Spread Spectrum Systems was used to determine the Average Channel Occupancy Time.

- The EUT must have its hopping function enabled.
- Span = zero span, centered on a hopping channel
- RBW = 1 MHz
- VBW = 3 x RBW
- Sweep = as necessary to capture the entire dwell time per hopping channel
- Detector function = peak
- Trace = max hold

If possible, use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. An oscilloscope may be used instead of a spectrum analyzer.


The spectrum analyzer center frequency was set to one of the known hopping channels, the SPAN was set to ZERO SPANS, and the TRIGGER was set to VIDEO. The time duration of the transmission so captured was measured with the MARKER DELTA function.

Tested By:	Aaron Chang
Test Date:	March 26, 2018


4.5.3 Test Results

Results	Complies
----------------	-----------------

No. of Burst in 20 seconds	Burst On Time (ms)	Dwell Time (ms)	Dwell Time limit (ms)
8	9.1	72.8	400

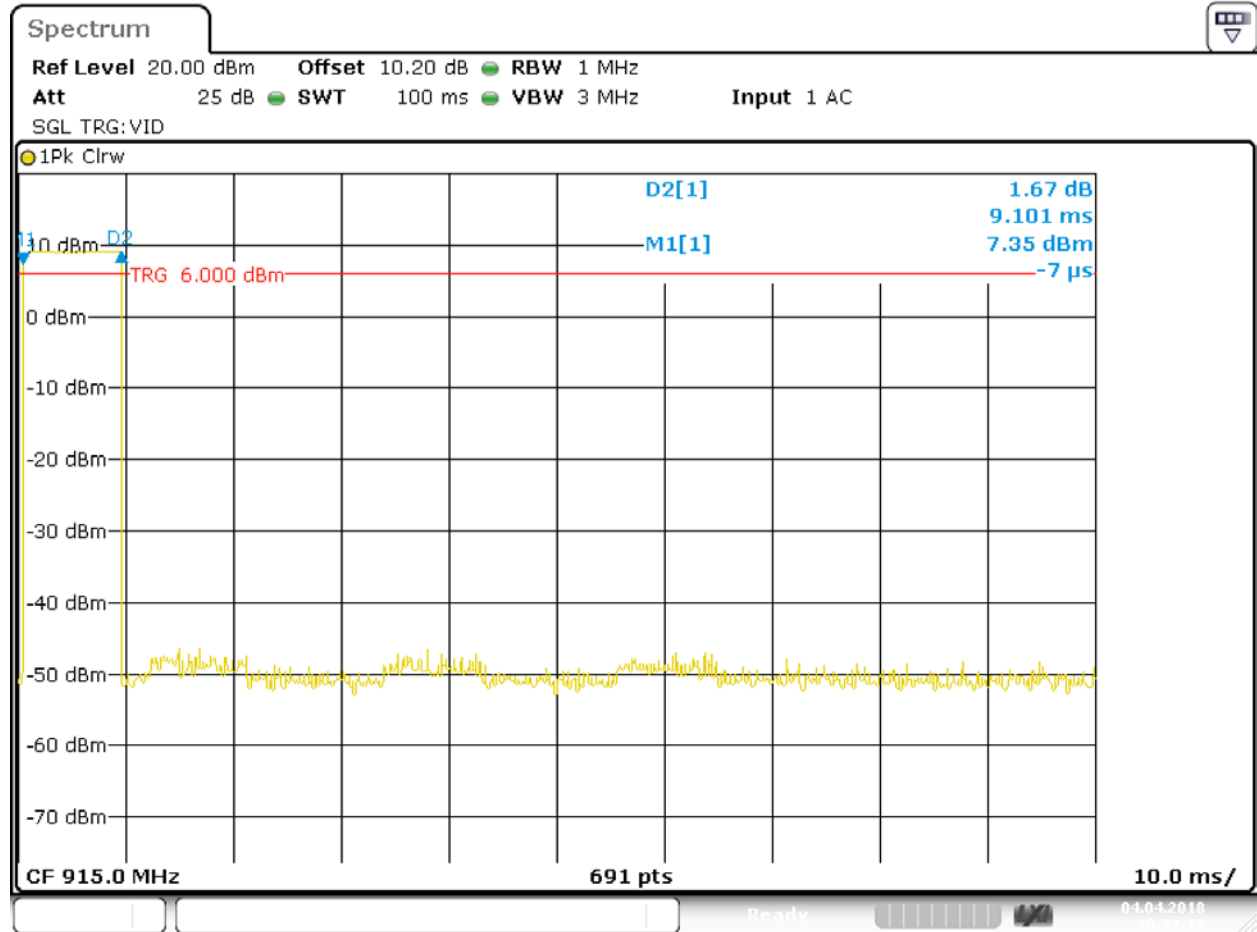

Date: 4.APR.2018 20:32:17

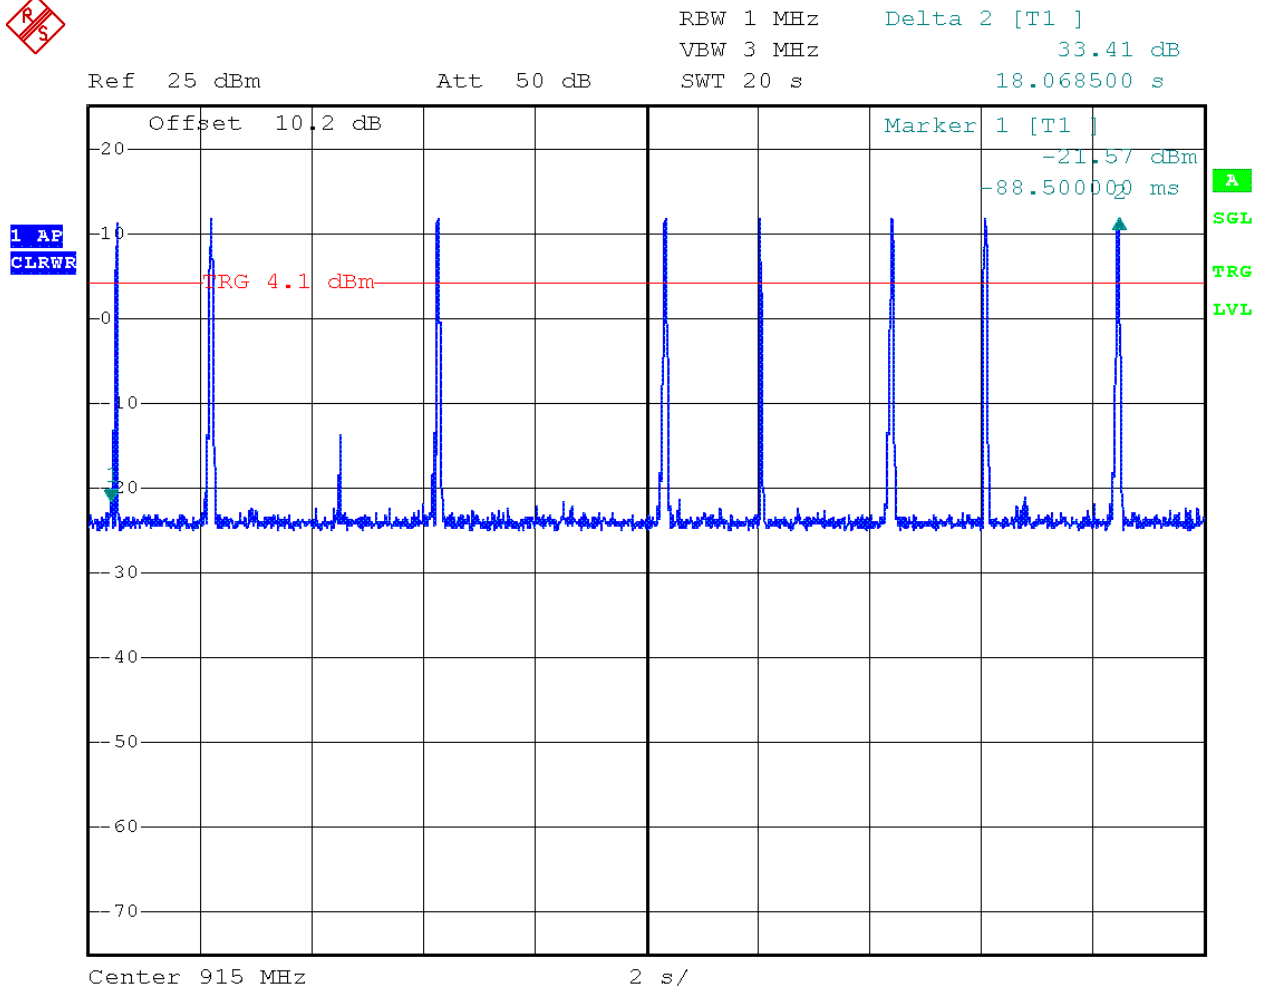

Date: 21.MAR.2018 09:44:48

4.6 Out-of-Band Conducted Emissions FCC 15.247(d)

4.6.1 Requirement

In any 100 kHz bandwidths outside the EUT pass-band, the RF power shall be at least 20dB (peak) or 30 dB (average) below that of the maximum in-band 100 kHz emissions.

4.6.2 Procedure

The Procedure described in the FCC Publication 558074 D01 15.247 Meas Guidance v05r02 & ANSI C63.10:2013 for Frequency Hopping Spread Spectrum Systems was used to determine the Out-of-Band Conducted Emissions.

- Span = wide enough to capture the peak level of the in-band emission and all spurious
- emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the
- 10th harmonic. Typically, several plots are required to cover this entire span.
- RBW = 100 kHz
- VBW = 3 x RBW
- Sweep = auto
- Detector function = peak
- Trace = max hold

Allow the trace to stabilize. Set the marker on the peak of any spurious emission recorded. The level displayed must comply with the limit specified in this Section.

A spectrum analyzer was connected to the antenna port of the transmitter. Analyzer Resolution Bandwidth was set to 100 kHz. For each channel investigated, the in-band and out-of-band emission measurements were performed. The out-of-band emissions were measured from 30 MHz to 26 GHz.

Tested By:	Aaron Chang
Test Date:	March 26, 2018

4.6.3 Test Result

Refer to the following plots and out-of-band conducted spurious emissions at the Band-Edge, Table 4.1 & 4.2 for the test results:

Table 4.1

Frequency MHz	Description	Plot #
902.7	Scan 9 kHz – 26 GHz	4.1
915	Scan 9 kHz – 26 GHz	4.2
927.2	Scan 9 kHz – 26 GHz	4.3



Out-of-Band Conducted Spurious Emissions at the Band-Edge:

Table 4.2



Channel	Frequency MHz	Out-band emissions margin to In-band emissions	Plot #
1	902.7	Complies	4.4
Hopping	Low Band Edge	Complies	4.5
50	927.2	Complies	4.6
Hopping	High Band Edge	Complies	4.7

Results	Complies
----------------	-----------------



Plot 4.1
Transmitter Spurious, Low Channel

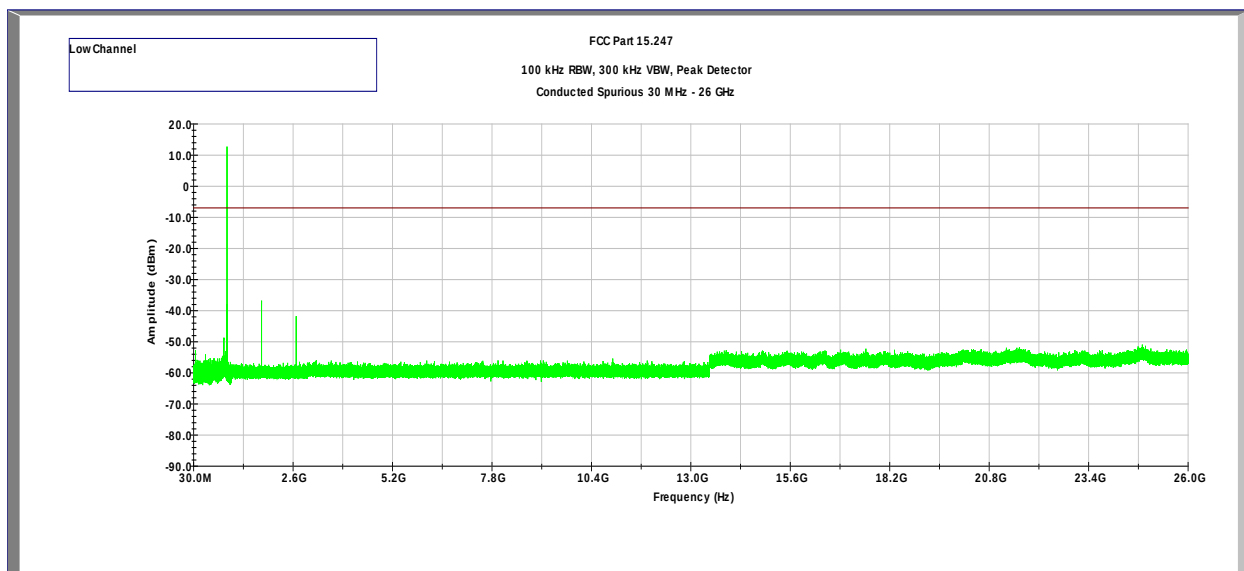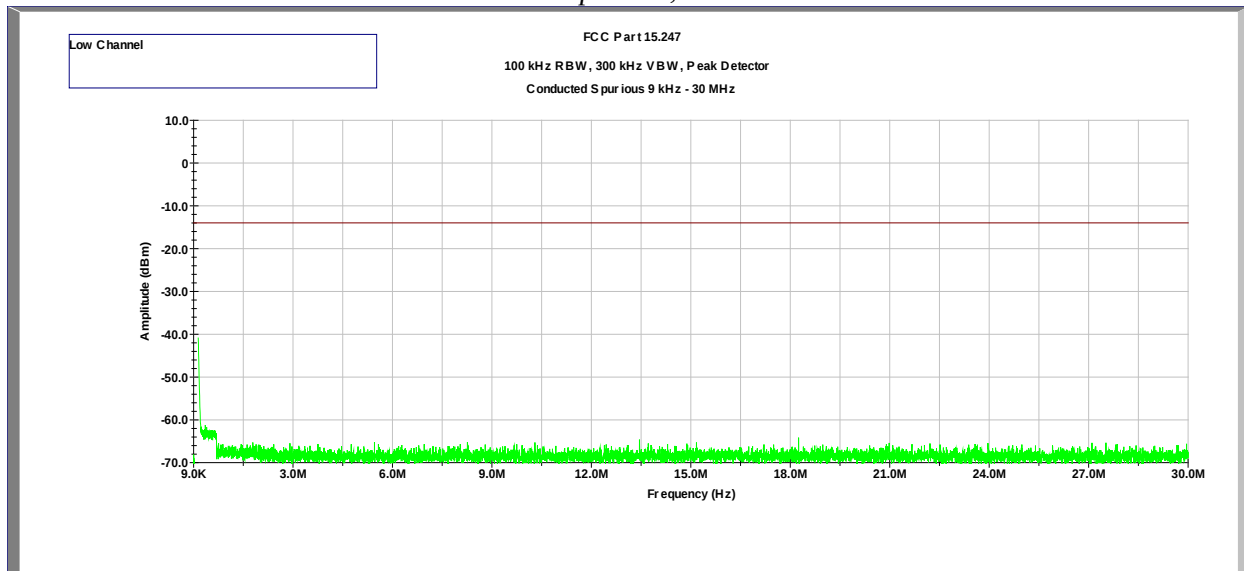


Plot 4.2
Transmitter Spurious, Middle Channel

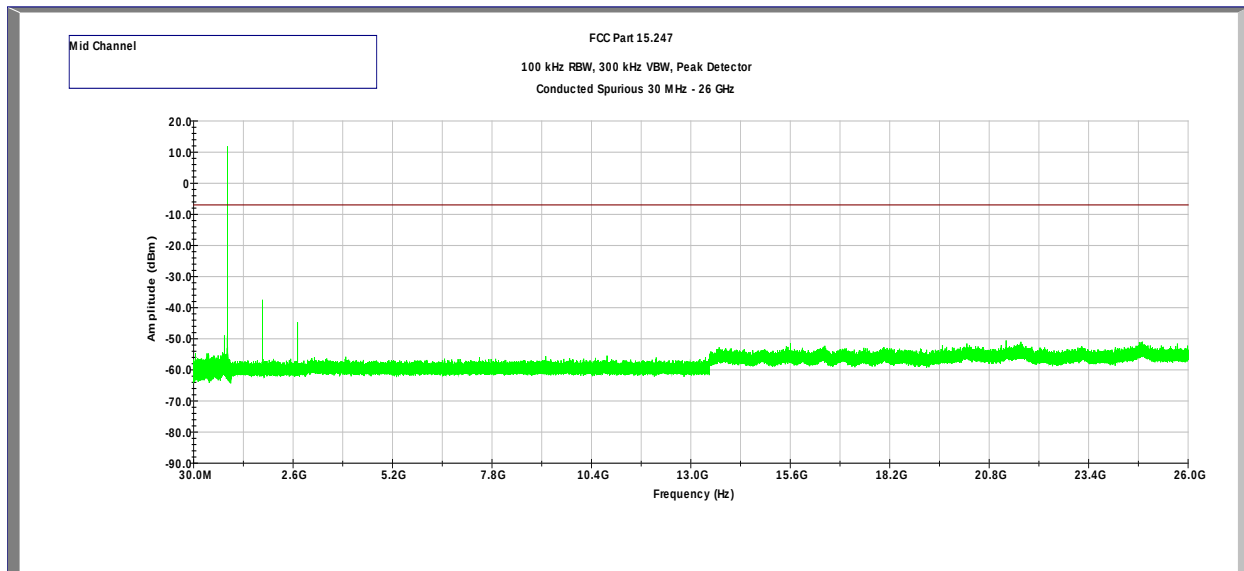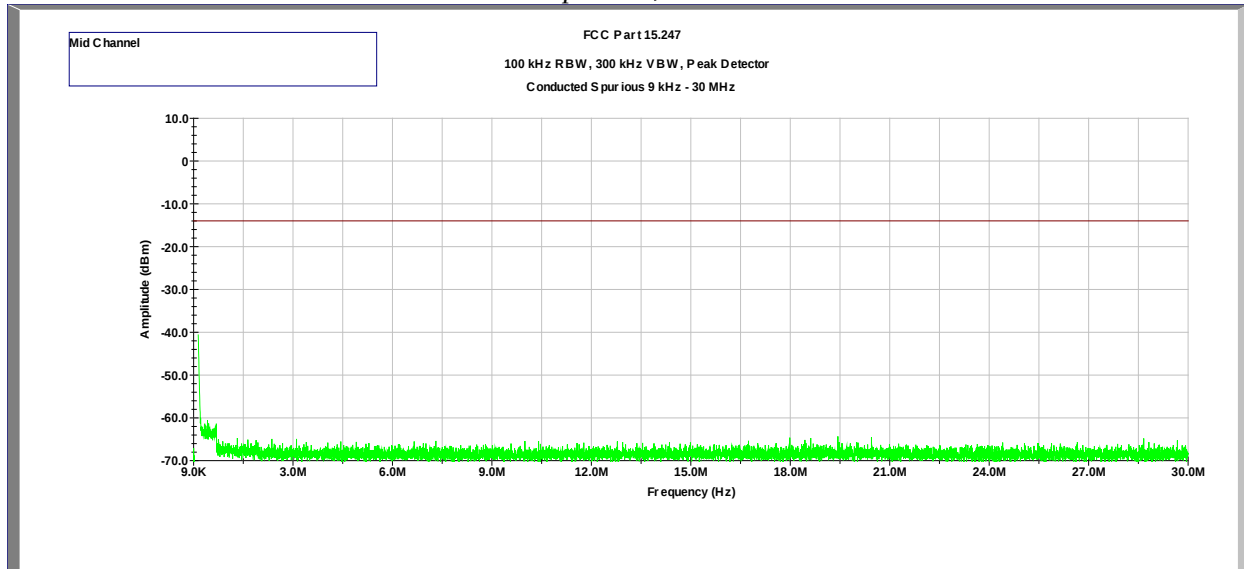

Plot 4.3
Transmitter Spurious, High Channel

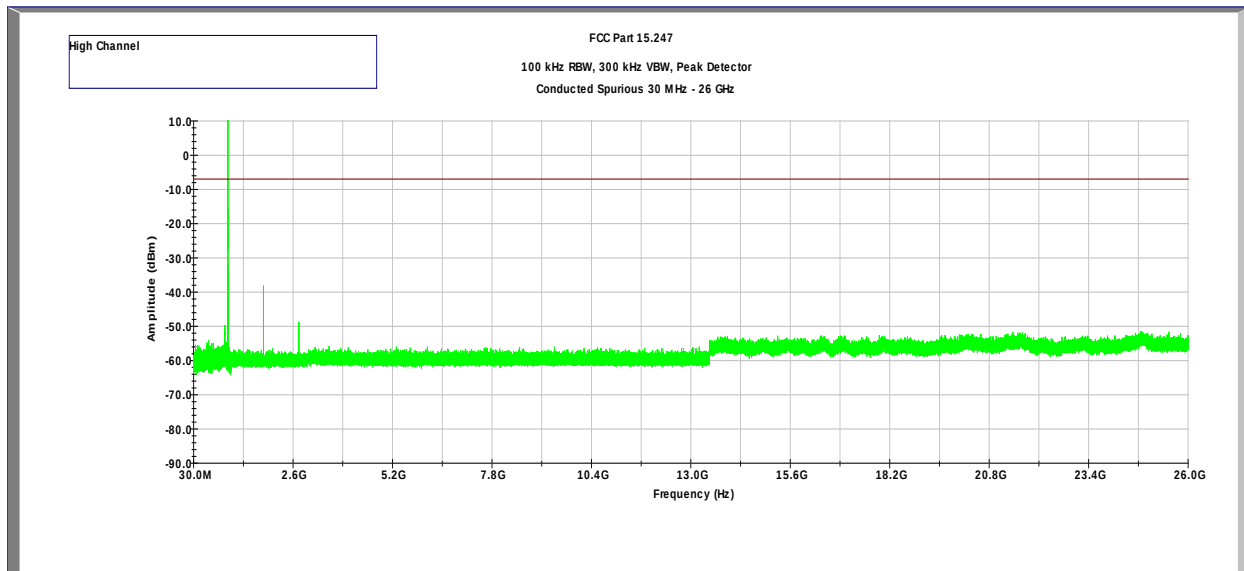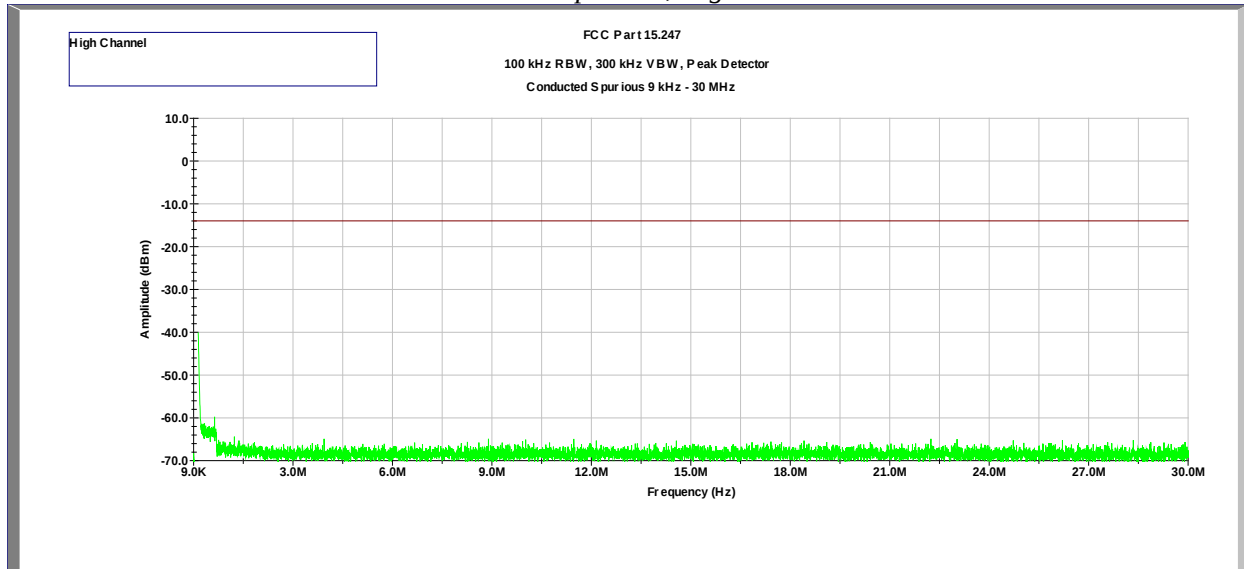


Plot 4.4
Conducted Band Edge, Low Channel

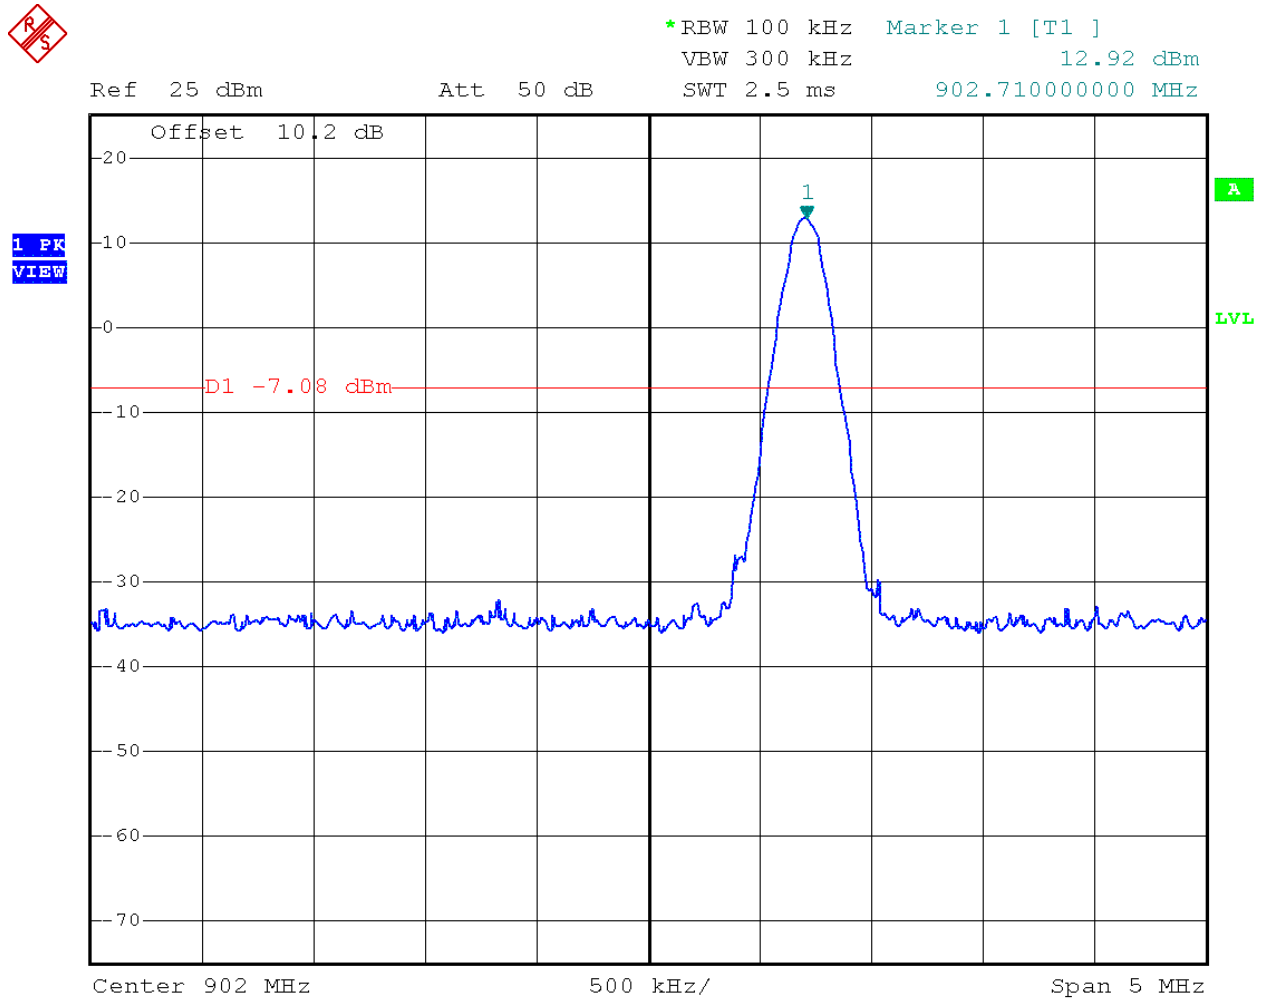


Date: 21.MAR.2018 12:23:12

Plot 4.11
Conducted Band Edge (Hopping)

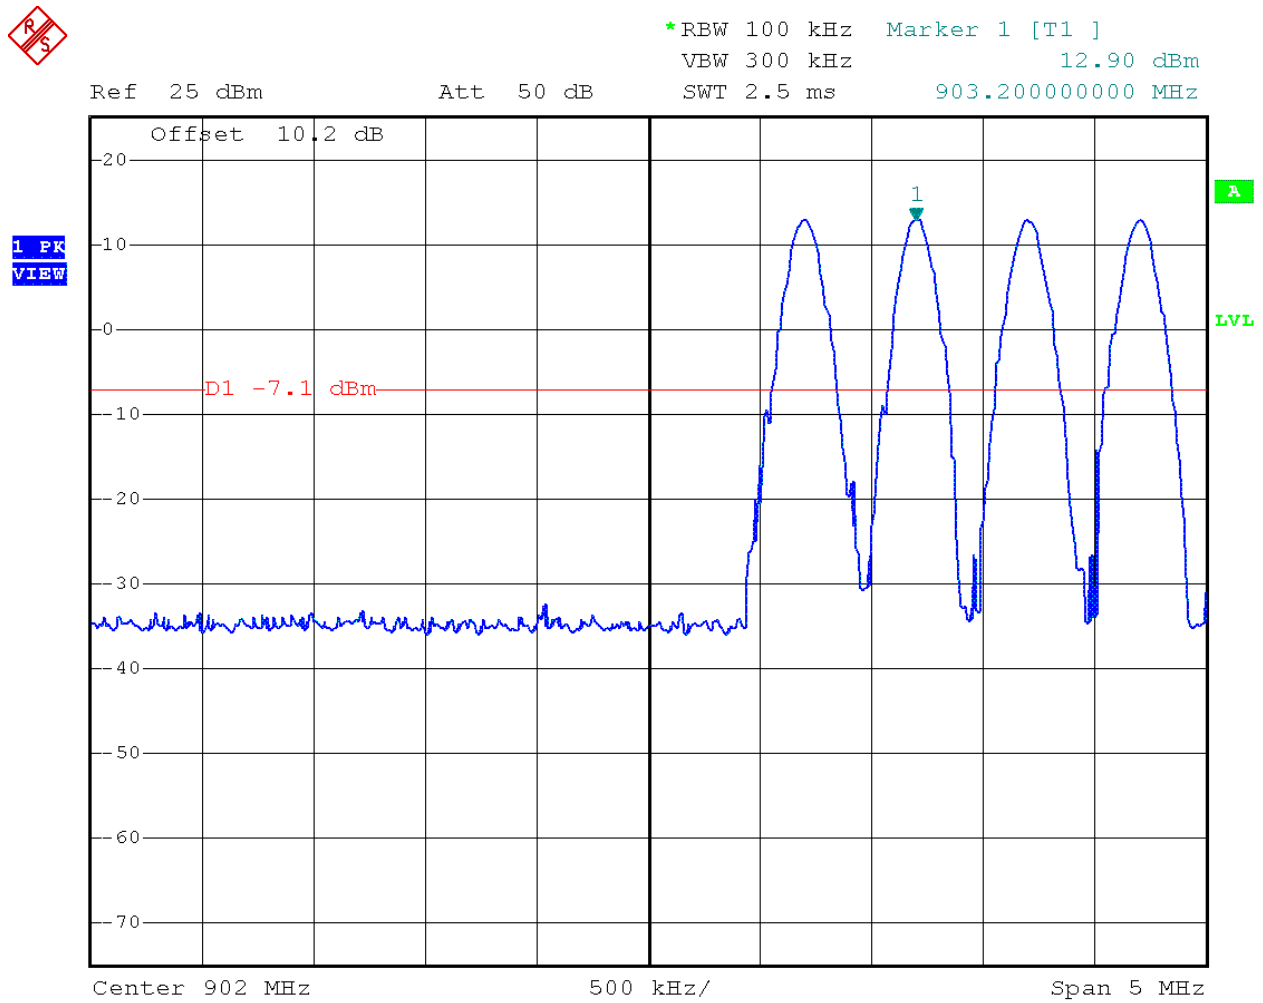


Date: 21.MAR.2018 12:26:57

Plot 4.12
Conducted Band Edge, High Channel

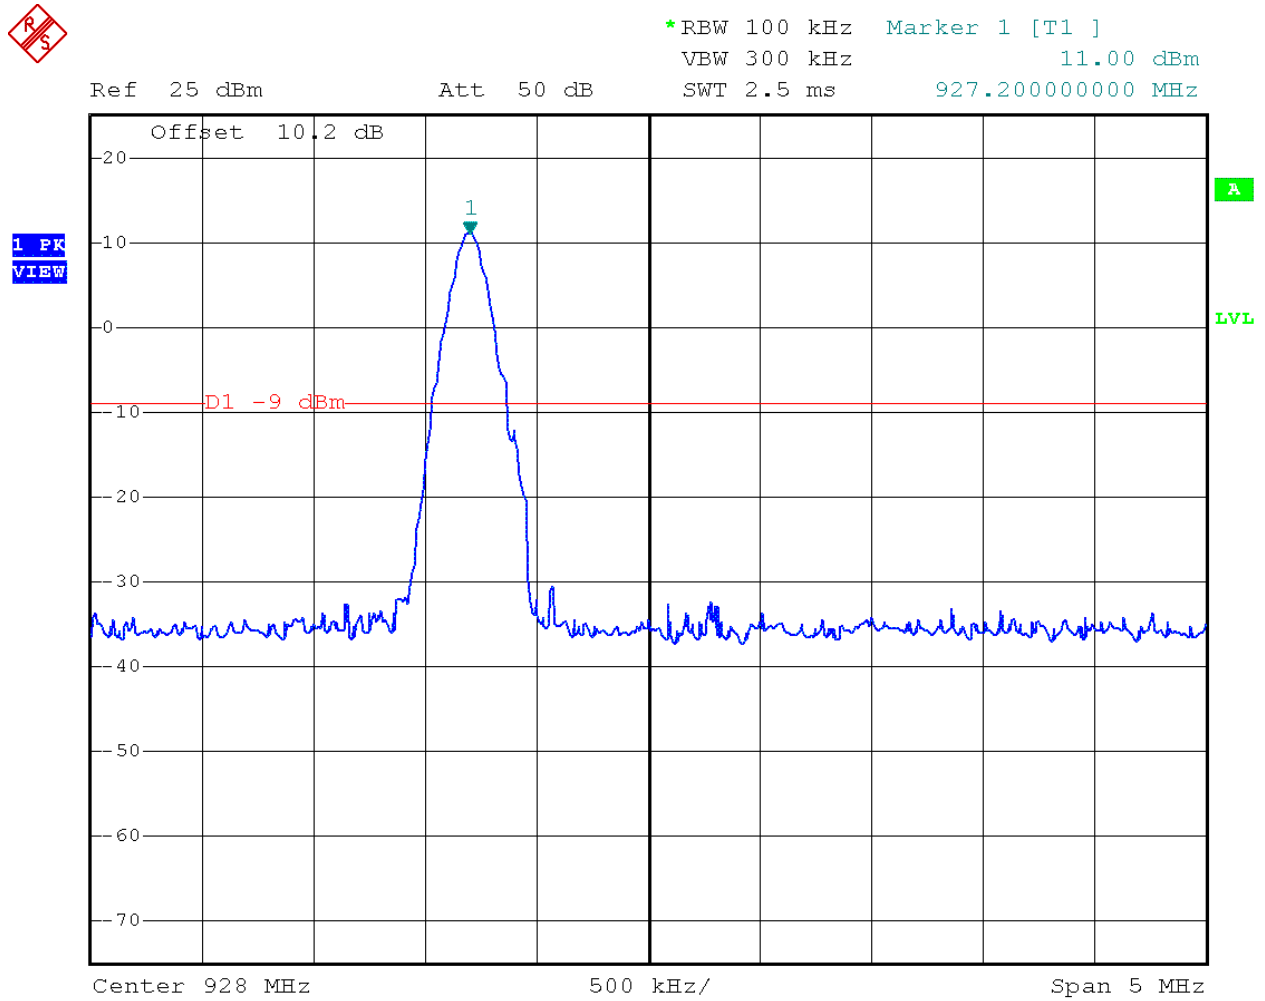

Date: 21.MAR.2018 12:29:05

Plot 4.13
Conducted Band Edge (Hopping)

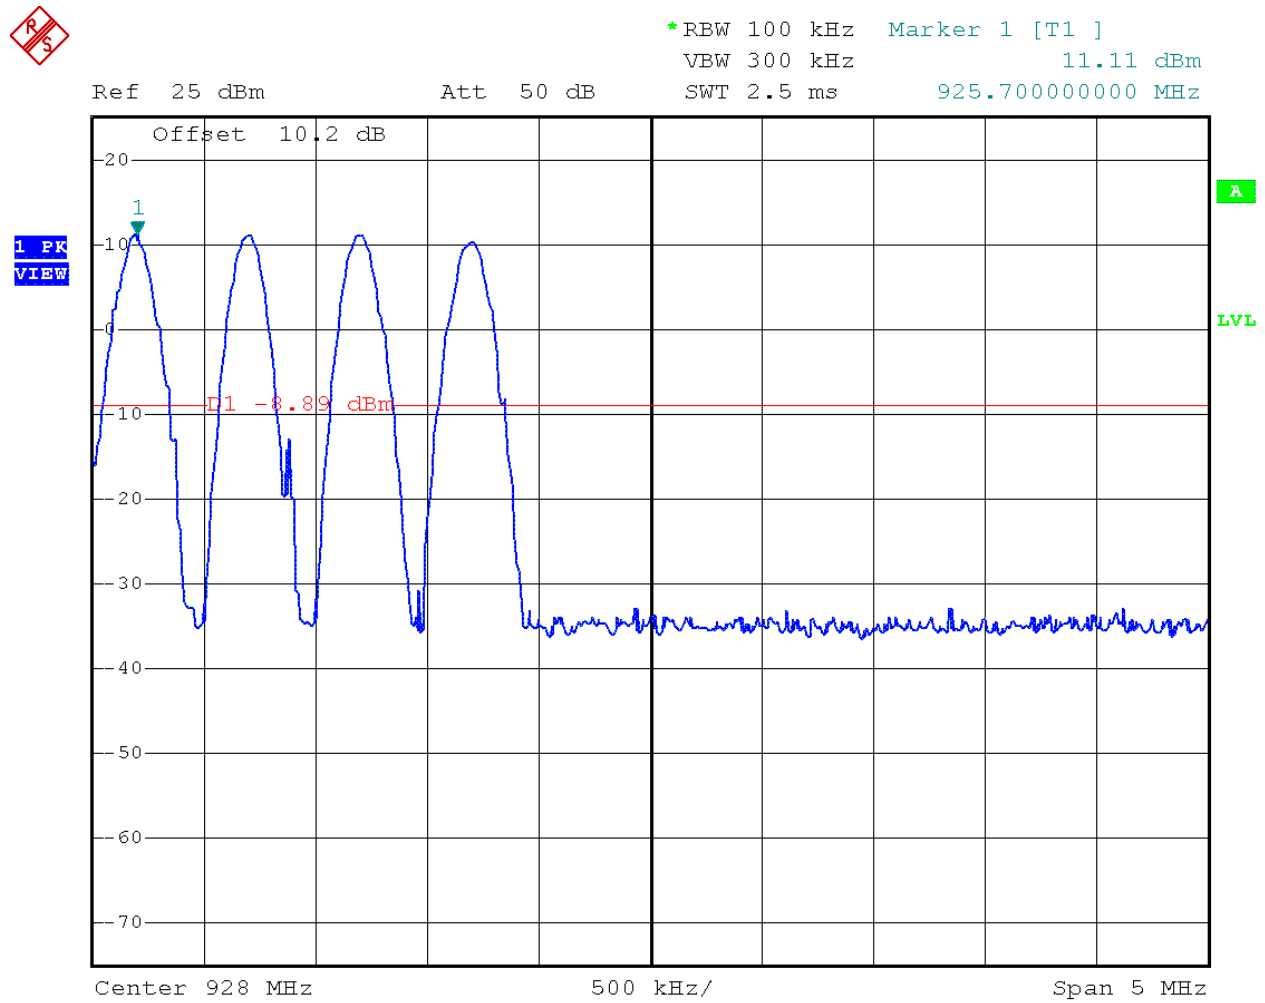

Date: 21.MAR.2018 12:28:19

4.7 Transmitter Radiated Emissions FCC Rule 15.247(d), 15.209, 15.205

4.7.1 Requirement

Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

For out of band radiated emissions (except for frequencies in restricted bands), in any 100 kHz bandwidths outside the EUT pass-band, the RF power shall be at least 20dB (peak) or 30 dB (average) below that of the maximum in-band 100 kHz emissions.

4.7.2 Procedure

Radiated emission measurements were performed from 9 kHz to 25 GHz according to the procedure described in ANSI C63.10: 2013. Spectrum Analyzer Resolution Bandwidth is 200Hz or greater for frequencies 9kHz to 30MHz, 100 kHz or greater for frequencies 30 MHz to 1000 MHz, 1 MHz for frequencies above 1000 MHz. Above 1000 MHz Peak and Average measurements were performed.

The EUT is placed on a plastic turntable that is 80 cm in height. If the EUT attaches to peripherals, they are connected and operational (as typical as possible). During testing, all cables were manipulated to produce worst-case emissions. The signal is maximized through rotation. The antenna height and polarization are varied during the search for maximum signal level. The antenna height is varied from 1 to 4 meters. Radiated emissions are taken at 3 meters

All measurements were made with a Peak Detector and compared to QP limits for 30MHz – 1GHz and Average or Peak limits for 1GHz – 26GHz where applicable.

Data is included of the worst-case configuration (the configuration which resulted in the highest emission levels).

EUT was tested with Internal Antenna.

Correlation measurements were performed below 30MHz between 10m ALSE and Open Field site according to FCC KDB 414788 D01 Radiated Test Site v01r01 section 2. All readings were within the acceptable tolerance.

4.7.3 Field Strength Calculation

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$FS = RA + AF + CF - AG$; if measurement is performed at a distance other than specified in the rule, a Distance Correction Factor (DCF) shall be added.

Where FS = Field Strength in dB(μ V/m)

RA = Receiver Amplitude (including preamplifier) in dB(μ V); AF = Antenna Factor in dB(1/m)

CF = Cable Attenuation Factor in dB; AG = Amplifier Gain in dB

Assume a receiver reading of 52.0 dB(μ V) is obtained. The antennas factor of 7.4 dB(1/m) and cable factor of 1.6 dB is added. The amplifier gain of 29 dB is subtracted, giving field strength of 32 dB(μ V/m). This value in dB(μ V/m) was converted to its corresponding level in μ V/m.

RA = 52.0 dB(μ V)

AF = 7.4 dB(1/m)

CF = 1.6 dB

AG = 29.0 dB

$FS = 52.0 + 7.4 + 1.6 - 29.0 = 32 \text{ dB}(\mu\text{V/m})$.

Level in μ V/m = Common Antilogarithm $[(32 \text{ dB}\mu\text{V/m})/20] = 39.8 \mu\text{V/m}$.

4.7.4 Test Results

The data on the following pages list the significant emission frequencies, the limit and the margin of compliance.


Radiated emission measurements were performed up to 26GHz. No other emissions were detected above the noise floor which is at least 10 dB below the limit.

All radiated measurements were conducted with the AC adapter. The worst case data was reported.


Tested By:	Aaron Chang
Test Date:	November 22 & 23, 2020

4.7.4 Test Results: 15.209 Out-of-Band Radiated Spurious Emissions, 902.7MHz


Radiated Spurious Emissions 9 kHz - 30 MHz

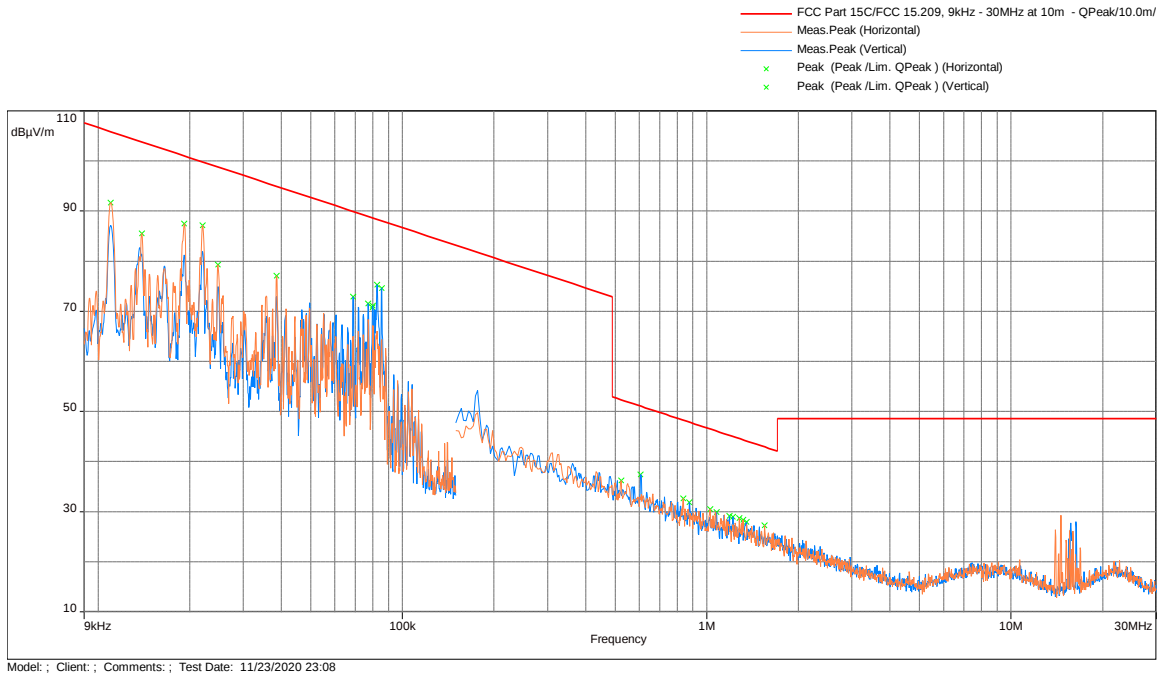


Radiated Spurious Emissions 30 MHz - 1000 MHz

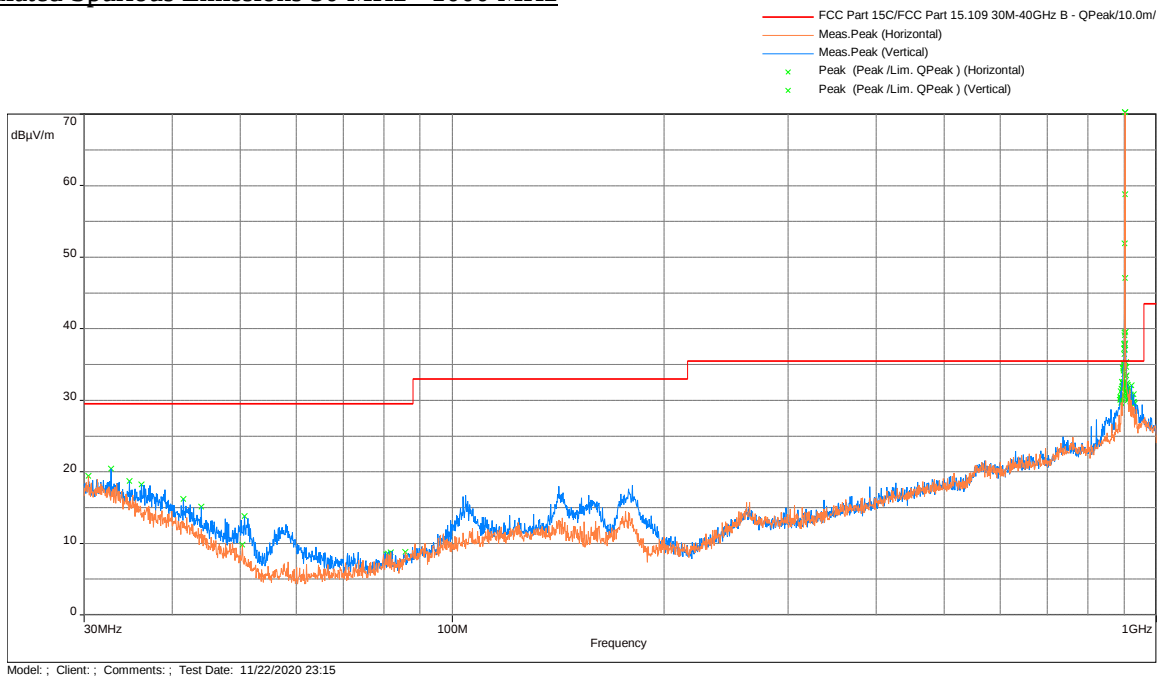

Radiated Spurious Emissions 1000 - 18000 MHz, Peak Scan vs Peak & Avg Limit

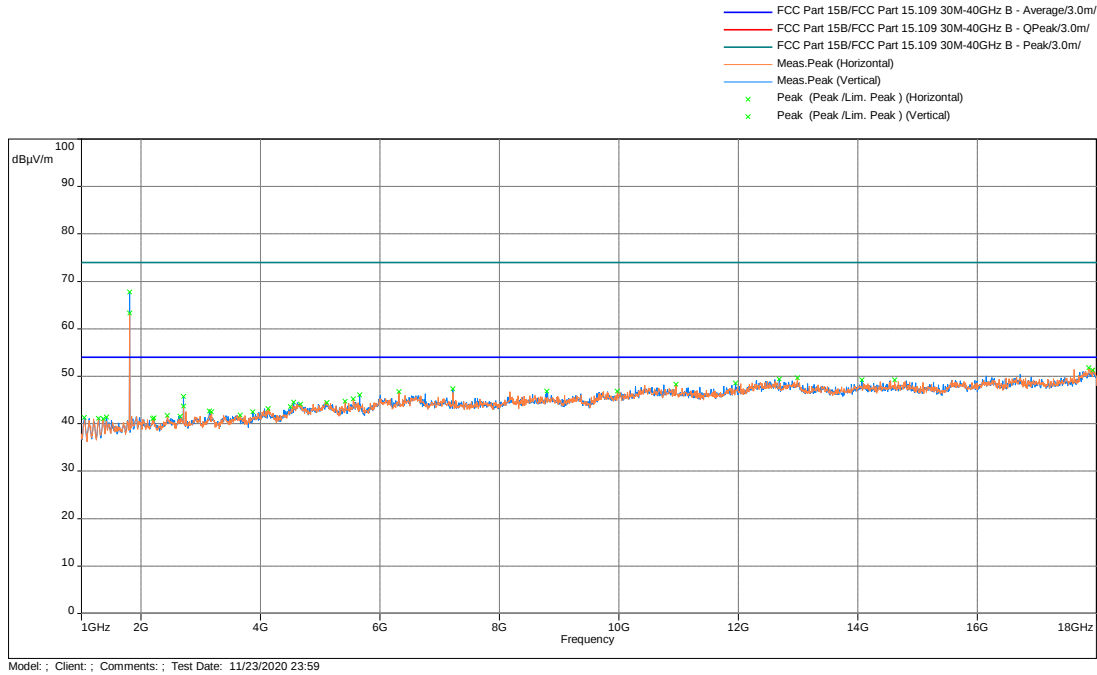

Radiated Spurious Emissions 18000 - 26500 MHz, Peak Scan vs Peak & Avg Limit

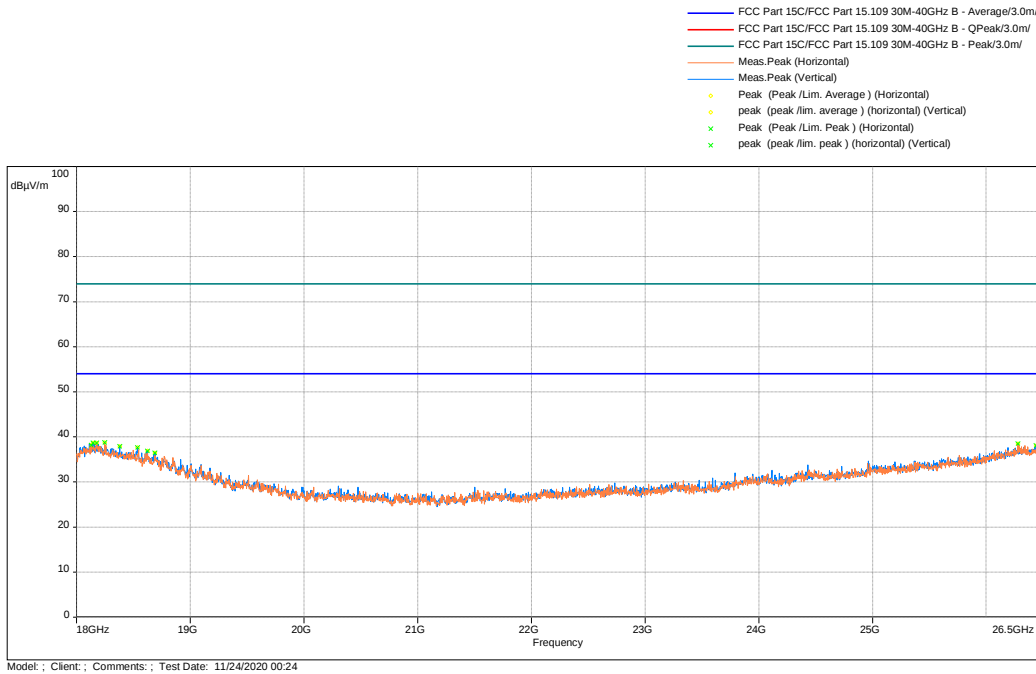

Frequency (MHz)	QPeak@ 10m (dBμV/m)	Lim. QPeak @10m (dBμV/m)	Margin (dB)	Height (m)	Angle (°)	Comment	Correction (dB)
0.022	87.16	99.82	-12.67	285.25	Horizontal	47.32	0.022
0.083	75.29	88.35	-13.07	286	Vertical	34.27	0.083
0.085	74.63	88.06	-13.43	286	Vertical	33.98	0.085
0.019	87.44	101.01	-13.57	285.25	Horizontal	48.36	0.019
0.607	37.4	51.05	-13.65	359.5	Vertical	18.17	0.607
0.011	91.7	105.85	-14.14	285.25	Horizontal	51.91	0.011

Frequency (MHz)	Peak @3m (dBμV/m)	Lim. Peak @3m (dBμV/m)	Margin (dB)	Height (m)	Angle (°)	Comment	Correction (dB)
1805.233*	67.75	97.87 (20dBc)	-30.12	1.01	257.5	Vertical	-13.79
7221.433	47.33	74	-26.67	2.48	14.5	Vertical	-2.49

Frequency (MHz)	Average @3m (dBμV/m)	Lim. Average @3m (dBμV/m)	Margin (dB)	Height (m)	Angle (°)	Comment	Correction (dB)
7221.433	43.66	54	-10.34	2.48	281.75	Vertical	-2.49


Note: Correction = AF + CF - Preamp

*Spurious emission frequencies does not fall under the restricted bands of 15.205, therefore the 15.209 limits does not apply to these frequencies.


Results	Complies
----------------	-----------------

Test Results: 15.209 Out-of-Band Radiated Spurious Emissions, 915 MHz


Radiated Spurious Emissions 9 kHz - 30 MHz

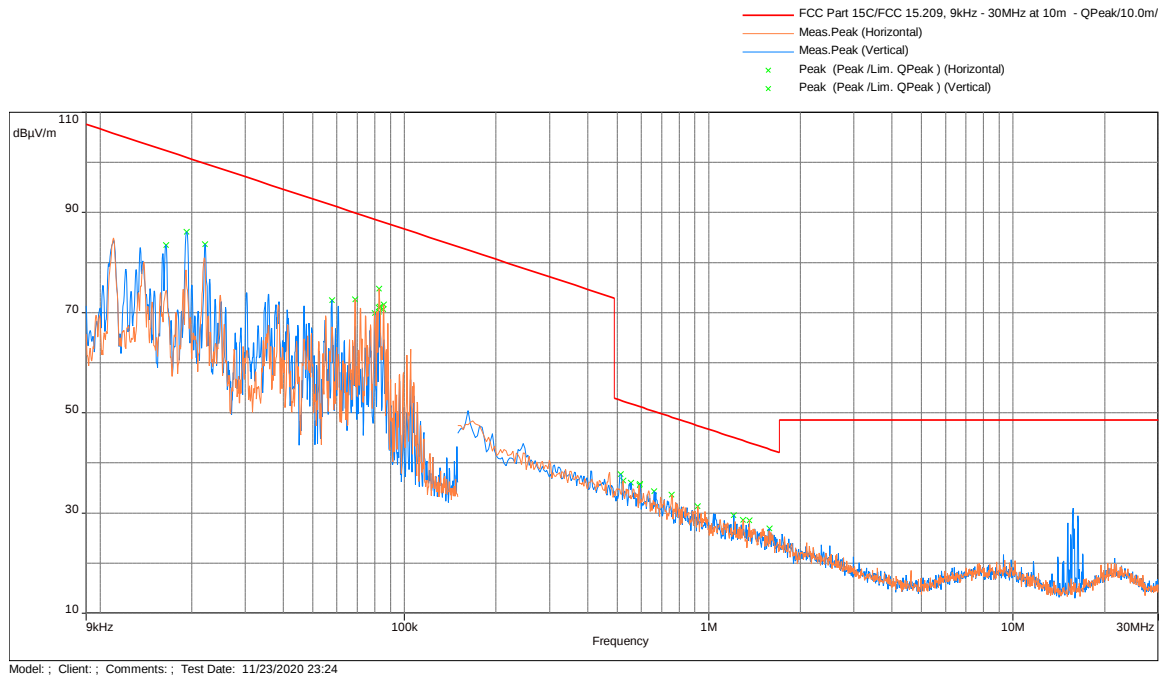


Radiated Spurious Emissions 30 MHz - 1000 MHz

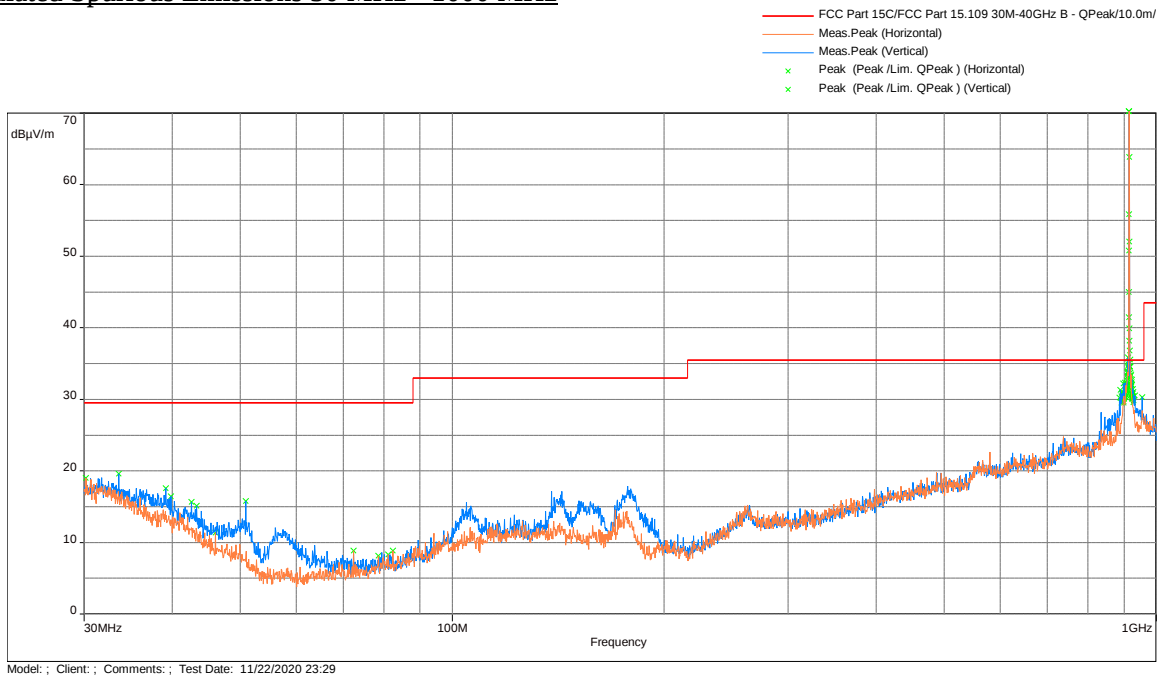

Radiated Spurious Emissions 1000 - 18000 MHz, Peak Scan vs Peak & Avg Limit

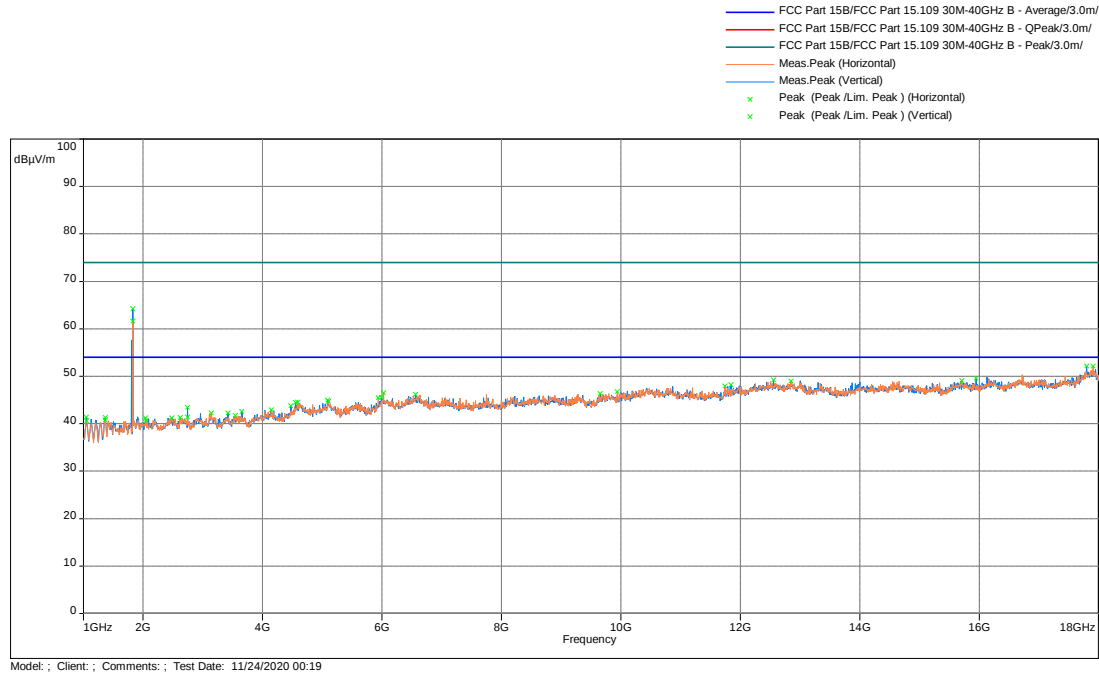

Radiated Spurious Emissions 18000 - 26500 MHz, Peak Scan vs Peak & Avg Limit

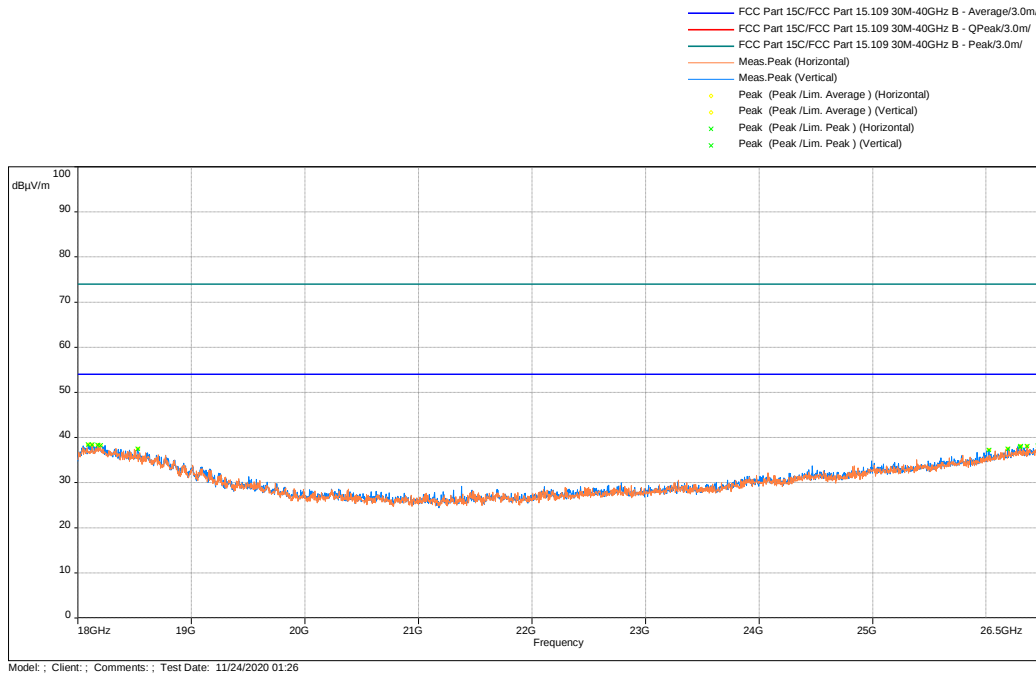

Frequency (MHz)	QPeak@ 10m (dBμV/m)	Lim. QPeak @10m (dBμV/m)	Margin (dB)	Height (m)	Angle (°)	Comment	Correction (dB)
0.083	74.8	88.35	-13.56	285.5	Horizontal	34.26	0.083
0.514	37.69	52.48	-14.79	275	Vertical	19.46	0.514
0.019	86.12	100.99	-14.87	285.75	Vertical	48.34	0.019
0.595	35.82	51.22	-15.4	180.25	Vertical	18.33	0.595
0.756	33.62	49.14	-15.52	223.5	Horizontal	16.45	0.756
1.362	28.52	44.05	-15.53	206	Horizontal	12.72	1.362

Frequency (MHz)	Peak @3m (dBμV/m)	Lim. Peak @3m (dBμV/m)	Margin (dB)	Height (m)	Angle (°)	Comment	Correction (dB)
1829.600*	64.23	97.87 (20dBc)	-33.64	2.48	253	Vertical	-13.47
2744.767	43.47	74	-30.53	2.48	262	Vertical	-10.68

Frequency (MHz)	Average @3m (dBμV/m)	Lim. Average @3m (dBμV/m)	Margin (dB)	Height (m)	Angle (°)	Comment	Correction (dB)
2744.767	42.65	54	-11.35	2.48	325.75	Vertical	-10.68


Note: Correction = AF + CF - Preamp

*Spurious emission frequencies does not fall under the restricted bands of 15.205, therefore the 15.209 limits does not apply to these frequencies.


Results	Complies
----------------	-----------------

Test Results: 15.209 Out-of-Band Radiated Spurious Emissions, 927.2 MHz


Radiated Spurious Emissions 9 kHz - 30 MHz

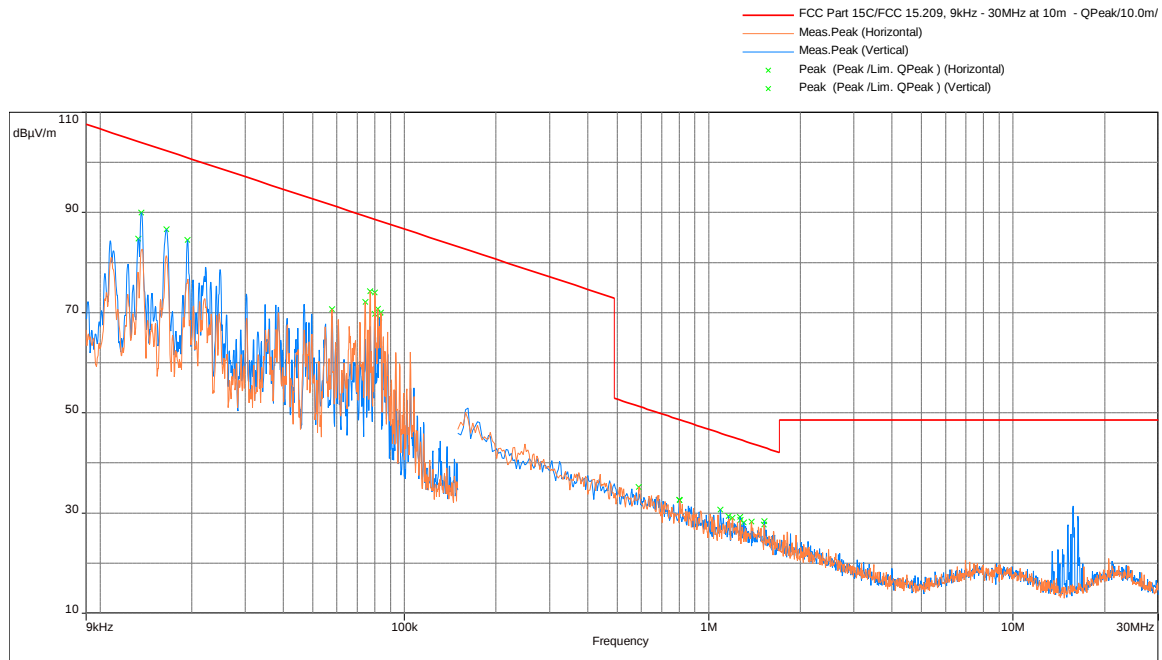


Radiated Spurious Emissions 30 MHz - 1000 MHz

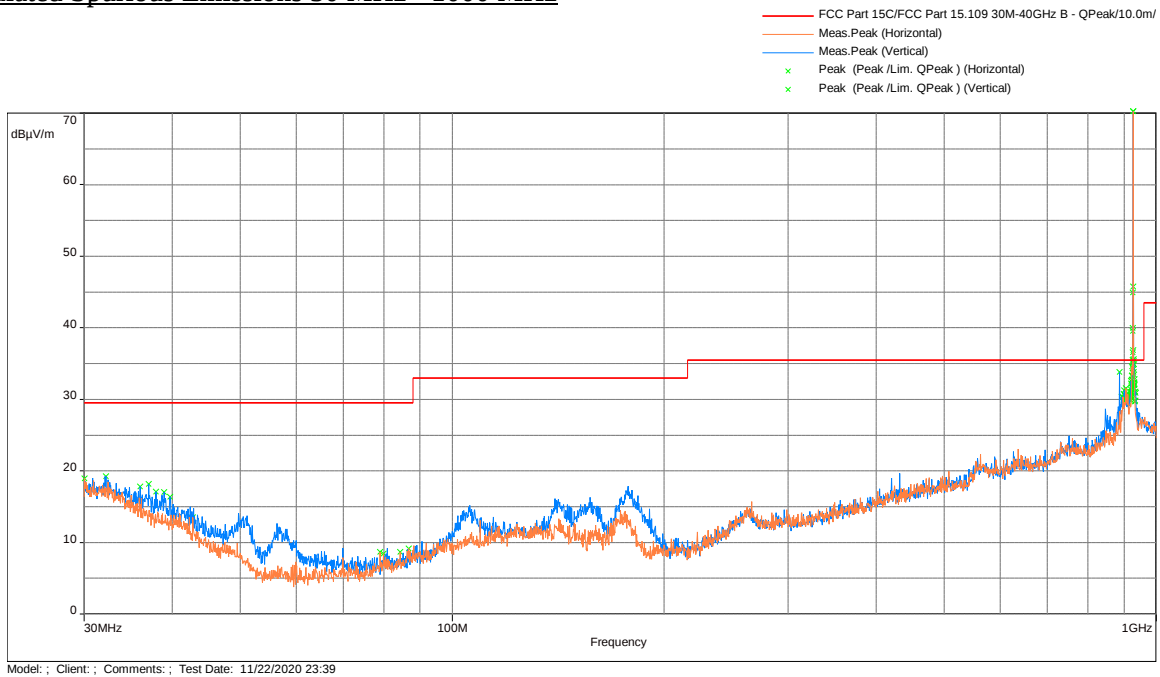

Radiated Spurious Emissions 1000 - 18000 MHz, Peak Scan vs Peak & Avg Limit

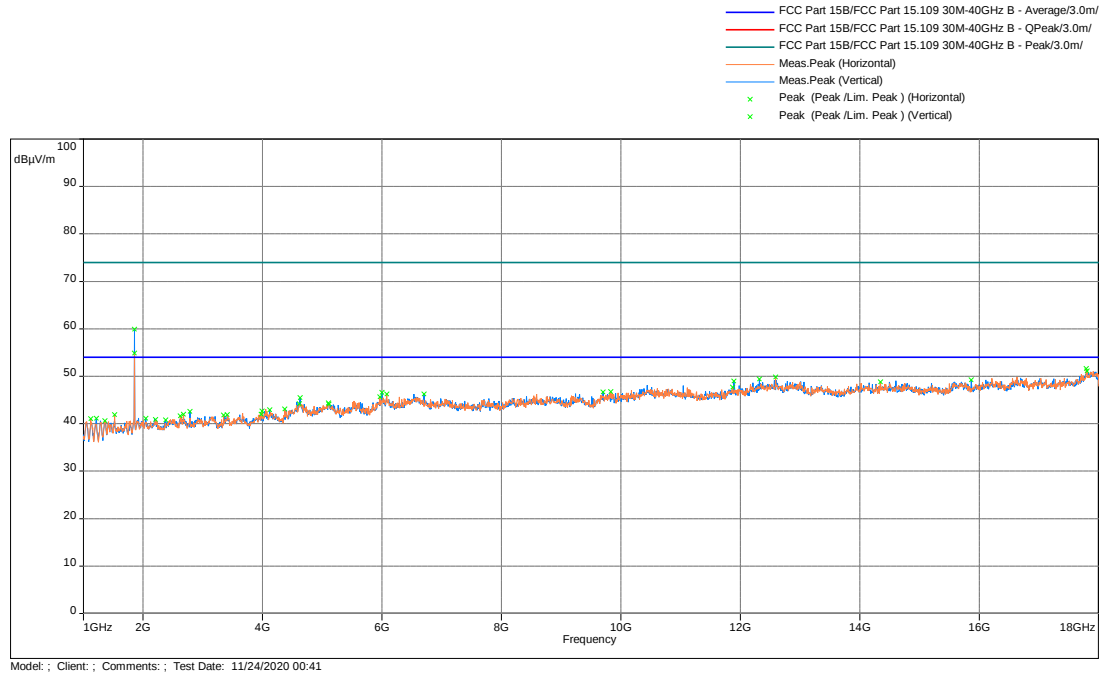

Radiated Spurious Emissions 18000 - 26500 MHz, Peak Scan vs Peak & Avg Limit

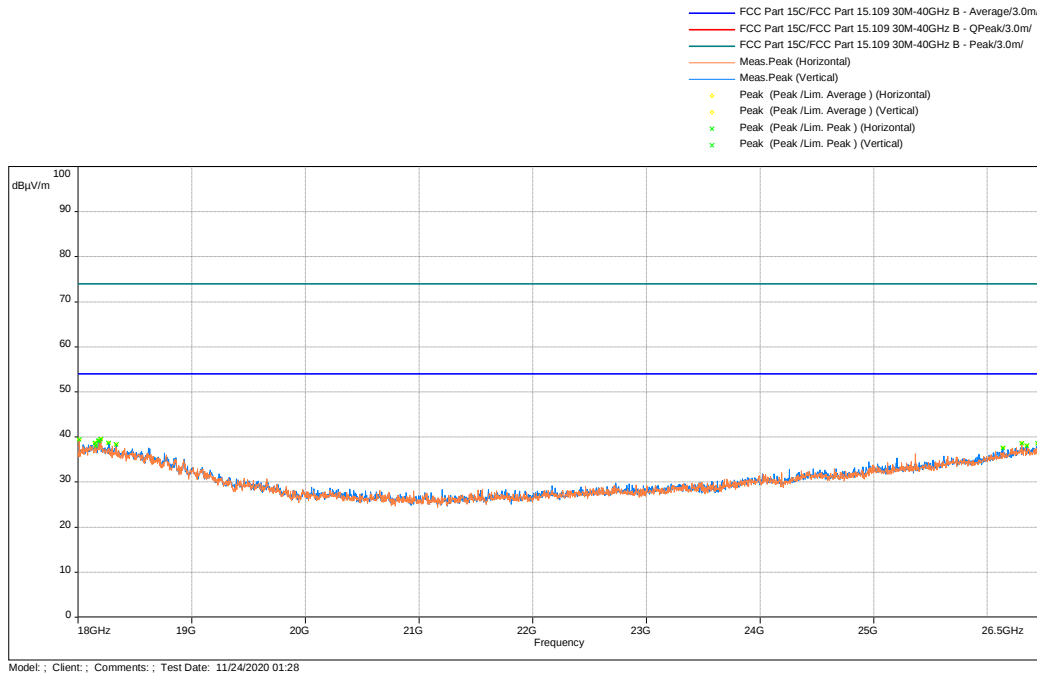

Frequency (MHz)	QPeak@ 10m (dBμV/m)	Lim. QPeak @10m (dBμV/m)	Margin (dB)	Height (m)	Angle (°)	Comment	Correction (dB)
0.014	89.93	103.96	-14.03	286	Vertical	50.86	0.014
0.080	74.04	88.63	-14.6	285.5	Horizontal	34.49	0.080
0.077	74.27	88.94	-14.67	285.5	Horizontal	34.94	0.077
1.526	28.32	43.06	-14.74	59.75	Vertical	11.9	1.526
1.093	30.62	45.95	-15.33	308.5	Vertical	13.84	1.093
1.520	27.67	43.09	-15.43	0.5	Horizontal	11.93	1.520

Frequency (MHz)	Peak @3m (dBμV/m)	Lim. Peak @3m (dBμV/m)	Margin (dB)	Height (m)	Angle (°)	Comment	Correction (dB)
1853.967*	59.89	97.87 (20dBc)	-37.98	2.48	332.5	Vertical	-13.15
2781.033	42.61	74	-31.39	3.98	319.25	Vertical	-10.79

Frequency (MHz)	Average @3m (dBμV/m)	Lim. Average @3m (dBμV/m)	Margin (dB)	Height (m)	Angle (°)	Comment	Correction (dB)
2781.6	33.18	54	-20.82	2.52	145.25	Horizontal	-10.79

Note: Correction = AF + CF - Preamp

*Spurious emission frequencies does not fall under the restricted bands of 15.205, therefore the 15.209 limits does not apply to these frequencies.


Results	Complies
----------------	-----------------

4.7.5 Test Setup Photographs



The following photographs show the testing configurations used.



4.7.5 Test Setup Photographs (Continued)

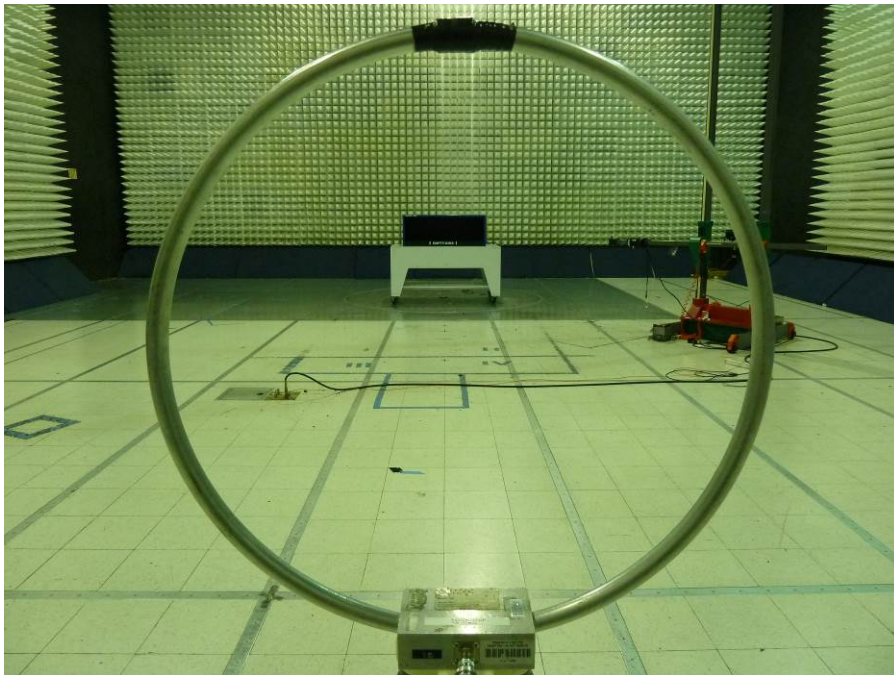

4.7.5 Test Setup Photographs (Continued)

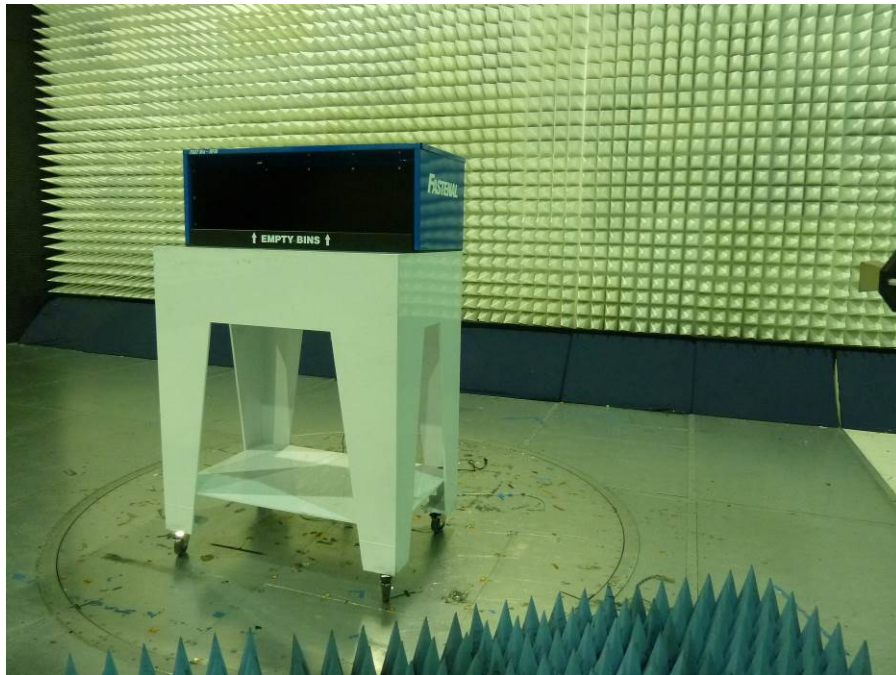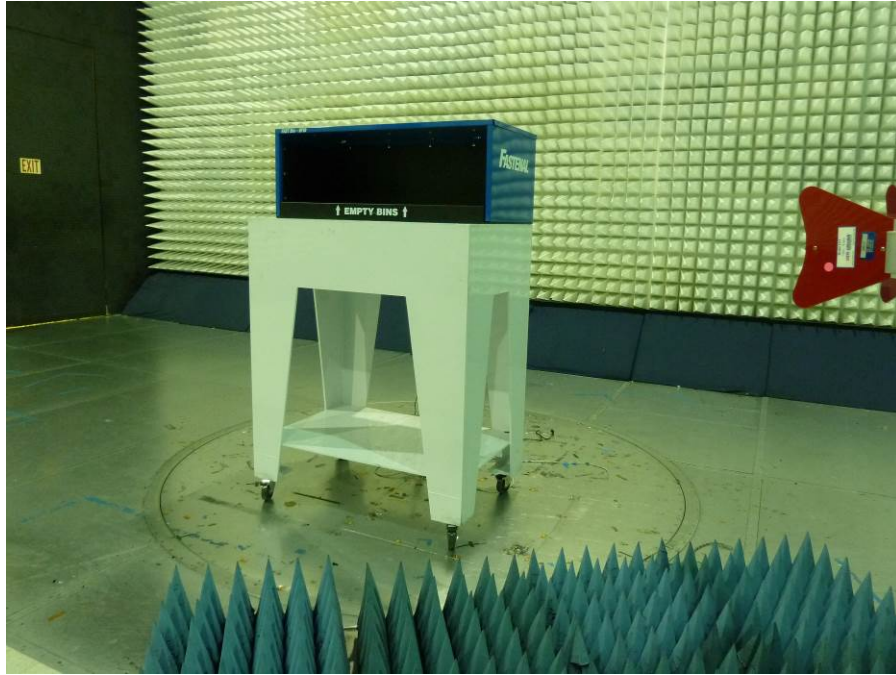

4.8 AC Line Conducted Emission
FCC: 15.207, RSS-GEN;

4.8.1 Requirement

Frequency Band MHz	FCC 15.207 Limit dB(μV)		FCC 15.107 Class A Limit dB(μV)	
	Quasi-Peak	Average	Quasi-Peak	Average
0.15-0.50	66 to 56 *	56 to 46 *	79	66
0.50-5.00	56	46	73	60
5.00-30.00	60	50	73	60

*Note: *Decreases linearly with the logarithm of the frequency. At the transition frequency the lower limit applies.*

4.8.2 Procedure

Measurements are carried out using quasi-peak and average detector receivers in accordance with CISPR 16. An AMN is required to provide defined impedance at high frequencies across the power feed at the point of measurement of terminal voltage and also to provide isolation of the circuit under test from the ambient noise on the power lines. An AMN as defined in CISPR 16 shall be used.

The EUT is located so that the distance between the boundary of the EUT and the closest surface of the AMN is 0.8m.

Where a flexible mains cord is provided by the manufacturer, this shall be 1m long or if in excess of 1m, the excess cable is folded back and forth as far as possible so as to form a bundle not exceeding 0.4m in length.

The EUT is arranged and connected with cables terminated in accordance with the product specification.

Conducted disturbance is measured between the phase lead and the reference ground, and between the neutral lead and the reference ground. Both measured values are reported.

The EUT, where intended for tabletop use, is placed on a table whose top is 0.8m above the ground plane. A vertical, metal reference plane is placed 0.4m from the EUT. The vertical metal reference-plane is at least 2m by 2m. The EUT shall be kept at least 0.8m from any other metal surface or other ground plane not being part of the EUT. The table is constructed of non-conductive materials. Its dimensions are 1m by 1.5m, but may be extended for larger EUT.

Floor standing EUTs are placed on a horizontal metal ground plane and isolated from the ground plane by an insulating material up to 12mm thick. The metal ground plane extends at least 0.5m beyond the boundaries of the EUT and has minimum dimensions of 2m by 2m.

Equipment setup for conducted disturbance tests followed the guidelines of ANSI C63.10: 2013.


Tested By:	Aaron Chang
Test Date:	November 6, 2020

4.8.3 Test Result

15.207 FCC & ICES 003 Conducted Disturbance at AC Mains 120V 60Hz


Sub-range 1
Frequencies: 150 kHz - 30 MHz (Mode: Lin - Step: 4.5 kHz)
Settings: BBW: 9kHz, VBW: 30kHz, Sweep time: 2e+03 ms/MHz, Attenuation: 10 dB, Sweep count 3, Preamp: Off, LN Preamp: Off, Preselector: On
Line: Phase 1

Legend:
 — CISPR Limit/CISPR Limit B - Average/
 — CISPR Limit/CISPR Limit B - QPeak/
 — Meas.Peak (Phase 1)
 — Mes. CISPR AVG (Phase 1)
 • CISPR AVG (CISPR AVG /Lim. Average) (Phase 1)

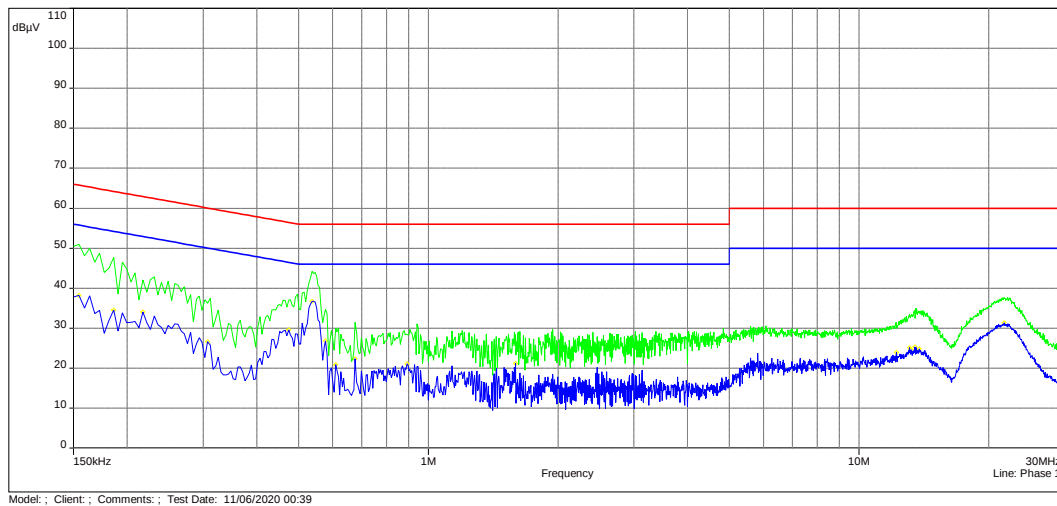

Sub-range 2
Frequencies: 150 kHz - 30 MHz (Mode: Lin - Step: 4.5 kHz)
Settings: BBW: 9kHz, VBW: 30kHz, Sweep time: 2e+03 ms/MHz, Attenuation: 10 dB, Sweep count 3, Preamp: Off, LN Preamp: Off, Preselector: On
Line: Phase 2

Legend:
 — CISPR Limit/CISPR Limit B - Average/
 — CISPR Limit/CISPR Limit B - QPeak/
 — Meas.Peak (Phase 2)
 — Mes. CISPR AVG (Phase 2)
 • Peak (Peak /Lim. QPeak) (Phase 2)
 • cispr avg (cispr avg /lim. average) (phase 1) (Phase 2)

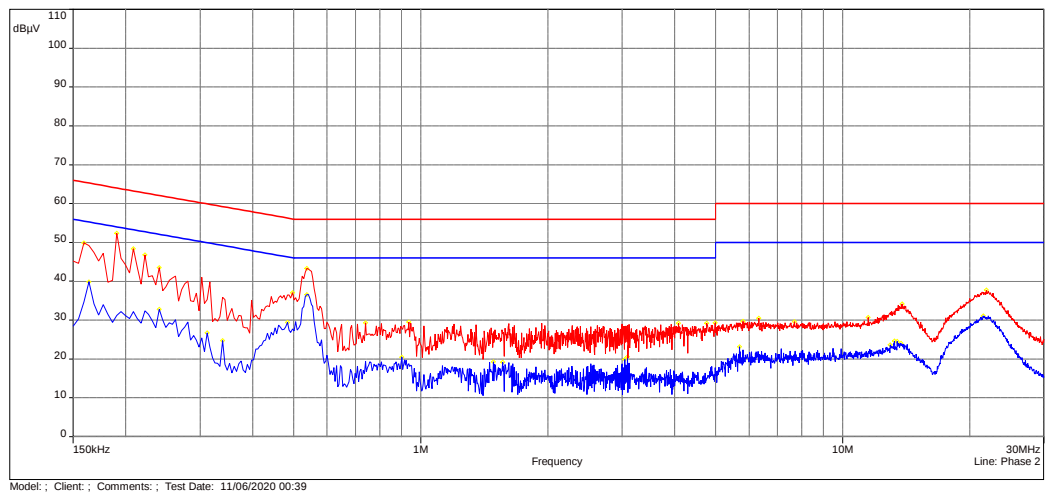


Freq.	Ave Level	QP Level	Ave Limit	QP Limit	Ave Margin	QP Margin	Line	Correction
MHz	dBμV	dBμV	dBμV	dBμV	dB	dB		dB
0.155	38.23	50.92	55.75	65.75	-17.53	-14.83	Phase 1	10.97
0.160	34.14	46.43	55.52	65.52	-21.37	-19.08	Phase 2	10.98
0.240	32.82	43.57	52.1	62.1	-19.27	-18.52	Phase 2	10.97
0.537	36.74	44.19	46	56	-9.26	-11.81	Phase 1	10.99
0.537	36.6	43.34	46	56	-9.4	-12.66	Phase 2	10.99
0.677	22.33	31.42	46	56	-23.67	-24.58	Phase 1	11.03

Result:	Complies by 9.26 dB
----------------	----------------------------

4.8.4 Test Configuration Photographs

The following photographs show the testing configurations used.

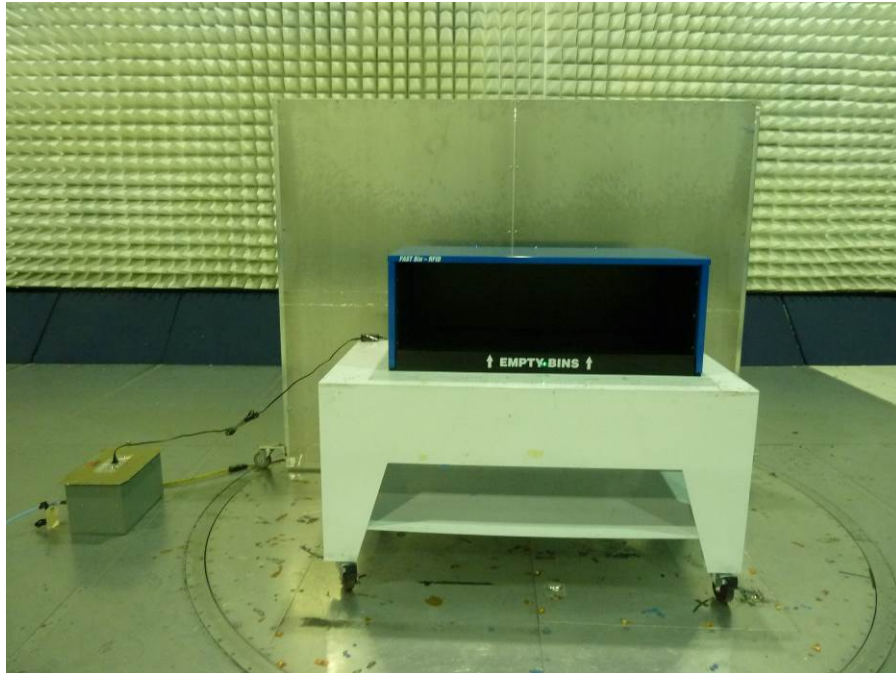

AC Mains Line-Conducted Disturbance Setup Photograph

5.0 List of Test Equipment

Measurement equipment used for emission compliance testing utilized the equipment on the following list:

Equipment	Manufacturer	Model/Type	Asset #	Cal Int	Cal Due
Spectrum Analyzer	Rohde and Schwarz	FSU	ITS 00913	12	05/14/21
Spectrum Analyzer	Rohde and Schwarz	ESR	ITS 01607	12	11/05/21
EMI Receiver	Rohde and Schwarz	ESU	ITS 00961	12	04/02/21
Active Horn Antenna	ETS-Lindgren	3117-PA	ITS 01636	12	02/24/21
BI-Log Antenna	Teseq	CBL 6111D	ITS 01058	12	11/12/21
Pre-Amplifier	Sonoma Instrument	310	ITS 00942	12	04/14/21
Pyramidal Horn Antenna	EMCO	3160-09	ITS 00571	#	#
Pre-Amplifier (18-40GHz)	Miteq	TTA1840-35-S-M	ITS 01393	12	03/02/21
RF Cable	TRU Corporation	TRU CORE 300	ITS 01462	12	09/01/21
RF Cable	TRU Corporation	TRU CORE 300	ITS 01465	12	09/01/21
RF Cable	TRU Corporation	TRU CORE 300	ITS 01470	12	09/01/21
Attenuator	Narda	FSCM99899	ITS 01583	12	10/20/21
High Pass Filter	Micro-Tronics	HPM50114-02	ITS 01722	12	11/12/21
RF Cable	Megaphase	EMC1-K1K1-236	ITS 01538	12	06/12/21
LISN	FCC	FCC-LISN-50-50-M-H	ITS 00551	12	11/16/21

No Calibration required

Software used for emission compliance testing utilized the following:

Name	Manufacturer	Version	Template/Profile
Tile	Quantum Change	3.4.K.22	Conducted Restricted Band Edge_Avg Conducted Restricted Band Edge_Peak Conducted Restricted Band_1-26GHz Conducted Restricted Band_30M-1GHz Conducted Spurious_30M-26GHz
BAT-EMC	Nexio	3.16.0.64	Fastenal 10-26-2020.bpp
RS Commander	Rohde Schwarz	1.6.4	Not Applicable (Screen grabber)

6.0 Document History

Revision/ Job Number	Writer Initials	Reviewers Initials	Date	Change
1.0 / G103436674	AC	KV	December 11, 2020	Original document