

FCC REPORT

Applicant: Aduro Technologies LLC

Address of Applicant: 700 N Valley St, Suite B, Anaheim, California 92801, United States

Manufacturer/Factory: Shenzhen Adurolight Technology Co., Ltd.

Address of Manufacturer/Factory: A3 Building, Fangxing Technology Park Longnan Industrial zone Longgang District, Shenzhen China

Equipment Under Test (EUT)

Product Name: Zigbee Bulbs

Model No.: 81809, 81813

Trade mark:

ADUROS^{SMART}, 

FCC ID: 2APKV-81809

Applicable standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247

Date of sample receipt: March 20, 2018

Date of Test: March 21, 2018-April 11, 2018

Date of report issued: April 12, 2018

Test Result : PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Robinson Lo


Laboratory Manager

This results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

2 Version

Version No.	Date	Description
00	April 12, 2018	Original

Prepared By:




Date:

April 12, 2018

Project Engineer

Check By:



Date:

April 12, 2018

Reviewer

3 Contents

	Page
1 COVER PAGE	1
2 VERSION	2
3 CONTENTS	3
4 TEST SUMMARY	4
4.1 MEASUREMENT UNCERTAINTY	4
5 GENERAL INFORMATION	5
5.1 GENERAL DESCRIPTION OF EUT	5
5.2 TEST MODE	7
5.3 DESCRIPTION OF SUPPORT UNITS	7
5.4 TEST FACILITY	7
5.5 TEST LOCATION	7
6 TEST INSTRUMENTS LIST	8
7 TEST RESULTS AND MEASUREMENT DATA	9
7.1 ANTENNA REQUIREMENT	9
7.2 CONDUCTED EMISSIONS	10
7.3 CONDUCTED PEAK OUTPUT POWER	15
7.4 CHANNEL BANDWIDTH	17
7.5 POWER SPECTRAL DENSITY	19
7.6 BAND EDGES	21
7.6.1 Conducted Emission Method	21
7.6.2 Radiated Emission Method	23
7.7 SPURIOUS EMISSION	26
7.7.1 Conducted Emission Method	26
7.7.2 Radiated Emission Method	28
8 TEST SETUP PHOTO	41
9 EUT CONSTRUCTIONAL DETAILS	45

4 Test Summary

Test Item	Section in CFR 47	Result
Antenna requirement	15.203/15.247 (c)	Pass
AC Power Line Conducted Emission	15.207	Pass
Conducted Peak Output Power	15.247 (b)(3)	Pass
Channel Bandwidth	15.247 (a)(2)	Pass
Power Spectral Density	15.247 (e)	Pass
Band Edge	15.247(d)	Pass
Spurious Emission	15.205/15.209	Pass

Pass: The EUT complies with the essential requirements in the standard.

Remark : Test according to ANSI C63.4:2014 and ANSI C63.10:2013

N/A means not applicable.

4.1 Measurement Uncertainty

Test Item	Frequency Range	Measurement Uncertainty	Notes
Radiated Emission	9kHz ~ 30MHz	$\pm 4.34\text{dB}$	(1)
Radiated Emission	30MHz ~ 1000MHz	$\pm 4.24\text{dB}$	(1)
Radiated Emission	1GHz ~ 26.5GHz	$\pm 4.68\text{dB}$	(1)
AC Power Line Conducted Emission	0.15MHz ~ 30MHz	$\pm 3.45\text{dB}$	(1)

Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

5 General Information

5.1 General Description of EUT

Product Name:	Zigbee Bulbs
Model No.:	81809, 81813
Test Model No:	81809, 81813
<i>Remark: Only the model 81809 was tested fully, and the model 81813 was performed the AC Power Line Conducted Emission and Spurious Emission for discrepancy, since the electrical circuit design, PCB layout, functions, components used and internal wiring were identical for the above models, with only differences are appearance, LED PCB and model name.</i>	
Serial No.:	15031800002, 15031800001
Test sample(s) ID:	GTS201803000149-1
Sample(s) Status	Engineer sample
Operation Frequency:	2405MHz~2480MHz
Channel numbers:	16
Channel separation:	5MHz
Modulation type:	O-QPSK
Antenna Type:	Integral Antenna
Antenna gain:	2.15 dBi(declare by Applicant)
Power supply:	AC 120V 60Hz

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2405MHz	5	2425MHz	9	2445MHz	13	2465MHz
2	2410MHz	6	2430MHz	10	2450MHz	14	2470MHz
3	2415MHz	7	2435MHz	11	2455MHz	15	2475MHz
4	2420MHz	8	2440MHz	12	2460MHz	16	2480 MHz

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The lowest channel	2405MHz
The middle channel	2440MHz
The Highest channel	2480MHz

5.2 Test mode

Transmitting mode	Keep the EUT in continuously transmitting mode.
<i>Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.</i>	

5.3 Description of Support Units

None

5.4 Test Facility

The test facility is recognized, certified, or accredited by the following organizations: ● FCC —Registration No.: 381383 Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 381383, January 08, 2018 ● Industry Canada (IC) —Registration No.: 9079A-2 The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A-2, August 15, 2016.

5.5 Test Location

All tests were performed at:
Global United Technology Services Co., Ltd. Address: No. 301-309, 3/F., Jinyuan Business Building, No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, Guangdong, China Tel: 0755-27798480 Fax: 0755-27798960

6 Test Instruments list


Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	July 03 2015	July 02 2020
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	Spectrum Analyzer	Agilent	E4440A	GTS533	June 28 2017	June 27 2018
4	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	June 28 2017	June 27 2018
5	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	GTS214	June 28 2017	June 27 2018
6	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	9120D-829	GTS208	June 28 2017	June 27 2018
7	Horn Antenna	ETS-LINDGREN	3160	GTS217	June 28 2017	June 27 2018
8	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
9	Coaxial Cable	GTS	N/A	GTS213	June 28 2017	June 27 2018
10	Coaxial Cable	GTS	N/A	GTS211	June 28 2017	June 27 2018
11	Coaxial cable	GTS	N/A	GTS210	June 28 2017	June 27 2018
12	Coaxial Cable	GTS	N/A	GTS212	June 28 2017	June 27 2018
13	Amplifier(100kHz-3GHz)	HP	8347A	GTS204	June 28 2017	June 27 2018
14	Amplifier(2GHz-20GHz)	HP	8349B	GTS206	June 28 2017	June 27 2018
15	Amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	June 28 2017	June 27 2018
16	Band filter	Amindeon	82346	GTS219	June 28 2017	June 27 2018
17	Power Meter	Anritsu	ML2495A	GTS540	June 28 2017	June 27 2018
18	Power Sensor	Anritsu	MA2411B	GTS541	June 28 2017	June 27 2018
19	Loop Antenna	ZHINAN	ZN30900A	GTS534	June 28 2017	June 27 2018

Conducted Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Shielding Room	ZhongYu Electron	7.3(L)x3.1(W)x2.9(H)	GTS252	May 16 2014	May 15 2019
2	EMI Test Receiver	R&S	ESCI 7	GTS552	June 28 2017	June 27 2018
3	Pulse Limiter	R&S	ESH3-Z2	GTS224	June 28 2017	June 27 2018
4	Coaxial Switch	ANRITSU CORP	MP59B	GTS225	June 28 2017	June 27 2018
5	Artificial Mains Network	SCHWARZBECK MESS	NSLK8127	GTS226	June 28 2017	June 27 2018
6	Coaxial Cable	GTS	N/A	GTS227	June 28 2017	June 27 2018
7	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
8	Thermo meter	KTJ	TA328	GTS233	June 28 2017	June 27 2018

General used equipment:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Barometer	ChangChun	DYM3	GTS257	June 28 2017	June 27 2018

7 Test results and Measurement Data

7.1 Antenna requirement

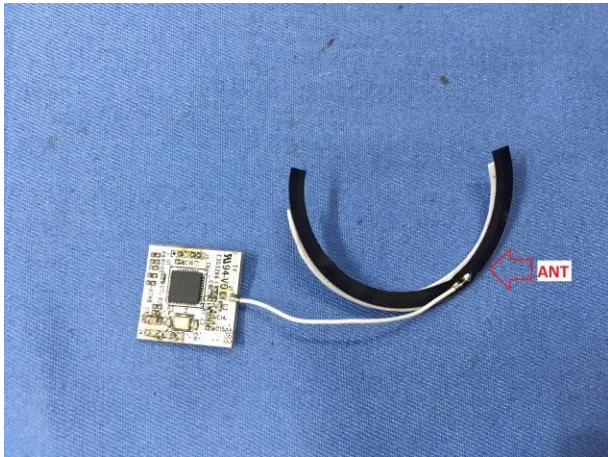Standard requirement:	FCC Part15 C Section 15.203 /247(c)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.247(c) (1)(i) requirement: (i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.	
EUT Antenna:	
<i>The antenna is Integral Antenna, the best case gain of the antenna is 2.15dBi</i> <i>Model number: 81809</i>  <i>Model number: 81813</i> 	


7.2 Conducted Emissions

Test Requirement:	FCC Part15 C Section 15.207			
Test Method:	ANSI C63.10:2013			
Test Frequency Range:	150KHz to 30MHz			
Class / Severity:	Class B			
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto			
Limit:	Frequency range (MHz)	Limit (dBuV)		
		Quasi-peak	Average	
		0.15-0.5	66 to 56*	56 to 46*
		0.5-5	56	46
		5-30	60	50
* Decreases with the logarithm of the frequency.				
Test setup:	Reference Plane Test table/Insulation plane <i>Remark: E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m</i>			
Test procedure:	1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement.			
Test Instruments:	Refer to section 6.0 for details			
Test mode:	Refer to section 5.2 for details			
Test results:	Pass			

Measurement data


Model number: 81809

Line:

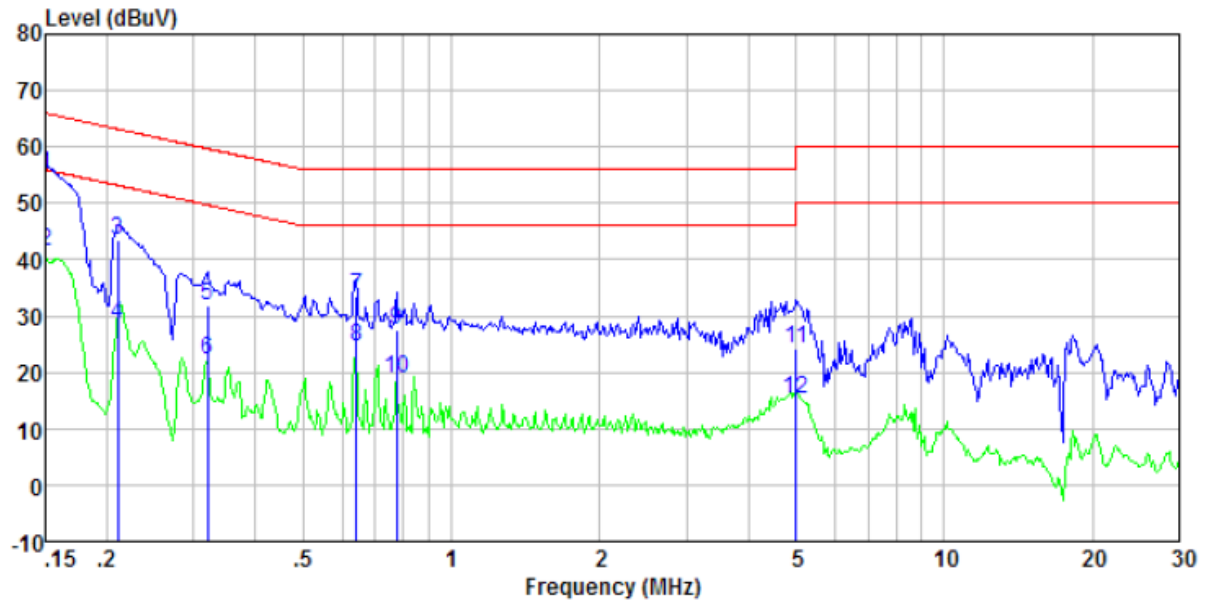

Freq MHz	Reading level dBuV	IISN/ISN factor dB	Cable loss dB	level dBuV	Limit level dBuV	Over limit dB	Remark
0.150	54.63	0.40	0.07	55.10	66.00	-10.90	QP
0.150	41.02	0.40	0.07	41.49	56.00	-14.51	Average
0.211	43.10	0.40	0.11	43.61	63.18	-19.57	QP
0.211	27.89	0.40	0.11	28.40	53.18	-24.78	Average
0.320	31.26	0.39	0.10	31.75	59.71	-27.96	QP
0.320	21.70	0.39	0.10	22.19	49.71	-27.52	Average
0.641	33.03	0.27	0.12	33.42	56.00	-22.58	QP
0.641	24.03	0.27	0.12	24.42	46.00	-21.58	Average
0.775	27.07	0.24	0.14	27.45	56.00	-28.55	QP
0.775	18.56	0.24	0.14	18.94	46.00	-27.06	Average
5.005	23.94	0.20	0.17	24.31	60.00	-35.69	QP
5.005	14.80	0.20	0.17	15.17	50.00	-34.83	Average


Neutral:

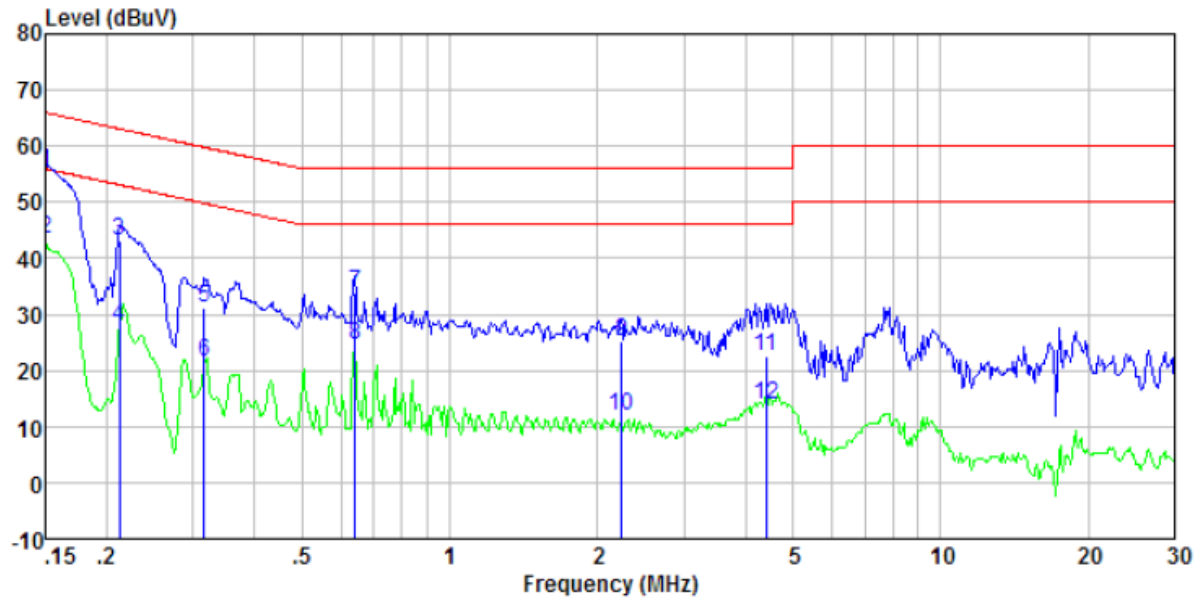

Freq MHz	Reading level dBuV	1ISN/ISN factor dB	Cable loss dB	level dBuV	Limit level dBuV	Over limit dB	Remark
0.150	54.79	0.40	0.07	55.26	66.00	-10.74	QP
0.150	42.87	0.40	0.07	43.34	56.00	-12.66	Average
0.213	42.57	0.40	0.11	43.08	63.10	-20.02	QP
0.213	27.48	0.40	0.11	27.99	53.10	-25.11	Average
0.317	30.73	0.39	0.10	31.22	59.80	-28.58	QP
0.317	20.98	0.39	0.10	21.47	49.80	-28.33	Average
0.641	33.38	0.27	0.12	33.77	56.00	-22.23	QP
0.641	24.12	0.27	0.12	24.51	46.00	-21.49	Average
2.237	24.83	0.20	0.18	25.21	56.00	-30.79	QP
2.237	11.61	0.20	0.18	11.99	46.00	-34.01	Average
4.407	22.08	0.20	0.17	22.45	56.00	-33.55	QP
4.407	13.50	0.20	0.17	13.87	46.00	-32.13	Average


Model number: 81813

Line:

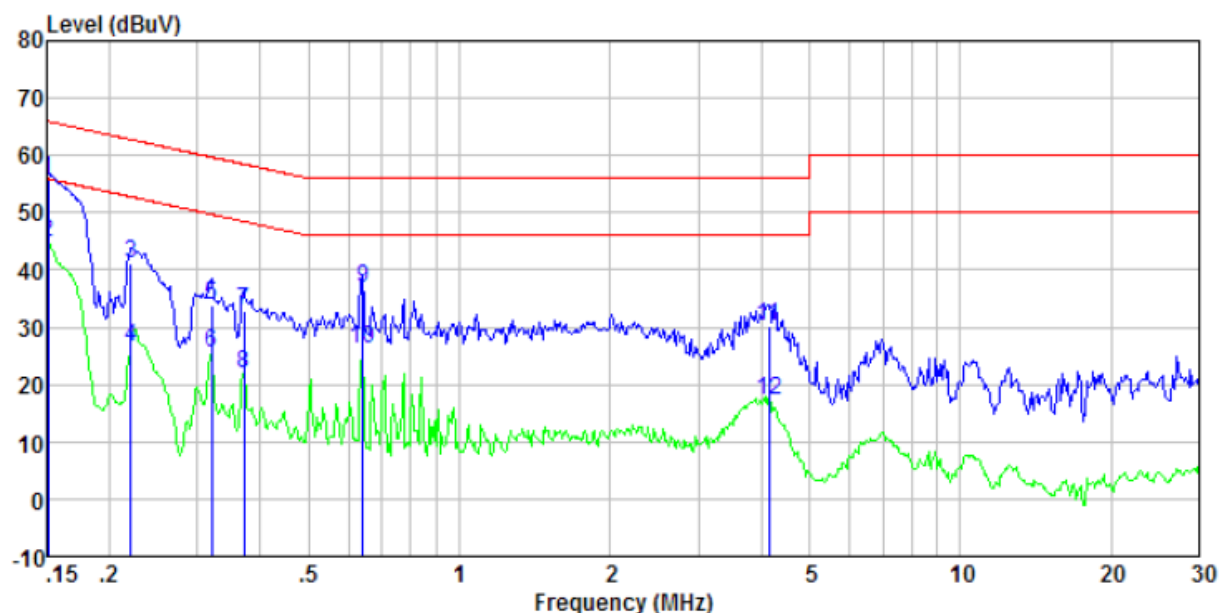

Freq MHz	Reading level dBuV	LIISN/ISN factor dB	Cable loss dB	level dBuV	Limit level dBuV	Over limit dB	Remark
0.151	55.13	0.40	0.07	55.60	65.96	-10.36	QP
0.151	44.31	0.40	0.07	44.78	55.96	-11.18	Average
0.221	40.65	0.40	0.11	41.16	62.79	-21.63	QP
0.221	26.04	0.40	0.11	26.55	52.79	-26.24	Average
0.320	33.32	0.39	0.10	33.81	59.71	-25.90	QP
0.320	24.95	0.39	0.10	25.44	49.71	-24.27	Average
0.371	32.29	0.36	0.10	32.75	58.47	-25.72	QP
0.371	21.33	0.36	0.10	21.79	48.47	-26.68	Average
0.641	36.32	0.27	0.12	36.71	56.00	-19.29	QP
0.641	25.85	0.27	0.12	26.24	46.00	-19.76	Average
4.158	29.70	0.20	0.18	30.08	56.00	-25.92	QP
4.158	16.73	0.20	0.18	17.11	46.00	-28.89	Average

Neutral:

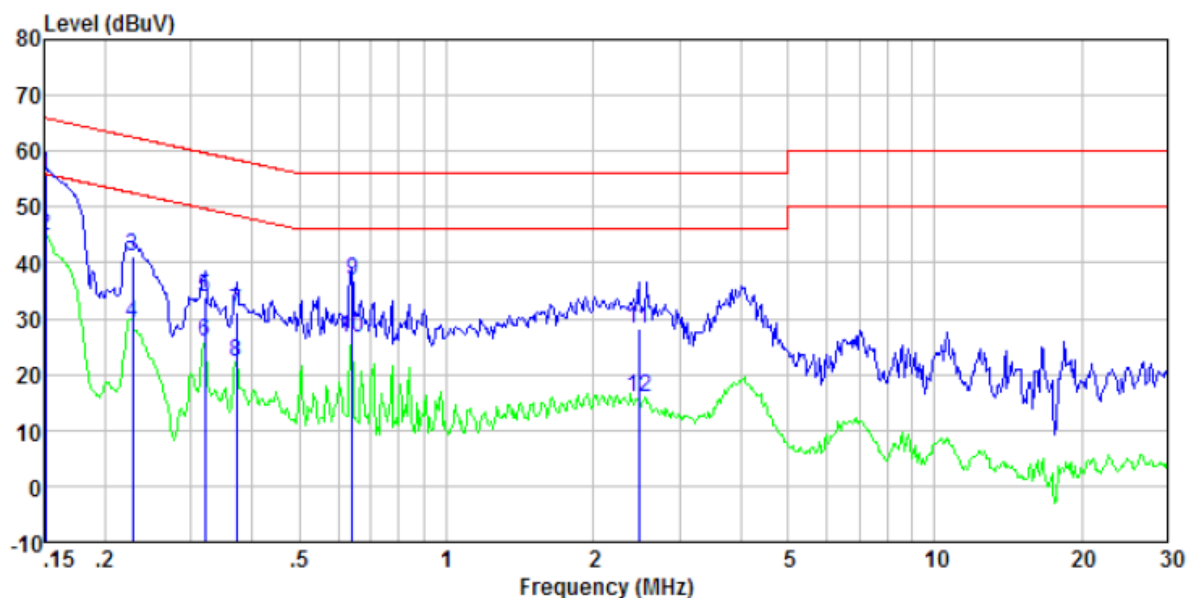


Freq MHz	Reading level dBuV	LISN/ISN factor dB	Cable loss dB	level dBuV	Limit level dBuV	Over limit dB	Remark
0.151	55.43	0.40	0.07	55.90	65.96	-10.06	QP
0.151	44.39	0.40	0.07	44.86	55.96	-11.10	Average
0.228	40.55	0.40	0.11	41.06	62.52	-21.46	QP
0.228	28.79	0.40	0.11	29.30	52.52	-23.22	Average
0.320	33.31	0.39	0.10	33.80	59.71	-25.91	QP
0.320	25.45	0.39	0.10	25.94	49.71	-23.77	Average
0.371	30.75	0.36	0.10	31.21	58.47	-27.26	QP
0.371	21.80	0.36	0.10	22.26	48.47	-26.21	Average
0.641	36.33	0.27	0.12	36.72	56.00	-19.28	QP
0.641	26.03	0.27	0.12	26.42	46.00	-19.58	Average
2.474	27.83	0.20	0.18	28.21	56.00	-27.79	QP
2.474	15.46	0.20	0.18	15.84	46.00	-30.16	Average

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Cable Loss
4. If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits and measurement with the average detector receiver is unnecessary.


7.3 Conducted Peak Output Power

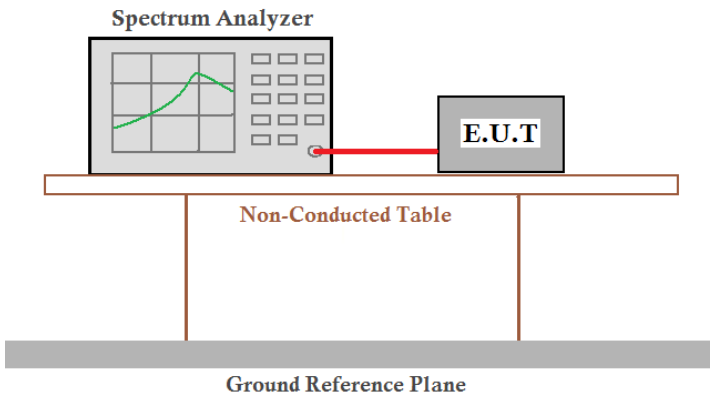Test Requirement:	FCC Part15 C Section 15.247 (b)(3)
Test Method:	ANSI C63.10:2013 and KDB558074 D01 DTS Meas Guidance V04
Limit:	30dBm
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T. are placed on a Non-Conducted Table. The table is supported by two vertical legs. Below the table is a Ground Reference Plane, represented by a thick grey bar.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2for details
Test results:	Pass


Measurement Data

Frequency (MHz)	Peak Output Power (dBm)	Limit(dBm)	Result
2405	7.48	30	PASS
2440	6.94		
2480	6.58		


Test plot as follows:

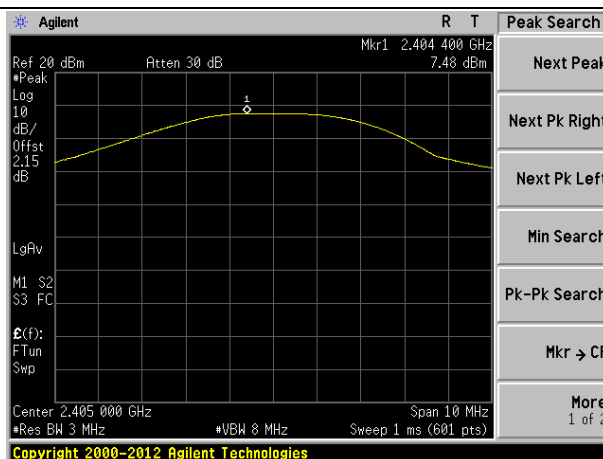

Lowest channel

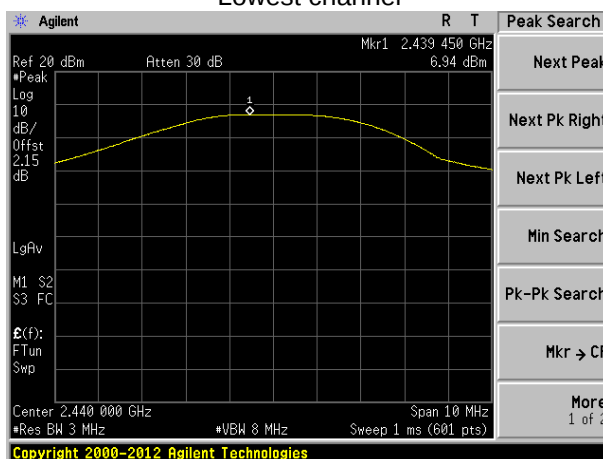


Middle channel

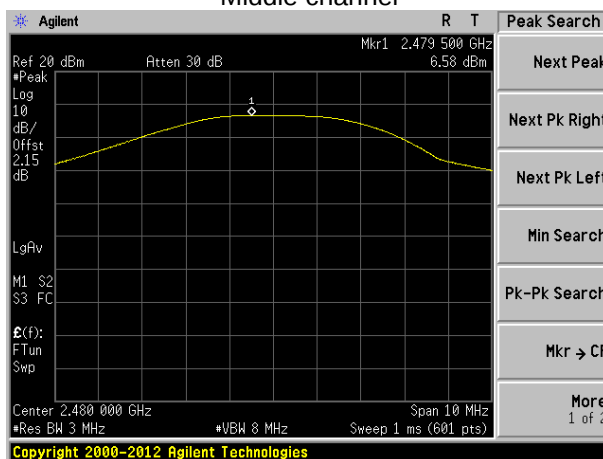

Highest channel


7.4 Channel Bandwidth

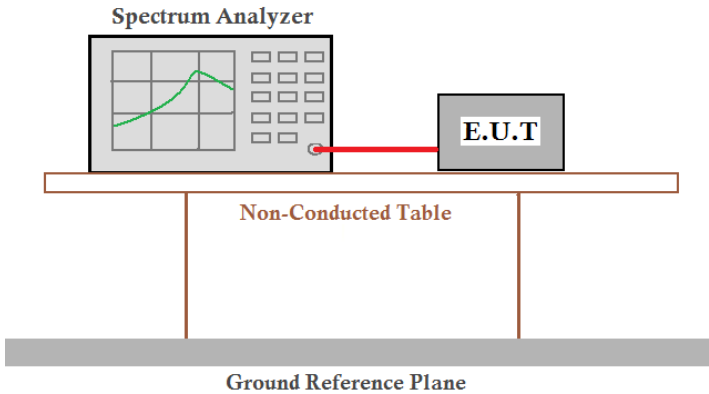Test Requirement:	FCC Part15 C Section 15.247 (a)(2)
Test Method:	ANSI C63.10:2013 and KDB558074 D01 DTS Meas Guidance V04
Limit:	>500KHz
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T. are placed on a Non-Conducted Table. The table is supported by a Ground Reference Plane.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass


Measurement Data

Frequency (MHz)	Channel Bandwidth (MHz)	Limit(KHz)	Result
2405	1.588	>500	Pass
2440	1.599		
2480	1.624		


Test plot as follows:

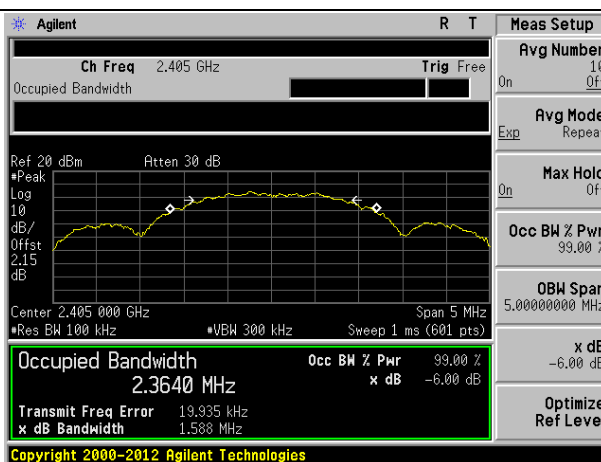

Lowest channel

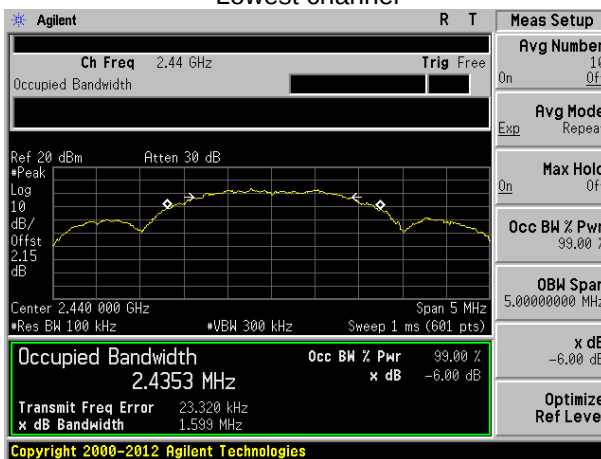


Middle channel

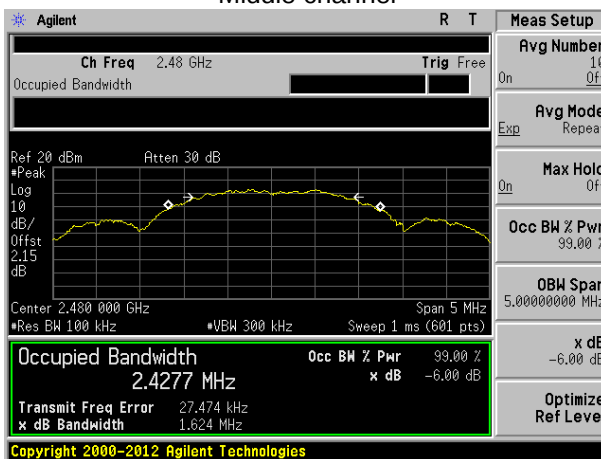

Highest channel


7.5 Power Spectral Density

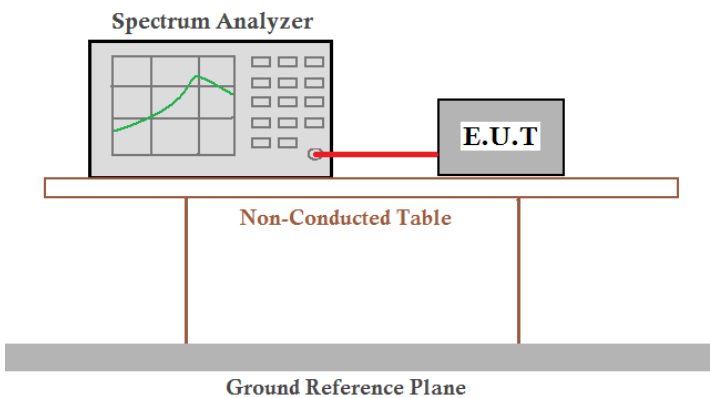Test Requirement:	FCC Part15 C Section 15.247 (e)
Test Method:	ANSI C63.10:2013 and KDB558074 D01 DTS Meas Guidance V04
Limit:	8dBm/3kHz
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T. are placed on a Non-Conducted Table. The table is supported by a Ground Reference Plane.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass


Measurement Data

Frequency (MHz)	Power Spectral Density (dBm)	Limit (dBm/3kHz)	Result
2405	-4.56	8.00	Pass
2440	-5.21		
2480	-4.91		


Test plot as follows:

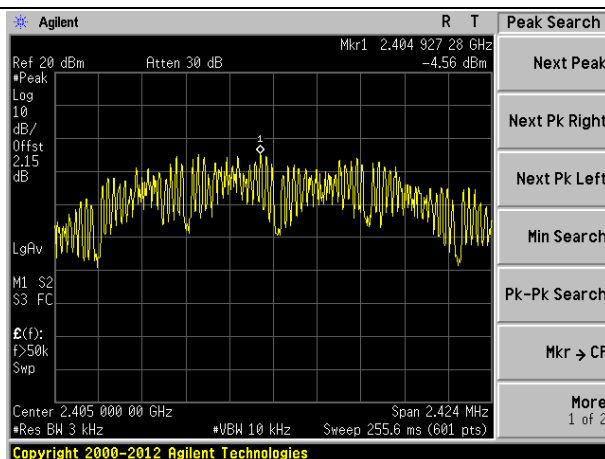

Lowest channel

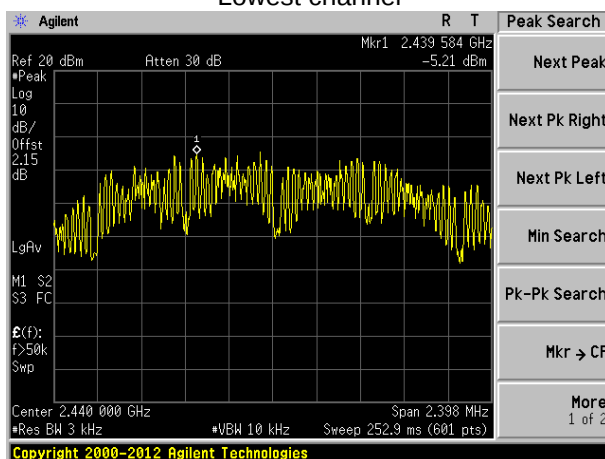


Middle channel

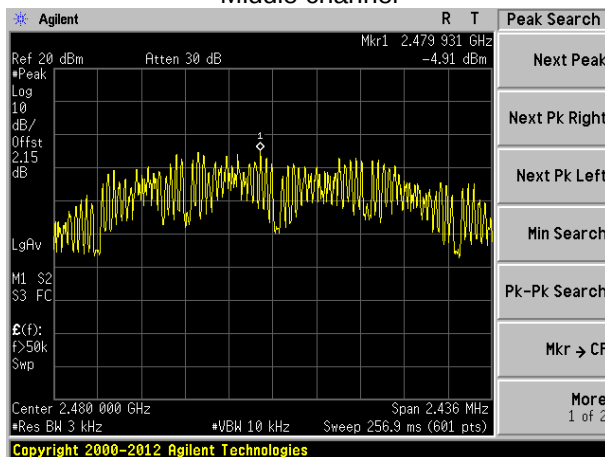


Highest channel

7.6 Band edges


7.6.1 Conducted Emission Method

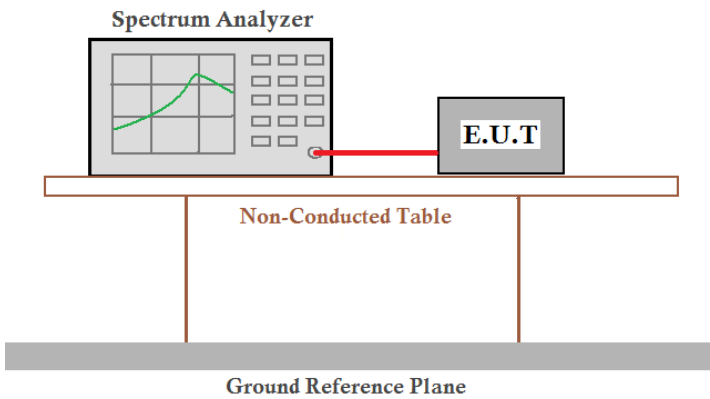Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.10:2013 and KDB558074 D01 DTS Meas Guidance V04
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T (Equipment Under Test) via a red cable. Both are placed on a Non-Conducted Table, which is supported by two vertical legs. Below the table is a thick grey bar representing the Ground Reference Plane.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Test plot as follows:

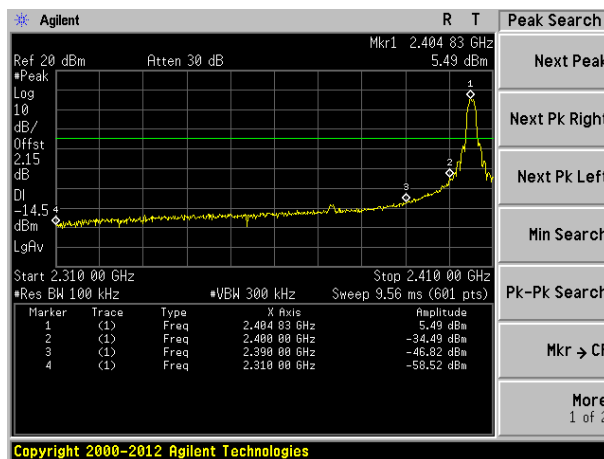


Lowest channel

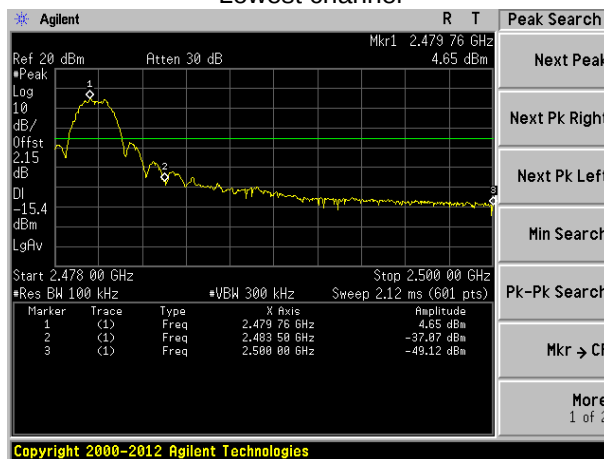

Highest channel

7.6.2 Radiated Emission Method

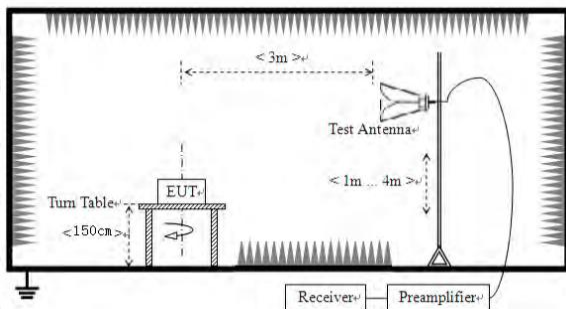Test Requirement:	FCC Part15 C Section 15.209 and 15.205				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	All of the restrict bands were tested, only the worst band's (2310MHz to 2500MHz) data was showed.				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	Above 1GHz	Peak	1MHz	3MHz	Peak
		RMS	1MHz	3MHz	Average
Limit:	Frequency		Limit (dBuV/m @3m)		Value
	Above 1GHz		54.00		Average
			74.00		Peak
Test setup:					
Test Procedure:	1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. 7. The radiation measurements are performed in X, Y, Z axis positioning. And found the Y axis positioning which it is worse case, only the test worst case mode is recorded in the report.				
Test Instruments:	Refer to section 6.0 for details				
Test mode:	Refer to section 5.2 for details				
Test results:	Pass				

Measurement data:

Remark: The pre-test were performed on lowest, middle and highest frequencies, only the worst case's was showed.

Model number: 81809

Test channel:	Lowest channel
---------------	----------------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	39.13	27.91	5.30	24.64	47.70	74.00	-26.30	Vertical
2390.00	35.87	27.59	5.38	24.71	44.13	74.00	-29.87	Vertical
2400.00	39.88	27.58	5.39	24.72	48.13	74.00	-25.87	Vertical
2310.00	37.18	27.91	5.30	24.64	45.75	74.00	-28.25	Horizontal
2390.00	35.54	27.59	5.38	24.71	43.80	74.00	-30.20	Horizontal
2400.00	39.23	27.58	5.39	24.72	47.48	74.00	-26.52	Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	29.91	27.91	5.30	24.64	38.48	54.00	-15.52	Vertical
2390.00	26.35	27.59	5.38	24.71	34.61	54.00	-19.39	Vertical
2400.00	30.69	27.58	5.39	24.72	38.94	54.00	-15.06	Vertical
2310.00	27.60	27.91	5.30	24.64	36.17	54.00	-17.83	Horizontal
2390.00	26.77	27.59	5.38	24.71	35.03	54.00	-18.97	Horizontal
2400.00	29.04	27.58	5.39	24.72	37.29	54.00	-16.71	Horizontal

Test channel:	Highest channel
---------------	-----------------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	43.63	27.53	5.47	24.80	51.83	74.00	-22.17	Vertical
2500.00	34.41	27.55	5.49	24.86	42.59	74.00	-31.41	Vertical
2483.50	36.63	27.53	5.47	24.80	44.83	74.00	-29.17	Horizontal
2500.00	27.69	27.55	5.49	24.86	35.87	74.00	-38.13	Horizontal

Average value:


Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	34.33	27.53	5.47	24.80	42.53	54.00	-11.47	Vertical
2500.00	24.33	27.55	5.49	24.86	32.51	54.00	-21.49	Vertical
2483.50	24.86	27.53	5.47	24.80	33.06	54.00	-20.94	Horizontal
2500.00	18.33	27.55	5.49	24.86	26.51	54.00	-27.49	Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.


7.7 Spurious Emission

7.7.1 Conducted Emission Method

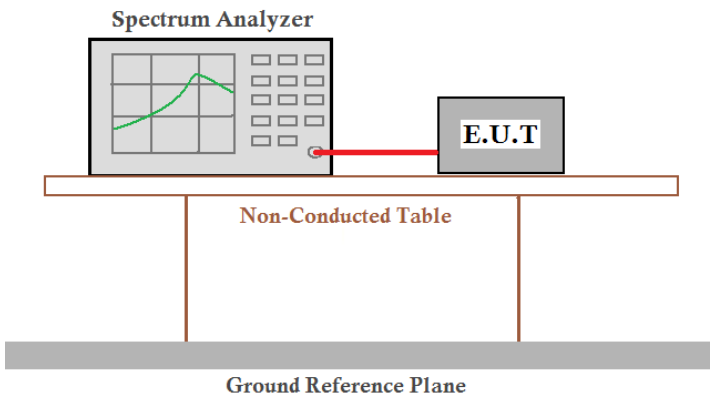Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.10:2013 and KDB558074 D01 DTS Meas Guidance V04
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	 The diagram illustrates the test setup for conducted emission measurement. A Spectrum Analyzer is connected via a red cable to an E.U.T. (Equipment Under Test). Both are placed on a Non-Conducted Table, which is supported by two vertical legs. Below the table is a Ground Reference Plane.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass


Test plot as follows:

Lowest channel

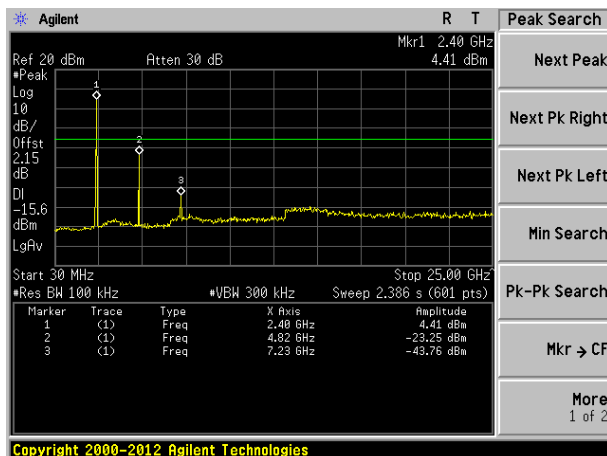


30MHz~25GHz

Middle channel

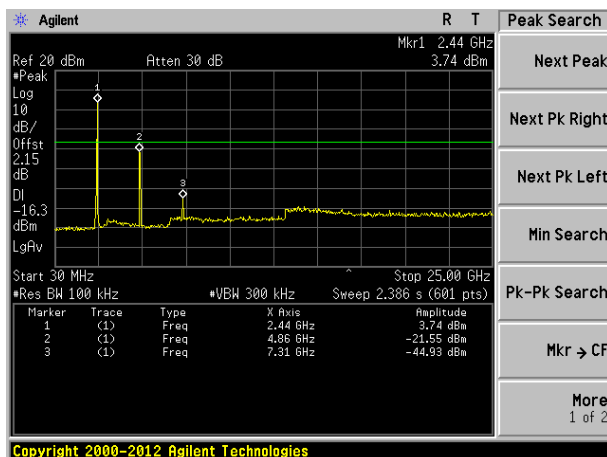

30MHz~25GHz

Highest channel

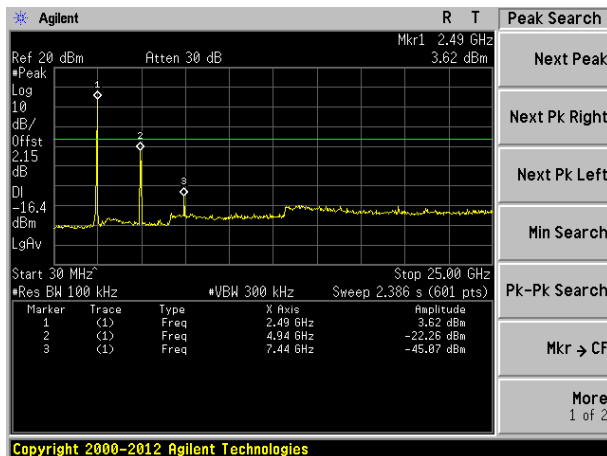


30MHz~25GHz

7.7.2 Radiated Emission Method


Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	9kHz to 25GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak
	150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Limit: (Field strength of the fundamental signal)	Frequency		Limit (dBuV/m @3m)		Remark
	2400MHz-2483.5MHz		94.00		Average Value
			114.00		Peak Value
Limit: (Spurious Emissions)	Frequency		Limit (uV/m)	Value	Measurement Distance
	0.009MHz-0.490MHz		2400/F(KHz)	QP	300m
	0.490MHz-1.705MHz		24000/F(KHz)	QP	300m
	1.705MHz-30MHz		30	QP	30m
	30MHz-88MHz		100	QP	3m
	88MHz-216MHz		150	QP	
	216MHz-960MHz		200	QP	
	960MHz-1GHz		500	QP	
	Above 1GHz		500	Average	
			5000	Peak	
Limit: (band edge)	Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.				

Test setup:


Below 30MHz

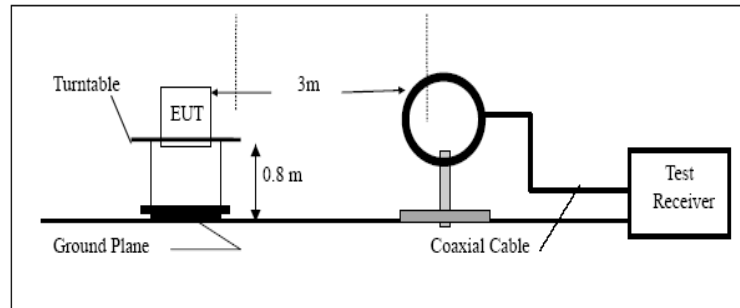

Below 1GHz

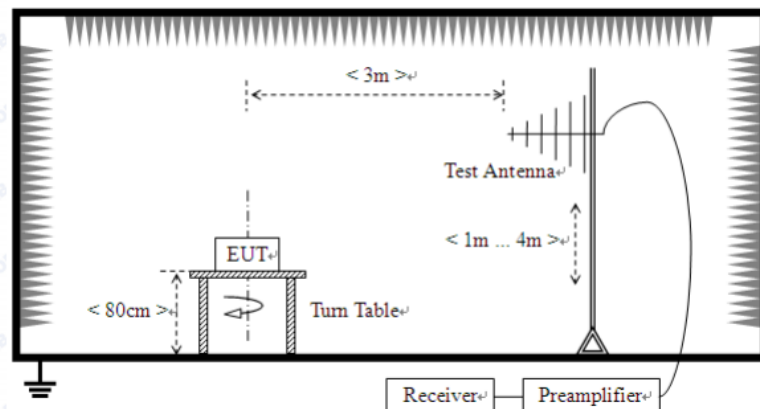

Above 1GHz

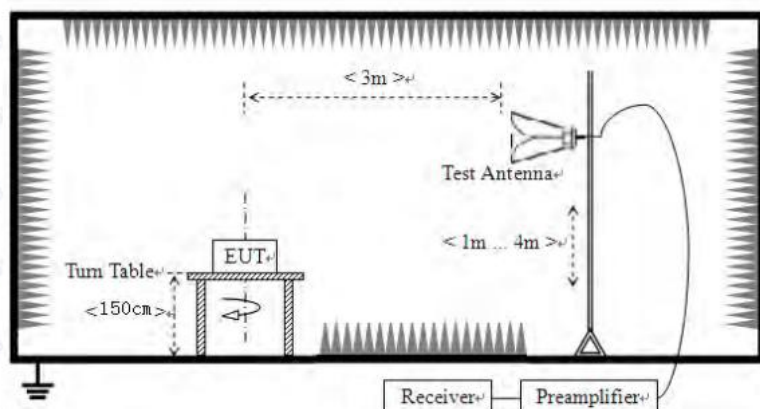

Test Procedure:	1. The EUT was placed on the top of a rotating table (0.8m for below 1G and 1.5m for above 1G) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement data:

9 kHz ~ 30 MHz

The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.


Remark:

Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis which it is worse case.

■ Below 1GHz


Model number: 81809

Horizontal:

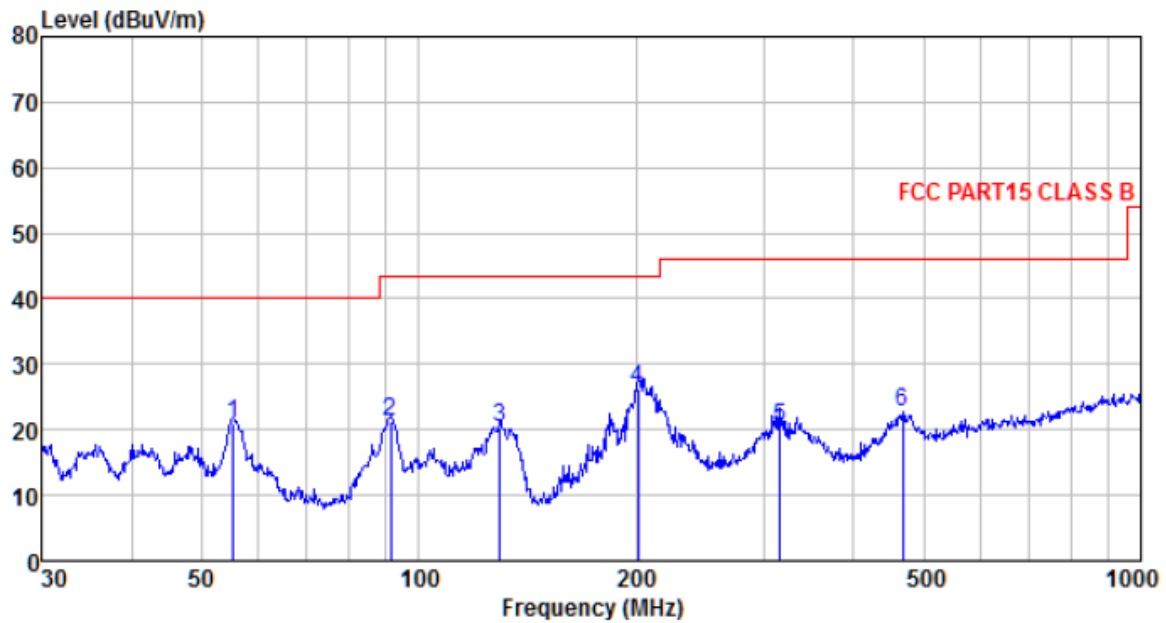

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark
55.221	44.48	11.78	0.82	36.26	20.82	40.00	-19.18	QP
91.495	45.83	10.90	1.12	36.65	21.20	43.50	-22.30	QP
129.468	47.62	8.20	1.43	36.95	20.30	43.50	-23.20	QP
201.393	51.35	10.44	1.85	37.33	26.31	43.50	-17.19	QP
316.589	41.49	13.93	2.45	37.44	20.43	46.00	-25.57	QP
467.235	40.31	16.69	3.17	37.51	22.66	46.00	-23.34	QP


Vertical:

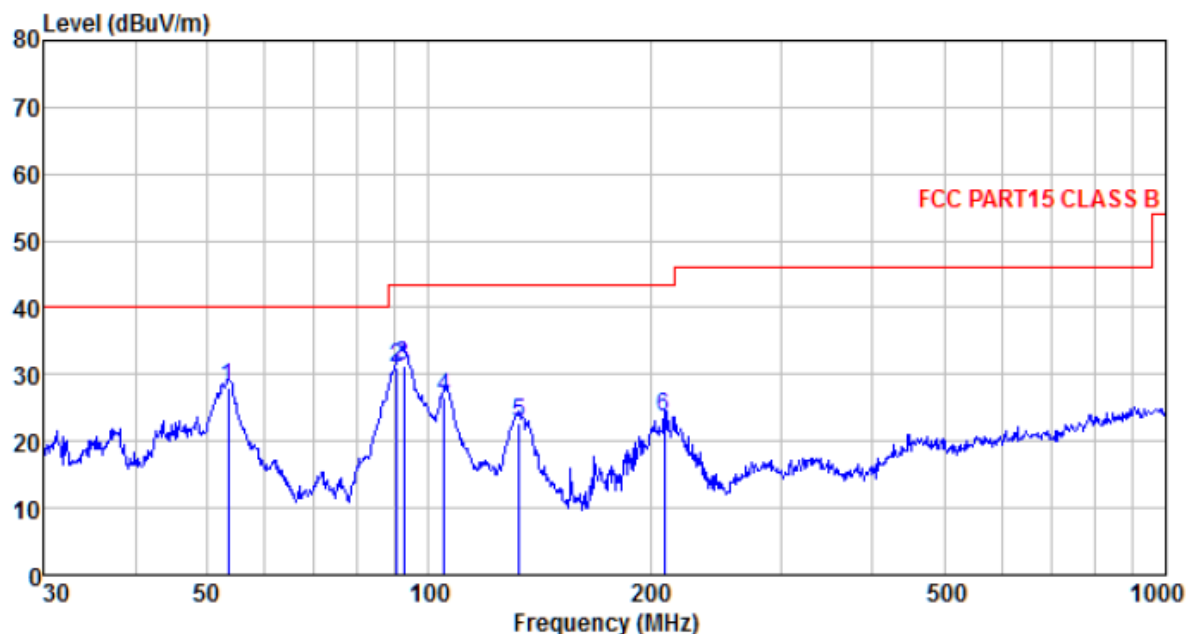

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark
53.505	51.61	11.93	0.80	36.23	28.11	40.00	-11.89	QP
90.537	55.63	10.77	1.11	36.64	30.87	43.50	-12.63	QP
92.462	55.92	11.04	1.13	36.66	31.43	43.50	-12.07	QP
104.903	50.39	11.62	1.23	36.76	26.48	43.50	-17.02	QP
132.685	50.16	7.96	1.45	36.97	22.60	43.50	-20.90	QP
208.580	48.45	10.73	1.89	37.34	23.73	43.50	-19.77	QP


Model number: 81813

Horizontal:

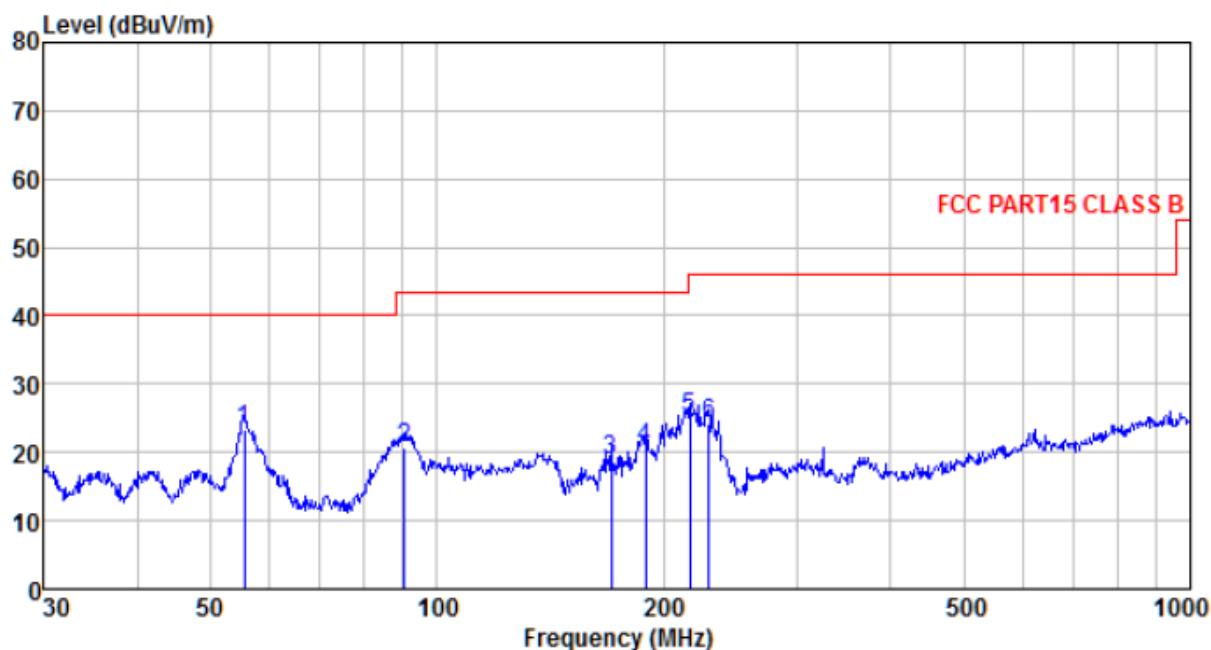

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark
55.415	47.11	11.75	0.82	36.26	23.42	40.00	-16.58	QP
90.537	45.55	10.77	1.11	36.64	20.79	43.50	-22.71	QP
170.195	46.01	8.50	1.69	37.19	19.01	43.50	-24.49	QP
189.074	46.34	9.82	1.78	37.28	20.66	43.50	-22.84	QP
216.783	49.60	11.02	1.94	37.35	25.21	46.00	-20.79	QP
229.293	48.04	11.49	2.01	37.36	24.18	46.00	-21.82	QP

Vertical:

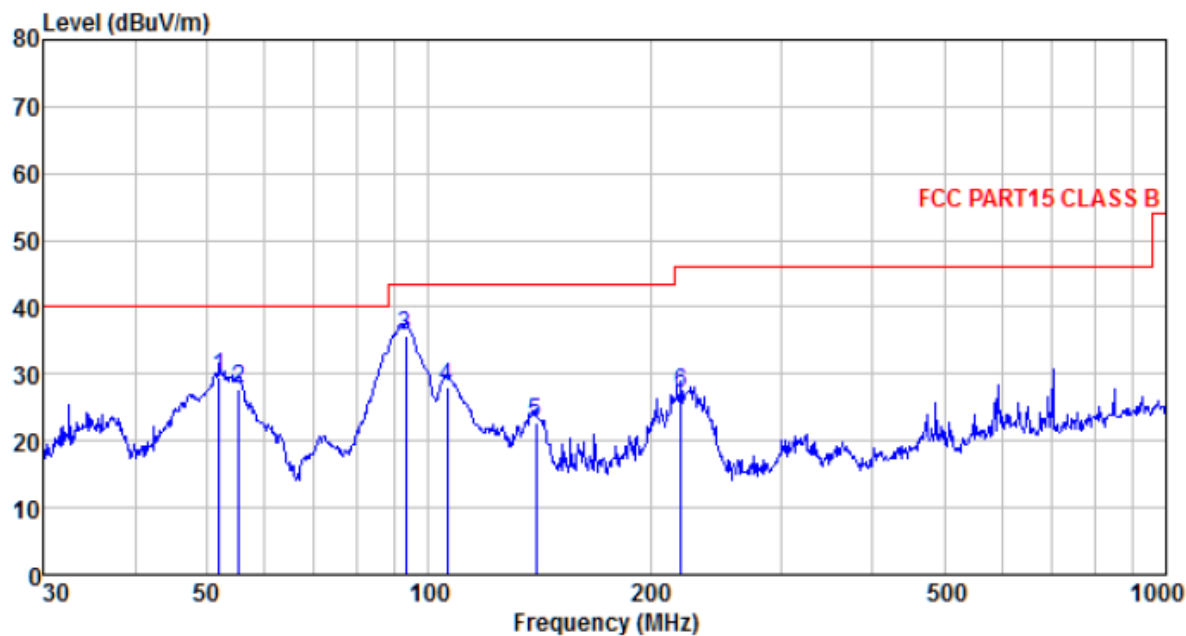

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamplifier factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark
52.025	52.96	12.07	0.79	36.21	29.61	40.00	-10.39	QP
55.221	51.29	11.78	0.82	36.26	27.63	40.00	-12.37	QP
93.113	60.08	11.18	1.14	36.66	35.74	43.50	-7.76	QP
106.013	52.06	11.52	1.25	36.77	28.06	43.50	-15.44	QP
139.851	50.73	7.45	1.50	37.02	22.66	43.50	-20.84	QP
219.845	51.28	11.13	1.96	37.35	27.02	46.00	-18.98	QP

■ Above 1GHz

Model number: 81809

Test channel:	Lowest channel
---------------	----------------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4810.00	50.83	31.17	8.60	37.66	52.94	74.00	-21.06	Vertical
7215.00	39.80	36.09	11.66	35.69	51.86	74.00	-22.14	Vertical
9620.00	31.52	37.84	14.14	34.91	48.59	74.00	-25.41	Vertical
12025.00	27.71	38.61	15.03	36.13	45.22	74.00	-28.78	Vertical
4810.00	49.88	31.17	8.60	37.66	51.99	74.00	-22.01	Horizontal
7215.00	42.09	36.09	11.66	35.69	54.15	74.00	-19.85	Horizontal
9620.00	28.66	37.84	14.14	34.91	45.73	74.00	-28.27	Horizontal
12025.00	27.93	38.61	15.03	36.13	45.44	74.00	-28.56	Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4810.00	44.97	31.17	8.60	37.66	47.08	54.00	-6.92	Vertical
7215.00	30.95	36.09	11.66	35.69	43.01	54.00	-10.99	Vertical
9620.00	20.62	37.84	14.14	34.91	37.69	54.00	-16.31	Vertical
12025.00	17.93	38.61	15.03	36.13	35.44	54.00	-18.56	Vertical
4810.00	43.97	31.17	8.60	37.66	46.08	54.00	-7.92	Horizontal
7215.00	31.84	36.09	11.66	35.69	43.90	54.00	-10.10	Horizontal
9620.00	18.82	37.84	14.14	34.91	35.89	54.00	-18.11	Horizontal
12025.00	18.14	38.61	15.03	36.13	35.65	54.00	-18.35	Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. “*”, means this data is the too weak instrument of signal is unable to test.

Test channel:	Middle channel
---------------	----------------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4890.00	50.38	31.26	8.66	37.68	52.62	74.00	-21.38	Vertical
7335.00	40.66	36.32	11.72	35.64	53.06	74.00	-20.94	Vertical
9780.00	29.88	38.01	14.25	34.98	47.16	74.00	-26.84	Vertical
12225.00	26.19	38.64	15.14	36.26	43.71	74.00	-30.29	Vertical
4890.00	49.08	31.26	8.66	37.68	51.32	74.00	-22.68	Horizontal
7335.00	39.99	36.32	11.72	35.64	52.39	74.00	-21.61	Horizontal
9780.00	28.99	38.01	14.25	34.98	46.27	74.00	-27.73	Horizontal
12225.00	27.61	38.64	15.14	36.26	45.13	74.00	-28.87	Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4890.00	42.86	31.26	8.66	37.68	45.10	54.00	-8.90	Vertical
7335.00	32.95	36.32	11.72	35.64	45.35	54.00	-8.65	Vertical
9780.00	22.89	38.01	14.25	34.98	40.17	54.00	-13.83	Vertical
12225.00	15.99	38.64	15.14	36.26	33.51	54.00	-20.49	Vertical
4890.00	40.20	31.26	8.66	37.68	42.44	54.00	-11.56	Horizontal
7335.00	22.79	36.32	11.72	35.64	35.19	54.00	-18.81	Horizontal
9780.00	21.80	38.01	14.25	34.98	39.08	54.00	-14.92	Horizontal
12225.00	18.02	38.64	15.14	36.26	35.54	54.00	-18.46	Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. “*”, means this data is the too weak instrument of signal is unable to test.

Test channel:	Highest channel
---------------	-----------------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4960.00	50.68	31.36	8.73	37.69	53.08	74.00	-20.92	Vertical
7440.00	39.97	36.59	11.79	35.58	52.77	74.00	-21.23	Vertical
9920.00	29.41	38.22	14.38	35.07	46.94	74.00	-27.06	Vertical
12400.00	27.02	38.68	15.27	36.43	44.54	74.00	-29.46	Vertical
4960.00	48.98	31.36	8.73	37.69	51.38	74.00	-22.62	Horizontal
7440.00	39.74	36.59	11.79	35.58	52.54	74.00	-21.46	Horizontal
9920.00	29.03	38.22	14.38	35.07	46.56	74.00	-27.44	Horizontal
12400.00	28.34	38.68	15.27	36.43	45.86	74.00	-28.14	Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4960.00	42.86	31.36	8.73	37.69	45.26	54.00	-8.74	Vertical
7440.00	31.91	36.59	11.79	35.58	44.71	54.00	-9.29	Vertical
9920.00	20.94	38.22	14.38	35.07	38.47	54.00	-15.53	Vertical
12400.00	17.29	38.68	15.27	36.43	34.81	54.00	-19.19	Vertical
4960.00	40.59	31.36	8.73	37.69	42.99	54.00	-11.01	Horizontal
7440.00	32.10	36.59	11.79	35.58	44.90	54.00	-9.10	Horizontal
9920.00	20.72	38.22	14.38	35.07	38.25	54.00	-15.75	Horizontal
12400.00	18.68	38.68	15.27	36.43	36.20	54.00	-17.80	Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. “*”, means this data is the too weak instrument of signal is unable to test.

Model number: 81813

Test channel:	Lowest channel
---------------	----------------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4810.00	50.49	31.17	8.60	37.66	52.60	74.00	-21.40	Vertical
7215.00	39.46	36.09	11.66	35.69	51.52	74.00	-22.48	Vertical
9620.00	31.00	37.84	14.14	34.91	48.07	74.00	-25.93	Vertical
12025.00	27.50	38.61	15.03	36.13	45.01	74.00	-28.99	Vertical
4810.00	49.54	31.17	8.60	37.66	51.65	74.00	-22.35	Horizontal
7215.00	41.97	36.09	11.66	35.69	54.03	74.00	-19.97	Horizontal
9620.00	28.35	37.84	14.14	34.91	45.42	74.00	-28.58	Horizontal
12025.00	27.71	38.61	15.03	36.13	45.22	74.00	-28.78	Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4810.00	44.64	31.17	8.60	37.66	46.75	54.00	-7.25	Vertical
7215.00	30.72	36.09	11.66	35.69	42.78	54.00	-11.22	Vertical
9620.00	20.35	37.84	14.14	34.91	37.42	54.00	-16.58	Vertical
12025.00	17.70	38.61	15.03	36.13	35.21	54.00	-18.79	Vertical
4810.00	43.75	31.17	8.60	37.66	45.86	54.00	-8.14	Horizontal
7215.00	31.56	36.09	11.66	35.69	43.62	54.00	-10.38	Horizontal
9620.00	18.55	37.84	14.14	34.91	35.62	54.00	-18.38	Horizontal
12025.00	17.92	38.61	15.03	36.13	35.43	54.00	-18.57	Horizontal

Remark:

4. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
5. The emission levels of other frequencies are very lower than the limit and not show in test report.
6. “*”, means this data is the too weak instrument of signal is unable to test.

Test channel:	Middle channel
---------------	----------------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4890.00	50.21	31.26	8.66	37.68	52.45	74.00	-21.55	Vertical
7335.00	40.50	36.32	11.72	35.64	52.90	74.00	-21.10	Vertical
9780.00	29.64	38.01	14.25	34.98	46.92	74.00	-27.08	Vertical
12225.00	26.09	38.64	15.14	36.26	43.61	74.00	-30.39	Vertical
4890.00	48.92	31.26	8.66	37.68	51.16	74.00	-22.84	Horizontal
7335.00	39.93	36.32	11.72	35.64	52.33	74.00	-21.67	Horizontal
9780.00	28.84	38.01	14.25	34.98	46.12	74.00	-27.88	Horizontal
12225.00	27.50	38.64	15.14	36.26	45.02	74.00	-28.98	Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4890.00	42.61	31.26	8.66	37.68	44.85	54.00	-9.15	Vertical
7335.00	32.77	36.32	11.72	35.64	45.17	54.00	-8.83	Vertical
9780.00	22.69	38.01	14.25	34.98	39.97	54.00	-14.03	Vertical
12225.00	15.81	38.64	15.14	36.26	33.33	54.00	-20.67	Vertical
4890.00	40.03	31.26	8.66	37.68	42.27	54.00	-11.73	Horizontal
7335.00	22.57	36.32	11.72	35.64	34.97	54.00	-19.03	Horizontal
9780.00	21.60	38.01	14.25	34.98	38.88	54.00	-15.12	Horizontal
12225.00	17.85	38.64	15.14	36.26	35.37	54.00	-18.63	Horizontal

Remark:

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
- The emission levels of other frequencies are very lower than the limit and not show in test report.
- “*”, means this data is the too weak instrument of signal is unable to test.

Test channel:	Highest channel
---------------	-----------------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4960.00	50.53	31.36	8.73	37.69	52.93	74.00	-21.07	Vertical
7440.00	39.83	36.59	11.79	35.58	52.63	74.00	-21.37	Vertical
9920.00	29.20	38.22	14.38	35.07	46.73	74.00	-27.27	Vertical
12400.00	26.93	38.68	15.27	36.43	44.45	74.00	-29.55	Vertical
4960.00	48.84	31.36	8.73	37.69	51.24	74.00	-22.76	Horizontal
7440.00	39.69	36.59	11.79	35.58	52.49	74.00	-21.51	Horizontal
9920.00	28.91	38.22	14.38	35.07	46.44	74.00	-27.56	Horizontal
12400.00	28.25	38.68	15.27	36.43	45.77	74.00	-28.23	Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4960.00	42.63	31.36	8.73	37.69	45.03	54.00	-8.97	Vertical
7440.00	31.74	36.59	11.79	35.58	44.54	54.00	-9.46	Vertical
9920.00	20.74	38.22	14.38	35.07	38.27	54.00	-15.73	Vertical
12400.00	17.12	38.68	15.27	36.43	34.64	54.00	-19.36	Vertical
4960.00	40.43	31.36	8.73	37.69	42.83	54.00	-11.17	Horizontal
7440.00	31.90	36.59	11.79	35.58	44.70	54.00	-9.30	Horizontal
9920.00	20.53	38.22	14.38	35.07	38.06	54.00	-15.94	Horizontal
12400.00	18.52	38.68	15.27	36.43	36.04	54.00	-17.96	Horizontal


Remark:

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
- The emission levels of other frequencies are very lower than the limit and not show in test report.
- “*”, means this data is the too weak instrument of signal is unable to test.

8 Test Setup Photo

Model number: 81809

Radiated Emission

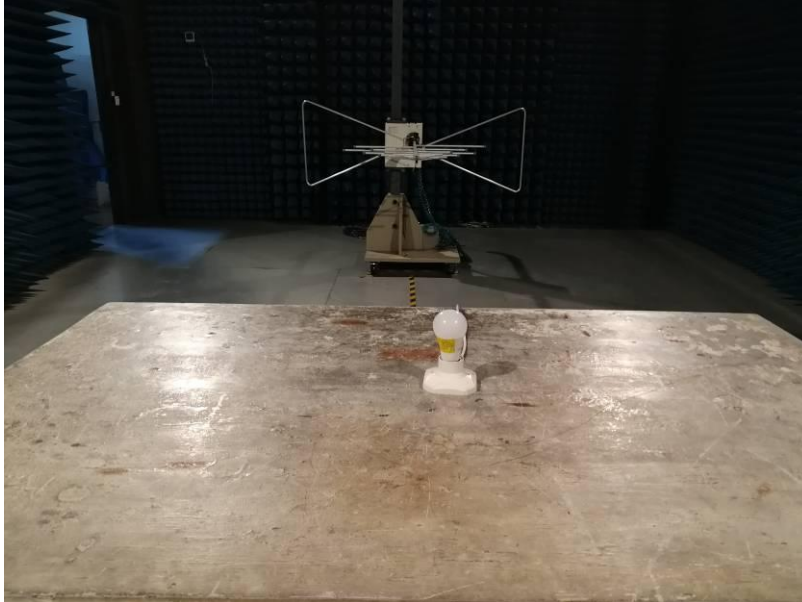

Conducted Emission



Model number: 81813
Radiated Emission



Conducted Emission



9 EUT Constructional Details




Model number: 81809















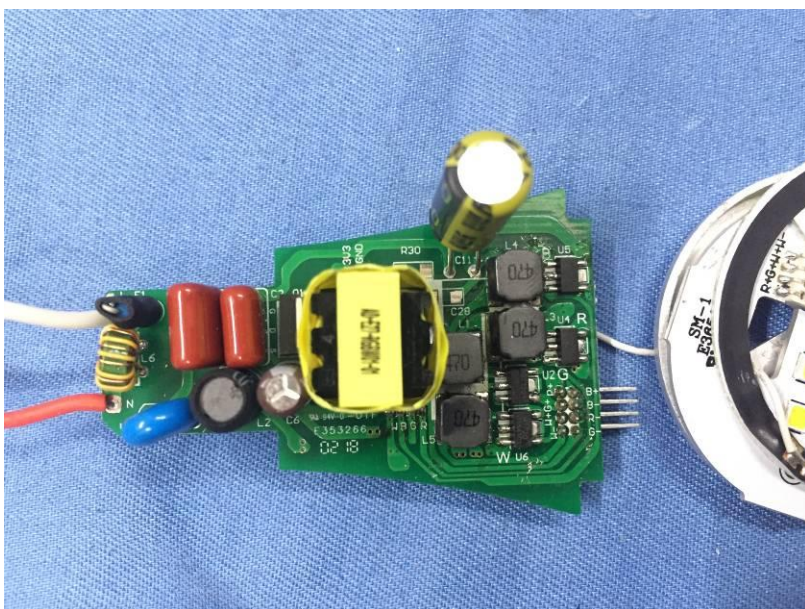

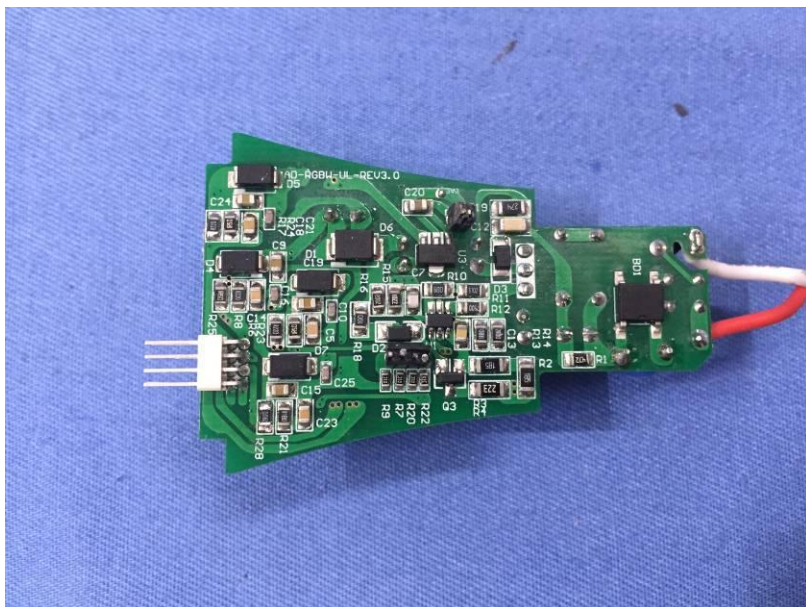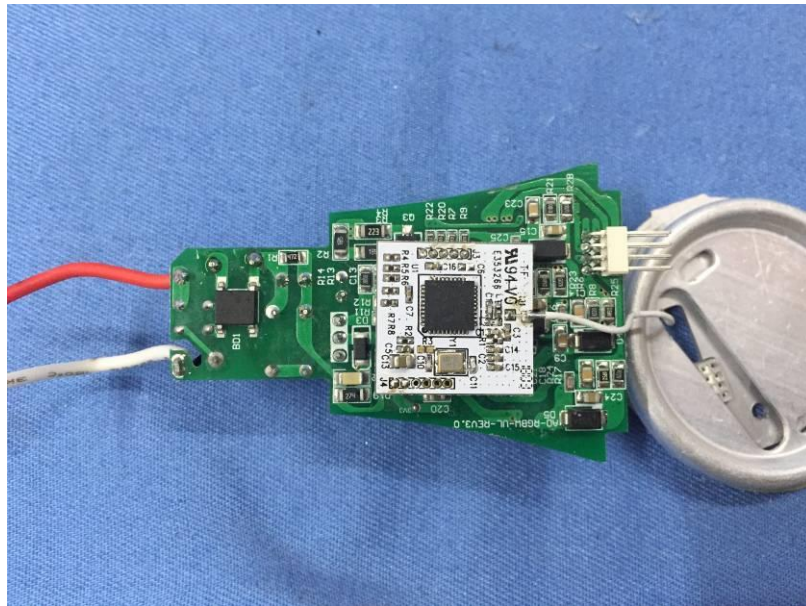

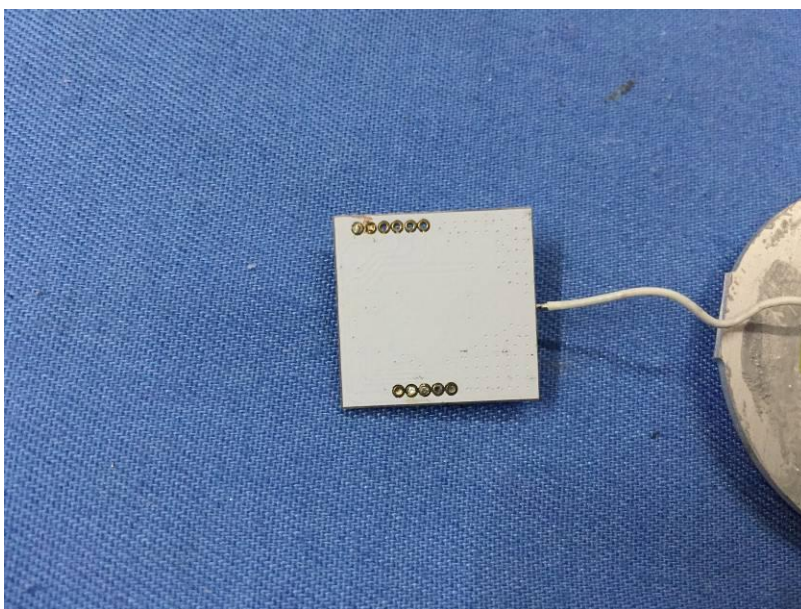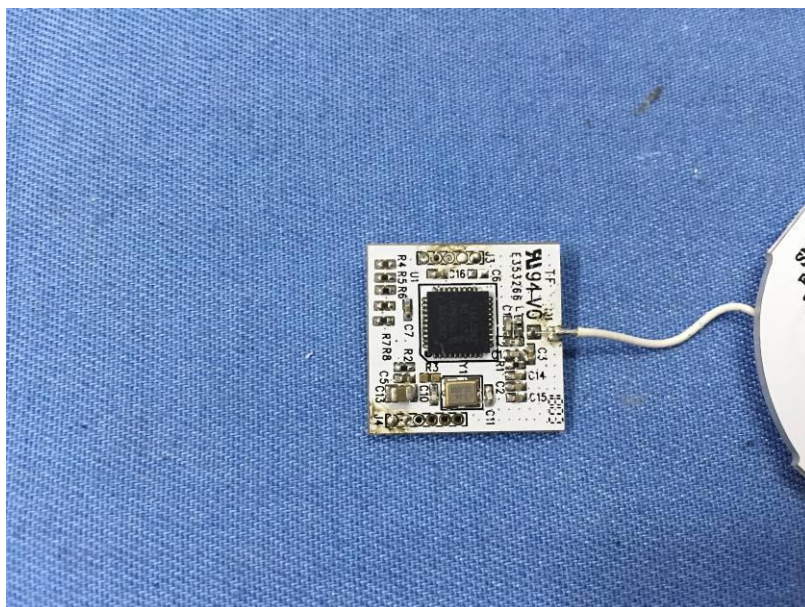

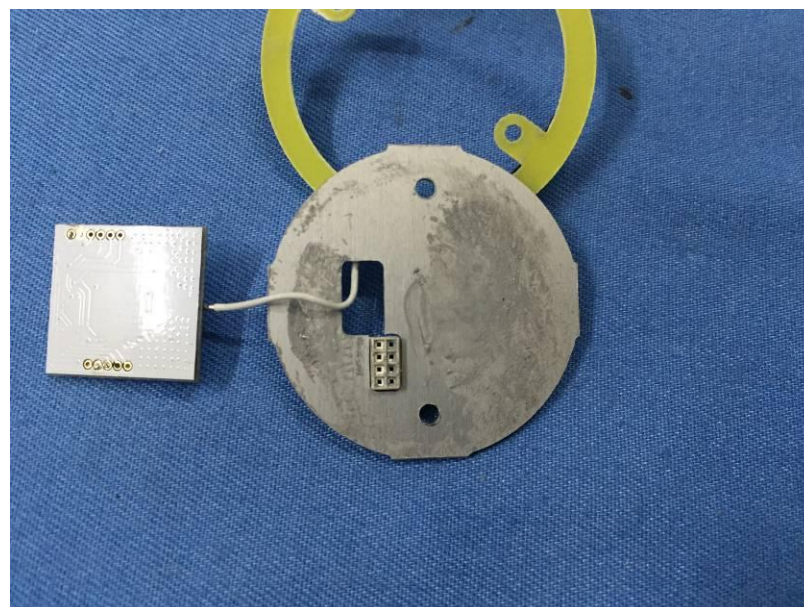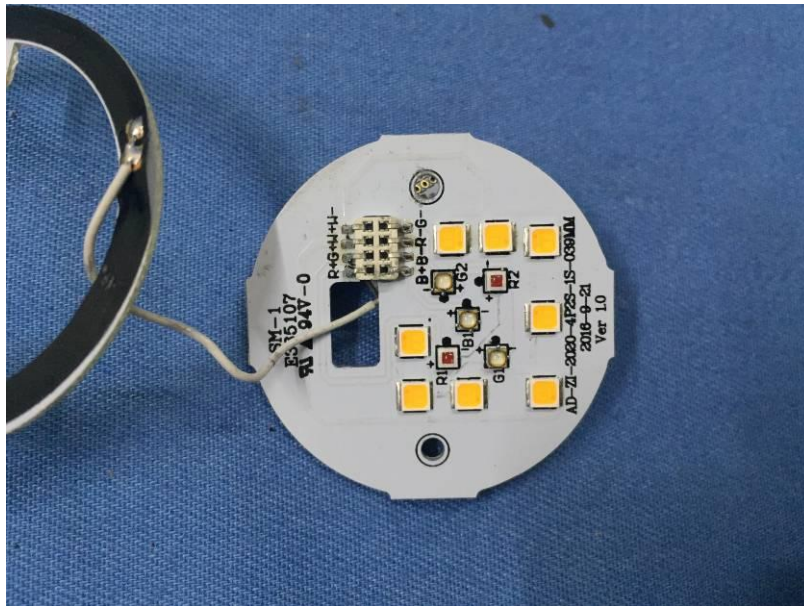







Model number: 81813








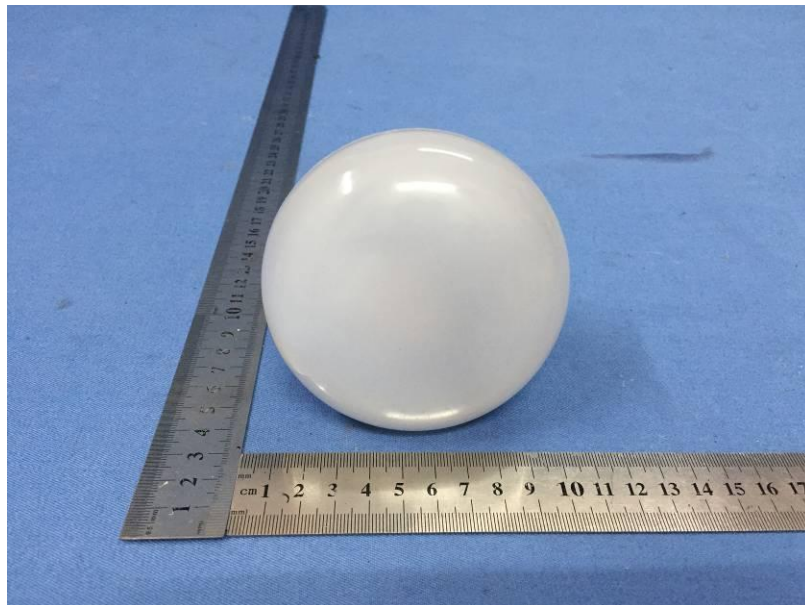

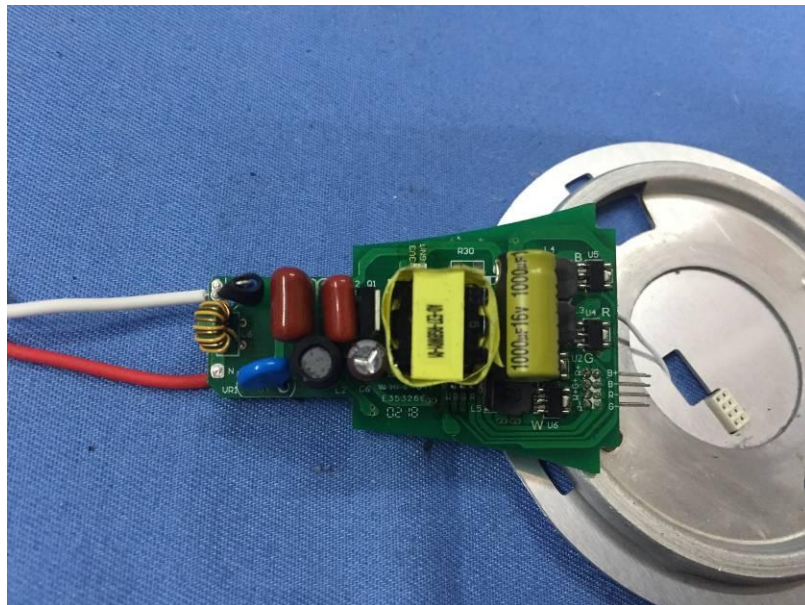


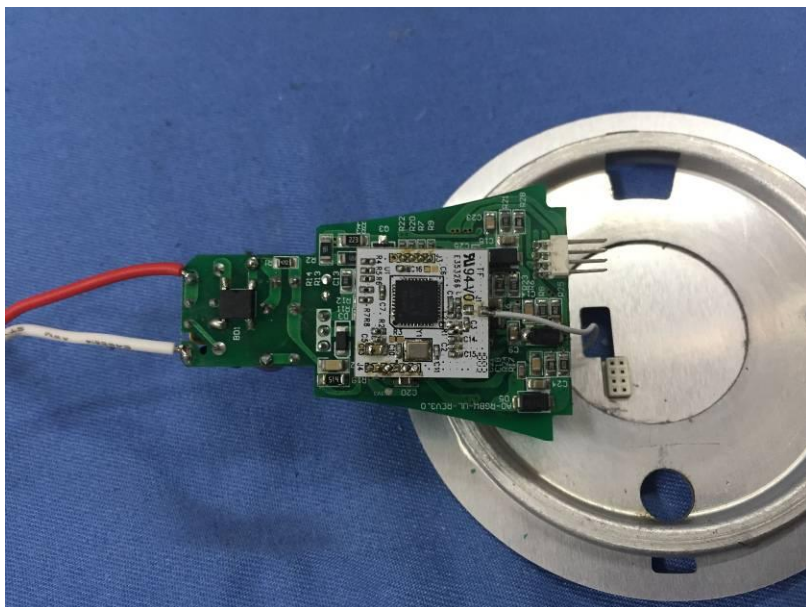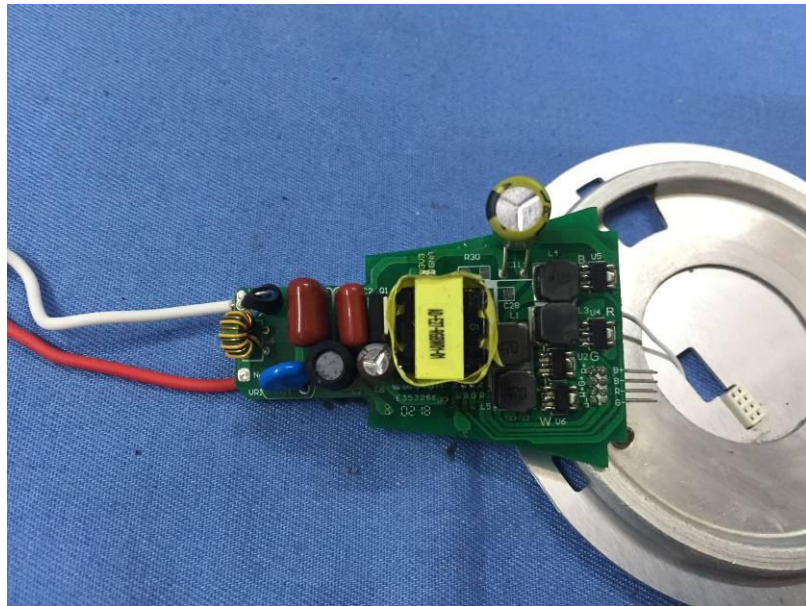

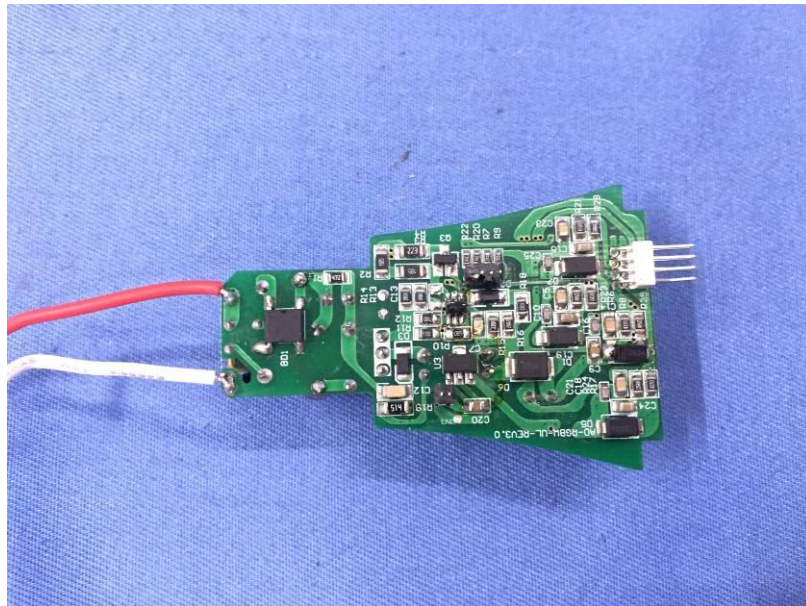

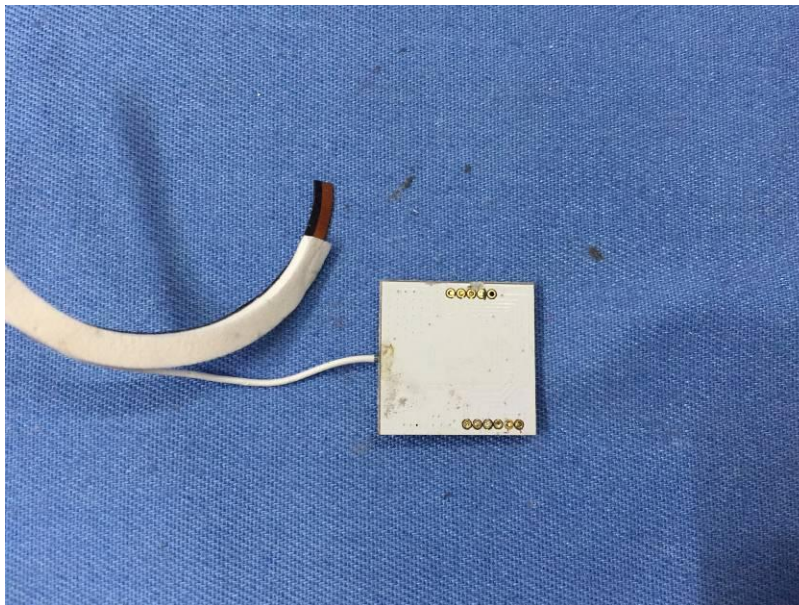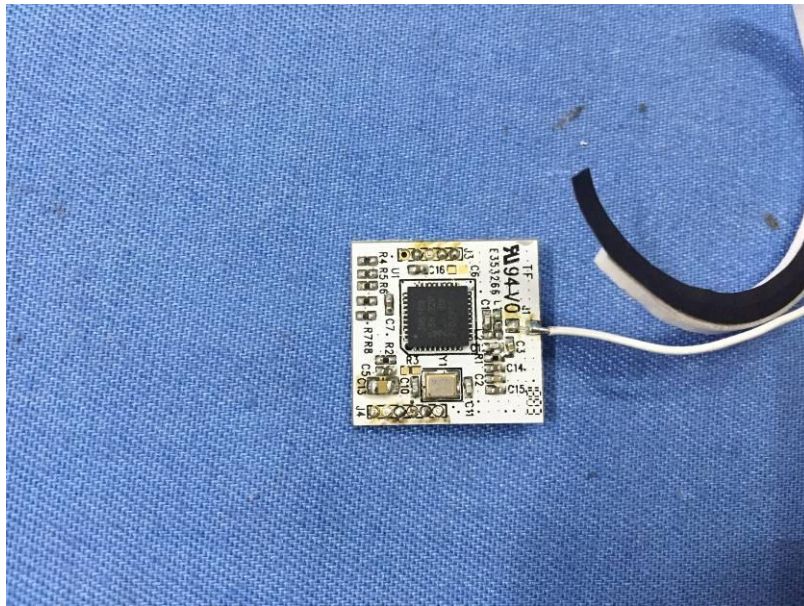



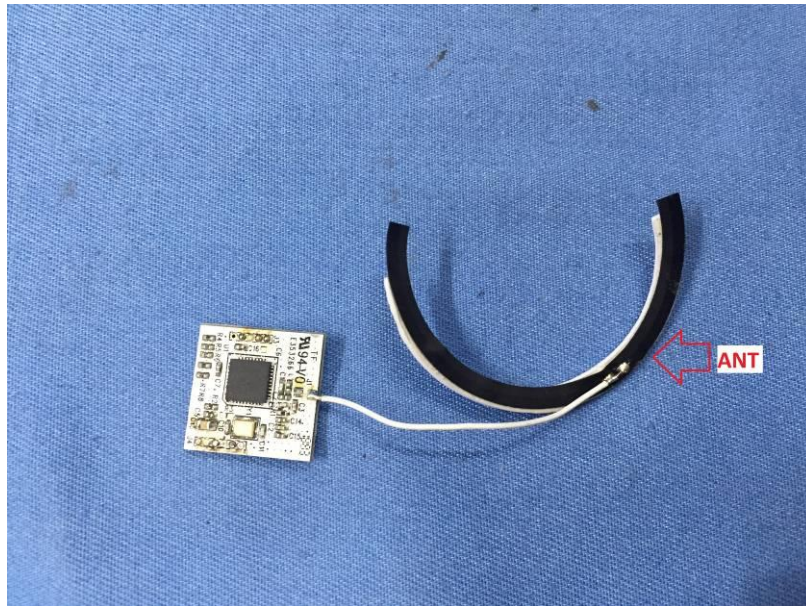

-----End-----