

# **RADIO TEST REPORT**

**Product** : Security Camera  
**Model Name** : VMC3082  
**Series Model** : VMC3080, VMC2080, VMC2082  
**FCC ID** : 2APLE18300436  
**Test Regulation** : FCC 47 CFR Part 15 Subpart C (Section 15.247)

**Received Date** : 2025/3/3

**Test Date** : 2025/3/3 ~ 2025/3/19

**Issued Date** : 2025/6/24

**Applicant** : Arlo Technologies Inc  
5770 Fleet St, Suite 200, Carlsbad, CA 92008 USA

**Issued By** : Underwriters Laboratories Taiwan Co., Ltd.  
Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd.,  
Zhudong Township, Hsinchu County, Taiwan



The results reported herein have been performed in accordance with the laboratory's terms of accreditation. This report shall not be reproduced except in full without the written approval of the Laboratory. The results in this report are responsible of the test sample(s) provided by the client only and are not to be used to indicate applicability to other similar products.

## **Underwriters Laboratories Taiwan Co., Ltd.**

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

## **REVISION HISTORY**

## Original Test Report No.: 4791688546-US-R0-V0

Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Building A, B and E, No. 372-7, Sec. 4  
Telephone :±886-2-7737-3000

Telephone :+886-2-7737-3000  
Facsimile (FAX) :+886-3-583-7948

## Table of Contents

<b>1. Attestation of Test Results .....</b>	<b>4</b>
<b>2. Summary of Test Results .....</b>	<b>5</b>
<b>3. Test Methodology and Reference Procedures.....</b>	<b>6</b>
<b>4. Facilities and Accreditation .....</b>	<b>6</b>
<b>5. Measurement Uncertainty .....</b>	<b>7</b>
<b>6. Equipment under Test.....</b>	<b>8</b>
6.1. Description of EUT .....	8
6.2. Channel List .....	10
6.3. Test Condition.....	11
6.4. Description of Available Antennas .....	12
6.5. Test Mode Applicability and Tested Channel Detail.....	13
6.6. Duty cycle .....	15
<b>7. Test Equipment .....</b>	<b>16</b>
<b>8. Description of Test Setup .....</b>	<b>18</b>
<b>9. Test Results .....</b>	<b>20</b>
9.1. 6dB Bandwidth .....	20
9.2. Conducted Output Power.....	24
9.3. Power Spectral Density.....	26
9.4. Conducted Out of Band Emission.....	30
9.5. Radiated Spurious Emission .....	41
9.6. AC Power Line Conducted Emission .....	65

**Underwriters Laboratories Taiwan Co., Ltd.**

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX ) :+886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

## 1. Attestation of Test Results

**APPLICANT:** Arlo Technologies Inc  
5770 Fleet St, Suite 200, Carlsbad, CA 92008 USA

**MANUFACTURER:** Arlo Technologies Inc  
5770 Fleet St, Suite 200, Carlsbad, CA 92008 USA

**EUT DESCRIPTION:** Security Camera

**BRAND:** Arlo

**MODEL:** VMC3082

**SERIES MODEL:** VMC3080, VMC2080, VMC2082

**SAMPLE STAGE:** Engineering Verification Test Sample

**DATE of TESTED:** 2025/3/3 ~ 2025/3/19

APPLICABLE STANDARDS	
STANDARD	Test Results
FCC 47 CFR PART 15 Subpart C (Section 15.247)	PASS

Underwriters Laboratories Taiwan Co., Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by Underwriters Laboratories Taiwan Co., Ltd. based on interpretations and/or observations of test results. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

**Note:** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by Underwriters Laboratories Taiwan Co., Ltd. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by Underwriters Laboratories Taiwan Co., Ltd. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Prepared By:



Sally Lu  
Project Handler

Date : 2025/6/24

Approved and Authorized By:



Eric Lee  
Senior Laboratory Engineer

Date : 2025/6/24

**Underwriters Laboratories Taiwan Co., Ltd.**

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone : +886-2-7737-3000

Facsimile (FAX) : +886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

## 2. Summary of Test Results

Summary of Test Results		
FCC Clause	Test Items	Result
15.247(a)(2)	6dB Bandwidth	PASS
15.247(b)	Conducted Output Power	PASS
15.247(e)	Power Spectral Density	PASS
15.247(d)	Antenna Port Emission	PASS
15.205 / 15.209 / 15.247(d)	Radiated Emissions and Band Edge Measurement	PASS
15.207	AC Power Conducted Emission	PASS
15.203	Antenna Requirement	PASS

### Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

### 3. Test Methodology and Reference Procedures

The tests documented in this report were performed in accordance with 47 CFR FCC Part 2, KDB558074 D01 Meas Guidance v05r02, KDB414788 D01 Radiated Test Site v01r01, ANSI C63.10-2013.

### 4. Facilities and Accreditation

<b>Test Location</b>	Underwriters Laboratories Taiwan Co., Ltd.
<b>Address</b>	Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan
<b>Accreditation Certificate</b>	Underwriters Laboratories Taiwan Co., Ltd. is accredited by TAF, Laboratory Code 3398.

#### **Underwriters Laboratories Taiwan Co., Ltd.**

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

## 5. Measurement Uncertainty

For statement of conformity, Simple acceptance (Section 3.1.4 of IEC Guide 115) was applied as decision rule for measurement in this test report.

The following uncertainties have been calculated to provide a confidence level of 95 % using a coverage factor  $k=2$ .

Determining compliance based on the results of the compliance measurement, not considering measurement instrumentation uncertainty.

Measurement	Frequency	Uncertainty
Conducted disturbance at mains terminals ports	150kHz ~ 30MHz	3.1 dB
RF Conducted	9 kHz - 40GHz	2.3 dB
Radiated disturbance below 30MHz	9 kHz - 30 MHz	3.2 dB
Radiated disturbance below 1 GHz	30MHz ~ 1GHz	6.1 dB
Radiated disturbance above 1 GHz	1GHz ~ 40GHz	5.1 dB

### Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

## 6. Equipment under Test

### 6.1. Description of EUT

<b>Product</b>	Security Camera
<b>Brand Name</b>	Arlo
<b>Model Name</b>	VMC3082
<b>Series Model</b>	VMC3080, VMC2080, VMC2082
<b>Normal Voltage</b>	5Vdc/6.6Vdc from Host 3.69Vdc from Battery

<b>Operating Frequency</b>	2412MHz ~ 2462MHz
<b>Modulation</b>	CCK, DQPSK, DBPSK for DSSS
	64QAM, 16QAM, QPSK, BPSK for OFDM
<b>Transfer Rate</b>	802.11b: up to 11 Mbps
	802.11g: up to 54 Mbps
	802.11n: up to MCS7
<b>Maximum Output Power</b>	2412MHz ~ 2462MHz: 28.19 dBm
<b>Sample ID</b>	Conducted Test:8190594
	Radiated Test:8190594

### Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

Note:

1. The models difference table as below:

Model	Video resolution (2K/FHD)	MECH (Enclosure)	Battery Type
VMC3080	2K 2560 x 1440 video resolution	Regular housing	1 cell battery (A-19)
VMC2080	FHD 1920 x 1080 video resolution	Regular housing	1 cell battery (A-19)
VMC3082	2K 2560 x 1440 video resolution	Large housing	4 cell battery (A-18)
VMC2082	FHD 1920 x 1080 video resolution	Large housing	4 cell battery (A-18)

All models are electrically identical (Include: circuitry, components, layout, antenna type and gain).

2. EUT provides a complete 1Tx port and 1Rx port. Please refer to the following working transmission conditions:

Modulation Mode	Tx Function	Rx Function
802.11b	1Tx	1Rx
802.11g	1Tx	1Rx
802.11n (HT20)	1Tx	1Rx

For NCC: \*The modulation and bandwidth are similar for 802.11n mode, for 20MHz, bandwidth system, therefore investigated one worst case to representative mode in test report.

3. The EUT contains following accessory devices:

Product	Brand	Model	Description
USB Cable	Nienyi	310-50024-01	[CBL,USB,CHAGING,TYPE A-C,M/M,1M,WHT,ROBIN,NIY].
Wall Mount	Arlo	Arlo	-

4. The EUT contains a non-removable, rechargeable battery.

Brand	Model	Description
Fuji	A-19	Lithium-ion Battery Pack 3.69Vdc, 4650mAh, 17.1585Wh
Fuji	A-18	Lithium-ion Battery Pack 3.69Vdc, 18.6Ah, 68.634Wh

5. The above EUT information is declared by manufacturer and for more detailed features description, please refer the manufacturer's or user's manual, the laboratory shall not be held responsible.

### Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

## 6.2. Channel List

11 channels are provided for WLAN 20MHz bandwidth system:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437	-	-

### **Underwriters Laboratories Taiwan Co., Ltd.**

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

### 6.3. Test Condition

Test Item	Test Site No.	Environmental	Input Power	Test Date	Tested by
Antenna Port Conducted Measurement	SR4	21~23°C/ 57~63% RH	5Vdc	2025/03/13~ 2025/03/18	WaterNil Guan
Radiated Spurious Emission	966-2	22~26°C/ 62~68% RH	5Vdc	2025/03/03~ 2025/03/19	WaterNil Guan
AC power Line Conducted Emission	SR1	22°C/ 53% RH	120Vac/ 60Hz	2025/03/19	WaterNil Guan

### Sample Calculation:

#### Antenna Port Conducted Measurement:

- Where relevant, the follow sample calculation is provided:  

$$\text{Result Value (dBm)} = \text{Reading Value (dBm)} + \text{Attenuator Factor (dB)} + \text{Cable Loss (dB)}.$$

Example: Result Value (10dBm) = Reading Value (-2dBm) + Attenuator Factor (10dB) + Cable Loss(2dB).

\*Test plot only shown the “Result Value”.

#### Radiated Spurious Emission:

- Where relevant, the follow sample calculation is provided:  

$$\text{Result Value (dBuV/m)} = \text{Reading Value (dBuV)} + \text{Correction Factor (dB/m)}.$$

$$\text{Correction Factor (dB/m)} = \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} - \text{Preamp Factor (dB)}.$$

Example: Result Value (34.5dBuV/m) = Reading Value (40.1dBuV) + Antenna Factor (18.7dB/m) + Cable Loss (4.2dB) - Preamp Factor (28.5dB).

#### AC power Line Conducted Emission:

- Where relevant, the follow sample calculation is provided:  

$$\text{Result Value (dBuV)} = \text{Reading Value (dBuV)} + \text{Correction Factor (dB)}.$$

$$\text{Correction Factor (dB)} = \text{Insertion loss(dB)} + \text{Cable loss(dB)}.$$

Example: Result Value (53.7dBuV) = Reading Value (35.1dBuV) + Insertion loss(18.1dB) + Cable loss(0.5dB).

### Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

#### 6.4. Description of Available Antennas

Ant. No.	Transmitter Circuit	Frequency Range	Brand Name	Model Name	Maximum Gain (dBi)	Ant. Type	Connector Type
1	Chain0	2400 ~ 2500 MHz 5150 ~ 5250 MHz 5250 ~ 5350 MHz 5470 ~ 5720 MHz 5745 ~ 5825 MHz	Arlo	2APLE18300436	2.78 3.08 3.08 3.47 3.33	PIFA	i-pex(MHF)

Note: The above antenna information was provided from customer and for more detailed features description, please refer the manufacturer's specification or user's manual, the laboratory shall not be held responsible.

#### Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

## 6.5. Test Mode Applicability and Tested Channel Detail

Test Item	Mode	Modulation Technology	Available Channel	Test Channel	Data Rate
Radiated Bandedge	802.11b	DSSS	1 to 11	1,6,10,11	1 Mbps
	802.11g	OFDM	1 to 11	1,6,11	6 Mbps
	802.11n (HT20)	OFDM	1 to 11	1,6,11	MCS0
Radiated Emissions (Above 1GHz)	802.11b	DSSS	1 to 11	1,6,10,11	1 Mbps
	802.11g	OFDM	1 to 11	1,6,11	6 Mbps
Radiated Emissions (Below 1GHz)	802.11b	DSSS	1 to 11	6	1 Mbps
AC Power Line Conducted Emission	802.11g	OFDM	1 to 11	6	6 Mbps
Antenna Port Conducted Measurement	802.11b	DSSS	1 to 11	1,6,10,11	1 Mbps
	802.11g	OFDM	1 to 11	1,6,11	6 Mbps
	802.11n (HT20)	OFDM	1 to 11	1,6,11	MCS0

\*Note: For Antenna Port Conducted Measurement item, Inner channels only test Power and Conducted Out of Band Emission.

- The fundamental of the EUT was investigated in three orthogonal axes X-Y/Y-Z/X-Z, it was determined that X-Y plane was worst-case. Therefore, all final radiated testing was performed with the EUT in X-Y plane.
- The EUT is power by rechargeable battery. After pre-scan battery capacity at 0%, 50% and 100%, the worst case was found in the 100%. Therefore only the test data of the 100% of battery capacity was recorded in this report.
- The EUT has 2 types of Battery: 3.69Vdc (A-18) for VMC3082/VMC2082 and 3.69Vdc (A-19) for VMC3080/VMC2080. Above types were pre-tested, the worst case was found in the 3.69Vdc (A-18) for VMC3082. The final test using this worst condition.
- For Tx mode, the EUT can operation in stand-alone 3.69Vdc from battery and 5Vdc from host Laptop(Brand: DELL, Model: Latitude E5470). Above types were pre-tested, the worst case was found in the 5Vdc from host Laptop(Brand: DELL, Model: Latitude E5470). The final test using this worst condition.
- The radiated spurious emission test was performed in all test modes. The worst case was 802.11b and 802.11g, and therefore, only the worst case data is shown in this report to represent all test modes.
- In the transmit mode, 802.11g channel 6 has the highest RF output power. Therefore, the AC conduction were performed using this worst-case mode.
- In the transmit mode, 802.11b channel 6 has the worst case of Tx spurious emission (above 1GHz). Therefore, all final tests for the spurious emission (below 1GHz) were performed using this worst-case mode.
- For Antenna Port Conducted Measurement, this item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.

### Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

- For below 30MHz testing, investigation was done on three antenna orientations (parallel, perpendicular, and ground-parallel), parallel and perpendicular are the worst orientations, therefore testing was performed on these two orientations only.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Simultaneously transmission condition:

Condition	Technology	
1	BT LE	WLAN (2.4GHz)

Note: The emission of the simultaneous operation has been evaluated and no non-compliance was found.

#### **Underwriters Laboratories Taiwan Co., Ltd.**

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan


Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

## 6.6. Duty cycle

Mode	On Time (ms)	On+Off Time (ms)	Duty Cycle	Duty Factor (dB)	VBW Set (above 1GHz)
802.11b	12.425	12.550	0.9900	N/A	10Hz
802.11g	2.045	2.170	0.9424	0.26	510Hz
802.11n(HT20)	1.890	1.995	0.9474	0.23	1kHz

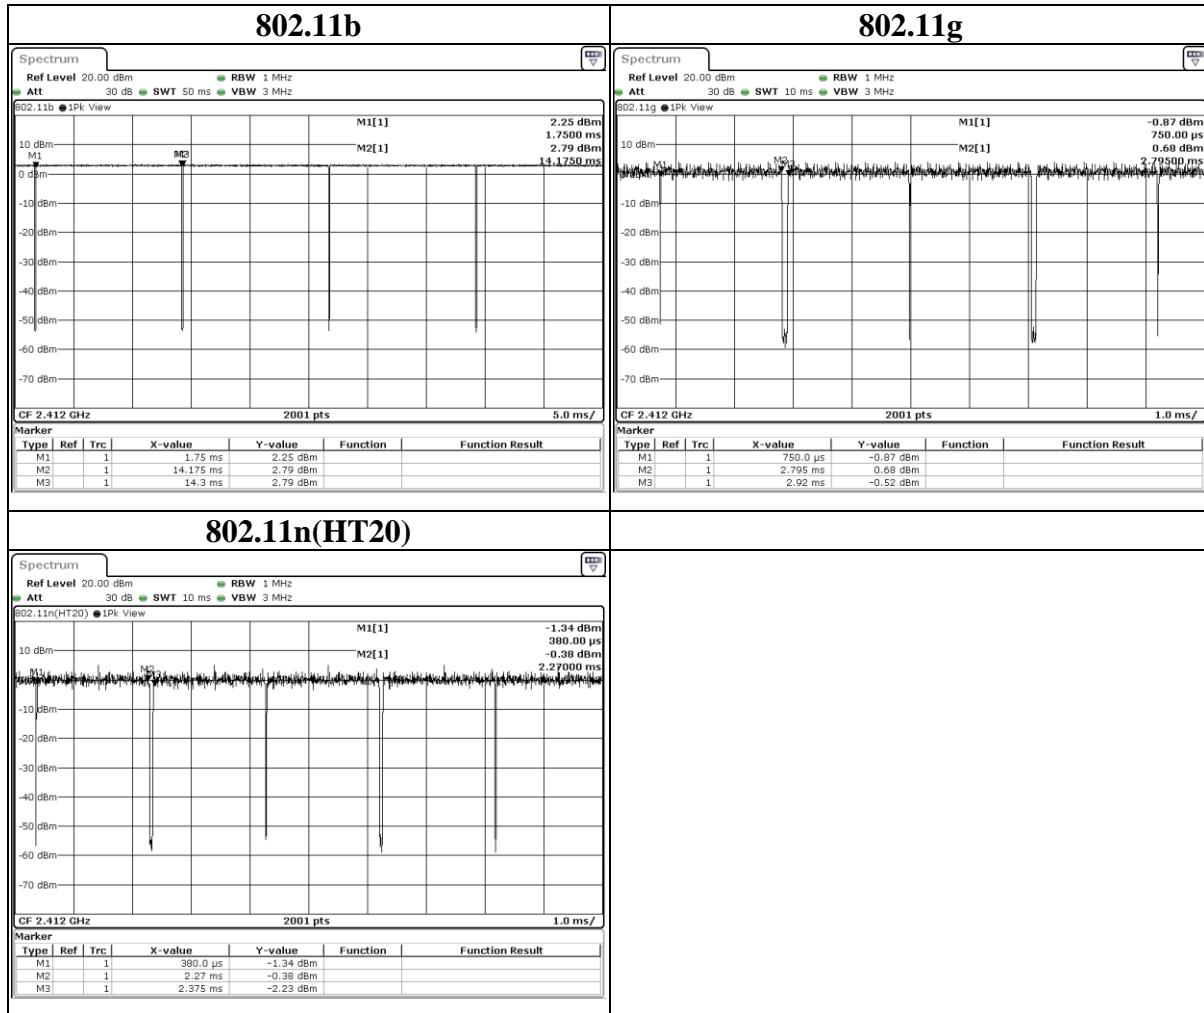

**Underwriters Laboratories Taiwan Co., Ltd.**

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

## 7. Test Equipment

Test Equipment List					
Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Expired date
<b>Radiated Spurious Emission</b>					
Spectrum Analyzer	Keysight	N9010A	MY56070827	2024/3/29	2025/3/28
EMI Test Receiver	Rohde & Schwarz	ESR7	101754	2024/12/24	2025/12/23
Loop Antenna	ETS lindgren	6502	00213440	2024/12/11	2025/12/10
Trilog-Broadband Antenna with 5dB Attenuator	Schwarzbeck & EMCI	VULB 9168 & N-6-05	774 & AT-N0538	2024/12/30	2025/12/29
Horn Antenna (1-18 GHz)	Schwarzbeck	BBHA 9120 D	01690	2024/11/27	2025/11/26
Horn Antenna (18-40 GHz)	Schwarzbeck	BBHA 9170	781	2024/12/18	2025/12/17
Preamplifier (30-1000 MHz)	EMCI	EMC330E	980405	2024/5/28	2025/5/27
Preamplifier (1-18 GHz)	EMCI	EMC051835BE	980406	2025/1/13	2026/1/12
Preamplifier (18-40GHz)	EMCI	EMC184040SEE	980426	2024/4/16	2025/4/15
Cables (9k-18 GHz)	Hanyitek	K1K50-UP0264-K1K50-2500	170214-4 & 170425-2	2024/11/22	2025/11/21
Cables (18-40GHz)	Hanyitek	K1K50-UP0264-K1K50-2500	170214-1 & 170214-2	2024/11/22	2025/11/21

### Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

Test Equipment List					
Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Expired date
<b>Antenna Port Conducted Measurement</b>					
Signal Analyzer	Rohde & Schwarz	FSVA3044	101281	2025/3/5	2026/3/4
Signal Analyzer	Rohde & Schwarz	FSV40	101490	2024/7/1	2025/6/30
Attenuator	EMCI	EMC-40ATK2W10	17002	2024/11/13	2025/11/12
USB Power Sensor	Anritsu	MA24408A	12031	2024/7/13	2025/7/12
Temperature &Humidity Test Chamber	GIANT FORCE	GTH-150- 40-CP-AR	MAA1701-010	2025/2/25	2026/2/24
<b>AC power Line Conducted Emission</b>					
EMI Test Receiver	Rohde & Schwarz	ESR7	101753	2024/10/1	2025/9/30
Two-Line V-Network	Rohde & Schwarz	ENV216	102136	2024/5/14	2025/5/13
Impuls-Begrenzer Pulse Limiter	Rohde & Schwarz	ESH3-Z2	102219-Qt	2024/8/29	2025/8/28
Cables	TITAN	CFD200	T0732ACFD 20020A300-2	2024/5/14	2025/5/13

UL Software		
Description	Name	Version
Radiated measurement	e3	6.191211 (V6)
Conducted measurement	RF-Conducted-FCC 15247	ver 1.0
AC power Line Conducted Emission	EZ_EMCA	UL-3A1.2

### Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

## 8. Description of Test Setup

### Support Equipment

ID	Equipment	Brand Name	Model Name	S/N	Remark
A	Laptop	DELL	Latitude E5470	3JFKWF2	Provided by Lab
B	Wall Mount	Arlo	Arlo	N/A	Provided by Client

### I/O Cables

ID	Equipment	Brand Name	Model Name	Length (m)	Remark
1	USB Cable	Nienyi	310-50024-01	0.9	Provided by Client

### Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000


Facsimile (FAX) :+886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

## **Test Setup**

Controlled using a bespoke application (Typing RF command by terminal tool(Tera Term version 4.94)) on a test Notebook. The application was used to enable a continuous transmission mode and to select the test channels, data rates, modulation schemes and power setting as required.

## **Setup Diagram for Test**

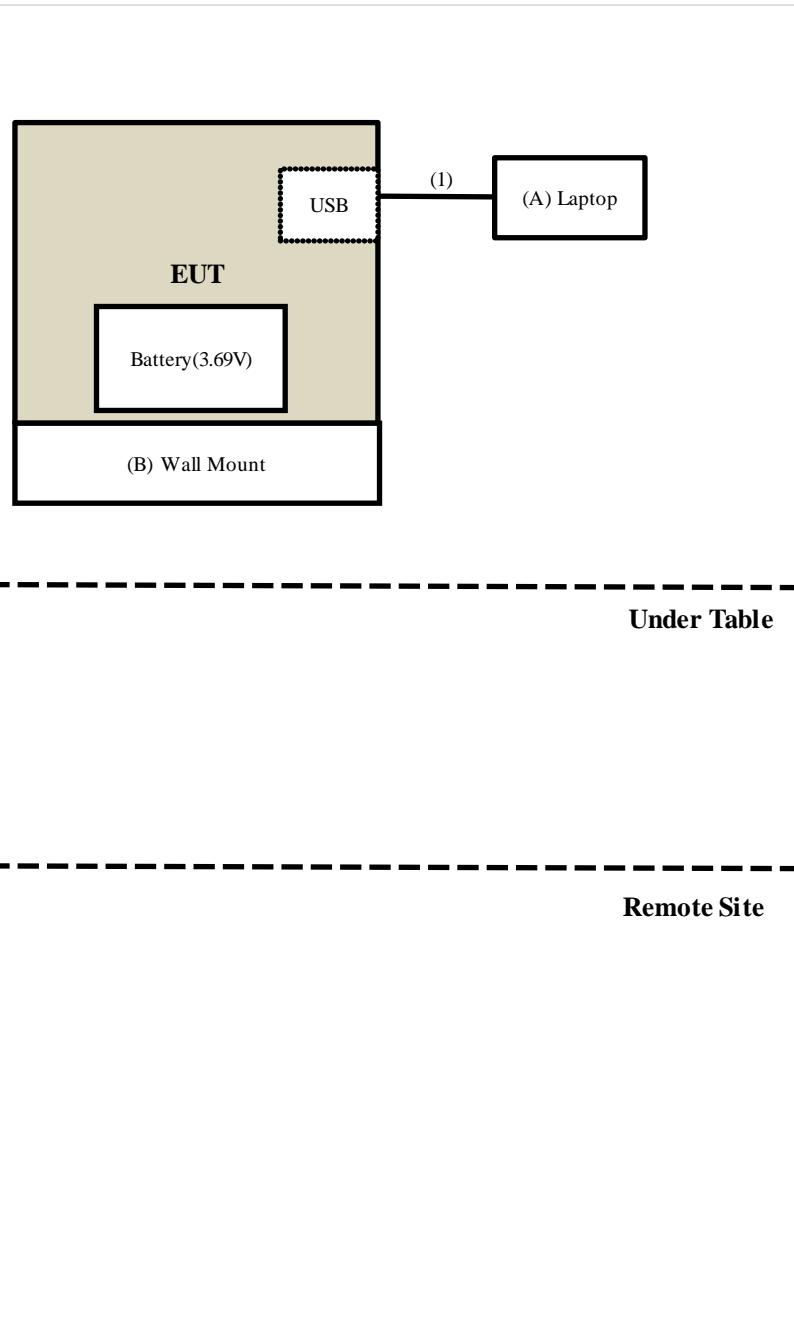

## **Underwriters Laboratories Taiwan Co., Ltd.**

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

## 9. Test Results

### 9.1. 6dB Bandwidth


#### Requirements

The minimum 6 dB bandwidth shall be at least 500 kHz.

#### Test procedure

- a. Set resolution bandwidth (RBW) = 100kHz.
- b. Set the video bandwidth (VBW)  $\geq 3 \times$  RBW, Detector = Peak.
- c. Trace mode = max hold.
- d. Sweep = auto couple.
- e. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

#### Test Setup

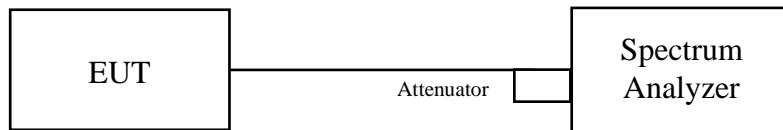

The loss between RF output port of the EUT and the input port of the Spectrum Analyzer has been taken into consideration.

#### **Underwriters Laboratories Taiwan Co., Ltd.**

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan


Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

## Test Data

Mode	CH	Freq (MHz)	6dB BW (MHz)	Limit (MHz)	Result
			Chain 0		
802.11b	1	2412	9.086	0.5	PASS
	6	2437	9.597	0.5	PASS
	10	2457	9.572	0.5	PASS
	11	2462	9.568	0.5	PASS

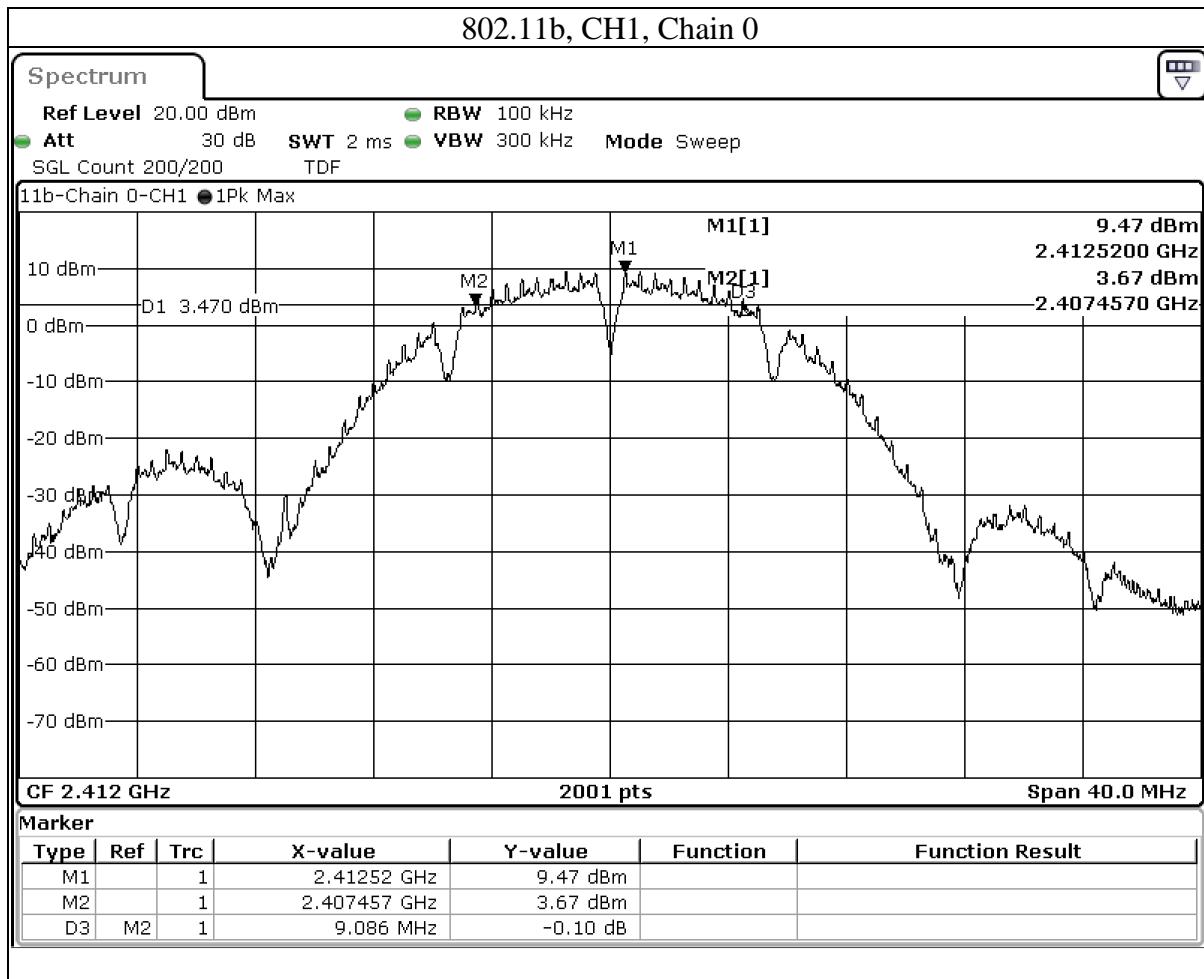

## **Underwriters Laboratories Taiwan Co., Ltd.**


Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

Mode	CH	Freq (MHz)	6dB BW	Limit (MHz)	Result
			(MHz)		
802.11g	1	2412	13.800	0.5	PASS
	6	2437	13.843	0.5	PASS
	11	2462	15.051	0.5	PASS

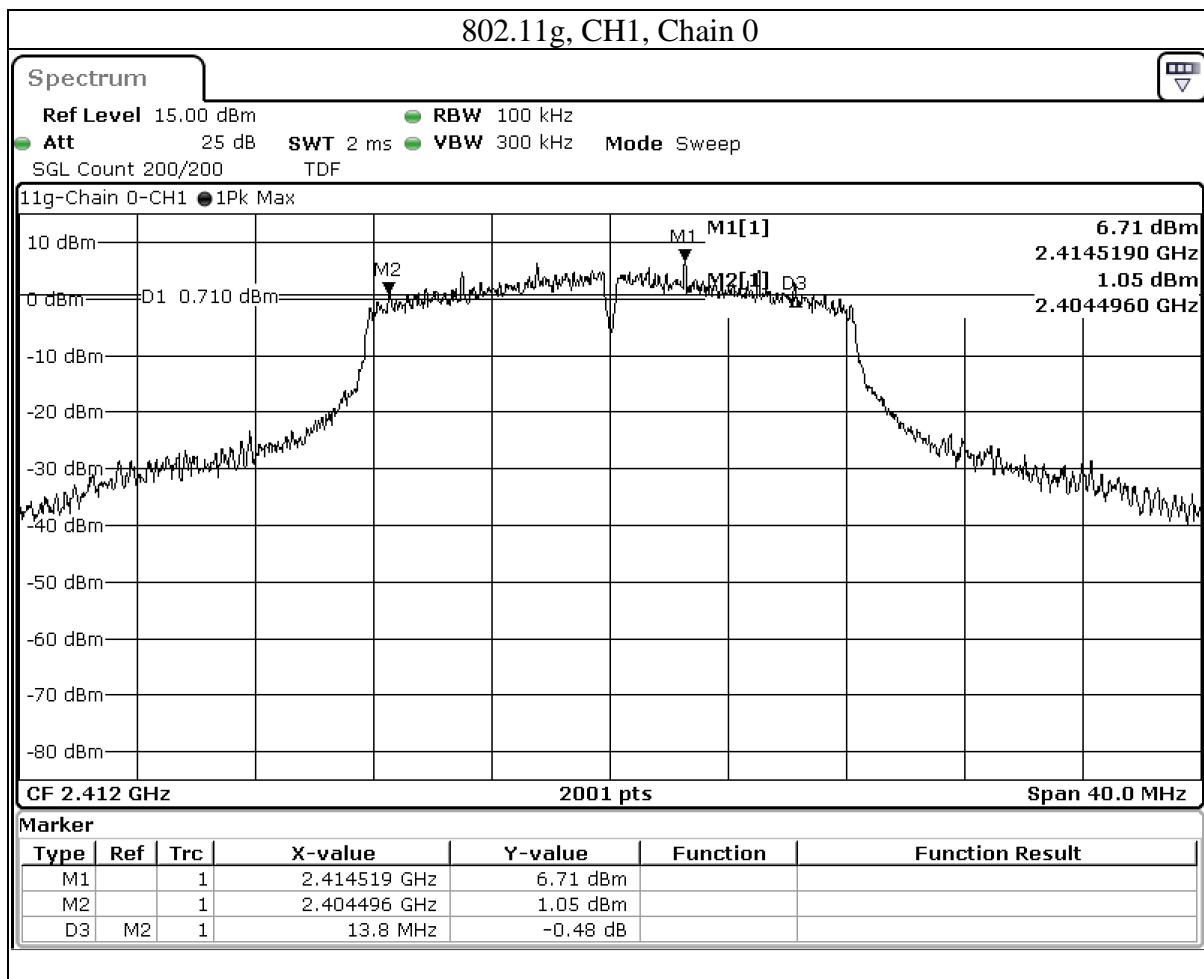

### Underwriters Laboratories Taiwan Co., Ltd.


Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

Mode	CH	Freq (MHz)	6dB BW	Limit (MHz)	Result
			(MHz)		
802.11n(HT20)	1	2412	15.100	0.5	PASS
	6	2437	13.758	0.5	PASS
	11	2462	13.886	0.5	PASS

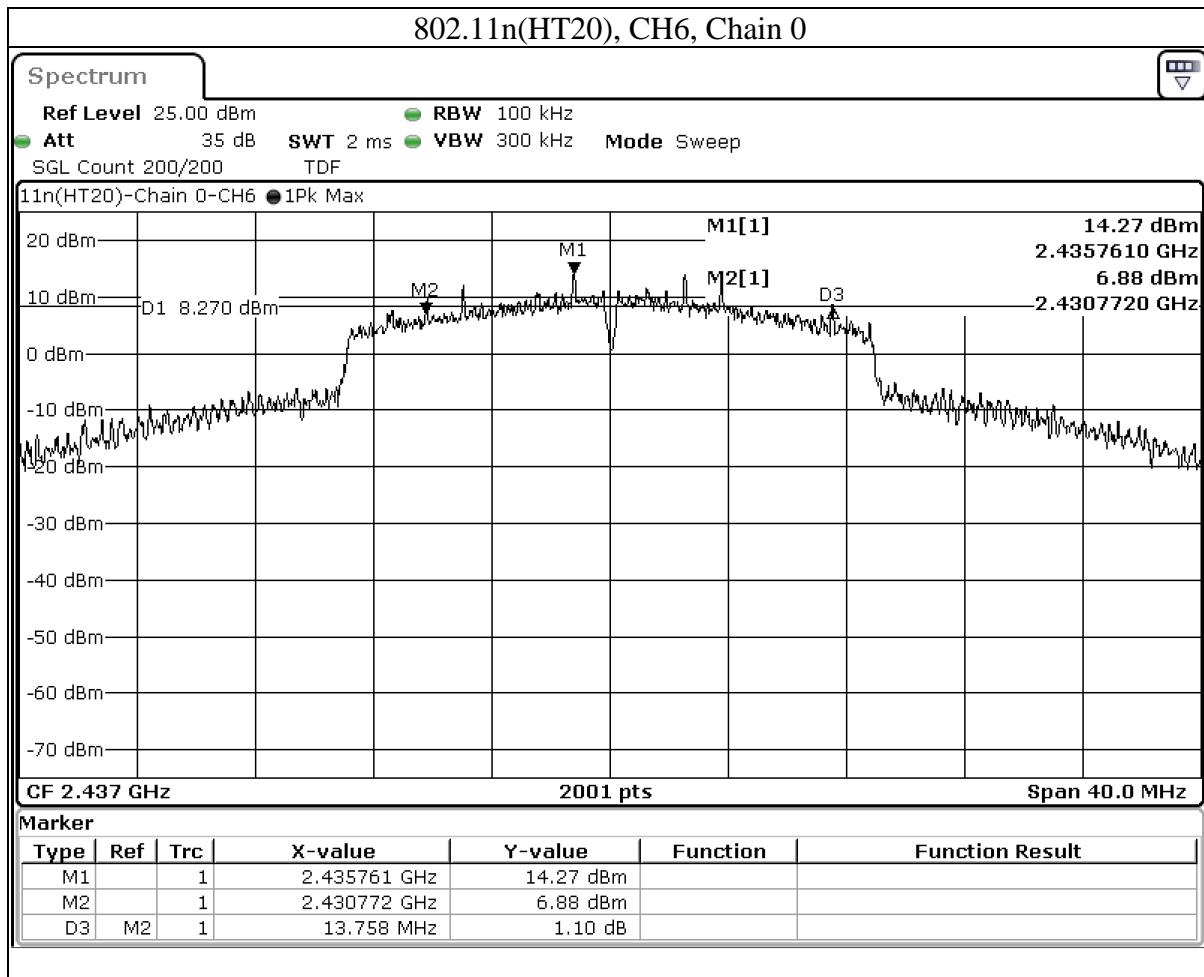

### Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

## 9.2. Conducted Output Power

### Requirements

For systems using digital modulation in the 2400-2483.5 MHz bands: 1 Watt.


Note:

1.  $P_{\text{Out}} = \text{maximum conducted output power in dBm}$ ,  $G_{\text{TX}} = \text{the maximum transmitting antenna directional gain in dBi}$ ,  $B$  is the 26 dB emission bandwidth in megahertz
2. If EUT with Multiple Transmitter Output:
  - a. Directional Gain =  $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{Gn/20})^2 / \text{Nant}] \text{ dBi}$ .  
 Nant: Number of Transmit Antennas  
 G1, G2, ..., Gn: Gain of Individual Antennas  
 Example: two antenna and gain 5 dBi / 3dBi, so if it was used for TxBF power measurement  
 Directional Gain =  $10 \log[(105/20 + 103/20)^2 / 2] \text{ dBi} = 7.07 \text{ dBi}$
  - b. Per KDB 662911 Method of conducted output power measurement on IEEE 802.11 devices, CDD  
 Array Gain = 0 dB (i.e., no array gain) for NANT  $\leq 4$ ;  
 Array Gain = 0 dB (i.e., no array gain) for channel widths  $\geq 40 \text{ MHz}$  for any NANT;  
 Array Gain =  $5 \log(\text{NANT}/\text{NSS}) \text{ dB}$  or 3 dB, whichever is less for 20-MHz channel widths with NANT  $\geq 5$ .  
 Example: Maximum antenna gain = 5 dBi and NANT  $\leq 4$ , so if it was used for CDD power measurement  
 Directional Gain = 5 dBi + Array Gain = 5 dBi + 0 dB = 5 dBi
  - c. For power measurement of KDB 662911 is used with multiple transmitter output. Total conducted power is the sum of the conducted power levels measured at the various output ports.

### Test Procedure

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the power level.

### Test Setup

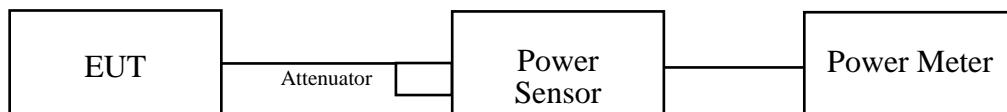

The loss between RF output port of the EUT and the input port of the Power Meter has been taken into consideration.

### **Underwriters Laboratories Taiwan Co., Ltd.**

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

## Test Data

Mode	CH	Freq. (MHz)	Peak Power (dBm) Chain 0	Total PK Power (mW)	Total PK Power (dBm)	AVG Power (dBm) Chain 0	Total Power (mW)	Total Power (dBm)	Limit (dBm)	Result
802.11b	1	2412	24.25	266.073	24.25	22	158.489	22	30	PASS
	6	2437	26.3	426.58	26.3	24.26	266.686	24.26	30	PASS
	10	2457	23.13	205.589	23.13	20.71	117.761	20.71	30	PASS
	11	2462	22.91	195.434	22.91	20.56	113.763	20.56	30	PASS
802.11g	1	2412	27.58	572.796	27.58	19.52	89.536	19.52	30	PASS
	6	2437	28.19	659.174	28.19	25.14	326.588	25.14	30	PASS
	11	2462	27.41	550.808	27.41	18.02	63.387	18.02	30	PASS
802.11n(HT20)	1	2412	27.22	527.23	27.22	18.9	77.625	18.9	30	PASS
	6	2437	28.14	651.628	28.14	25.08	322.107	25.08	30	PASS
	11	2462	25.98	396.278	25.98	17.13	51.642	17.13	30	PASS

Note: Average Power is for reference Only.

## **Underwriters Laboratories Taiwan Co., Ltd.**

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

## 9.3. Power Spectral Density

### Requirements

The Maximum of Power Spectral Density Measurement is 8dBm in any 3 kHz (If  $G_{TX} > 6$  dBi, then PSD =  $8 - (G_{TX} - 6)$ ).


Note:

1. PSD = power spectral density that the same method as used to determine the conducted output power shall be used to determine the power spectral density. And power spectral density in dBm/MHz.
2.  $G_{TX}$  = the maximum transmitting antenna directional gain in dBi.
3. If EUT with Multiple Transmitter Output:
  - a. Directional Gain =  $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{Gn/20})^2 / N_{ant}]$  dBi.  
 N<sub>ant</sub>: Number of Transmit Antennas  
 G<sub>1</sub>, G<sub>2</sub>, ..., G<sub>n</sub>: Gain of Individual Antennas  
 Example: two antenna and gain 5 dBi / 3dBi, so if it was used for power density measurement  
 Directional Gain =  $10 \log[(10^{5/20} + 10^{3/20})^2 / 2]$  dBi = 7.07 dBi
  - b. "PSD per chain" of the report shown is maximum value for each chain, at the "Total PSD" is summing entire spectra across corresponding frequency bins on the various outputs by computer, refer KDB 662911 Method a) for calculating total power density.
  - c. Method a) of power density measurement of KDB 662911 is used for calculating total power density with multiple transmitter output. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.

### Test procedure

- a. Set analyzer center frequency to DTS channel center frequency.
- b. Set the span to 1.5 times the DTS bandwidth.
- c. Set the RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
- d. Set the VBW  $\geq 3 \times \text{RBW}$ .
- e. Detector = peak.
- f. Sweep time = auto couple.
- g. Trace mode = max hold.
- h. Allow trace to fully stabilize.
- i. Use the peak marker function to determine the maximum amplitude level within the RBW.

### Test Setup

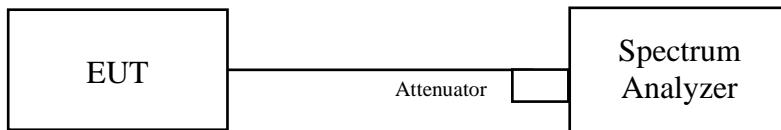

The loss between RF output port of the EUT and the input port of the Spectrum Analyzer has been taken into consideration.


### **Underwriters Laboratories Taiwan Co., Ltd.**

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan  
 Telephone : +886-2-7737-3000  
 Facsimile (FAX) : +886-3-583-7948

### Test Data

Mode	CH	Freq (MHz)	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Directional Gain (dBi)	Result
802.11b	1	2412	-6.11	8	2.78	PASS
	6	2437	-2.68	8	2.78	PASS
	10	2457	-5.12	8	2.78	PASS
	11	2462	-6.03	8	2.78	PASS

Mode	CH	Freq (MHz)	PSD per Chain (dBm/3kHz)
			Chain 0
802.11b	1	2412	-6.11
	6	2437	-2.68
	10	2457	-5.12
	11	2462	-6.03

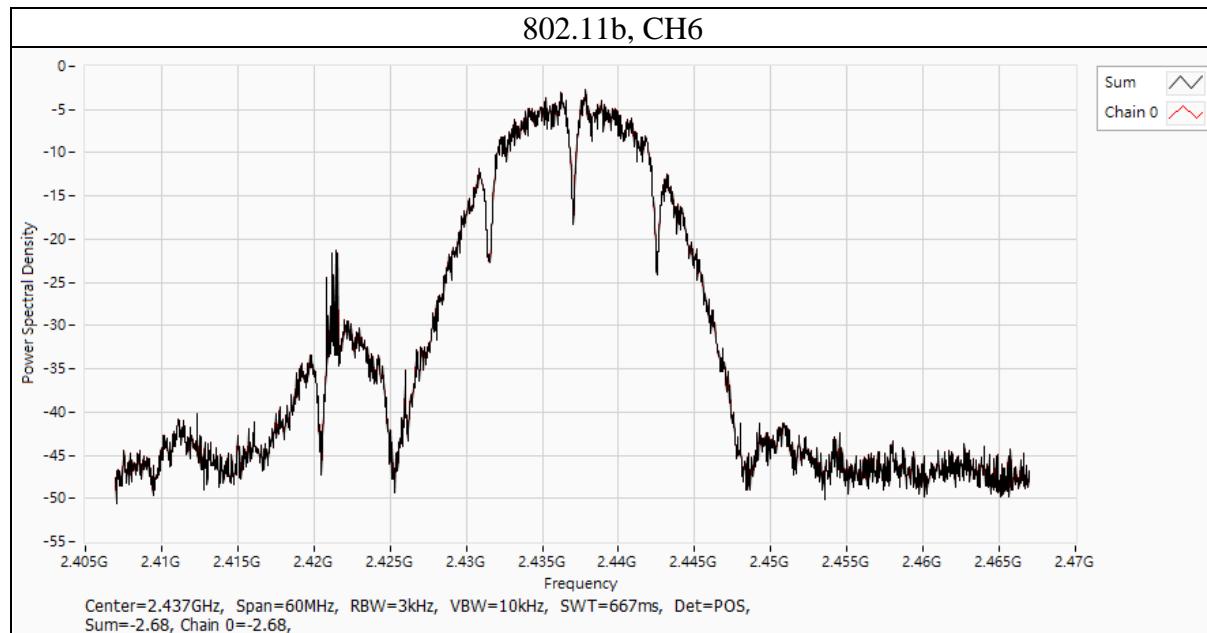

### **Underwriters Laboratories Taiwan Co., Ltd.**

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan


Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

Mode	CH	Freq (MHz)	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Directional Gain (dBi)	Result
802.11g	1	2412	-8.78	8	2.78	PASS
	6	2437	-3.07	8	2.78	PASS
	11	2462	-9.84	8	2.78	PASS

Mode	CH	Freq (MHz)	PSD per Chain (dBm/3kHz)
			Chain 0
802.11g	1	2412	-8.78
	6	2437	-3.07
	11	2462	-9.84

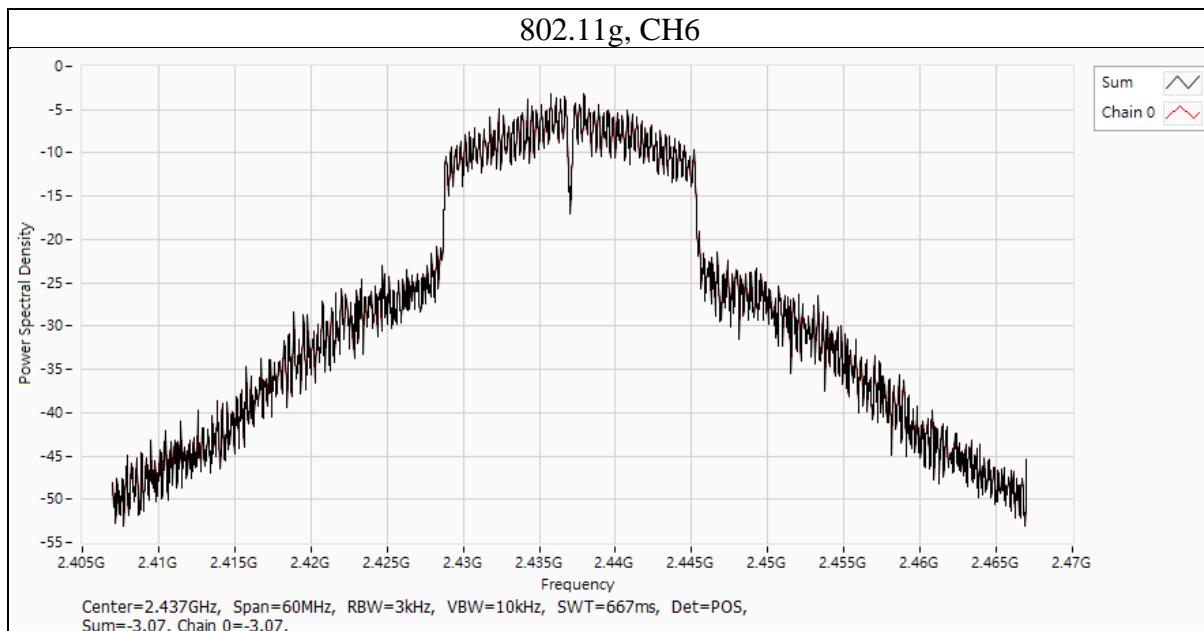

### Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan


Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

Mode	CH	Freq (MHz)	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Directional Gain (dBi)	Result
802.11n(HT20)	1	2412	-7.88	8	2.78	PASS
	6	2437	-2.73	8	2.78	PASS
	11	2462	-9.18	8	2.78	PASS

Mode	CH	Freq (MHz)	PSD per Chain (dBm/3kHz)
			Chain 0
802.11n(HT20)	1	2412	-7.88
	6	2437	-2.73
	11	2462	-9.18

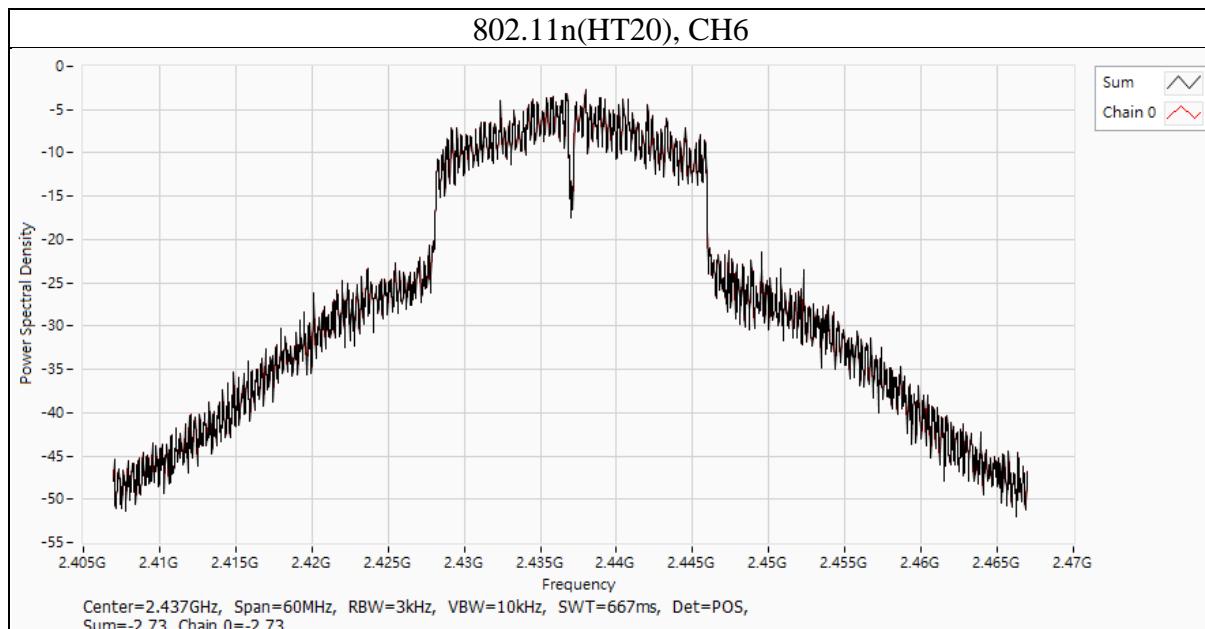

### Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

## 9.4. Conducted Out of Band Emission

### Requirements

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b) (3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209 (a) is not required.

### Test procedure


#### Measurement Procedure REF

1. Set the RBW = 100 kHz.
2. Set the VBW  $\geq$  300 kHz.
3. Set the span to 1.5 times the DTS bandwidth.
4. Detector = peak.
5. Sweep time = auto couple.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

#### Measurement Procedure OOB

1. Set RBW = 100 kHz.
2. Set VBW  $\geq$  300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

### Test Setup

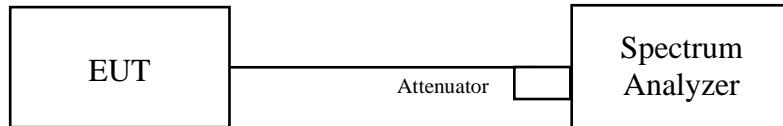

The loss between RF output port of the EUT and the input port of the Spectrum Analyzer has been taken into consideration.

### **Underwriters Laboratories Taiwan Co., Ltd.**


Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

## Test Data

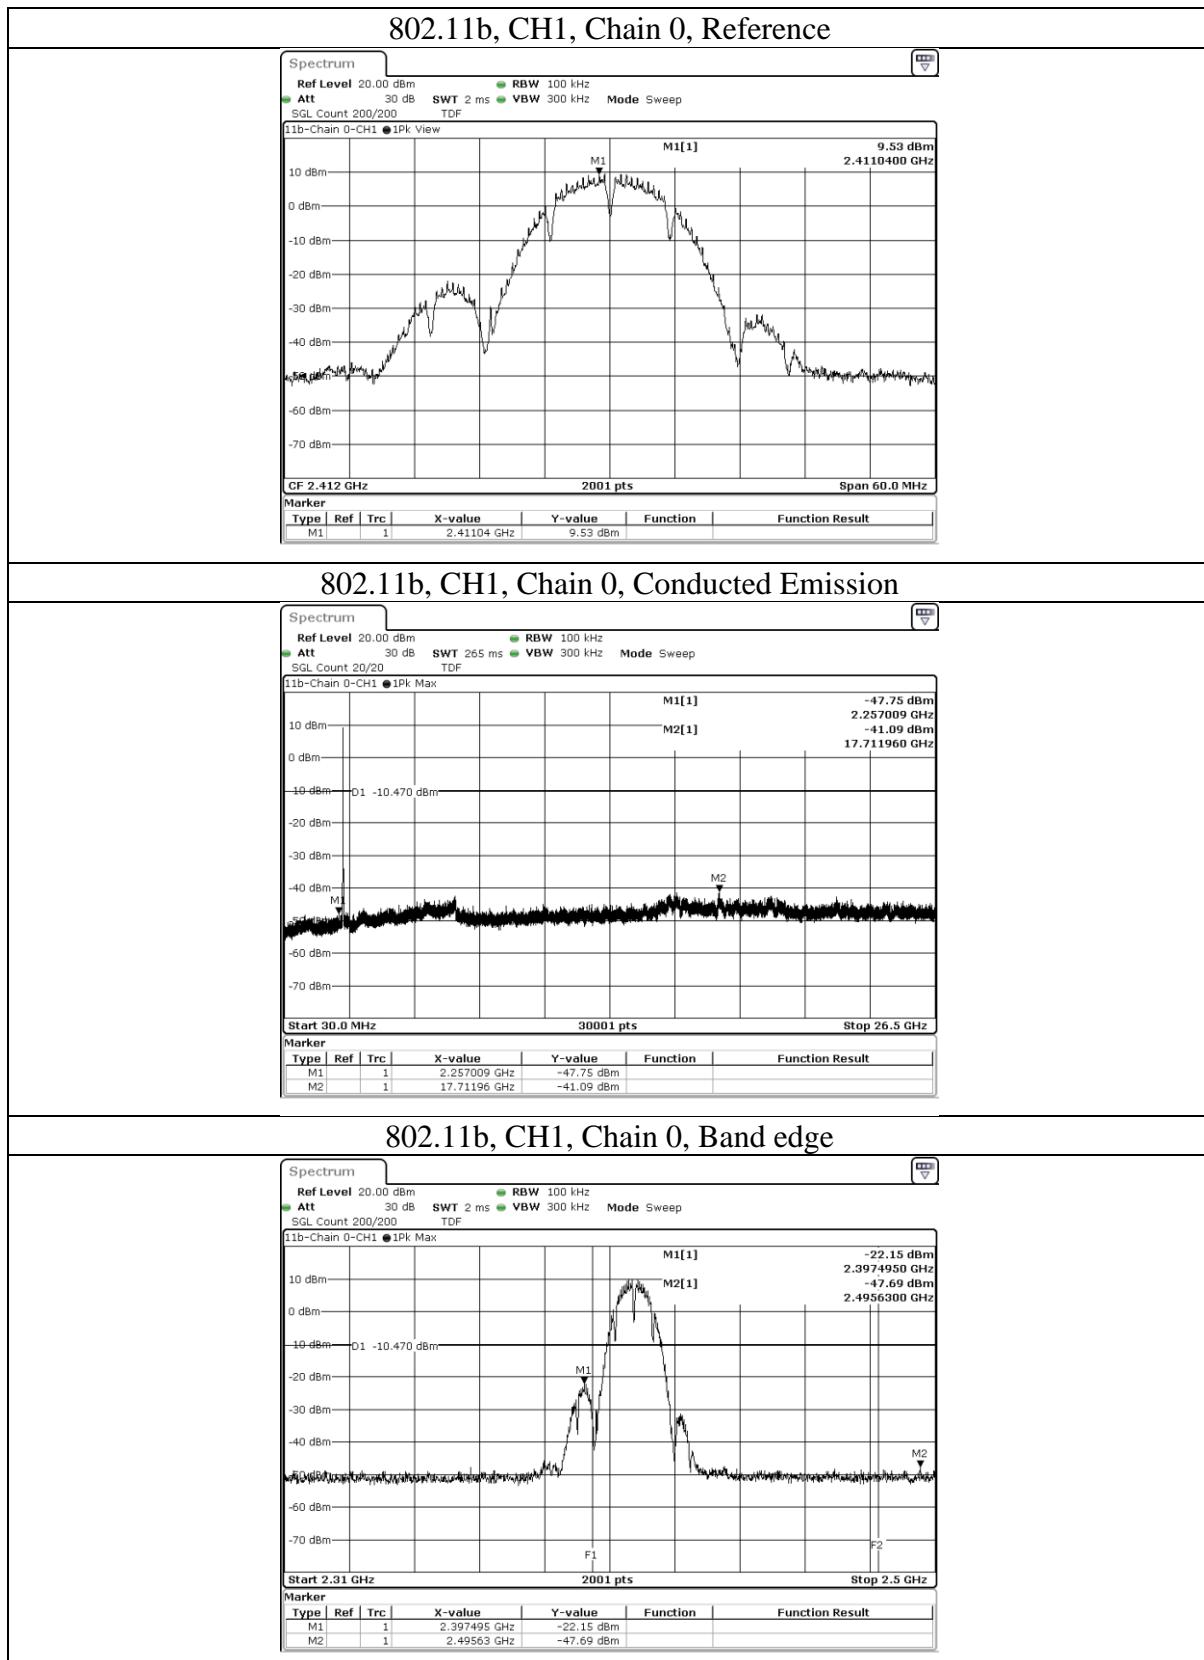


## Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan


Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948


### 802.11b, CH6, Chain 0, Reference

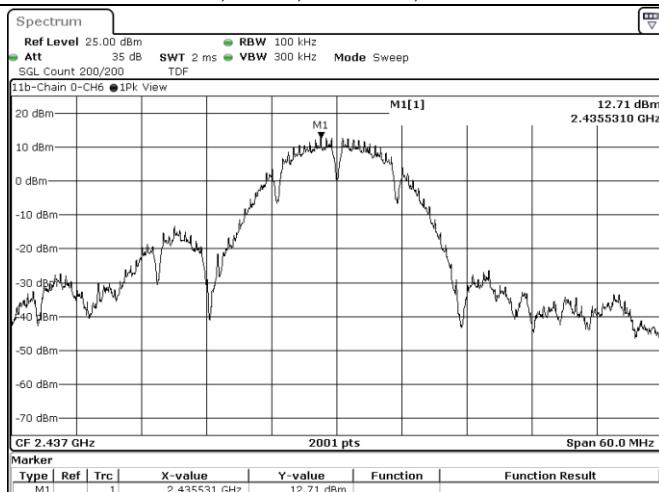

### 802.11b, CH6, Chain 0, Conducted Emission

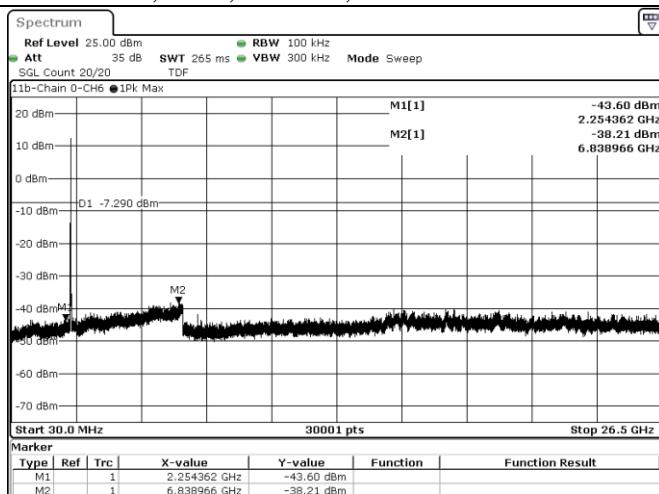

### 802.11b, CH6, Chain 0, Band edge

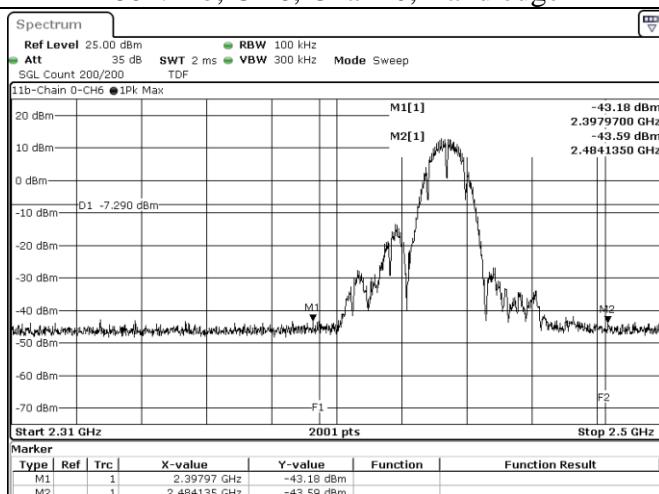

### Underwriters Laboratories Taiwan Co., Ltd.


Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000


Facsimile (FAX) :+886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1


### 802.11b, CH10, Chain 0, Reference

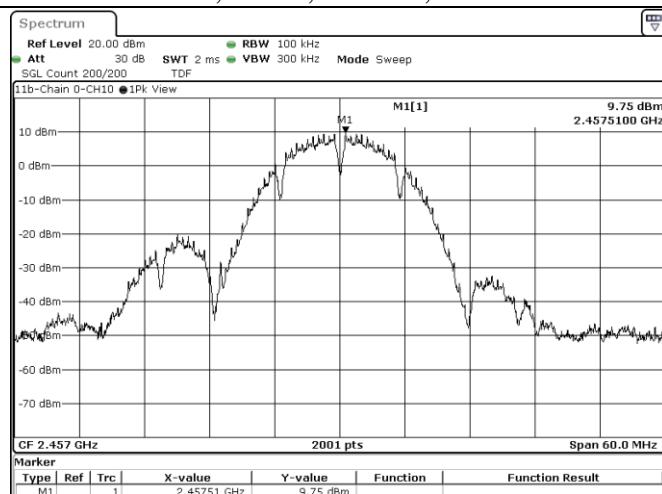

### 802.11b, CH10, Chain 0, Conducted Emission

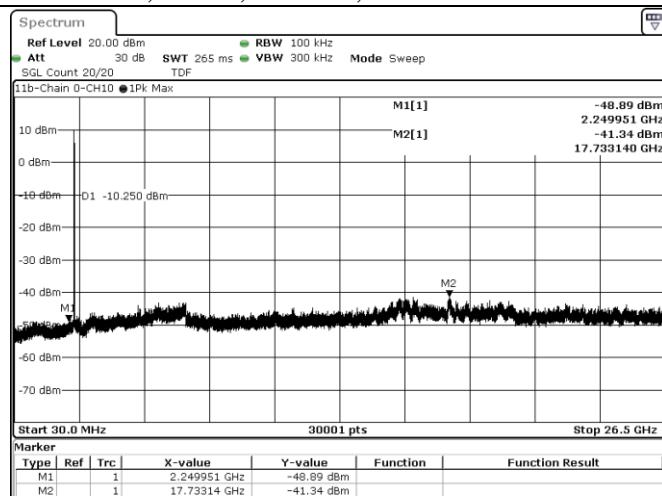

### 802.11b, CH10, Chain 0, Band edge

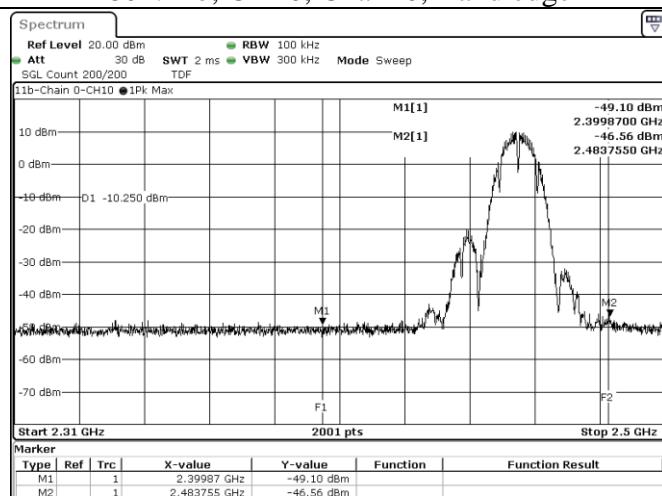




### Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

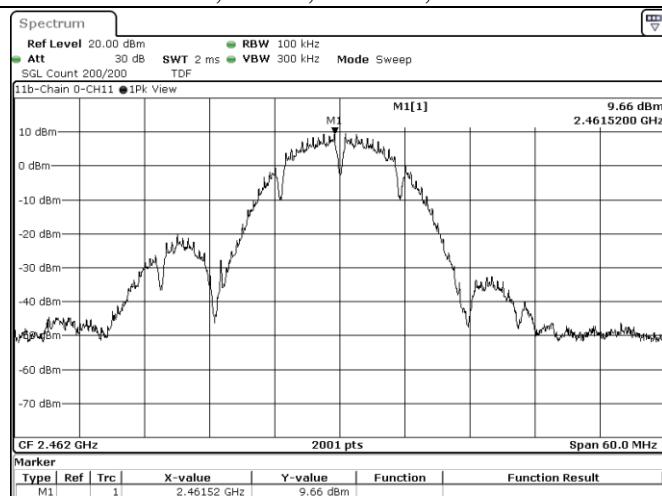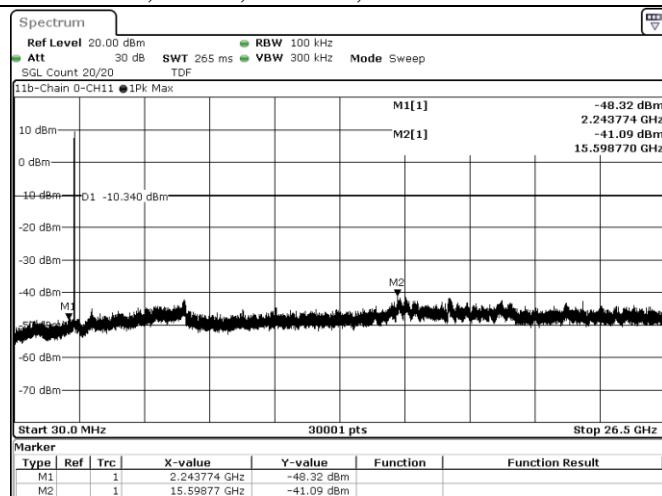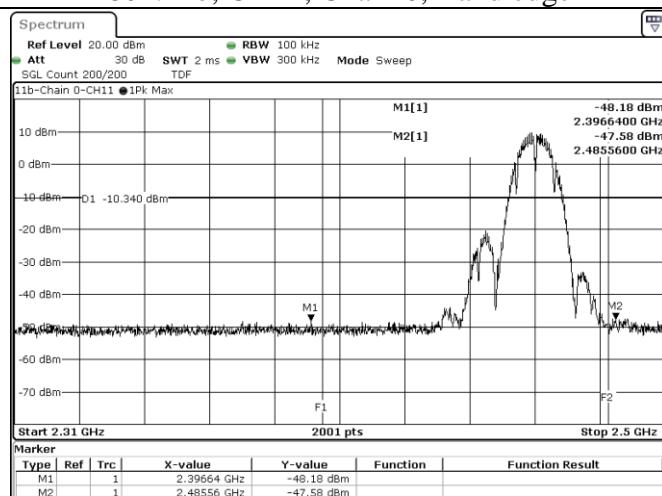**802.11b, CH11, Chain 0, Reference**

**802.11b, CH11, Chain 0, Conducted Emission**

**802.11b, CH11, Chain 0, Band edge**

**Underwriters Laboratories Taiwan Co., Ltd.**


Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000


Facsimile (FAX) :+886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1


### 802.11g, CH1, Chain 0, Reference

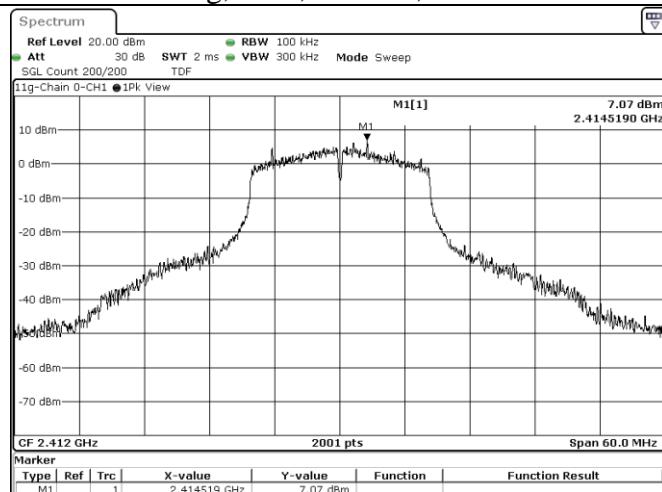

### 802.11g, CH1, Chain 0, Conducted Emission

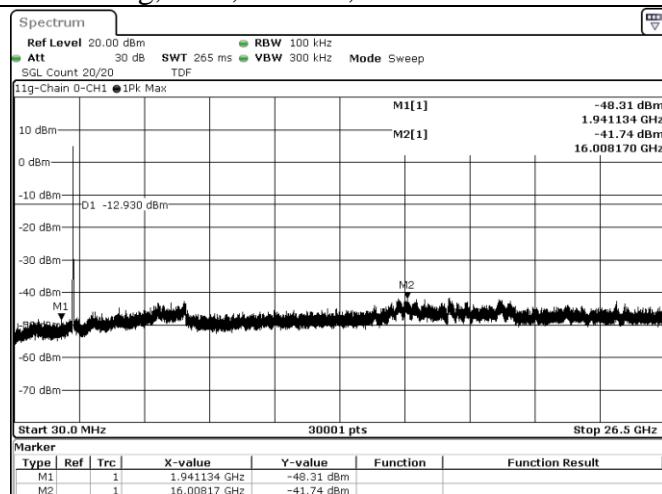

### 802.11g, CH1, Chain 0, Band edge

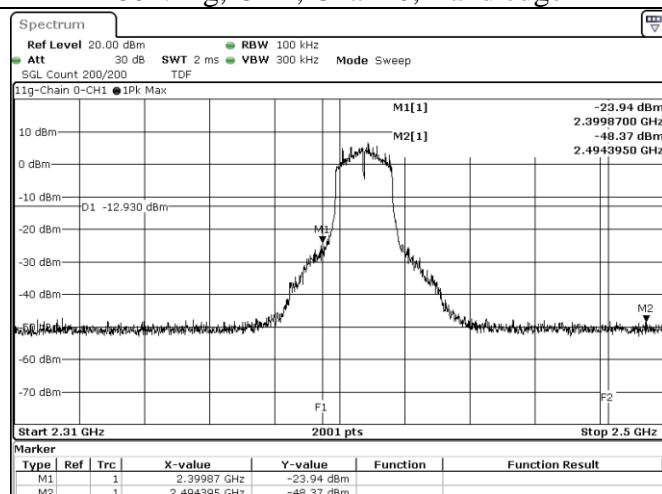




### Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

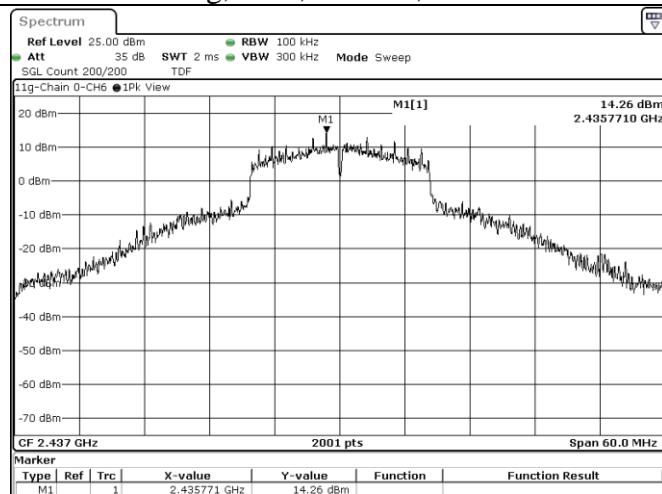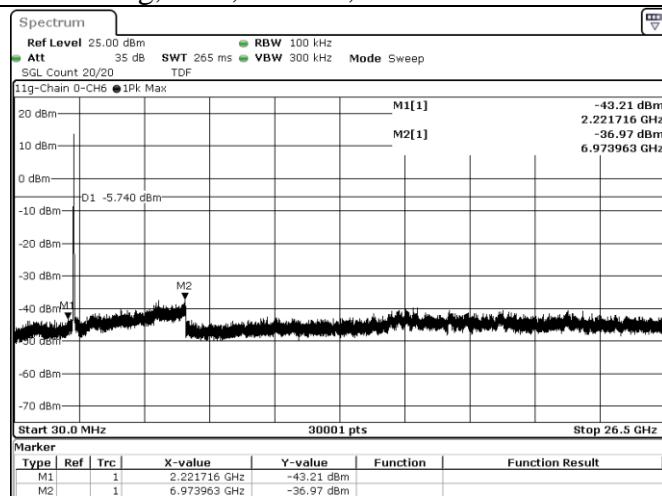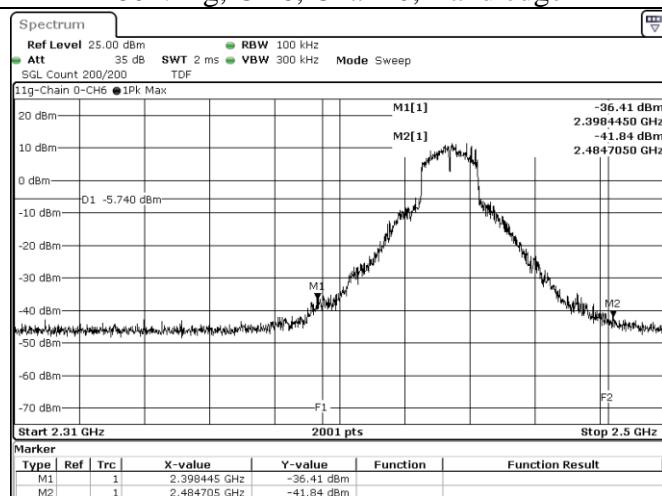**802.11g, CH6, Chain 0, Reference**

**802.11g, CH6, Chain 0, Conducted Emission**

**802.11g, CH6, Chain 0, Band edge**

**Underwriters Laboratories Taiwan Co., Ltd.**


Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000


Facsimile (FAX) :+886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1


### 802.11g, CH11, Chain 0, Reference

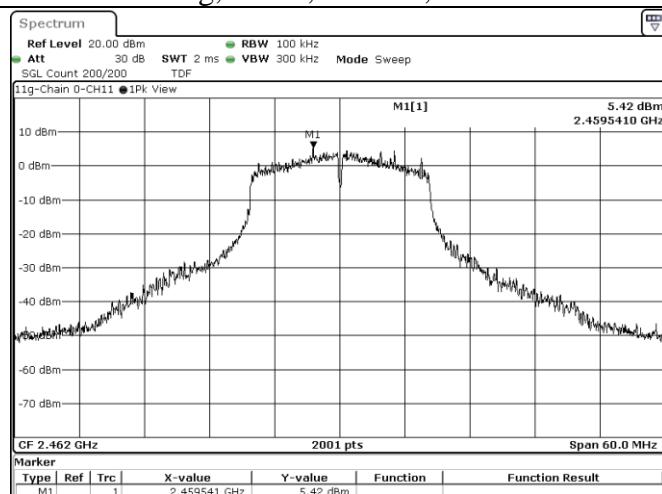

### 802.11g, CH11, Chain 0, Conducted Emission

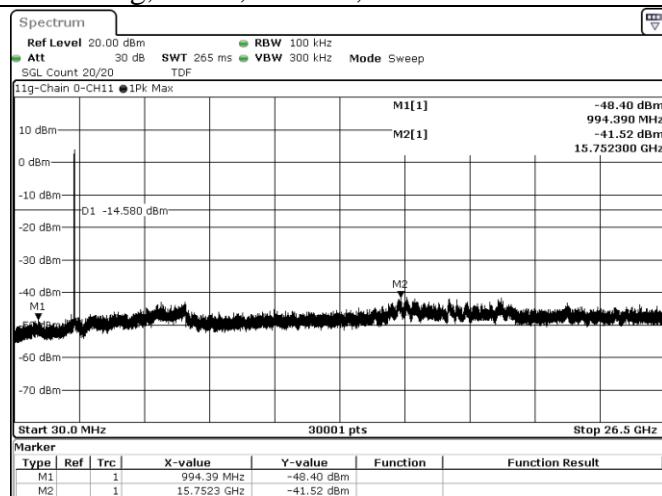

### 802.11g, CH11, Chain 0, Band edge

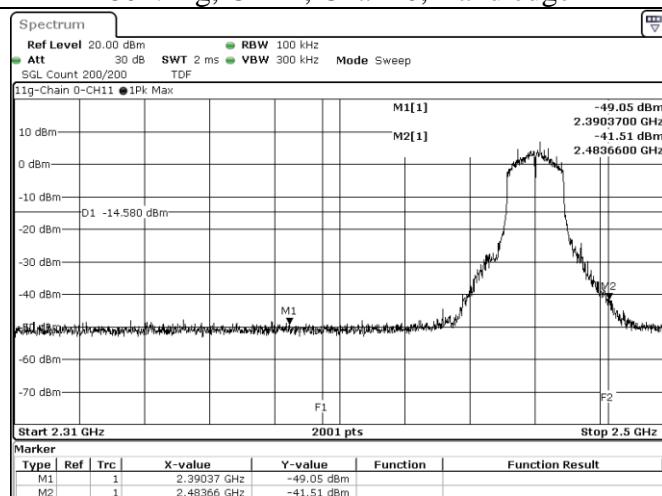


### Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

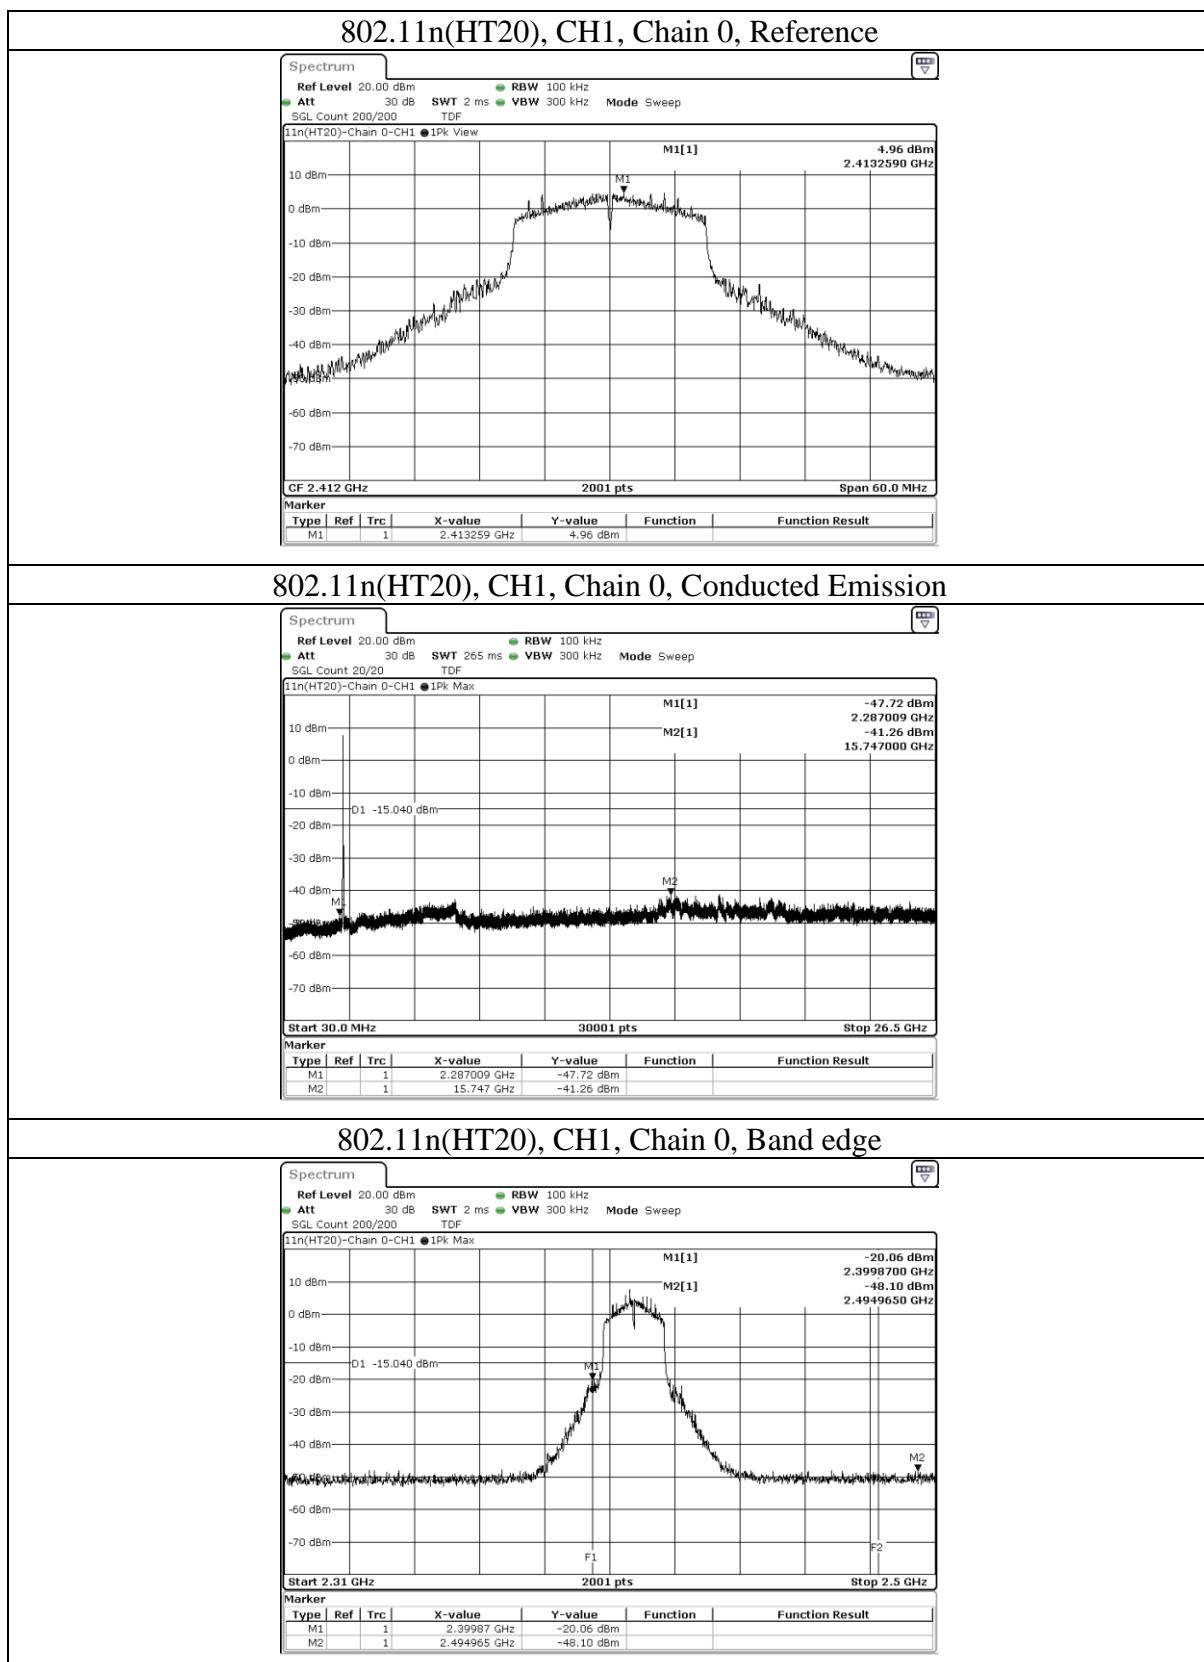


### Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

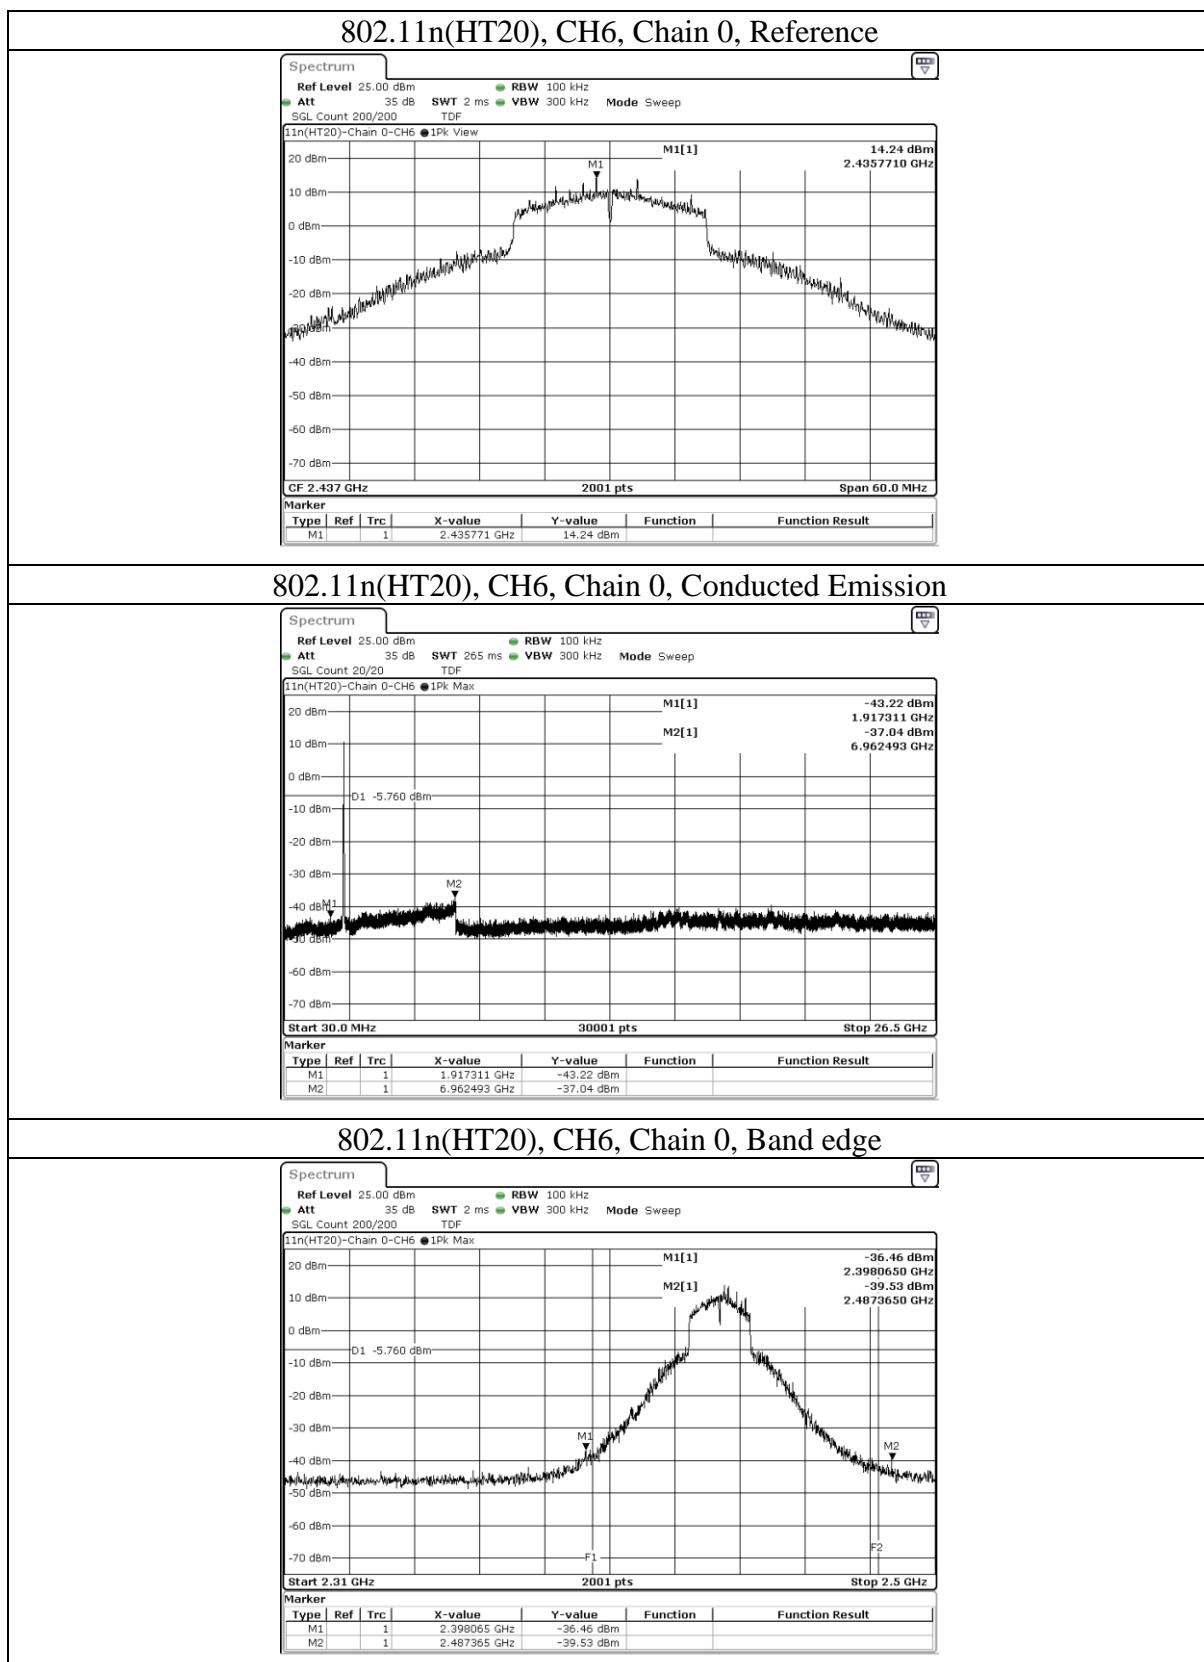




**Underwriters Laboratories Taiwan Co., Ltd.**

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

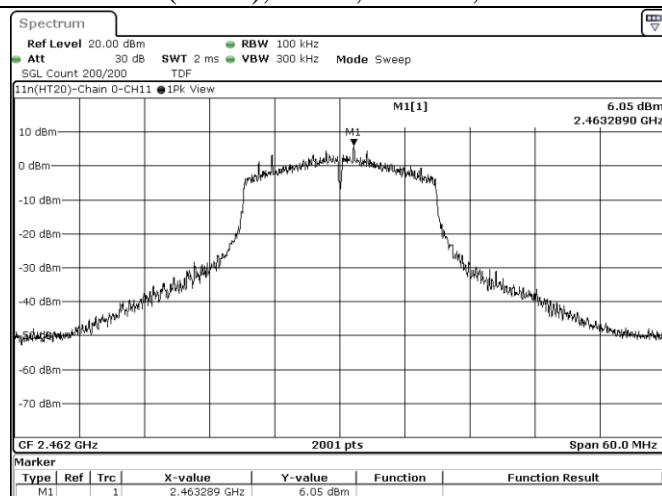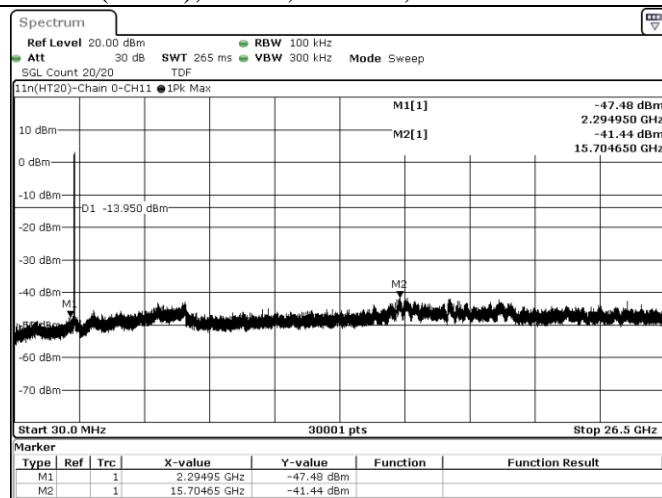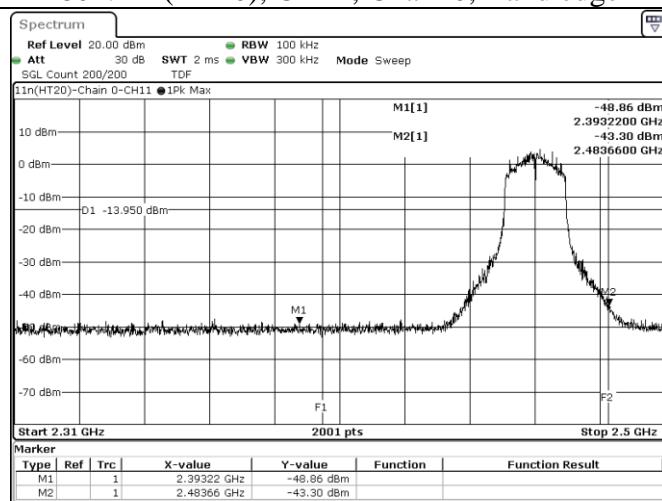**802.11n(HT20), CH11, Chain 0, Reference**

**802.11n(HT20), CH11, Chain 0, Conducted Emission**

**802.11n(HT20), CH11, Chain 0, Band edge**

**Underwriters Laboratories Taiwan Co., Ltd.**

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

## 9.5. Radiated Spurious Emission

### Requirements

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

Frequency(MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dB<sub>B</sub>V/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

### **Underwriters Laboratories Taiwan Co., Ltd.**

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

## **Test Procedures**

[For 9 kHz ~ 30 MHz]

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. For measurement below 30MHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

[For above 30 MHz]

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. For measurement below 1GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
- f. The test-receiver system was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

## **Underwriters Laboratories Taiwan Co., Ltd.**

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

Note:

- a. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
- b. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
- c. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is  $\geq 1/T$  (Duty cycle < 98%) or 10Hz (Duty cycle  $\geq 98\%$ ) for Average detection (AV) at frequency above 1GHz.

Peak

Frequency	RBW	VBW
9 kHz~150 kHz	200 Hz	600 Hz
150 kHz~30 MHz	10 kHz	30 kHz
30 MHz~1 GHz	120 kHz	360 kHz
Above 1GHz	1 MHz	3 MHz

Average for above 1GHz

RBW	VBW
1MHz	Refer to section 6.6 for duty cycle.

- d. All modes of operation were investigated (includes all external accessories) and the worst-case emissions are reported, the other emission levels were low against the limit.
- e. Test data of Result value (dB<sub>UV</sub>/m) = Reading value (dB<sub>UV</sub>/m) + Correction Factor (dB/m).
- f. Test data of Margin(dB) = Result value (dB<sub>UV</sub>/m) - Limit value (dB<sub>UV</sub>/m).
- g. Test data of Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamp Factor (dB).
- h. Test data of Notation "@" = Fundamental Frequency
- i. Test data of Notation "\*" = The peak result under 20 dB above and complies with AVG limit, AVG result is deemed to comply with AVG limit.

**Underwriters Laboratories Taiwan Co., Ltd.**

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan


Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948


Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

## Test Setup

<Frequency Range 9 kHz ~ 30 MHz>

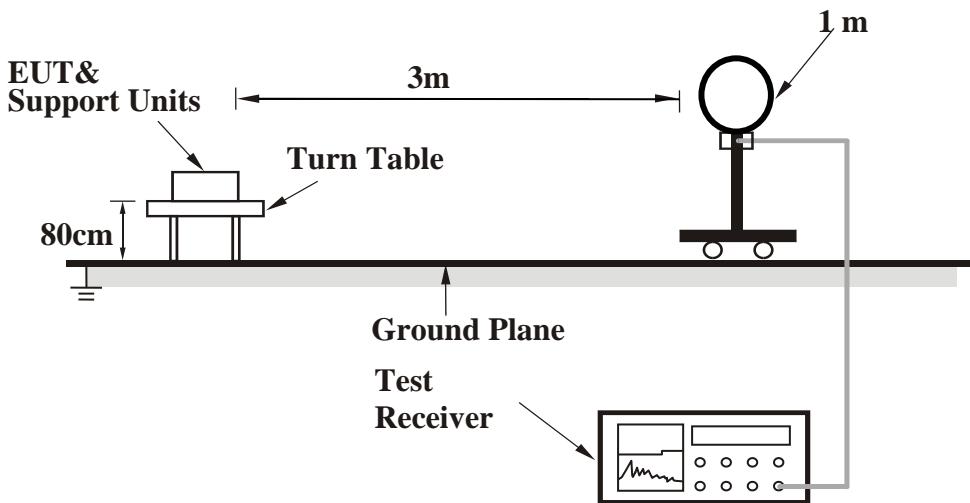

<Frequency Range 30 MHz ~ 1 GHz >

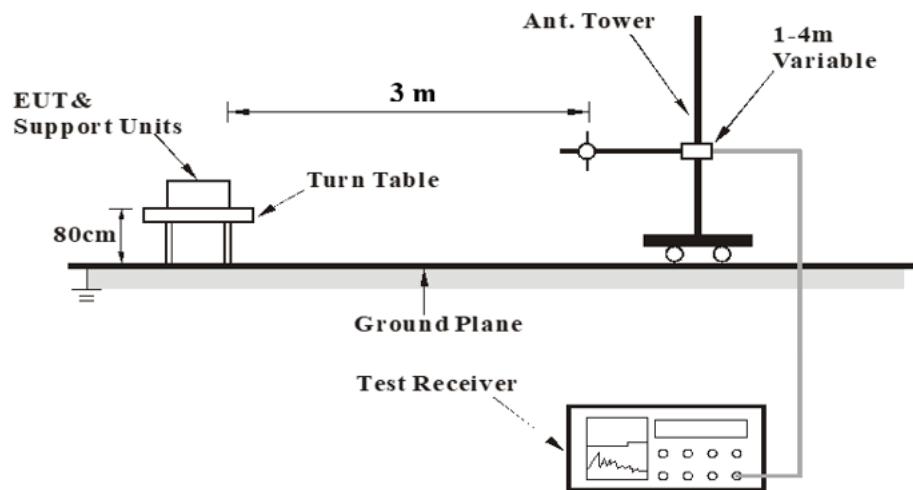

**Underwriters Laboratories Taiwan Co., Ltd.**


Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

<Frequency Range above 1 GHz>

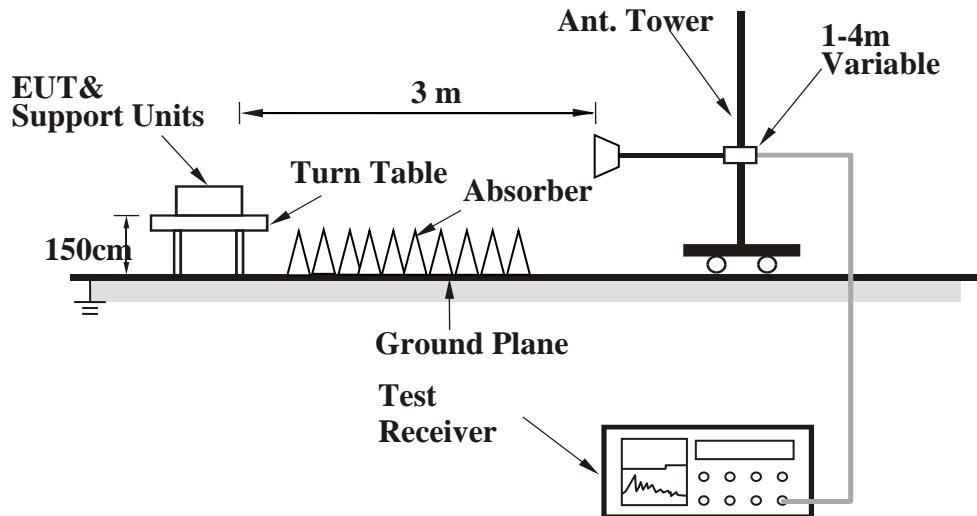

For the actual test configuration, please refer to the Setup Configurations.

**Underwriters Laboratories Taiwan Co., Ltd.**

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

## Test Data

### Above 1 GHz

Mode	802.11b	Channel	1
------	---------	---------	---

Polarization	Notation	Frequency	Reading	Correct	Result	Limit	Margin	Remark
		(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
Horizontal		2329.38	40.28	19.36	59.64	74	-14.36	PK
		2385.81	34.63	19.19	53.82	54	-0.18	AVG
	@	2412	89.33	19.14	108.47	N/A	N/A	PK
	@	2412	88.48	19.14	107.62	N/A	N/A	AVG
	*	4824	40.45	2.63	43.08	74	-30.92	PK
Vertical		2352.18	40.41	19.39	59.8	74	-14.2	PK
		2387.14	30.39	19.19	49.58	54	-4.42	AVG
	@	2412	88.14	19.14	107.28	N/A	N/A	PK
	@	2412	85.41	19.14	104.55	N/A	N/A	AVG
	*	4824	38.69	2.63	41.32	74	-32.68	PK


### **Underwriters Laboratories Taiwan Co., Ltd.**

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

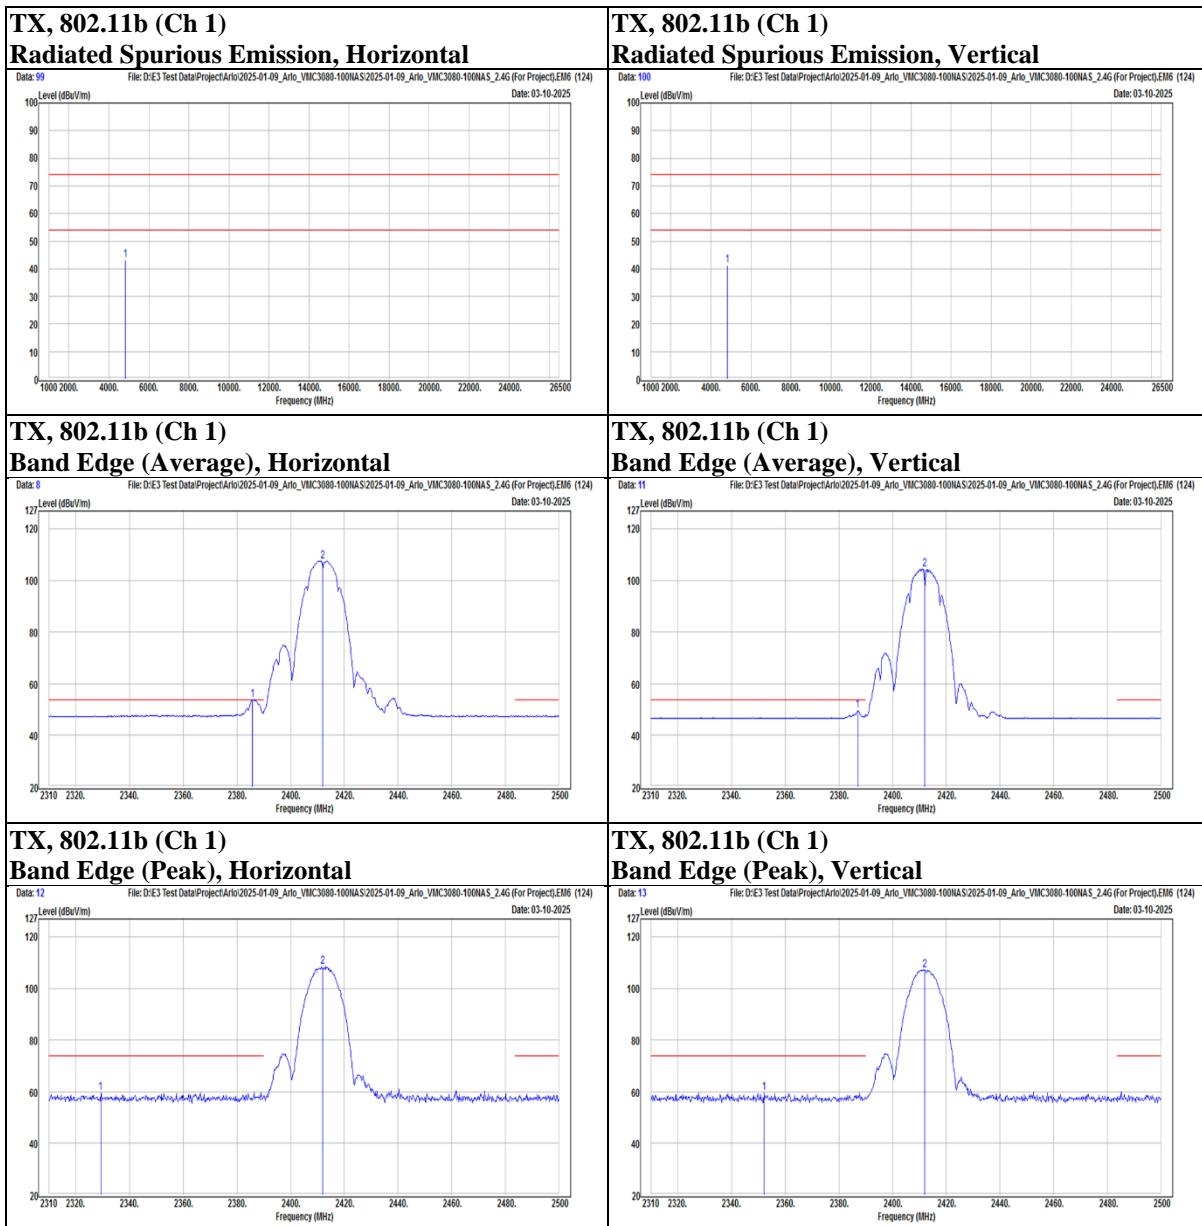

**Underwriters Laboratories Taiwan Co., Ltd.**

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

Mode	802.11b	Channel	6
------	---------	---------	---

Polarization	Notation	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
Horizontal		2380.49	41.1	19.23	60.33	74	-13.67	PK
		2389.61	30.01	19.17	49.18	54	-4.82	AVG
	@	2437	94.73	19.18	113.91	N/A	N/A	PK
	@	2437	91.33	19.18	110.51	N/A	N/A	AVG
		2484.61	31.14	19.19	50.33	54	-3.67	AVG
		2494.3	39.88	19.19	59.07	74	-14.93	PK
	*	4874	46.9	2.66	49.56	74	-24.44	PK
		7311	40.34	10.57	50.91	74	-23.09	PK
		7311	34.16	10.57	44.73	54	-9.27	AVG
Vertical		2337.17	40.69	19.37	60.06	74	-13.94	PK
		2389.8	27.89	19.17	47.06	54	-6.94	AVG
	@	2437	90.91	19.18	110.09	N/A	N/A	PK
	@	2437	87.97	19.18	107.15	N/A	N/A	AVG
		2484.8	28.52	19.19	47.71	54	-6.29	AVG
		2493.92	39.65	19.19	58.84	74	-15.16	PK
	*	4874	44.13	2.66	46.79	74	-27.21	PK
		7311	36.59	10.57	47.16	74	-26.84	PK
		7311	30.69	10.57	41.26	54	-12.74	AVG


### Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

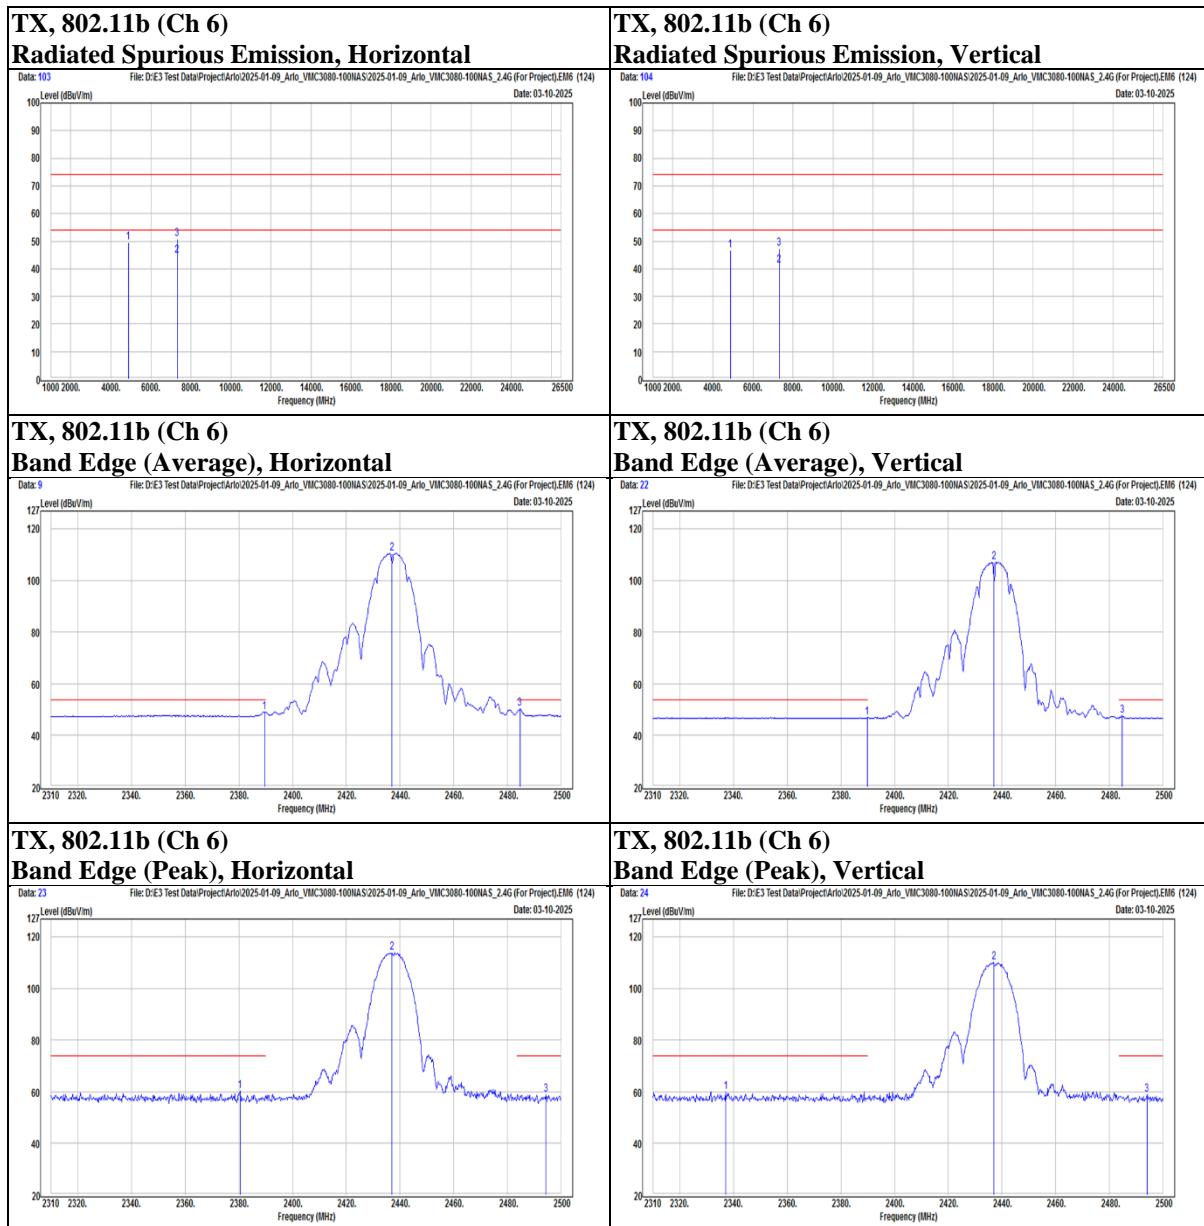

### Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

Mode	802.11b	Channel	10
------	---------	---------	----

Polarization	Notation	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
Horizontal	@	2457	92.1	19.2	111.3	N/A	N/A	PK
	@	2457	88.99	19.2	108.19	N/A	N/A	AVG
		2483.5	33.8	19.19	52.99	54	-1.01	AVG
		2483.66	40.87	19.19	60.06	74	-13.94	PK
	*	4914	41.68	2.71	44.39	74	-29.61	PK
	*	7371	36.62	10.66	47.28	74	-26.72	PK
Vertical	@	2457	90.12	19.2	109.32	N/A	N/A	PK
	@	2457	87.43	19.2	106.63	N/A	N/A	AVG
		2483.66	30.91	19.19	50.1	54	-3.9	AVG
		2499.62	40.3	19.19	59.49	74	-14.51	PK
	*	4914	40.61	2.71	43.32	74	-30.68	PK
	*	7371	35.55	10.66	46.21	74	-27.79	PK


**Underwriters Laboratories Taiwan Co., Ltd.**

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

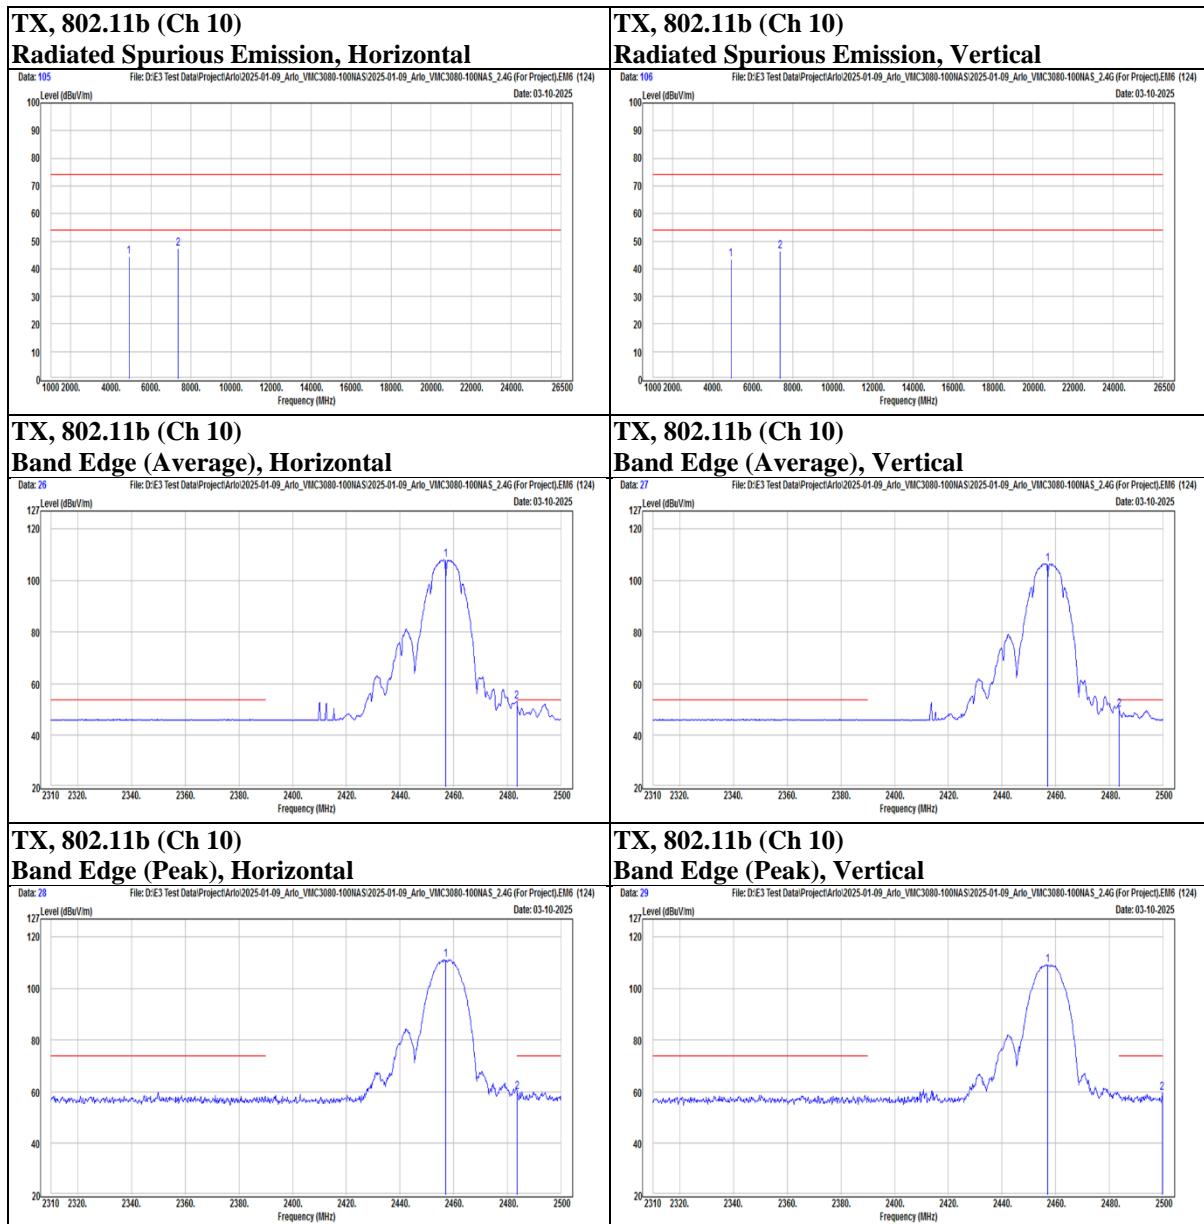

**Underwriters Laboratories Taiwan Co., Ltd.**

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

Mode	802.11b	Channel	11
------	---------	---------	----

Polarization	Notation	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
Horizontal	@	2462	91.77	19.19	110.96	N/A	N/A	PK
	@	2462	87.46	19.19	106.65	N/A	N/A	AVG
		2487.84	34.53	19.19	53.72	54	-0.28	AVG
		2488.22	40.75	19.19	59.94	74	-14.06	PK
	*	4924	39.79	2.72	42.51	74	-31.49	PK
	*	7386	35.4	10.71	46.11	74	-27.89	PK
Vertical	@	2462	88.79	19.19	107.98	N/A	N/A	PK
	@	2462	87.48	19.19	106.67	N/A	N/A	AVG
		2483.66	32.35	19.19	51.54	54	-2.46	AVG
		2498.48	39.5	19.19	58.69	74	-15.31	PK
	*	4924	38.11	2.72	40.83	74	-33.17	PK
	*	7386	33.94	10.71	44.65	74	-29.35	PK


### Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

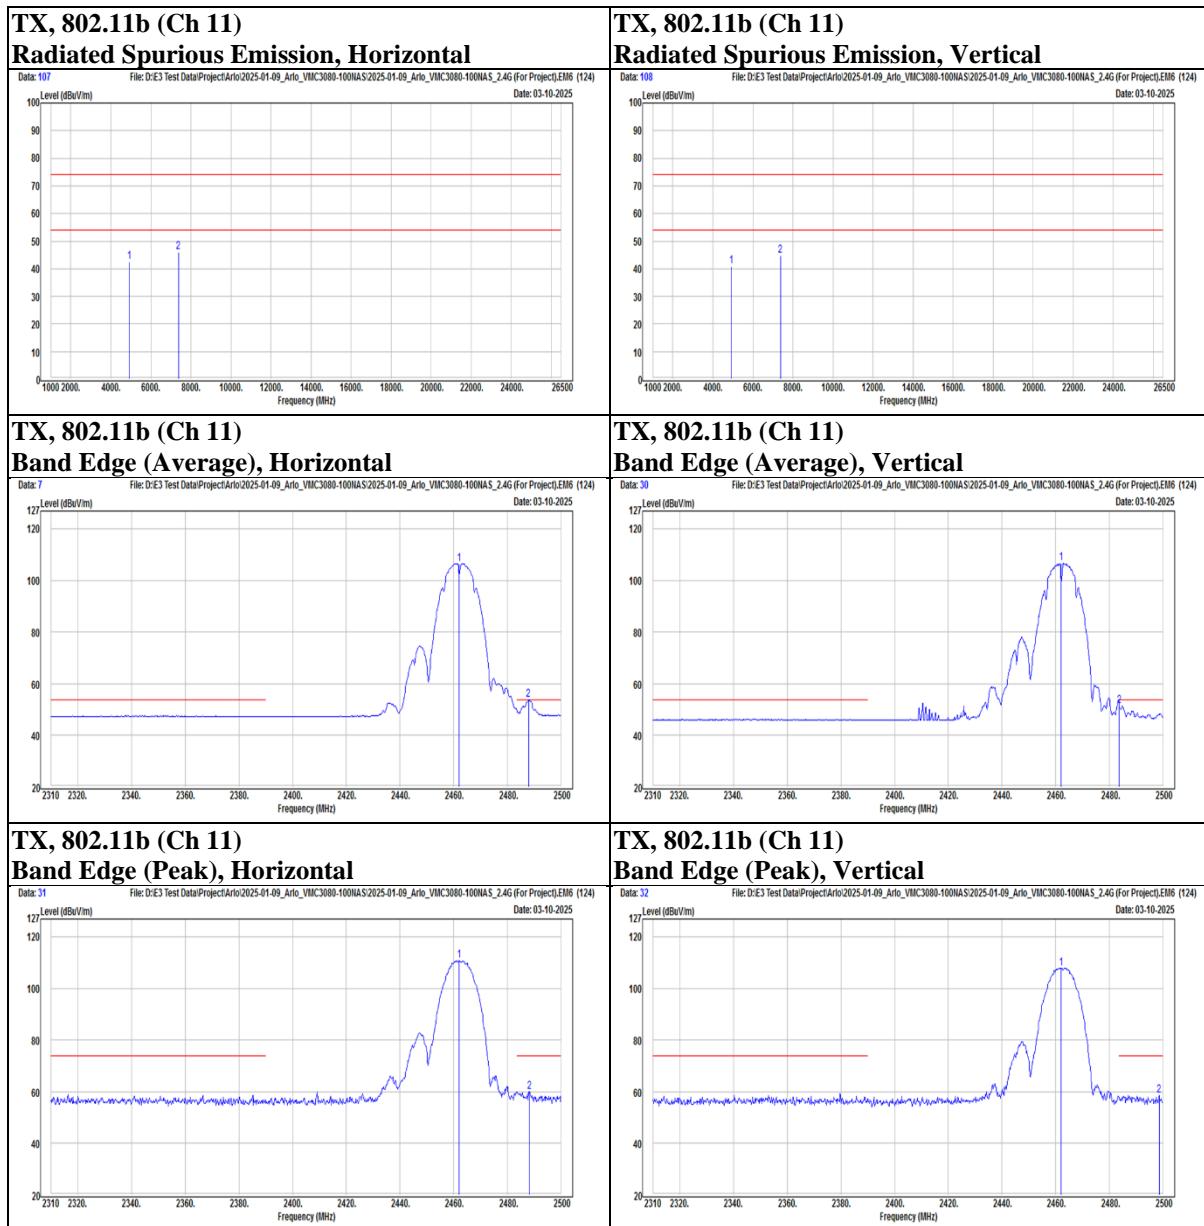

**Underwriters Laboratories Taiwan Co., Ltd.**

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

Mode	802.11g	Channel	1
------	---------	---------	---

Polarization	Notation	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
Horizontal		2389.23	43.43	19.18	62.61	74	-11.39	PK
		2389.99	34.62	19.17	53.79	54	-0.21	AVG
	@	2412	87.58	19.14	106.72	N/A	N/A	PK
	@	2412	85.21	19.14	104.35	N/A	N/A	AVG
	*	4824	35.97	2.63	38.6	74	-35.4	PK
Vertical		2389.99	48.23	19.17	67.4	74	-6.6	PK
		2389.99	31.66	19.17	50.83	54	-3.17	AVG
	@	2412	89.57	19.14	108.71	N/A	N/A	PK
	@	2412	80.78	19.14	99.92	N/A	N/A	AVG
	*	4824	35.28	2.63	37.91	74	-36.09	PK


**Underwriters Laboratories Taiwan Co., Ltd.**

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

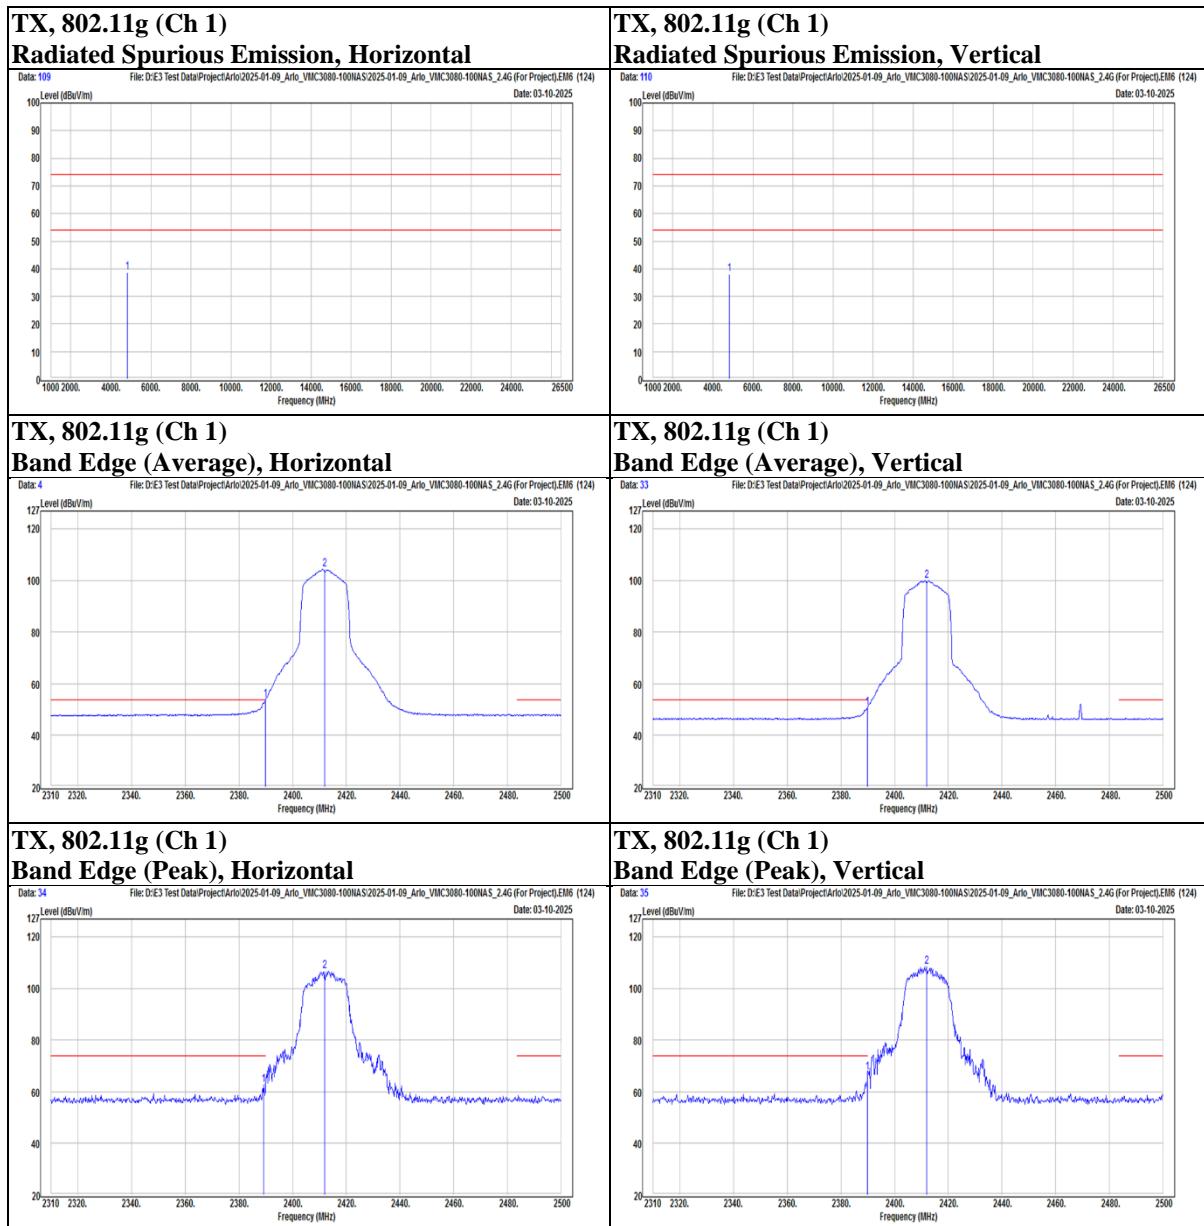

**Underwriters Laboratories Taiwan Co., Ltd.**

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

Mode	802.11g	Channel	6
------	---------	---------	---

Polarization	Notation	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
Horizontal		2387.33	45.56	19.19	64.75	74	-9.25	PK
		2389.8	31.47	19.17	50.64	54	-3.36	AVG
	@	2437	96.92	19.18	116.1	N/A	N/A	PK
	@	2437	90.59	19.18	109.77	N/A	N/A	AVG
		2483.66	33.34	19.19	52.53	54	-1.47	AVG
		2487.08	48.98	19.19	68.17	74	-5.83	PK
	*	4874	42.55	2.66	45.21	74	-28.79	PK
		7311	42.87	10.57	53.44	74	-20.56	PK
		7311	30.29	10.57	40.86	54	-13.14	AVG
Vertical		2363.2	29.17	19.32	48.49	54	-5.51	AVG
		2387.71	45.83	19.19	65.02	74	-8.98	PK
	@	2437	94.72	19.18	113.9	N/A	N/A	PK
	@	2437	85.86	19.18	105.04	N/A	N/A	AVG
		2483.66	29.61	19.19	48.8	54	-5.2	AVG
		2487.46	45.75	19.2	64.95	74	-9.05	PK
	*	4874	42.27	2.66	44.93	74	-29.07	PK
		7311	40.32	10.57	50.89	74	-23.11	PK
		7311	27.25	10.57	37.82	54	-16.18	AVG


### Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

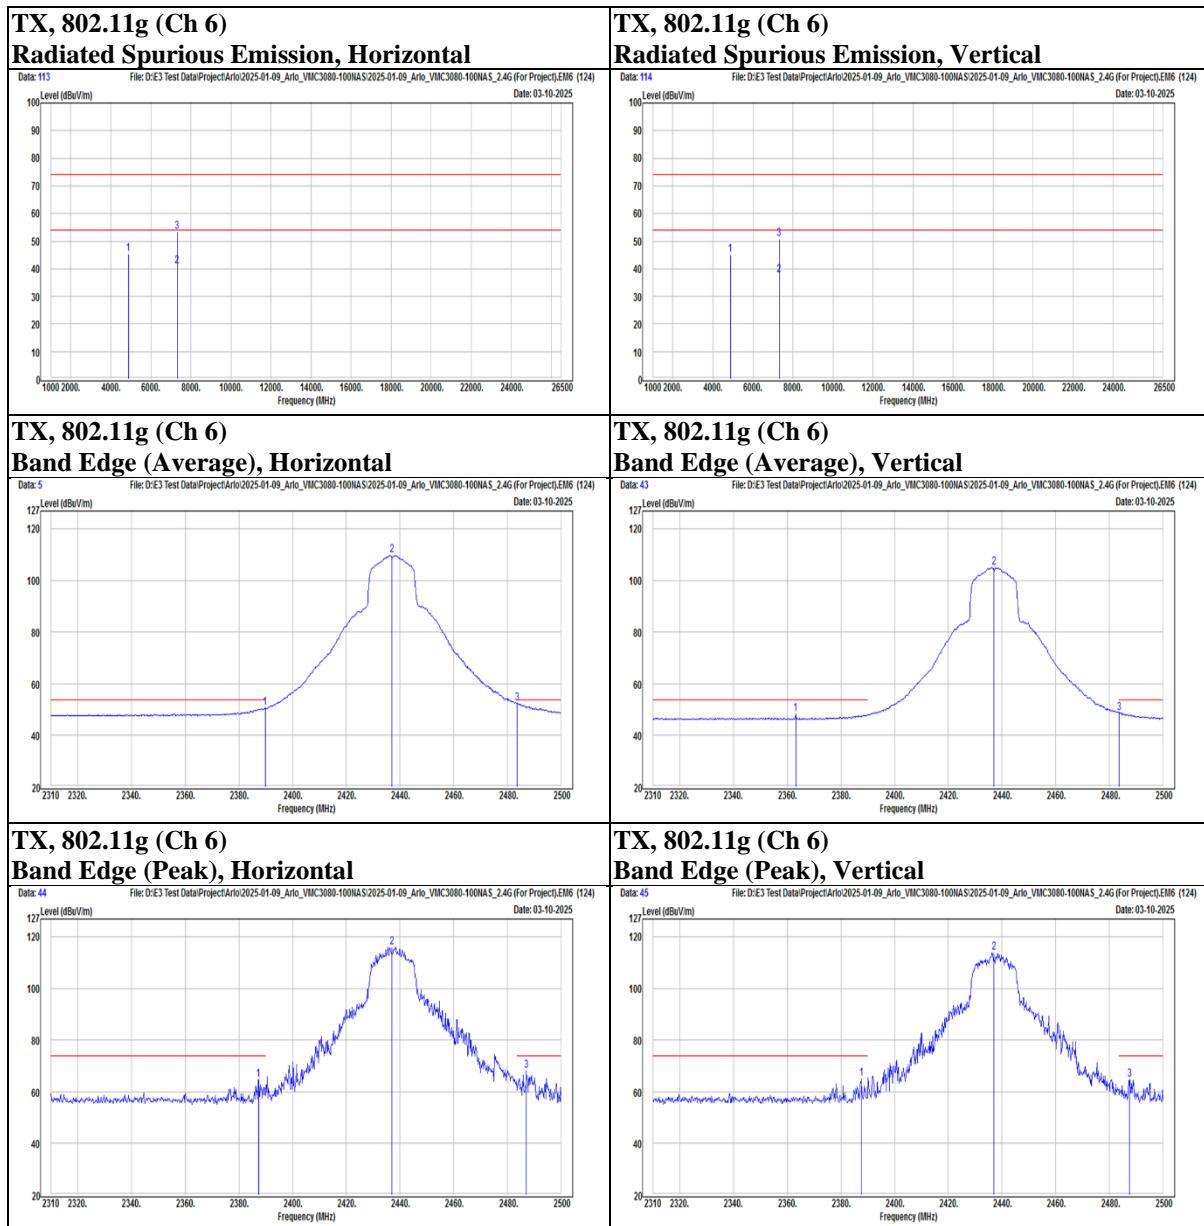

### Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

Mode	802.11g	Channel	11
------	---------	---------	----

Polarization	Notation	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
Horizontal	@	2462	91.01	19.19	110.2	N/A	N/A	PK
	@	2462	83.51	19.19	102.7	N/A	N/A	AVG
		2483.66	34.27	19.19	53.46	54	-0.54	AVG
		2483.85	46.71	19.19	65.9	74	-8.1	PK
	*	4924	34.8	2.72	37.52	74	-36.48	PK
	*	7386	34.41	10.71	45.12	74	-28.88	PK
Vertical	@	2462	89.39	19.19	108.58	N/A	N/A	PK
	@	2462	80.56	19.19	99.75	N/A	N/A	AVG
		2483.66	47.71	19.19	66.9	74	-7.1	PK
		2483.66	31.12	19.19	50.31	54	-3.69	AVG
	*	4924	35.35	2.72	38.07	74	-35.93	PK
	*	7386	34.15	10.71	44.86	74	-29.14	PK


### Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

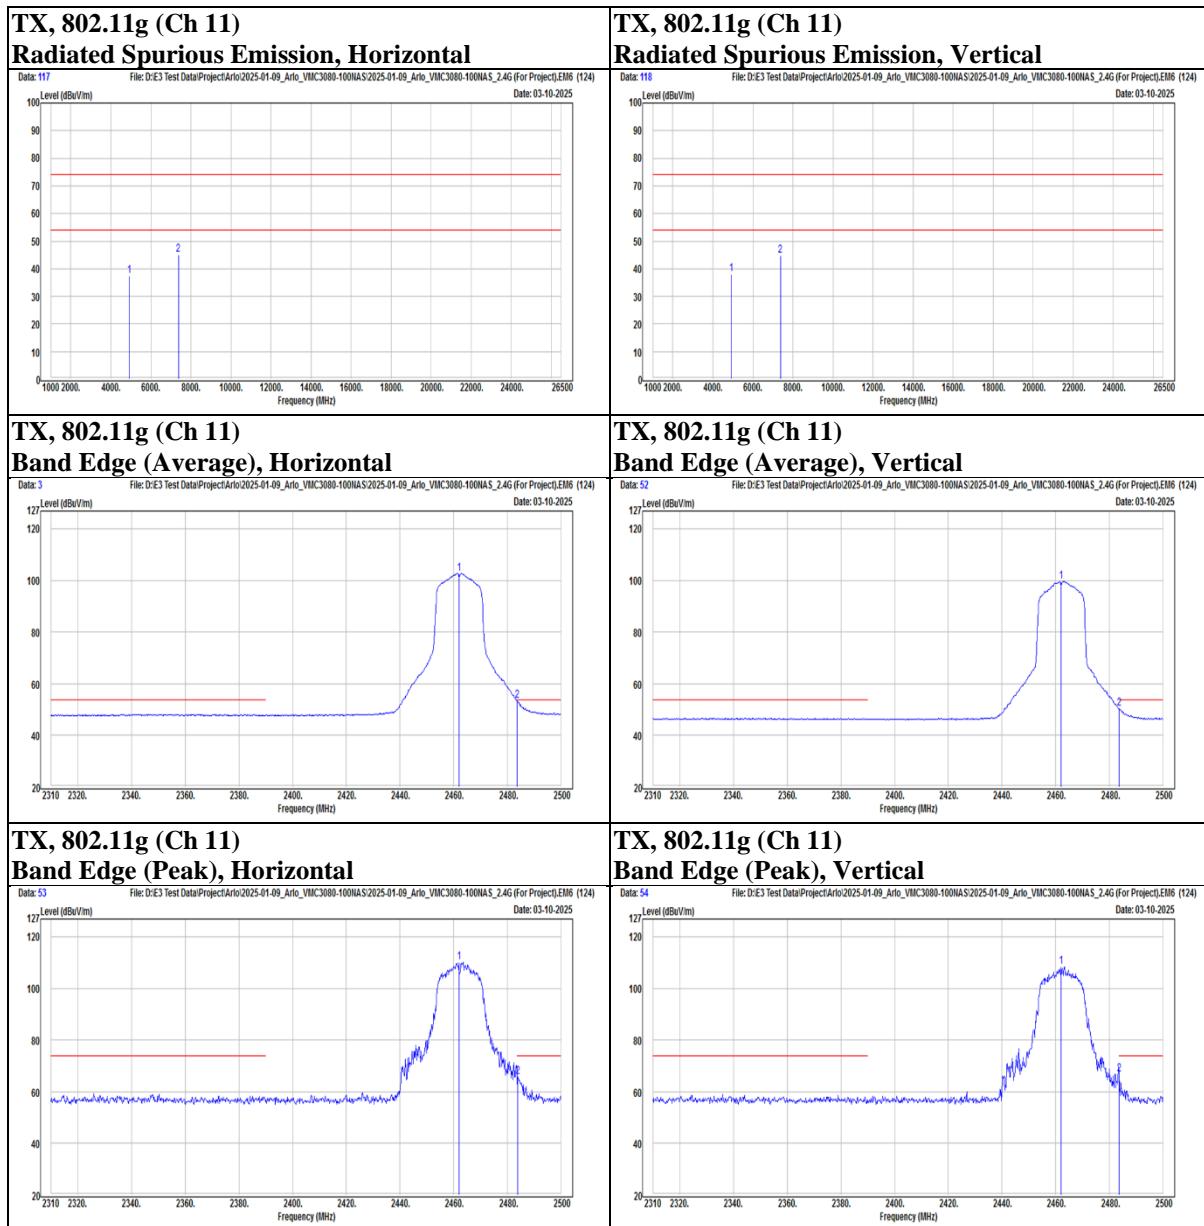

**Underwriters Laboratories Taiwan Co., Ltd.**

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan


Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

Mode	802.11n(HT20)	Channel	1
------	---------------	---------	---

Polarization	Notation	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
Horizontal		2389.42	44.89	19.17	64.06	74	-9.94	PK
		2389.99	34.69	19.17	53.86	54	-0.14	AVG
	@	2412	88.32	19.14	107.46	N/A	N/A	PK
	@	2412	83.72	19.14	102.86	N/A	N/A	AVG
Vertical		2389.8	45.34	19.17	64.51	74	-9.49	PK
		2389.99	31.97	19.17	51.14	54	-2.86	AVG
	@	2412	88.53	19.14	107.67	N/A	N/A	PK
	@	2412	80.37	19.14	99.51	N/A	N/A	AVG

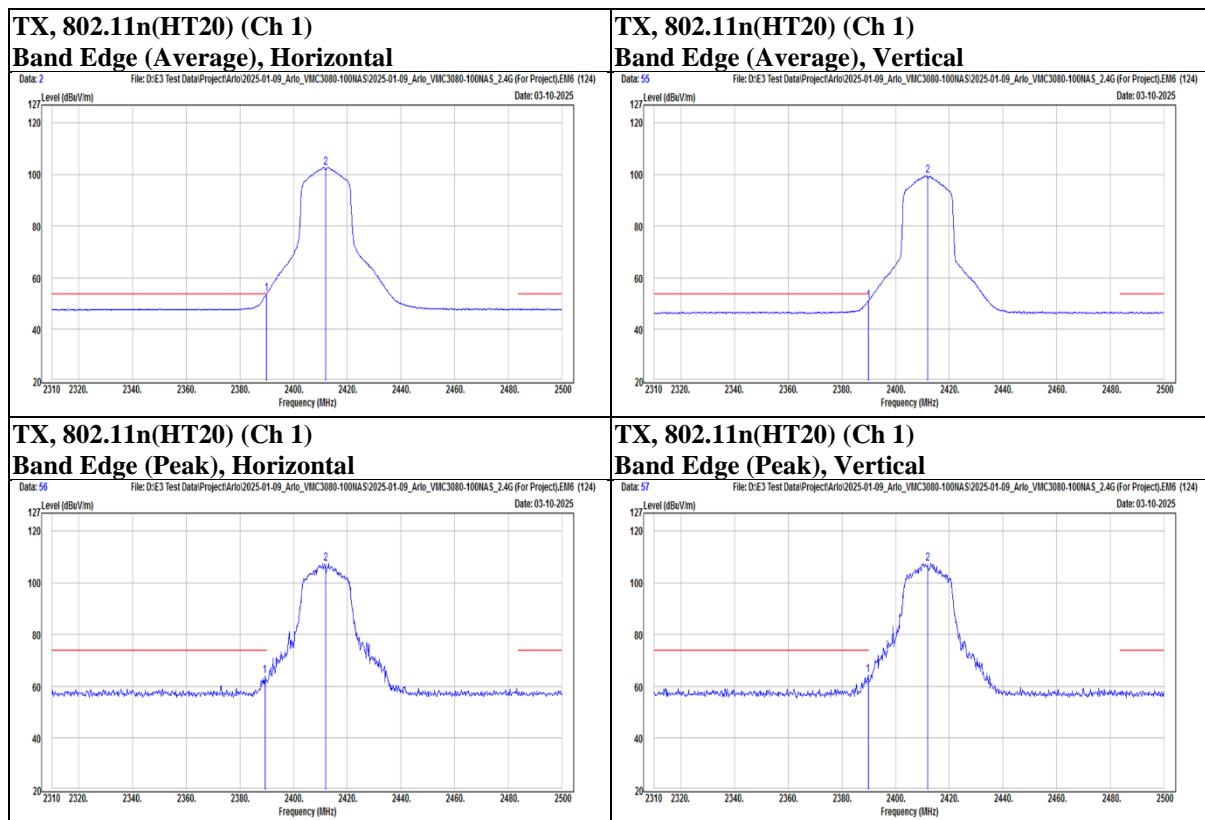

## Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan


Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

Mode	802.11n(HT20)	Channel	6
------	---------------	---------	---

Polarization	Notation	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
Horizontal		2388.66	42.75	19.18	61.93	74	-12.07	PK
		2389.8	31.97	19.17	51.14	54	-2.86	AVG
	@	2437	96.69	19.18	115.87	N/A	N/A	PK
	@	2437	90.35	19.18	109.53	N/A	N/A	AVG
		2483.85	33.89	19.19	53.08	54	-0.92	AVG
		2486.7	46.6	19.19	65.79	74	-8.21	PK
Vertical		2389.04	43.35	19.18	62.53	74	-11.47	PK
		2389.99	29.59	19.17	48.76	54	-5.24	AVG
	@	2437	94.46	19.18	113.64	N/A	N/A	PK
	@	2437	85.71	19.18	104.89	N/A	N/A	AVG
		2483.66	30.51	19.19	49.7	54	-4.3	AVG
		2487.84	43.96	19.19	63.15	74	-10.85	PK

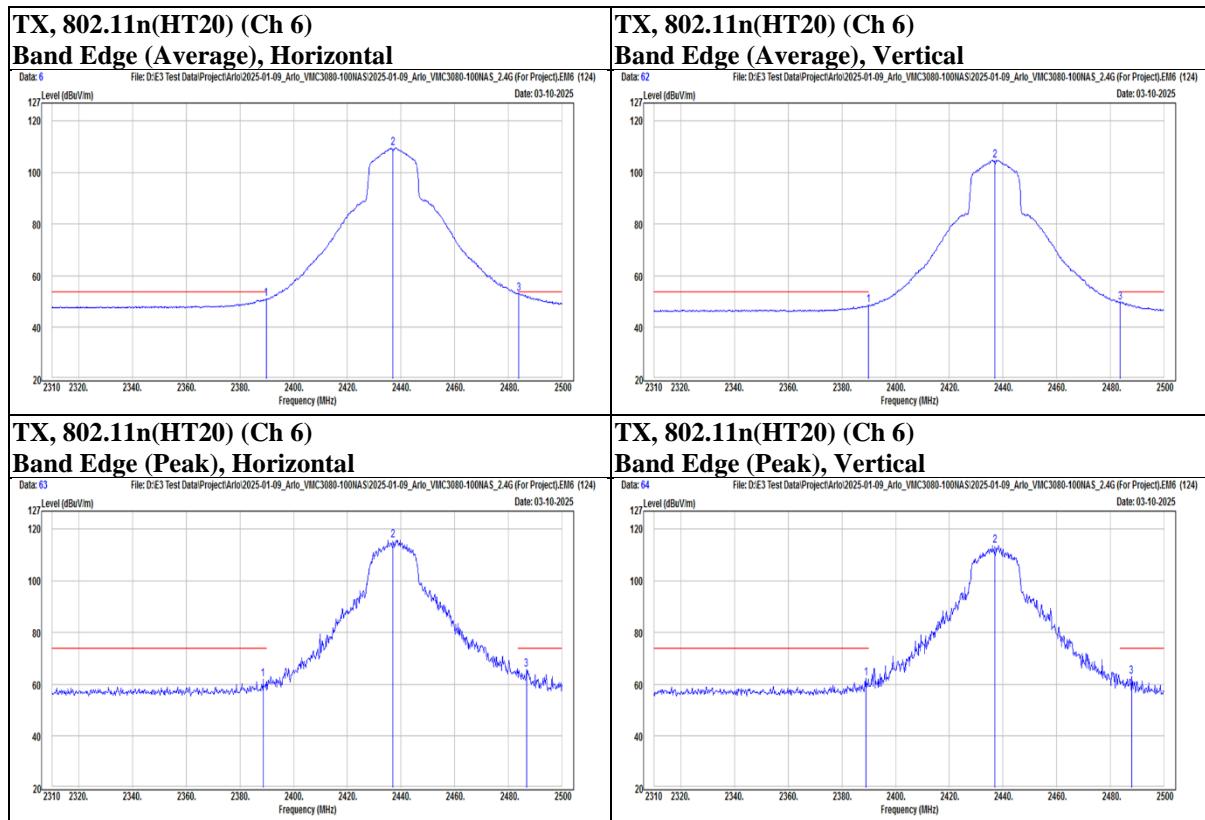

### Underwriters Laboratories Taiwan Co., Ltd.


Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Mode	802.11n(HT20)	Channel	11
------	---------------	---------	----

Polarization	Notation	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
Horizontal	@	2462	89.03	19.19	108.22	N/A	N/A	PK
	@	2462	83.38	19.19	102.57	N/A	N/A	AVG
		2483.66	43.03	19.19	62.22	74	-11.78	PK
		2483.66	34.6	19.19	53.79	54	-0.21	AVG
Vertical	@	2462	87.97	19.19	107.16	N/A	N/A	PK
	@	2462	79.72	19.19	98.91	N/A	N/A	AVG
		2483.66	43.62	19.19	62.81	74	-11.19	PK
		2483.66	31.41	19.19	50.6	54	-3.4	AVG

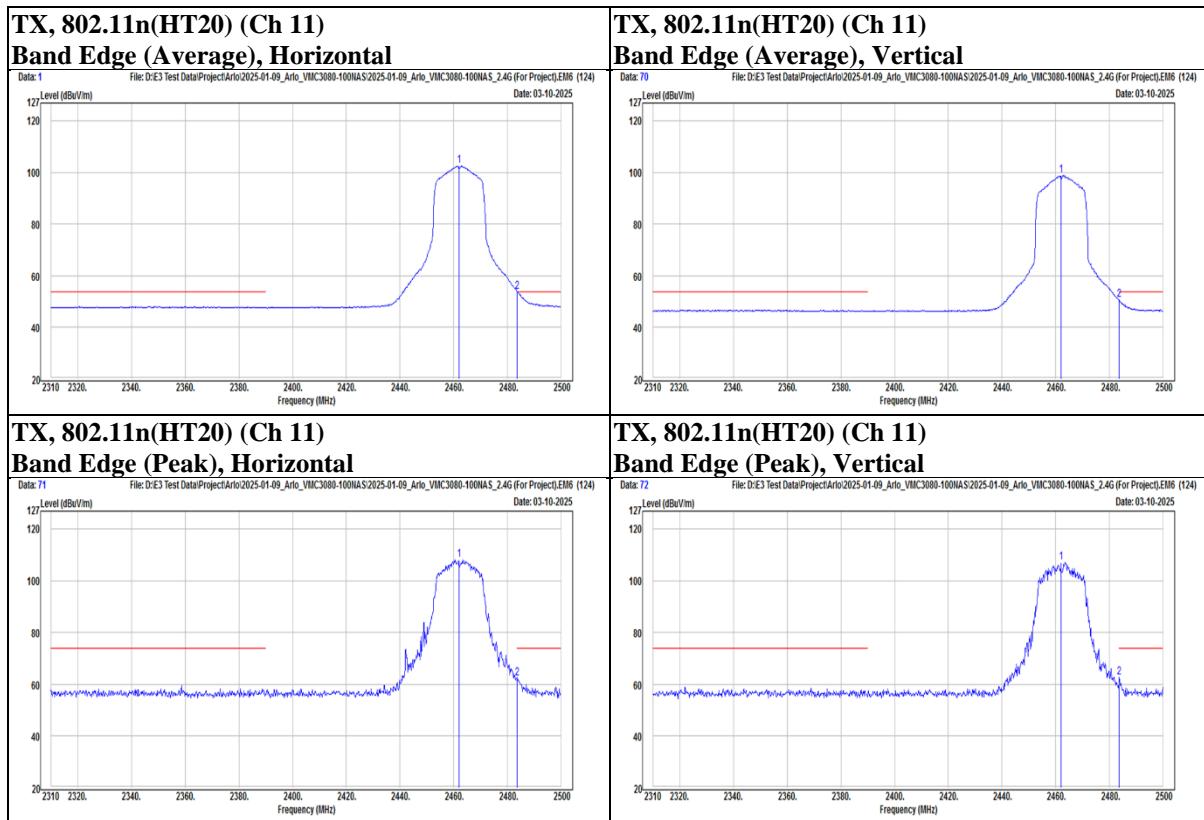
**Underwriters Laboratories Taiwan Co., Ltd.**

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000


Facsimile (FAX) :+886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

**Below 1 GHz**

Mode	802.11b	Channel	6
------	---------	---------	---

Polarization	Notation	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
Horizontal		53.28	35.5	-11.61	23.89	40	-16.11	PK
		179.38	43.28	-12.72	30.56	43.5	-12.94	PK
		205.57	46.24	-14.7	31.54	43.5	-11.96	PK
		244.37	48.68	-12.46	36.22	46	-9.78	PK
		296.75	38.38	-10.5	27.88	46	-18.12	PK
		515.97	42.66	-4.51	38.15	46	-7.85	PK
Vertical		67.83	39.35	-12.89	26.46	40	-13.54	PK
		148.34	42.18	-11.96	30.22	43.5	-13.28	PK
		199.75	42.74	-14.64	28.1	43.5	-15.4	PK
		237.58	42.09	-12.92	29.17	46	-16.83	PK
		296.75	38.78	-10.5	28.28	46	-17.72	PK
		517.91	38.38	-4.42	33.96	46	-12.04	PK

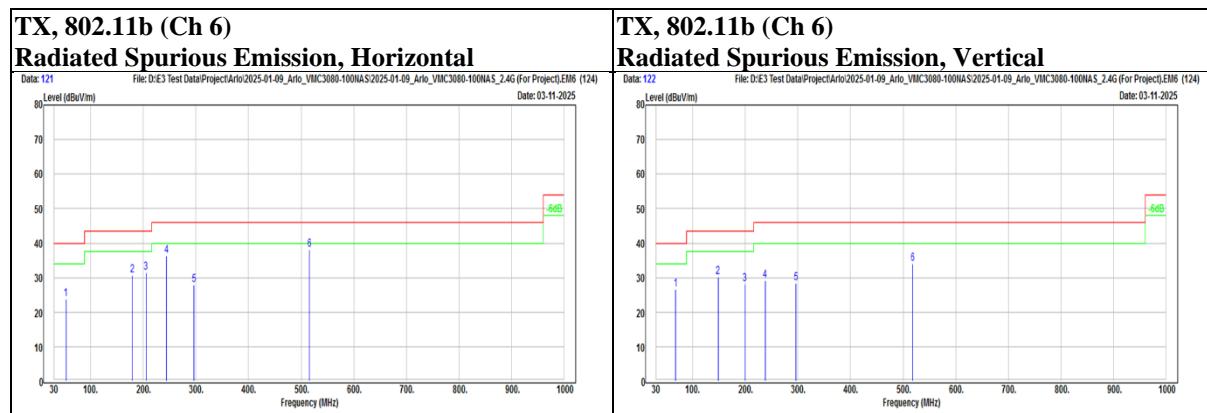
**Underwriters Laboratories Taiwan Co., Ltd.**

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

**9 kHz ~ 30 MHz Data:**

For 9 kHz to 30 MHz radiated emission have performed all modes of operation were investigated. The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.

No non-compliance noted:

**KDB 414788 D01 OATS and Chamber Correlation Justification**

- Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.
- OATs and chamber correlation testing had been performed and chamber measured test results is the worst case test result.

Although these tests were performed other than open area test site, adequate comparison measurements were confirmed against 30m open area test site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.

**Underwriters Laboratories Taiwan Co., Ltd.**

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

## 9.6. AC Power Line Conducted Emission

### Requirements

Frequency (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note:

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

### Test Procedures

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.
2. All modes of operation were investigated (includes all external accessories) and the worst-case emissions are reported, the other emission levels were low against the limit.
3. Test data of Result value (dB $\mu$ V) = Reading value (dB $\mu$ V) + Correction Factor (dB).
4. Test data of Margin(dB) = Result value (dB $\mu$ V) - Limit value (dB $\mu$ V).
5. Test data of Correction Factor (dB) = Insertion loss(dB) + Cable loss(dB).

### **Underwriters Laboratories Taiwan Co., Ltd.**


Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

## Test Setup

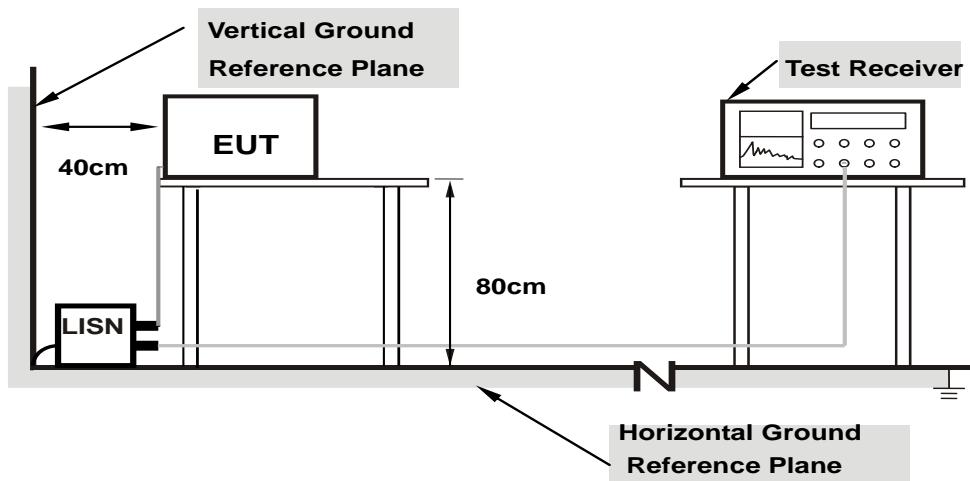

**Note: 1. Support units were connected to second LISN.**

For the actual test configuration, please refer to the Setup Configurations.

## **Underwriters Laboratories Taiwan Co., Ltd.**

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan


Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

## Test Data

Mode	G_TX2437	Channel	6
------	----------	---------	---

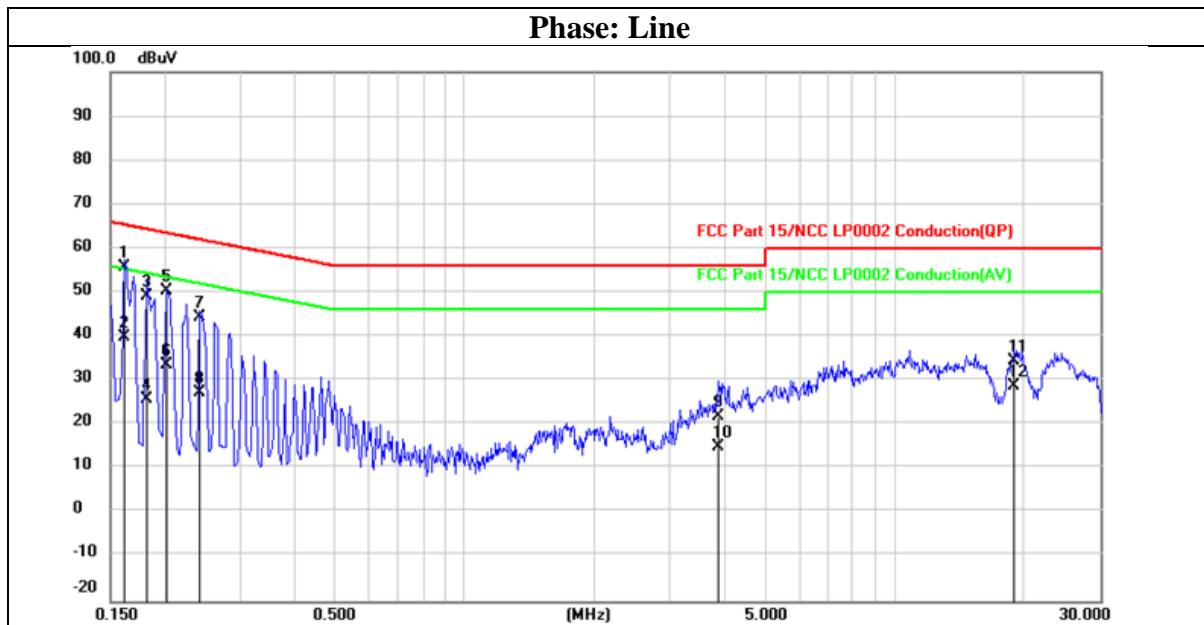

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dB)	
1	0.1620	45.81	9.96	55.77	65.36	-9.59	QP
2	0.1620	29.78	9.96	39.74	55.36	-15.62	AVG
3	0.1819	39.27	9.96	49.23	64.40	-15.17	QP
4	0.1819	15.85	9.96	25.81	54.40	-28.59	AVG
5	0.2020	40.44	9.96	50.40	63.53	-13.13	QP
6	0.2020	23.61	9.96	33.57	53.53	-19.96	AVG
7	0.2420	34.49	9.96	44.45	62.03	-17.58	QP
8	0.2420	17.31	9.96	27.27	52.03	-24.76	AVG
9	3.8820	11.66	10.09	21.75	56.00	-34.25	QP
10	3.8820	4.79	10.09	14.88	46.00	-31.12	AVG
11	18.9820	23.81	10.50	34.31	60.00	-25.69	QP
12	18.9820	18.38	10.50	28.88	50.00	-21.12	AVG

### **Underwriters Laboratories Taiwan Co., Ltd.**


Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

Mode	G_TX2437	Channel	6
------	----------	---------	---

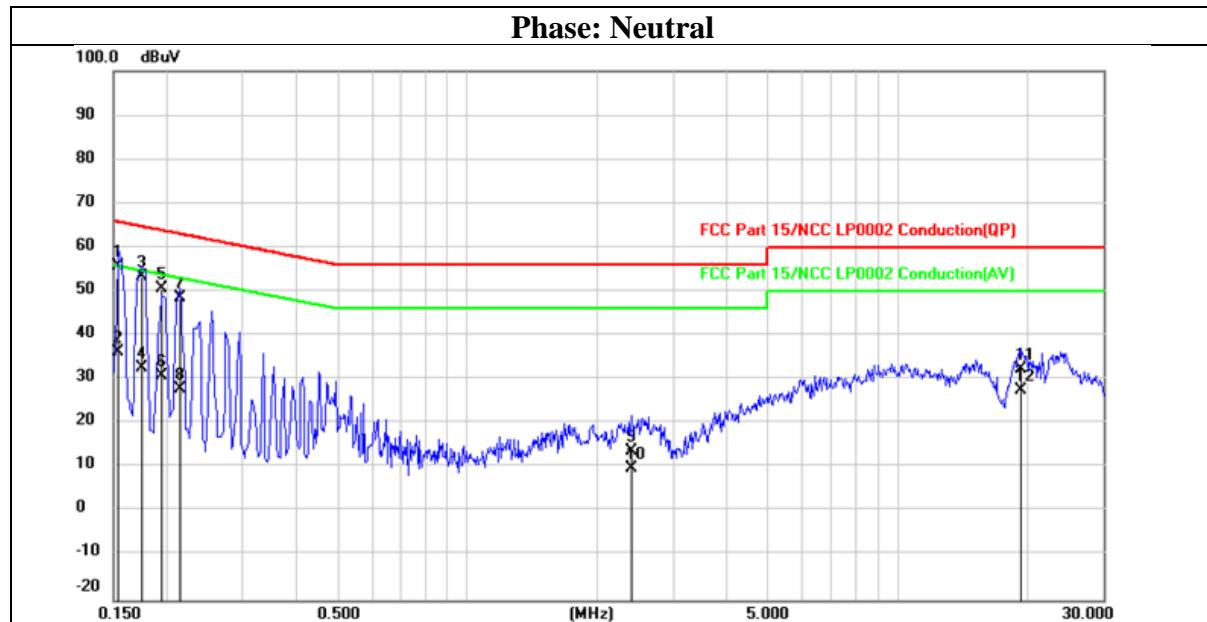

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dB)	
1	0.1539	45.80	9.94	55.74	65.79	-10.05	QP
2	0.1539	26.25	9.94	36.19	55.79	-19.60	AVG
3	0.1740	43.37	9.94	53.31	64.77	-11.46	QP
4	0.1740	22.84	9.94	32.78	54.77	-21.99	AVG
5	0.1940	40.71	9.94	50.65	63.86	-13.21	QP
6	0.1940	21.01	9.94	30.95	53.86	-22.91	AVG
7	0.2140	38.74	9.94	48.68	63.05	-14.37	QP
8	0.2140	18.06	9.94	28.00	53.05	-25.05	AVG
9	2.4060	3.73	10.01	13.74	56.00	-42.26	QP
10	2.4060	-0.22	10.01	9.79	46.00	-36.21	AVG
11	19.3540	21.96	10.48	32.44	60.00	-27.56	QP
12	19.3540	16.95	10.48	27.43	50.00	-22.57	AVG

## END OF REPORT

**Underwriters Laboratories Taiwan Co., Ltd.**

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone : +886-2-7737-3000

Facsimile (FAX) : +886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1