

# FCC Part 15C


## Measurement and Test Report

### For

**Shenzhen DOKE Electronic Co., Ltd**

**13th Floor, Weidonglong commercial building B, Meilong avenue, Longhua  
New District, Shenzhen, China.**

**FCC ID: 2APMJBV9500**

<b>FCC Rule(s):</b>	<u>FCC Part 15.225</u>
<b>Product Description:</b>	<u>Smart phone</u>
<b>Tested Model:</b>	<u>BV9500</u>
<b>Report No.:</b>	<u>STR18078280I-7</u>
<b>Sample Receipt Date:</b>	<u>2018-07-25</u>
<b>Tested Date:</b>	<u>2018-07-26 to 2018-08-28</u>
<b>Issued Date:</b>	<u>2018-08-28</u>
<b>Tested By:</b>	<u>Jason Su / Engineer</u> 
<b>Reviewed By:</b>	<u>Silin Chen / EMC Manager</u> 
<b>Approved &amp; Authorized By:</b>	<u>Jandy so / PSQ Manager</u> 
<b>Prepared By:</b>	<p><b>Shenzhen SEM Test Technology Co., Ltd.</b> 1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road, Bao'an District, Shenzhen, P.R.C. (518101) Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: <a href="http://www.semtest.com.cn">www.semtest.com.cn</a></p>

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permission by Shenzhen SEM Test Technology Co., Ltd.

## **TABLE OF CONTENTS**

<b>1. GENERAL INFORMATION .....</b>	<b>3</b>
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	3
1.2 TEST STANDARDS.....	4
1.3 TEST METHODOLOGY .....	4
1.4 TEST FACILITY .....	4
1.5 EUT SETUP AND TEST MODE .....	5
1.6 MEASUREMENT UNCERTAINTY .....	5
1.7 TEST EQUIPMENT LIST AND DETAILS .....	6
<b>2. SUMMARY OF TEST RESULTS .....</b>	<b>7</b>
<b>3. ANTENNA REQUIREMENT .....</b>	<b>8</b>
3.1 STANDARD APPLICABLE.....	8
3.2 TEST RESULT.....	8
<b>4. RADIATED EMISSIONS.....</b>	<b>9</b>
4.1 STANDARD APPLICABLE.....	9
4.2 TEST PROCEDURE.....	9
4.3 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	10
4.4 SUMMARY OF TEST RESULTS/PLOTS .....	11
<b>5. OUT OF BAND EMISSIONS.....</b>	<b>14</b>
5.1 STANDARD APPLICABLE.....	14
5.2 TEST PROCEDURE.....	14
5.3 SUMMARY OF TEST RESULTS/PLOTS .....	14
<b>6. FREQUENCY STABILITY .....</b>	<b>16</b>
6.1 STANDARD APPLICABLE.....	16
6.2 TEST PROCEDURE.....	16
6.3 SUMMARY OF TEST RESULTS/PLOTS .....	16
<b>7. CONDUCTED EMISSIONS .....</b>	<b>17</b>
7.1 TEST PROCEDURE.....	17
7.2 BASIC TEST SETUP BLOCK DIAGRAM.....	17
7.3 TEST RECEIVER SETUP .....	17
7.4 SUMMARY OF TEST RESULTS/PLOTS .....	17
<b>8. EMISSION BANDWIDTH.....</b>	<b>20</b>
8.1 APPLICABLE STANDARD.....	20
8.2 TEST PROCEDURE.....	20
8.3 SUMMARY OF TEST RESULTS/PLOTS .....	20

## 1. GENERAL INFORMATION

### 1.1 Product Description for Equipment Under Test (EUT)

#### Client Information

Applicant: Shenzhen DOKE Electronic Co., Ltd  
Address of applicant: 13th Floor, Weidonglong commercial building B, Meilong avenue, Longhua New District, Shenzhen, China.

Manufacturer: Shenzhen DOKE Electronic Co., Ltd  
Address of manufacturer: 13th Floor, Weidonglong commercial building B, Meilong avenue, Longhua New District, Shenzhen, China.

<b>General Description of EUT</b>	
Product Name:	Smart phone
Trade Name:	Blackview
Model No.:	BV9500
Adding Model(s):	BV9500PRO
Rated Voltage:	DC 3.85V by Battery
Battery Capacity:	10000mAh
Power Adapter:	Model: HJ-FC018K7-US Input:AC100-240V 50/60Hz 0.6A; Output: DC5V 7V 9V 2A
<i>The EUT Main board support GSM850/PCS1900, WCDMA Band 2/4/5, FDD LTE Band 2/4/5/7/12/13/17/25, TDD LTE Band 38/40/41 function. It is intended for speech, Multimedia Message Service (MMS) transmission. It is equipped with GPRS/EDGE class 12 for GSM850/PCS1900, GPS, FM, NFC, Bluetooth and Wi-Fi functions. For more information see the following datasheet.</i>	
<i>Note: The test data is gathered from a production sample, provided by the manufacturer. The appearance of others models listed in the report is different from main-test model BV9500, but the circuit and the electronic construction do not change, declared by the manufacturer.</i>	

<b>Technical Characteristics of EUT</b>	
Support Standards:	NFC
Frequency Range:	13.56MHz
Max. Field Strength:	67.15dBuV/m (at 3m)
Antenna Type:	Integral Antenna
Lowest Internal Frequency of EUT:	13.56MHz

## 1.2 Test Standards

The tests were performed according to following standards:

**FCC Rules Part 15.225:** Operation within the band 13.110-14.010 MHz.

**ANSI C63.10-2013:** American National Standard for Testing Unlicensed Wireless Devices.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission/immunity, should be checked to ensure compliance has been maintained.

## 1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013,

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

## 1.4 Test Facility

### FCC – Registration No.: 125990

Shenzhen SEM Test Technology Co., Ltd. Laboratory has been recognized to perform compliance testing on equipment subject to the Commissions Declaration Of Conformity (DOC). The Designation Number is CN5010, and Test Firm Registration Number is 125990.

### Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Shenzhen SEM.Test Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

## 1.5 EUT Setup and Test Mode

The EUT was operated in the continuous transmitting mode that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	Transmitting	13.56MHz

Test Conditions	
Temperature:	24 °C
Relative humidity	53 %.
ATM Pressure:	1019 mbar

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
USB Cable	1.0	Shielded	Without Core
Earphone	1.2	Unshielded	Without Core

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
/	/	/	/

## 1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
Frequency Deviation	2.3%	±5%
Conducted Emissions	Conducted	9-150kHz ±3.74dB 0.15-30MHz ±3.34dB
Transmitter Spurious Emissions	Radiated	30-200MHz ±4.52dB 0.2-1GHz ±5.56dB 1-6GHz ±3.84dB 6-18GHz ±3.92dB

## 1.7 Test Equipment List and Details

No.	Description	Manufacturer	Model	Serial No.	Cal Date	Due Date
SEMT-1072	Spectrum Analyzer	Agilent	E4407B	MY41440400	2018-05-22	2019-05-21
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2018-05-22	2019-05-21
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2018-05-22	2019-05-21
SEMT-1008	Amplifier	Agilent	8447F	3113A06717	2018-05-22	2019-05-21
SEMT-1011	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2017-06-08	2020-06-07
SEMT-1042	Horn Antenna	ETS	3117	00086197	2017-06-08	2020-06-07
SEMT-1069	Loop Antenna	Schwarz beck	FMZB 1516	9773	2017-06-08	2020-06-07
SEMT-1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2018-05-22	2019-05-21
SEMT-1003	L.I.S.N	Schwarz beck	NSLK8126	8126-224	2018-05-22	2019-05-21
SEMT-1166	Power Limiter	Agilent	N9356B	MY45450376	2018-05-22	2019-05-21
SEMT-1048	RF Limiter	ATTEN	AT-BSF-2400~2500	/	2018-05-22	2019-05-21
SEMT-1076	RF Switcher	Top Precision	RCS03-A2	/	2018-05-22	2019-05-21
SEMT-C001	Cable	Zheng DI	LL142-07-07-10M(A)	/	2018-03-19	2019-03-18
SEMT-C002	Cable	Zheng DI	ZT40-2.92J-2.92J-6M	/	2018-03-19	2019-03-18
SEMT-C003	Cable	Zheng DI	ZT40-2.92J-2.92J-2.5M	/	2018-03-19	2019-03-18
SEMT-C004	Cable	Zheng DI	2M0RFC	/	2018-03-19	2019-03-18
SEMT-C005	Cable	Zheng DI	1M0RFC	/	2018-03-19	2019-03-18
SEMT-C006	Cable	Zheng DI	1M0RFC	/	2018-03-19	2019-03-18

## 2. SUMMARY OF TEST RESULTS

---

FCC Rules	Description of Test Item	Result
§15.203	Antenna Requirement	Compliant
§15.205	Restricted Band of Operation	Compliant
§15.209	Radiated Emission	Compliant
§15.225(a)	Field Strength	Compliant
§15.225(b)(c)	Out of Band Emission	Compliant
§15.225(e)	Frequency Stability	Compliant
§ 15.207(a)	Conducted Emission	Compliant
§ 15.215(c)	Emission Bandwidth	Compliant

N/A: not applicable

---

### 3. Antenna Requirement

---

#### 3.1 Standard Applicable

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

#### 3.2 Test Result

This product has an integral antenna, fulfill the requirement of this section.

## 4. Radiated Emissions

### 4.1 Standard Applicable

According to §15.225(a), The field strength of any emissions within the band 13.553–13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.


According to §15.225(d) The field strength of any emissions which appear outside of this band shall not exceed the general radiated emission limits in §15.209.


Note: Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.

### 4.2 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.225(d) and FCC Part 15.209 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

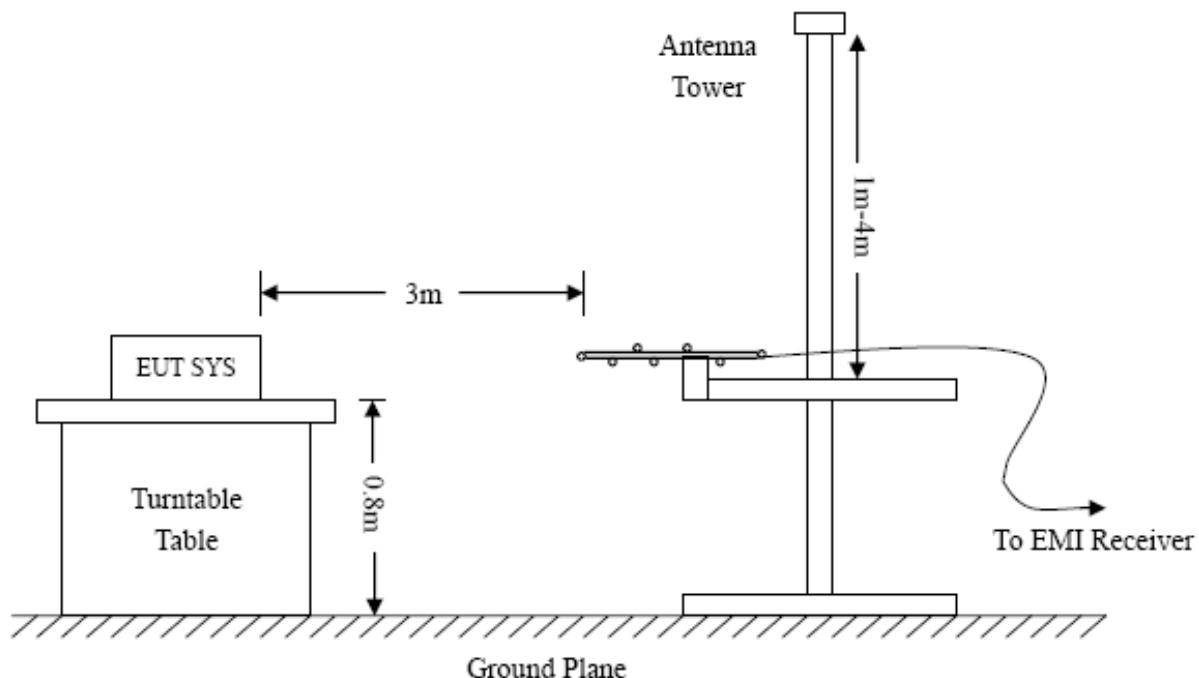

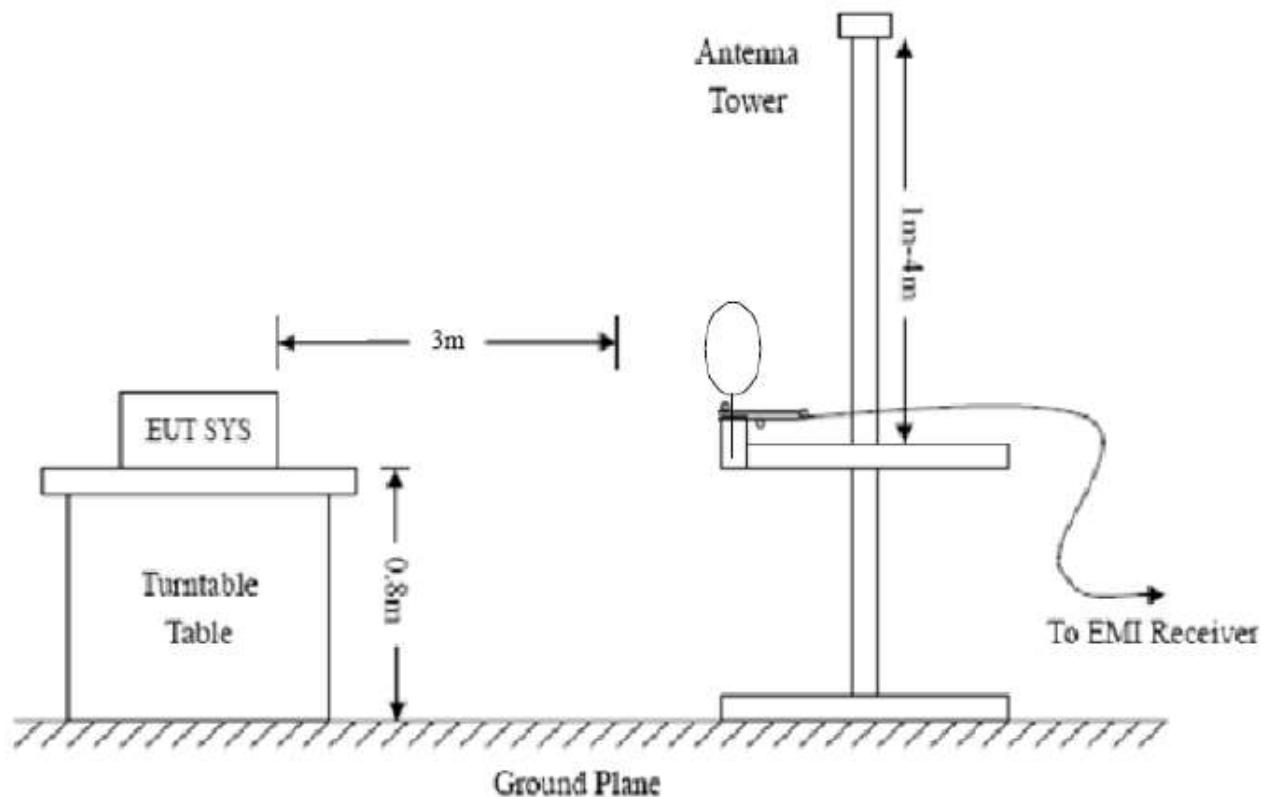

Frequency :9kHz-30MHz

RBW=10KHz,

VBW =30KHz

Sweep time= Auto

Trace = max hold

Detector function = peak

Frequency :30MHz-1GHz

RBW=120KHz,

VBW=300KHz

Sweep time= Auto

Trace = max hold

Detector function = peak, QP

Frequency :Above 1GHz

RBW=1MHz,

VBW=3MHz(Peak), 10Hz(AV)

Sweep time= Auto

Trace = max hold

Detector function = peak, AV

#### 4.3 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} - \text{Corr. Factor}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB $\mu$ V means the emission is 6dB $\mu$ V below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$

#### 4.4 Summary of Test Results/Plots


*Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.*

➤ Below 30MHz

Frequency	Reading	Correction Factor	Result	Limit	Margin	Polar	Detector
MHz	dBuV/m	dB/m	dBuV/m	dBuV/m	dB	X/Y/Z	
13.5600	38.62	6.61	45.23	69.50	-24.27	X	Peak
27.1200	43.04	-6.61	36.43	69.50	-33.07	X	Peak
13.5600	41.61	6.62	48.23	69.50	-21.27	Y	Peak
27.1200	43.04	-6.61	36.43	69.50	-33.07	Y	Peak
13.5600	40.61	6.62	47.23	69.50	-22.27	Z	Peak
27.1200	42.54	-6.61	35.93	69.50	-33.57	Z	Peak


➤ Above 30MHz

Test Mode	TM1	Polarity:	Horizontal
-----------	-----	-----------	------------

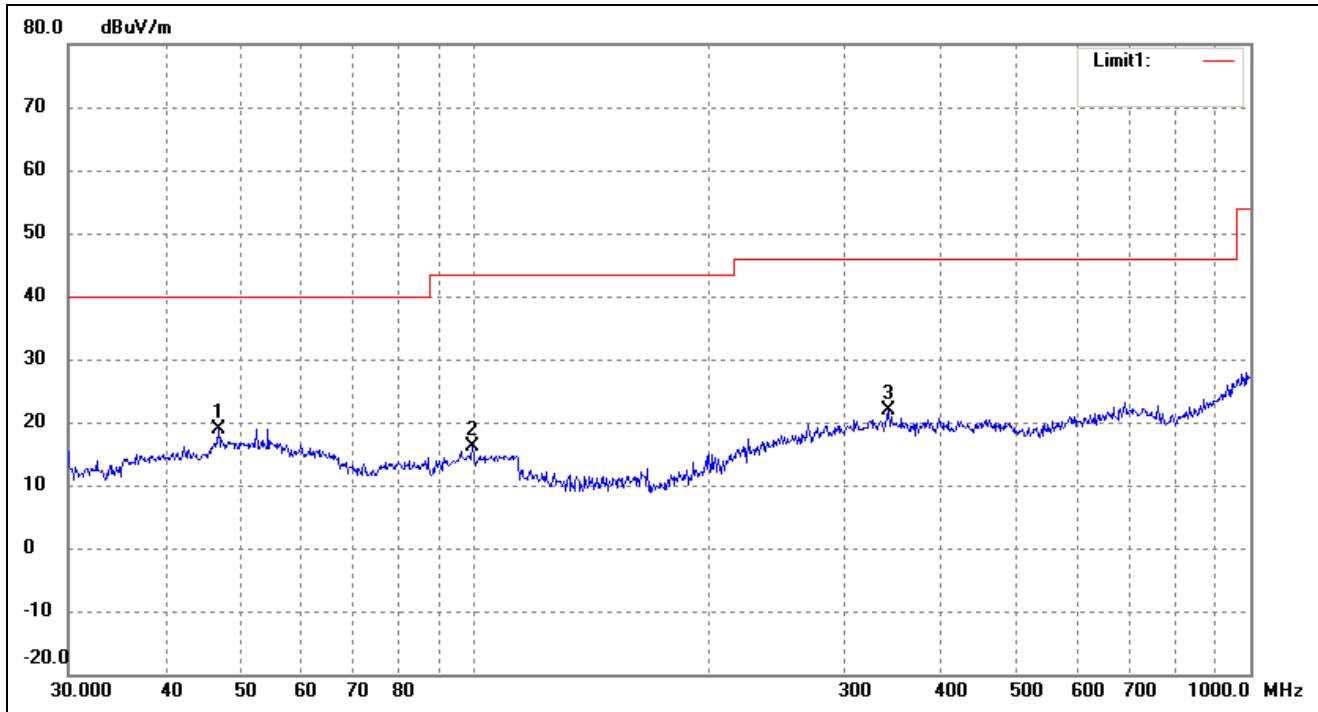

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	46.8303	31.79	-12.85	18.94	40.00	-21.06	173	100	peak
2	99.5280	30.54	-14.53	16.01	43.50	-27.49	143	100	peak
3	341.9787	28.44	-6.51	21.93	46.00	-24.07	71	100	peak

Test Mode	TM1	Polarity:	Vertical
-----------	-----	-----------	----------

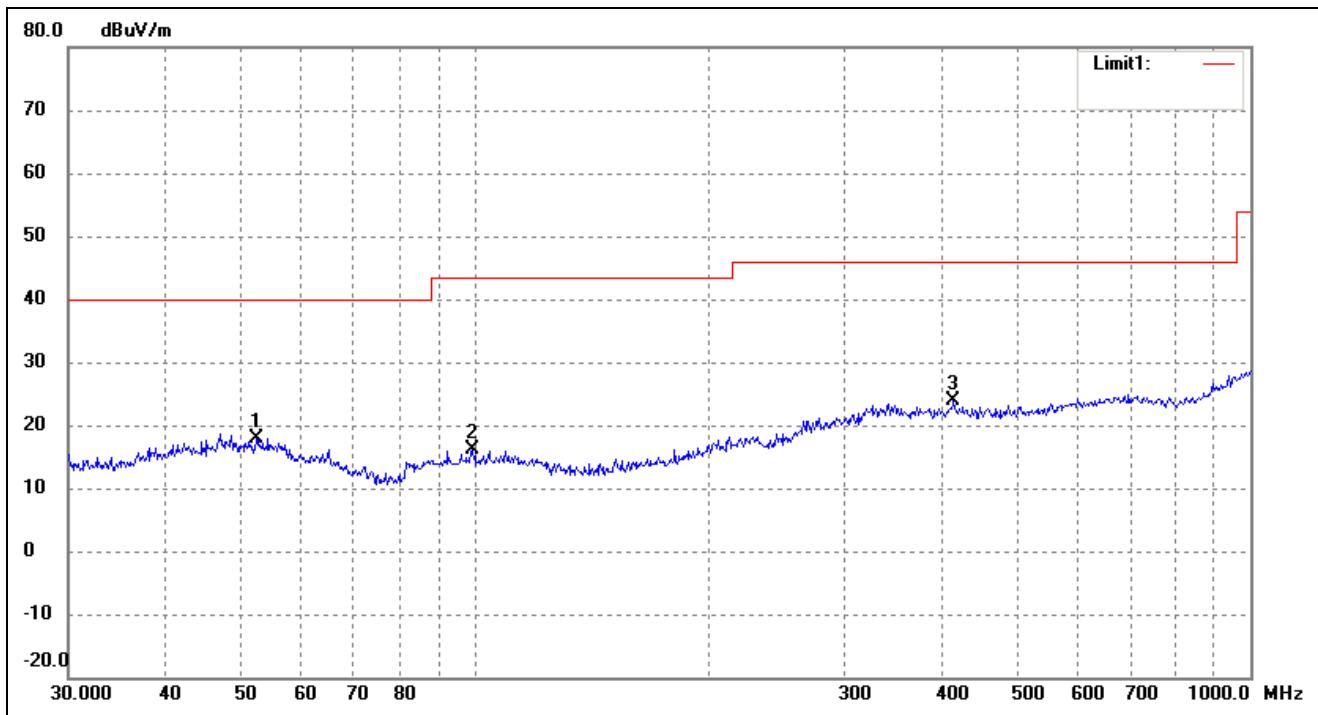

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	( )	(cm)	
1	52.3913	30.71	-12.84	17.87	40.00	-22.13	267	100	peak
2	99.5280	30.54	-14.53	16.01	43.50	-27.49	261	100	peak
3	414.7223	30.03	-6.20	23.83	46.00	-22.17	74	100	peak

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics. The measurements greater than 20dB below the limit from 9kHz to 30MHz.

---

## 5. OUT OF BAND EMISSIONS

---

### 5.1 Standard Applicable

According to FCC 15.225 (b) Within the bands 13.410–13.553 MHz and 13.567–13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters. (c) Within the bands 13.110–13.410 MHz and 13.710–14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.


### 5.2 Test Procedure

As the radiation test, set the RBW=10kHz VBW=30kHz, observed the outside band of 13.11MHz to 14.01MHz, than mark the higher-level emission for comparing with the FCC rules.

### 5.3 Summary of Test Results/Plots

*Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.*

Test Mode	TM1	Polarity:	/
-----------	-----	-----------	---

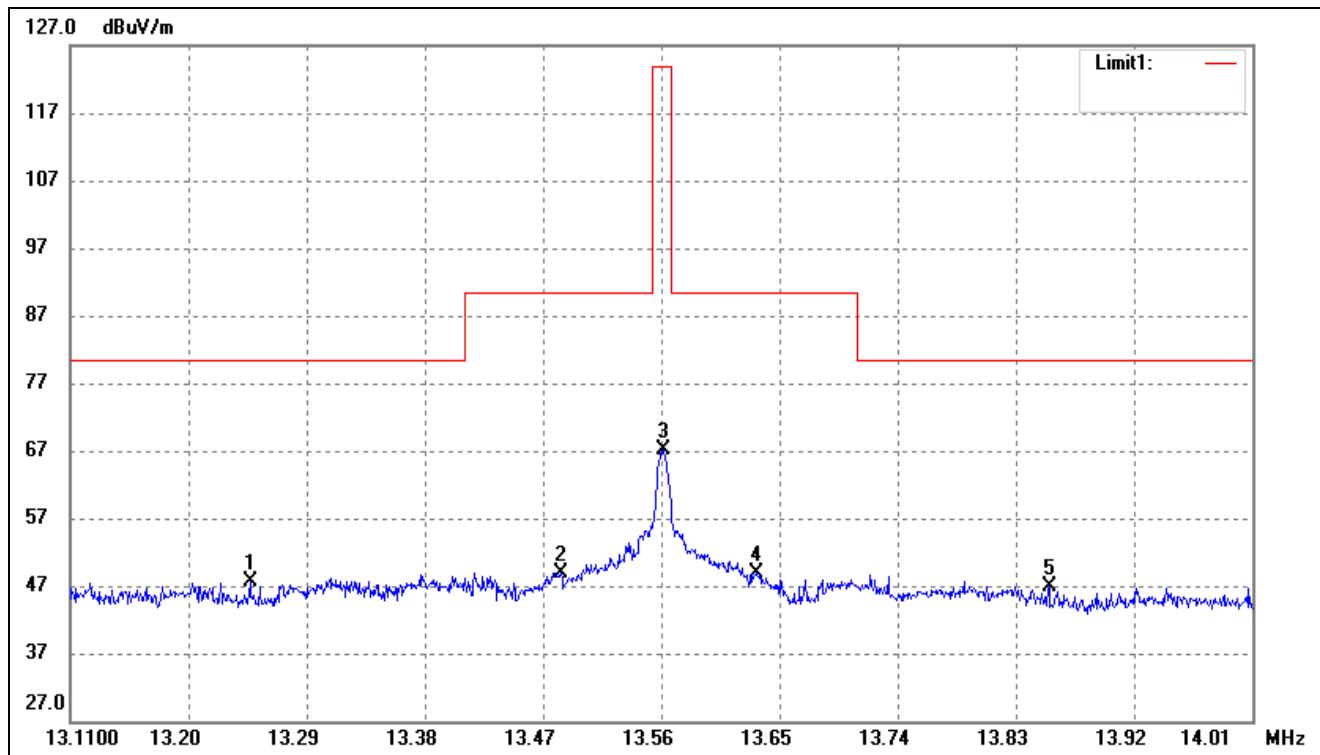

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	13.2468	76.74	-29.08	47.66	80.50	-32.84	242	100	peak
2	13.4832	78.05	-29.07	48.98	90.50	-41.52	92	100	peak
3	13.5617	96.22	-29.07	67.15	124.00	-56.85	191	100	peak
4	13.6326	78.03	-29.07	48.96	90.50	-41.54	94	100	peak
5	13.8551	75.88	-29.07	46.81	80.50	-33.69	224	100	peak

## 6. Frequency Stability

### 6.1 Standard Applicable

According to 15.225(e) The frequency tolerance of the carrier signal shall be maintained within  $\pm 0.01\%$  of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

### 6.2 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure.

### 6.3 Summary of Test Results/Plots

Reference Frequency: 13.56MHz, Limit: 100ppm				
Voltage(%)	Power(VDC)	TEMP( °C)	Freq.Dev(Hz)	Deviation(ppm)
100%	3.85	-30	47	3.47
100%		-20	49	3.61
100%		-10	52	3.83
100%		0	47	3.47
100%		+10	32	2.36
100%		+20	50	3.69
100%		+30	78	5.75
100%		+40	50	3.69
100%		+50	68	5.01
Low	3.50	+20	45	3.32
High	4.35	+20	47	3.47


## 7. Conducted Emissions

### 7.1 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

### 7.2 Basic Test Setup Block Diagram

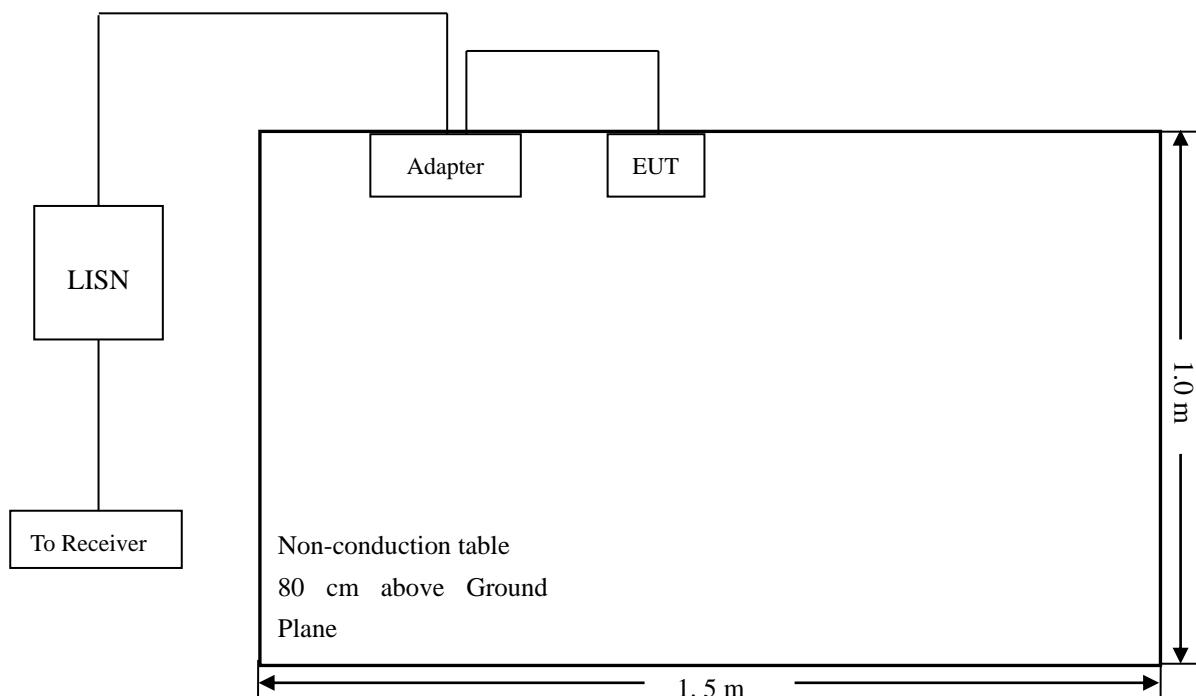


### 7.3 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency .....	150 kHz
Stop Frequency .....	30 MHz
Sweep Speed .....	Auto
IF Bandwidth.....	10 kHz
Quasi-Peak Adapter Bandwidth .....	9 kHz
Quasi-Peak Adapter Mode .....	Normal


### 7.4 Summary of Test Results/Plots

Test Mode	TM1(AC120V 60Hz)	Polarity:	Neutral
-----------	------------------	-----------	---------

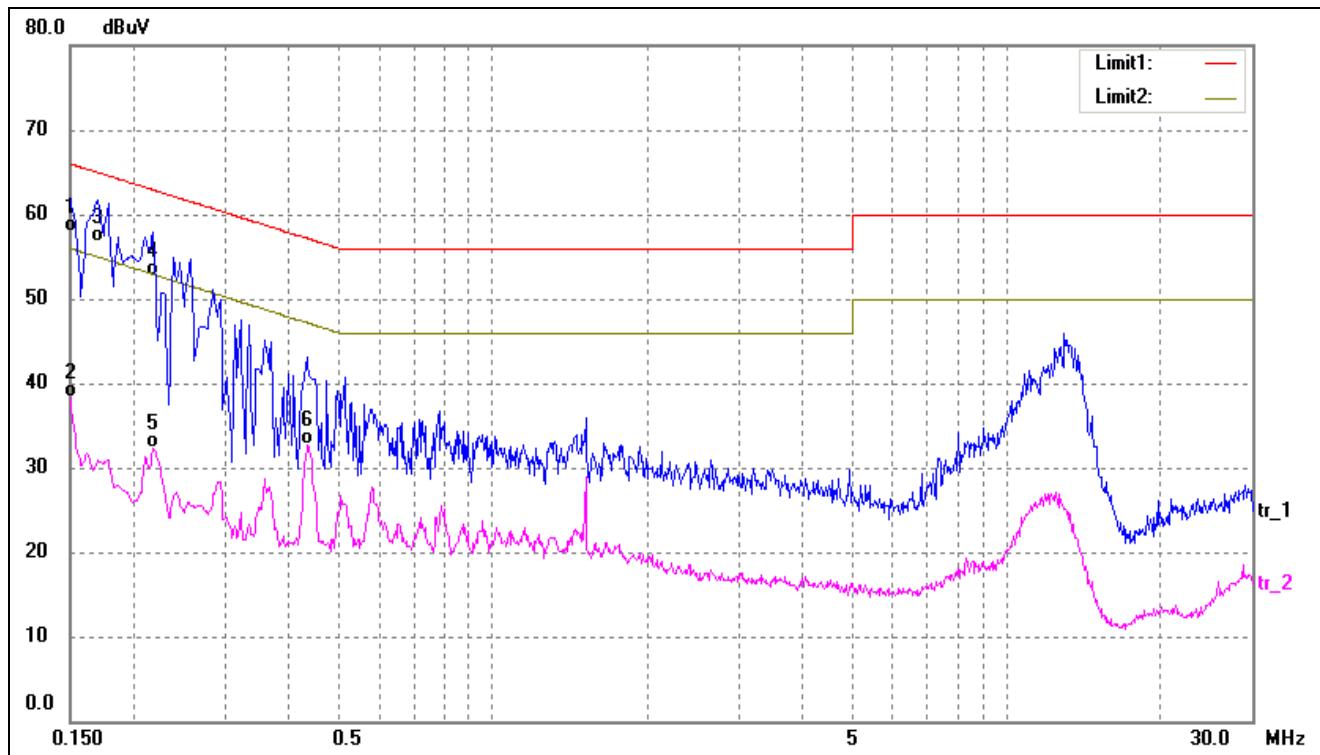

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1*	0.1500	47.87	10.10	57.97	65.99	-8.02	QP
2	0.1500	28.24	10.10	38.34	55.99	-17.65	AVG
3	0.1700	46.66	10.11	56.77	64.96	-8.19	QP
4	0.2180	42.67	10.13	52.80	62.89	-10.09	QP
5	0.2180	22.20	10.13	32.33	52.89	-20.56	AVG
6	0.4340	22.40	10.26	32.66	47.18	-14.52	AVG

Test Mode	TM1(AC120V 60Hz)	Polarity:	Line
-----------	------------------	-----------	------

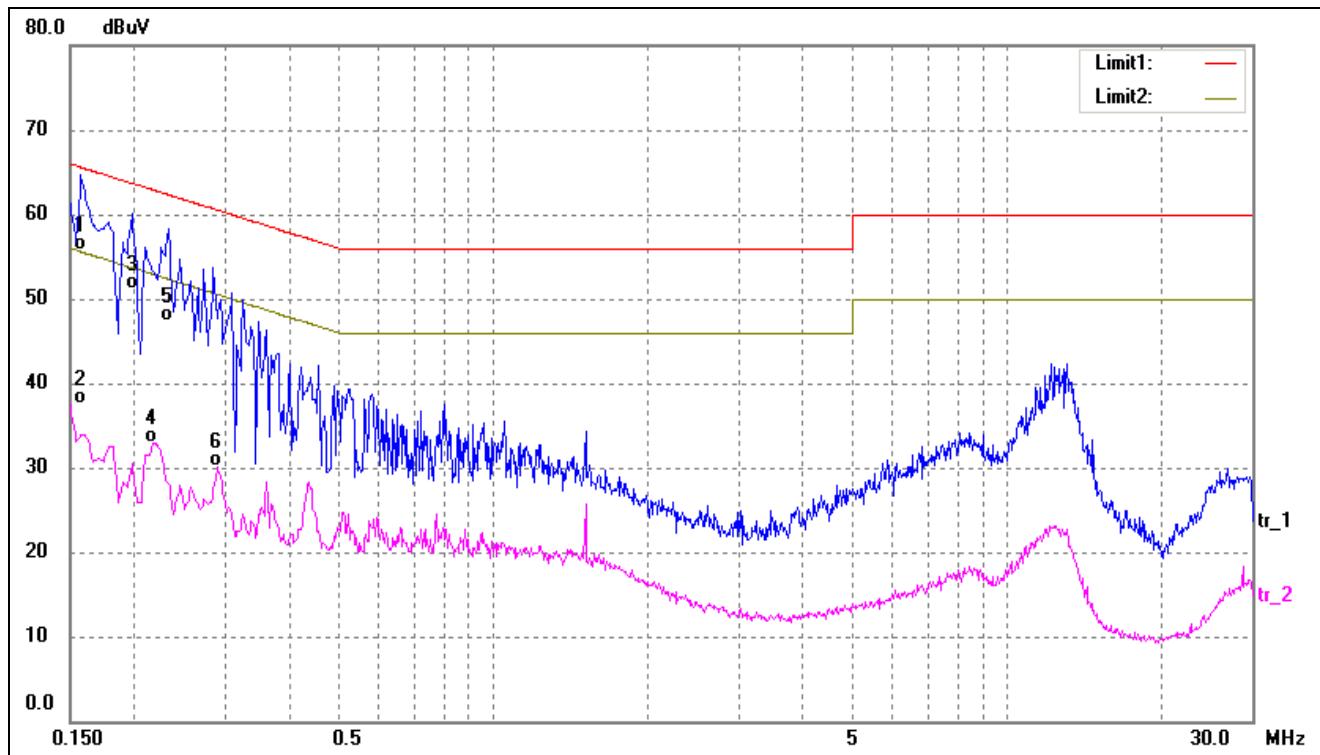

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1*	0.1580	45.52	10.10	55.62	65.56	-9.94	QP
2	0.1580	27.36	10.10	37.46	55.56	-18.10	AVG
3	0.1980	41.00	10.12	51.12	63.69	-12.57	QP
4	0.2180	22.82	10.13	32.95	52.89	-19.94	AVG
5	0.2340	37.18	10.14	47.32	62.30	-14.98	QP
6	0.2900	19.88	10.18	30.06	50.52	-20.46	AVG

## 8. EMISSION BANDWIDTH

### 8.1 Applicable Standard

According to 15.215 (c), intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.

### 8.2 Test Procedure

According to the ANSI 63.10-2013, the emission bandwidth test method as follows.

Set span = 10kHz, centered on a transmitting channel

RBW  $\geq$ 1% 20dB Bandwidth, VBW  $\geq$ RBW

Sweep = auto

Detector function = peak


Trace = max hold

All the trace to stabilize, use the marker-to-peak function to set the marker to the peak of the emission, use the marker-delta function to measure and record the 20dB down of the emission.

### 8.3 Summary of Test Results/Plots

Tx Frequency	20dB Emission bandwidth(kHz)
13.56MHz	33.491

Please refer to the test plots as below:

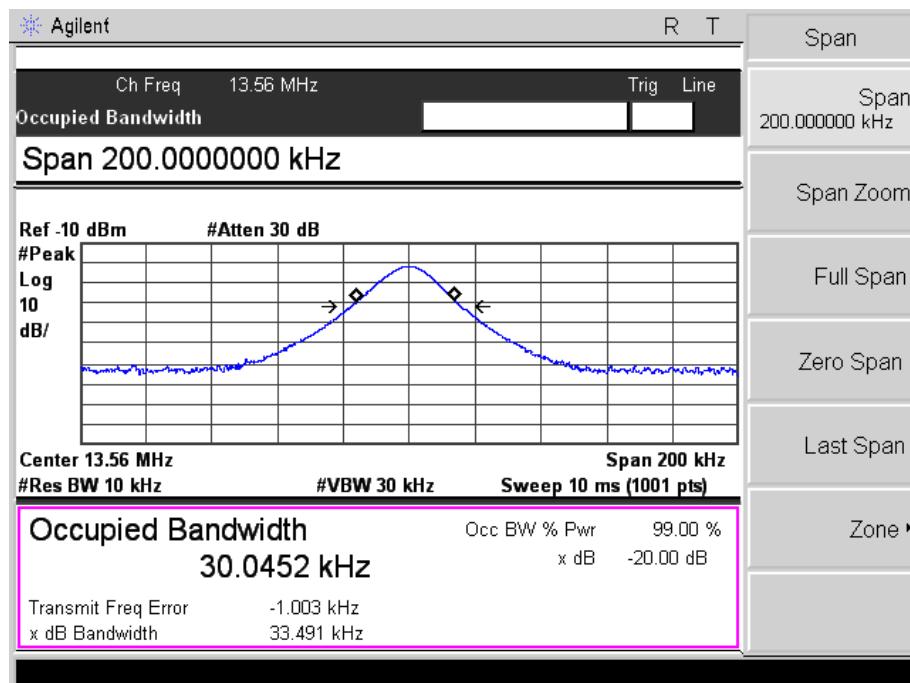

\*\*\*\*\* END OF REPORT \*\*\*\*\*