


D

D

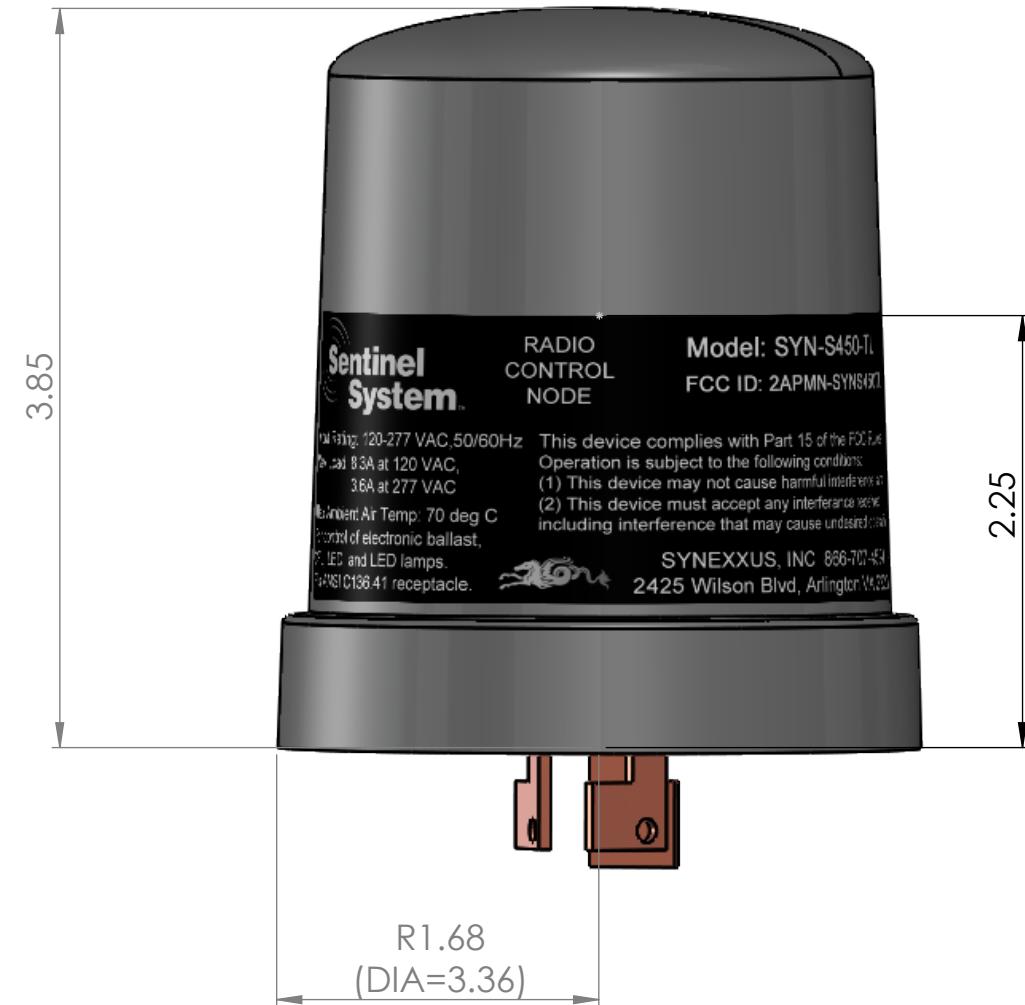

Label vertical position dimension is shown. The label is attached parallel to the plug interface plane. The label may be rotated at any orientation with respect to the centerline axis.

Mates with 7 position, ANSI C136.41 receptacle which provide 3 power contacts and 4 signal contacts. Two of the signal contacts are used for dimming control. The other two signal contacts are optional serial or analog inputs which are often unused.




PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
SYNEXXUS INCORPORATED. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
SYNEXXUS INCORPORATED IS
PROHIBITED.

REVISIONS:

R0: initial release

R1: updated label; removed IC number

R2: updated label; removed "-" in FCC number

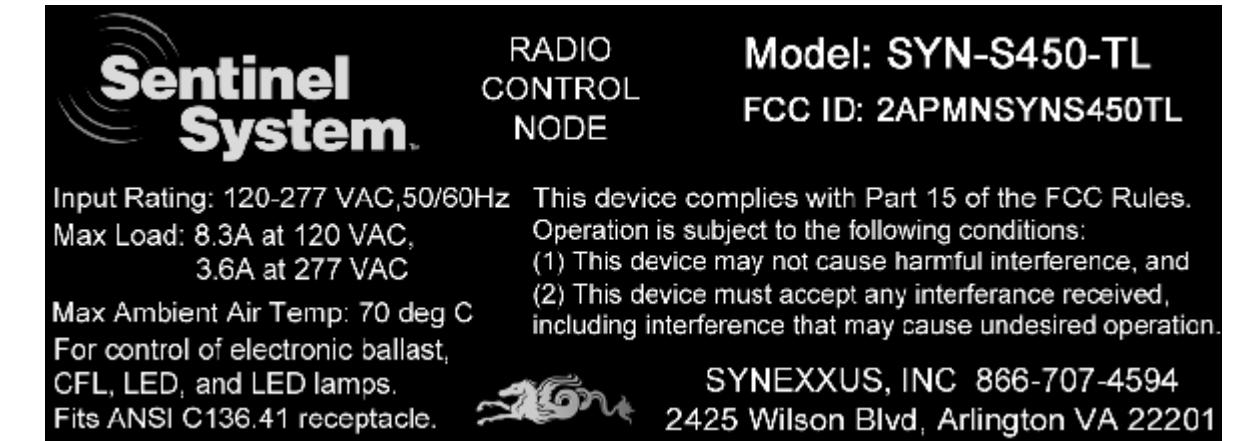

		UNLESS OTHERWISE SPECIFIED:		NAME	DATE	TITLE: UHF Twistlock Envelope & Interface
		DIMENSIONS ARE IN INCHES	DRAWN	MH	5/18/18	
		TOLERANCES:	CHECKED			
		FRACTIONAL \pm	ENG APPR.			
		ANGULAR: MACH \pm	MFG APPR.			
		BEND \pm	Q.A.			
		TWO PLACE DECIMAL \pm	MATERIAL			
		THREE PLACE DECIMAL \pm	COMMENTS:			
		INTERPRET GEOMETRIC TOLERANCING PER:				
		APPLICATION	DO NOT SCALE DRAWING			

SIZE	DWG. NO.	REV
B	SYN-S450-TL	2
		SHEET 1 OF 1