

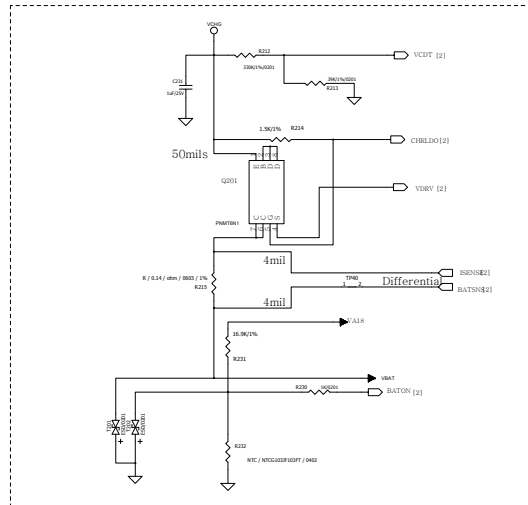



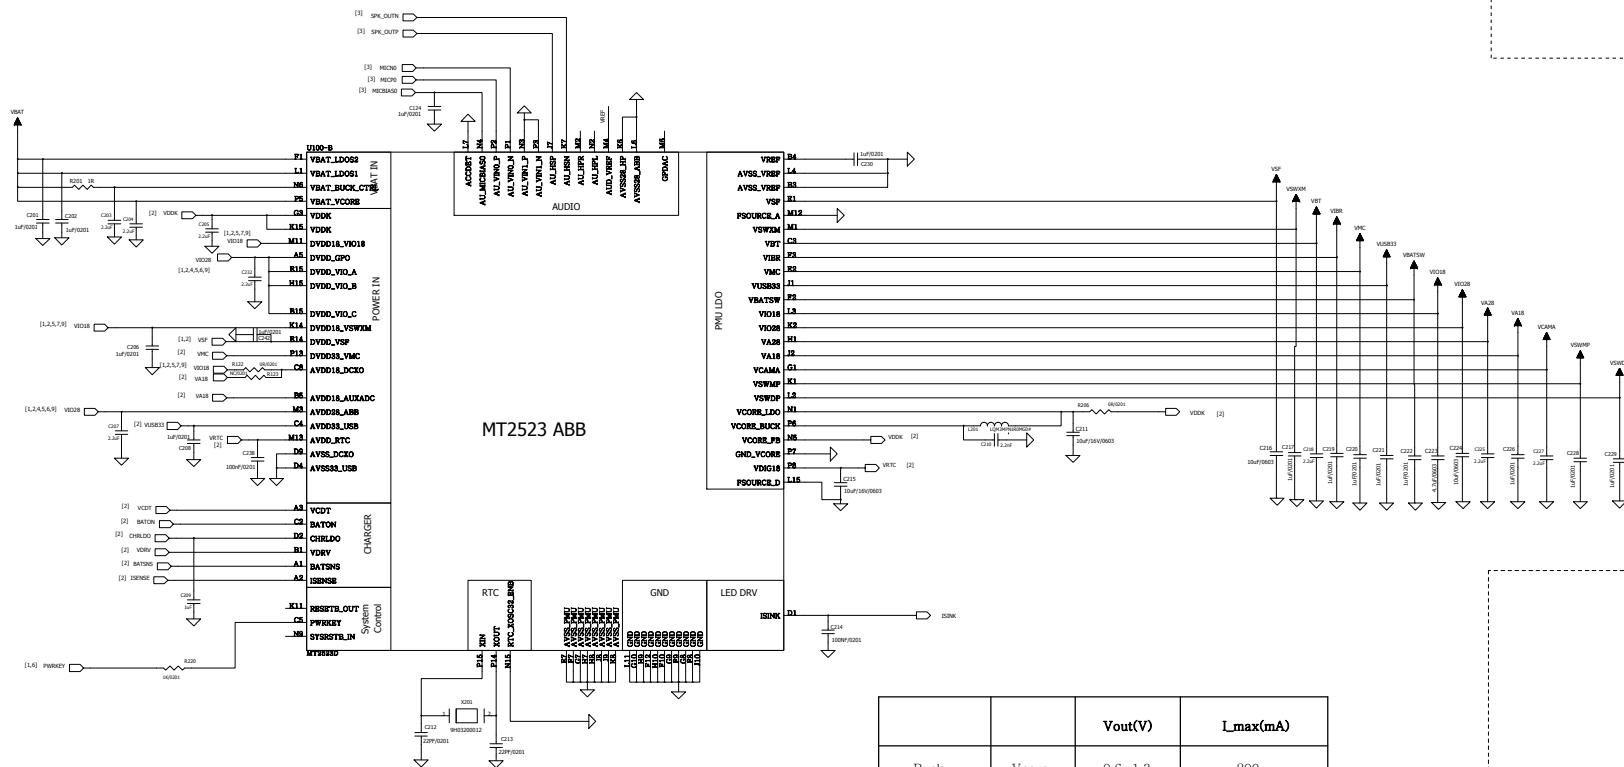


		Vout(V)	L_max(mA)
Buck	Vcore	0.6~1.3	200
Digital LDO	Vcore	0.6~1.3	20
Analog LDO	VBT	2.8/1.8	100
	VA28	2.8	150
	VCAMA	2.8	150
	VA18	1.8	2.5
Digital LDO	VSF	1.86/3.0/3.3	100
	VIO28	2.8	150
	VIO18	1.8	200
	VUSB	3.3	80
	VMC	1.8/2.8/3.3	230
	VIBR	1.3/1.5/1.8/2.5/2.8/3.3	100
	VDIG18	1.8	5
Driver	ISINK		1X(96mA:48mA/0.25V)


SPK

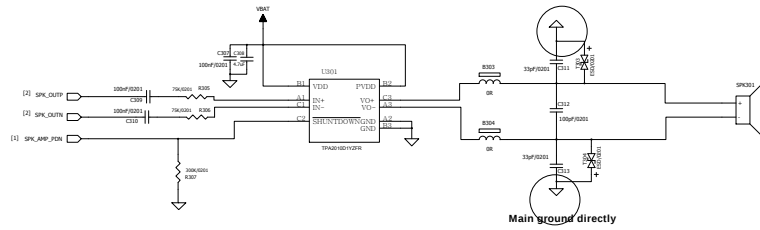


HANDSET MICPHONE MIAN MICP/MICN 差分走线

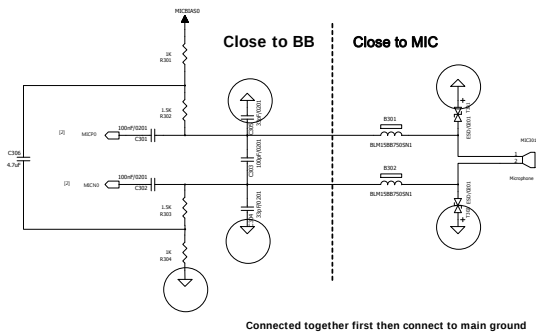


USB




This ESD components are optional for better ESD performance
NOTE: T306, T307 C load must < 3pf and close to JACK

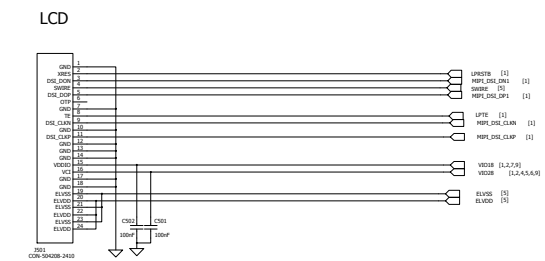


1.2 AUO屏

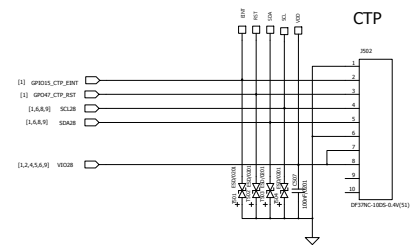


KEY


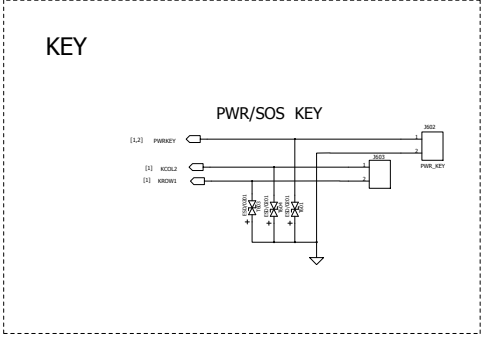



3轴 GSENSOR

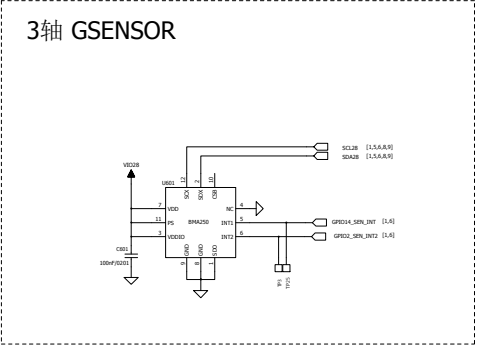



6轴 SENSOR

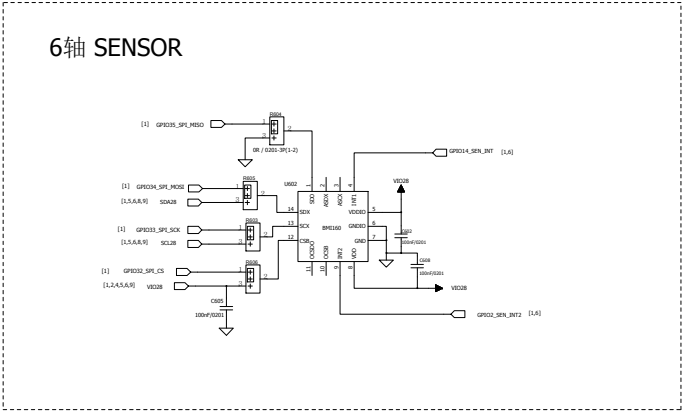

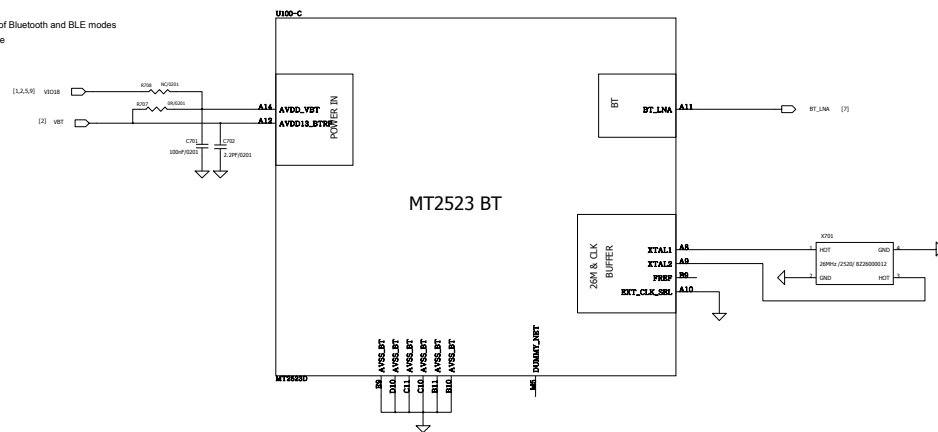

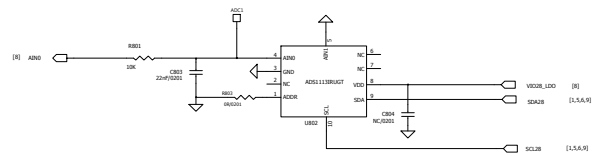

LDO 2.8V

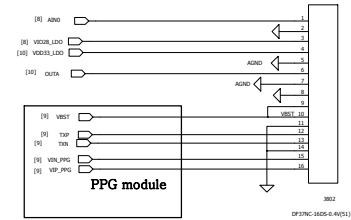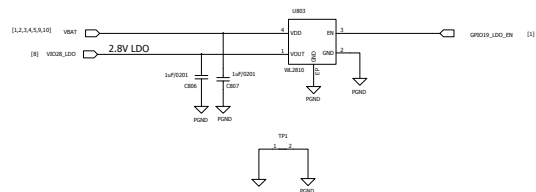

[illegible]