


SPECIFICATION FOR APPROVAL



CUSTOMER:	方位Fanvil	PAGE:	1/1
CUSTOMER P/N:		REVISION:	A
KSG P/N:	KSG2920-345UHK	DATE:	2022-12-6
DRAWN NO.:	KSG221206001		


SHAPE & DIMENSION (UNIT:mm)

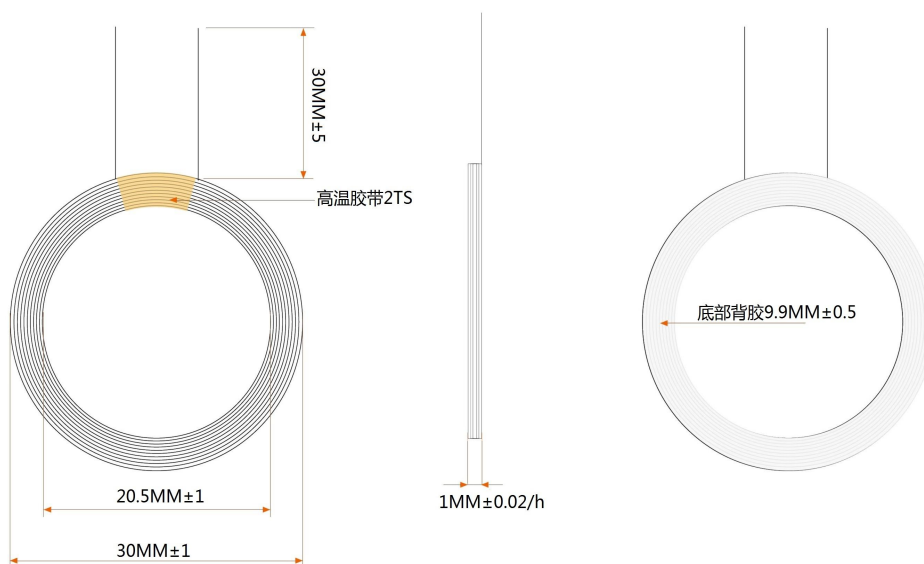

Marking Code: Size: Color: typeface:

PAD LAYOUT(MM):

ELECTRICAL SCHEMATIC:



ELECTRICAL SPECIFICATION

MEAS. ITEM	SPEC.	TEST FREQ.	CONDITIONS
L	345 μ H $\pm$ 10%	1KHz/1V	Ta=25℃ · Idc=0A
Rdc	0.5 A Max.		
Wire	ϕ 0.2*95TS REF		

GENERAL SPECIFICATION

Electrical specifications : at 25℃
Operation Temperature : -40~+85℃
Storage Temperature : -20~+105℃