

Page 185 of 254

Test Laboratory: AGC Lab Date: Apr. 17, 2025

LTE Band 7 Mid-Body-Back (1RB#0) DUT: Phone; Type: W635C

Communication System: LTE; Communication System Band: LTE Band 7; Duty Cycle:1:1; Conv.F=2.06 Frequency: 2535MHz; Medium parameters used: f = 2600 MHz; $\sigma = 1.91 \text{ mho/m}$; $\epsilon r = 39.16$; $\rho = 1000 \text{ kg/m}^3$;

Phantom section: Flat Section

Ambient temperature ($^{\circ}$): 21.2, Liquid temperature ($^{\circ}$): 20.9

SATIMO Configuration:

Probe: SSE2; Calibrated: Apr. 30, 2024; Serial No.: 2023-EPGO-414


· Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

· Measurement SW: OpenSAR V4_02_32


Configuration/ LTE BAND 7 Mid-Body-Back /Area Scan: Measurement grid: dx=10mm, y=10mm Configuration/ LTE BAND 7 Mid-Body-Back /Zoom Scan: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Area Scan	surf_sam_plan.txt, h= 5.00 mm			
ZoomScan	7x7x7,dx=5mm dy=5mm dz=5mm			
Phantom	Validation plane			
Device Position	Body Back			
Band	LTE BAND 7			
Channels	Middle			
Signal	OFDM (Crest factor: 1.0)			

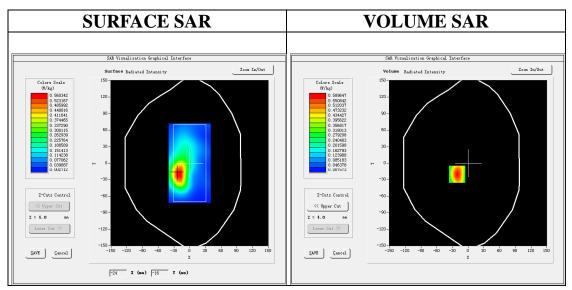



Maximum location: X=-21.00, Y=-20.00 SAR Peak: 0.94 W/kg

SAR 10g (W/Kg)	0.294511		
SAR 1g (W/Kg)	0.554632		





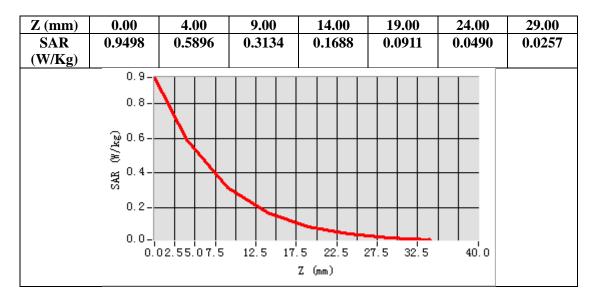

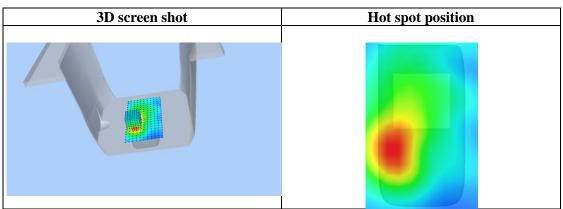



Page 187 of 254

Test Laboratory: AGC Lab Date: Apr. 26, 2025

LTE Band 12 Mid-Touch-Right (1 RB#0) DUT: Phone; Type: W635C

Communication System: LTE; Communication System Band: LTE Band 12; Duty Cycle:1:1; Conv.F=2.04 Frequency: 707.5 MHz; Medium parameters used: f = 750 MHz; $\sigma = 0.88$ mho/m; $\epsilon r = 43.13$; $\rho = 1000$ kg/m³;

Phantom section: Right Section

Ambient temperature ($^{\circ}$ C): 20.6, Liquid temperature ($^{\circ}$ C): 20.4

SATIMO Configuration:

Probe: SSE2; Calibrated: Apr. 30, 2024; Serial No.: 2023-EPGO-414


· Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

Measurement SW: OpenSAR V4_02_32

Configuration/ LTE Band 12 Mid- Touch-Right /Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/ LTE Band 12 Mid- Touch-Right /Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm;


Area Scan	dx=8mm dy=8mm, h= 5.00 mm			
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm			
Phantom	Right head			
Device Position	Cheek			
Band	LTE Band 12			
Channels	Middle			
Signal	OFDM (Crest factor: 1.0)			

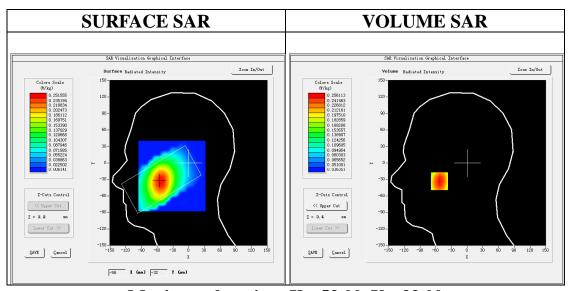


Maximum location: X=-53.00, Y=-33.00 SAR Peak: 0.32 W/kg


SAR 10g (W/Kg)	0.184226
SAR 1g (W/Kg)	0.252390

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.





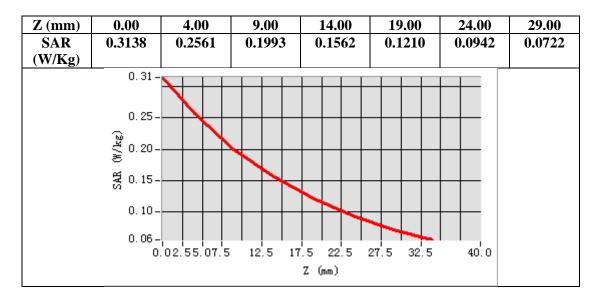

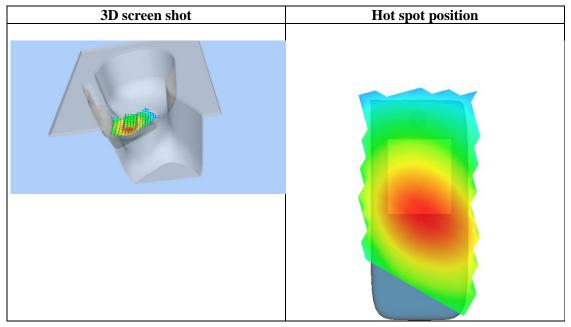



Page 189 of 254

Test Laboratory: AGC Lab Date: Apr. 26, 2025

LTE Band 12 Mid-Body-Back (1 RB#0)

DUT: Phone; Type: W635C

Communication System: LTE; Communication System Band: LTE Band 12; Duty Cycle:1:1; Conv.F=2.04; Frequency: 707.5 MHz; Medium parameters used: f = 750 MHz; $\sigma = 0.88$ mho/m; $\epsilon r = 43.13$; $\rho = 1000$ kg/m³;

Phantom section: Flat Section

Ambient temperature (°C): 20.6, Liquid temperature (°C): 20.4

SATIMO Configuration:

Probe: SSE2; Calibrated: Apr. 30, 2024; Serial No.: 2023-EPGO-414


· Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

· Measurement SW: OpenSAR V4_02_32

Configuration/ LTE Band 12 Mid-Body-Back/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/ LTE Band 12 Mid-Body-Back/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5m;

Area Scan	surf_sam_plan.txt, h= 5.00 mm			
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm			
Phantom	Validation plane			
Device Position	Body Back			
Band	LTE Band 12			
Channels	Middle			
Signal	OFDM (Crest factor: 1.0)			

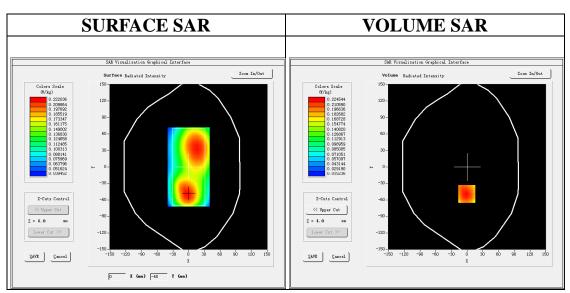


Maximum location: X=-1.00, Y=-49.00 SAR Peak: 0.31 W/kg


	8		
SAR 10g (W/Kg)	0.149525		
SAR 1g (W/Kg)	0.221372		


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Web: http://www.agccert.com/





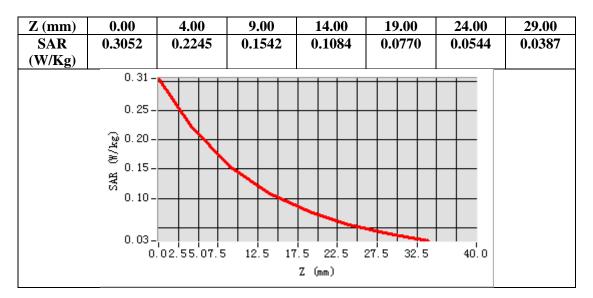

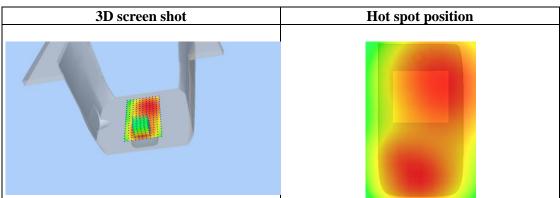



Page 191 of 254

Test Laboratory: AGC Lab Date: Apr. 26, 2025

LTE Band 13 Mid-Touch-Right (1 RB#0) DUT: Phone; Type: W635C

Communication System: LTE; Communication System Band: LTE Band 13; Duty Cycle:1:1; Conv.F=2.04 Frequency: 782 MHz; Medium parameters used: f = 750 MHz; $\sigma = 0.92$ mho/m; $\epsilon = 41.63$; $\rho = 1000$ kg/m³;

Phantom section: Right Section

Ambient temperature ($^{\circ}$ C): 20.6, Liquid temperature ($^{\circ}$ C): 20.4

SATIMO Configuration:

Probe: SSE2; Calibrated: Apr. 30, 2024; Serial No.: 2023-EPGO-414


· Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

Measurement SW: OpenSAR V4_02_32

Configuration/ LTE Band 13 Mid- Touch-Right /Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/ LTE Band 13 Mid- Touch-Right /Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm;


Area Scan	dx=8mm dy=8mm, h= 5.00 mm			
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm			
Phantom	Right head			
Device Position	Cheek			
Band	LTE Band 13			
Channels	Middle			
Signal	OFDM (Crest factor: 1.0)			

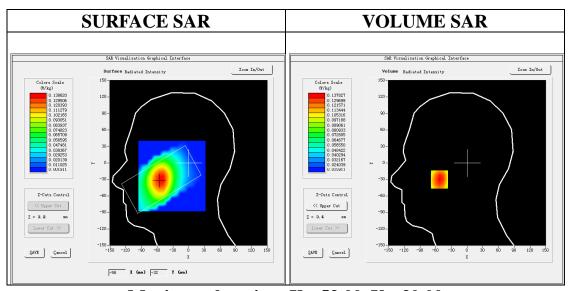


Maximum location: X=-53.00, Y=-30.00 SAR Peak: 0.18 W/kg


	8
SAR 10g (W/Kg)	0.094797
SAR 1g (W/Kg)	0.133270

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.





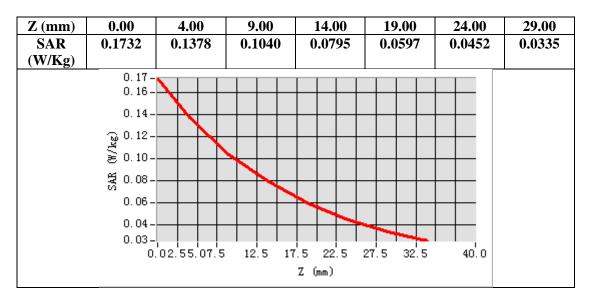

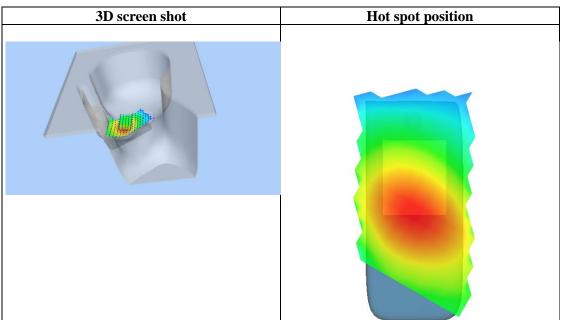



Page 193 of 254

Test Laboratory: AGC Lab Date: Apr. 26, 2025

LTE Band 13 Mid-Edge 2(Right) (1 RB#0)

DUT: Phone; Type: W635C

Communication System: LTE; Communication System Band: LTE Band 13; Duty Cycle:1:1; Conv.F=2.04; Frequency: 782 MHz; Medium parameters used: f = 750 MHz; $\sigma = 0.92$ mho/m; $\epsilon = 41.63$; $\rho = 1000$ kg/m³;

Phantom section: Flat Section

Ambient temperature (°C): 20.6, Liquid temperature (°C): 20.4

SATIMO Configuration:

Probe: SSE2; Calibrated: Apr. 30, 2024; Serial No.: 2023-EPGO-414


· Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

· Measurement SW: OpenSAR V4_02_32

Configuration/ LTE Band 13 Mid-Edge 2(Right)/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/ LTE Band 13 Mid-Edge 2(Right)/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5m;


Area Scan	surf_sam_plan.txt, h= 5.00 mm			
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm			
Phantom	Validation plane			
Device Position	Edge 2(Right)			
Band	LTE Band 13			
Channels	Middle			
Signal	OFDM (Crest factor: 1.0)			

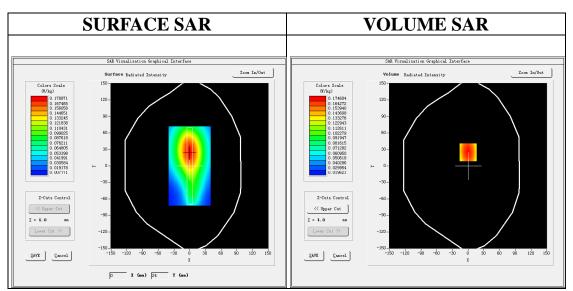


Maximum location: X=0.00, Y=25.00 SAR Peak: 0.23 W/kg


	0		
SAR 10g (W/Kg)	0.115770		
SAR 1g (W/Kg)	0.167857		

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00





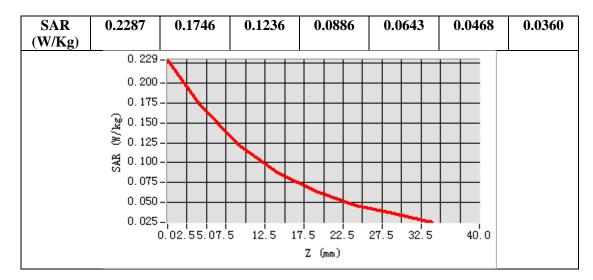

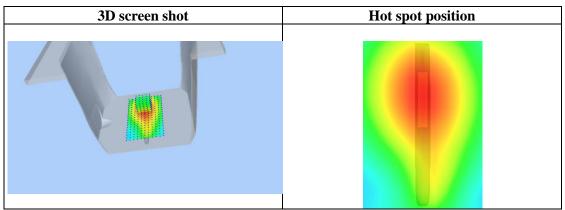



Page 195 of 254

Test Laboratory: AGC Lab Date: Apr. 26, 2025

LTE Band 17 Mid-Touch-Right (1 RB#0)

DUT: Phone; Type: W635C

Communication System: LTE; Communication System Band: LTE Band 17; Duty Cycle:1:1; Conv.F=2.04 Frequency: 710 MHz; Medium parameters used: f = 750 MHz; $\sigma = 0.90$ mho/m; $\epsilon = 42.86$; $\rho = 1000$ kg/m³;

Phantom section: Right Section

Ambient temperature ($^{\circ}$ C): 20.6, Liquid temperature ($^{\circ}$ C): 20.4

SATIMO Configuration:

· Probe: SSE2; Calibrated: Apr. 30, 2024; Serial No.: 2023-EPGO-414


· Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

Measurement SW: OpenSAR V4_02_32

Configuration/ LTE Band 17 Mid- Touch-Right /Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/ LTE Band 17 Mid- Touch-Right /Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm;


Area Scan	dx=8mm dy=8mm, h= 5.00 mm			
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm			
Phantom	Right head			
Device Position	Cheek			
Band	LTE Band 17			
Channels	Middle			
Signal	OFDM (Crest factor: 1.0)			

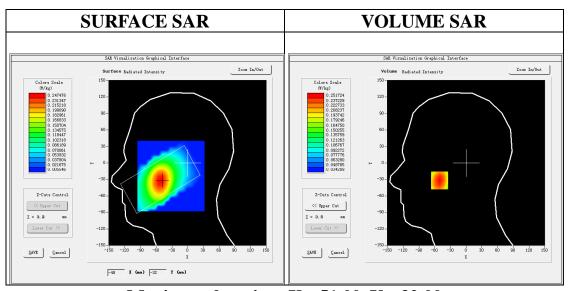


Maximum location: X=-51.00, Y=-32.00 SAR Peak: 0.32 W/kg


	8
SAR 10g (W/Kg)	0.178160
SAR 1g (W/Kg)	0.248623

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.





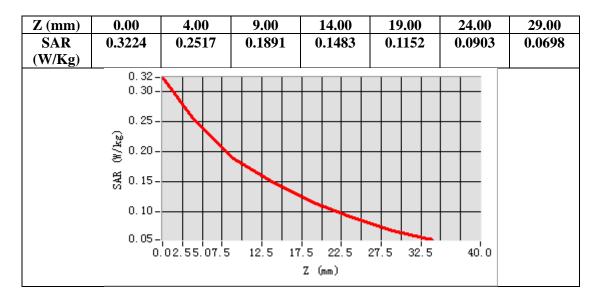

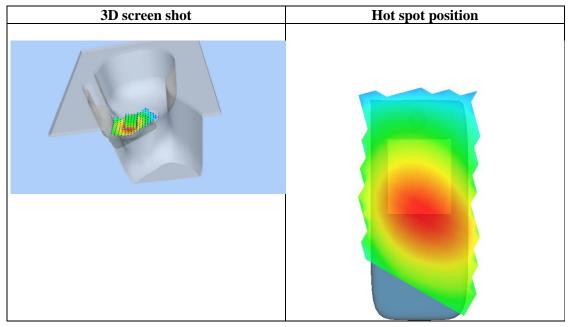



Page 197 of 254

Test Laboratory: AGC Lab Date: Apr. 26, 2025

LTE Band 17 Mid-Body-Back (1 RB#0) DUT: Phone; Type: W635C

Communication System: LTE; Communication System Band: LTE Band 17; Duty Cycle:1:1; Conv.F=2.04; Frequency: 710 MHz; Medium parameters used: f = 750 MHz; $\sigma = 0.90$ mho/m; $\epsilon = 42.86$; $\rho = 1000$ kg/m³;

Phantom section: Flat Section

Ambient temperature (°C): 20.6, Liquid temperature (°C): 20.4

SATIMO Configuration:

Probe: SSE2; Calibrated: Apr. 30, 2024; Serial No.: 2023-EPGO-414


· Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

· Measurement SW: OpenSAR V4_02_32

Configuration/ LTE Band 17 Mid-Body-Back/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/ LTE Band 17 Mid-Body-Back/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5m;


Area Scan	surf_sam_plan.txt, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Body Back
Band	LTE Band 17
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

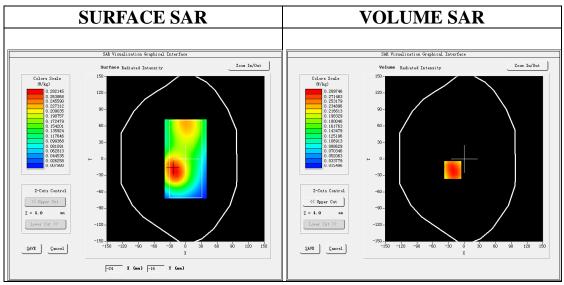


Maximum location: X=-22.00, Y=-20.00 SAR Peak: 0.40 W/kg


	8
SAR 10g (W/Kg)	0.190889
SAR 1g (W/Kg)	0.285785

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.





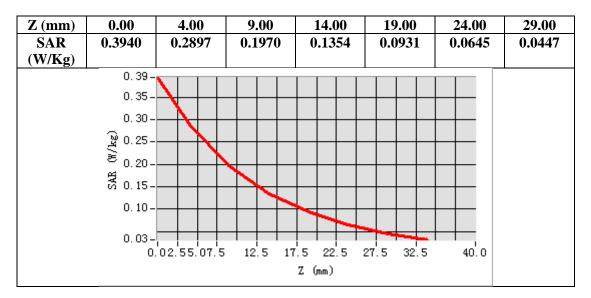

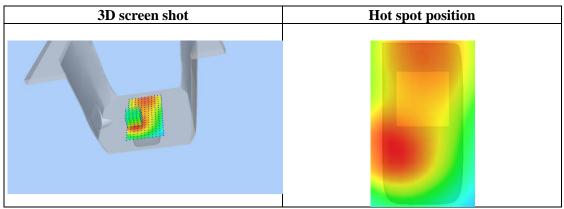



Page 199 of 254

Test Laboratory: AGC Lab Date: Apr. 23, 2025

LTE Band 25 Mid-Touch-Left (1 RB#0) DUT: Phone; Type: W635C

Communication System: LTE; Communication System Band: LTE Band 25; Duty Cycle:1:1; Conv.F=2.08; Frequency:1882.5MHz; Medium parameters used: f = 1900 MHz; $\sigma = 1.42 \text{ mho/m}$; $\epsilon r = 41.33$; $\rho = 1000 \text{ kg/m}^3$;

Phantom section: Left Section

Ambient temperature (°C): 20.9, Liquid temperature (°C): 20.8

SATIMO Configuration:

· Probe: SSE2; Calibrated: Apr. 30, 2024; Serial No.: 2023-EPGO-414


· Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

· Measurement SW: OpenSAR V4_02_32

Configuration/ LTE Band 25 Mid- Touch-Left /Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/ LTE Band 25 Mid- Touch-Left /Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm;


Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	LTE Band 25
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

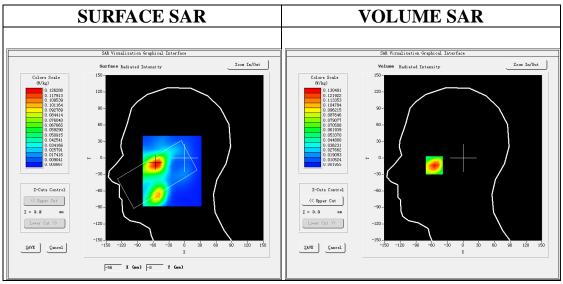


Maximum location: X=-55.00, Y=-11.00 SAR Peak: 0.20 W/kg


	8
SAR 10g (W/Kg)	0.067012
SAR 1g (W/Kg)	0.123452

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.





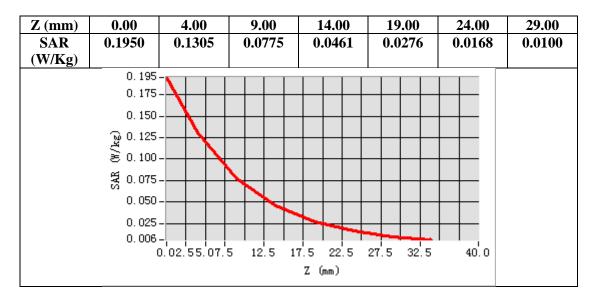

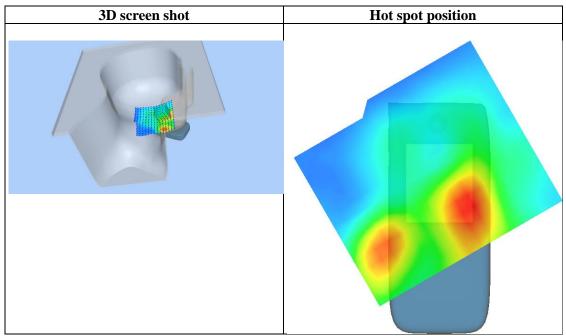



Page 201 of 254

Test Laboratory: AGC Lab Date: Apr. 23, 2025

LTE Band 25 Mid-Edge 3(Bottom) (1 RB#0)

DUT: Phone; Type: W635C

Communication System: LTE; Communication System Band: LTE Band 25; Duty Cycle:1:1; Conv.F=2.08; Frequency:1882.5MHz; Medium parameters used: f = 1900 MHz; $\sigma = 1.42 \text{ mho/m}$; $\epsilon = 41.33$; $\rho = 1000 \text{ kg/m}^3$;

Phantom section: Flat Section

Ambient temperature (°C): 20.9, Liquid temperature (°C): 20.8

SATIMO Configuration:

Probe: SSE2; Calibrated: Apr. 30, 2024; Serial No.: 2023-EPGO-414


· Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

· Measurement SW: OpenSAR V4_02_32

Configuration/ LTE Band 25 Mid-Edge 3(Bottom)/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/ LTE Band 25 Mid-Edge 3(Bottom)/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5m;

Area Scan	surf_sam_plan.txt, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Edge 3(Bottom)
Band	LTE Band 25
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

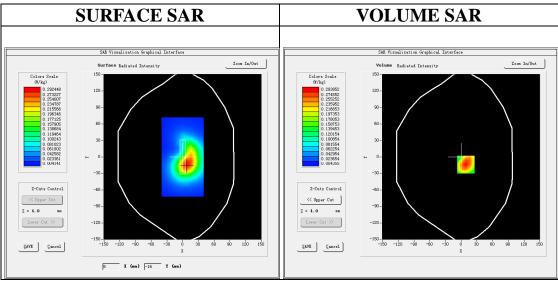


Maximum location: X=9.00, Y=-14.00 SAR Peak: 0.45 W/kg


	0
SAR 10g (W/Kg)	0.158209
SAR 1g (W/Kg)	0.281171

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.





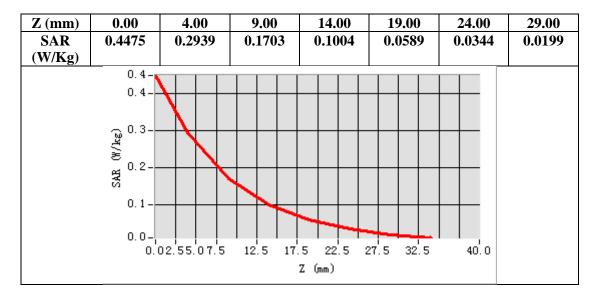

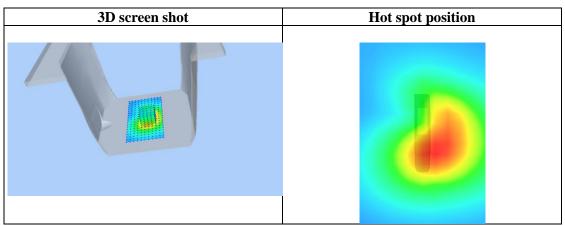



Page 203 of 254

Test Laboratory: AGC Lab Date: Apr. 27, 2025

LTE Band 26(824-849MHz) Mid-Touch-Left (1 RB#0)

DUT: Phone; Type: W635C

Communication System: LTE; Communication System Band: LTE Band 26(824-849MHz); Duty Cycle:1:1;

Conv.F=1.89

Frequency: 836.5 MHz; Medium parameters used: f = 835 MHz; $\sigma = 0.90$ mho/m; $\epsilon r = 39.90$; $\rho = 1000$ kg/m³;

Phantom section: Left Section

Ambient temperature ($^{\circ}$ C): 21.3, Liquid temperature ($^{\circ}$ C): 21.1

SATIMO Configuration:

Probe: SSE2; Calibrated: Apr. 30, 2024; Serial No.: 2023-EPGO-414


Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

· Measurement SW: OpenSAR V4_02_32


Configuration/ LTE Band 26(824-849MHz) Mid- Touch-Left /Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/ LTE Band 26(824-849MHz) Mid- Touch-Left /Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	LTE Band 26(824-849MHz)
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

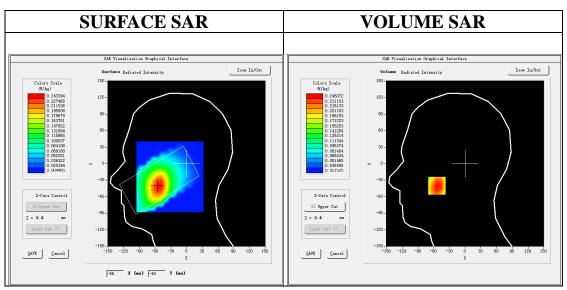



Maximum location: X=-54.00, Y=-40.00 SAR Peak: 0.33 W/kg

SAR 10g (W/Kg)	0.163388
SAR 1g (W/Kg)	0.238795





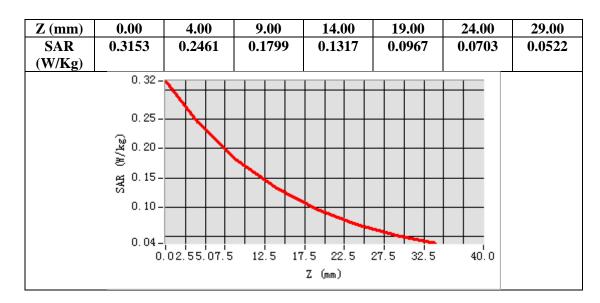

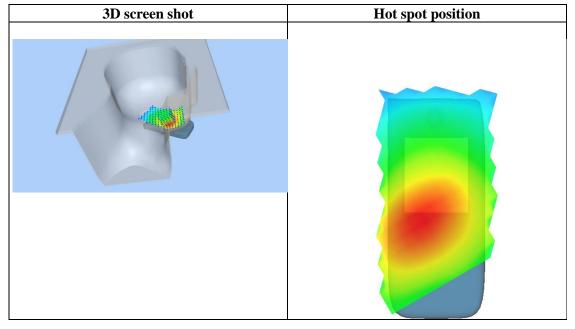



Page 205 of 254

Test Laboratory: AGC Lab Date: Apr. 27, 2025

LTE Band 26(824-849MHz) Mid-Body-Back (1 RB#0)

DUT: Phone; Type: W635C

Communication System: LTE; Communication System Band: LTE Band 26(824-849MHz); Duty Cycle:1:1;

Conv.F=1.89

Frequency:836.5 MHz; Medium parameters used: f = 835 MHz; $\sigma = 0.90$ mho/m; $\epsilon r = 39.90$; $\rho = 1000$ kg/m³;

Phantom section: Flat Section

Ambient temperature ($^{\circ}$ C): 21.3, Liquid temperature ($^{\circ}$ C): 21.1

SATIMO Configuration:

• Probe: SSE2; Calibrated: Apr. 30, 2024; Serial No.: 2023-EPGO-414


· Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

Measurement SW: OpenSAR V4_02_32

Configuration/ LTE Band 26(824-849MHz) Mid-Body-Back/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/ LTE Band 26(824-849MHz) Mid-Body-Back/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5m;

Area Scan	surf_sam_plan.txt, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Body Back
Band	LTE Band 26(824-849MHz)
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

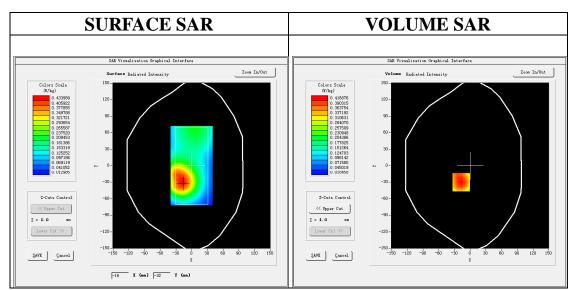



Maximum location: X=-17.00, Y=-30.00 SAR Peak: 0.60 W/kg

SAR 10g (W/Kg)	0.261087
SAR 1g (W/Kg)	0.405499





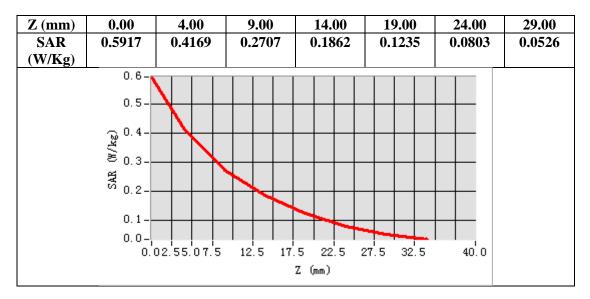

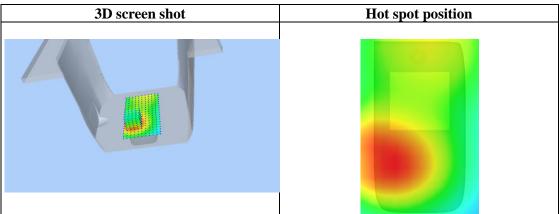



Page 207 of 254

Test Laboratory: AGC Lab Date: Apr. 27, 2025

LTE Band 26(814-824MHz) Mid-Touch-Left (1 RB#0)

DUT: Phone; Type: W635C

Communication System: LTE; Communication System Band: LTE Band 26(814-824MHz); Duty Cycle:1:1;

Conv.F=1.89

Frequency: 819 MHz; Medium parameters used: f = 835 MHz; $\sigma = 0.86$ mho/m; $\epsilon r = 41.36$; $\rho = 1000$ kg/m³;

Phantom section: Left Section

Ambient temperature ($^{\circ}$ C): 21.3, Liquid temperature ($^{\circ}$ C): 21.1

SATIMO Configuration:

Probe: SSE2; Calibrated: Apr. 30, 2024; Serial No.: 2023-EPGO-414


Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

· Measurement SW: OpenSAR V4_02_32


Configuration/ LTE Band 26(814-824MHz) Mid- Touch-Left /Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/ LTE Band 26(814-824MHz) Mid- Touch-Left /Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	LTE Band 26(814-824MHz)
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

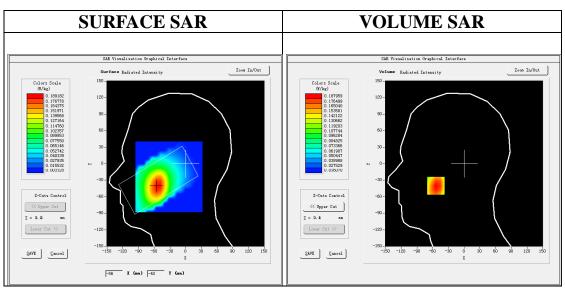



Maximum location: X=-54.00, Y=-40.00 SAR Peak: 0.25 W/kg

SAR 10g (W/Kg)	0.124686
SAR 1g (W/Kg)	0.181781





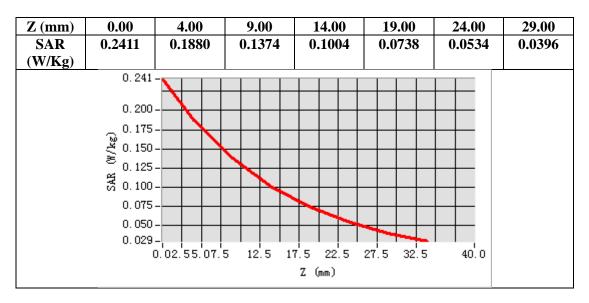

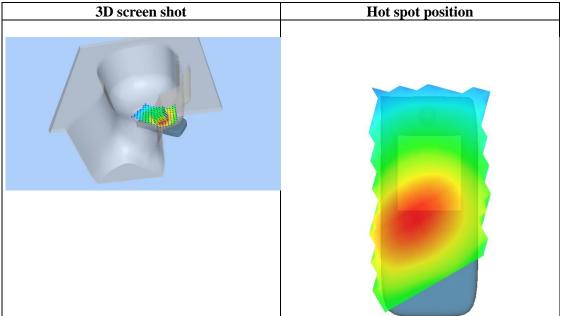



Page 209 of 254

Test Laboratory: AGC Lab Date: Apr. 27, 2025

LTE Band 26(814-824MHz) Mid-Body-Back (1 RB#0)

DUT: Phone; Type: W635C

Communication System: LTE; Communication System Band: LTE Band 26(814-824MHz); Duty Cycle:1:1;

Conv.F=1.89

Frequency: 819 MHz; Medium parameters used: f = 835 MHz; $\sigma = 0.86$ mho/m; $\epsilon r = 41.36$; $\rho = 1000$ kg/m³;

Phantom section: Flat Section

Ambient temperature ($^{\circ}$ C): 21.3, Liquid temperature ($^{\circ}$ C): 21.1

SATIMO Configuration:

• Probe: SSE2; Calibrated: Apr. 30, 2024; Serial No.: 2023-EPGO-414


· Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

Measurement SW: OpenSAR V4_02_32


Configuration/ LTE Band 26(814-824MHz) Mid-Body-Back/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/ LTE Band 26(814-824MHz) Mid-Body-Back/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5m;

Area Scan	surf_sam_plan.txt, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Body Back
Band	LTE Band 26(814-824MHz)
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

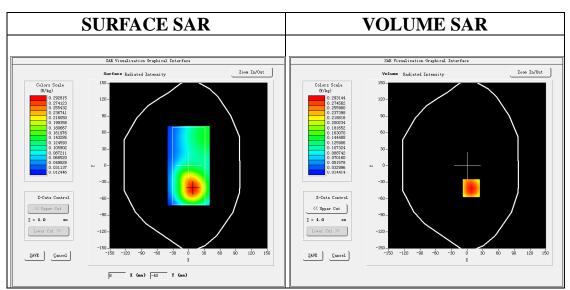



Maximum location: X=8.00, Y=-41.00 SAR Peak: 0.41 W/kg

SAR 10g (W/Kg)	0.181157
SAR 1g (W/Kg)	0.282826





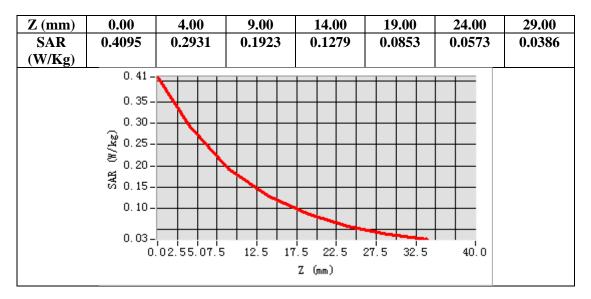

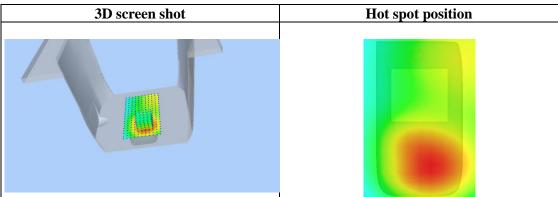



Page 211 of 254

Test Laboratory: AGC Lab Date: Apr. 17, 2025

LTE Band 38 Mid-Touch-Right(1RB#0)

DUT: Phone; Type: W635C

Communication System: LTE; Communication System Band: LTE Band 38; Duty Cycle:1:1.58; Conv.F=2.06 Frequency: 2595MHz; Medium parameters used: f = 2600 MHz; $\sigma = 1.92 \text{ mho/m}$; $\epsilon r = 38.99$; $\rho = 1000 \text{ kg/m}^3$;

Phantom section: Right Section

Ambient temperature (°C): 21.2, Liquid temperature (°C): 20.9

SATIMO Configuration:

· Probe: SSE2; Calibrated: Apr. 30, 2024; Serial No.: 2023-EPGO-414


· Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

Measurement SW: OpenSAR V4_02_32


Configuration/ LTE BAND 38 Mid-Touch- Right/Area Scan: Measurement grid: dx=8mm, y=8mm Configuration/ LTE BAND 38 Mid-Touch- Right/Zoom Scan: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	7x7x7,dx=5mm dy=5mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	LTE BAND 38
Channels	Middle
Signal	Crest factor: 158

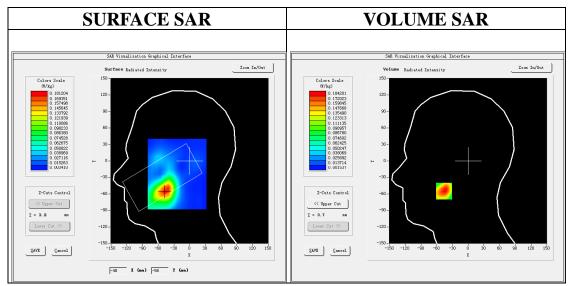



Maximum location: X=-46.00, Y=-55.00 SAR Peak: 0.29 W/kg

SAR 10g (W/Kg)	0.094602
SAR 1g (W/Kg)	0.175325





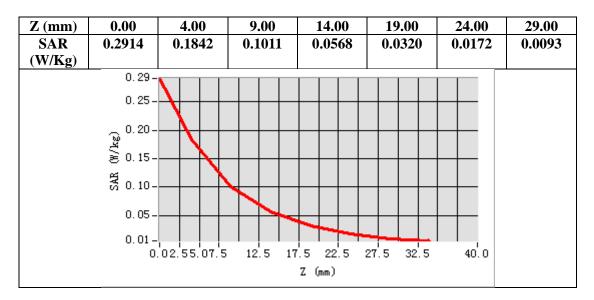

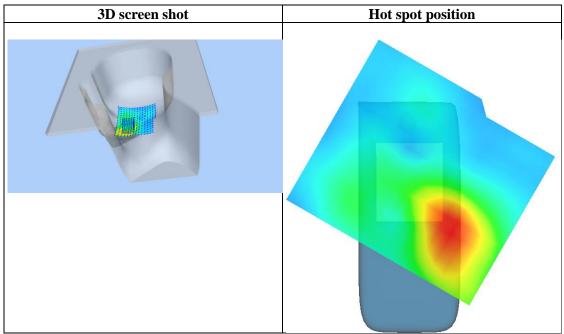



Page 213 of 254

Test Laboratory: AGC Lab Date: Apr. 17, 2025

LTE Band 38 Mid- Edge 2(Right) (1RB#0)

DUT: Phone; Type: W635C

Communication System: LTE; Communication System Band: LTE Band 38; Duty Cycle:1:1.58; Conv.F=2.06 Frequency: 2595MHz; Medium parameters used: f = 2600 MHz; $\sigma = 1.92 \text{ mho/m}$; $\epsilon = 38.99$; $\rho = 1000 \text{ kg/m}^3$;

Phantom section: Flat Section

Ambient temperature ($^{\circ}$): 21.2, Liquid temperature ($^{\circ}$): 20.9

SATIMO Configuration:

Probe: SSE2; Calibrated: Apr. 30, 2024; Serial No.: 2023-EPGO-414


· Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

· Measurement SW: OpenSAR V4_02_32

Configuration/ LTE BAND 38 Mid-Edge 2(Right) /Area Scan: Measurement grid: dx=10mm, y=10mm Configuration/ LTE BAND 38 Mid-Edge 2(Right) /Zoom Scan: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Area Scan	surf_sam_plan.txt, h= 5.00 mm
ZoomScan	7x7x7,dx=5mm dy=5mm dz=5mm
Phantom	Validation plane
Device Position	Edge 2(Right)
Band	LTE BAND 38
Channels	Middle
Signal	Crest factor: 1.58

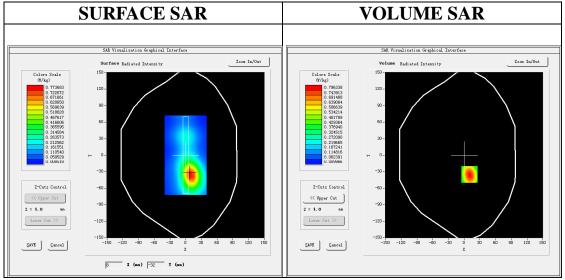


Maximum location: X=10.00, Y=-35.00


SAR Peak: 1.25 W/kg


SAR 10g (W/Kg)	0.400362
SAR 1g (W/Kg)	0.748549

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.





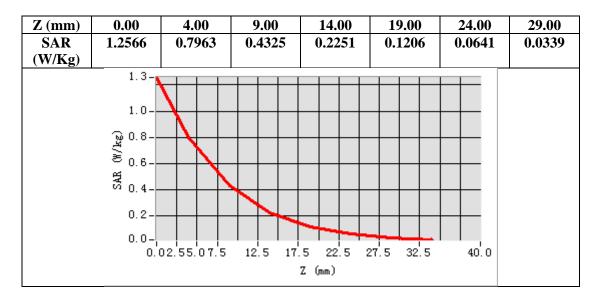

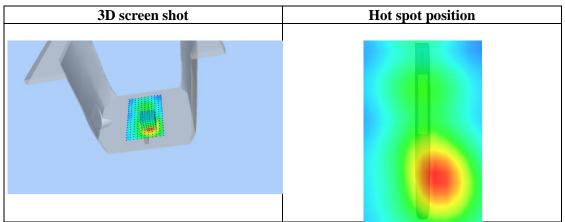



Page 215 of 254

Test Laboratory: AGC Lab Date: Apr. 25, 2025

LTE Band 40- Lower Side Mid-Touch- Right(1 RB#0)

DUT: Phone; Type: W635C

Communication System: LTE; Communication System Band: LTE Band 40- Lower Side; Duty Cycle:1:1.58;

Conv.F=2.20;

Frequency: 2310 MHz; Medium parameters used: f = 2300 MHz; $\sigma = 1.71$ mho/m; $\epsilon r = 38.62$; $\rho = 1000$ kg/m³;

Phantom section: RightSection

Ambient temperature ($^{\circ}$): 20.8, Liquid temperature ($^{\circ}$): 20.5

SATIMO Configuration:

· Probe: SSE2; Calibrated: Apr. 30, 2024; Serial No.: 2023-EPGO-414


· Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

Measurement SW: OpenSAR V4_02_32

Configuration/ LTE Band 40- Lower Side Mid- Touch- Right/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/ LTE Band 40- Lower Side Mid- Touch- Right/Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm;

•••,	
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	7x7x7,dx=5mm dy=5mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	LTE Band 40- Lower Side
Channels	Middle
Signal	Crest factor: 1.58

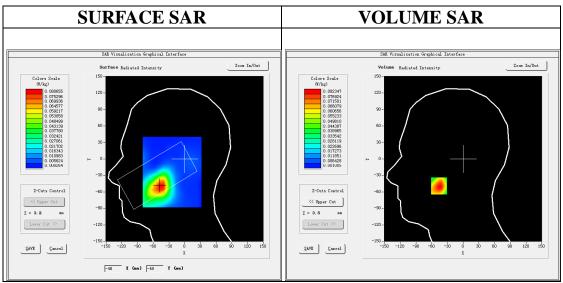

Maximum location: X=-46.00, Y=-49.00


SAR Peak: 0.13 W/kg


SAR 10g (W/Kg)	0.043566
SAR 1g (W/Kg)	0.078858

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.





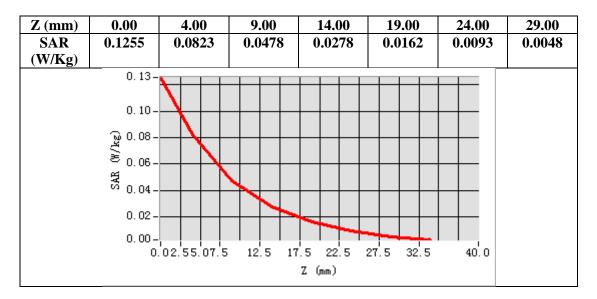

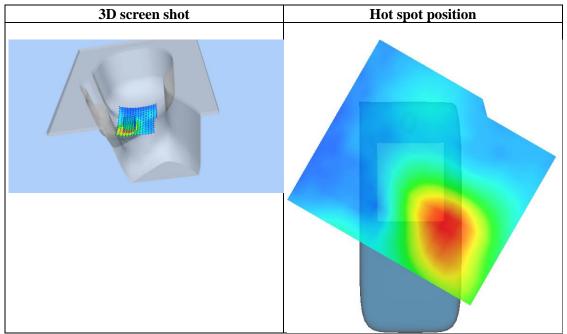



Page 217 of 254

Test Laboratory: AGC Lab Date: Apr. 25, 2025

LTE Band 40- Lower Side Mid-Body- Back (1 RB#0)

DUT: Phone; Type: W635C

Communication System: LTE; Communication System Band: LTE Band 40-Upper Side; Duty Cycle:1:1.58;

Conv.F=2.20

Frequency: 2310 MHz; Medium parameters used: f = 2300 MHz; $\sigma = 1.71$ mho/m; $\epsilon r = 38.62$; $\rho = 1000$ kg/m³;

Phantom section: Flat Section

Ambient temperature ($^{\circ}$): 20.8, Liquid temperature ($^{\circ}$): 20.5

SATIMO Configuration:

Probe: SSE2; Calibrated: Apr. 30, 2024; Serial No.: 2023-EPGO-414


· Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

Measurement SW: OpenSAR V4_02_32

Configuration/ LTE Band 40- Lower Side Mid-Body- Back/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/ LTE Band 40- Lower Side Mid-Body- Back/Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm;


• • • •	
Area Scan	surf_sam_plan.txt, h= 5.00 mm
Zoom Scan	7x7x7,dx=5mm dy=5mm dz=5mm
Phantom	Validation plane
Device Position	Body Back
Band	LTE Band 40- Lower Side
Channels	Middle
Signal	Crest factor: 1.58

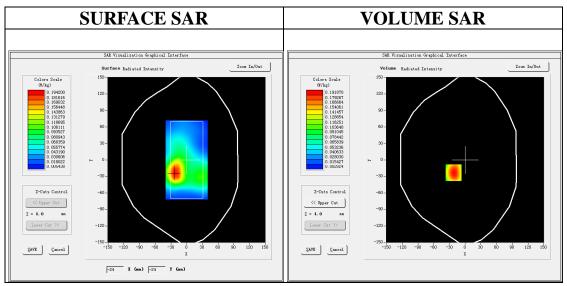


Maximum location: X=-22.00, Y=-23.00


SAR Peak: 0.30 W/kg

	8
SAR 10g (W/Kg)	0.100918
SAR 1g (W/Kg)	0.183117





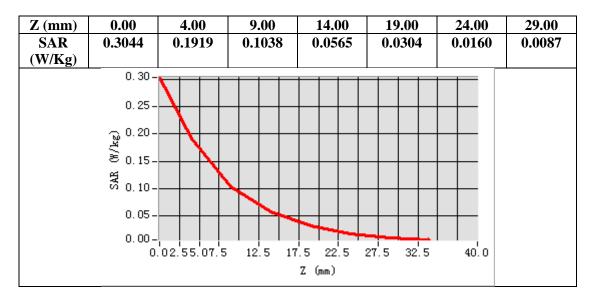

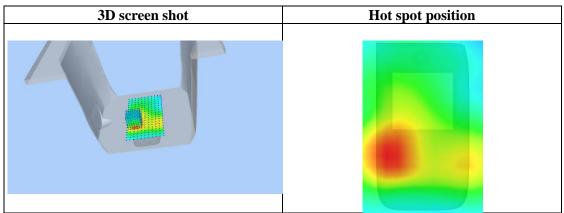



Page 219 of 254

Test Laboratory: AGC Lab Date: Apr. 25, 2025

LTE Band 40-Upper Side Mid-Tilt- Left(1 RB#0)

DUT: Phone; Type: W635C

Communication System: LTE; Communication System Band: LTE Band 40-Upper Side; Duty Cycle:1:1.58;

Conv.F=2.20;

Frequency: 2355 MHz; Medium parameters used: f = 2300 MHz; $\sigma = 1.73$ mho/m; $\epsilon r = 38.11$; $\rho = 1000$ kg/m³;

Phantom section: LeftSection

Ambient temperature (°C): 20.8, Liquid temperature (°C): 20.5

SATIMO Configuration:

· Probe: SSE2; Calibrated: Apr. 30, 2024; Serial No.: 2023-EPGO-414


· Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

· Measurement SW: OpenSAR V4_02_32

Configuration/ LTE Band 40-Upper Side Mid- Tilt- Left/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/ LTE Band 40-Upper Side Mid- Tilt- Left/Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm;


• • • • • • • • • • • • • • • • • • • •	
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	7x7x7,dx=5mm dy=5mm dz=5mm
Phantom	Left head
Device Position	Tilt
Band	LTE Band 40-Upper Side
Channels	Middle
Signal	Crest factor: 1.58

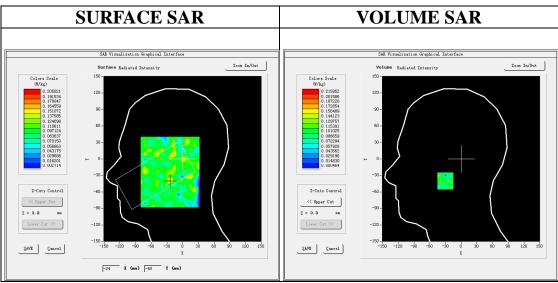


Maximum location: X=-24.00, Y=-40.00


SAR Peak: 0.34 W/kg

SAR 10g (W/Kg)	0.095747
SAR 1g (W/Kg)	0.092230





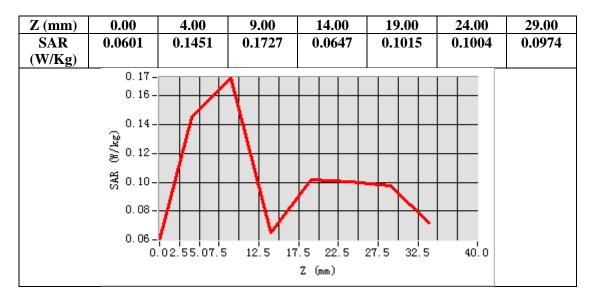

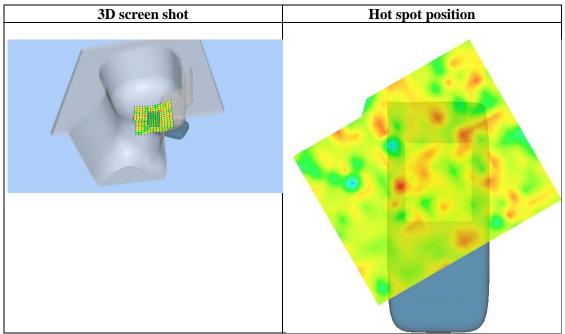



Page 221 of 254

Test Laboratory: AGC Lab Date: Apr. 25, 2025

LTE Band 40-Upper Side Mid-Body- Back (1 RB#0)

DUT: Phone; Type: W635C

Communication System: LTE; Communication System Band: LTE Band 40-Upper Side; Duty Cycle:1:1.58;

Conv.F=2.20

Frequency: 2355 MHz; Medium parameters used: f = 2300 MHz; $\sigma = 1.73$ mho/m; $\epsilon r = 38.11$; $\rho = 1000$ kg/m³;

Phantom section: Flat Section

Ambient temperature ($^{\circ}$): 20.8, Liquid temperature ($^{\circ}$): 20.5

SATIMO Configuration:

Probe: SSE2; Calibrated: Apr. 30, 2024; Serial No.: 2023-EPGO-414


· Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

Measurement SW: OpenSAR V4_02_32

Configuration/ LTE Band 40-Upper Side Mid-Body- Back/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/ LTE Band 40-Upper Side Mid-Body- Back/Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm;

• • • •				
Area Scan surf_sam_plan.txt, h= 5.00 mm				
Zoom Scan	an 7x7x7,dx=5mm dy=5mm dz=5mm			
Phantom	Phantom Validation plane			
Device Position Body Back				
Band LTE Band 40-Upper Side				
Channels Middle				
Signal Crest factor: 1.58				

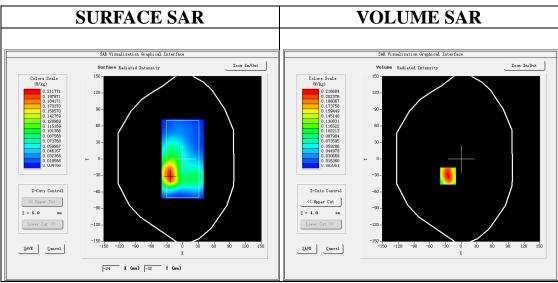


Maximum location: X=-25.00, Y=-31.00


SAR Peak: 0.35 W/kg 10g (W/Kg) 0.1


SAR 10g (W/Kg)	0.112143		
SAR 1g (W/Kg)	0.206911		

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.





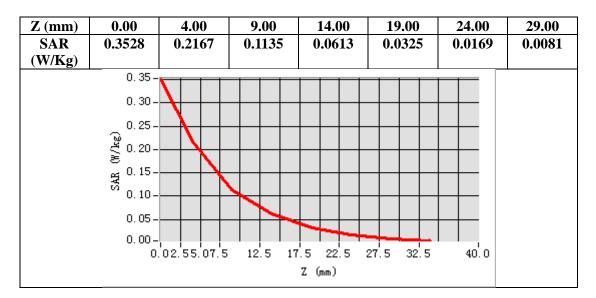

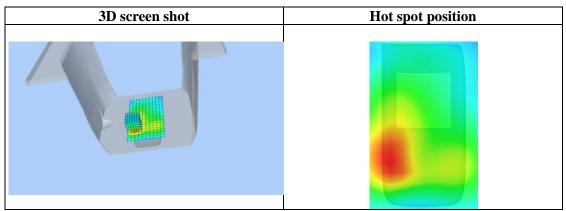



Page 223 of 254

Test Laboratory: AGC Lab Date: Apr. 17, 2025

LTE Band 41 Mid-Touch-Right (1RB#0) DUT: Phone; Type: W635C

Communication System: LTE; Communication System Band: LTE Band 41; Duty Cycle:1:1.58; Conv.F=2.06 Frequency: 2593MHz; Medium parameters used: f = 2600 MHz; $\sigma = 1.92 \text{ mho/m}$; $\epsilon r = 39.08$; $\rho = 1000 \text{ kg/m}^3$;

Phantom section: Right Section

Ambient temperature (°C): 21.2, Liquid temperature (°C): 20.9

SATIMO Configuration:

· Probe: SSE2; Calibrated: Apr. 30, 2024; Serial No.: 2023-EPGO-414


· Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

Measurement SW: OpenSAR V4_02_32


Configuration/ LTE BAND 41 Mid-Touch-Right/Area Scan: Measurement grid: dx=8mm, y=8mm Configuration/ LTE BAND 41 Mid-Touch-Right/Zoom Scan: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Area Scan	dx=8mm dy=8mm, h= 5.00 mm			
ZoomScan	7x7x7,dx=5mm dy=5mm dz=5mm			
Phantom	Right head			
Device Position	Cheek			
Band LTE BAND 41				
Channels	Middle			
Signal	OFDM (Crest factor: 1.58)			

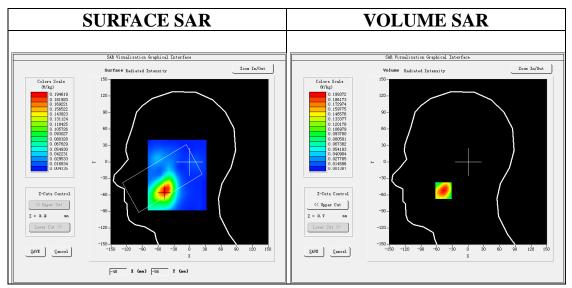



Maximum location: X=-47.00, Y=-52.00 SAR Peak: 0.32 W/kg

SAR 10g (W/Kg)	0.100124		
SAR 1g (W/Kg)	0.188719		





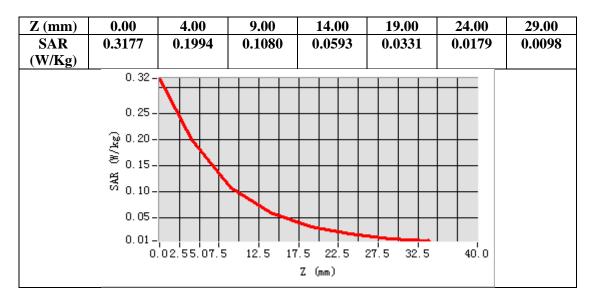

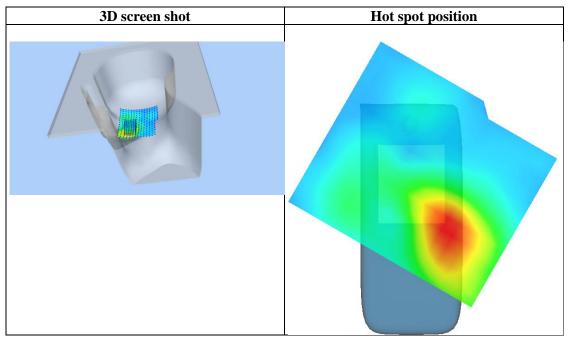



Page 225 of 254

Test Laboratory: AGC Lab Date: Apr. 17, 2025

LTE Band 41 Mid-Edge 2(Right)(1RB#0)

DUT: Phone; Type: W635C

Communication System: LTE; Communication System Band: LTE Band 41; Duty Cycle:1:1.58; Conv.F=2.06 Frequency: 2593MHz; Medium parameters used: f = 2600 MHz; $\sigma = 1.92 \text{ mho/m}$; $\epsilon = 39.08$; $\rho = 1000 \text{ kg/m}^3$;

Phantom section: Flat Section

Ambient temperature ($^{\circ}$): 21.2, Liquid temperature ($^{\circ}$): 20.9

SATIMO Configuration:

Probe: SSE2; Calibrated: Apr. 30, 2024; Serial No.: 2023-EPGO-414


· Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

· Measurement SW: OpenSAR V4_02_32

Configuration/ LTE BAND 41 Mid-Edge 2(Right) /Area Scan: Measurement grid: dx=8mm, y=8mm Configuration/ LTE BAND 41 Mid-Edge 2(Right) /Zoom Scan: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Area Scan	surf_sam_plan.txt, h= 5.00 mm		
ZoomScan	7x7x7,dx=5mm dy=5mm dz=5mm		
Phantom	Validation plane		
Device Position Edge 2(Right)			
Band LTE BAND 41			
Channels	Middle		
Signal OFDM (Crest factor: 1.58)			

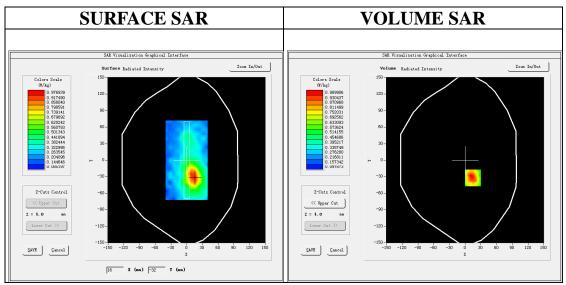



Maximum location: X=15.00, Y=-32.00 SAR Peak: 1.64 W/kg

SAR 10g (W/Kg)	0.576051			
SAR 1g (W/Kg)	0.966505			





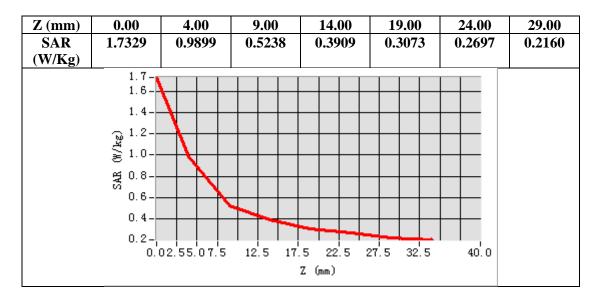

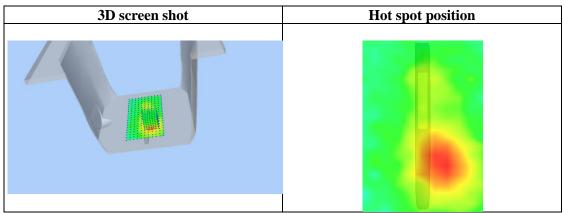



Page 227 of 254

Test Laboratory: AGC Lab Date: Apr. 13, 2025

LTE Band 66 Mid-Touch-Right (1 RB#0)

DUT: Phone; Type: W635C

Communication System: LTE; Communication System Band: LTE Band 66; Duty Cycle:1:1; Conv.F=2.28; Frequency:1755 MHz; Medium parameters used: f = 1750 MHz; $\sigma = 1.42$ mho/m; $\epsilon r = 40.33$; $\rho = 1000$ kg/m³;

Phantom section: Right Section

Ambient temperature (°C): 21.2, Liquid temperature (°C): 20.7

SATIMO Configuration:

Probe: SSE2; Calibrated: Apr. 30, 2024; Serial No.: 2023-EPGO-414


· Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

· Measurement SW: OpenSAR V4_02_32

Configuration/ LTE Band 66 Mid- Touch-Right /Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/ LTE Band 66 Mid- Touch-Right /Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;

Area Scan	dx=8mm dy=8mm, h= 5.00 mm		
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm		
Phantom	Right head		
Device Position Cheek			
Band LTE Band 66			
Channels Middle			
Signal	OFDM (Crest factor: 1.0)		

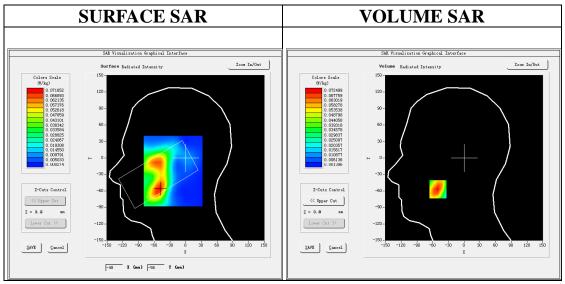

Maximum location: X=-50.00, Y=-57.00 SAR Peak: 0.11 W/kg


SAR 10g (W/Kg)	0.040588			
SAR 1g (W/Kg)	0.069498			

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00







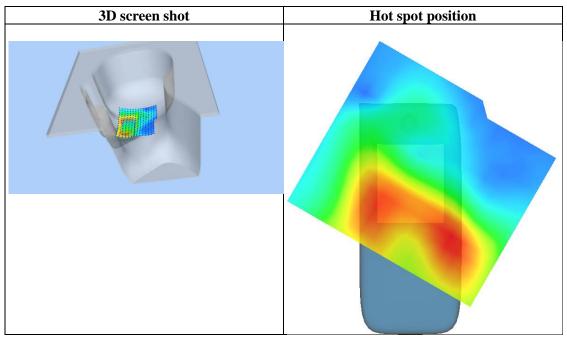



Page 229 of 254

Test Laboratory: AGC Lab Date: Apr. 13, 2025

LTE Band 66 Mid-Edge 3(Bottom) (1 RB#0)

DUT: Phone; Type: W635C

Communication System: LTE; Communication System Band: LTE Band 66; Duty Cycle:1:1; Conv.F=2.28; Frequency:1755 MHz; Medium parameters used: f = 1750 MHz; $\sigma = 1.42$ mho/m; $\epsilon r = 40.33$; $\rho = 1000$ kg/m³;

Phantom section: Flat Section

Ambient temperature ($^{\circ}$): 21.2, Liquid temperature ($^{\circ}$): 20.7

SATIMO Configuration:

Probe: SSE2; Calibrated: Apr. 30, 2024; Serial No.: 2023-EPGO-414


· Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

· Measurement SW: OpenSAR V4_02_32

Configuration/ LTE Band 66 Mid-Edge 3(Bottom)/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/ LTE Band 66 Mid-Edge 3(Bottom)/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5m;


Area Scan	surf_sam_plan.txt, h= 5.00 mm			
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm			
Phantom	Validation plane			
Device Position Edge 3(Bottom)				
Band	LTE Band 66			
Channels Middle				
Signal	OFDM (Crest factor: 1.0)			

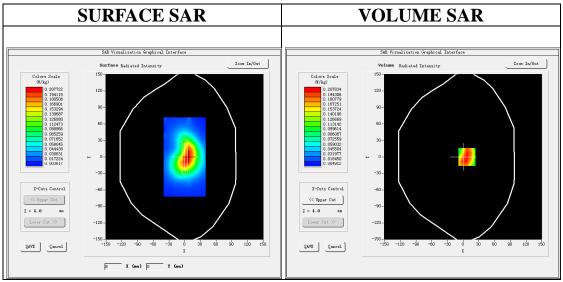


Maximum location: X=7.00, Y=0.00 SAR Peak: 0.31 W/kg


SAR 10g (W/Kg)	0.116417
SAR 1g (W/Kg)	0.199450

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00





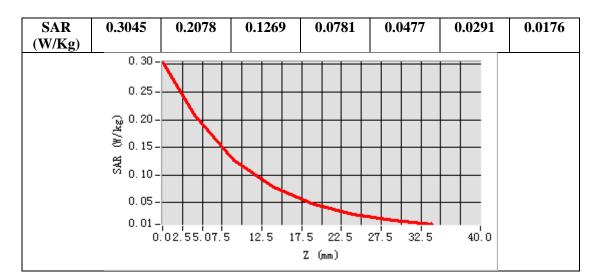

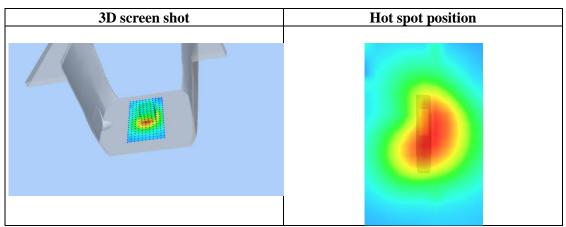



Page 231 of 254

2.4GHz 802.11b

Test Laboratory: AGC Lab
802.11b Mid-Tilt-Left
Date: Apr. 24, 2025

DUT: Phone; Type: W635C

Communication System: Wi-Fi; Communication System Band: 802.11b; Duty Cycle: 1:1; Conv.F=2.16; Frequency: 2437 MHz; Medium parameters used: f = 2450 MHz; $\sigma = 1.73 \text{mho/m}$; $\epsilon r = 40.06 \rho = 1000 \text{ kg/m}^3$;

Phantom section: Left Section

Ambient temperature (°C):21.2, Liquid temperature (°C): 20.9

SATIMO Configuration:

• Probe: SSE2; Calibrated: Apr. 30, 2024; Serial No.: 2023-EPGO-414

Sensor-Surface: 4mm (Mechanical Surface Detection)


· Phantom: SAM twin phantom

Measurement SW: OpenSAR V4_02_32

Configuration/802.11b Mid- Tilt-Left/Area Scan: Measurement grid: dx=8mm, dy=8mm

Configuration/802.11b Mid- Tilt-Left/Zoom Scan: Measurement grid: dx=5mm,dy=5mm, dz=5mm


Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	7x7x7,dx=5mm dy=5mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	2450MHz
Channels	Tilt
Signal	Crest factor: 1.0

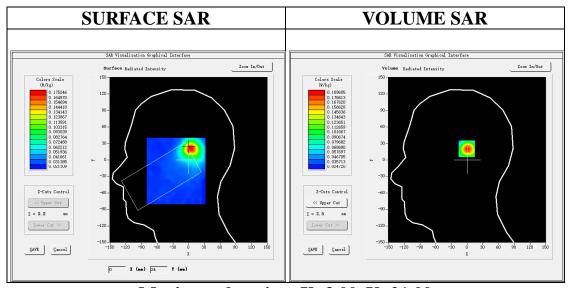


Maximum location: X=3.00, Y=21.00 SAR Peak: 0.31 W/kg


SAR 10g (W/Kg)	0.092562
SAR 1g (W/Kg)	0.175887

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.





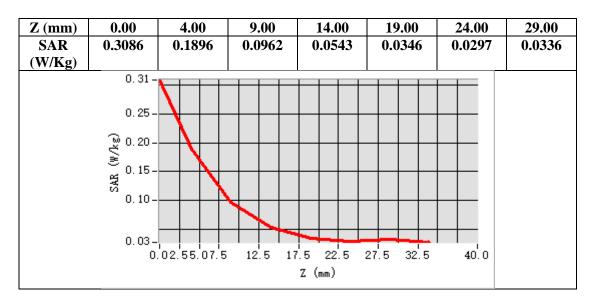

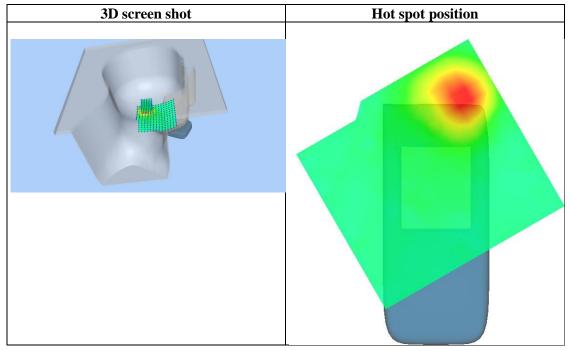



Page 233 of 254

Test Laboratory: AGC Lab Date: Apr. 24, 2025

802.11b Mid-Edge 1 (Top) DUT: Phone; Type: W635C

Communication System: Wi-Fi; Communication System Band: 802.11b; Duty Cycle: 1:1; Conv.F=2.16; Frequency: 2437 MHz; Medium parameters used: f = 2450 MHz; $\sigma = 1.73 \text{mho/m}$; $\epsilon = 40.06$; $\rho = 1000 \text{ kg/m}^3$;

Phantom section: Flat Section

Ambient temperature (°C):21.2, Liquid temperature (°C): 20.9

SATIMO Configuration:

· Probe: SSE2; Calibrated: Apr. 30, 2024; Serial No.: 2023-EPGO-414


· Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

Measurement SW: OpenSAR V4_02_32


Configuration/802.11b Mid- Edge 1 (Top) /Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/802.11b Mid- Edge 1 (Top) /Zoom Scan: Measurement grid: dx=5mm, dy=5mm, dz=5mm;

Area Scan	surf_sam_plan.txt, h= 5.00 mm			
ZoomScan	7x7x7,dx=5mm dy=5mm dz=5mm			
Phantom	Validation plane			
Device Position	Edge 1 (Top)			
Band	2450MHz			
Channels	Middle			
Signal	Crest factor: 1.0			

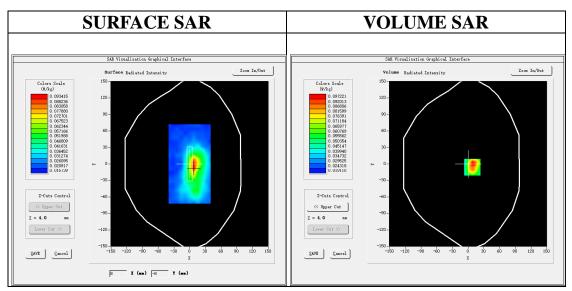



Maximum location: X=8.00, Y=-6.00 SAR Peak: 0.18 W/kg

SAR 10g (W/Kg)	0.051325
SAR 1g (W/Kg)	0.092866





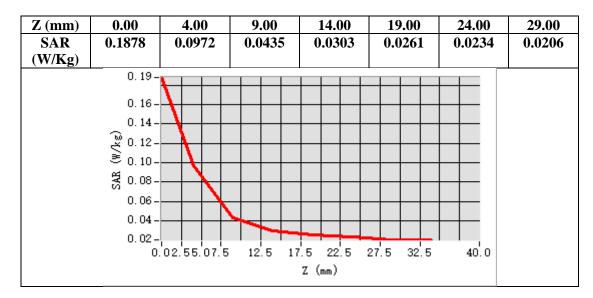

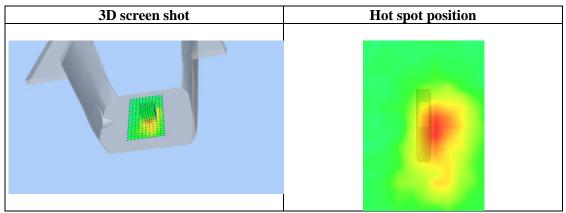



Page 235 of 254

5.2GHz 802.11a

Test Laboratory: AGC Lab

802.11a CH40- Tilt-Left

Date: Apr. 20, 2025

DUT: Phone; Type: W635C

Communication System: Wi-Fi; Communication System Band: 802.11a; Duty Cycle: 1:1; Conv.F=1.53; Frequency: 5200MHz; Medium parameters used: f = 5200~MHz; $\sigma = 4.53mho/m$; $\epsilon = 35.68$; $\rho = 1000~kg/m^3$;

Phantom section: Left Section

Ambient temperature (°C): 20.9, Liquid temperature (°C): 20.5

SATIMO Configuration:

· Probe: SSE2; Calibrated: Apr. 30, 2024; Serial No.: 2023-EPGO-414


· Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

Measurement SW: OpenSAR V4_02_32

Configuration/802.11a CH40- Tilt-Left /Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/802.11a CH40- Tilt-Left /Zoom Scan: Measurement grid: dx=4mm,dy=4mm, dz=2mm


Area Scan	dx=8mm dy=8mm, h= 5.00 mm						
ZoomScan	7x7x12 dx=4mm dy=4mm dz=2mm						
Phantom	Left head						
Device Position	Tilt						
Band	5200MHz						
Channels	CH40						
Signal	Crest factor: 1.0						

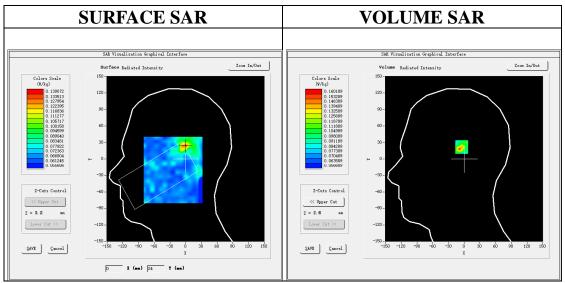


Maximum location: X=0.00, Y=24.00 SAR Peak: 0.38 W/kg


SAR 10g (W/Kg)	0.091745
SAR 1g (W/Kg)	0.145850

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.





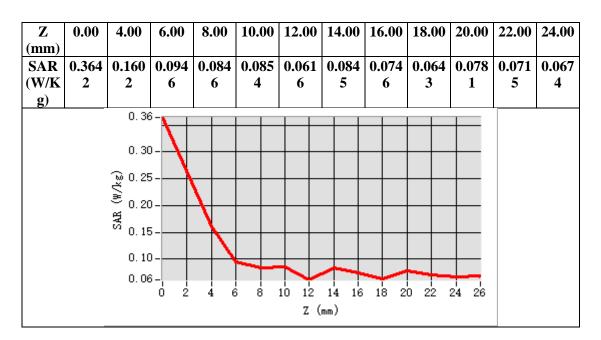

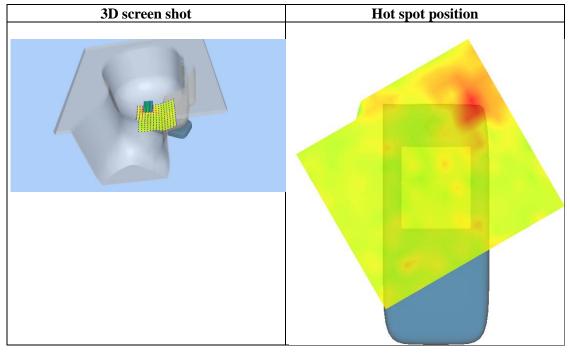



Date: Apr. 20, 2025

Page 237 of 254

Test Laboratory: AGC Lab 802.11a CH40-Back

DUT: Phone; Type: W635C

Communication System: Wi-Fi; Communication System Band: 802.11a; Duty Cycle: 1:1; Conv.F=2.35; Frequency: 5200MHz; Medium parameters used: f = 5200 MHz; $\sigma = 4.53mho/m$; $\epsilon = 35.68$; $\rho = 1000 kg/m^3$;

Phantom section: Flat Section

Ambient temperature (°C): 20.9, Liquid temperature (°C): 20.5

SATIMO Configuration:

· Probe: SSE2; Calibrated: Apr. 30, 2024; Serial No.: 2023-EPGO-414


· Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

Measurement SW: OpenSAR V4_02_32

Configuration/802.11a CH40- Back /Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/802.11a CH40- Back /Zoom Scan: Measurement grid: dx=4mm,dy=4mm, dz=2mm


Area Scan	sam_direct_droit2_surf8mm.txt						
ZoomScan	7x7x12 dx=4mm dy=4mm dz=2mm						
Phantom	Validation plane						
Device Position	Back						
Band	5200MHz						
Channels	CH40						
Signal	Crest factor: 1.0						

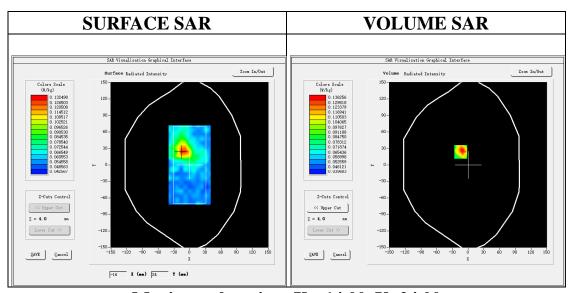

Maximum location: X=-14.00, Y=24.00 SAR Peak: 0.38 W/kg


SAR 10g (W/Kg)	0.084943
SAR 1g (W/Kg)	0.140444

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.





Z (mm)	0.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00	18.00	20.00	22.00	24.00
SAR	0.406	0.136	0.076	0.043	0.060	0.055	0.064	0.051	0.058	0.056	0.057	0.043
(W/K	5	3	9	3	2	6	2	0	5	7	2	7
g)	_											
		0.41	-			+ +	+ +			+		
		0.35	5-1			$\perp \perp$	\perp					
		0.30	1									
		- 0.30	1									
		0.25	5-			+ +	+					
		0.20)-	\leftarrow		++	++			+		
		ින් 0.15	5-	$\overline{}$		++	+					
		0.10	ــــــــــــــــــــــــــــــــــــــ									
						\perp \mid \mid	\perp					
		0.04				10 10	11 1	10 0		04 00		
			0 2	4 6	8	10 12	14 16	18 2	0 22	24 26		
Z (mm)												

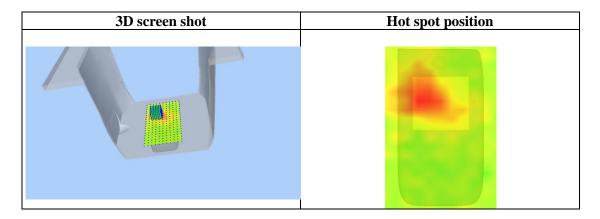



Page 239 of 254

5.3GHz 802.11a

Test Laboratory: AGC Lab

Date: Apr. 19, 2025
802.11a CH60-Tilt-Left

DUT: Phone; Type: W635C

Communication System: Wi-Fi; Communication System Band: 802.11a; Duty Cycle: 1:1; Conv.F=1.53; Frequency: 5300MHz; Medium parameters used: f = 5300 MHz; $\sigma = 4.94 \text{mho/m}$; $\epsilon = 36.28$; $\rho = 1000 \text{ kg/m}^3$;

Phantom section: Left Section

Ambient temperature (°C): 21.2, Liquid temperature (°C): 21.1

SATIMO Configuration:

· Probe: SSE2; Calibrated: Apr. 30, 2024; Serial No.: 2023-EPGO-414


· Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

Measurement SW: OpenSAR V4_02_32

Configuration/802.11a CH60- Tilt-Left /Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/802.11a CH60- Tilt-Left /Zoom Scan: Measurement grid: dx=4mm,dy=4mm, dz=2mm

Area Scan	dx=8mm dy=8mm, h= 5.00 mm						
ZoomScan	7x7x12 dx=4mm dy=4mm dz=2mm						
Phantom	Left head						
Device Position	Tilt						
Band	5300MHz						
Channels	CH60						
Signal	Crest factor: 1.0						

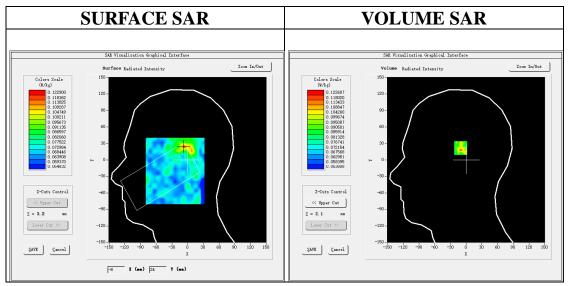

Maximum location: X=-7.00, Y=24.00

SAR Peak: 0.26 W/kg


SAR 10g (W/Kg)	0.082960
SAR 1g (W/Kg)	0.111866

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.





Z (mm)	0.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00	18.00	20.00	22.00	24.00
SAR	0.237	0.122	0.082	0.077	0.083	0.074	0.074	0.068	0.066	0.080	0.068	0.071
(W/K	2	6	1	9	3	3	9	6	6	6	6	6
g)												
		0.23	37 -		1 1							
					++	+						
		0.20	00-		++	+				_		
		Ca 0 17	75 - 🔼									
		© 0.17 S 0.19		\setminus								
			50-	\		+ +						
		器 0.12	25 -	-	++	+				_		
		0.10	n									
		0.10	~-	1		IT						
		0.06	37-			7	+-		-	-		
			Ö 2	4	6 8	10 12	14 16	18 2	0 22	24 26		
						Z	(mm)					

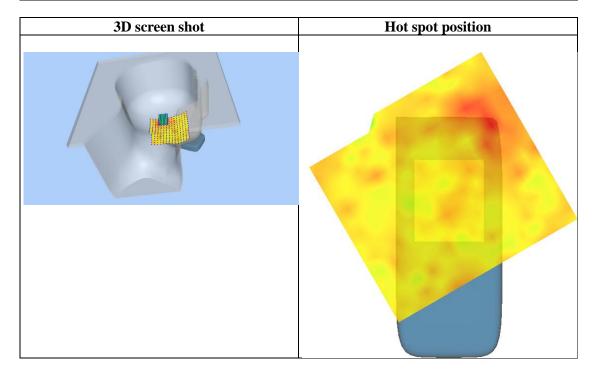



Date: Apr. 19, 2025

Page 241 of 254

Test Laboratory: AGC Lab

802.11a CH60-Back

DUT: Phone; Type: W635C

Communication System: Wi-Fi; Communication System Band: 802.11a; Duty Cycle: 1:1; Conv.F=1.53; Frequency: 5300MHz; Medium parameters used: f = 5300 MHz; $\sigma = 4.94$ mho/m; $\epsilon = 36.28$; $\rho = 1000$ kg/m³;

Phantom section: Flat Section

Ambient temperature (°C): 21.2, Liquid temperature (°C): 21.1

SATIMO Configuration:

· Probe: SSE2; Calibrated: Apr. 30, 2024; Serial No.: 2023-EPGO-414


· Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

Measurement SW: OpenSAR V4_02_32

Configuration/802.11a CH60- Back /Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/802.11a CH60- Back /Zoom Scan: Measurement grid: dx=4mm,dy=4mm, dz=2mm


Area Scan	sam_direct_droit2_surf8mm.txt			
ZoomScan	7x7x12 dx=4mm dy=4mm dz=2mm			
Phantom	Validation plane			
Device Position	Back			
Band	5300MHz			
Channels	CH60			
Signal	Crest factor: 1.0			

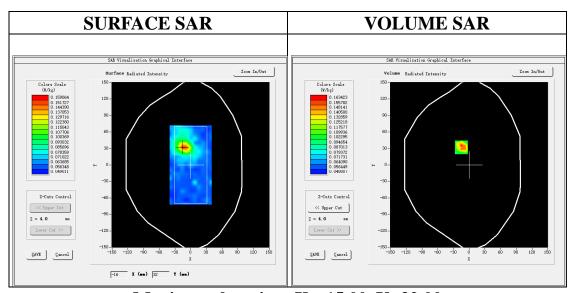


Maximum location: X=-15.00, Y=32.00 SAR Peak: 0.37 W/kg


SAR 10g (W/Kg)	0.094295
SAR 1g (W/Kg)	0.153830

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.





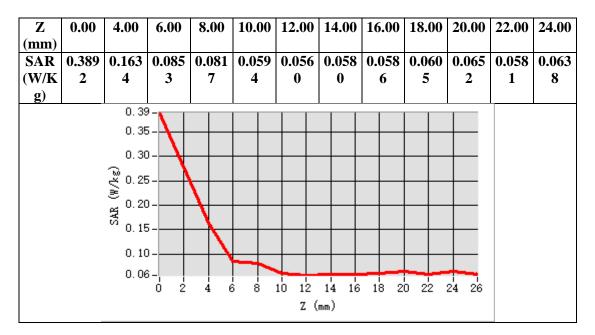

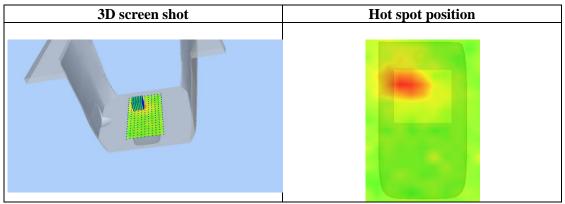



Page 243 of 254

5.6GHz 802.11a

Test Laboratory: AGC Lab Date: Apr. 21, 2025

802.11a CH116-Tilt-Left DUT: Phone; Type: W635C

Communication System: Wi-Fi; Communication System Band: 802.11a; Duty Cycle: 1:1; Conv.F=1.24; Frequency: 5580MHz; Medium parameters used: f = 5600~MHz; $\sigma = 5.15mho/m$; $\epsilon = 36.79$; $\rho = 1000~kg/m^3$;

Phantom section: Left Section

Ambient temperature (°C): 21.3, Liquid temperature (°C): 21.1

SATIMO Configuration:

· Probe: SSE2; Calibrated: Apr. 30, 2024; Serial No.: 2023-EPGO-414


Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

Measurement SW: OpenSAR V4_02_32

Configuration/802.11a CH116- Tilt-Left /Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/802.11a CH116-Tilt-Left /Zoom Scan: Measurement grid: dx=4mm,dy=4mm, dz=2mm

Area Scan	dx=8mm dy=8mm, h= 5.00 mm				
ZoomScan	7x7x12 dx=4mm dy=4mm dz=2mm				
Phantom	Left head				
Device Position	Tilt				
Band	5600MHz				
Channels	CH116				
Signal	Crest factor: 1.0				

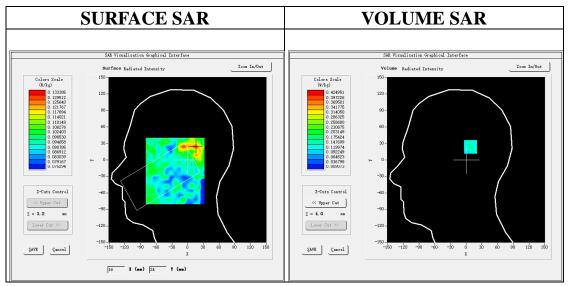


Maximum location: X=15.00, Y=24.00

SAR Peak: 0.49 W/kg


SAR 10g (W/Kg)	0.121759
SAR 1g (W/Kg)	0.149956

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.





Z (mm)	0.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00	18.00	20.00	22.00	24.00
SAR	0.317	0.147	0.103	0.108	0.100	0.103	0.101	0.089	0.112	0.114	0.114	0.101
(W/K	9	4	1	3	3	4	7	7	3	4	9	4
g)												
		0.32	2-			1 1						
			\mathbf{T}				\top					
		0.25	5- -			$\perp \perp$						
		® \$ 0.20	\ \									
		€ 0.20)-	acksquare		$\perp \perp$	\perp					
		왕 0.15								١,		
		0.10										
		0.09	0 2	4 6	8	10 12	14 16	18 2	0 22	24 26		
						z (

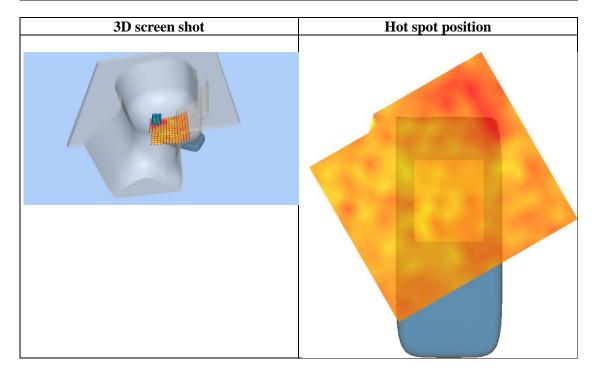



Date: Apr. 21, 2025

Page 245 of 254

Test Laboratory: AGC Lab 802.11a CH116-Back

DUT: Phone; Type: W635C

Communication System: Wi-Fi; Communication System Band: 802.11a; Duty Cycle: 1:1; Conv.F=1.24; Frequency: 5580MHz; Medium parameters used: f = 5600 MHz; $\sigma = 5.15 mho/m$; $\epsilon = 36.79$; $\rho = 1000 kg/m^3$;

Phantom section: Flat Section

Ambient temperature (°C): 21.3, Liquid temperature (°C): 21.1

SATIMO Configuration:

· Probe: SSE2; Calibrated: Apr. 30, 2024; Serial No.: 2023-EPGO-414


· Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

Measurement SW: OpenSAR V4_02_32

Configuration/802.11a CH116- Back /Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/802.11a CH116- Back /Zoom Scan: Measurement grid: dx=4mm,dy=4mm, dz=2mm


Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	7x7x12 dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Back
Band	5600MHz
Channels	CH116
Signal	Crest factor: 1.0

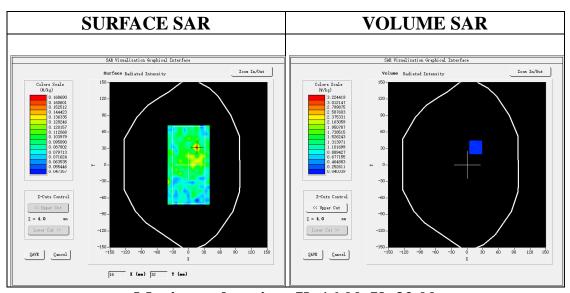

Maximum location: X=16.00, Y=32.00 SAR Peak: 3.21 W/kg


SAR 10g (W/Kg)	0.118497
SAR 1g (W/Kg)	0.377096

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.





Z (mm)	0.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00	18.00	20.00	22.00	24.00
SAR	0.256	0.150	0.081	0.110	0.074	0.096	0.082	0.099	0.068	0.105	0.109	0.084
(W/K	0	2	3	0	4	7	3	2	9	2	7	4
g)												
		0.25	56 - 🚃			+ +				+		
		0. 22	e									
						\top						
		0.20										
		0.17	75 -	$\overline{}$		+	+			_		
		ے 0.15 مے	50 -	$-\lambda$		+	+			_		
		₩ 0.18	25 -	Λ		\perp	\perp					
		0.10		- 1					_			
		0.10	,,,	1			$\overline{}$					
		0.06	8-		1	Y 	1					
			0 2	4	6 8	10 12	14 16	18 2	0 22	24 26		
						Z ((mm)					

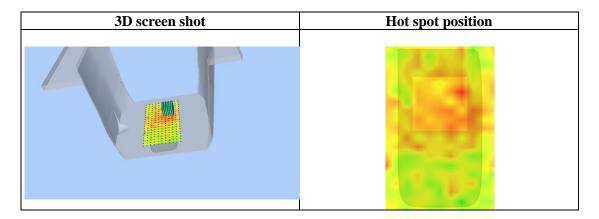



Page 247 of 254

5.8GHz 802.11a

Test Laboratory: AGC Lab

802.11a CH157- Touch-Left

Date: Apr. 22, 2025

DUT: Phone; Type: W635C

Communication System: Wi-Fi; Communication System Band: 802.11a; Duty Cycle: 1:1; Conv.F=1.37; Frequency: 5785MHz; Medium parameters used: f = 5800~MHz; $\sigma = 5.22mho/m$; $\epsilon = 36.01$; $\rho = 1000~kg/m^3$;

Phantom section: Left Section

Ambient temperature (°C): 21.6, Liquid temperature (°C): 21.5

SATIMO Configuration:

• Probe: SSE2; Calibrated: Apr. 30, 2024; Serial No.: 2023-EPGO-414


· Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

Measurement SW: OpenSAR V4_02_32

Configuration/802.11a CH157- Touch-Left /Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/802.11a CH157- Touch-Left /Zoom Scan: Measurement grid: dx=4mm,dy=4mm, dz=2mm

Area Scan	dx=8mm dy=8mm, h= 5.00 mm				
ZoomScan	7x7x12 dx=4mm dy=4mm dz=2mm				
Phantom	Left head				
Device Position	Cheek				
Band	5800MHz				
Channels	Middle				
Signal	Crest factor: 1.0				

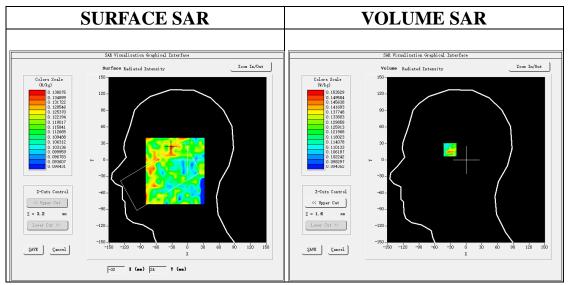

Maximum location: X=-31.00, Y=23.00

SAR Peak: 0.35 W/kg


SAR 10g (W/Kg)	0.120927
SAR 1g (W/Kg)	0.139991

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.





Z (mm)	0.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00	18.00	20.00	22.00	24.00
SAR	0.308	0.153	0.110	0.116	0.105	0.122	0.105	0.133	0.107	0.124	0.113	0.118
(W/K	5	5	3	7	1	5	5	3	5	4	4	1
g)												
		0.30	08 - 📉									
		0.27	, _E \									
			1									
		0.25	1			+	\vdash					
		(2) 0.22 (3) 0.20	25 -	\vdash		++	+			+		
			00	+	+	++	+	_		+		
		뚫 0.17	75 –	\rightarrow		++	+					
		0.15	50 -	\perp		\perp	\perp					
		0. 12					- →			1		
		0.10		1		$\overline{}$		$\overline{}$				
		0.10	0 2	4	i i	10 12	14 16	i 18 2	0 22	i 1 24 26		
							(mm)					

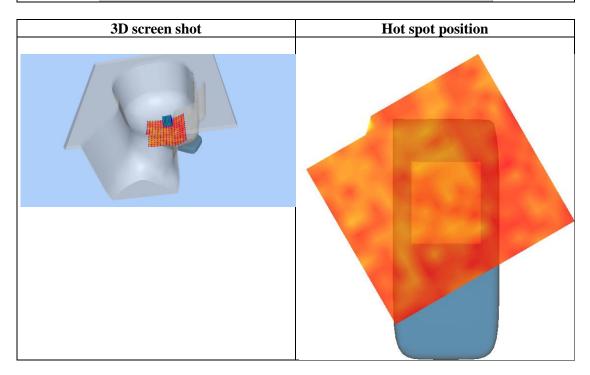



Date: Apr. 22, 2025

Page 249 of 254

Test Laboratory: AGC Lab 802.11a CH157- Front

DUT: Phone; Type: W635C

Communication System: Wi-Fi; Communication System Band: 802.11a; Duty Cycle: 1:1; Conv.F=1.37; Frequency: 5785MHz; Medium parameters used: f = 5800 MHz; $\sigma = 5.22\text{mho/m}$; $\epsilon = 36.01$; $\rho = 1000 \text{ kg/m}^3$;

Phantom section: Flat Section

Ambient temperature (°C): 21.6, Liquid temperature (°C): 21.5

SATIMO Configuration:

· Probe: SSE2; Calibrated: Apr. 30, 2024; Serial No.: 2023-EPGO-414


· Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

Measurement SW: OpenSAR V4_02_32

Configuration/ 802.11a CH157- Front /Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/ 802.11a CH157- Front /Zoom Scan: Measurement grid: dx=4mm,dy=4mm, dz=2mm


Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	7x7x12 dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Front
Band	5800MHz
Channels	Middle
Signal	Crest factor: 1.0

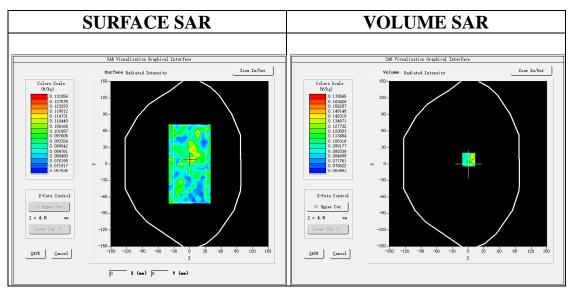

Maximum location: X=1.00, Y=8.00 SAR Peak: 0.35 W/kg


SAR 10g (W/Kg)	0.110835		
SAR 1g (W/Kg)	0.143945		

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.





Z (mm)	0.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00	18.00	20.00	22.00	24.00
SAR	0.363	0.170	0.087	0.124	0.067	0.068	0.065	0.086	0.097	0.085	0.076	0.092
(W/K	6	6	2	8	9	9	8	5	1	8	4	9
g)												
		0.36	i									
		0.30)-			+	+					
		₩ 0.25	5 –			$\perp \perp$	\perp					
		₹		\								
		(%) 0.25 0.20 0.20)-	$\overline{}$			+ +					
		ින් 0.15	5 – –	\rightarrow		\perp	\perp					
				-1								
		0.10		 		+	 	_		-		
		0.07				-	1	10 0		1 00		
			0 2	4 6	8	10 12	14 16	18 2	0 22	24 26		
						z (mm)					

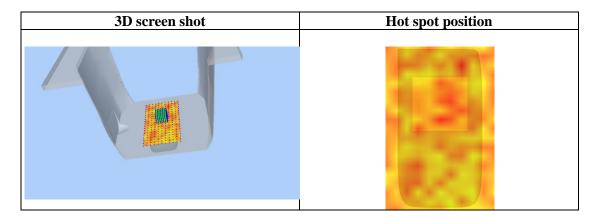



Page 251 of 254

Repeated SAR

Test Laboratory: AGC Lab Date: Apr. 17, 2025

LTE Band 41 Mid-Edge 2(Right)(1RB#0)

DUT: Phone; Type: W635C

Communication System: LTE; Communication System Band: LTE Band 41; Duty Cycle:1:1.58; Conv.F=2.06 Frequency: 2593MHz; Medium parameters used: f = 2600 MHz; $\sigma = 1.92 \text{ mho/m}$; $\epsilon = 39.08$; $\rho = 1000 \text{ kg/m}^3$;

Phantom section: Flat Section

Ambient temperature ($^{\circ}$ C): 21.2, Liquid temperature ($^{\circ}$ C): 20.9

SATIMO Configuration:

· Probe: SSE2; Calibrated: Apr. 30, 2024; Serial No.: 2023-EPGO-414


· Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

· Measurement SW: OpenSAR V4_02_32

Configuration/ LTE BAND 41 Mid-Edge 2(Right) /Area Scan: Measurement grid: dx=8mm, y=8mm Configuration/ LTE BAND 41 Mid-Edge 2(Right) /Zoom Scan: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Area Scan	surf_sam_plan.txt, h= 5.00 mm
ZoomScan	7x7x7,dx=5mm dy=5mm dz=5mm
Phantom	Validation plane
Device Position	Edge 2(Right)
Band	LTE BAND 41
Channels	Middle
Signal	OFDM (Crest factor: 1.58)

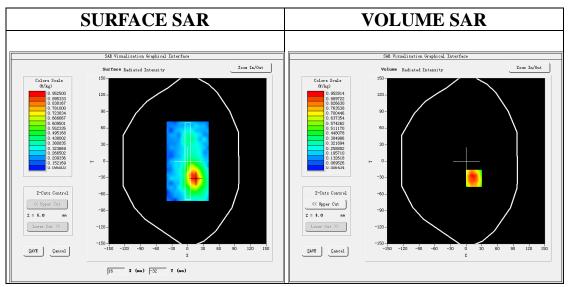


Maximum location: X=15.00, Y=-31.00


SAR Peak: 1.48 W/kg


SAR 10g (W/Kg)	0.530639		
SAR 1g (W/Kg)	0.826310		

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.





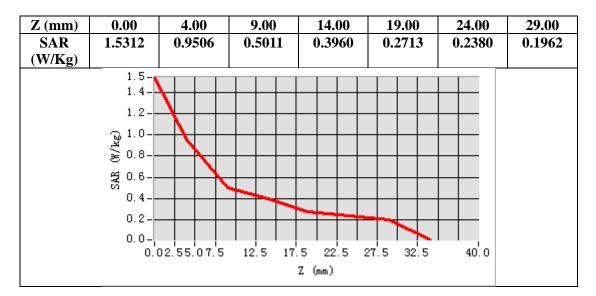

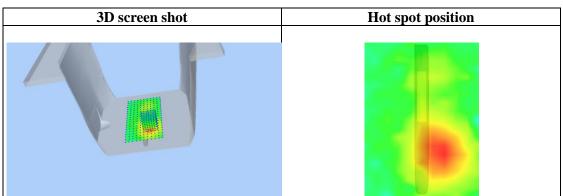



Page 253 of 254

APPENDIX C. TEST SETUP PHOTOGRAPHS

Refer to Attached files.

APPENDIX D. CALIBRATION DATA

Refer to Attached files.



Page 254 of 254

Conditions of Issuance of Test Reports

- 1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").
- 2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.
- 3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.
- 4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.
- 5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.
- 6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.

 7. Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to

submitting the sample for testing.

- 8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.
- 9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.

----END OF REPORT----