





# **FCC Test Report**

Report No.: AGC14499241203FR01

FCC ID : 2APPZ-W635W

**APPLICATION PURPOSE**: Original Equipment

**PRODUCT DESIGNATION**: Phone

BRAND NAME : Fanvi

**MODEL NAME** : W635W, W635W-S

**APPLICANT**: Fanvil Technology Co., Ltd

**DATE OF ISSUE** : May 14, 2025

**STANDARD(S)** : FCC Part 15 Subpart C §15.247

**REPORT VERSION**: V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd



Page 2 of 91

# **Report Revise Record**

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	May 14, 2025	Valid	Initial Release




# **Table of Contents**

1. General Information	5
2. Product Information	6
2.1 Product Technical Description	6
2.2 Test Frequency List	7
2.3 Related Submittal(S) / Grant (S)	8
2.4 Test Methodology	8
2.5 Receiver Input Bandwidth	8
2.6 Equally Average Use of Frequencies and Behaviour	8
2.7 Pseudorandom Frequency Hopping Sequence	9
2.8 Special Accessories	10
2.9 Equipment Modifications	10
2.10 Antenna Requirement	10
3. Test Environment	11
3.1 Address of The Test Laboratory	11
3.2 Test Facility	11
3.3 Environmental Conditions	12
3.4 Measurement Uncertainty	12
3.5 List of Equipment Used	13
4.System Test Configuration	16
4.1 EUT Configuration	16
4.2 EUT Exercise	16
4.3 Configuration of Tested System	16
4.4 Equipment Used in Tested System	17
4.5 Summary of Test Results	18
5. Description of Test Modes	19
6. RF Output Power Measurement	20
6.1 Provisions Applicable	20
6.2 Measurement Procedure	20
6.3 Measurement Setup (Block Diagram of Configuration)	20
6.4 Measurement Result	21
7. 20dB Bandwidth and 99% Occupied Bandwidth Measurement	27
7.1 Provisions Applicable	27
7.2 Measurement Procedure	27
7.3 Measurement Setup (Block Diagram of Configuration)	27
7.4 Measurement Results	28
8. Conducted Band Edge and Out-of-Band Emissions	33
8.1 Provisions Applicable	33
8.2 Measurement Procedure	33
8.3 Measurement Setup (Block Diagram of Configuration)	33
8 4 Measurement Results	34



9. Radiated Spurious Emission	54
9.1 Measurement Limit	54
9.2 Measurement Procedure	54
9.3 Measurement Setup (Block Diagram of Configuration)	57
9.4 Measurement Result	58
10. Number of Hopping Frequency Measurement	72
10.1 Provisions Applicable	72
10.2 Measurement Procedure	72
10.3 Measurement Setup (Block Diagram of Configuration)	72
10.4 Measurement Result	72
11. Time of Occupancy (Dwell Time) Measurement	74
11.1 Provisions Applicable	74
11.2 Measurement Procedure	74
11.3 Measurement Setup (Block Diagram of Configuration)	74
11.4 Measurement Result	74
12. Frequency Separation Measurement	78
12.1 Provisions Applicable	78
12.2 Measurement Procedure	78
12.3 Measurement Setup (Block Diagram of Configuration)	78
12.4 Measurement Result	78
13. AC Power Line Conducted Emission Test	80
13.1 Measurement Limit	80
13.2 Measurement Setup (Block Diagram of Configuration)	80
13.3 Preliminary Procedure of Line Conducted Emission Test	
13.4 Final Procedure of Line Conducted Emission Test	
13.5 Measurement Result	81
Appendix I: Photographs of Test Setup	90
Appendix II: Photographs of Test EUT	





# 1. General Information

Applicant	Fanvil Technology Co., Ltd
Address	10/F Block A, Dualshine Global Science Innovation Center, Honglang North 2nd Road, Bao'an District, Shenzhen, 518101, China
Manufacturer	Fanvil Technology Co., Ltd
Address	10/F Block A, Dualshine Global Science Innovation Center, Honglang North 2nd Road, Bao'an District, Shenzhen, 518101, China
Factory	N/A
Address	N/A
Product Designation	Phone
Brand Name	Fanvil
Test Model	W635W
Series Model	W635W-S
Declaration of Difference	W635W does not have a scanning head, W635W-S has a scanning head.
Date of receipt of test item	Dec. 10, 2024
Date of Test	Dec. 10, 2024~Feb. 10, 2025
Deviation from Standard	No any deviation from the test method
Condition of Test Sample	Normal
Test Result	Pass
Test Report Form No	AGCER-FCC-BR_EDR-V1

Note: The test results of this report relate only to the tested sample identified in this report.

Prepared By	Jouk bai	
	Jack Gui (Project Engineer)	May 14, 2025
Reviewed By	Bibo zhang	
	Bibo Zhang (Reviewer)	May 14, 2025
Approved By	Angole li	
	Angela Li (Authorized Officer)	May 14, 2025



Page 6 of 91

## 2. Product Information

## 2.1 Product Technical Description

Technology Type	Classic Bluetooth
Frequency Band	2400M-2483.5MHz
Operation Frequency Range	2402MHz-2480MHz
Bluetooth Version	V5.0
Modulation Type	BR ⊠GFSK, EDR ⊠π /4-DQPSK, ⊠8DPSK
Number of channels	79 of Channels
Channel Separation	1 MHz
Maximum Transmitter Power	6.020dBm
Hardware Version	RevB_WW
Software Version	W635W_DG000_241128
Antenna Designation	FPC Antenna
Antenna Gain	3.46dBi
Power Supply	DC 3.87V 4800mAh by battery or DC 5V from adapter

#### Note:

- 1. The Phone W635W and the Phone Station CH25 are shipped as a set, and the set model name is V76.
- The Phone W635W and the Phone Station CH001 are shipped as a set, and the set model name is W635W.
- 3. The Phone W635W-S and the Phone Station CH25 are shipped as a set, and the set model name is V76.
- 4. The Phone W635W-S and the Phone Station CH001 are shipped as a set, and the set model name is W6 35W-S.



Page 7 of 91

# 2.2 Test Frequency List

Frequency Band	Channel Number	Test Frequency	
	0	2402 MHz	
	1	2403 MHz	
	:	:	
2400~2483.5MHz	39	2441MHz	
	:	:	
	77	2479 MHz	
	78	2480 MHz	



Page 8 of 91

### 2.3 Related Submittal(S) / Grant (S)

This submittal(s) (test report) is intended for FCC ID:**2APPZ-W635W**, filing to comply with Part 2, Part 15 of the Federal Communication Commission rules.

### 2.4 Test Methodology

The tests were performed according to following standards:

No.	Identity	Document Title		
1	FCC 47 CFR Part 2	Frequency allocations and radio treaty matters; general rules and regulations		
2	FCC 47 CFR Part 15	Radio Frequency Devices		
3	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices		
4	KDB 558074 D01 15.247 Meas Guidance v05r02	Guidance for compliance measurements on Digital Transmission Systems, Frequency Hopping Spread Spectrum system, and Hybrid system devices operating under Section 15.247 of the FCC rules		

#### 2.5 Receiver Input Bandwidth

The input bandwidth of the receiver is 1.3MHz, in every connection one Bluetooth device is the master and the other one is slave. The master determines the hopping sequence. The slave follows this sequence. Both devices shift between RX and TX time slot according to the clock of the master. Additionally, the type of connection (e.g. single of multi slot packet) is set up at the beginning of the connection. The master adapts its hopping frequency and its TX/RX timing according to the packet type of the connection. Also, the slave of the connection will use these settings. Repeating of a packet has no influence on the hopping sequence. The hopping sequence generated by the master of the connection will be followed in any case. That means, a repeated packet will not be send on the same frequency, it is send on the next frequency of the hopping sequence.

#### 2.6 Equally Average Use of Frequencies and Behaviour.

The generation of the hopping sequence in connection mode depends essentially on two input values:

- 1. LAP/UAP of the master of the connection.
- 2. Internal master clock.


The LAP (lower address part) are the 24 LSB's of the 48 BD\_ADDRESS. The BD\_ADDRESS is an unambiguous number of every Bluetooth unit. The UAP (upper address part) are the 24MSB's of the 48BD ADDRESS

The internal clock of a Bluetooth unit is derived from a free running clock which is never adjusted and is never turned off. For behavior action with other units only offset is used. It has no relation to the time of the day. Its resolution is at least half the RX/TX slot length of 312.5us. The clock has a cycle of about one day(23h30).

In most case it is implemented as 28 bits counter. For the deriving of the hopping sequence the entire. LAP (24 bits),4LSB's(4bits) (Input 1) and the 27MSB's of the clock (Input 2) are used. With this input values different mathematical procedures (permutations, additions, XOR-operations) are performed to generate the Sequence. This will be done at the beginning of every new transmission.

Regarding short transmissions the Bluetooth system has the following behavior:

The first connection between the two devices is established, a hopping sequence was generated. For Transmitting the wanted data the complete hopping sequence was not used. The connection ended. The second connection will be established. A new hopping sequence is generated. Due to the fact the Bluetooth clock has a different value, because the period between the two transmission is longer (and it Cannot be shorter) than the minimum resolution of the clock(312.5us). The hopping sequence will always differ from the first one.






## 2.7 Pseudorandom Frequency Hopping Sequence


The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONEs; i.e. the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence: 29 1 = 511 bits
- Longest sequence of zeros: 8 (non-inverted signal)



Linear Feedback Shift Register for Generation of The PRBS Sequence

An example of Pseudorandom Frequency Hopping Sequence as follow:



Each frequency used equally on the average by each transmitter.

The system receivers have input bandwidths that match the hopping channel bandwidths of their Corresponding transmitters and shift frequencies in synchronization with the transmitted signals.



Page 10 of 91

### 2.8 Special Accessories

Not available for this EUT intended for grant.

## 2.9 Equipment Modifications

Not available for this EUT intended for grant.

## 2.10 Antenna Requirement

## Standard Requirement

#### 15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

## 15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi

#### **EUT Antenna**

The non-detachable antenna inside the device cannot be replaced by the user at will. The gain of the antenna is 3.46dBi.



Page 11 of 91

#### 3. Test Environment

# 3.1 Address of The Test Laboratory

Laboratory: Attestation of Global Compliance (Shenzhen) Co., Ltd.

Address: 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

## 3.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

## CNAS-Lab Code: L5488

Attestation of Global Compliance (Shenzhen) Co., Ltd. has been assessed and proved to follow CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories.)

## A2LA-Lab Cert. No.: 5054.02

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to follow ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

#### FCC-Registration No.: 975832

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files with Registration 975832.

#### IC-Registration No.: 24842(CAB identifier: CN0063)

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Certification and Engineering Bureau of Industry Canada. The acceptance letter from the IC is maintained in our files with Registration 24842.



Page 12 of 91

#### 3.3 Environmental Conditions

	Normal Conditions
Temperature range (°C)	15 - 35
Relative humidity range	20 % - 75 %
Pressure range (kPa)	86 - 106
Power supply	DC 3.8V

# 3.4 Measurement Uncertainty

The reported uncertainty of measurement y ±U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

Item	Measurement Uncertainty
Uncertainty of Conducted Emission for AC Port	$U_c = \pm 2.9 \text{ dB}$
Uncertainty of Radiated Emission below 1GHz	$U_c = \pm 3.9 \text{ dB}$
Uncertainty of Radiated Emission above 1GHz	$U_c = \pm 4.9 \text{ dB}$
Uncertainty of total RF Power, Conducted	$U_c = \pm 0.8 \text{ dB}$
Uncertainty of RF Power Density, Conducted	$U_c = \pm 2.6 \text{ dB}$
Uncertainty of Spurious Emissions, Conducted	$U_c = \pm 2 \%$
Uncertainty of Occupied Channel Bandwidth	$U_c = \pm 2 \%$
Uncertainty of Dwell Time	U <sub>c</sub> = ±2 %




Page 13 of 91

## 3.5 List of Equipment Used

• F	RF Conducted Test System							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)	
$\boxtimes$	AGC-ER-E036	Spectrum Analyzer	Agilent	N9020A	MY49100060	2024-05-24	2025-05-23	
$\boxtimes$	AGC-ER-A007	6dB Fixed Attenuator	Mini circuits	BW-S6-2W263A+	N/A	2024-02-01	2025-01-31	
$\boxtimes$	AGC-ER-A007	6dB Fixed Attenuator	Mini circuits	BW-S6-2W263A+	N/A	2025-01-30	2026-01-29	
	AGC-ER-E083	Signal Generator	Agilent	E4421B	US39340815	2024-05-23	2025-05-22	
	N/A	RF Connection Cable	N/A	1#	N/A	Each time	N/A	
	N/A	RF Connection Cable	N/A	2#	N/A	Each time	N/A	


• F	Radiated Spurious Emission							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)	
	AGC-EM-E046	EMI Test Receiver	R&S	ESCI	10096	2024-02-01	2025-01-31	
$\boxtimes$	AGC-EM-E046	EMI Test Receiver	R&S	ESCI	10096	2025-01-14	2026-01-13	
$\boxtimes$	AGC-EM-E061	Spectrum Analyzer	Agilent	N9010A	MY53470504	2024-05-28	2025-05-27	
$\boxtimes$	AGC-EM-E086	Loop Antenna	ZHINAN	ZN30900C	18051	2024-03-05	2026-03-04	
$\boxtimes$	AGC-EM-E001	Wideband Antenna	SCHWARZBECK	VULB9168	D69250	2023-05-11	2025-05-10	
$\boxtimes$	AGC-EM-E029	Broadband Ridged Horn Antenna	ETS	3117	00034609	2024-03-31	2025-03-30	
$\boxtimes$	AGC-EM-E029	Broadband Ridged Horn Antenna	ETS	3117	00034609	2025-3-27	2026-03-26	
$\boxtimes$	AGC-EM-E082	Horn Antenna	SCHWARZBECK	BBHA 9170	#768	2023-09-24	2025-09-23	
$\boxtimes$	AGC-EM-E146	Pre-amplifier	ETS	3117-PA	00246148	2024-07-24	2026-07-23	
$\boxtimes$	AGC-EM-A119	2.4G Filter	SongYi	N/A	N/A	2024-05-23	2025-05-22	
$\boxtimes$	AGC-EM-A138	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2025-06-08	
	AGC-EM-A139	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2025-06-08	

• A	AC Power Line Conducted Emission							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)	
$\boxtimes$	AGC-EM-E116	EMI Test Receiver	R&S	ESCI	100034	2024-05-24	2025-05-23	
$\boxtimes$	AGC-EM-A130	6dB Attenuator	Eeatsheep	LM-XX-6-5W	DC-6GZ	2024-02-01	2026-01-31	
	AGC-EM-E023	AMN	R&S	100086	ESH2-Z5	2024-05-28	2025-05-27	





• Te:	Test Software						
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Version Information		
	AGC-EM-S001	CE Test System	R&S	ES-K1	V1.71		
$\boxtimes$	AGC-EM-S003	RE Test System	FARA	EZ-EMC	VRA-03A		
$\boxtimes$	AGC-ER-S012	BT/WIFI Test System	Tonscend	JS1120-2	2.6		
$\boxtimes$	AGC-EM-S011	RSE Test System	Tonscend	TS+-Ver2.1(JS36-RSE)	4.0.0.0		





• Tes	Test Software						
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Version Information		
$\boxtimes$	AGC-EM-S001	CE Test System	R&S	ES-K1	V1.71		
	AGC-EM-S003	RE Test System	FARA	EZ-EMC	VRA-03A		
$\boxtimes$	AGC-ER-S012	BT/WIFI Test System	Tonscend	JS1120-2	2.6		
$\boxtimes$	AGC-EM-S011	RSE Test System	Tonscend	TS+-Ver2.1(JS36-RSE)	4.0.0.0		



Page 16 of 91

# 4. System Test Configuration

## 4.1 EUT Configuration


The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

#### 4.2 EUT Exercise


The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

## 4.3 Configuration of Tested System

Radiated Emission Configure:



Conducted Emission Configure:





Page 17 of 91

# 4.4 Equipment Used in Tested System

The following peripheral devices and interface cables were connected during the measurement:

☐ Test Accessories Come From The Laboratory

No.	Equipment	Manufacturer	Model No.	Specification Information	Cable
1	Adapter1#	Zhuzhoudachuan Electronic Technology CO., Ltd	DCTQC18WUS-C0	Input: AC 100-240V 50/60Hz, 0.5A Output: DC 5V 3A/9V 2A/12V 1.5A	
2	Adapter2#	Dongguan City Gangqi Electronic Co. LTD.	GQ15-050300-ZU	Input: AC 100-240V 50/60Hz, 0.5A Output: DC 5V 3A	
3	Adapter3#	CHENZHOU FRECOM ELECTRONICS CO., LTD		Input: AC 100-240V 50/60Hz, 0.3A Output: DC 5V 2A	1.0m unshielded
4	Charger1#	Fanvil Technology Co., Ltd	CH25		
5	Charger2#	Fanvil Technology Co., Ltd	CH001		
6	Battery	Shenzhen Guangwei Electronic Technology Co., Ltd.	FV-BA001	DC 3.87V 4800mAh	
7	LAN Cable				1.0m unshielded
8	USB Cable				3.0m unshielded
9	USB Cable				1.5m unshielded



Page 18 of 91

## 4.5 Summary of Test Results

Item	FCC Rules	Description of Test	Result
1	§15.203&15.247(b)(4)	Antenna Equipment	Pass
2	§15.247 (b)(1)	RF Output Power	Pass
3	§15.247 (a)(1)	20 dB Bandwidth	Pass
4	§15.247 (d)	Conducted Band Edge and Out-of-Band Emissions	Pass
5	§15.209	Radiated Spurious Emission	Pass
6	§15.247 (a)(1)(iii)	Number of Hopping Frequency	Pass
7	§15.247 (a)(1)(iii)	Time of Occupancy	Pass
8	§15.247 (a)(1)	Frequency Separation	Pass
9	§15.207	AC Power Line Conducted Emission	Pass




# 5. Description of Test Modes

Summary table of Test Cases				
Test Item	Data Rate / Modulation			
rest item	Bluetooth – BR_EDR (GFSK/π /4-DQPSK/8DPSK)			
Radiated & Conducted Test Cases	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps (Battery powered ) Mode 2: Bluetooth Tx CH39_2441 MHz_1Mbps (Battery powered ) Mode 3: Bluetooth Tx CH78_2480 MHz_1Mbps (Battery powered ) Mode 4: Bluetooth Tx CH00_2402 MHz_2Mbps (Battery powered ) Mode 5: Bluetooth Tx CH39_2441 MHz_2Mbps (Battery powered ) Mode 6: Bluetooth Tx CH78_2480 MHz_2Mbps (Battery powered ) Mode 7: Bluetooth Tx CH00_2402 MHz_3Mbps (Battery powered ) Mode 8: Bluetooth Tx CH39_2441 MHz_3Mbps (Battery powered ) Mode 9: Bluetooth Tx CH78_2480 MHz_3Mbps (Battery powered ) Mode10: Bluetooth Tx Hopping-1Mbps (Battery powered ) Mode11: Bluetooth Tx Hopping-2Mbps (Battery powered ) Mode12: Bluetooth Tx Hopping-3Mbps (Battery powered )			
Mode 1: Bluetooth Link + Battery + USB Cable 3m+ Base Charger1#+ A  AC Conducted  Emission  Mode 2: Bluetooth Link + Battery + USB Cable 3m+ Base Charger1#+ AC  Mode 3: Bluetooth Link + Battery + Base Charger2# + AC Adapt  Mode 4: Bluetooth Link + Battery + AC Adapter3#				

#### Note:

- 1. Only the result of the worst case was recorded in the report, if no other cases.
- 2. The battery is full-charged during the test.
- 3. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
- 4. For Conducted Test method, a temporary antenna connector is provided by the manufacture.
- 5. Software Setting Diagram

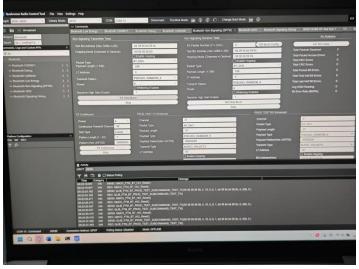



Page 20 of 91

## 6. RF Output Power Measurement

## 6.1 Provisions Applicable

The maximum out power permissible output power is 1 Watt for all frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels.

The maximum out power permissible output power is 0.125 watts for all other frequency hopping systems in the 2400-2483.5 MHz band.

#### **6.2 Measurement Procedure**

# ⊠For Peak power test:


- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Span: Approximately five times the 20 dB bandwidth, centered on a hopping channel.
- 3. RBW > 20 dB bandwidth of the emission being measured.
- 4. VBW ≥RBW.
- 5. Sweep: Auto.
- 6. Detector function: Peak.
- 7. Trace: Max hold.
- 8. Allow trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power, after any corrections for external attenuators and cables.

Г	For	Average	e power	test:
---	-----	---------	---------	-------

Measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since this measurement is made only during the ON time of the transmitter, no duty cycle correction is required

### 6.3 Measurement Setup (Block Diagram of Configuration)


For Average power test setup

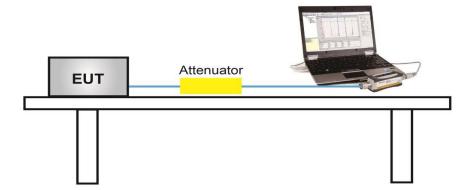




Page 21 of 91

# 

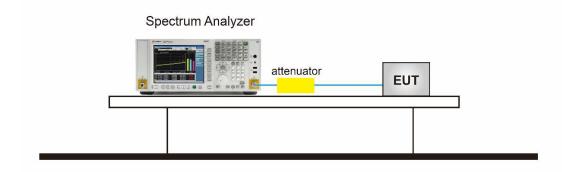


#### 6.4 Measurement Result

	Test Data of Conducted Output Power					
Test Mode	Test Frequency (MHz)	Peak Power (dBm)	Limits (dBm)	Pass or Fail		
	2402	3.687	≤21	Pass		
GFSK	2441	5.097	≤21	Pass		
	2480	5.316	≤21	Pass		
	2402	3.991	≤21	Pass		
π /4-DQPSK	2441	5.368	≤21	Pass		
	2480	5.656	≤21	Pass		
	2402	4.407	≤21	Pass		
8DPSK	2441	5.776	≤21	Pass		
	2480	6.020	≤21	Pass		






**Test Graphs of Conducted Output Power** 

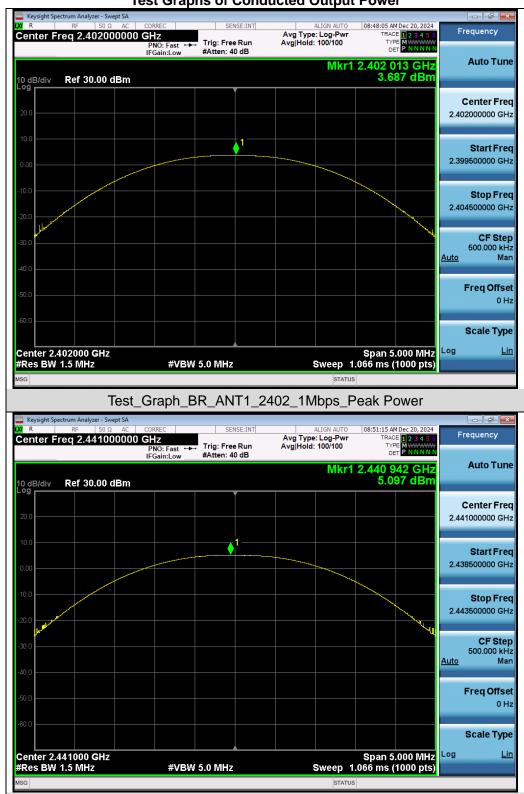


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report.  $Further\ enquiry\ of\ validity\ or\ verification\ of\ the\ test\ report\ should\ be\ addressed\ to\ AGC\ by\ agc 01@agccert.com.$ 

Test\_Graph\_BR\_ANT1\_2441\_1Mbps\_Peak Power




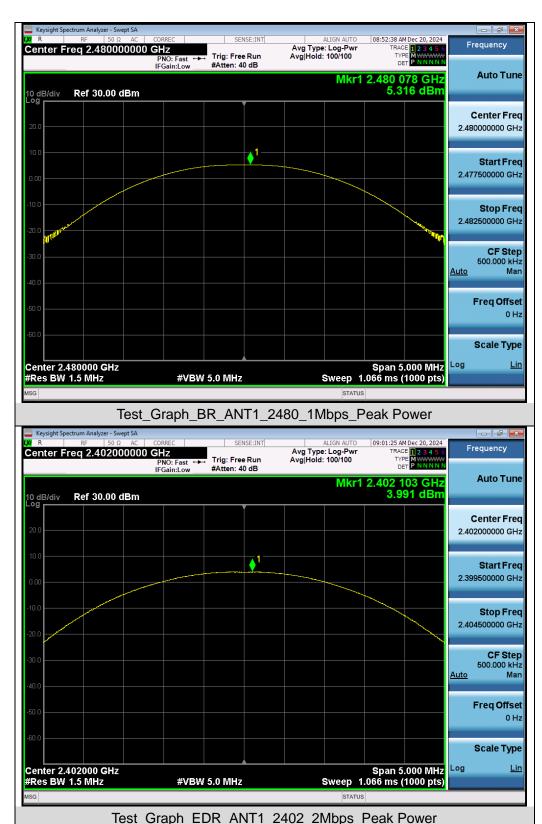



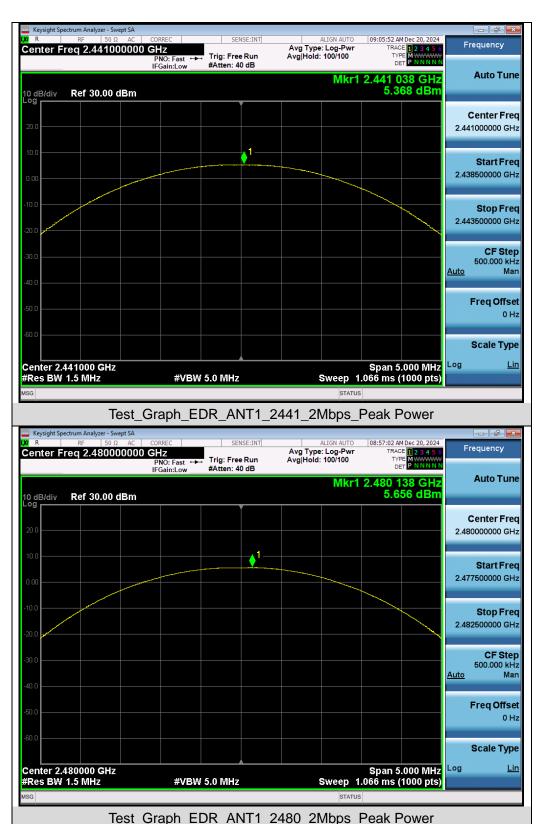




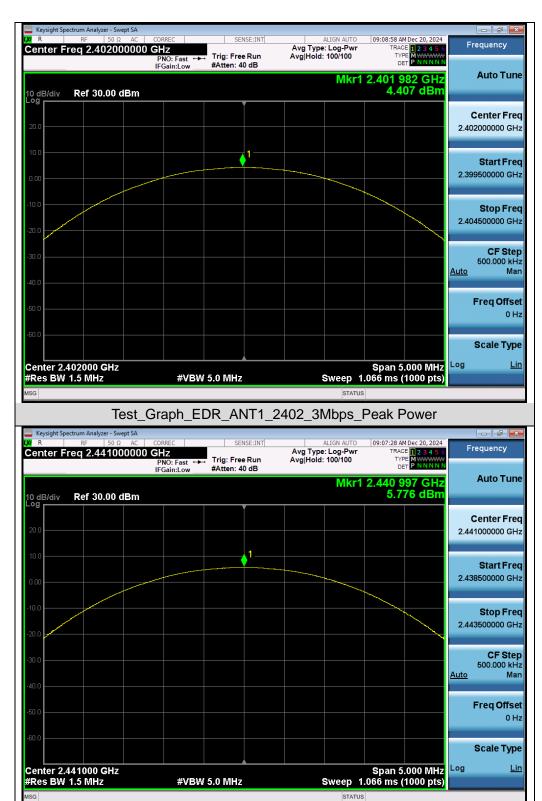

Test Graph EDR ANT1 2441 3Mbps Peak Power



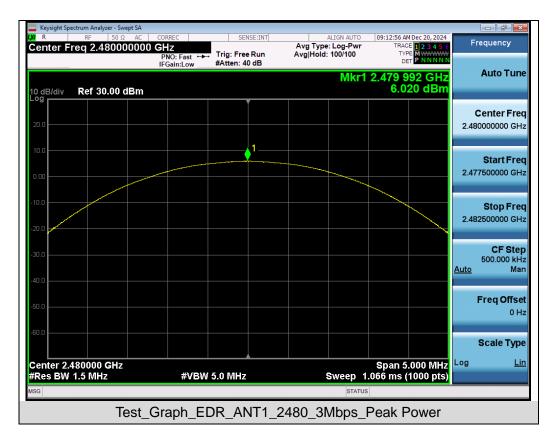



## 7. 20dB Bandwidth and 99% Occupied Bandwidth Measurement

## 7.1 Provisions Applicable


There is no corresponding limit requirement for this test item.

#### 7.2 Measurement Procedure

The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 6.9.2 (20dB BW).

- The 20dB bandwidth spectrum analyzer setting reference is as follows:
- 1. Set RBW ≥ 1% to 5% of the 20dB bandwidth
- 2. VBW = Approximately three times RBW
- 3. Span = Approximately 2 to 5 times the 20dB bandwidth, centered on a hopping channel
- 4. Detector = Peak
- 5. Trace mode = Max hold
- 6. Sweep = Auto couple
- 7. Allow the trace to stabilize
- 8. Measure the maximum width of the emission that is constrained by the frequencies associated
- 9. with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20
- 10. dB relative to the maximum level in the fundamental emission.
- The 99% bandwidth spectrum analyzer setting reference is as follows:
- 1. Span = 1.5 times to 5 times the OBW
- 2. Set RBW = 1% to 5% the OBW
- 3. VBW ≥ 3 × RBW
- 4. Detector = Peak
- 5. Trace mode = Max hold
- 6. Sweep = Auto couple
- 7. Allow the trace was allowed to stabilize

#### 7.3 Measurement Setup (Block Diagram of Configuration)

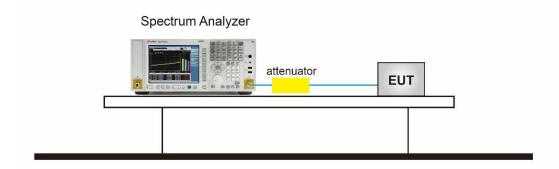





#### 7.4 Measurement Results

Test Data of Occupied Bandwidth and -20dB Bandwidth						
Test Mode	Test Frequency (MHz)	99% Occupied Bandwidth (MHz)	-20dB Bandwidth (MHz)	Limits	Pass or Fail	
	2402	0.857	0.941	N/A	Pass	
GFSK	2441	0.857	0.942	N/A	Pass	
	2480	0.871	0.943	N/A	Pass	
	2402	1.177	1.290	N/A	Pass	
π /4-DQPSK	2441	1.175	1.283	N/A	Pass	
	2480	1.187	1.335	N/A	Pass	
	2402	1.178	1.296	N/A	Pass	
8DPSK	2441	1.180	1.296	N/A	Pass	
	2480	1.181	1.299	N/A	Pass	

Test Graphs of Occupied Bandwidth and -20 Bandwidth

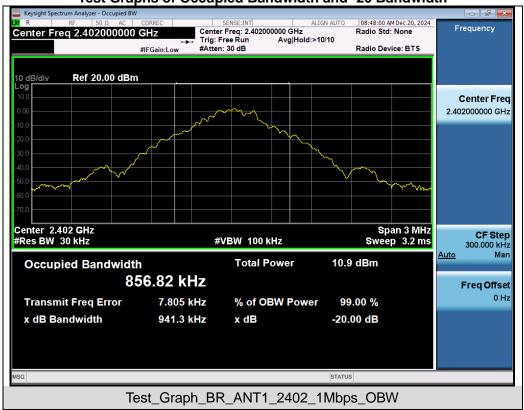



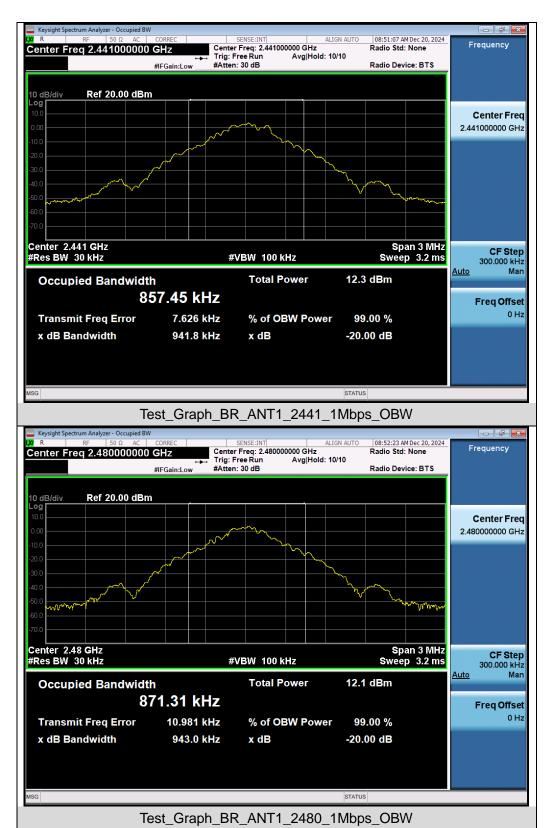












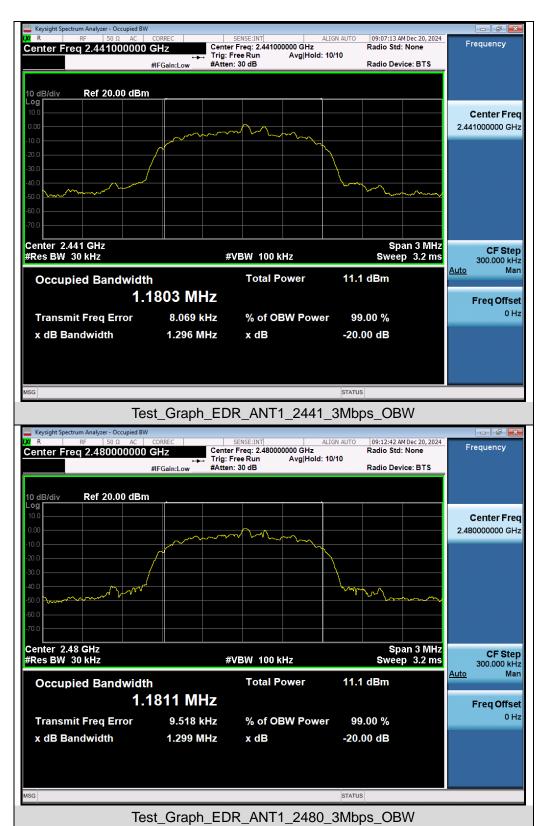



Page 33 of 91

## 8. Conducted Band Edge and Out-of-Band Emissions

## 8.1 Provisions Applicable


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30dB instead of 20dB

#### **8.2 Measurement Procedure**


The testing follows the ANSI C63.10 Section 6.10.4 and 7.8.8:

- Reference level measurement
- 1. Span = Wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products which fall outside of the authorized band of operation.
- 2. RBW = 100kHz
- 3. VBW = 300kHz
- 4. Detector = Peak
- 5. Sweep time = Auto couple
- 6. Trace mode = Max hold
- 7. Allow the trace to stabilize. Set the marker on the emission at the band edge, or on the highest modulation product outside of the band, if this level is greater than that at the band edge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission.
- Emission level measurement
- Span = Wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.
- 2. RBW = 100kHz
- 3. VBW = 300kHz
- 4. Detector = Peak
- 5. Sweep time = Auto couple
- 6. Trace mode = Max hold
- 7. Trace was allowed to stabilize
- 8. Set the marker on the peak of any spurious emission recorded. The level displayed must comply with the limit specified in this section.

# 8.3 Measurement Setup (Block Diagram of Configuration)

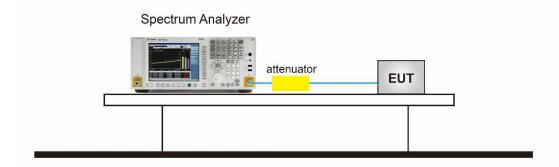

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.







#### 8.4 Measurement Results






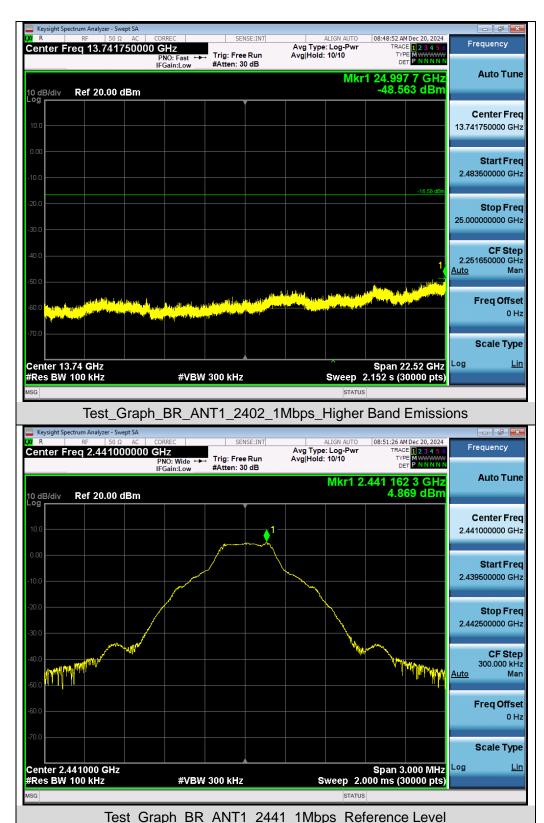




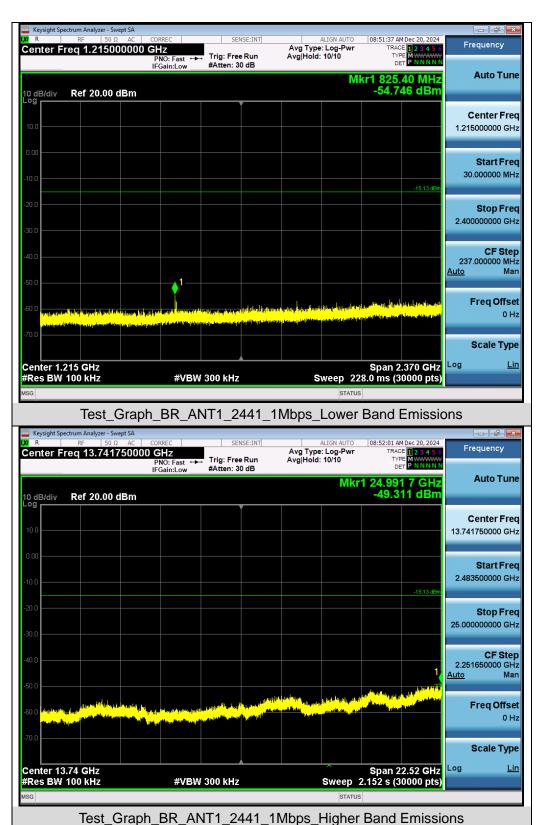




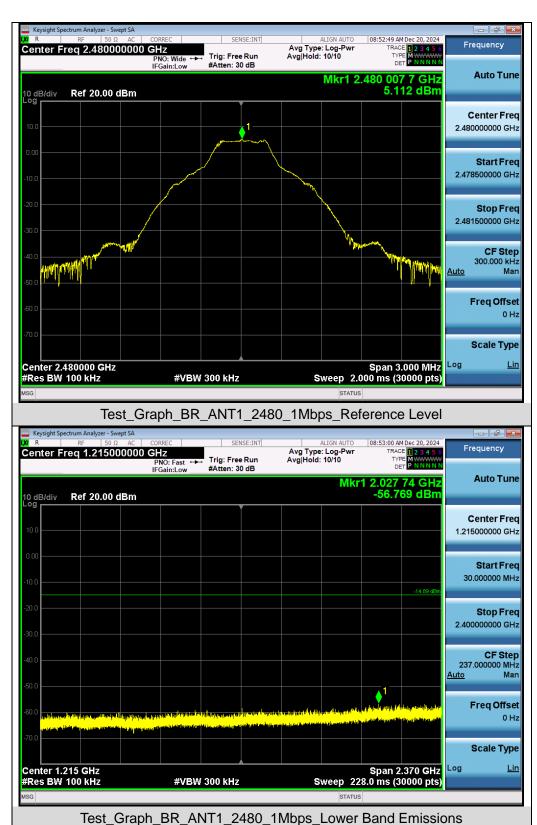




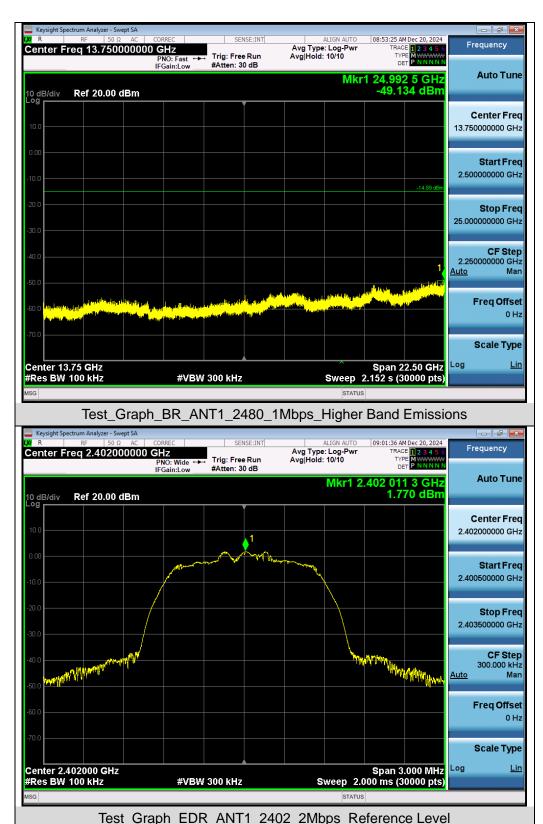




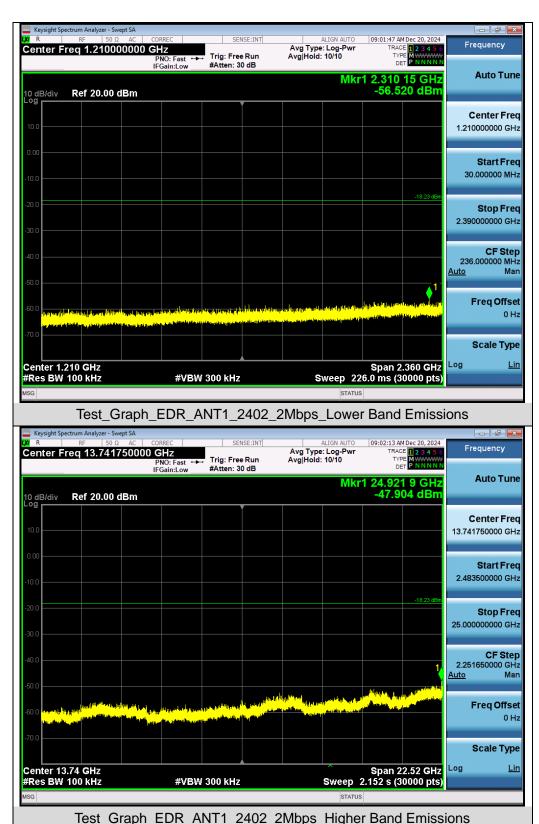




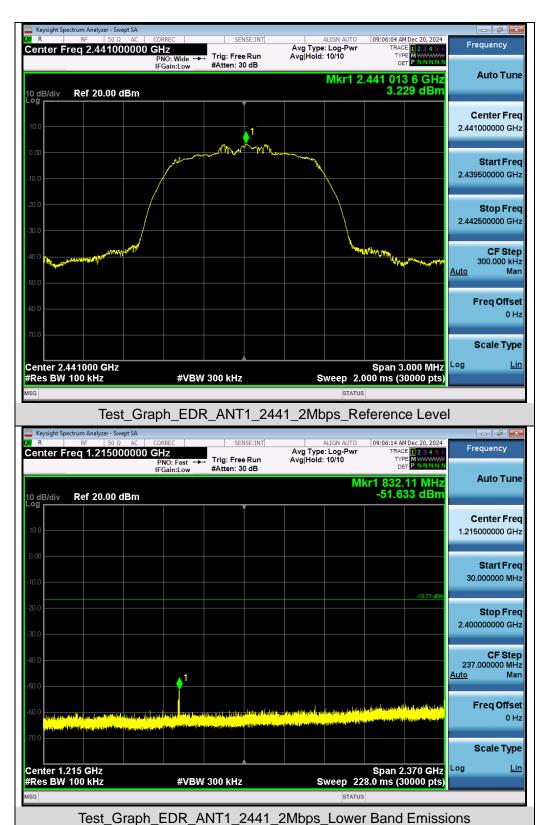




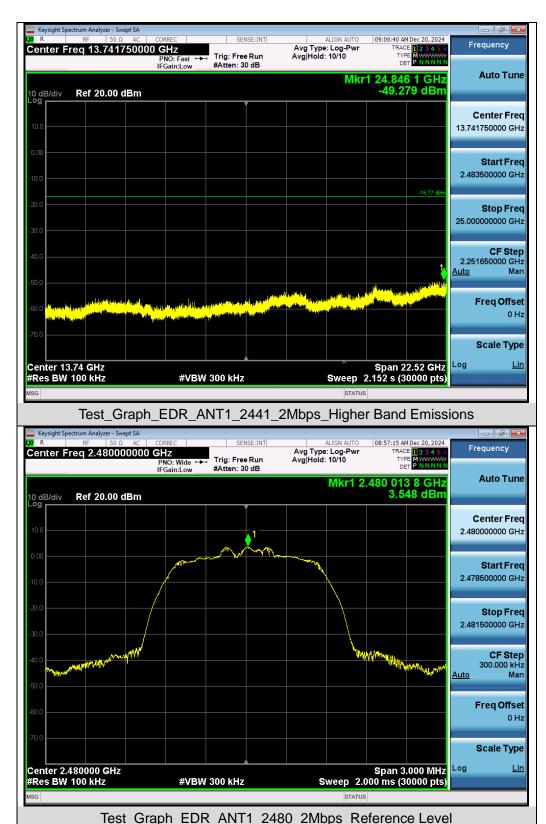




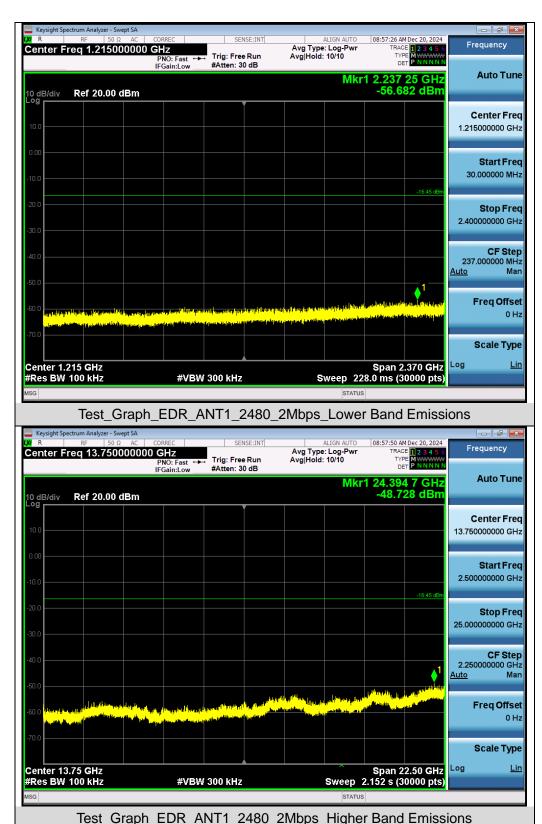




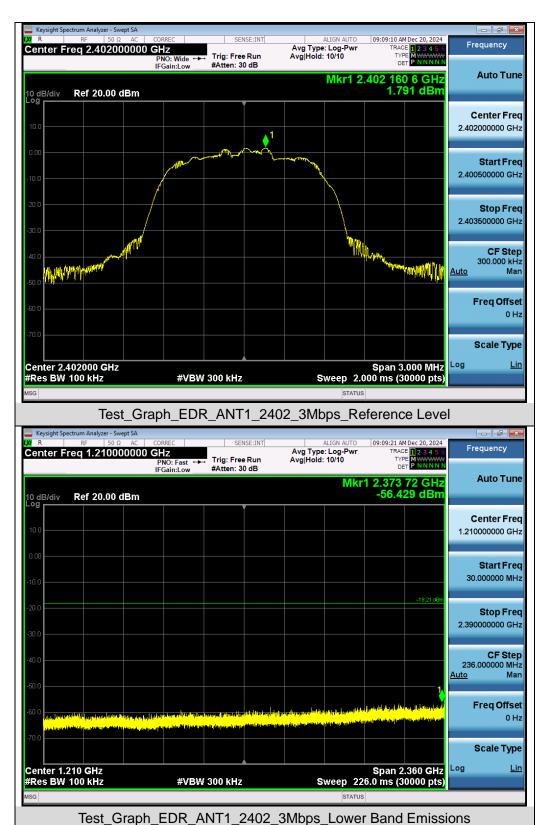




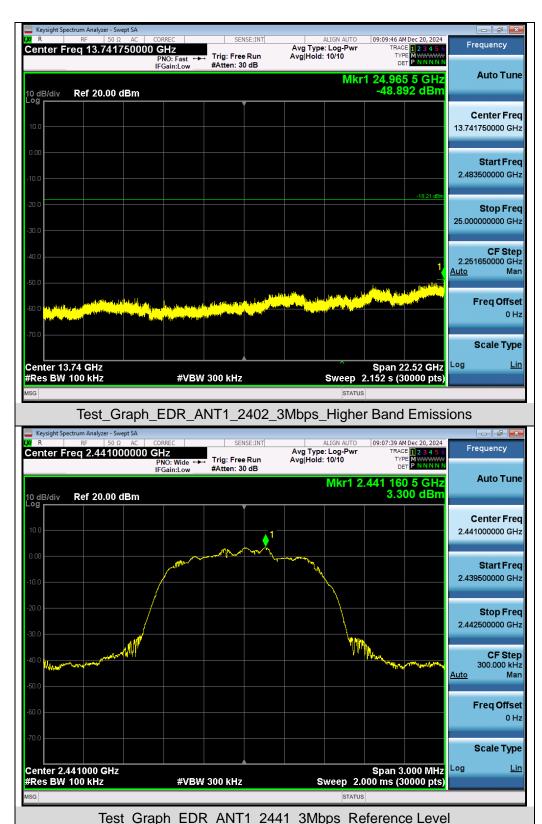




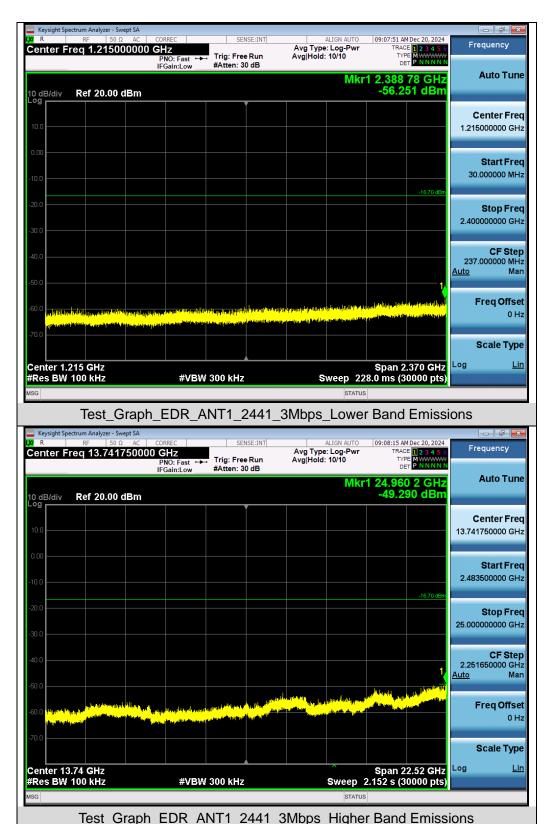




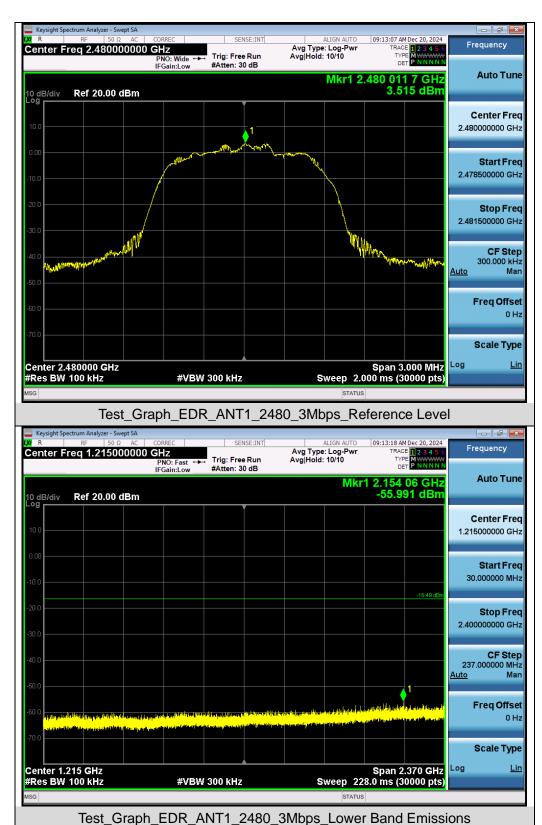




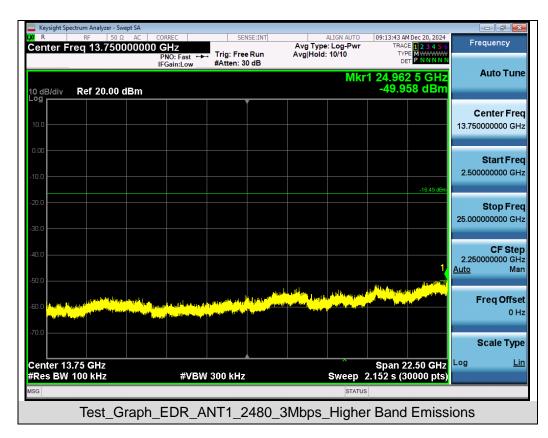







Test Graphs of Band Edge Emissions in Non-Restricted Frequency Bands

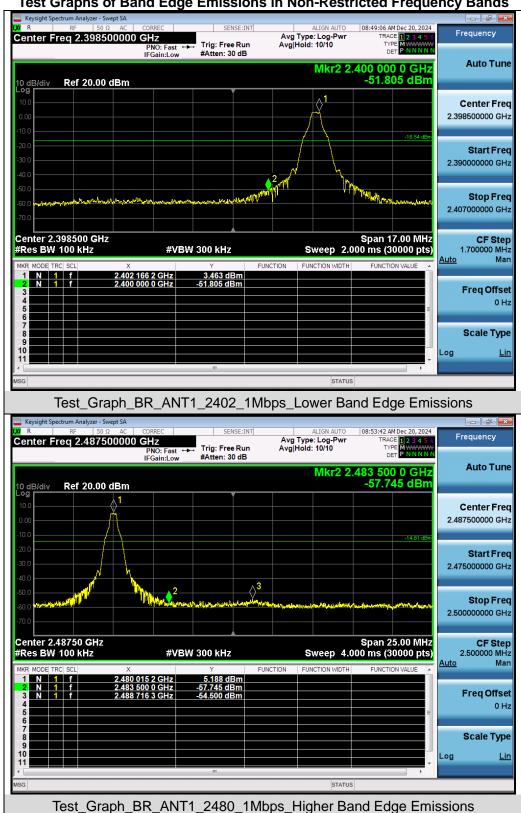




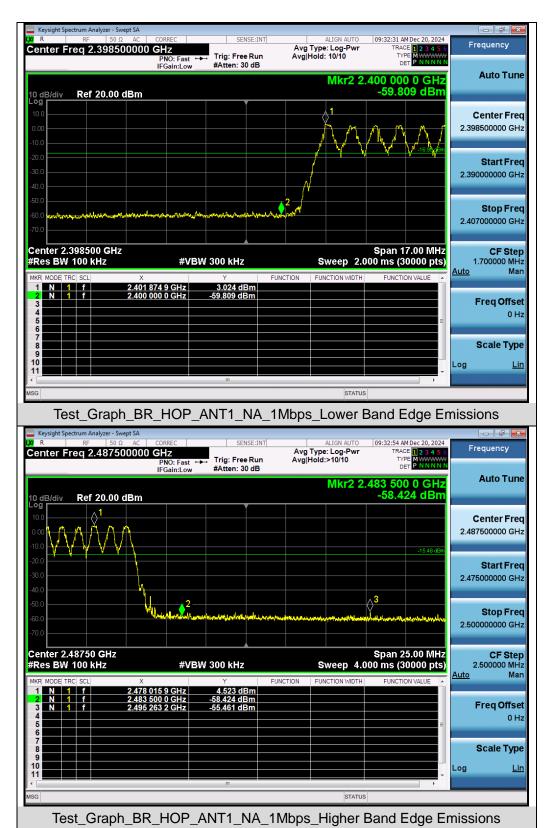




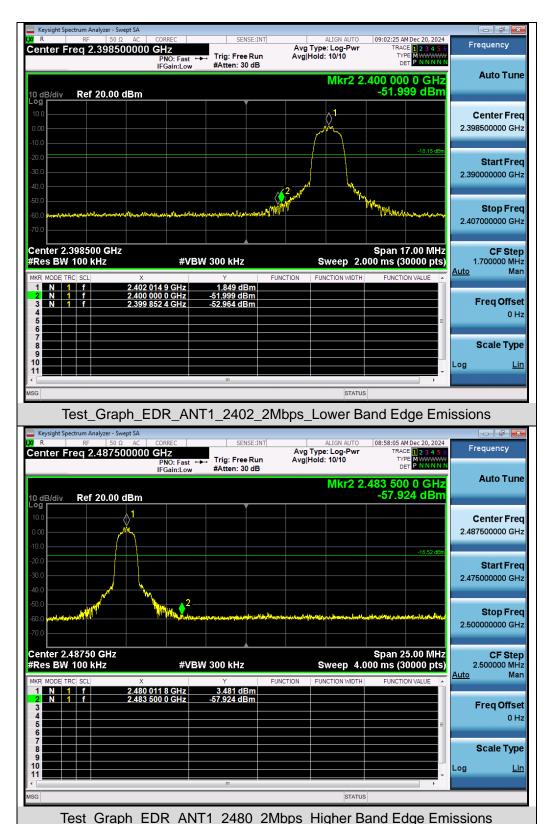




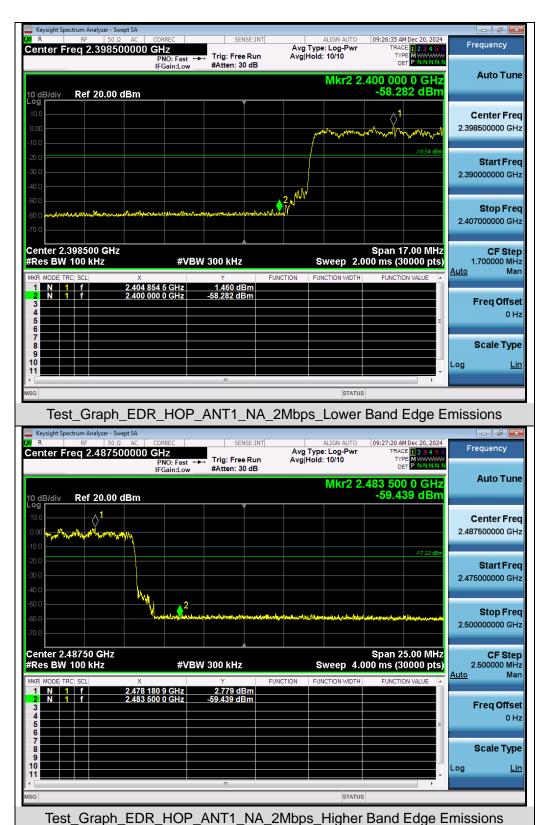



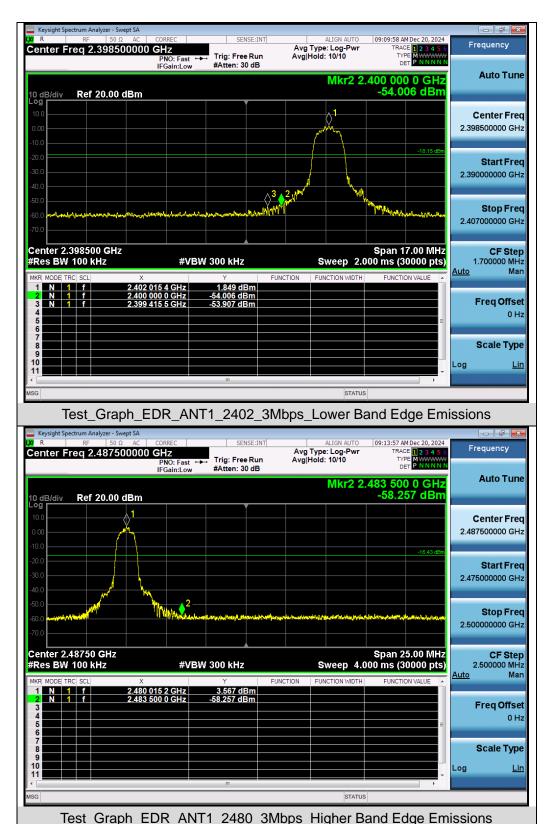



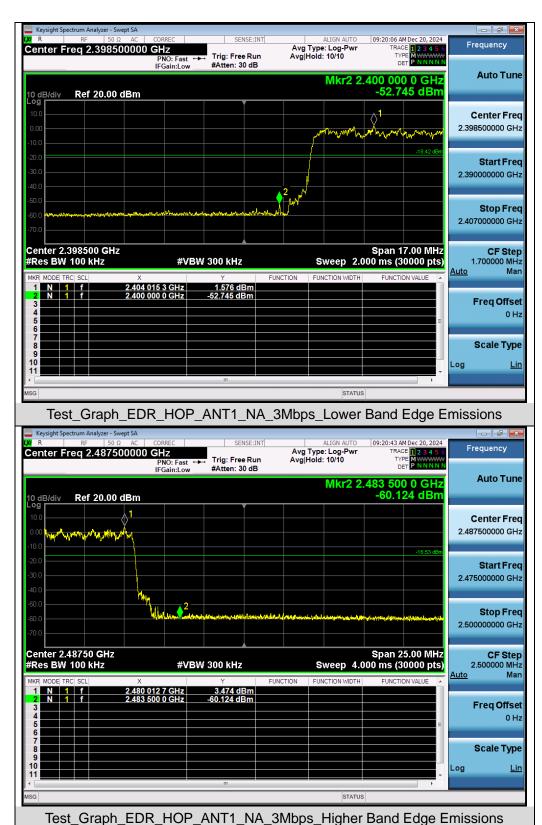



Page 54 of 91

#### 9. Radiated Spurious Emission

#### 9.1 Measurement Limit

15.209 Limit in the below table has to be followed

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note: All modes were tested for restricted band radiated emission, the test records reported below are the worst result compared to other modes.

#### 9.2 Measurement Procedure

- The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.



Page 55 of 91

8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.

- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.

The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting		
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP		
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP		
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP		
Start ~Stop Frequency	1GHz~26.5GHz		
Start ~Stop i requency	1MHz/3MHz for Peak, 1MHz/3MHz for Average		

Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP



Report No.: AGC14499241203FR01 Page 56 of 91

Quasi-Peak Measurements below 1GHz

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. Span was set greater than 1MHz
- 3. RBW = as shown in the table above
- 4. Detector = CISPR quasi-peak
- 5. Sweep time = auto couple
- 6. Trace was allowed to stabilize

#### Peak Measurements above 1GHz

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. RBW = 1MHz
- 3. VBW = 3MHz
- 4. Detector = peak
- 5. Sweep time = auto couple
- 6. Trace mode = max hold
- 7. Trace was allowed to stabilize


#### Average Measurements above 1GHz

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. RBW = 1MHz
- 3. VBW ≥ [3 × RBW]
- 4. Detector = Power averaging (rms)
- 5. Averaging type = power (i.e., rms)
- 6. Sweep time = auto
- 7. Perform a trace average of at least 100 traces.
- 8. The applicable correction factor is [10\*log (1 / D)], where D is the duty cycle. The factor had been edited in the "Input Correction" of the Spectrum Analyzer.




#### 9.3 Measurement Setup (Block Diagram of Configuration)


Radiated Emission Test Setup 9KHz-30MHz

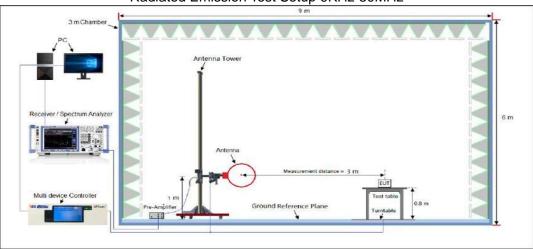

Radiated Emission Test Setup 30MHz-1000MHz

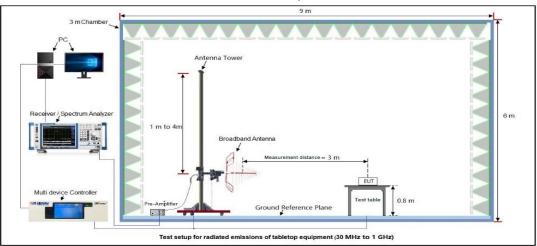

#### Radiated Emission Test Setup Above 1000MHz

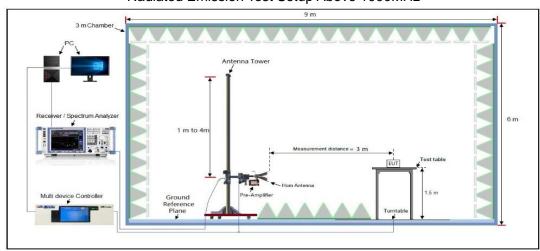




9.4 Measurement Result

Report No.: AGC14499241203FR01 Page 58 of 91

## Radiated Emission Below 30MHz

The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.

Radiated Emission Test Results at 30MHz-1GHz					
EUT Name	W635W				
Temperature	18.5℃	Relative Humidity	56.1%		
Pressure	960hPa	Test Voltage	DC 3.87V by battery		
Test Mode	Mode 9	Antenna Polarity	Horizontal		

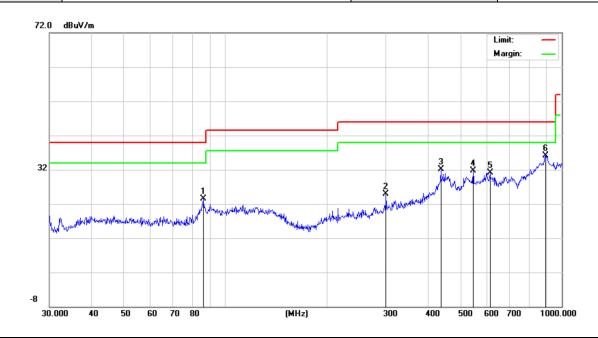


# Final Average Data List NO. Freq. Level Factor Limit Margin Height Angle [MHz] [dRuV/m] [dR] [dRuV/m] [dR] [cm] [c]

NO.	[MHz]	[dBµV/m]	[dB]	[dBµV/m]	[dB]	[cm]	[°]	Polarity
1	85.8984	23.56	14.01	40.00	16.44	100	180	Horizontal
2	300.3672	24.82	16.50	46.00	21.18	100	110	Horizontal
3	437.1199	32.16	24.48	46.00	13.84	100	90	Horizontal
4	545.1826	31.73	23.98	46.00	14.27	100	210	Horizontal
5	612.0642	31.01	25.16	46.00	14.99	100	170	Horizontal
6	893.8567	36.19	31.03	46.00	9.81	100	150	Horizontal




Radiated Emission Test Results at 30MHz-1GHz					
<b>EUT Name</b>	W635W				
Temperature	18.5℃	Relative Humidity	56.1%		
Pressure	960hPa	Test Voltage	DC 3.87V by battery		
Test Mode	Mode 9	Antenna Polarity	Vertical		

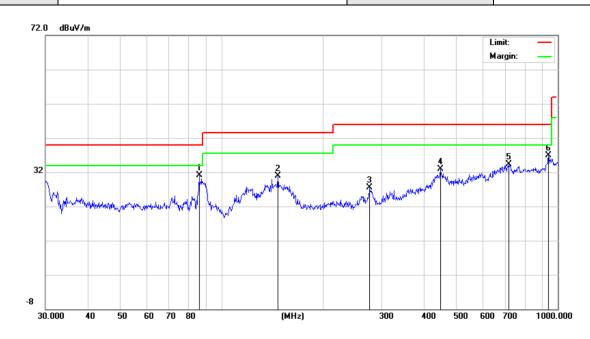


#### **Final Average Data List** Freq. Factor Limit Level Margin Height Angle NO. Polarity [MHz] [dBµV/m] [dB] [dBµV/m] [dB] [cm] 1 85.8984 31.12 16.10 40.00 8.88 100 190 Vertical 2 147.4036 30.87 18.20 43.50 12.63 100 160 Vertical 3 276.1235 27.49 18.30 46.00 18.51 100 100 Vertical 447.9822 32.84 25.74 13.16 4 46.00 100 270 Vertical 5 716.6820 34.39 28.68 46.00 11.61 100 190 Vertical 6 938.8326 36.85 30.84 46.00 9.15 100 150 Vertical

#### **RESULT: Pass**






Radiated Emission Test Results at 30MHz-1GHz					
EUT Name	W635W-S				
Temperature	18.5℃	Relative Humidity	56.1%		
Pressure	960hPa	Test Voltage	DC 3.87V by battery		
Test Mode	Mode 9	Antenna Polarity	Horizontal		

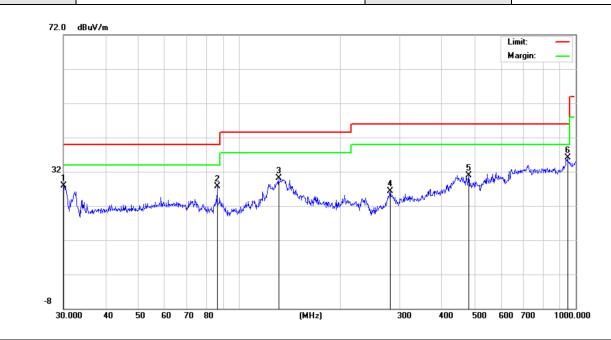


# **Final Average Data List**

NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	30.0000	27.87	13.60	40.00	12.13	100	190	Horizontal
2	85.8984	27.61	16.10	40.00	12.39	100	100	Horizontal
3	130.8369	30.05	17.97	43.50	13.45	100	80	Horizontal
4	281.0075	26.36	18.43	46.00	19.64	100	260	Horizontal
5	480.5276	30.95	23.81	46.00	15.05	100	190	Horizontal
6	945.4399	36.19	30.78	46.00	9.81	100	110	Horizontal





Radiated Emission Test Results at 30MHz-1GHz						
EUT Name	EUT Name Phone Model Name We					
Temperature	18.5℃	Relative Humidity	56.1%			
Pressure	960hPa	Test Voltage	DC 3.87V by battery			
Test Mode	Mode 9	Antenna Polarity	Vertical			

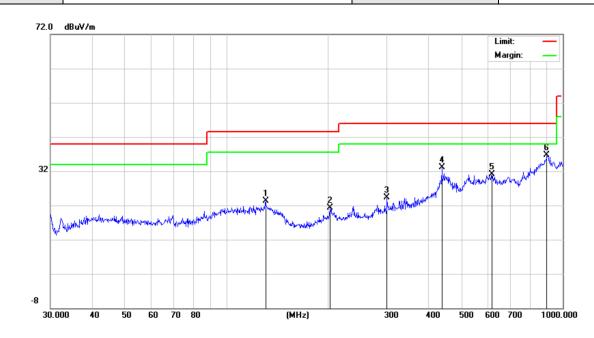

Final A	Final Average Data List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	
1	130.8369	23.25	15.75	43.50	20.25	100	100	Vertical	
2	203.5228	21.23	14.48	43.50	22.27	100	70	Vertical	
3	300.3672	24.37	16.50	46.00	21.63	100	20	Vertical	
4	437.1199	33.01	24.48	46.00	12.99	100	210	Vertical	
5	616.3718	31.14	25.18	46.00	14.86	100	140	Vertical	
6	896.9965	36.61	31.42	46.00	9.39	100	160	Vertical	

### **RESULT: Pass**

#### Note:

- 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.
- 2. All test modes had been pre-tested. The mode 9 is the worst case and recorded in the report.



Page 62 of 91

#### **Radiated Emissions Test Results Above 1GHz**

EUT Name	Phone	Model Name	W635W
Temperature	18.5℃	Relative Humidity	56.1%
Pressure	960hPa	Test Voltage	DC 3.87V by battery
Test Mode	Mode 7	Antenna Polarity	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Туре
4804.000	50.41	0.08	50.49	74.00	-23.51	peak
4804.000	40.51	0.08	40.59	54.00	-13.41	AVG
7206.000	49.36	2.21	51.57	74.00	-22.43	peak
7206.000	41.22	2.21	43.43	54.00	-10.57	AVG
Dama ele						_

Rem rk:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

EUT Name	Phone	Model Name	W635W
Temperature	18.5℃	Relative Humidity	56.1%
Pressure	960hPa	Test Voltage	DC 3.87V by battery
Test Mode	Mode 7	Antenna Polarity	Vertical

Frequency	Meter Read ng	Factor	Emission Level	Limits	Margin	Value
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Type
4804.000	49.63	80.0	49.71	74.00	-24.29	peak
4804.000	41.52	80.0	41.6	54.00	-12.40	AVG
7206.000	49.69	2.21	51.9	74.00	-22.10	peak
7206.000	40. 1	2.21	42.72	54.00	-11.28	AVG
Domorki						

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

#### **RESULT: PASS**



Page 63 of 91

#### **Radiated Emissions Test Results for Above 1GHz**

EUT Name	Phone	Model Name	W635W
Temperature	18.5℃	Relative Humidity	56.1%
Pressure	960hPa	Test Voltage	DC 3.87V by battery
Test Mode	Mode 8	Antenna Polarity	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Туре
4882.000	49.85	0.14	49.99	74.00	-24.01	peak
4882.0 0	41.36	0.14	41.50	54.00	-12.50	AVG
7323.000	47.58	2.36	49.94	74.00	-24.06	peak
7323.000	40.28	2.36	42.64	54.00	-11.36	AVG
Dame and	•				•	-

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

EUT Name	Phone	Model Name	W635W
Temperature	18.5℃	Relative Humidity	56.1%
Pressure	960hPa	Test Voltage	DC 3.87V by battery
Test Mode	Mode 8	Antenna Polarity	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Type
4882.000	50.25	0.14	50.39	74.00	-23.61	peak
4882.000	40.63	0.14	40.77	54.00	-13.23	AVG
7323.000	49.63	2.36	51.99	74.00	-22.01	peak
7323.000	41.22	2.36	43.58	54.00	-10.42	AVG

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

#### **RESULT: PASS**



Page 64 of 91

#### **Radiated Emissions Test Results for Above 1GHz**

EUT Name	Phone	Model Name	W635W
Temperature	18.5℃	Relative Humidity	56.1%
Pressure	960hPa	Test Voltage	DC 3.87V by battery
Test Mode	Mode 9	Antenna Polarity	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Туре
4960.000	50.36	0.22	50.58	74.00	-23.42	peak
4960.000	41.35	0.22	41.57	54.00	-12.43	AVG
7440.000	49.52	2.64	52.16	74.00	-21.84	peak
7440.000	40.58	2.64	43.22	54.00	-10.78	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

EUT Name	Phone	Model Name	W635W
Temperature	18.5℃	Relative Humidity	56.1%
Pressure	960hPa	Test Voltage	DC 3.87V by battery
Test Mode	Mode 9	Antenna Polarity	Vertical

Meter Reading	Factor	Emission Level	Limits	Margin	Value
(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Туре
49.74	0.22	49.96	74.00	-24.04	peak
42.51	0.22	42.73	54.00	-11.27	AVG
49.37	2.64	52.01	74.00	-21.99	peak
41.28	2.64	43.92	54.00	-10.08	AVG
	Reading (dBµV) 49.74 42.51 49.37	Reading     Factor       (dBμV)     (dB)       49.74     0.22       42.51     0.22       49.37     2.64	Reading         Factor         Level           (dBμV)         (dB)         (dBμV/m)           49.74         0.22         49.96           42.51         0.22         42.73           49.37         2.64         52.01	Reading         Factor         Level         Limits           (dBμV)         (dB)         (dBμV/m)         (dBμV/m)           49.74         0.22         49.96         74.00           42.51         0.22         42.73         54.00           49.37         2.64         52.01         74.00	Reading         Factor         Level         Limits         Margin           (dBμV)         (dB)         (dBμV/m)         (dBμV/m)         (dB)           49.74         0.22         49.96         74.00         -24.04           42.51         0.22         42.73         54.00         -11.27           49.37         2.64         52.01         74.00         -21.99

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

### **RESULT: PASS**



Page 65 of 91

#### **Radiated Emissions Test Results Above 1GHz**

EUT Name	Phone	Model Name	W635W-S
Temperature	18.5℃	Relative Humidity	56.1%
Pressure	960hPa	Test Voltage	DC 3.87V by battery
Test Mode	Mode 7	Antenna Polarity	Horizontal

Meter Reading	Factor	Emission Level	Limits	Margin	Value
(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Туре
50.12	80.0	50.2	74.00	-23.80	peak
40.51	0.08	40.59	54.00	-13.41	AVG
49.52	2.21	51.73	74.00	-22.27	peak
41.12	2.21	43.33	54.00	-10.67	AVG
	Reading (dBµV) 50.12 40.51 49.52	Reading     Factor       (dBμV)     (dB)       50.12     0.08       40.51     0.08       49.52     2.21	Reading     Factor     Level       (dBμV)     (dB)     (dBμV/m)       50.12     0.08     50.2       40.51     0.08     40.59       49.52     2.21     51.73	Reading         Factor         Level         Limits           (dBμV)         (dB)         (dBμV/m)         (dBμV/m)           50.12         0.08         50.2         74.00           40.51         0.08         40.59         54.00           49.52         2.21         51.73         74.00	Reading         Factor         Level         Limits         Margin           (dBμV)         (dB)         (dBμV/m)         (dBμV/m)         (dB)           50.12         0.08         50.2         74.00         -23.80           40.51         0.08         40.59         54.00         -13.41           49.52         2.21         51.73         74.00         -22.27

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

EUT Name	Phone	Model Name	W635W-S
Temperature	18.5℃	Relative Humidity	56.1%
Pressure	960hPa	Test Voltage	DC 3.87V by battery
Test Mode	Mode 7	Antenna Polarity	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Type
4804.000	49.63	0.08	49.71	74.00	-24.29	peak
4804 000	41.51	0.08	41.59	54.00	-12.41	AVG
7206.000	48.96	2.21	51.17	74.00	-22.83	peak
7206.000	40.55	2.21	42.76	54.00	-11.24	AVG
Remark:	-					='

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

#### **RESULT: PASS**



Page 66 of 91

#### **Radiated Emissions Test Results for Above 1GHz**

EUT Name	Phone	Model Name	W635W-S
Temperature	18.5℃	Relative Humidity	56.1%
Pressure	960hPa	Test Voltage	DC 3.87V by battery
Test Mode	Mode 8	Antenna Polarity	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Type
4882.000	49.96	0.14	50.10	74.00	-23.90	peak
4882.000	41.25	0.14	41.39	54.00	-12.61	AVG
7323.000	49.65	2.36	52.01	74.00	-21.99	peak
7323.000	40.58	2.36	42.94	54.00	-11.06	AVG
Domark:	-					_

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

EUT Name	Phone	Model Name	W635W-S
Temperature	18.5℃	Relative Humidity	56.1%
Pressure	960hPa	Test Voltage	DC 3.87V by battery
Test Mode	Mode 8	Antenna Polarity	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Type
4882.000	48.74	0.14	48.88	74.00	-25.12	peak
4882.000	40.58	0.14	40.72	54.00	-13.28	AVG
7323.000	49.62	2.36	51.98	74.00	-22.02	peak
7323.000	41.22	2.36	43.58	54.00	-10.42	AVG

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

#### **RESULT: PASS**



Page 67 of 91

#### Radiated Emissions Test Results for Above 1GHz

EUT Name	Phone	Model Name	W635W-S
Temperature	18.5℃	Relative Humidity	56.1%
Pressure	960hPa	Test Voltage	DC 3.87V by battery
Test Mode	Mode 9	Antenna Polarity	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Туре
4960.000	50 36	0.22	50.58	74.00	-23.42	peak
4960.000	41.35	0.22	41.57	54.00	-12.43	AVG
7440.000	49.52	2.64	52.16	74.00	-21.84	peak
7440.000	40.58	2.64	43.22	54.00	-10.78	AVG

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

EUT Name	Phone	Model Name	W635W-S
Temperature	18.5℃	Relative Humidity	56.1%
Pressure	960hPa	Test Voltage	DC 3.87V by battery
Test Mode	Mode 9	Antenna Polarity	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Туре
4960.000	50.36	0.22	50.58	74.00	-23.42	peak
4960.000	41.58	0.22	41.80	54.00	-12.20	AVG
7440.000	49.58	2.64	52.22	74.00	-21.78	peak
7440.000	40.74	2.64	43.38	54.00	-10.62	AVG
Domorki		•	_	•	•	_


Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

#### **RESULT: PASS**

#### Note:

- 1. The amplitude of other spurious emissions from 1G to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.
- 2. Factor = Antenna Factor + Cable loss Pre-amplifier gain, Margin = Emission Level-Limit.
- 3. The "Factor" value can be calculated automatically by software of measurement system.






#### **Band Edge Emission Test Results for Restricted Bands**

EUT Name	Phone	Model Name	W635W
Temperature	25℃	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 3.87V by battery
Test Mode	Mode 1	Antenna Polarity	Horizontal


Test Graph for Peak Measurement





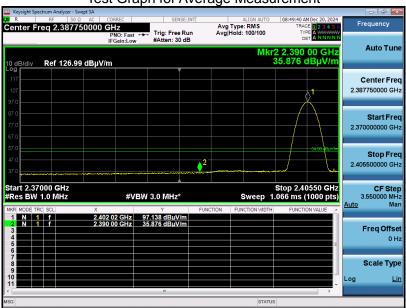

#### **RESULT: PASS**






#### **Band Edge Emission Test Results for Restricted Bands**

EUT Name	Phone	Model Name	W635W
Temperature	25℃	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 3.87V by battery
Test Mode	Mode 1	Antenna Polarity	Vertical

Test Graph for Peak Measurement





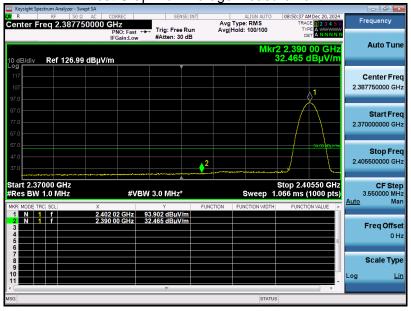

#### **RESULT: PASS**