

TEST REPORT

Reference No. : WTS18S04109170-1W
FCC ID..... : 2APQ7-ALARM-DL
Applicant..... : XENA SECURITY LIMITED
Address : RM 1210, WANG CHEONG ENTERPRISES CENTRE, 65 CHAI WAN KOK ST., TSUEN WAN, N.T. HONGKONG, China
Manufacturer : Kentle Technology Ltd.
Address : Tiantou 2nd Industrial Area, Hengli Town, Dongguan, Guangdong, China
Product..... : DISC LOCK ALARM
Model(s)..... : XX6, XX10, XX14, XX15, XZZ6L
Standards..... : FCC CFR47 Part 15 C Section 15.247:2018
Date of Receipt sample..... : 2018-04-23
Date of Test..... : 2018-05-02 to 2018-06-05
Date of Issue : 2018-06-06
Test Result : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company.

The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:

Waltek Services (Shenzhen) Co., Ltd.

Address: 1/F., Fukangtai Building, West Baima Road, Songgang Street, Baoan District, Shenzhen, Guangdong, China

Tel :+86-755-83551033

Fax:+86-755-83552400

Tested by:

Approved by:

Robin Zhou

Robin Zhou / Test Engineer




Philo Zhong

Philo Zhong / Manager

1 Laboratories Introduction

Waltek Services (Shenzhen) Co., Ltd is a professional third-party testing and certification laboratory with multi-year product testing and certification experience, established strictly in accordance with ISO/IEC 17025 requirements, and accredited by ILAC (International Laboratory Accreditation Cooperation) member. A2LA (American Association for Laboratory Accreditation) of USA, Meanwhile, Waltek has got recognition as registration and accreditation laboratory from EMSD (Electrical and Mechanical Services Department), and American Energy star, FCC(The Federal Communications Commission), CEC(California energy efficiency), IC(Industry Canada). It's the strategic partner and data recognition laboratory of international authoritative organizations, such as Intertek(ETL-SEMKO), TÜV Rheinland, TÜV SÜD, etc.

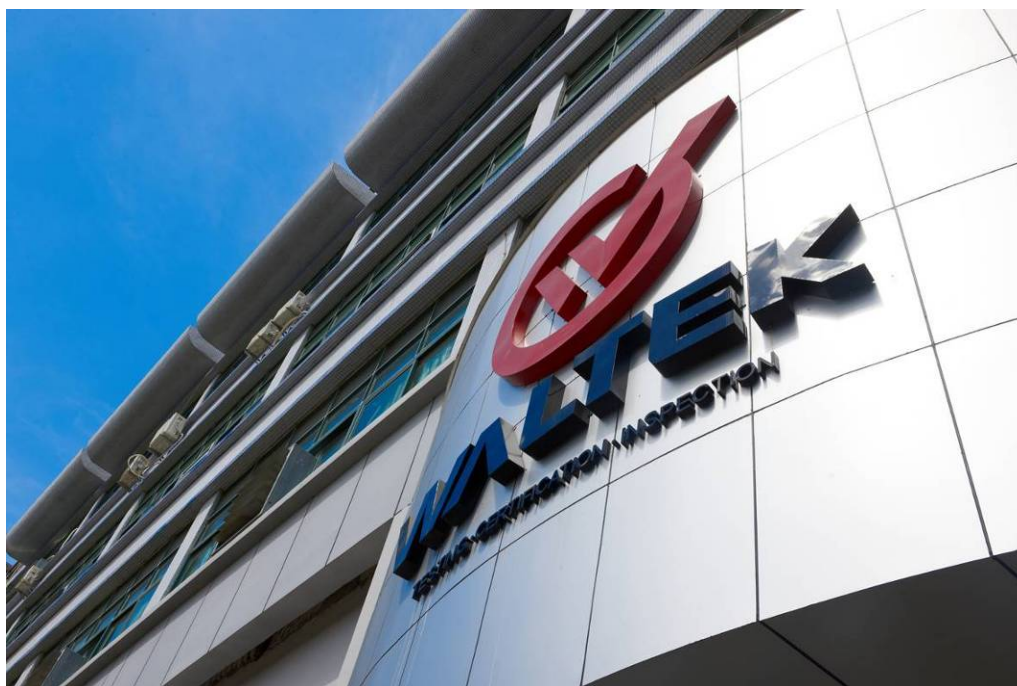

Waltek Services (Shenzhen) Co., Ltd is one of the largest and the most comprehensive third party testing laboratory in China. Our test capability covered four large fields: safety test. Electro Magnetic Compatibility (EMC), and energy performance, wireless radio. As a professional, comprehensive, justice international test organization, we still keep the scientific and rigorous work attitude to help each client satisfy the international standards and assist their product enter into globe market smoothly.

1.1 Test Facility

A. Accreditations for Conformity Assessment (International)

1. Requirements for Entering Assessment (International)			
Country/Region	Accreditation Body	Scope	Note
USA	A2LA (Certificate No.: 4243.01)	FCC ID \ DOC \ VOC	1
Canada		IC ID \ VOC	2
Japan		MIC-T \ MIC-R	-
Europe		EMCD \ RED	-
Taiwan		NCC	-
Hong Kong		OFCA	-
Australia		RCM	-
India		International Services	WPC
Thailand	NTC		-
Singapore	IDA		-
Note:			
1. FCC Designation No.: CN1201. Test Firm Registration No.: 523476.			
2. IC Canada Registration No.: 7760A			

B.TCBs and Notify Bodies Recognized Testing Laboratory.

Recognized Testing Laboratory of ...	Notify body number
TUV Rheinland	Optional.
Intertek	
TUV SUD	
SGS	
Phoenix Testlab GmbH	0700
Element Materials Technology Warwick Ltd	0891
Timco Engineering, Inc.	1177
Eurofins Product Service GmbH	0681

2 Contents

	Page
COVER PAGE.....	1
1 LABORATORIES INTRODUCTION	2
1.1 TEST FACILITY	3
2 CONTENTS	4
3 REVISION HISTORY	5
4 GENERAL INFORMATION.....	6
4.1 GENERAL DESCRIPTION OF E.U.T.....	6
4.2 DETAILS OF E.U.T.....	6
4.3 CHANNEL LIST	6
4.4 TEST MODE	7
5 EQUIPMENT USED DURING TEST	8
5.1 EQUIPMENTS LIST	8
5.2 MEASUREMENT UNCERTAINTY.....	9
5.3 SUBCONTRACTED.....	9
6 TEST SUMMARY	10
7 RADIATED EMISSIONS.....	11
7.1 EUT OPERATION.....	11
7.2 TEST SETUP	12
7.3 SPECTRUM ANALYZER SETUP	13
7.4 TEST PROCEDURE.....	14
7.5 CORRECTED AMPLITUDE & MARGIN CALCULATION	14
7.6 SUMMARY OF TEST RESULTS	15
8 BAND EDGE MEASUREMENT	21
8.1 TEST PRODUCE	21
8.2 TEST SETUP	22
8.3 TEST RESULT	22
9 BANDWIDTH MEASUREMENT.....	24
9.1 TEST PROCEDURE:.....	24
9.2 TEST SETUP	24
9.3 TEST RESULT:	24
10 MAXIMUM PEAK OUTPUT POWER	27
10.1 TEST PROCEDURE:.....	27
10.2 TEST SETUP	27
10.3 TEST RESULT:	27
11 POWER SPECTRAL DENSITY	30
11.1 TEST PROCEDURE:.....	30
11.2 TEST SETUP	30
11.3 TEST RESULT:	30
12 ANTENNA REQUIREMENT	33
13 FCC ID: 2APQ7-ALARM-DL RF EXPOSURE REPORT	34
14 PHOTOGRAPHS-DISC LOCK ALARM TEST SETUP PHOTOS	34
15 PHOTOGRAPHS-CONSTRUCTIONAL DETAILS	34
15.1 DISC LOCK ALARM-EXTERNAL PHOTOS	34
15.2 DISC LOCK ALARM-INTERNAL PHOTOS	34

3 Revision History

Test report No.	Date of Receipt sample	Date of Test	Date of Issue	Purpose	Comment	Approved
WTS18S04109170-1W	2018-04-23	2018-05-02 to 2018-06-05	2018-06-06	Original	-	Valid

4 General Information

4.1 General Description of E.U.T

Product:	DISC LOCK ALARM			
Model(s).:	XX6, XX10, XX14, XX15, XZZ6L			
Model Difference:	The above models are the same electronic components and use the same Bluetooth module. For XX6, XX10, XX14, XX15 only the models name and the size of the physical structure of the lock are different. For XX6, XX10, XX14, XX15 and XZZ6L in addition to the different model names and the size of the physical structure of the lock, there are differences in component layout. XX15 and XZZ6L are the tested sample.			
For the details see below table.				
product	model	electronic components	component layout	tested sample
DISC LOCK ALARM	XX6	identical	identical	No
DISC LOCK ALARM	XX10	identical	identical	No
DISC LOCK ALARM	XX14	identical	identical	No
DISC LOCK ALARM	XX15	identical	identical	Yes
DISC LOCK ALARM	XZZ6L	identical	different	Yes

4.2 Details of E.U.T.

Operation Frequency:	2402MHz ~ 2480MHz
Antenna installation:	PCB printed antenna
Antenna Gain:	0dBi
Type of modulation:	GFSK(BLE)
Ratings	DC 3V by CR2 LITHIUM Battery

4.3 Channel List

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
0	2402	1	2404	2	2406	3	2408
4	2410	5	2412	6	2414	7	2416
8	2418	9	2420	10	2422	11	2424
12	2426	13	2428	14	2430	15	2432
16	2434	17	2436	18	2438	19	2440
20	2442	21	2444	22	2446	23	2448
24	2450	25	2452	26	2454	27	2456
28	2458	29	2460	30	2462	31	2464
32	2466	33	2468	34	2470	35	2472
36	2474	37	2476	38	2478	39	2480

4.4 Test Mode

Table 1 Tests Carried Out Under FCC part 15.247

Test Items	Mode	Data Rate	Channel	TX/RX
Maximum Peak Output Power	GFSK	1 Mbps	0/19/39	TX
Power Spectral Density	GFSK	1 Mbps	0/19/39	TX
Bandwidth	GFSK	1 Mbps	0/19/39	TX
Band Edge	GFSK	1 Mbps	0/39	TX
Radiated Emissions	GFSK	1 Mbps	0/19/39	TX

Note :Parameters set by test software during channel & power tests, the software provided by the customer was used to set the operating channels as well as the output power level. The RF output power set is the power expected by the manufacturer and is going to be fixed on the firmware of the final product .

The EUT has been tested under its typical operating condition. Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting. Only the worst case data were reported.

5 Equipment Used during Test

5.1 Equipments List

3m Semi-anechoic Chamber for Radiation Emissions						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1	Spectrum Analyzer	R&S	FSP30	100091	2018-04-29	2019-04-28
2	Broad-band Horn Antenna(1-18GHz)	SCHWARZBECK	BBHA 9120 D	667	2018-04-29	2019-04-28
3	Broadband Preamplifier	COMPLIANCE DIRECTION	PAP-1G18	2004	2018-04-29	2019-04-28
4	Coaxial Cable (above 1GHz)	Top	1GHz-18GHz	EW02014-7	2018-04-29	2019-04-28
5	Spectrum Analyzer	R&S	FSP40	100501	2017-10-20	2018-10-19
6	Broad-band Horn Antenna(18-40GHz)	SCHWARZBECK	BBHA 9170	BBHA917065 1	2017-10-25	2018-10-24
7	Microwave Broadband Preamplifier (18-40GHz)	SCHWARZBECK	BBV 9721	100472	2017-10-25	2018-10-24
8	Cable	Top	18-40GHz	-	2017-10-25	2018-10-24
3m Semi-anechoic Chamber for Radiation Emissions						
Item	Equipment	Manufacturer	Model No.	Serial No	Last Calibration Date	Calibration Due Date
1	Test Receiver	R&S	ESCI	101296	2018-04-29	2019-04-28
2	Trilog Broadband Antenna	SCHWARZBECK	VULB9160	9160-3325	2018-04-29	2019-04-28
3	Active Loop Antenna	Beijing Dazhi	ZN30900A	-	2018-04-29	2019-04-28
4	Amplifier	ANRITSU	MH648A	M43381	2018-04-29	2019-04-28
5	Cable	HUBER+SUHNER	CBL2	525178	2018-04-29	2019-04-28
6	Coaxial Cable (below 1GHz)	Top	TYPE16 (13M)	-	2017-09-12	2018-09-11
RF Conducted Testing						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	Spectrum Analyzer	R&S	FSL6	100959	2017-09-12	2018-09-11

2	Coaxial Cable	Top	10Hz-30GHz	-	2017-09-12	2018-09-11
3	Antenna Connector*	Realacc	45RSm	-	2017-09-12	2018-09-11
4	DC Block	Gwave	GDCB-3G-N-SMA	140307001	2017-09-12	2018-09-11
**: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.						

5.2 Measurement Uncertainty

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-6}$
RF Power	± 1.0 dB
RF Power Density	± 2.2 dB
Radiated Spurious Emissions test	± 5.03 dB (30M~1000MHz)
	± 5.47 dB (1000M~25000MHz)
Confidence interval: 95%. Confidence factor:k=2	

5.3 Subcontracted

Whether parts of tests for the product have been subcontracted to other labs:

☐ Yes ☒ No

If Yes, list the related test items and lab information:

Test Lab: N/A

Lab address: N/A

FCC Designation No.: N/A. Test Firm Registration No.: N/A

Test items: N/A

6 Test Summary

Test Items	Test Requirement	Result
Radiated Emissions	15.247 15.205(a) 15.209(a)	Pass
Conducted Emissions	15.207(a)	N/A*
Bandwidth	15.247(a)(2)	Pass
Maximum Peak Output Power	15.247(b)(3),(4)	Pass
Power Spectral Density	15.247(e)	Pass
Band Edge	15.247(d)	Pass
Antenna Requirement	15.203	Pass
RF Exposure	1.1307(b)(1)	Pass
Note: Pass=Compliance; NC=Not Compliance; NT=Not Tested; N/A=Not Applicable. “**”: The EUT is only powered by battery, no need to evaluate AC Power Conducted Emission.		

7 Radiated Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.209 & 15.247

Test Method: ANSI C63.10:2013

Test Result: PASS

Measurement Distance: 3m

Limit:

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	$2400/F(\text{kHz})$	300	$10000 * 2400/F(\text{kHz})$	$20\log^{(2400/F(\text{kHz}))} + 80$
0.490 ~ 1.705	$24000/F(\text{kHz})$	30	$100 * 24000/F(\text{kHz})$	$20\log^{(24000/F(\text{kHz}))} + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

7.1 EUT Operation

Operating Environment :

Temperature: 23.5 °C

Humidity: 52.1 % RH

Atmospheric Pressure: 101.2kPa

Test Voltage: DC 3V by battery


EUT Operation :

The test was performed in transmitting mode, the test data were shown in the report.


7.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.10:2013.


The test setup for emission measurement below 30MHz.

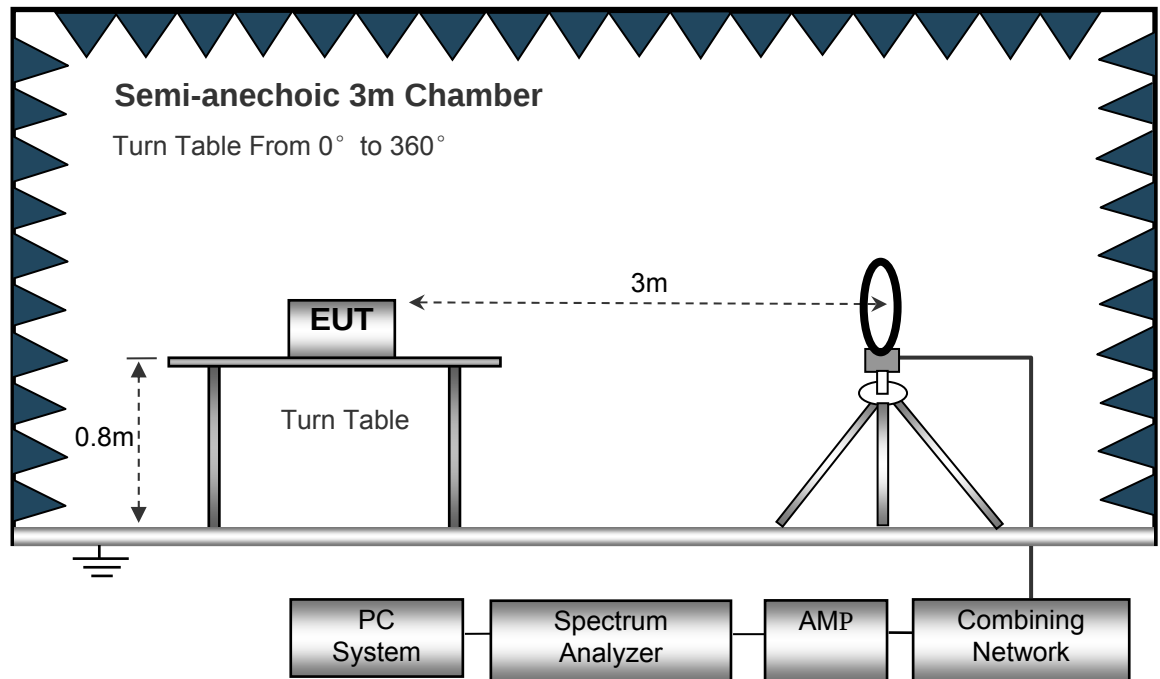

The test setup for emission measurement from 30 MHz to 1 GHz.

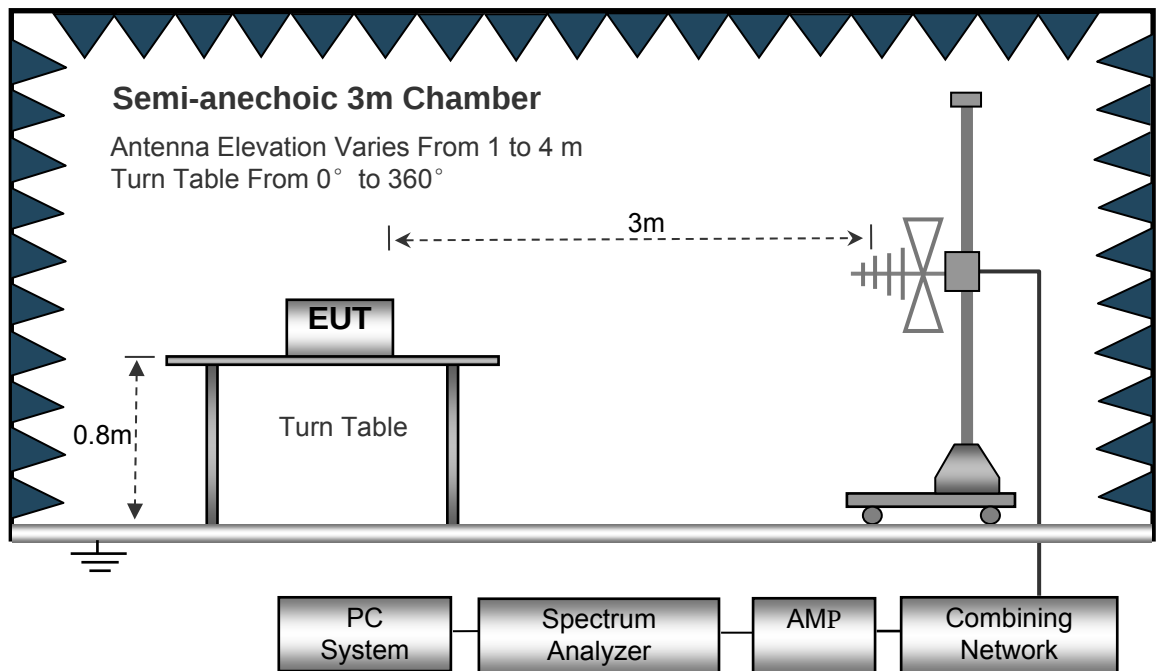

The test setup for emission measurement above 1 GHz.

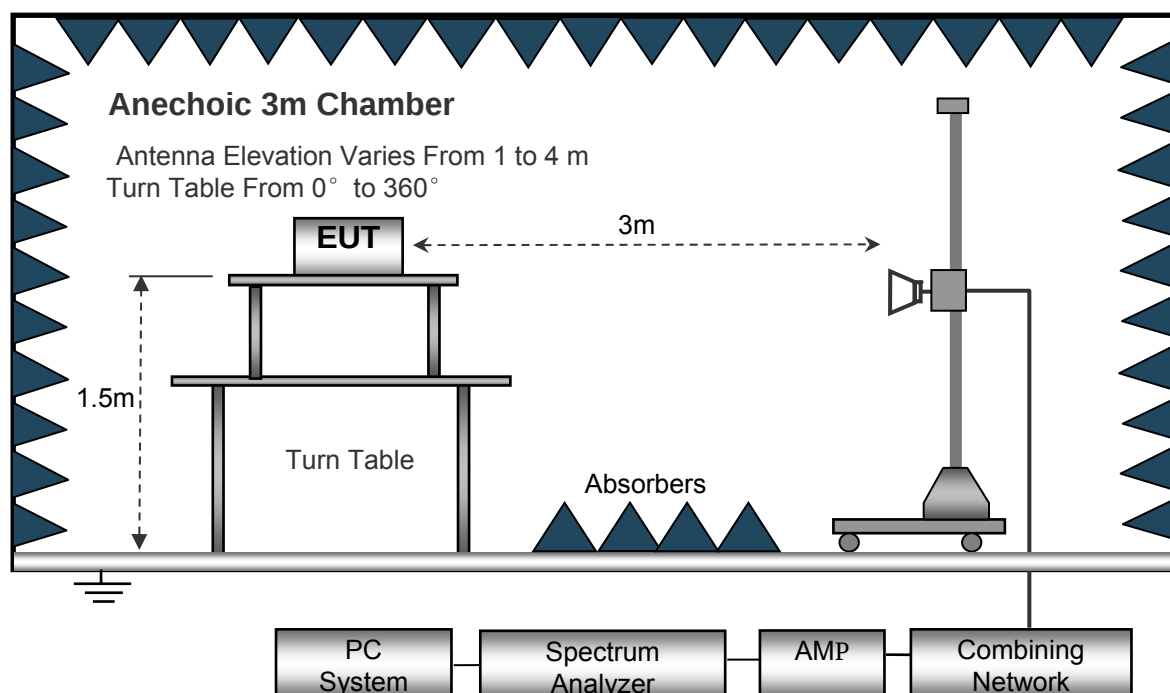

7.3 Spectrum Analyzer Setup

Below 30MHz

Sweep Speed Auto
 IF Bandwidth..... 10kHz
 Video Bandwidth..... 10kHz
 Resolution Bandwidth..... 10kHz

30MHz ~ 1GHz

Sweep Speed Auto
 Detector PK
 Resolution Bandwidth..... 100kHz
 Video Bandwidth..... 300kHz

Above 1GHz

Sweep Speed Auto
 Detector PK
 Resolution Bandwidth..... 1MHz
 Video Bandwidth..... 3MHz
 Detector Ave.
 Resolution Bandwidth..... 1MHz
 Video Bandwidth..... 10Hz

7.4 Test Procedure

1. The EUT is placed on a turntable. For below 1GHz, the EUT is 0.8m above ground plane;
For above 1GHz, the EUT is 1.5m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are performed in X,Y and Z axis positioning(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand),the worst condition was tested putting the eut in X axis,so the worst data were shown as follow.
8. A 2.4GHz high -pass filter is used during radiated emissions above 1GHz measurement.

7.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$

7.6 Summary of Test Results

Model: XX15

Test Frequency : 9 kHz to 30 MHz

The measurements were more than 20 dB below the limit and not reported.

Test Frequency : 30 MHz ~ 18 GHz

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
Low Channel 2402MHz									
549.02	33.77	QP	321	1.4	H	-7.51	26.26	46.00	-19.74
549.02	37.30	QP	27	1.3	V	-7.51	29.79	46.00	-16.21
4804.00	44.21	PK	95	1.8	V	-1.06	43.15	74.00	-30.85
4804.00	33.19	Ave	95	1.8	V	-1.06	32.13	54.00	-21.87
7206.00	40.27	PK	56	1.1	H	1.33	41.60	74.00	-32.40
7206.00	29.98	Ave	56	1.1	H	1.33	31.31	54.00	-22.69
2321.02	45.48	PK	12	1.4	V	-13.19	32.29	74.00	-41.71
2321.02	34.23	Ave	12	1.4	V	-13.19	21.04	54.00	-32.96
2350.53	43.51	PK	64	1.6	H	-13.14	30.37	74.00	-43.63
2350.53	35.00	Ave	64	1.6	H	-13.14	21.86	54.00	-32.14
2487.18	43.69	PK	264	2.0	V	-13.08	30.61	74.00	-43.39
2487.18	33.14	Ave	264	2.0	V	-13.08	20.06	54.00	-33.94

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
Middle Channel 2440MHz									
549.02	34.25	QP	303	1.0	H	-7.51	26.74	46.00	-19.26
549.02	35.99	QP	227	1.8	V	-7.51	28.48	46.00	-17.52
4880.00	44.59	PK	236	1.5	V	-0.62	43.97	74.00	-30.03
4880.00	32.70	Ave	236	1.5	V	-0.62	32.08	54.00	-21.92
7320.00	40.38	PK	131	1.7	H	2.21	42.59	74.00	-31.41
7320.00	29.62	Ave	131	1.7	H	2.21	31.83	54.00	-22.17
2338.66	45.33	PK	233	1.6	V	-13.19	32.14	74.00	-41.86
2338.66	34.15	Ave	233	1.6	V	-13.19	20.96	54.00	-33.04
2359.22	44.48	PK	114	1.4	H	-13.14	31.34	74.00	-42.66
2359.22	33.41	Ave	114	1.4	H	-13.14	20.27	54.00	-33.73
2487.48	43.33	PK	307	1.7	V	-13.08	30.25	74.00	-43.75
2487.48	34.83	Ave	307	1.7	V	-13.08	21.75	54.00	-32.25

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
High Channel 2480MHz									
549.02	34.48	QP	304	1.6	H	-7.51	26.97	46.00	-19.03
549.02	34.84	QP	349	1.0	V	-7.51	27.33	46.00	-18.67
4960.00	45.42	PK	316	1.2	V	-0.24	45.18	74.00	-28.82
4960.00	32.90	Ave	316	1.2	V	-0.24	32.66	54.00	-21.34
7440.00	41.27	PK	335	1.1	H	2.84	44.11	74.00	-29.89
7440.00	30.70	Ave	335	1.1	H	2.84	33.54	54.00	-20.46
2317.32	46.34	PK	248	1.8	V	-13.19	33.15	74.00	-40.85
2317.32	35.41	Ave	248	1.8	V	-13.19	22.22	54.00	-31.78
2386.45	44.71	PK	142	1.4	H	-13.14	31.57	74.00	-42.43
2386.45	32.22	Ave	142	1.4	H	-13.14	19.08	54.00	-34.92
2496.78	43.69	PK	85	1.7	V	-13.08	30.61	74.00	-43.39
2496.78	33.07	Ave	85	1.7	V	-13.08	19.99	54.00	-34.01

Test Frequency: 18GHz~25GHz

The measurements were more than 20 dB below the limit and not reported.

Model: XZZ6L**Test Frequency : 9 kHz to 30 MHz**

The measurements were more than 20 dB below the limit and not reported.

Test Frequency : 30 MHz ~ 18 GHz

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
Low Channel 2402MHz									
87.11	43.65	QP	340	1.8	H	-19.01	24.64	40.00	-15.36
87.11	45.90	QP	5	1.3	V	-19.01	26.89	40.00	-13.11
4804.00	45.29	PK	43	1.1	V	-1.06	44.23	74.00	-29.77
4804.00	36.04	Ave	43	1.1	V	-1.06	34.98	54.00	-19.02
7206.00	42.10	PK	170	2.0	H	1.33	43.43	74.00	-30.57
7206.00	32.48	Ave	170	2.0	H	1.33	33.81	54.00	-20.19
2342.45	46.50	PK	216	2.0	V	-13.19	33.31	74.00	-40.69
2342.45	33.63	Ave	216	2.0	V	-13.19	20.44	54.00	-33.56
2352.14	42.08	PK	276	1.1	H	-13.14	28.94	74.00	-45.06
2352.14	32.96	Ave	276	1.1	H	-13.14	19.82	54.00	-34.18
2490.28	44.20	PK	10	1.0	V	-13.08	31.12	74.00	-42.88
2490.28	34.33	Ave	10	1.0	V	-13.08	21.25	54.00	-32.75

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
Middle Channel 2440MHz									
87.11	43.34	QP	53	2.0	H	-19.01	24.33	40.00	-15.67
87.11	46.33	QP	317	1.5	V	-19.01	27.32	40.00	-12.68
4880.00	46.38	PK	307	1.5	V	-0.62	45.76	74.00	-28.24
4880.00	34.91	Ave	307	1.5	V	-0.62	34.29	54.00	-19.71
7320.00	42.12	PK	66	1.0	H	2.21	44.33	74.00	-29.67
7320.00	33.67	Ave	66	1.0	H	2.21	35.88	54.00	-18.12
2328.76	45.50	PK	42	1.9	V	-13.19	32.31	74.00	-41.69
2328.76	33.01	Ave	42	1.9	V	-13.19	19.82	54.00	-34.18
2359.76	44.55	PK	343	1.7	H	-13.14	31.41	74.00	-42.59
2359.76	32.33	Ave	343	1.7	H	-13.14	19.19	54.00	-34.81
2497.46	44.00	PK	121	1.3	V	-13.08	30.92	74.00	-43.08
2497.46	32.25	Ave	121	1.3	V	-13.08	19.17	54.00	-34.83

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
High Channel 2480MHz									
87.11	44.02	QP	156	1.0	H	-19.01	25.01	40.00	-14.99
87.11	46.26	QP	23	2.0	V	-19.01	27.25	40.00	-12.75
4960.00	46.19	PK	71	1.3	V	-0.24	45.95	74.00	-28.05
4960.00	34.96	Ave	71	1.3	V	-0.24	34.72	54.00	-19.28
7440.00	42.40	PK	114	1.7	H	2.84	45.24	74.00	-28.76
7440.00	34.18	Ave	114	1.7	H	2.84	37.02	54.00	-16.98
2342.10	46.79	PK	266	2.0	V	-13.19	33.60	74.00	-40.40
2342.10	33.59	Ave	266	2.0	V	-13.19	20.40	54.00	-33.60
2374.03	44.57	PK	5	1.6	H	-13.14	31.43	74.00	-42.57
2374.03	32.14	Ave	5	1.6	H	-13.14	19.00	54.00	-35.00
2495.83	42.40	PK	333	1.7	V	-13.08	29.32	74.00	-44.68
2495.83	32.99	Ave	333	1.7	V	-13.08	19.91	54.00	-34.09

Test Frequency: 18GHz~25GHz

The measurements were more than 20 dB below the limit and not reported.


8 Band Edge Measurement

Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	558074 D01 DTS Meas Guidance v04, April 5, 2017
Test Limit:	Regulation 15.247 (d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
Test Mode:	Transmitting

8.1 Test Produce


1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.


8.2 Test Setup

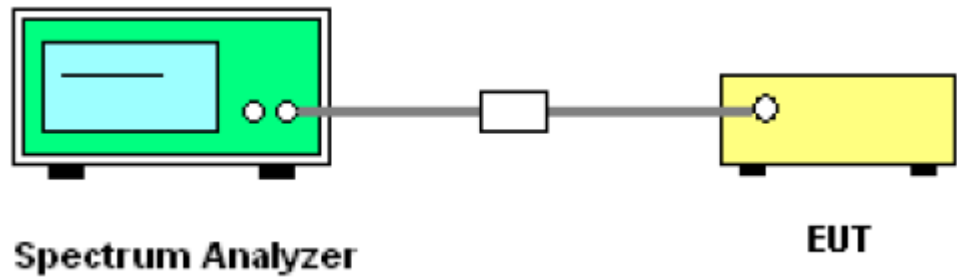

8.3 Test Result

Test result plots shown as follows:

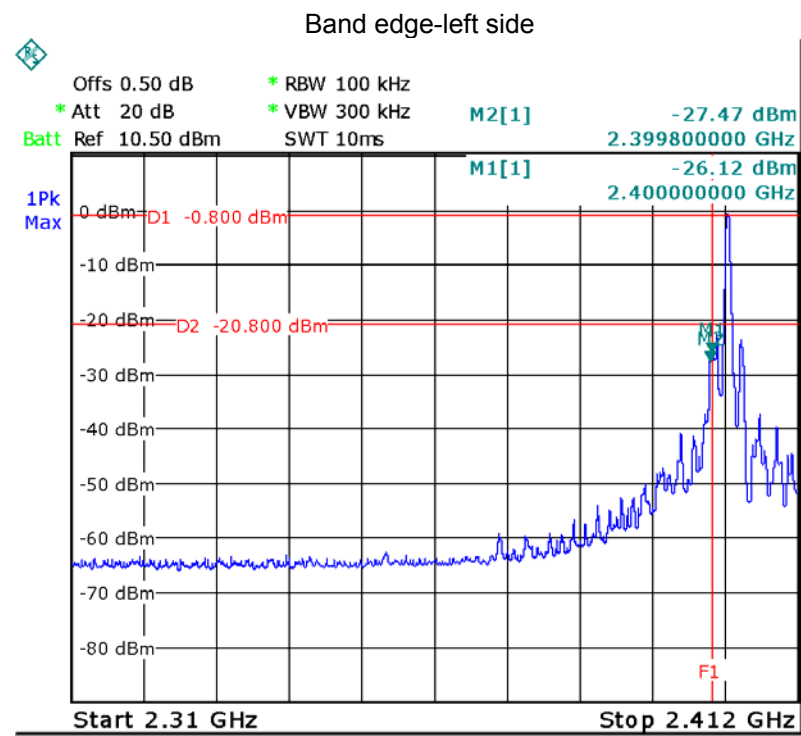

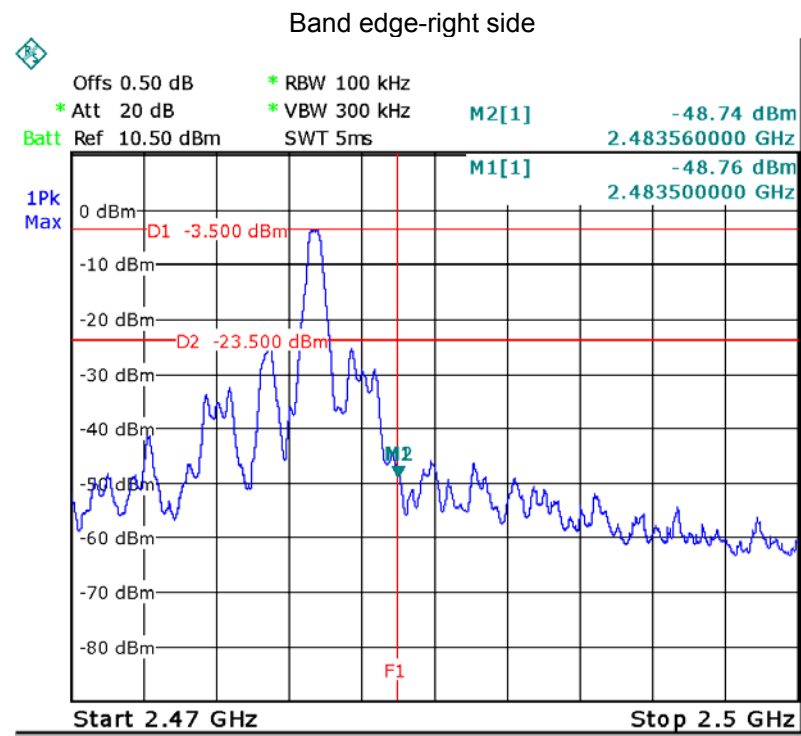

9 Bandwidth Measurement

Test Requirement:

FCC CFR47 Part 15 Section 15.247


Test Method:

558074 D01 DTS Meas Guidance v04, April 5, 2017

9.1 Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz

9.2 Test Setup

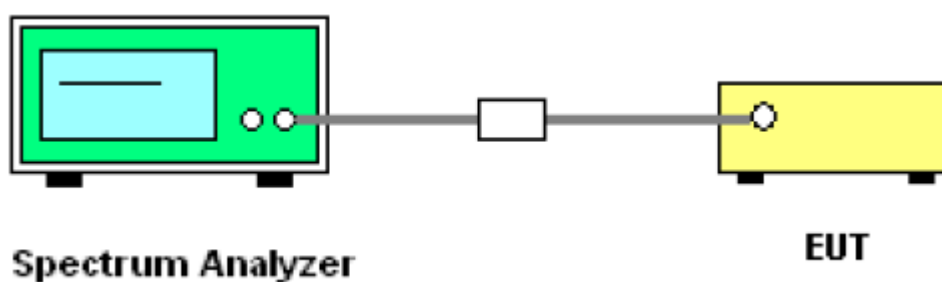


9.3 Test Result:


6dB Bandwidth (MHz)			99% Bandwidth (MHz)		
Low Channel	Middle Channel	High Channel	Low Channel	Middle Channel	High Channel
0.629	0.629	0.629	1.096	1.096	1.048


Test result plot as follows:

Low Channel

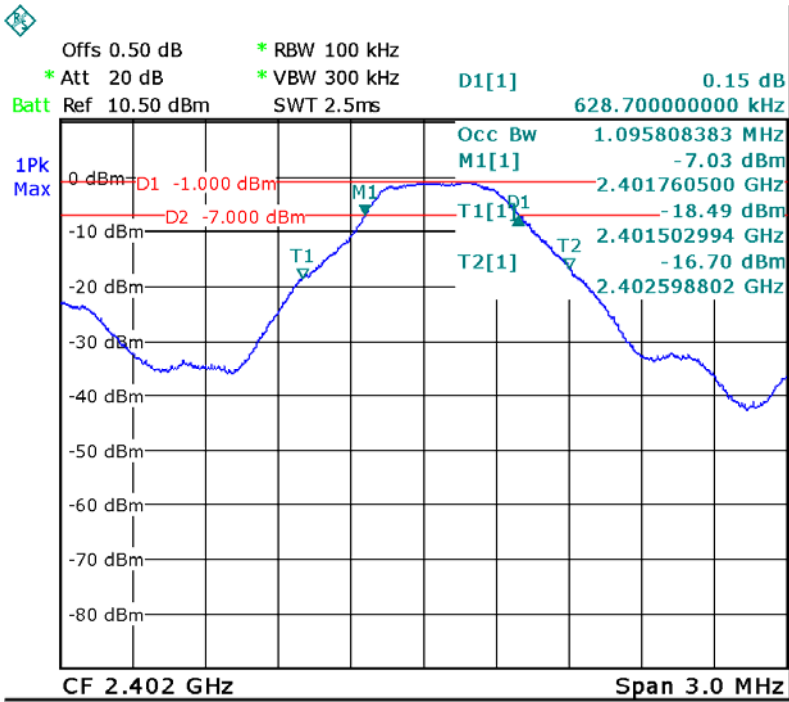

Middle Channel

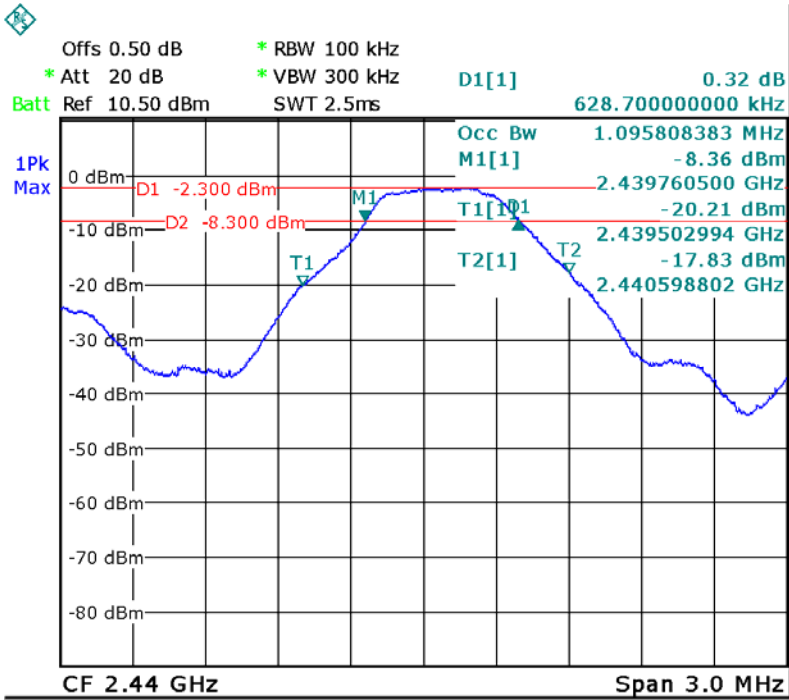

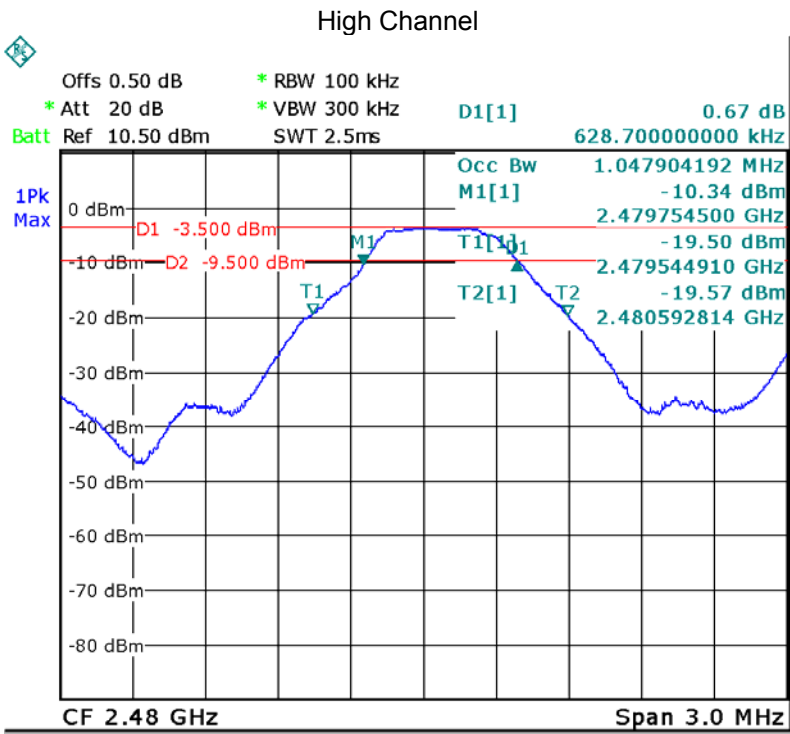

10 Maximum Peak Output Power

Test Requirement:

FCC CFR47 Part 15 Section 15.247

Test Method:


558074 D01 DTS Meas Guidance v04, April 5, 2017

10.1 Test Procedure:

558074 D01 DTS Meas Guidance v04, April 5, 2017



1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 1 MHz. VBW = 3 MHz. Sweep = auto; Detector Function = peak, Set the span to fully encompass the DTS bandwidth.
3. Keep the EUT in transmitting at lowest, medium and highest channel individually. Record the max value.


10.2 Test Setup

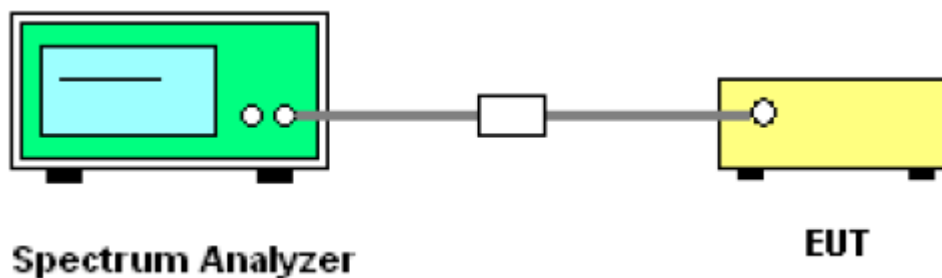

10.3 Test Result:

Test mode : GFSK		
Maximum Peak Output Power (dBm)		
Low Channel	Middle Channel	High Channel
-0.76	-2.07	-3.22
Limit: 1W/30dBm		

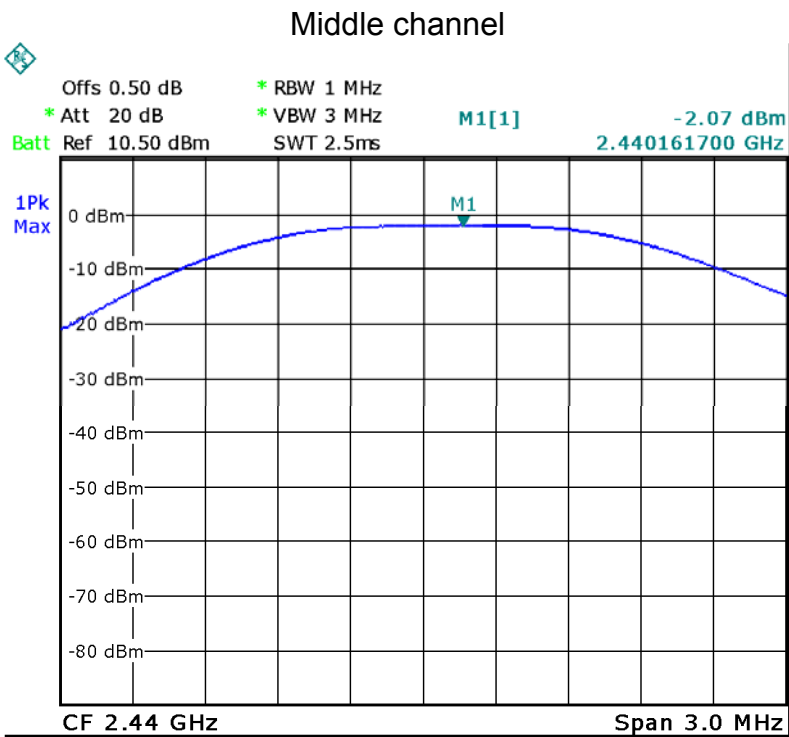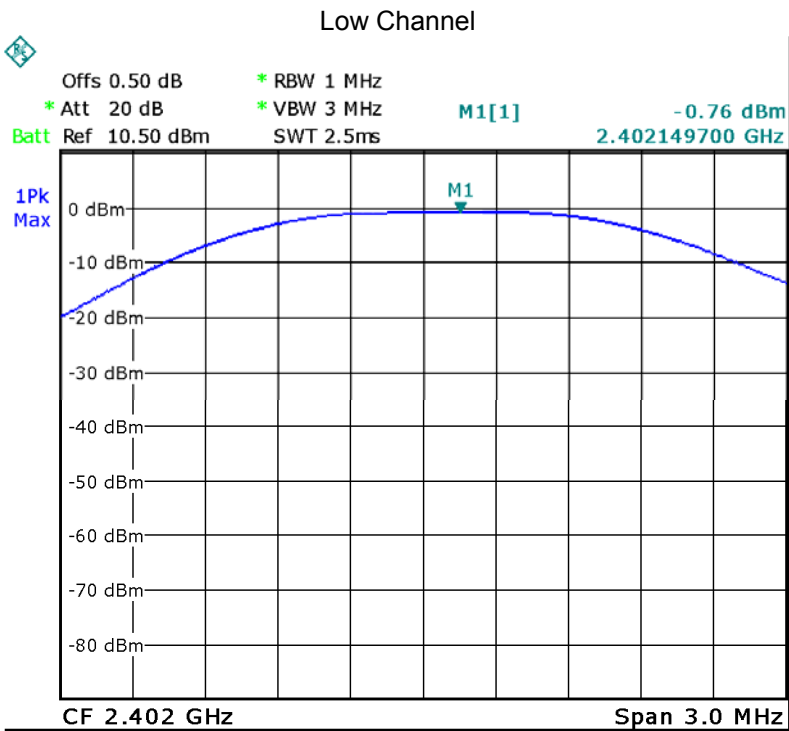

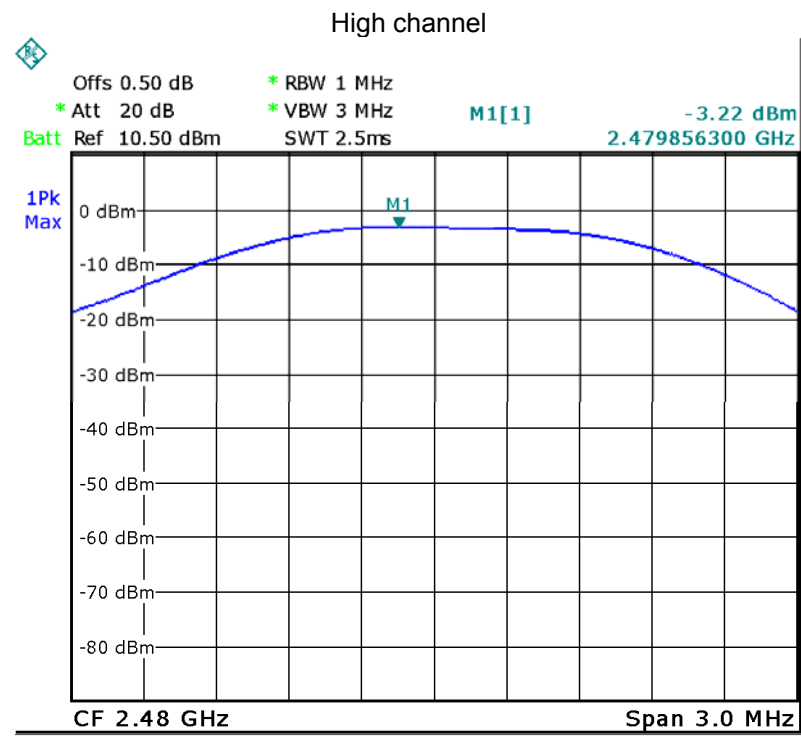

11 Power Spectral density

Test Requirement: FCC CFR47 Part 15 Section 15.247


Test Method: 558074 D01 DTS Meas Guidance v04, April 5, 2017

11.1 Test Procedure:

558074 D01 DTS Meas Guidance v04, April 5, 2017

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 3kHz. VBW = 10kHz , Span = 1.5 times the DTS channel bandwidth(6 dB bandwidth). Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.


11.2 Test Setup

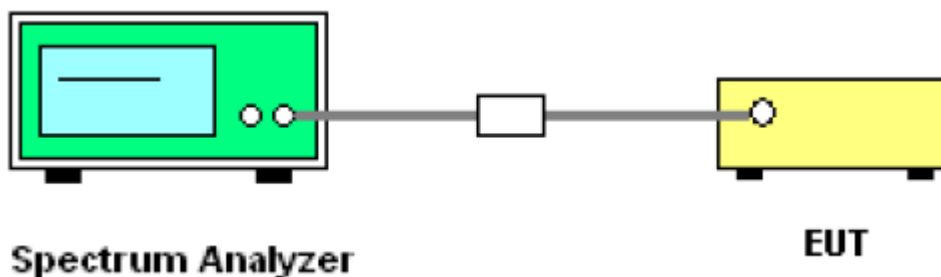


11.3 Test Result:


Test mode : GFSK		
Power Spectral (dBm per 3kHz)		
Low Channel	Middle Channel	High Channel
-11.54	-12.87	-15.01
Limit: 8dBm per 3kHz		

Low Channel

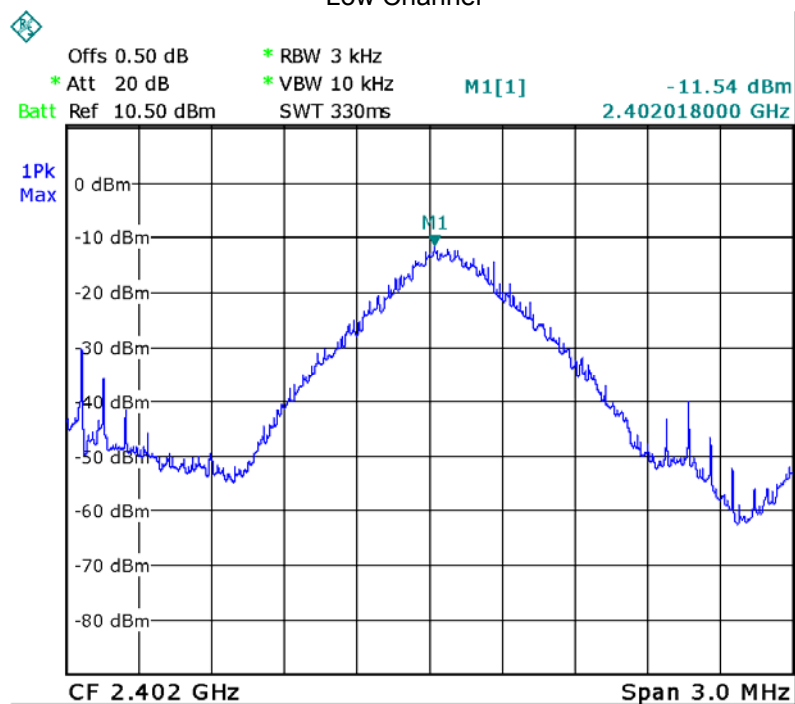

Middle channel

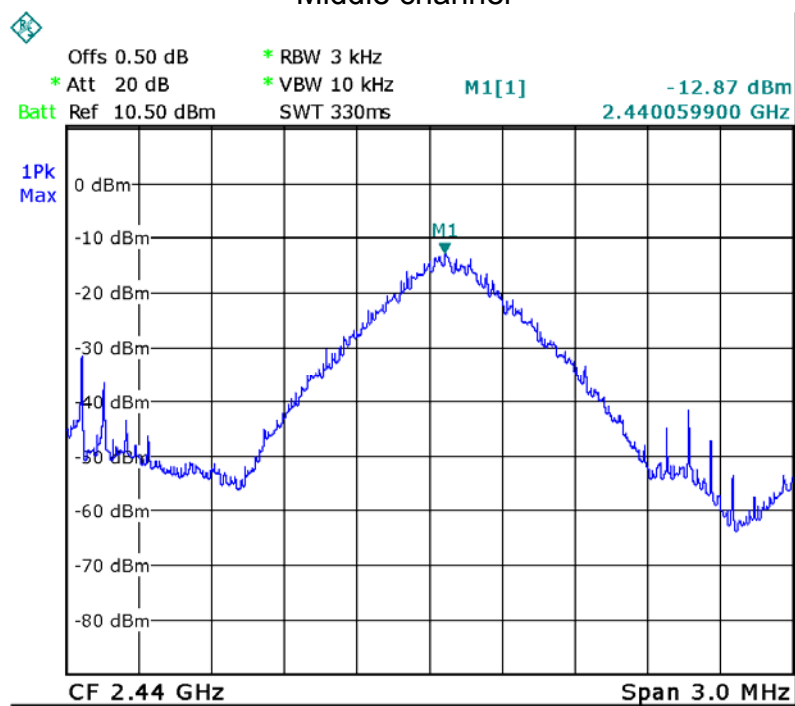

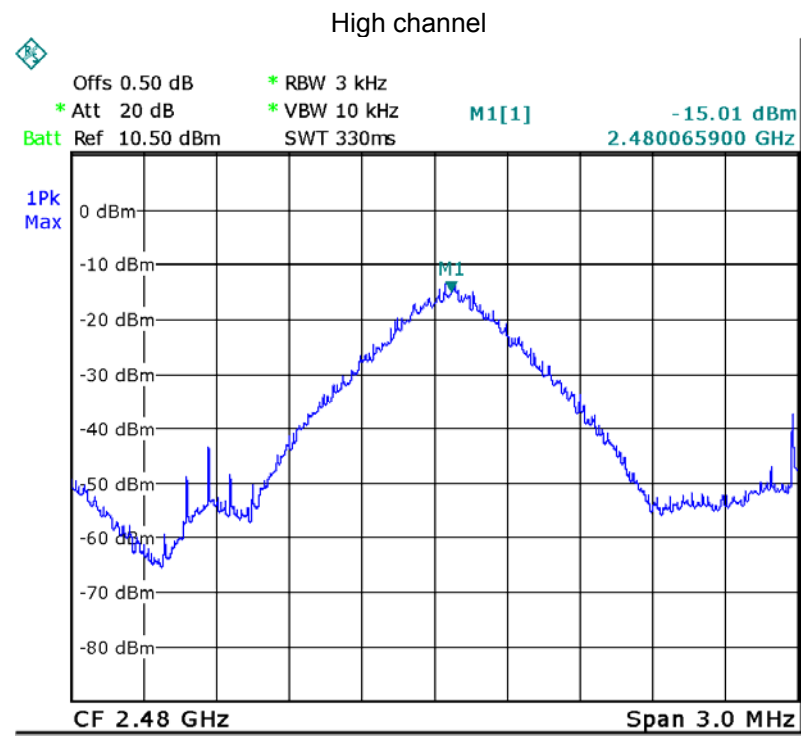

12 Antenna Requirement


An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Result:


The EUT has a PCB Printed Antenna, meets the requirements of FCC 15.203.

Model XX15

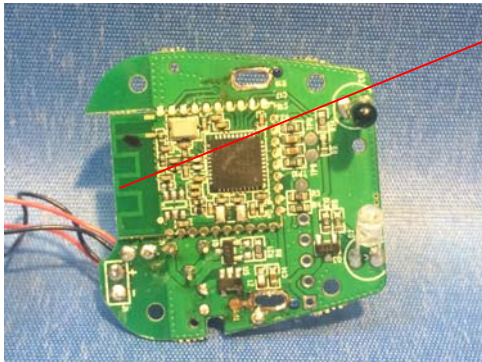

ANT

Model XZZ6L

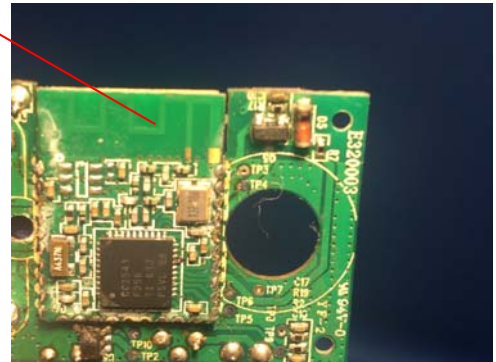

13 FCC ID: 2APQ7-ALARM-DL RF Exposure Report

Note: Please refer to RF Exposure report: WTS18S04109170-2W.

14 Photographs-DISC LOCK ALARM Test Setup Photos

Note: Please refer to Photos: WTS18S04109170-3W.

15 Photographs-Constructional Details

15.1 DISC LOCK ALARM-External Photos

Note: Please refer to Photos: WTS18S04109170-3W.

15.2 DISC LOCK ALARM-Internal Photos

Note: Please refer to Photos: WTS18S04109170-3W.

=====End of Report=====