

Radiated Band Edge Result

Note:

1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:

Result = Reading + Corrected Factor

3. Display the measurement of peak values.

4. The EUT is tested radiation emission at each test mode (802.11a/ac/n) in three axes. Besides, We have tested the single antenna transmit mode and the dual antenna emission mode. The worst emissions are reflected in the following plots.

5. The average measurement was not performed when peak measured data under the limit of average detection.

Test mode: 802.11a TX Frequency: 5180MHz, 5240MHz, 5745MHz, 5825MHz

The EUT is tested Radiated Band Edge at each test mode in three axes. Besides, We have tested the single antenna transmit mode and the dual antenna emission mode. The worst emissions are reflected in the following plots



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: star2018 #2078

Polarization: Horizontal

Standard: FCC PK

Power Source: DC 12V

Test item: Radiation Test

Date: 2018/06/22

Temp. (C)/Hum.(%) 23 C / 48 %

Time: 18:23:45

EUT: UP-Android 7 module

Engineer Signature: star


Mode: TX 5180MHz(802.11a)

Distance: 3m

Model: UPA000AN

Manufacturer: CTOUCH Europe B.V.

Note: Report No.:ATE20180786

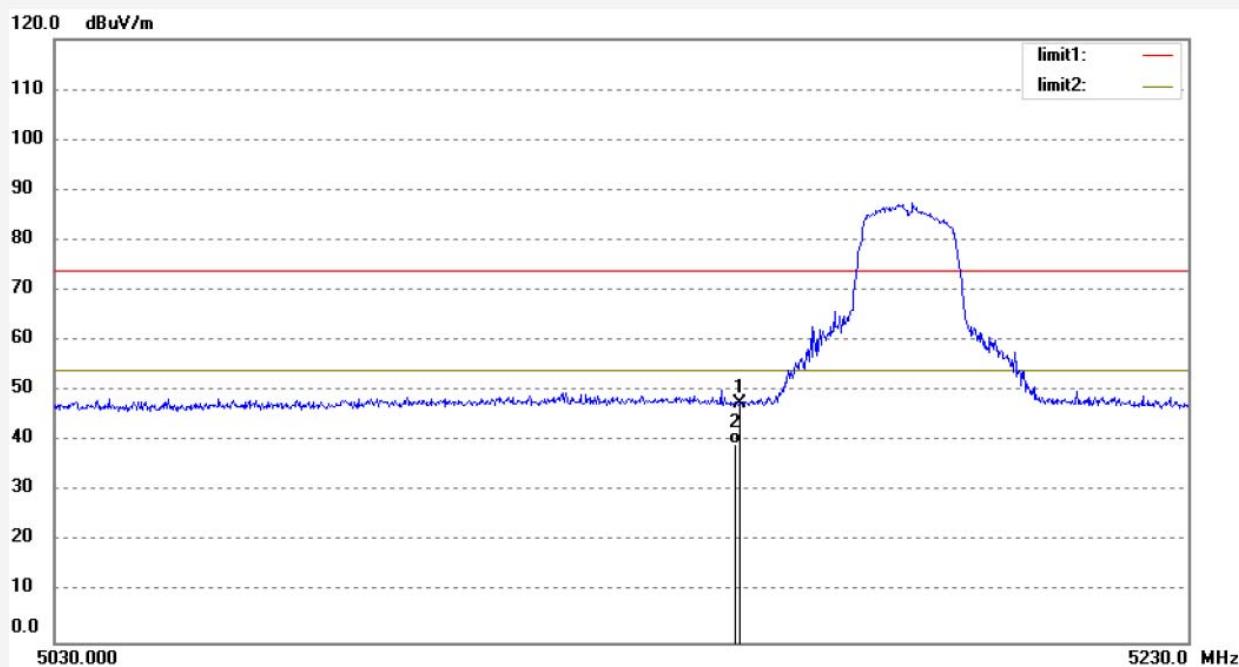

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5150.000	41.09	6.39	47.48	74.00	-26.52	peak	150	118	
2	5150.000	33.11	6.39	39.50	54.00	-14.50	AVG	150	130	



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: star2018 #2077

Polarization: Vertical

Standard: FCC PK

Power Source: DC 12V

Test item: Radiation Test

Date: 2018/06/22

Temp.(C)/Hum.(%) 23 C / 48 %

Time: 18:22:50

EUT: UP-Android 7 module

Engineer Signature: star


Mode: TX 5180MHz(802.11a)

Distance: 3m

Model: UPA000AN

Manufacturer: CTOUCH Europe B.V.

Note: Report No.:ATE20180786

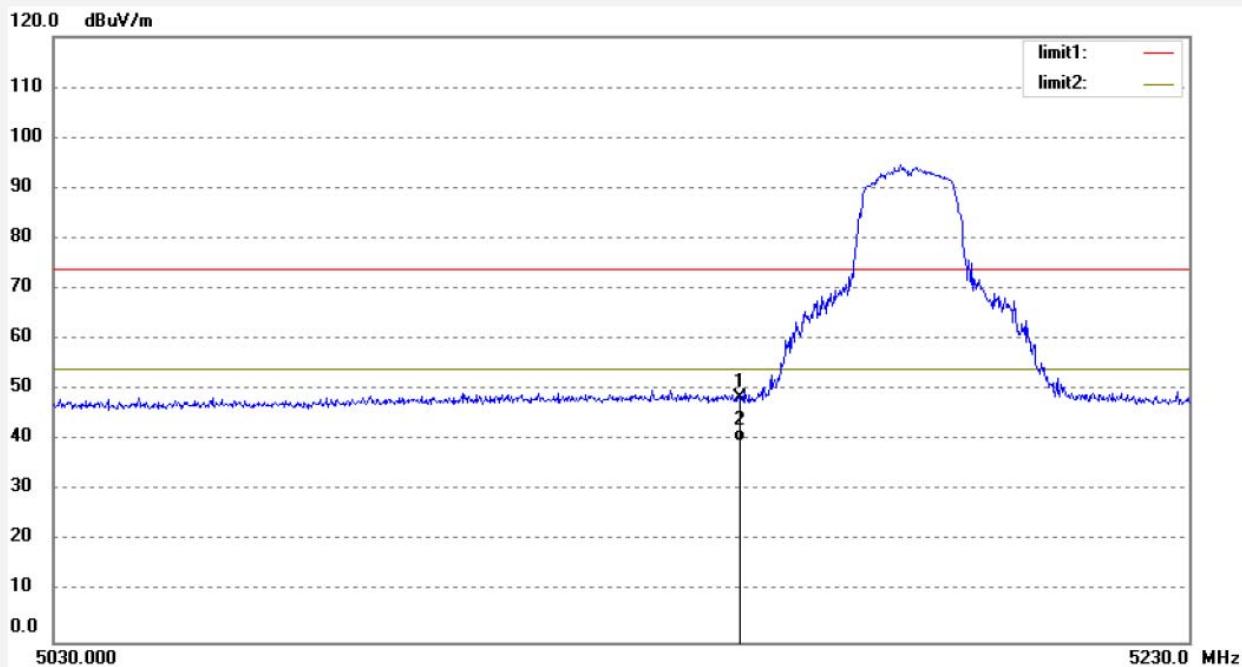

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5150.000	41.97	6.39	48.36	74.00	-25.64	peak	150	187	
2	5150.000	33.48	6.39	39.87	54.00	-14.13	AVG	150	118	



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: star2018 #2079

Polarization: Horizontal

Standard: FCC PK

Power Source: DC 12V

Test item: Radiation Test

Date: 2018/06/22

Temp.(C)/Hum.(%) 23 C / 48 %

Time: 18:25:47

EUT: UP-Android 7 module

Engineer Signature: star


Mode: TX 5240MHz(802.11a)

Distance: 3m

Model: UPA000AN

Manufacturer: CTOUCH Europe B.V.

Note: Report No.:ATE20180786

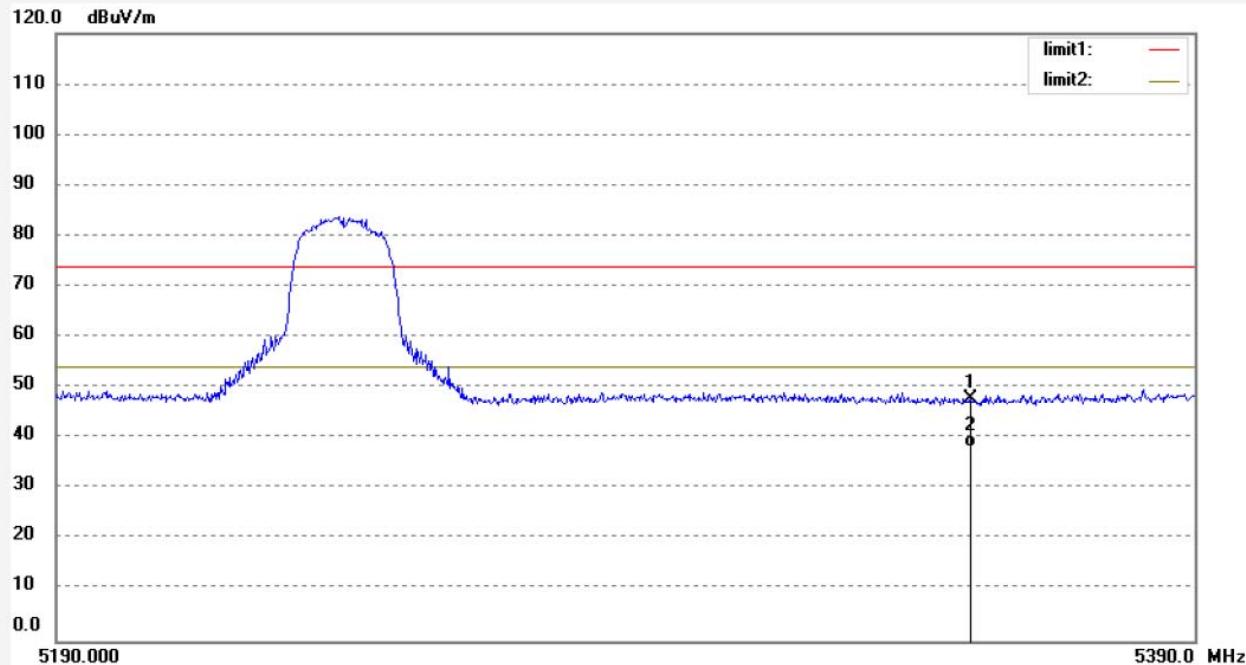


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5350.000	40.96	6.86	47.82	74.00	-26.18	peak	150	328	
2	5350.000	31.28	6.86	38.14	54.00	-15.86	AVG	150	330	

Job No.: star2018 #2080
 Standard: FCC PK
 Test item: Radiation Test
 Temp.(C)/Hum.(%) 23 C / 48 %
 EUT: UP-Android 7 module
 Mode: TX 5240MHz(802.11a)
 Model: UPA000AN
 Manufacturer: CTOUCH Europe B.V.

Polarization: Vertical
 Power Source: DC 12V
 Date: 2018/06/22
 Time: 18:26:40
 Engineer Signature: star
 Distance: 3m

Note: Report No.:ATE20180786

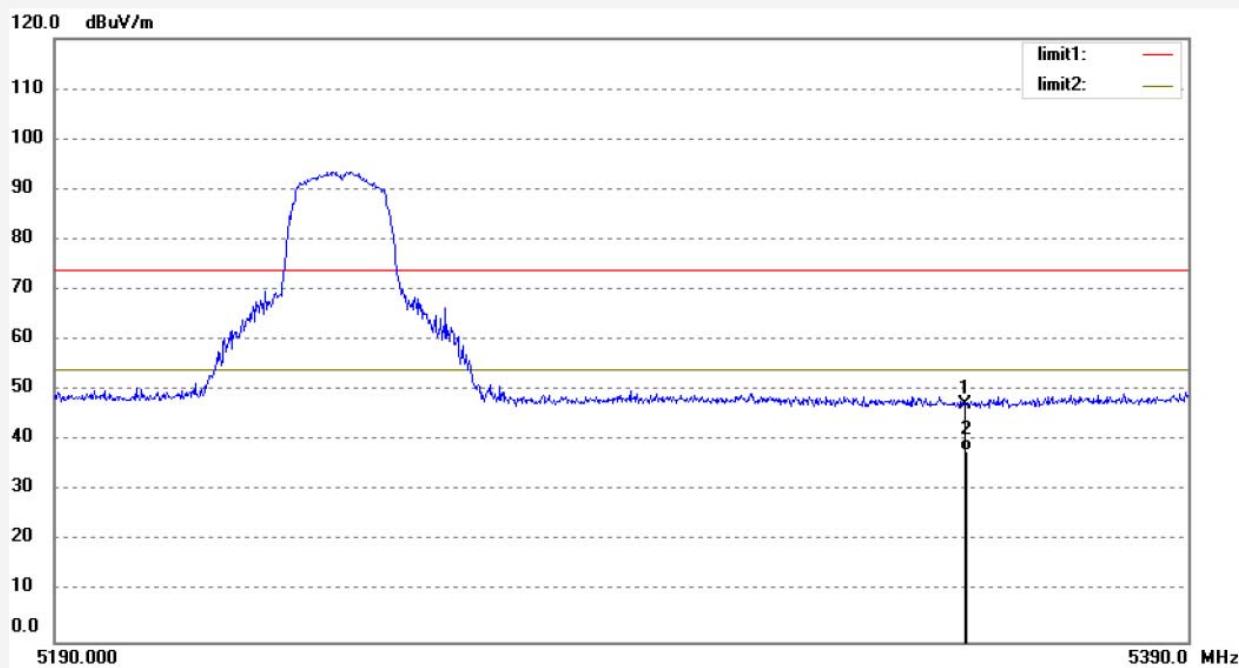


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5350.000	40.53	6.86	47.39	74.00	-26.61	peak	150	127	
2	5350.000	31.00	6.86	37.86	54.00	-16.14	AVG	150	130	

Job No.: star2018 #2090
 Standard: FCC PK
 Test item: Radiation Test
 Temp.(C)/Hum.(%) 23 C / 48 %
 EUT: UP-Android 7 module
 Mode: TX 5745MHz(802.11a)
 Model: UPA000AN
 Manufacturer: CTOUCH Europe B.V.

Polarization: Horizontal
 Power Source: DC 12V
 Date: 2018/06/22
 Time: 18:38:56
 Engineer Signature: star
 Distance: 3m

Note: Report No.:ATE20180786

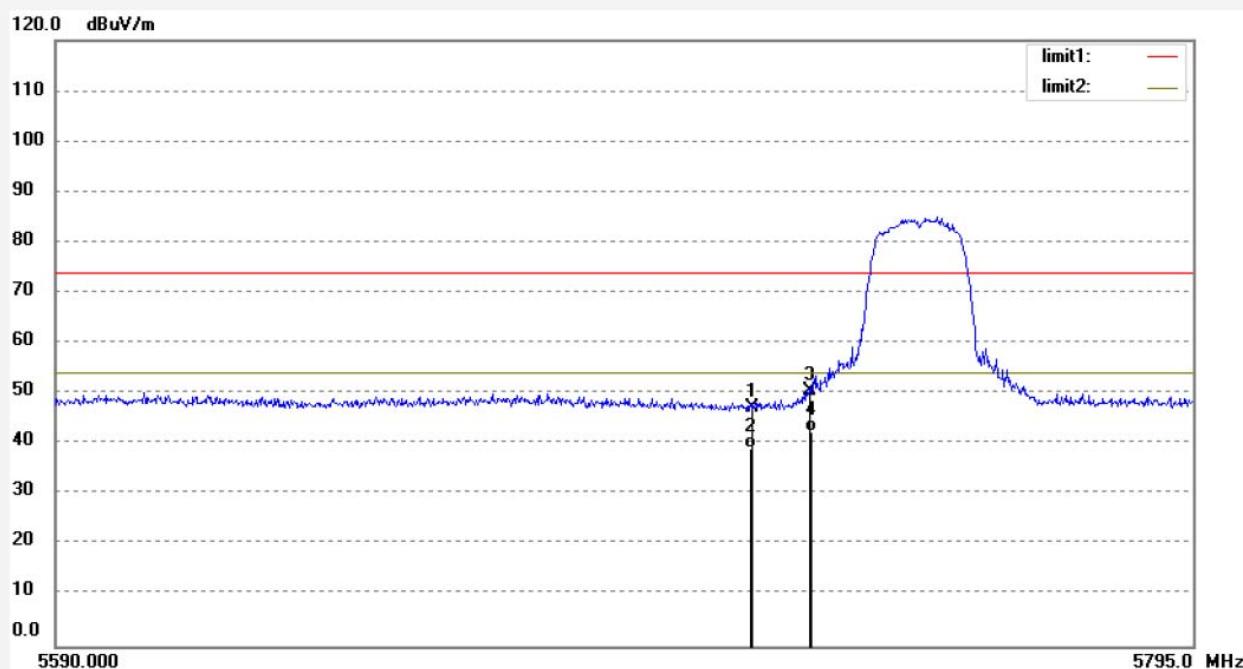

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5715.000	39.64	7.59	47.23	74.00	-26.77	peak	150	329	
2	5715.000	31.57	7.59	39.16	54.00	-14.84	AVG	150	330	
3	5725.000	42.96	7.65	50.61	74.00	-23.39	peak	150	137	
4	5725.000	34.69	7.65	42.34	54.00	-11.66	AVG	150	318	

Job No.: star2018 #2089

Polarization: Vertical

Standard: FCC PK

Power Source: DC 12V

Test item: Radiation Test

Date: 2018/06/22

Temp.(C)/Hum.(%) 23 C / 48 %

Time: 18:38:10

EUT: UP-Android 7 module

Engineer Signature: star


Mode: TX 5745MHz(802.11a)

Distance: 3m

Model: UPA000AN

Manufacturer: CTOUCH Europe B.V.

Note: Report No.:ATE20180786

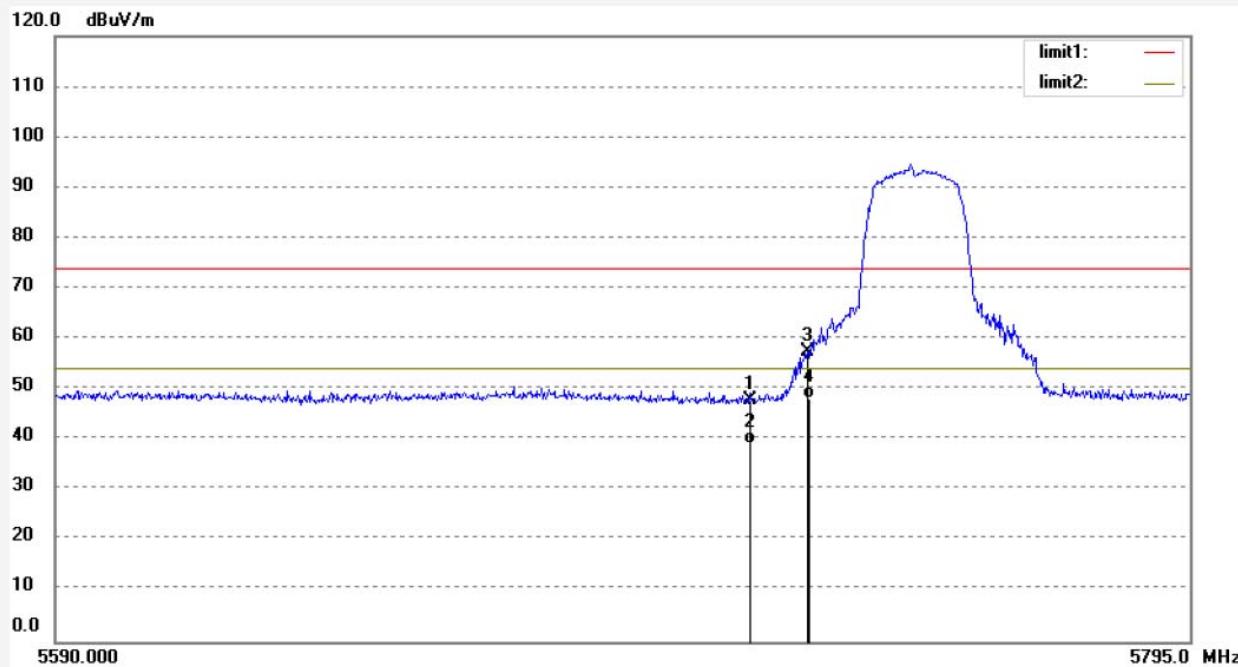

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5715.000	40.27	7.59	47.86	74.00	-26.14	peak	150	112	
2	5715.000	31.57	7.59	39.16	54.00	-14.84	AVG	150	103	
3	5725.000	49.75	7.65	57.40	74.00	-16.60	peak	150	130	
4	5725.000	40.59	7.65	48.24	54.00	-5.76	AVG	150	140	



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: star2018 #2091

Polarization: Horizontal

Standard: FCC PK

Power Source: DC 12V

Test item: Radiation Test

Date: 2018/06/22

Temp.(C)/Hum.(%) 23 C / 48 %

Time: 18:41:26

EUT: UP-Android 7 module

Engineer Signature: star


Mode: TX 5825MHz(802.11a)

Distance: 3m

Model: UPA000AN

Manufacturer: CTOUCH Europe B.V.

Note: Report No.:ATE20180786

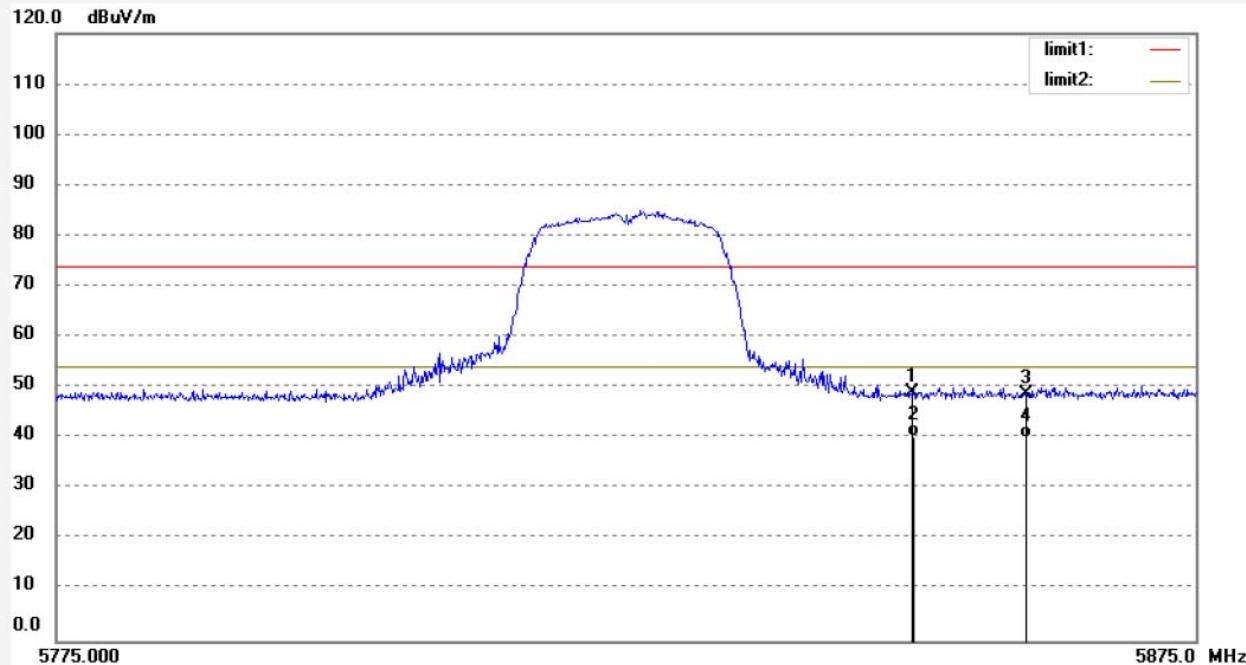

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5850.000	40.86	8.25	49.11	74.00	-24.89	peak	150	318	
2	5850.000	32.00	8.25	40.25	54.00	-13.75	AVG	150	312	
3	5860.000	40.60	8.28	48.88	74.00	-25.12	peak	150	327	
4	5860.000	31.67	8.28	39.95	54.00	-14.05	AVG	150	328	



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: star2018 #2092

Polarization: Vertical

Standard: FCC PK

Power Source: DC 12V

Test item: Radiation Test

Date: 2018/06/22

Temp.(C)/Hum.(%) 23 C / 48 %

Time: 18:42:13

EUT: UP-Android 7 module

Engineer Signature: star


Mode: TX 5825MHz(802.11a)

Distance: 3m

Model: UPA000AN

Manufacturer: CTOUCH Europe B.V.

Note: Report No.:ATE20180786

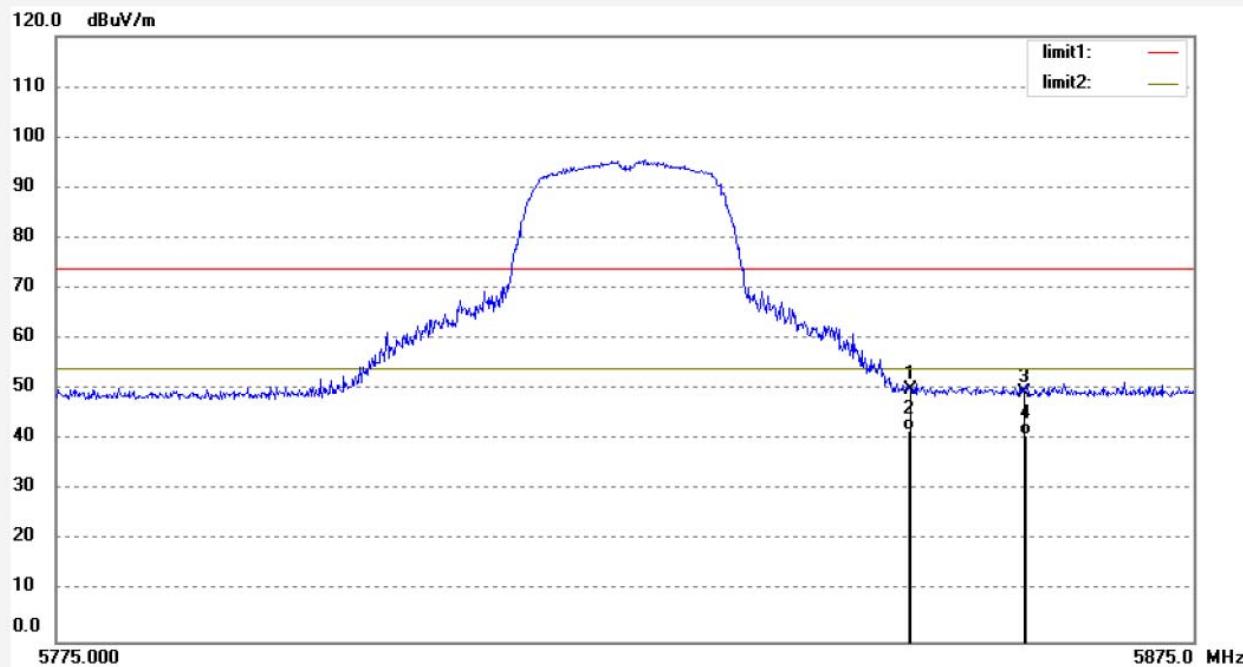

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5850.000	41.57	8.25	49.82	74.00	-24.18	peak	150	38	
2	5850.000	33.70	8.25	41.95	54.00	-12.05	AVG	150	40	
3	5860.000	41.20	8.28	49.48	74.00	-24.52	peak	150	328	
4	5860.000	32.64	8.28	40.92	54.00	-13.08	AVG	150	330	

Test mode: 802.11n20 TX Frequency: 5180MHz, 5240MHz, 5745MHz, 5825MHz

The EUT is tested Radiated Band Edge at each test mode in three axes. Besides, We have tested the single antenna transmit mode and the dual antenna emission mode. The worst emissions are reflected in the following plots



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: star2018 #2094	Polarization: Horizontal
Standard: FCC PK	Power Source: DC 12V
Test item: Radiation Test	Date: 2018/06/22
Temp.(C)/Hum.(%) 23 C / 48 %	Time: 18:45:14
EUT: UP-Android 7 module	Engineer Signature: star
Mode: TX 5180MHz(802.11n)	Distance: 3m
Model: UPA000AN	
Manufacturer: CTOUCH Europe B.V.	
Note: Report No.:ATE20180786	

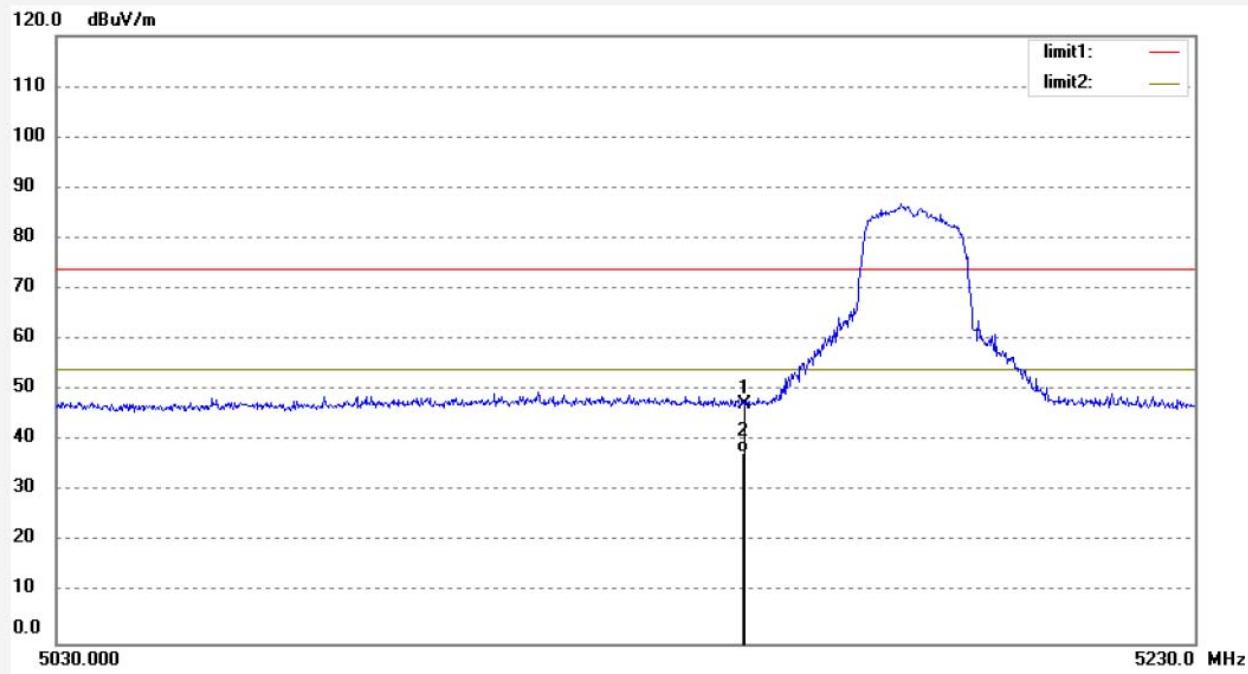


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5150.000	40.84	6.39	47.23	74.00	-26.77	peak	150	318	
2	5150.000	31.27	6.39	37.66	54.00	-16.34	AVG	150	320	

Job No.: star2018 #2093
 Standard: FCC PK
 Test item: Radiation Test
 Temp.(C)/Hum.(%) 23 C / 48 %
 EUT: UP-Android 7 module
 Mode: TX 5180MHz(802.11n)
 Model: UPA000AN
 Manufacturer: CTOUCH Europe B.V.

Polarization: Vertical
 Power Source: DC 12V
 Date: 2018/06/22
 Time: 18:44:29
 Engineer Signature: star
 Distance: 3m

Note: Report No.:ATE20180786

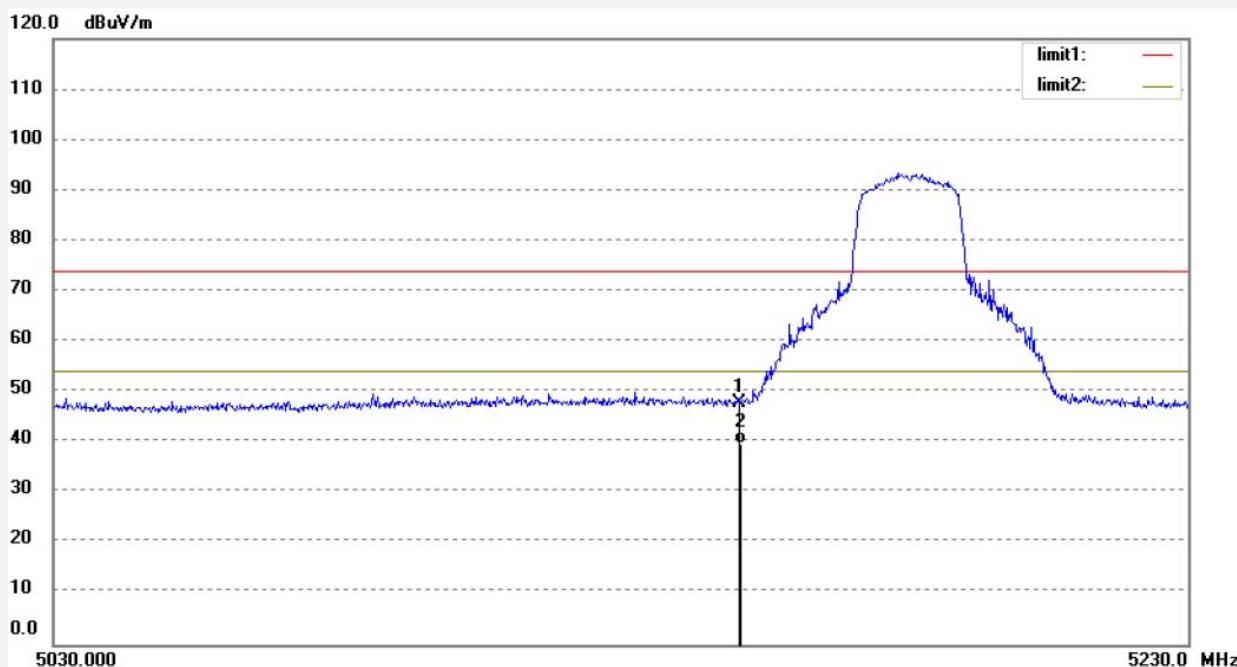

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5150.000	41.52	6.39	47.91	74.00	-26.09	peak	150	329	
2	5150.000	33.27	6.39	39.66	54.00	-14.34	AVG	150	330	

Job No.: star2018 #2095

Polarization: Horizontal

Standard: FCC PK

Power Source: DC 12V

Test item: Radiation Test

Date: 2018/06/22

Temp.(C)/Hum.(%) 23 C / 48 %

Time: 18:46:44

EUT: UP-Android 7 module

Engineer Signature: star

Mode: TX 5240MHz(802.11n)

Distance: 3m

Model: UPA000AN

Manufacturer: CTOUCH Europe B.V.

Note: Report No.:ATE20180786



No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5350.000	40.20	6.86	47.06	74.00	-26.94	peak	150	313	
2	5350.000	31.42	6.86	38.28	54.00	-15.72	AVG	150	328	

Job No.: star2018 #2096

Polarization: Vertical

Standard: FCC PK

Power Source: DC 12V

Test item: Radiation Test

Date: 2018/06/22

Temp.(C)/Hum.(%) 23 C / 48 %

Time: 18:47:37

EUT: UP-Android 7 module

Engineer Signature: star


Mode: TX 5240MHz(802.11n)

Distance: 3m

Model: UPA000AN

Manufacturer: CTOUCH Europe B.V.

Note: Report No.:ATE20180786

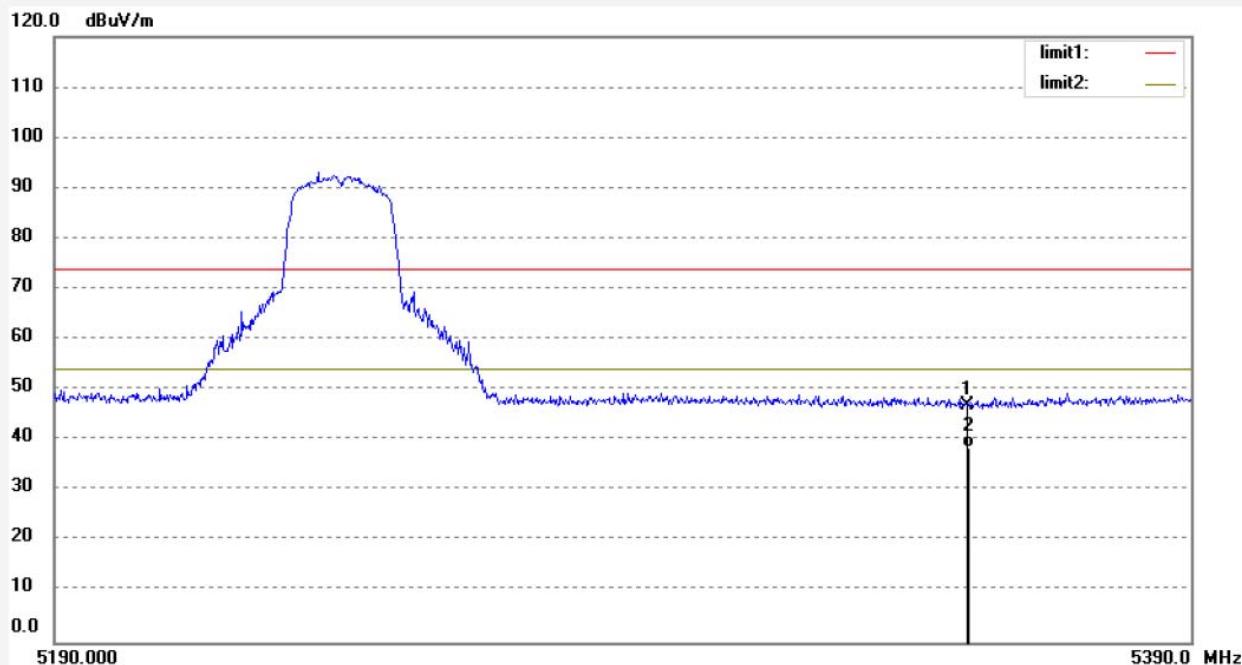

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5350.000	40.13	6.86	46.99	74.00	-27.01	peak	150	323	
2	5350.000	31.74	6.86	38.60	54.00	-15.40	AVG	150	330	



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: star2018 #2106

Polarization: Horizontal

Standard: FCC PK

Power Source: DC 12V

Test item: Radiation Test

Date: 2018/06/22

Temp.(C)/Hum.(%) 23 C / 48 %

Time: 18:59:41

EUT: UP-Android 7 module

Engineer Signature: star


Mode: TX 5745MHz(802.11n)

Distance: 3m

Model: UPA000AN

Manufacturer: CTOUCH Europe B.V.

Note: Report No.:ATE20180786

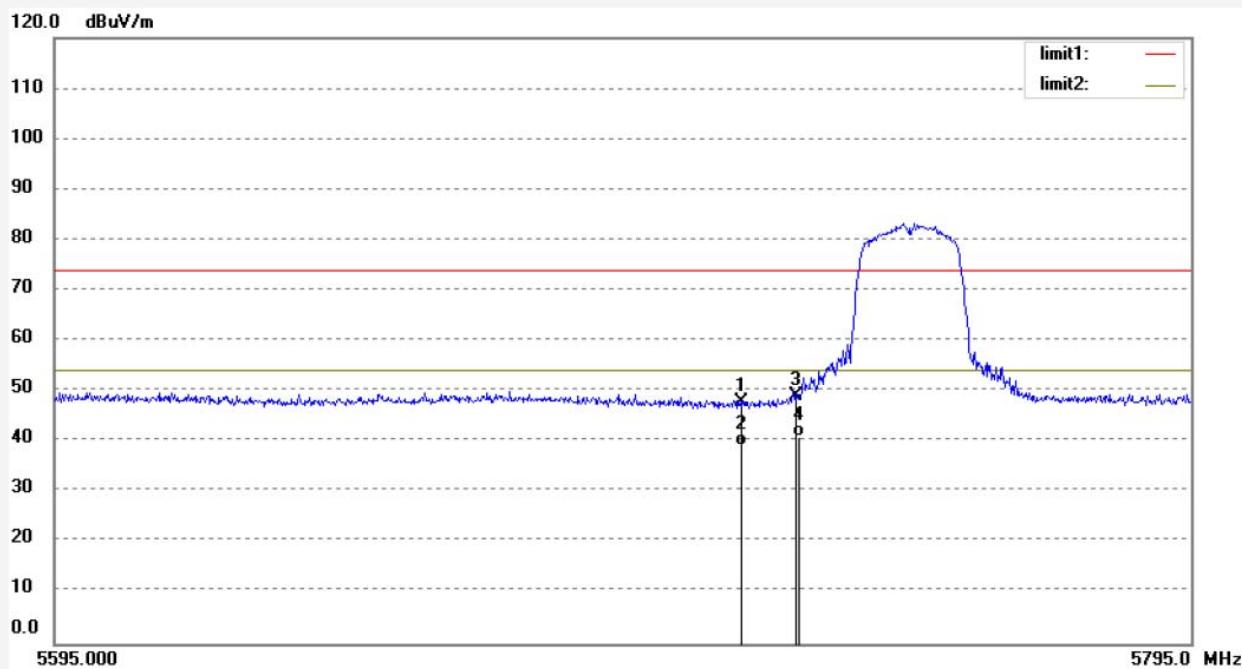

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5715.000	40.25	7.59	47.84	74.00	-26.16	peak	150	327	
2	5715.000	31.55	7.59	39.14	54.00	-14.86	AVG	150	326	
3	5725.000	41.31	7.65	48.96	74.00	-25.04	peak	150	330	
4	5725.000	33.41	7.65	41.06	54.00	-12.94	AVG	150	331	



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: star2018 #2105

Polarization: Vertical

Standard: FCC PK

Power Source: DC 12V

Test item: Radiation Test

Date: 2018/06/22

Temp.(C)/Hum.(%) 23 C / 48 %

Time: 18:58:57

EUT: UP-Android 7 module

Engineer Signature: star


Mode: TX 5745MHz(802.11n)

Distance: 3m

Model: UPA000AN

Manufacturer: CTOUCH Europe B.V.

Note: Report No.:ATE20180786

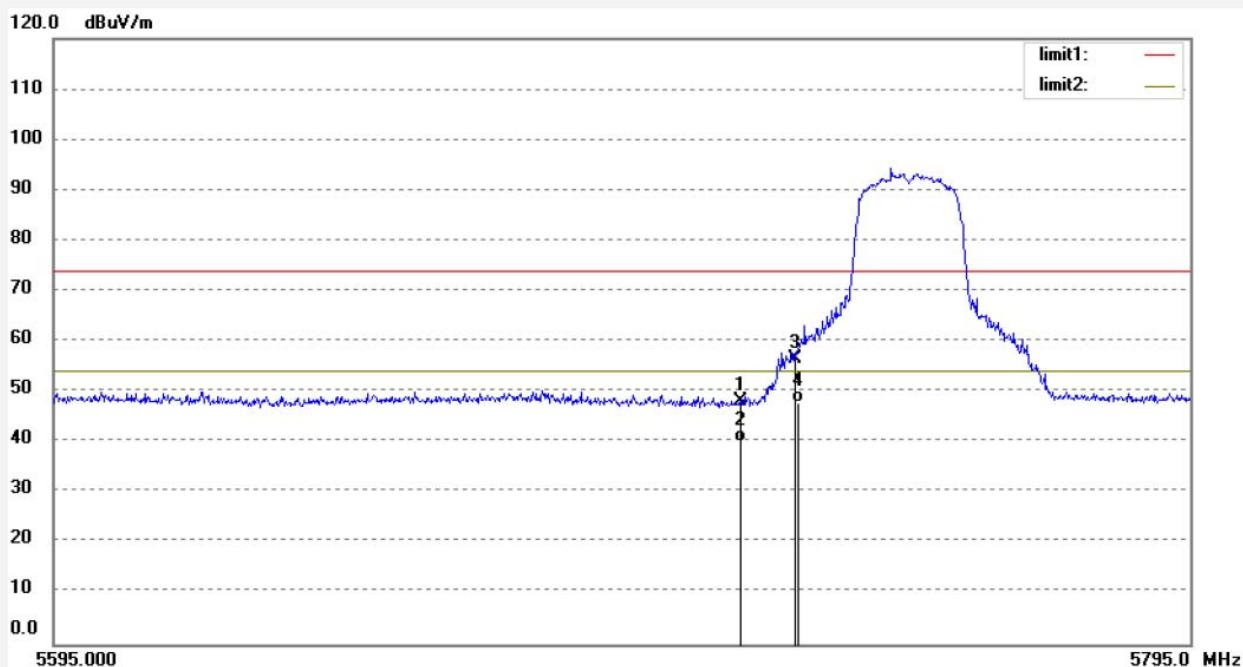

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5715.000	40.67	7.59	48.26	74.00	-25.74	peak	150	278	
2	5715.000	32.41	7.59	40.00	54.00	-14.00	AVG	150	327	
3	5725.000	48.99	7.65	56.64	74.00	-17.36	peak	150	329	
4	5725.000	40.06	7.65	47.71	54.00	-6.29	AVG	150	327	

Job No.: star2018 #2107

Polarization: Horizontal

Standard: FCC PK

Power Source: DC 12V

Test item: Radiation Test

Date: 2018/06/22

Temp.(C)/Hum.(%) 23 C / 48 %

Time: 19:01:24

EUT: UP-Android 7 module

Engineer Signature: star


Mode: TX 5825MHz(802.11n)

Distance: 3m

Model: UPA000AN

Manufacturer: CTOUCH Europe B.V.

Note: Report No.:ATE20180786

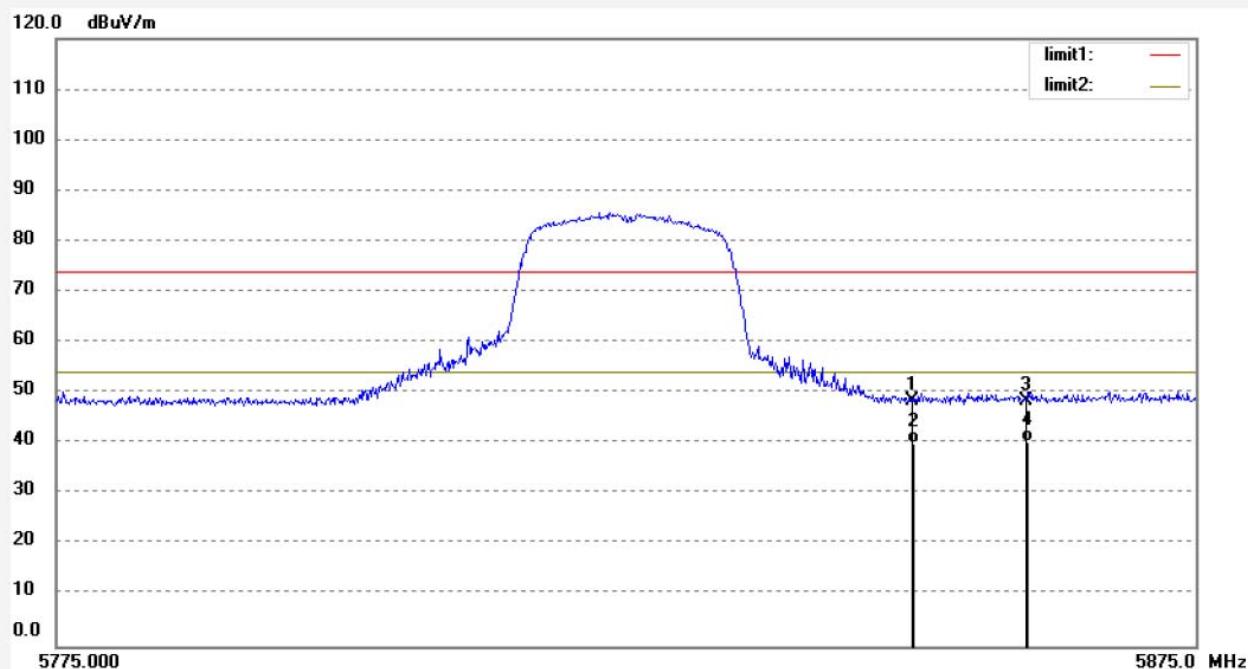


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5850.000	40.34	8.25	48.59	74.00	-25.41	peak	150	328	
2	5850.000	31.84	8.25	40.09	54.00	-13.91	AVG	150	330	
3	5860.000	40.26	8.28	48.54	74.00	-25.46	peak	150	312	
4	5860.000	32.00	8.28	40.28	54.00	-13.72	AVG	150	329	

Job No.: star2018 #2108
 Standard: FCC PK
 Test item: Radiation Test
 Temp.(C)/Hum.(%) 23 C / 48 %
 EUT: UP-Android 7 module
 Mode: TX 5825MHz(802.11n)
 Model: UPA000AN
 Manufacturer: CTOUCH Europe B.V.

Polarization: Vertical
 Power Source: DC 12V
 Date: 2018/06/22
 Time: 19:02:08
 Engineer Signature: star
 Distance: 3m

Note: Report No.:ATE20180786

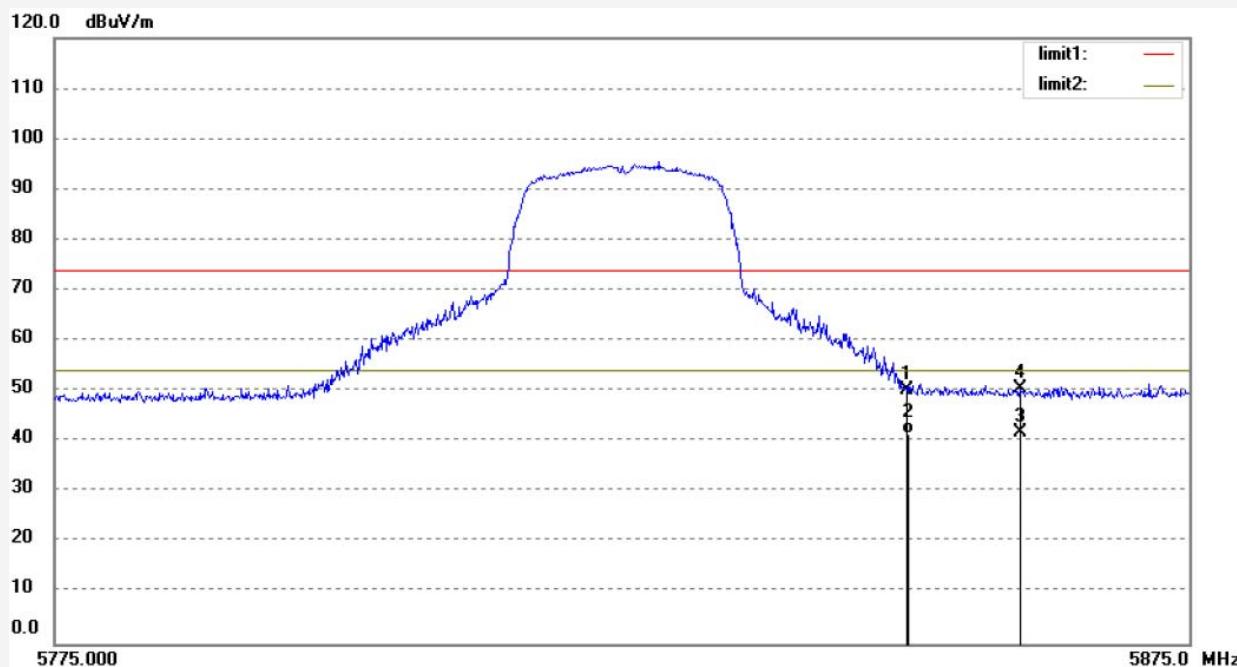

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5850.000	42.09	8.25	50.34	74.00	-23.66	peak	150	321	
2	5850.000	33.41	8.25	41.66	54.00	-12.34	AVG	150	320	
3	5860.000	33.57	8.28	41.85	74.00	-32.15	peak	150	128	
4	5860.000	42.17	8.28	50.45	74.00	-23.55	AVG	150	130	

Test mode: 802.11ac 20MHz TX Frequency: 5180MHz, 5240MHz, 5745MHz, 5825MHz

The EUT is tested Radiated Band Edge at each test mode in three axes. Besides, We have tested the single antenna transmit mode and the dual antenna emission mode. The worst emissions are reflected in the following plots




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: star2018 #2110	Polarization: Horizontal
Standard: FCC PK	Power Source: DC 12V
Test item: Radiation Test	Date: 2018/06/22
Temp.(C)/Hum.(%) 23 C / 48 %	Time: 19:04:57
EUT: UP-Android 7 module	Engineer Signature: star
Mode: TX 5180MHz(802.11ac)	Distance: 3m
Model: UPA000AN	
Manufacturer: CTOUCH Europe B.V.	
Note: Report No.:ATE20180786	

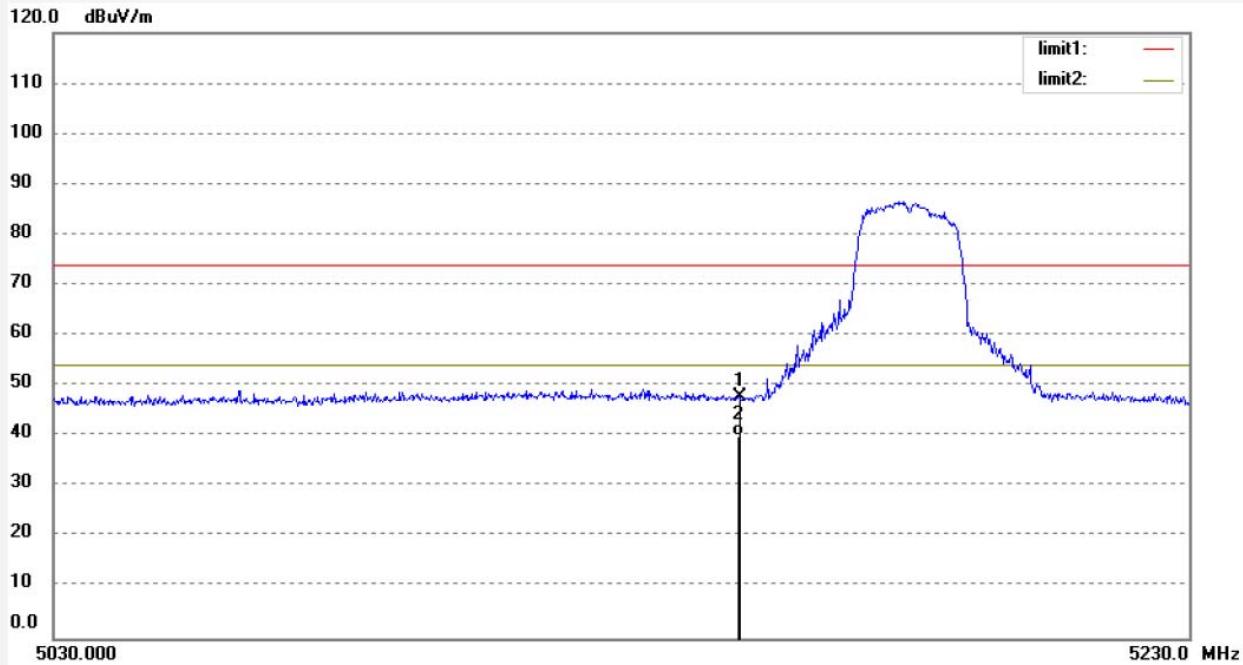

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5150.000	41.35	6.39	47.74	74.00	-26.26	peak	150	328	
2	5150.000	33.73	6.39	40.12	54.00	-13.88	AVG	150	330	



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: star2018 #2109

Polarization: Vertical

Standard: FCC PK

Power Source: DC 12V

Test item: Radiation Test

Date: 2018/06/22

Temp.(C)/Hum.(%) 23 C / 48 %

Time: 19:04:06

EUT: UP-Android 7 module

Engineer Signature: star


Mode: TX 5180MHz(802.11ac)

Distance: 3m

Model: UPA000AN

Manufacturer: CTOUCH Europe B.V.

Note: Report No.:ATE20180786

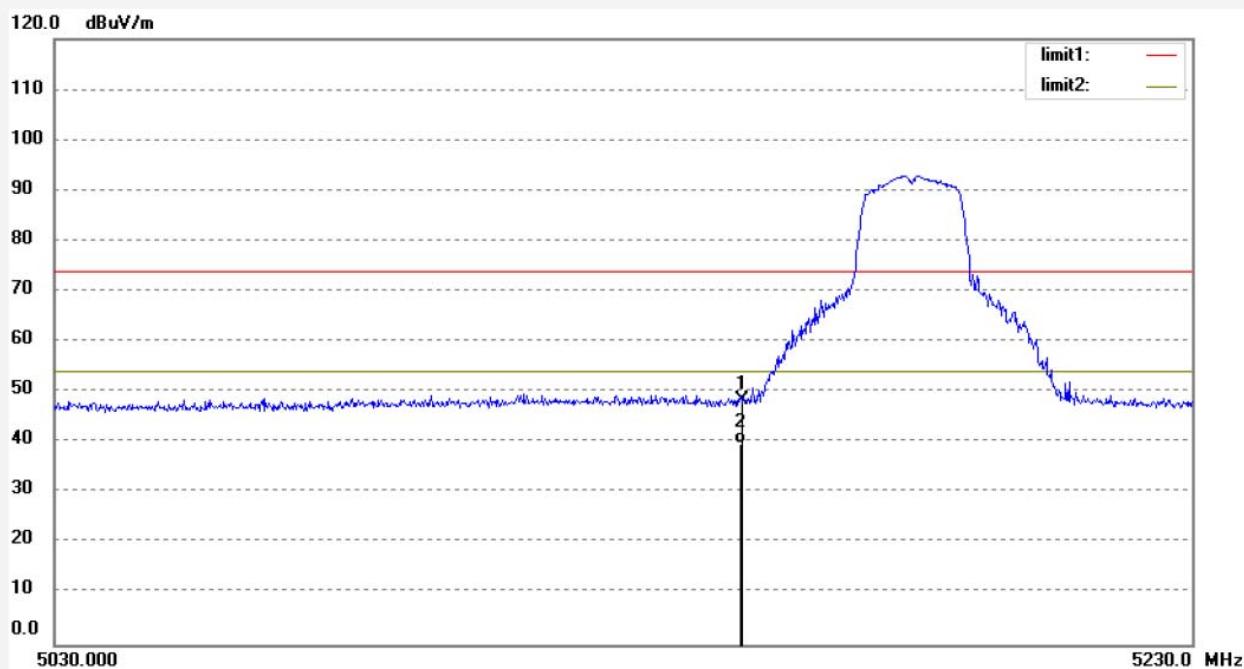

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5150.000	42.05	6.39	48.44	74.00	-25.56	peak	150	184	
2	5150.000	33.43	6.39	39.82	54.00	-14.18	AVG	150	187	

Job No.: star2018 #2111

Polarization: Horizontal

Standard: FCC PK

Power Source: DC 12V

Test item: Radiation Test

Date: 2018/06/22

Temp.(C)/Hum.(%) 23 C / 48 %

Time: 19:06:33

EUT: UP-Android 7 module

Engineer Signature: star

Mode: TX 5240MHz(802.11ac)

Distance: 3m

Model: UPA000AN

Manufacturer: CTOUCH Europe B.V.

Note: Report No.:ATE20180786



No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5350.000	40.26	6.86	47.12	74.00	-26.88	peak	150	329	
2	5350.000	31.46	6.86	38.32	54.00	-15.68	AVG	150	330	



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: star2018 #2112
Standard: FCC PK
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: UP-Android 7 module
Mode: TX 5240MHz(802.11ac)
Model: UPA000AN
Manufacturer: CTOUCH Europe B.V.

Polarization: Vertical
Power Source: DC 12V
Date: 2018/06/22
Time: 19:07:08
Engineer Signature: star
Distance: 3m

Note: Report No.:ATE20180786

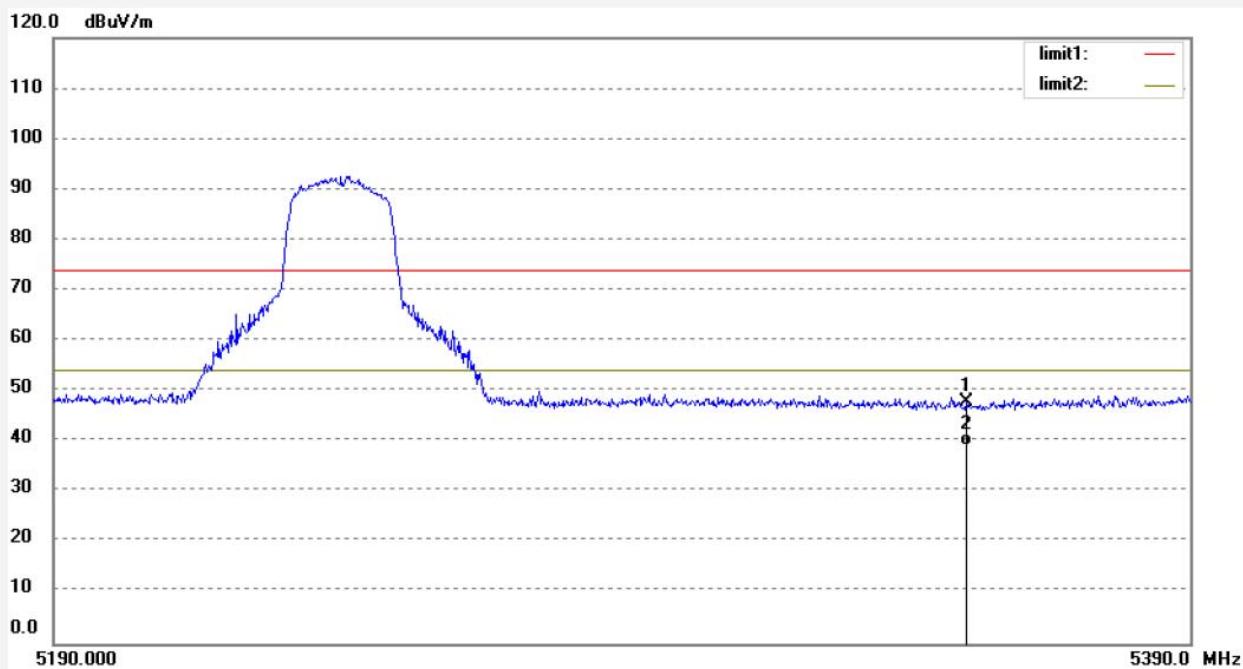

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5350.000	40.97	6.86	47.83	74.00	-26.17	peak	150	328	
2	5350.000	32.41	6.86	39.27	54.00	-14.73	AVG	150	330	

Job No.: star2018 #2122

Polarization: Horizontal

Standard: FCC PK

Power Source: DC 12V

Test item: Radiation Test

Date: 2018/06/22

Temp.(C)/Hum.(%) 23 C / 48 %

Time: 19:19:45

EUT: UP-Android 7 module

Engineer Signature: star


Mode: TX 5745MHz(802.11ac)

Distance: 3m

Model: UPA000AN

Manufacturer: CTOUCH Europe B.V.

Note: Report No.:ATE20180786

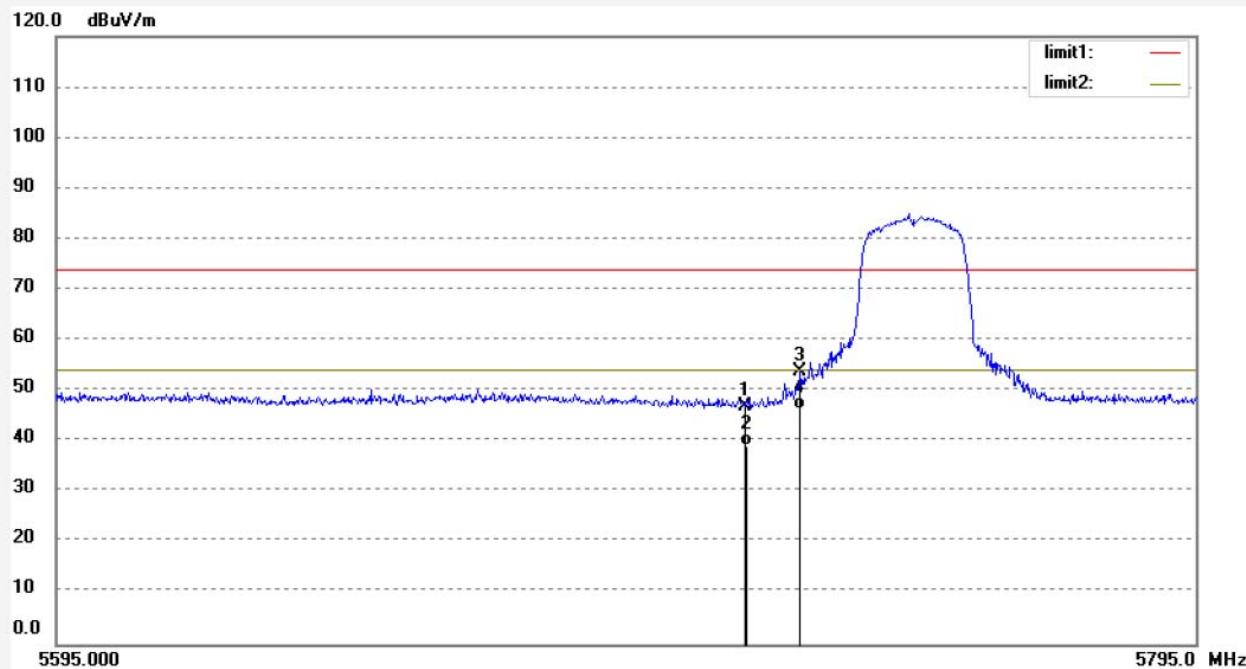

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5715.000	39.36	7.59	46.95	74.00	-27.05	peak	150	38	
2	5715.000	31.47	7.59	39.06	54.00	-14.94	AVG	150	30	
3	5725.000	46.10	7.65	53.75	74.00	-20.25	peak	150	328	
4	5725.000	38.62	7.65	46.27	54.00	-7.73	AVG	150	330	

Job No.: star2018 #2121

Polarization: Vertical

Standard: FCC PK

Power Source: DC 12V

Test item: Radiation Test

Date: 2018/06/22

Temp.(C)/Hum.(%) 23 C / 48 %

Time: 19:18:53

EUT: UP-Android 7 module

Engineer Signature: star


Mode: TX 5745MHz(802.11ac)

Distance: 3m

Model: UPA000AN

Manufacturer: CTOUCH Europe B.V.

Note: Report No.:ATE20180786

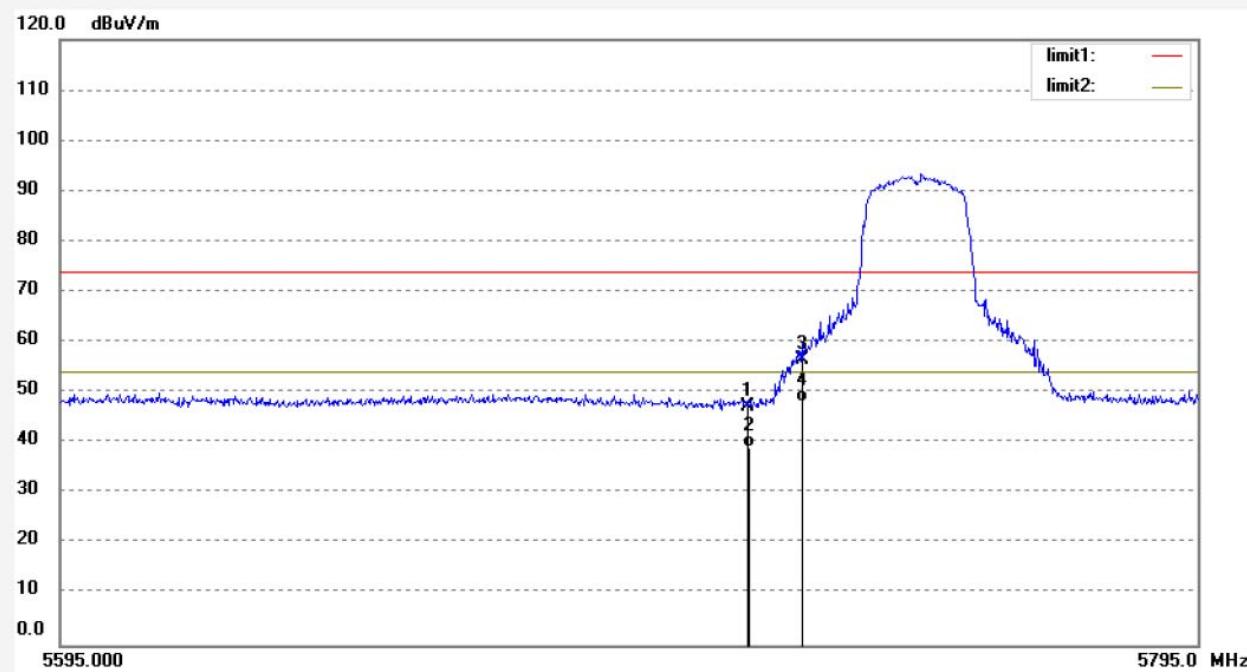

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5715.000	39.61	7.59	47.20	74.00	-26.80	peak	150	218	
2	5715.000	31.47	7.59	39.06	54.00	-14.94	AVG	150	220	
3	5725.000	48.80	7.65	56.45	74.00	-17.55	peak	150	327	
4	5725.000	40.56	7.65	48.21	54.00	-5.79	AVG	150	330	



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: star2018 #2123

Polarization: Horizontal

Standard: FCC PK

Power Source: DC 12V

Test item: Radiation Test

Date: 2018/06/22

Temp.(C)/Hum.(%) 23 C / 48 %

Time: 19:21:18

EUT: UP-Android 7 module

Engineer Signature: star


Mode: TX 5825MHz(802.11ac)

Distance: 3m

Model: UPA000AN

Manufacturer: CTOUCH Europe B.V.

Note: Report No.:ATE20180786

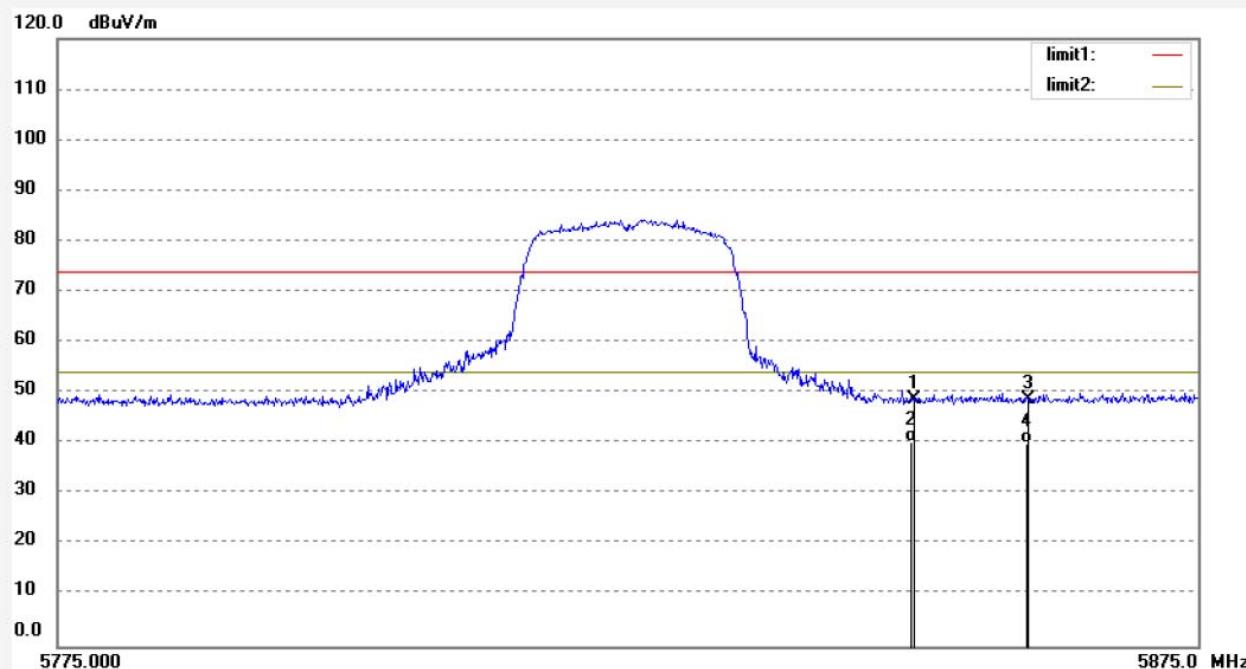

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5850.000	40.38	8.25	48.63	74.00	-25.37	peak	150	189	
2	5850.000	32.07	8.25	40.32	54.00	-13.68	AVG	150	190	
3	5860.000	40.40	8.28	48.68	74.00	-25.32	peak	150	329	
4	5860.000	31.65	8.28	39.93	54.00	-14.07	AVG	150	330	



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: star2018 #2124

Polarization: Vertical

Standard: FCC PK

Power Source: DC 12V

Test item: Radiation Test

Date: 2018/06/22

Temp.(C)/Hum.(%) 23 C / 48 %

Time: 19:22:01

EUT: UP-Android 7 module

Engineer Signature: star


Mode: TX 5825MHz(802.11ac)

Distance: 3m

Model: UPA000AN

Manufacturer: CTOUCH Europe B.V.

Note: Report No.:ATE20180786

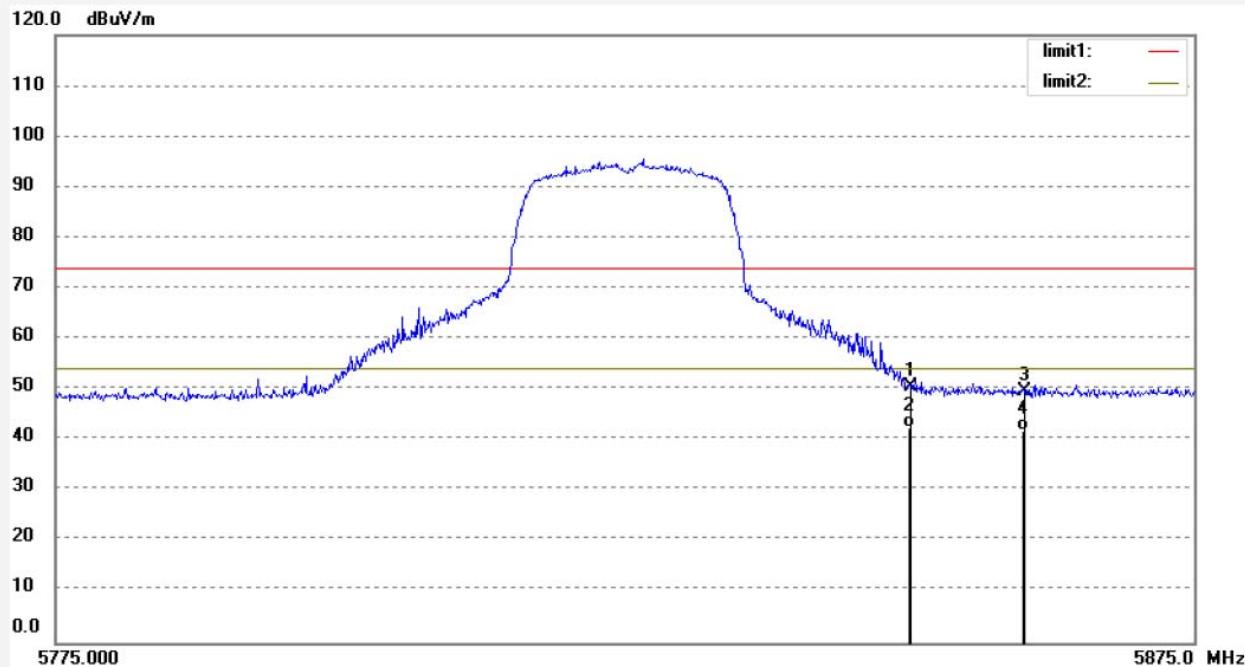

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5850.000	42.21	8.25	50.46	74.00	-23.54	peak	150	322	
2	5850.000	34.07	8.25	42.32	54.00	-11.68	AVG	150	320	
3	5860.000	41.23	8.28	49.51	74.00	-24.49	peak	150	310	
4	5860.000	33.69	8.28	41.97	54.00	-12.03	AVG	150	311	

Test mode: 802.11N 40MHz TX Frequency: 5190MHz, 5230MHz, 5755MHz, 5795MHz

The EUT is tested Radiated Band Edge at each test mode in three axes. Besides, We have tested the single antenna transmit mode and the dual antenna emission mode. The worst emissions are reflected in the following plots



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: star2018 #2126	Polarization: Horizontal
Standard: FCC PK	Power Source: DC 12V
Test item: Radiation Test	Date: 2018/06/22
Temp.(C)/Hum.(%) 23 C / 48 %	Time: 19:25:20
EUT: UP-Android 7 module	Engineer Signature: star
Mode: TX 5190MHz(802.11n)40MHz	Distance: 3m
Model: UPA000AN	
Manufacturer: CTOUCH Europe B.V.	
Note: Report No.:ATE20180786	

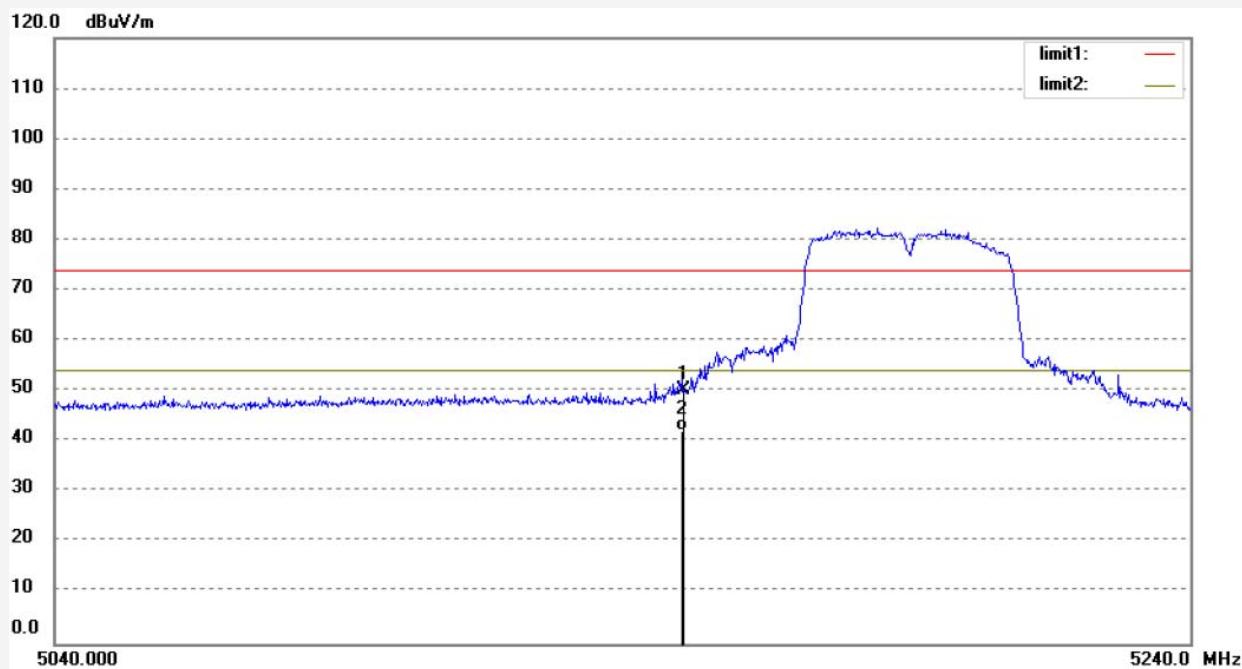

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5150.000	43.93	6.39	50.32	74.00	-23.68	peak	150	157	
2	5150.000	35.67	6.39	42.06	54.00	-11.94	AVG	150	160	

Job No.: star2018 #2125

Polarization: Vertical

Standard: FCC PK

Power Source: DC 12V

Test item: Radiation Test

Date: 2018/06/22

Temp.(C)/Hum.(%) 23 C / 48 %

Time: 19:24:30

EUT: UP-Android 7 module

Engineer Signature: star


Mode: TX 5190MHz(802.11n)40MHz

Distance: 3m

Model: UPA000AN

Manufacturer: CTOUCH Europe B.V.

Note: Report No.:ATE20180786

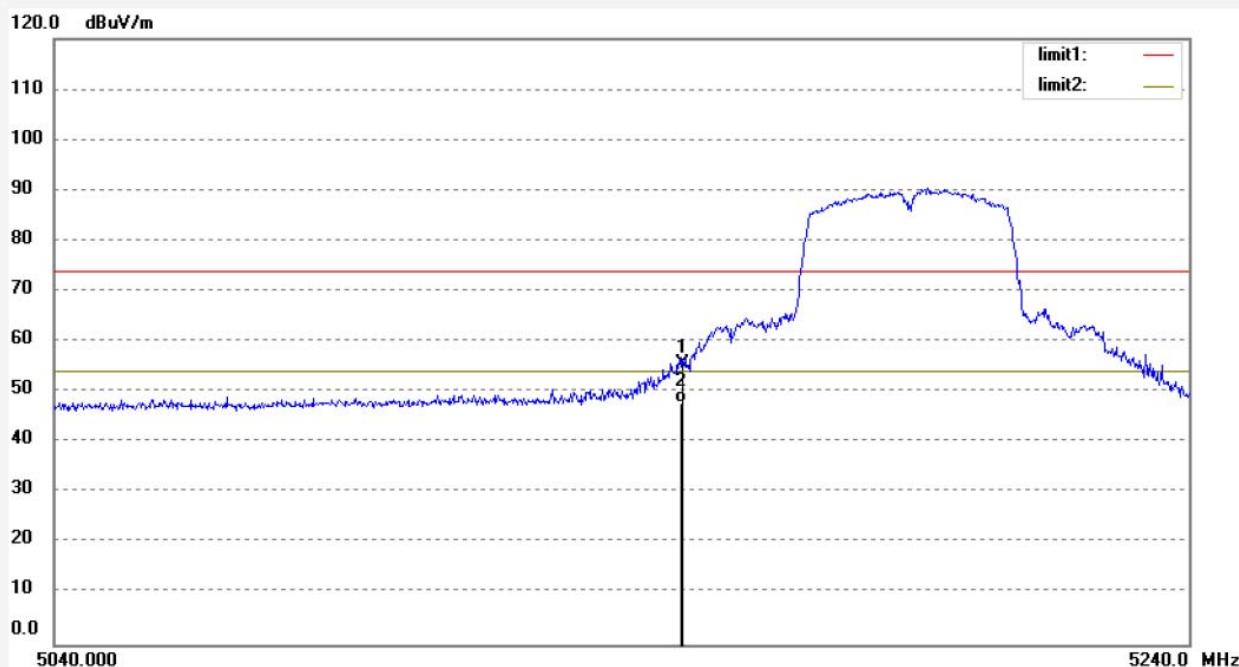

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5150.000	49.29	6.39	55.68	74.00	-18.32	peak	150	328	
2	5150.000	41.55	6.39	47.94	54.00	-6.06	AVG	150	330	



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: star2018 #2127

Polarization: Horizontal

Standard: FCC PK

Power Source: DC 12V

Test item: Radiation Test

Date: 2018/06/22

Temp.(C)/Hum.(%) 23 C / 48 %

Time: 19:26:52

EUT: UP-Android 7 module

Engineer Signature: star


Mode: TX 5230MHz(802.11n)40MHz

Distance: 3m

Model: UPA000AN

Manufacturer: CTOUCH Europe B.V.

Note: Report No.:ATE20180786

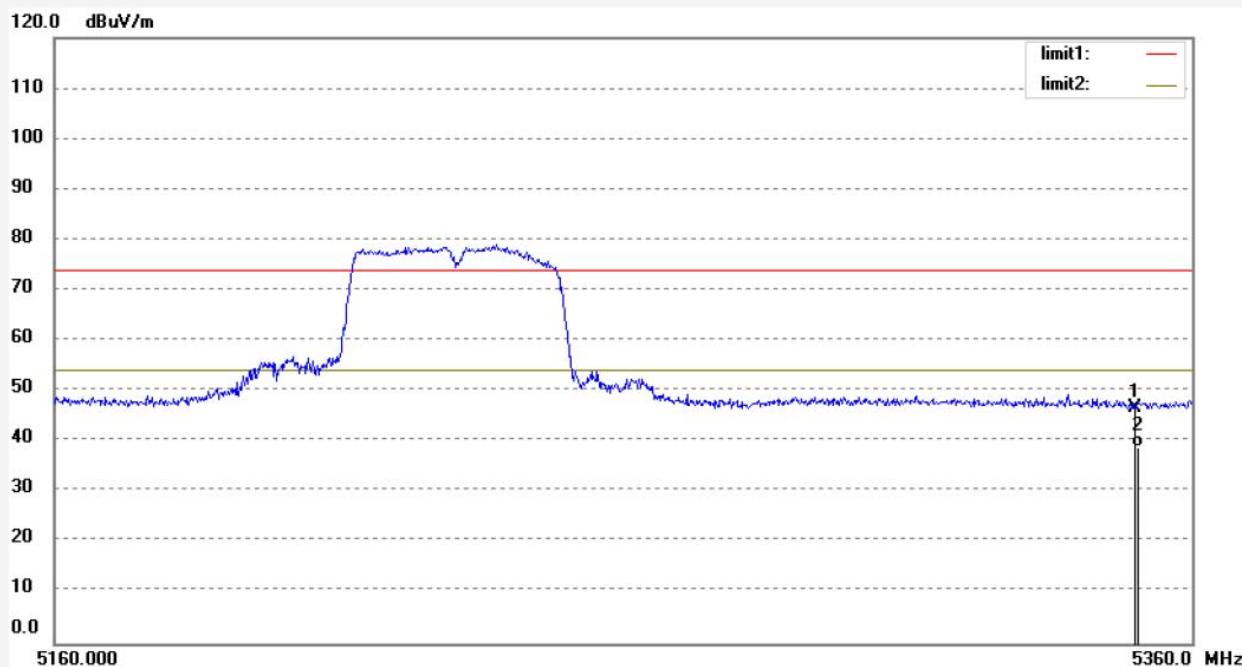

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5350.000	39.91	6.86	46.77	74.00	-27.23	peak	150	329	
2	5350.000	31.87	6.86	38.73	54.00	-15.27	AVG	150	330	