

FCC AND IC CERTIFICATION TEST REPORT

FOR

Applicant	:	Mercku Inc.
Address	:	51 Breithaupt Street, Suite 100 Kitchener, ON Canada, N2H 5G5
Equipment under Test	:	Wi-Fi ROUTER
Model No.	:	M2
Trade Mark	:	MERCKU
FCC ID	:	2APR4-M2
IC	:	23877-M2
Manufacturer	:	Hyku LLC
Address	:	Block B1,Southern Software Park No.1 Software Road, Tangjia Zhuhai, Guangdong, China

Issued By: Dongguan Dongdian Testing Service Co., Ltd.

Add: No. 17, Zongbu Road 2, Songshan Lake Sci&Tech, Industry Park, Dongguan
City, Guangdong Province, China, 523808

Tel: +86-0769-89201699, **E-mail:** ddt@dgddt.com, <http://www.dgddt.com>

REPORT

TABLE OF CONTENTS

	Test report declares.....	4
1.	Summary of test results	6
2.	General test information	7
2.1.	Description of EUT	7
2.2.	Accessories of EUT	7
2.3.	Assistant equipment used for test	8
2.4.	Block diagram of EUT configuration for test.....	8
2.5.	Deviations of test standard	8
2.6.	Test environment conditions.....	8
2.7.	Test laboratory	9
2.8.	Measurement uncertainty	9
3.	Equipment used during test.....	10
4.	6dB Bandwidth and 99% Bandwidth	11
4.1.	Block diagram of test setup	11
4.2.	Limits	11
4.3.	Test Procedure.....	11
4.4.	Test Result	12
4.5.	original test data.....	13
5.	Conducted peak Output Power.....	19
5.1.	Block diagram of test setup	19
5.2.	Limits	19
5.3.	Test Procedure.....	19
5.4.	Test Result	19
6.	Power Spectral Density.....	20
6.1.	Block diagram of test setup	20
6.2.	Limits	20
6.3.	Test Procedure.....	20
6.4.	Test Result	20
6.5.	original test data.....	21
6.6.	Band Edge and Spurious Emissions (Conducted)	28
6.7.	Block diagram of test setup	28
6.8.	Limits	28
6.9.	Test Procedure.....	28
6.10.	Test Result	29
6.11.	original test data.....	29
7.	Radiated Spurious Emissions.....	52

7.1.	Block diagram of test setup	52
7.2.	Limit.....	53
7.3.	Test Procedure.....	54
7.4.	Test result.....	55
8.	Radiated Band Edge Compliance	62
8.1.	Block diagram of test setup	62
8.2.	Limit.....	62
8.3.	Test Procedure.....	62
8.4.	Test result.....	62
9.	Power Line Conducted Emission.....	79
9.1.	Block diagram of test setup	79
9.2.	Power Line Conducted Emission Limits(Class B).....	79
9.3.	Test Procedure.....	79
9.4.	Test Result	80
10.	Antenna Requirements	85
10.1.	Limit.....	85
10.2.	Result	85

TEST REPORT DECLARE

Applicant	:	Mercku Inc.
Address	:	51 Breithaupt Street, Suite 100 Kitchener, ON Canada, N2H 5G5
Equipment under Test	:	Wi-Fi ROUTER
Model No	:	M2
Trade Mark	:	MERCKU
Manufacturer 1	:	Hyku LLC
Address 1	:	Block B1, Southern Software Park No.1 Software Road, Tangjia Zhuhai, Guangdong, China
Manufacturer 2	:	ShenZhen Mcdinet Technology Co., Ltd.
Address 2	:	Room 601, Unit A1, Kexing Science Park, No.15 Keyuan Road, Hi-tech Industrial Park, Nanshan, Shenzhen 518057, PRC
Factory	:	Shenzhen Jing Rui Technology Co., Ltd.
Address	:	Second Floor, Building D, Qiao'an Science and Technology Industrial Park, No.308 Wuhe Avenue, Zhangkeng Path Community, Guanhu Street, Longhua District, Shenzhen

Test Standard Used: FCC Rules and Regulations Part 15 Subpart C, RSS-247 Issue 2 February 2017.

Test procedure used: ANSI C63.10:2013, RSS-Gen Issue 5, Apr. 2018, KDB558074 D01 DTS Meas Guidance V03r02, 662911 D01 Multiple Transmitter Output v02r01.

We Declare:

The equipment described above is tested by Dongguan Dongdian Testing Service Co., Ltd and in the configuration tested the equipment complied with the standards specified above. The test results are contained in this test report and Dongguan Dongdian Testing Service Co., Ltd is assumed of full responsibility for the accuracy and completeness of these tests.

After test and evaluation, our opinion is that the equipment provided for test compliance with the requirement of the above FCC&IC standards.

Report No:	DDT-R18042804-1E1		
Date of Receipt:	May 07, 2018 and Aug. 20, 2019	Date of Test:	May 07, 2018 ~ Jun. 05, 2018 and Aug. 20, 2019 ~ Sep. 11, 2019

Prepared By:

Ella Gong/Engineer**Approved By:****Damon Hu/EMC Manager**

Note: This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Dongguan Dongdian Testing Service Co., Ltd.

Revision history

Rev.	Revisions	Issue Date	Revised By
---	Initial issue	Jun. 05, 2018	
Rev.01	Add a Adapter and Manufacturer	Sep. 11, 2019	Ella Gong

1. Summary of test results

The EUT have been tested according to the applicable standards as referenced below.		
Description of Test Item	Standard	Results
6dB Bandwidth and 99% Bandwidth	FCC 15.247 (a) (2) RSS-247 Clause 5.2 (a)	PASS
Conducted Output Power	FCC 15.247 (b) (3) RSS-247 Clause 5.4 (e)	PASS
Power Spectral Density	FCC 15.247 (e) RSS-247 Clause 5.2 (b)	PASS
Band-edge and Spurious Emissions (Conducted)	FCC 15.247 (d) RSS-247 Clause 5.5	PASS
Radiated Spurious Emissions	FCC 15.247 (d) FCC 15.209 FCC 15.205 RSS-247 Clause 5.5 RSS-GEN Clause 8.9	PASS
Radiated Band Edge Compliance	FCC 15.247 (d) FCC 15.209 FCC 15.205 RSS-247 Clause 5.5 RSS-GEN Clause 8.9	PASS
Power Line Conducted Emission	FCC 15.207 RSS-GEN Clause 8.8	PASS
Antenna requirement	FCC 15.203 RSS-GEN Clause 8.3	PASS
Note: This report added a Adapter and Manufacturer based on the original report: DDT-R18042804-1E1, these changes don't influence the RF performance, so only radiated emission (below 1GHz) and Power Line Conducted Emissions were tested and recorded in this report, and the original test data was retained in this report.		

2. General test information

2.1. Description of EUT

EUT* Name	: Wi-Fi ROUTER
Model Number	: M2
EUT function description	: Please reference user manual of this device
Power supply	: DC 12V from AC Adapter
Radio Technology	: IEEE802.11b/g/n
FCC Operation frequency	: IEEE 802.11b: 2412MHz—2462MHz IEEE 802.11g: 2412MHz—2462MHz IEEE 802.11n HT20: 2412MHz—2462MHz IEEE 802.11n HT40:2422MHz—2452MHz
Modulation	: IEEE 802.11b: DSSS (CCK, DQPSK, DBPSK) IEEE 802.11g: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n HT20, HT40: OFDM (64QAM, 16QAM, QPSK,BPSK)
Transmitter rate	: IEEE 802.11b: 1, 2, 5.5, 11 Mbps IEEE 802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps IEEE 802.11n HT20: up to 150 Mbps, HT40: up to 300Mbps
Antenna Type	: Integrated antenna 1: 5G band maximum PK gain -1dBi Integrated antenna 2: 5G band maximum PK gain -1dBi The EUT incorporates a MIMO function. Physically, it provides two completed transmitters and receivers(2T2R), two transmit signals are completely uncorrelated, then, Direction gain=GANT
Sample Type	: Series production

Note: EUT is the ab. of equipment under test.

Channel information							
CH	Frequency	CH	Frequency	CH	Frequency	CH	Frequency
1	2412	5	2432	9	2452	/	/
2	2417	6	2437	10	2457	/	/
3	2422	7	2442	11	2462	/	/
4	2427	8	2447	/	/	/	/

2.2. Accessories of EUT

Description of Accessories	Manufacturer	Model number	Serial No.	Other
Power adapter	MERCKU	EP30-120150WXCA	N/A	Input: 110-240V~50/60Hz 0.5A Max Output: 12V/1.5A
AC/DC ADAPTER	Shenzhen Keyu Power Supply Technology Co., Ltd.	KA1801A-1201500E U	N/A	Input: 110-240V~50/60Hz 0.55A Max Output: 12V/1.5A
Network Cable	N/A	N/A	N/A	Length: 0.5m

2.3. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number	EMC Compliance	SN
Notebook	DELL	Latitude D610	FCC DOC	00045-534-136-300
Network Cable	N/A	N/A	N/A	Length: 0.5m

2.4. Block diagram of EUT configuration for test



EUT was connected to Notebook which has a standard LAN PORT connector, and the Notebook will run a special test software “MP_ Test. EXE” provided by manufacturer to control EUT work in Continuous Tx mode (>98% duty cycle), and select test channel, wireless mode and data rate.

Tested mode, channel, and data rate information					
Mode	Setting Tx Power (ANT1)	Setting Tx Power (ANT2)	data rate (Mbps) (see Note)	Channel	Frequency (MHz)
IEEE 802.11b	32	/	1	LCH :CH1	2412
	31	/	1	MCH: CH6	2437
	32	/	1	HCH: CH11	2462
IEEE 802.11g	40	/	6	LCH :CH1	2412
	42	/	6	MCH: CH6	2437
	43	/	6	HCH: CH11	2462
IEEE 802.11n HT20	39	40	MCS 8	LCH :CH1	2412
	40	42	MCS 8	MCH: CH6	2437
	35	35	MCS 8	HCH: CH11	2462
IEEE 802.11n HT40	38	39	MCS 8	LCH :CH3	2422
	39	41	MCS 8	MCH: CH6	2437
	35	35	MCS 8	HCH: CH9	2452

Note: According exploratory test, EUT will have maximum output power in those data rate, so those data rate were used for all test.

2.5. Deviations of test standard

No Deviation

2.6. Test environment conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature range:	21-25°C
Humidity range:	40-75%
Pressure range:	86-106kPa

2.7. Test laboratory

Dongguan Dongdian Testing Service Co., Ltd

Add: No. 17, Zongbu Road 2, Songshan Lake Sci&Tech, Industry Park, Dongguan City, Guangdong Province, China, 523808

Tel: +86-0769-89201699, <http://www.dgddt.com>, Email: ddt@dgddt.com

CNAS Accreditation No. L6451; A2LA Accreditation No. 3870.01

Designation Number: CN1182; Test Firm Registration Number: 540522

Industry Canada site registration number: 10288A-1

2.8. Measurement uncertainty


Test Item	Uncertainty
Bandwidth	1.1%
Peak Output Power(Conducted)(Spectrum analyzer)	0.86dB (10 MHz ≤ f < 3.6GHz);
	1.38dB (3.6GHz ≤ f < 8GHz)
Peak Output Power(Conducted)(Power Sensor)	0.74dB
Power Spectral Density	0.74dB (10 MHz ≤ f < 3.6GHz);
	1.38dB (3.6GHz ≤ f < 8GHz)
Frequencies Stability	6.7×10^{-8} (Antenna couple method)
	5.5×10^{-8} (Conducted method)
Conducted spurious emissions	0.86dB (10 MHz ≤ f < 3.6GHz);
	1.40dB (3.6GHz ≤ f < 8GHz)
	1.66dB (8GHz ≤ f < 22GHz)
Uncertainty for radio frequency (RBW<20kHz)	3×10^{-8}
Temperature	0.4℃
Humidity	2%
Uncertainty for Radiation Emission test (30MHz-1GHz)	4.70 dB (Antenna Polarize: V)
	4.84 dB (Antenna Polarize: H)
Uncertainty for Radiation Emission test (1GHz-40GHz)	4.10dB (1-6GHz)
	4.40dB (6GHz-18GHz)
	3.54dB (18GHz-26GHz)
	4.30dB (26GHz-40GHz)
Uncertainty for Power line conduction emission test	3.32dB (150kHz-30MHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

3. Equipment used during test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
RF Connected Test (Tonscend RF Measurement System)					
Spectrum analyzer	R&S	FSU26	200071	Oct. 12, 2018	1 Year
Wideband Radio Communication tester	R&S	CMW500	117491	Jun. 25, 2019	1 Year
Vector Signal Generator	Agilent	E8267D	US49060192	Oct. 12, 2018	1 Year
Vector Signal Generator	Agilent	N5182A	MY48180737	Jun. 25, 2019	1 Year
Power Sensor	Agilent	U2021XA	MY55150010	Jun. 28, 2019	1 Year
Power Sensor	Agilent	U2021XA	MY55150011	Jun. 28, 2019	1 Year
DC Power Source	MATRIS	MPS-3005L-3	D813058W	Aug. 18, 2019	1 Year
Attenuator	Mini-Circuits	BW-S10W2	101109	Aug. 18, 2019	1 Year
RF Cable	Micable	C10-01-01-1	100309	Oct. 21, 2018	1 Year
Temp&Humi Programmable	ZHIXIANG	ZXGDJS-150L	ZX170110-A	Oct. 21, 2018	1 Year
Test Software	JS Tonscend	JS1120-3	Ver.2.7	N/A	N/A
Radiation 1#chamber					
EMI Test Receiver	R&S	ESU8	100316	Oct. 12, 2018	1 Year
Spectrum analyzer	Agilent	E4447A	MY50180031	Jun. 25, 2019	1 Year
Trilog Broadband Antenna	Schwarzbeck	VULB9163	9163-462	Nov. 09, 2018	1 Year
Active Loop antenna	Schwarzbeck	FMZB-1519	1519-038	Oct. 20, 2018	1 Year
Double Ridged Horn Antenna	R&S	HF907	100276	Nov. 16, 2018	1 Year
Broad Band Horn Antenna	Schwarzbeck	BBHA 9170	790	Oct. 25, 2018	1 Year
Pre-amplifier	A.H.	PAM-0118	360	Oct. 12, 2018	1 Year
Pre-amplifier	TERA-MW	TRLA-0040 G35	101303	Oct. 12, 2018	1 Year
RF Cable	HUBSER	CP-X2+ CP-X1	W11.03+ W12.02	Oct. 21, 2018	1 Year
RF Cable	N/A	SMAJ-SMA J-1M+ 11M	17070133+17070131	Nov. 08, 2018	1 Year
MI Cable	HUBSER	C10-01-01-1 M	1091629	Oct. 21, 2018	1 Year
Test software	Audix	E3	V 6.11111b	N/A	N/A
Power Line Conducted Emissions Test					
EMI Test Receiver	R&S	ESU8	100316	Oct. 21, 2018	1 Year
LISN 1	R&S	ENV216	101109	Oct. 21, 2018	1 Year
LISN 2	R&S	ESH2-Z5	100309	Oct. 21, 2018	1 Year
Pulse Limiter	R&S	ESH3-Z2	101242	Oct. 21, 2018	1 Year
CE Cable 1	HUBSER	N/A	W10.01	Oct. 21, 2018	1 Year
Test software	Audix	E3	V 6.11111b	N/A	N/A

4. 6dB Bandwidth and 99% Bandwidth

4.1. Block diagram of test setup

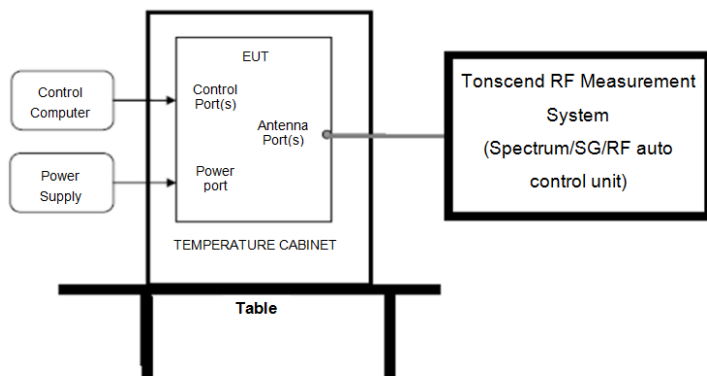

4.2. Limits

For direct sequence systems, the minimum 6dB bandwidth shall be at least 500 kHz

4.3. Test Procedure


- (1) Connect EUT's antenna output to spectrum analyzer by RF cable.
- (2) Set the spectrum analyzer as follows:


RBW:	100kHz
VBW:	300kHz
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold
- (3) Allow the trace to stabilize, measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

4.4. Test Result


Test Mode	Test	Ant	6dB Bandwidth [MHz]	99% Bandwidth [MHz]	Limit	Verdict
11BSISO	2412	Ant1	9.160	14.76	0.5	PASS
11BSISO	2437	Ant1	10.120	14.80	0.5	PASS
11BSISO	2462	Ant1	10.040	14.80	0.5	PASS
11GSISO	2412	Ant1	16.120	16.40	0.5	PASS
11GSISO	2437	Ant1	16.120	16.36	0.5	PASS
11GSISO	2462	Ant1	16.360	16.36	0.5	PASS
11N20MIMO	2412	Ant1	16.160	17.52	0.5	PASS
11N20MIMO	2412	Ant2	15.840	17.48	0.5	PASS
11N20MIMO	2437	Ant1	16.160	17.48	0.5	PASS
11N20MIMO	2437	Ant2	16.600	17.52	0.5	PASS
11N20MIMO	2462	Ant1	16.360	17.52	0.5	PASS
11N20MIMO	2462	Ant2	15.640	17.52	0.5	PASS
11N40MIMO	2422	Ant1	35.360	35.84	0.5	PASS
11N40MIMO	2422	Ant2	35.200	35.76	0.5	PASS
11N40MIMO	2437	Ant1	35.360	35.84	0.5	PASS
11N40MIMO	2437	Ant2	35.360	35.76	0.5	PASS
11N40MIMO	2452	Ant1	35.280	35.84	0.5	PASS
11N40MIMO	2452	Ant2	35.280	35.76	0.5	PASS

4.5. original test data

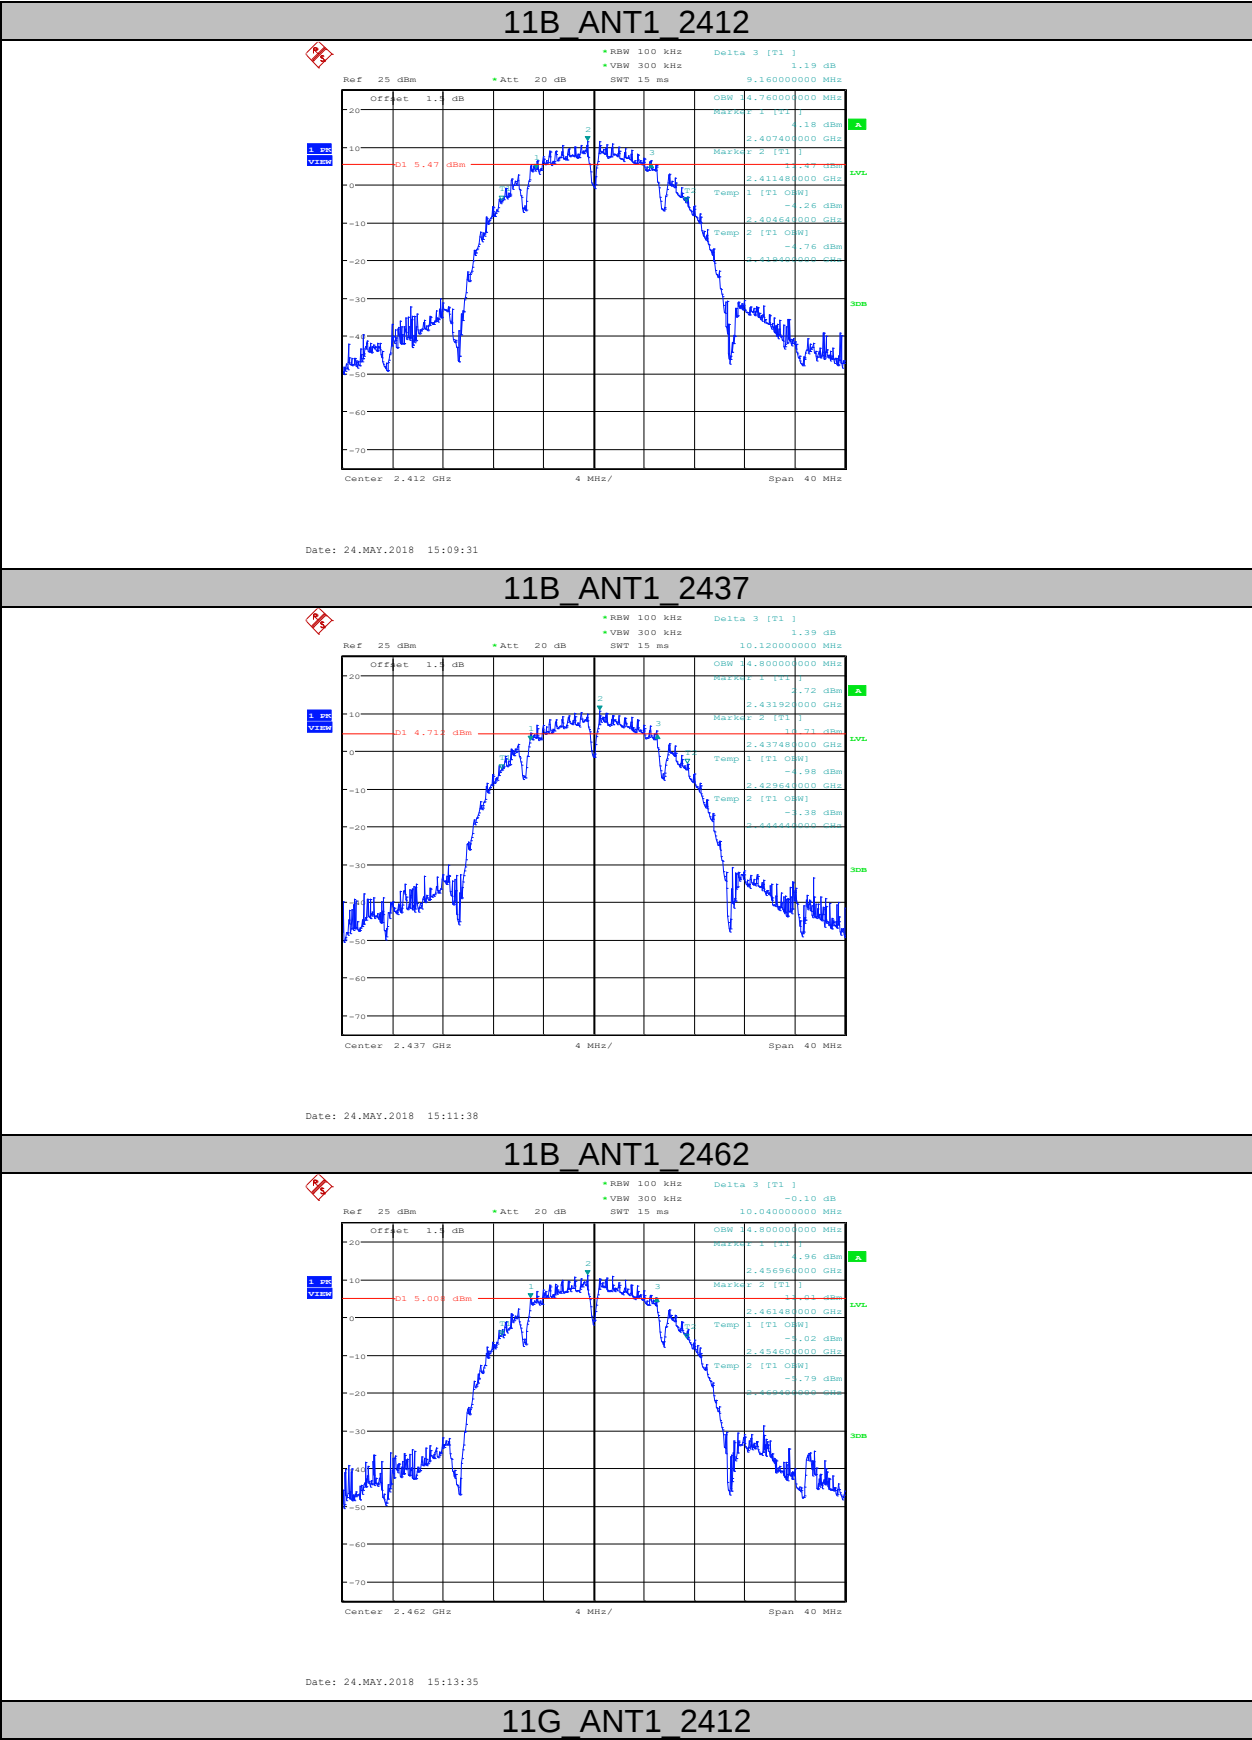


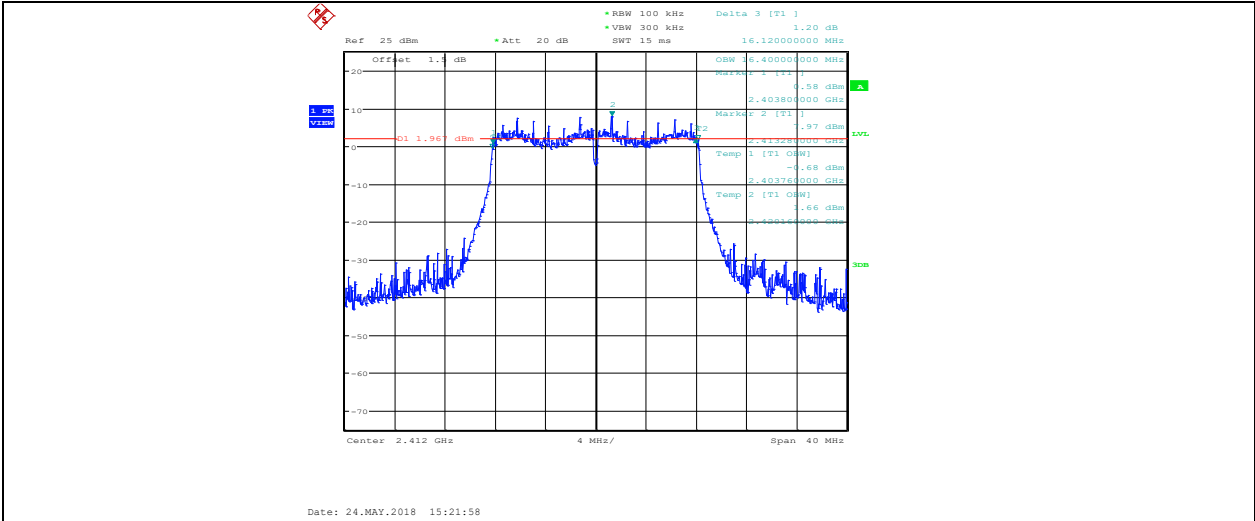

11G ANT1_2437

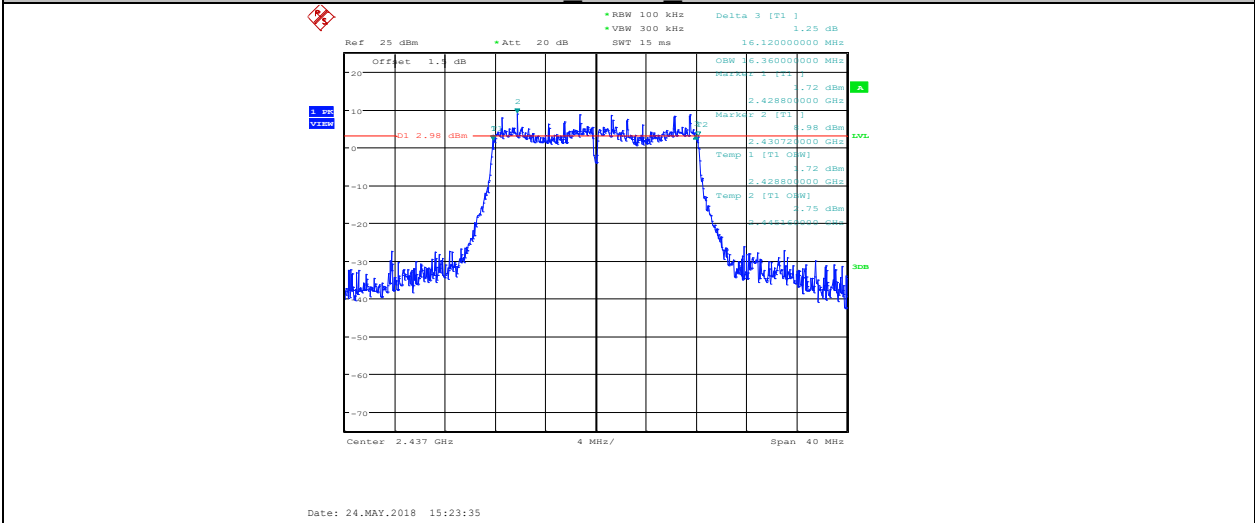

11G ANT1_2462

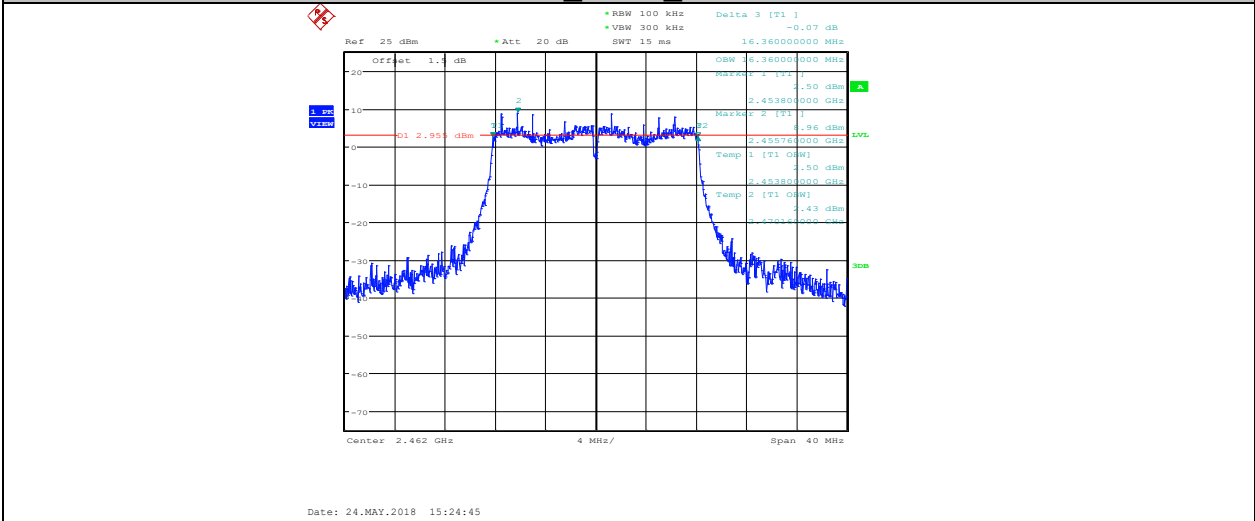


11N20 ANT1_2412



Date: 24.MAY.2018 15:42:25


Date: 24.MAY.2018 15:34:13

Page 15 of 85

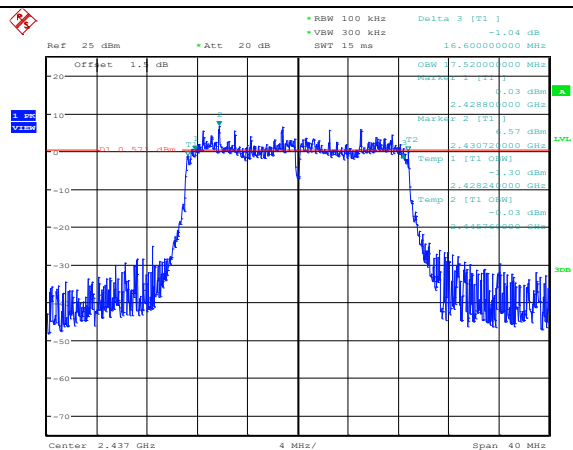


Date: 24.MAY.2018 15:43:51

11N20 ANT1 2462

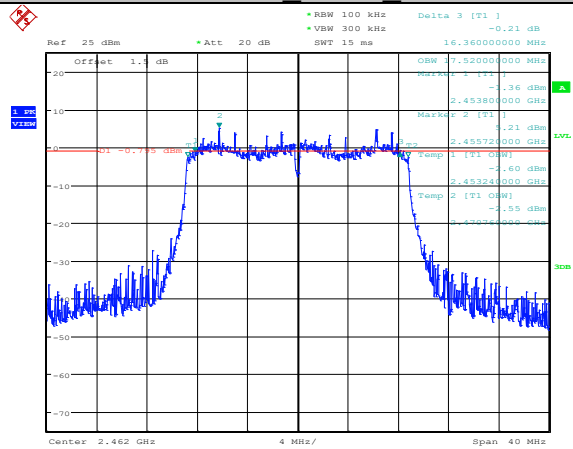


Date: 24.MAY.2018 16:16:08

11N20 ANT2 2462

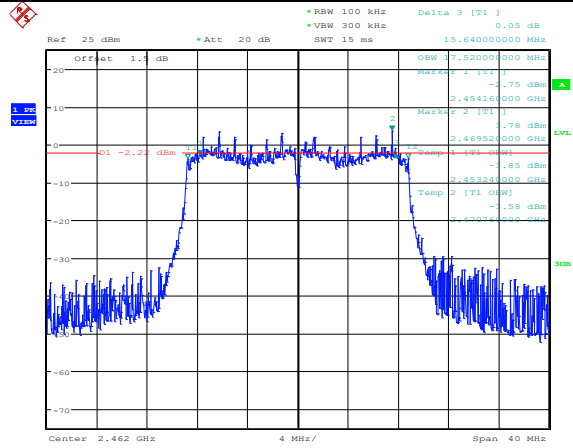


Date: 24.MAY.2018 16:26:32


11N40 ANT1 2422

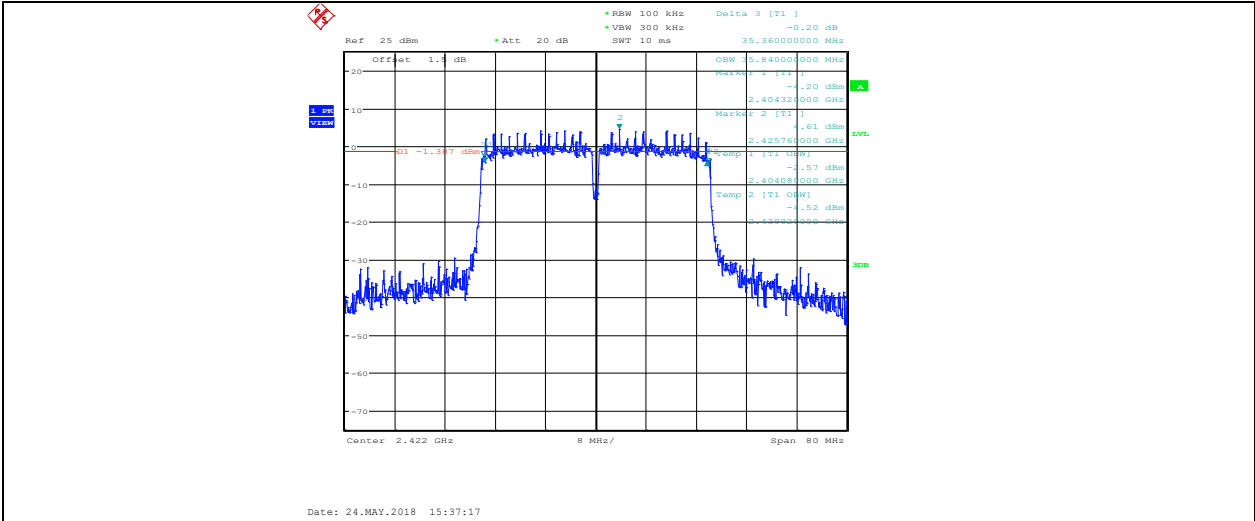


11N40 ANT2 2422

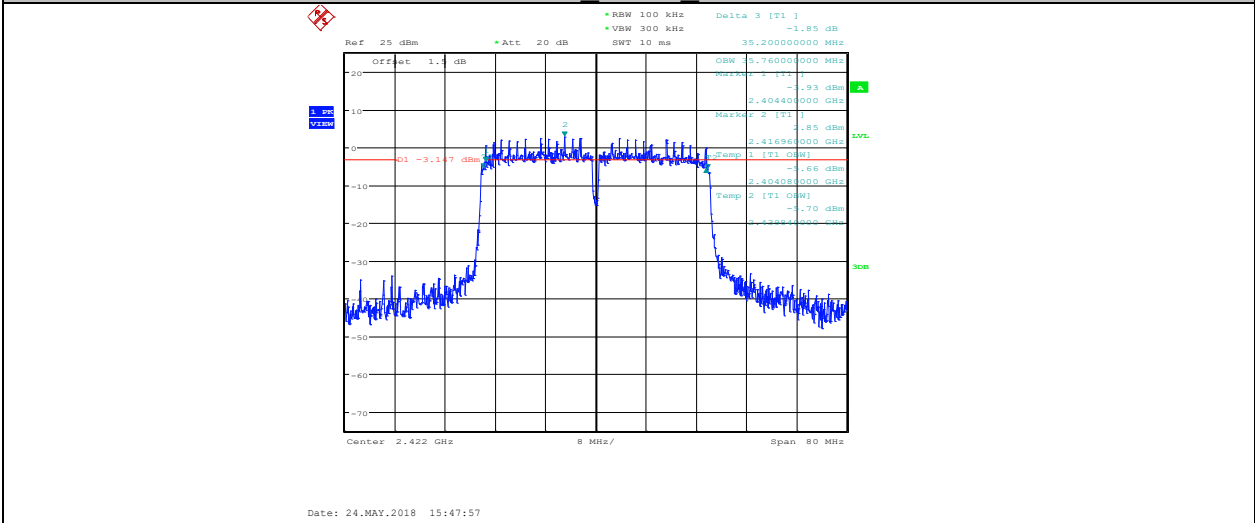

11N40 ANT1 2437

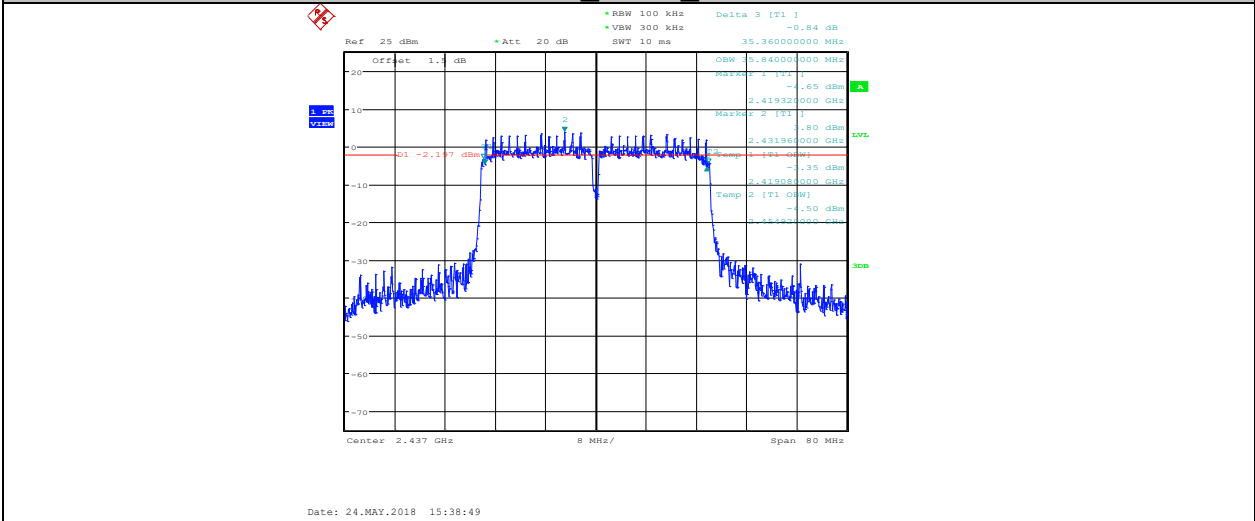


11N40 ANT2 2437

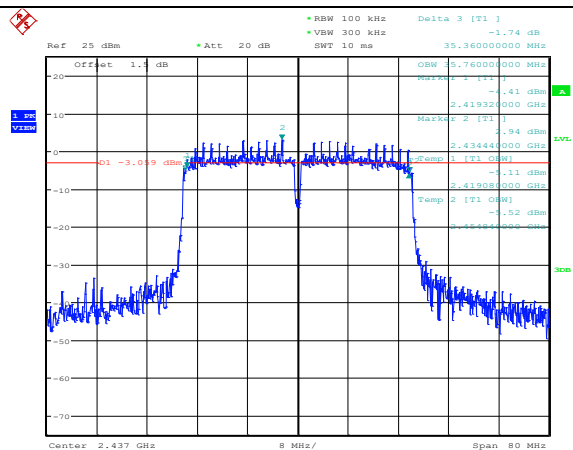


Date: 24.MAY.2018 15:52:57

11N40 ANT1 2452

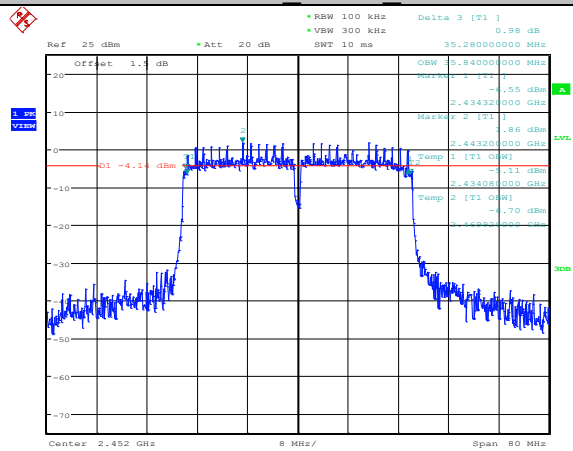

Date: 24.MAY.2018 16:22:42

11N40 ANT2 2452

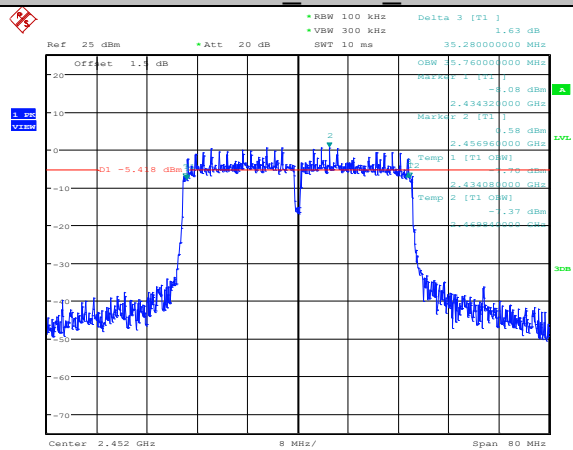

Date: 24.MAY.2018 16:29:55

5. Conducted peak Output Power

5.1. Block diagram of test setup

Same as section 4.1

5.2. Limits

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

5.3. Test Procedure

Connect each EUT's antenna output to power sensor by RF cable and attenuator

Measure the PK output power of each antenna port by power sensor.

5.4. Test Result

Test Mode	Test	Ant	Power[dBm]	Limit[dBm]	Verdict
11BSISO	2412	Ant1	24.68	30	PASS
11BSISO	2437	Ant1	24.78	30	PASS
11BSISO	2462	Ant1	24.86	30	PASS
11GSISO	2412	Ant1	26.95	30	PASS
11GSISO	2437	Ant1	27.97	30	PASS
11GSISO	2462	Ant1	28.14	30	PASS
11N20MIMO	2412	Ant1	25.52	30	PASS
11N20MIMO	2412	Ant2	25.19	30	PASS
11N20MIMO	2412	Ant1+Ant2	28.37	30	PASS
11N20MIMO	2437	Ant1	27.58	30	PASS
11N20MIMO	2437	Ant2	26.18	30	PASS
11N20MIMO	2437	Ant1+Ant2	29.95	30	PASS
11N20MIMO	2462	Ant1	24.06	30	PASS
11N20MIMO	2462	Ant2	23.85	30	PASS
11N20MIMO	2462	Ant1+Ant2	26.97	30	PASS
11N40MIMO	2422	Ant1	26.25	30	PASS
11N40MIMO	2422	Ant2	24.91	30	PASS
11N40MIMO	2422	Ant1+Ant2	28.64	30	PASS
11N40MIMO	2437	Ant1	25.92	30	PASS
11N40MIMO	2437	Ant2	25.25	30	PASS
11N40MIMO	2437	Ant1+Ant2	28.61	30	PASS
11N40MIMO	2452	Ant1	24.32	30	PASS

11N40MIMO	2452	Ant2	22.96	30	PASS
11N40MIMO	2452	Ant1+Ant2	26.70	30	PASS

6. Power Spectral Density

6.1. Block diagram of test setup

Same as section 4.1

6.2. Limits

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

6.3. Test Procedure

- Connect EUT's antenna output to spectrum analyzer by RF cable.
- Set the spectrum analyzer as follows:


Center frequency	DTS Channel center frequency
RBW:	$3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$
VBW:	$\geq 3\text{RBW}$
Span	1.5times the DTS bandwidth
Detector Mode:	RMS
Sweep time:	auto
Trace mode	Max hold
- Allow the trace to stabilize, use the peak marker function to determine the maximum amplitude level within the RBW.
- If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.


6.4. Test Result

Test Mode	Test	Ant	PSD[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
11BSISO	2412	Ant1	-4.96	8.00	PASS
11BSISO	2437	Ant1	-5.65	8.00	PASS
11BSISO	2462	Ant1	-5.53	8.00	PASS
11GSISO	2412	Ant1	-9.38	8.00	PASS
11GSISO	2437	Ant1	-8.08	8.00	PASS
11GSISO	2462	Ant1	-5.70	8.00	PASS
11N20MIMO	2412	Ant1	-10.45	8.00	PASS
11N20MIMO	2412	Ant2	-11.44	8.00	PASS
11N20MIMO	2412	Ant1+Ant2	-7.96	8.00	PASS
11N20MIMO	2437	Ant1	-8.99	8.00	PASS


11N20MIMO	2437	Ant2	-10.22	8.00	PASS
11N20MIMO	2437	Ant1+Ant2	-6.58	8.00	PASS
11N20MIMO	2462	Ant1	-12.02	8.00	PASS
11N20MIMO	2462	Ant2	-11.53	8.00	PASS
11N20MIMO	2462	Ant1+Ant2	-8.86	8.00	PASS
11N40MIMO	2422	Ant1	-12.89	8.00	PASS
11N40MIMO	2422	Ant2	-14.25	8.00	PASS
11N40MIMO	2422	Ant1+Ant2	-10.46	8.00	PASS
11N40MIMO	2437	Ant1	-12.82	8.00	PASS
11N40MIMO	2437	Ant2	-14.00	8.00	PASS
11N40MIMO	2437	Ant1+Ant2	-10.46	8.00	PASS
11N40MIMO	2452	Ant1	-14.81	8.00	PASS
11N40MIMO	2452	Ant2	-15.79	8.00	PASS
11N40MIMO	2452	Ant1+Ant2	-12.22	8.00	PASS

6.5. original test data

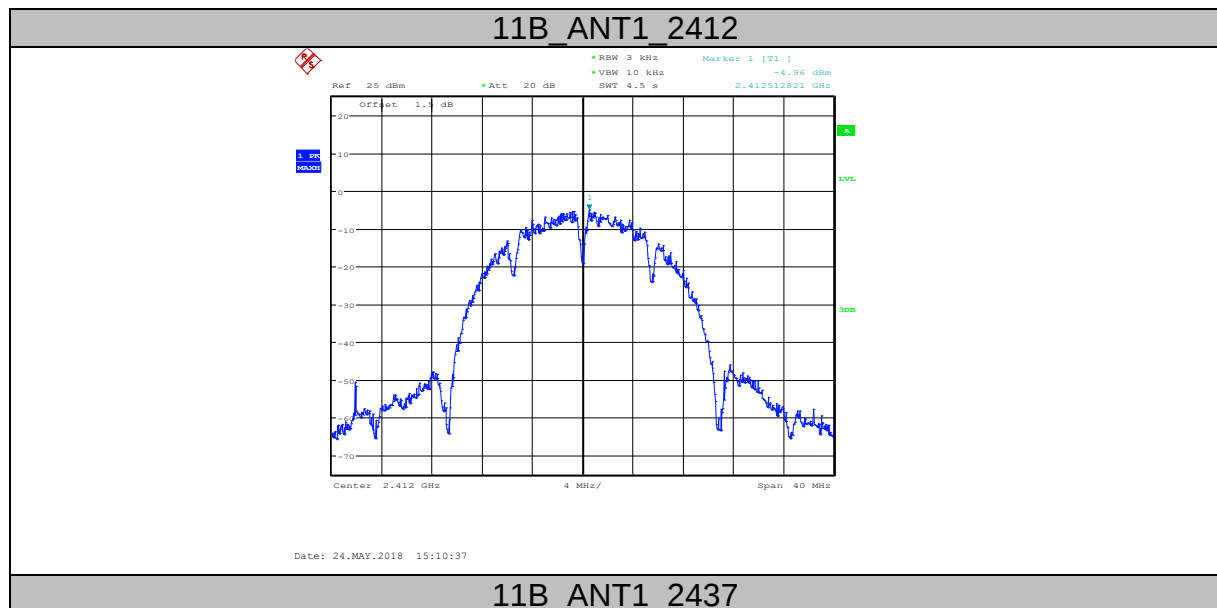


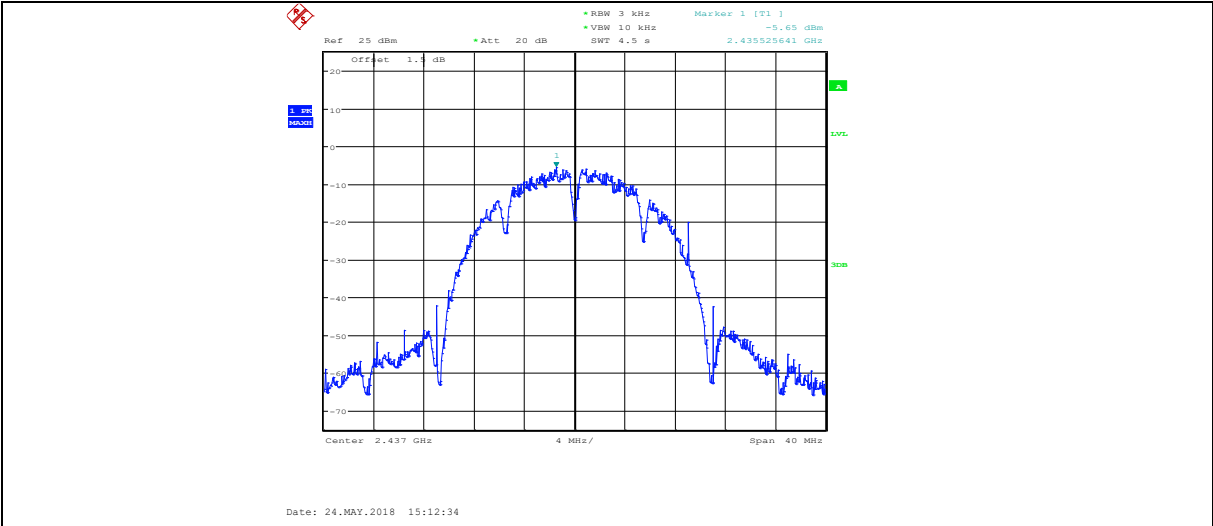


11B ANT1 2462

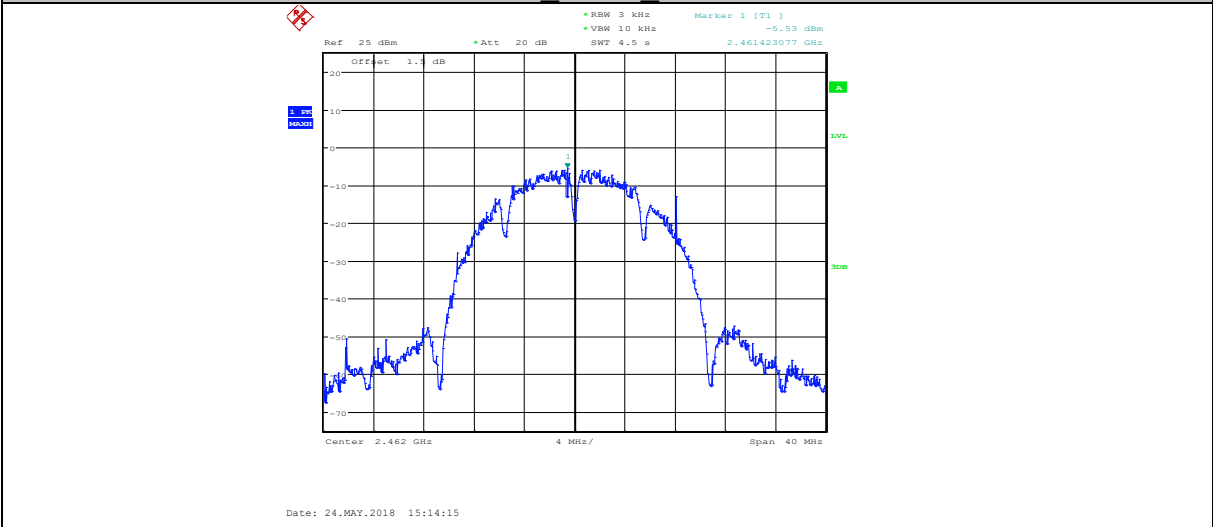


11G ANT1 2412

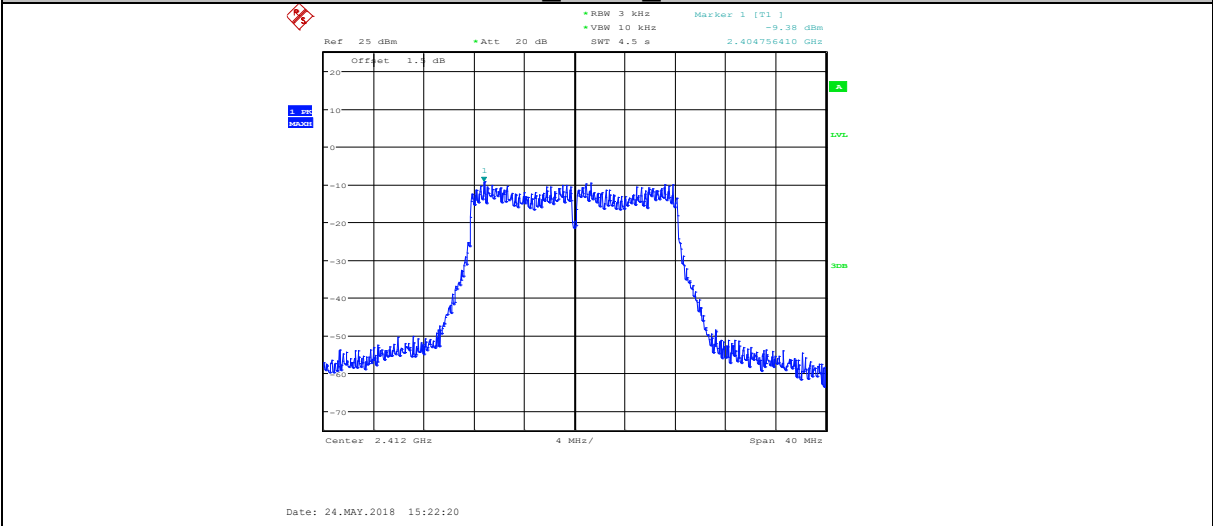


11G ANT1 2437

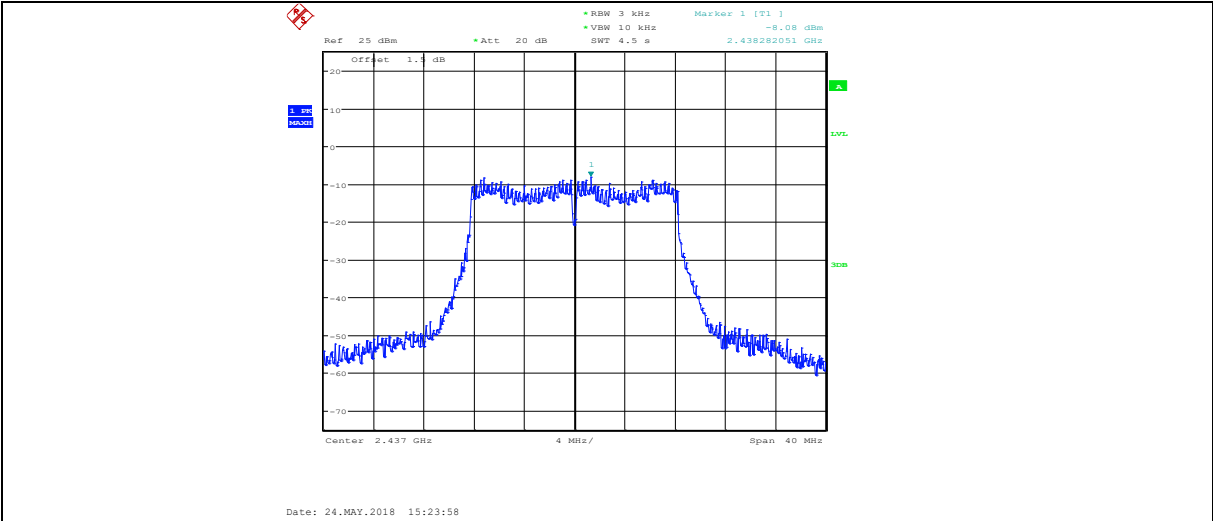


11G ANT1 2462

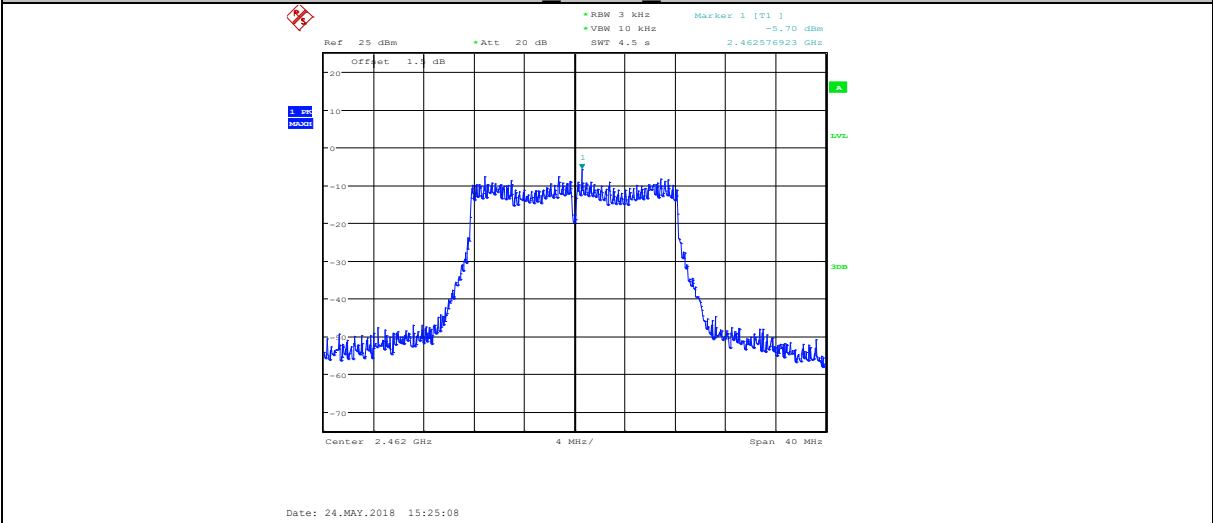


11N20 ANT1 2412

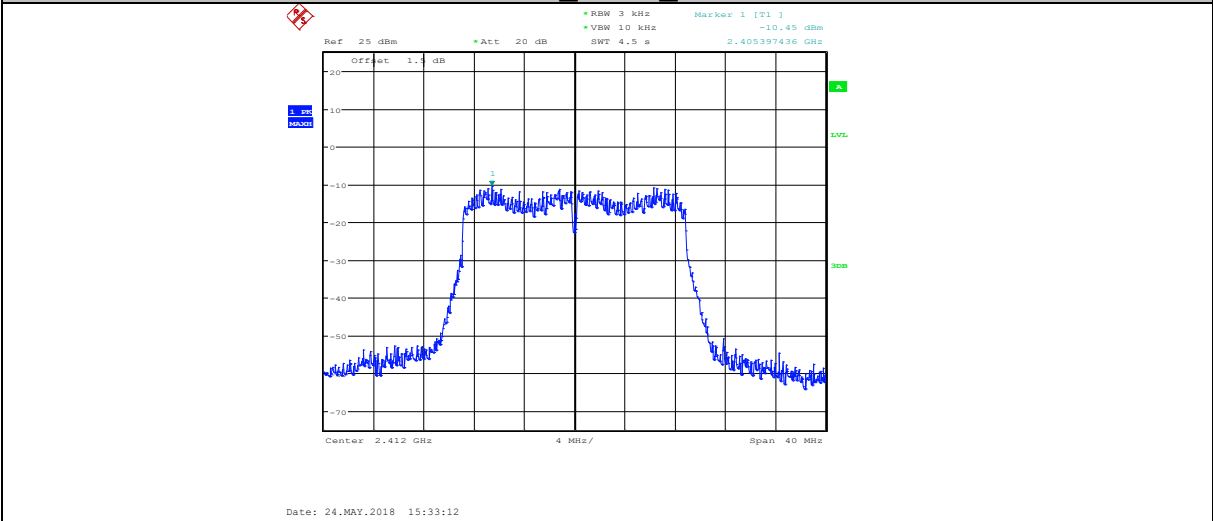


11N20 ANT2 2412

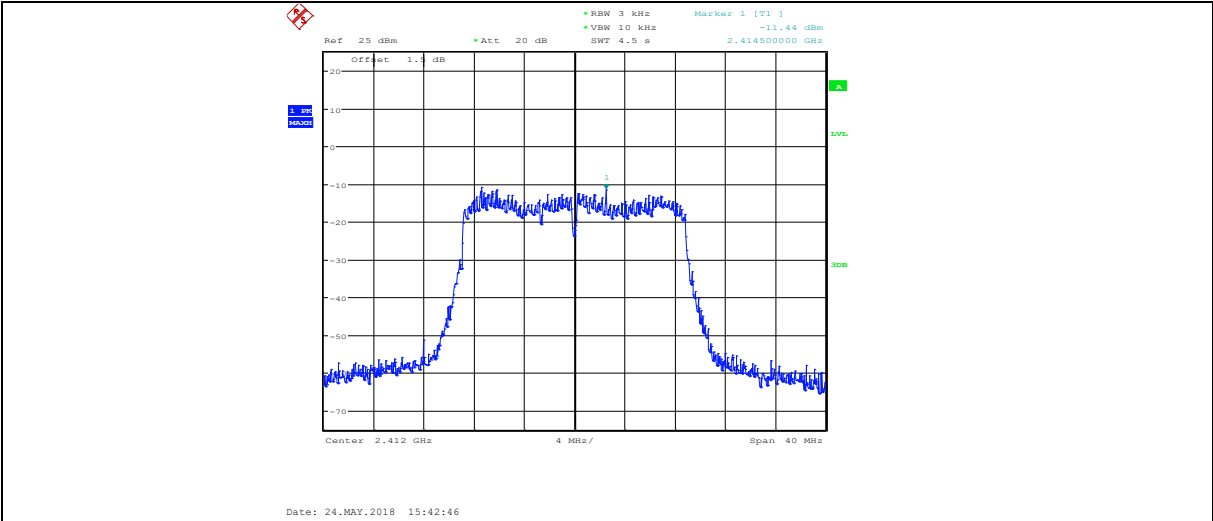


11N20 ANT1 2437

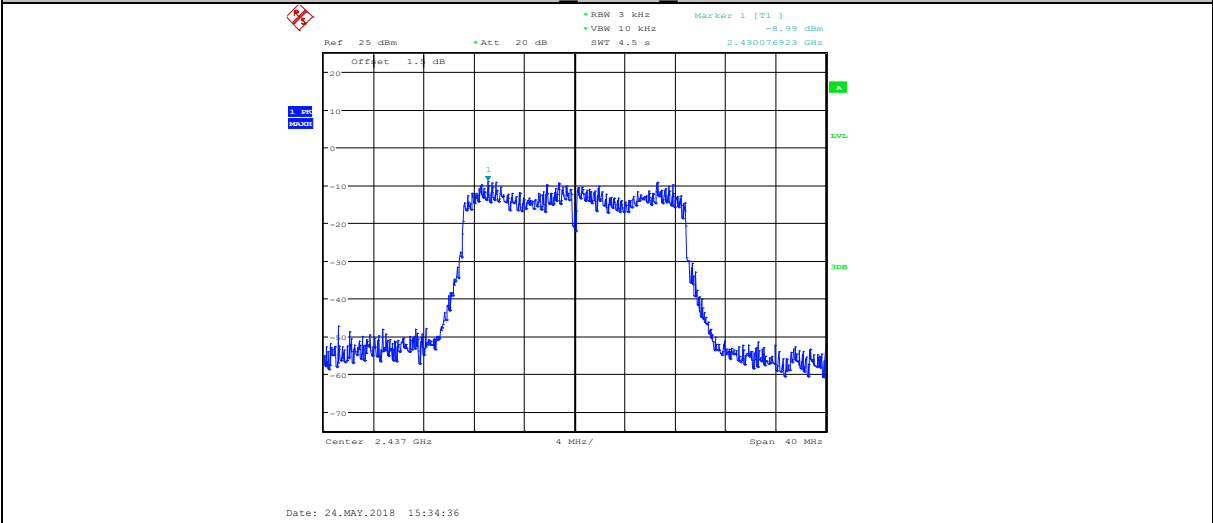


11N20 ANT2 2437

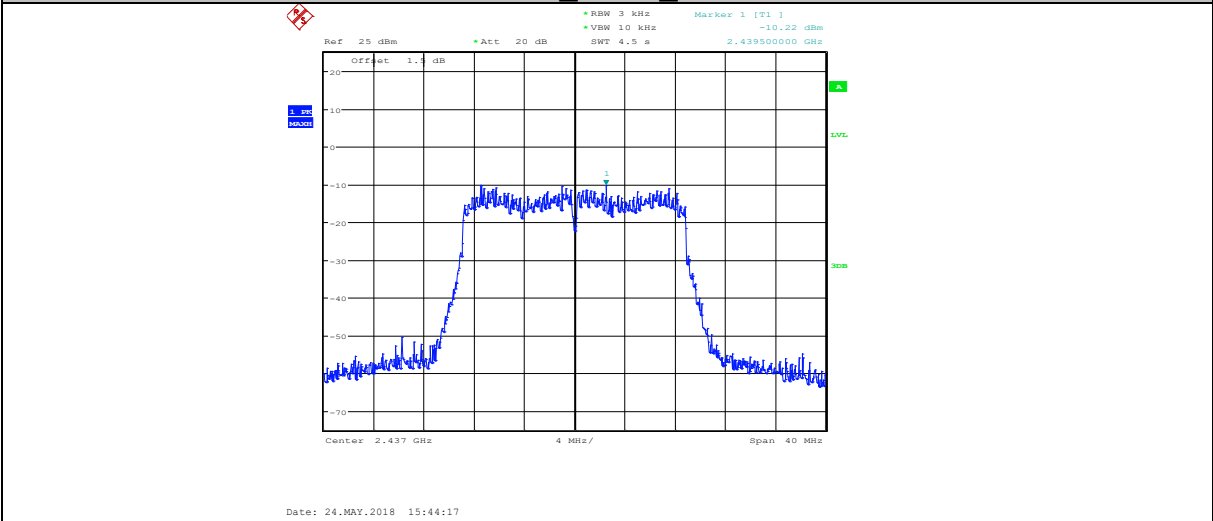


11N20 ANT1 2462

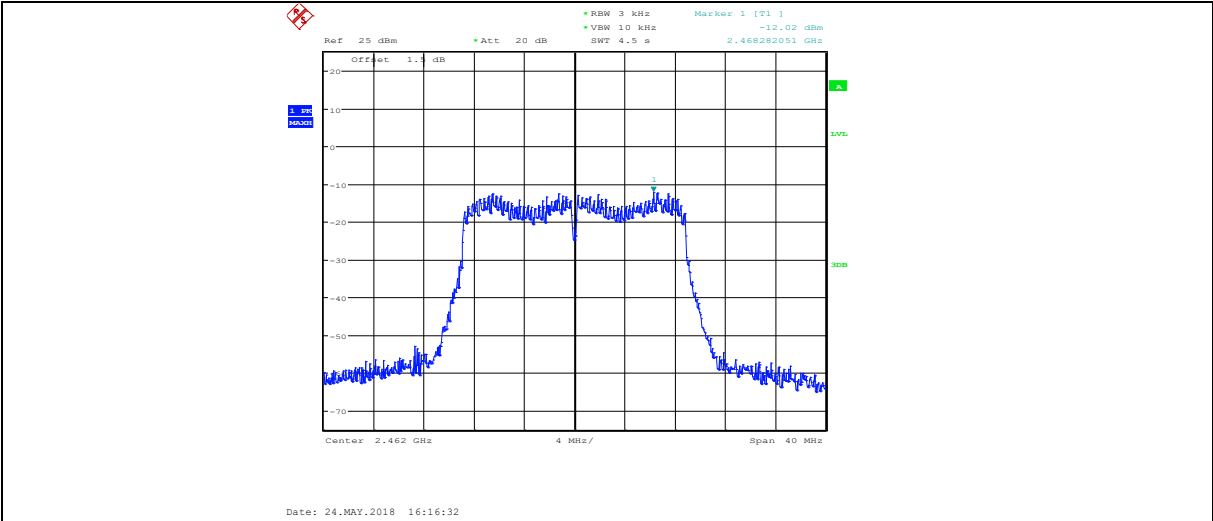


11N20 ANT2 2462

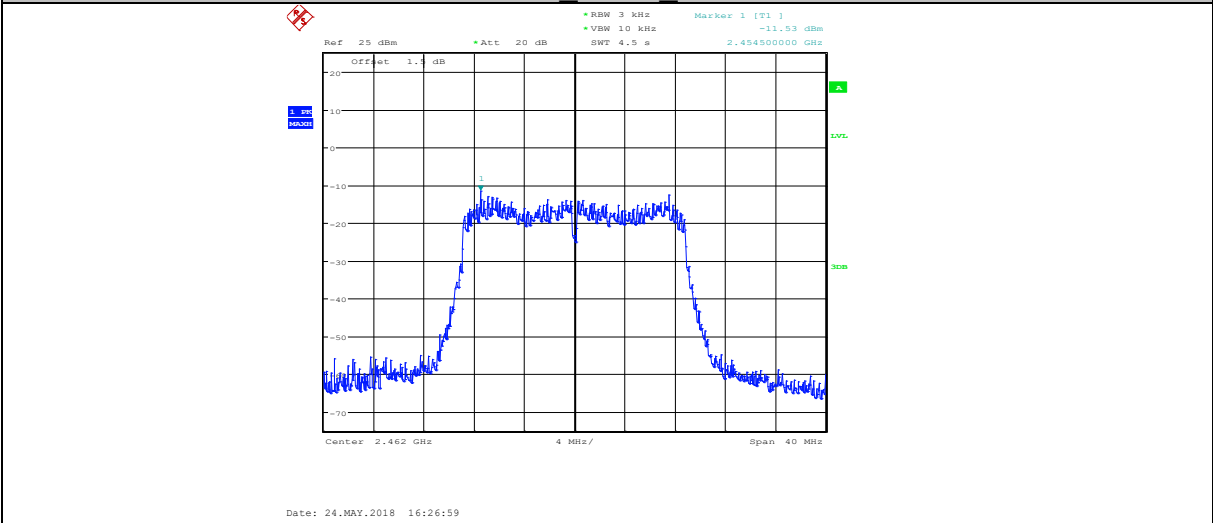


11N40 ANT1 2422

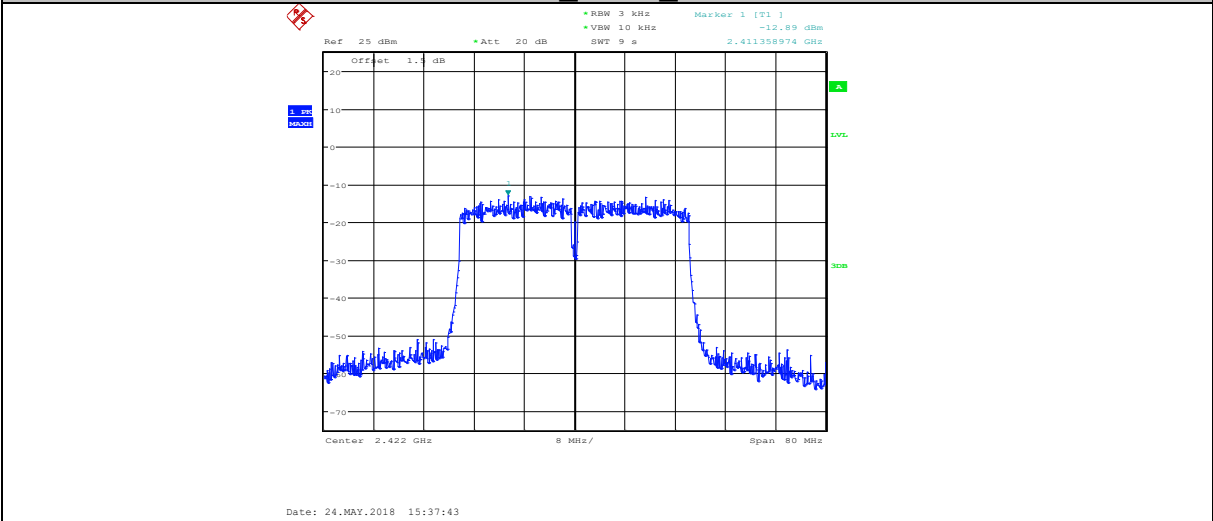


11N40 ANT2 2422

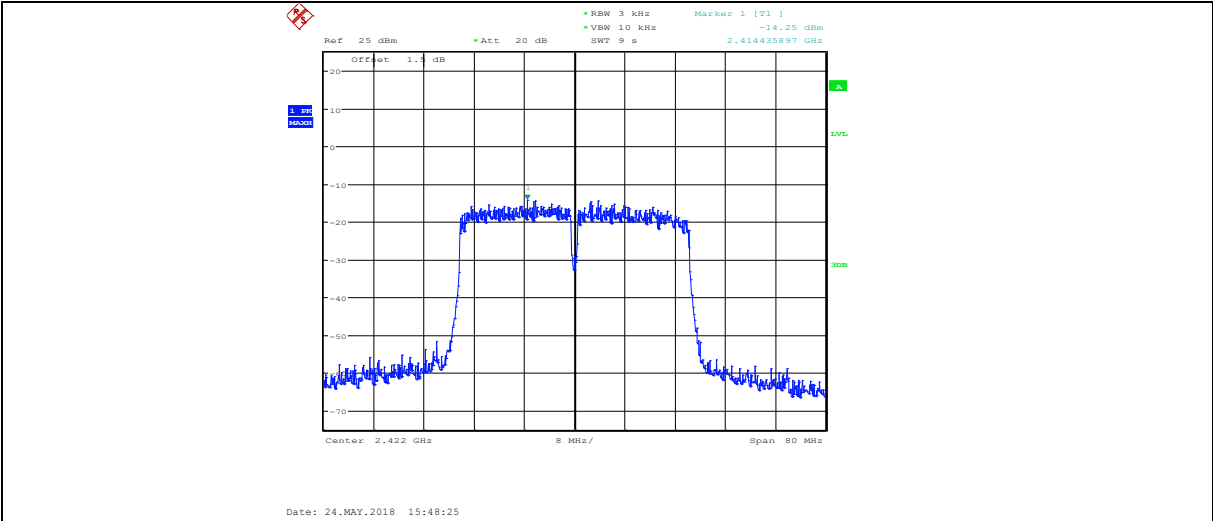


11N40 ANT1 2437

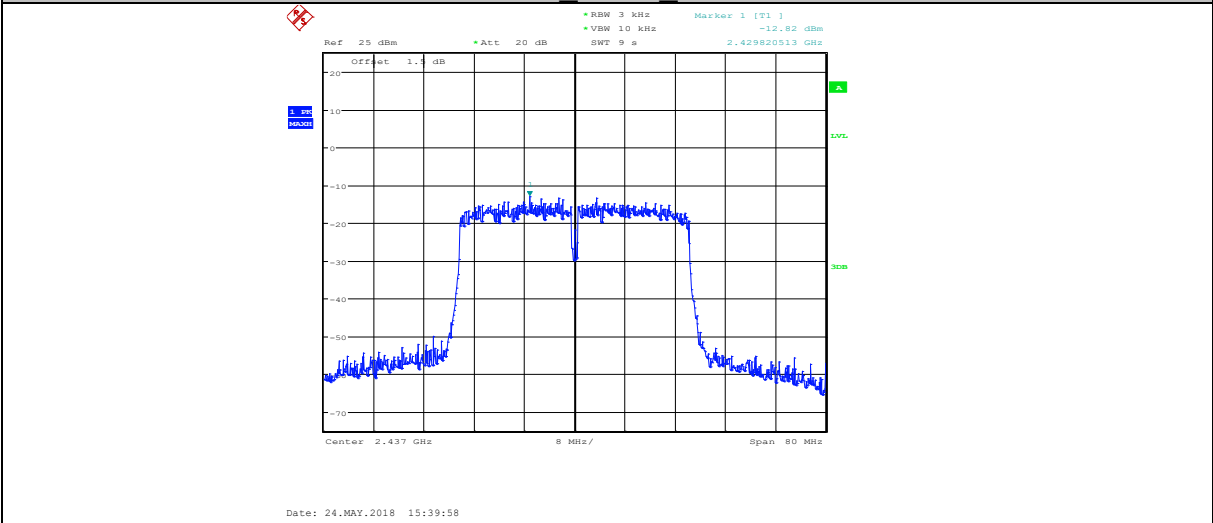

11N40 ANT2 2437

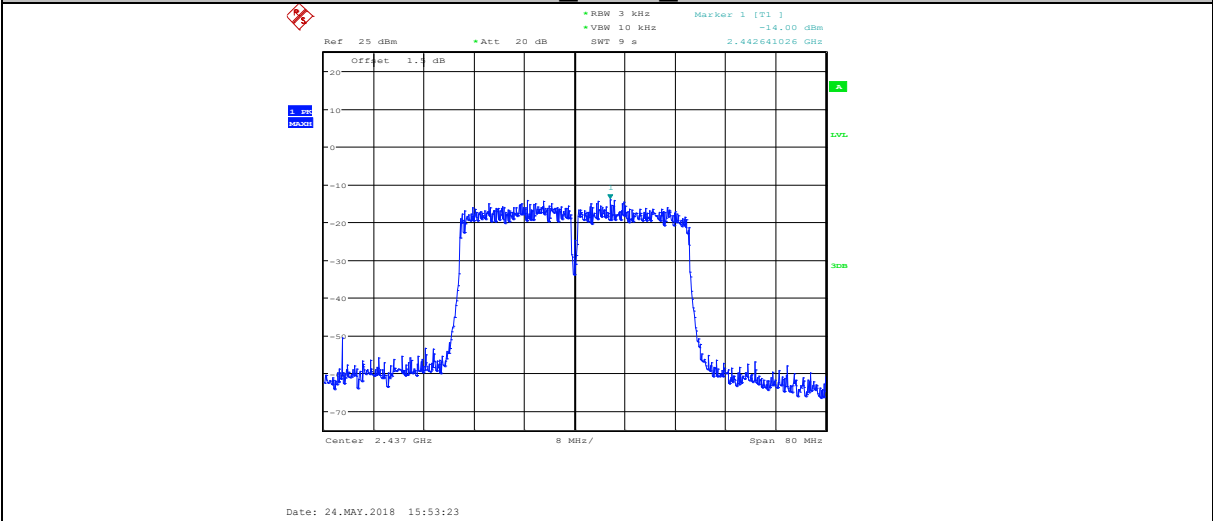


11N40 ANT1 2452

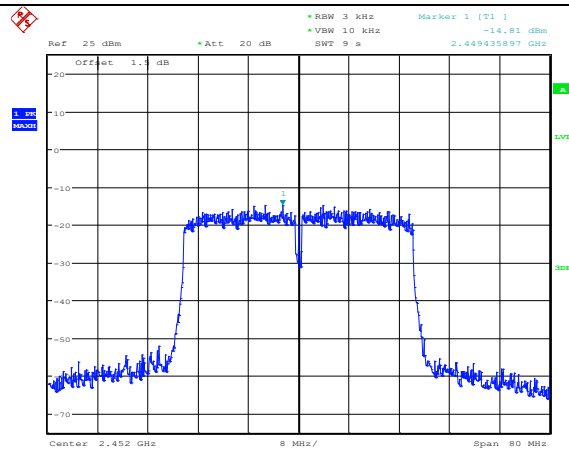

Date: 24.MAY.2018 16:23:12

11N40 ANT2 2452

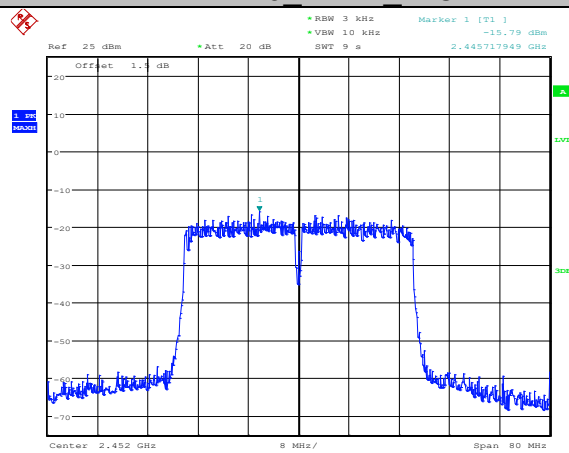

Date: 24.MAY.2018 16:30:23

6.6. Band Edge and Spurious Emissions (Conducted)

6.7. Block diagram of test setup

Same as section 4.1

6.8. Limits

In any 100kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.

6.9. Test Procedure

(1) Connect EUT's antenna output to spectrum analyzer by RF cable.

(2) Establish a reference level by using the following procedure:

Center frequency	DTS Channel center frequency
RBW:	100kHz
VBW:	300kHz
Span	1.5times the DTS bandwidth
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold

(3) Allow the trace to stabilize, use the peak marker function to determine the maximum peak power level to establish the reference level.

(4) Set the spectrum analyzer as follows:

RBW:	100kHz
VBW:	300kHz
Span	Encompass frequency range to be measured
Number of measurement points	$\geq \text{span/RBW}$
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold

(5) Allow the trace to stabilize, use the peak marker function to determine the maximum amplitude of all unwanted emissions outside of the authorized frequency band


6.10. Test Result


EUT Set Mode	CH or Frequency	Ant1 Result (dBm)	EUT Set Mode	CH or Frequency	Ant1 Result (dBm)
11BMIMO	CH1	PASS	11N20 MIMO	CH1	PASS
	CH6	PASS		CH6	PASS
	CH11	PASS		CH11	PASS
11GMIMO	CH1	PASS	11N40MIMO	CH3	PASS
	CH6	PASS		CH6	PASS
	CH11	PASS		CH9	PASS

EUT Set Mode	CH or Frequency	Ant2 Result (dBm)			
11N20 MIMO	CH1	PASS			
	CH6	PASS			
	CH11	PASS			
11N40MIMO	CH3	PASS			
	CH6	PASS			
	CH9	PASS			

6.11. original test data


Band Edge

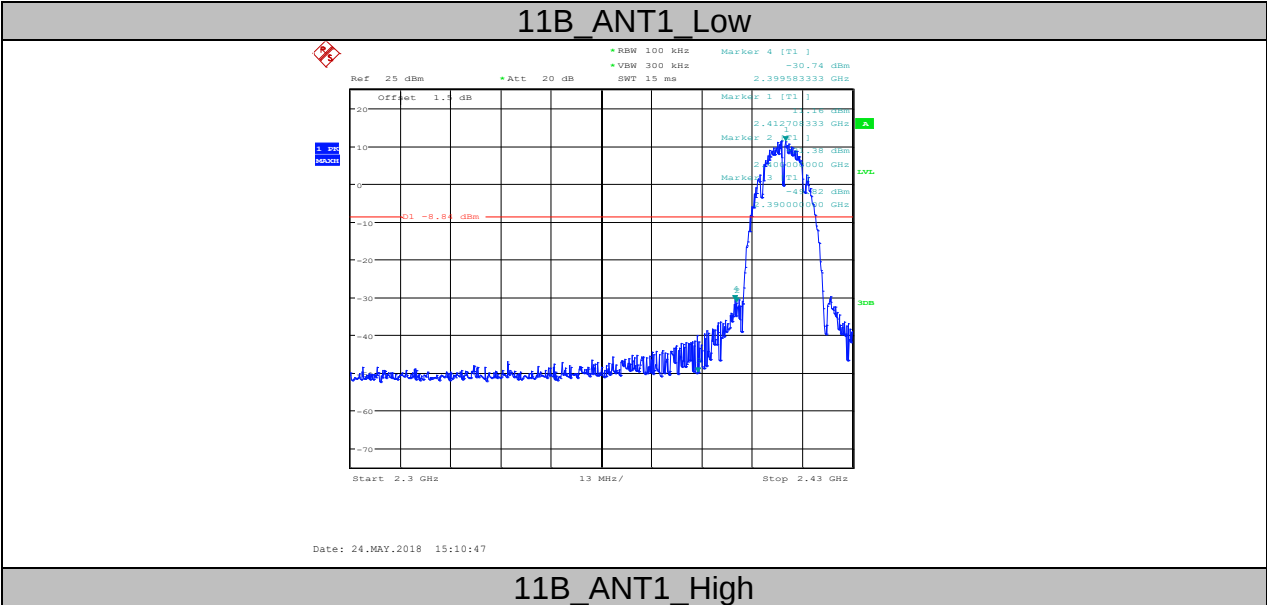

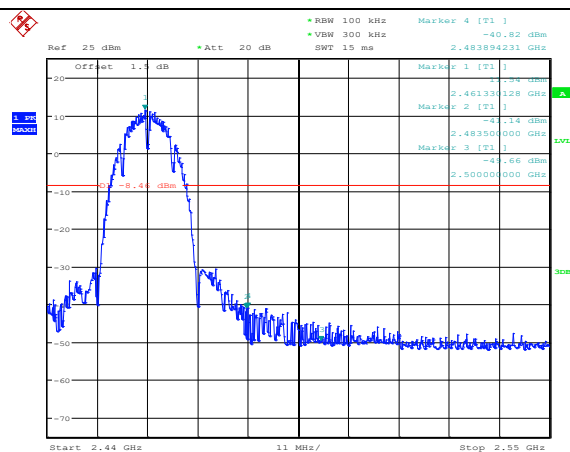


Date: 24.MAY.2018 15:14:25

11G ANT1 Low

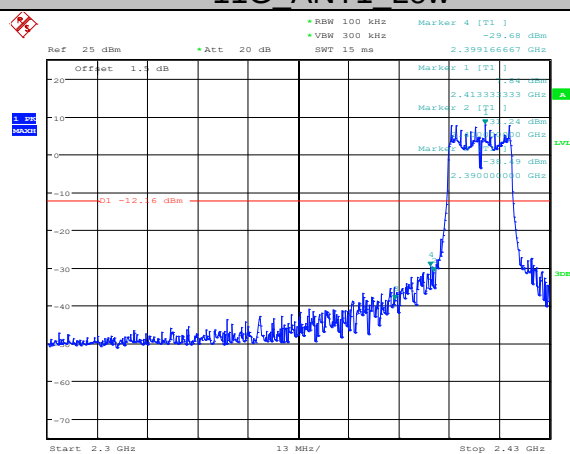


Date: 24.MAY.2018 15:22:30

11G ANT1 High

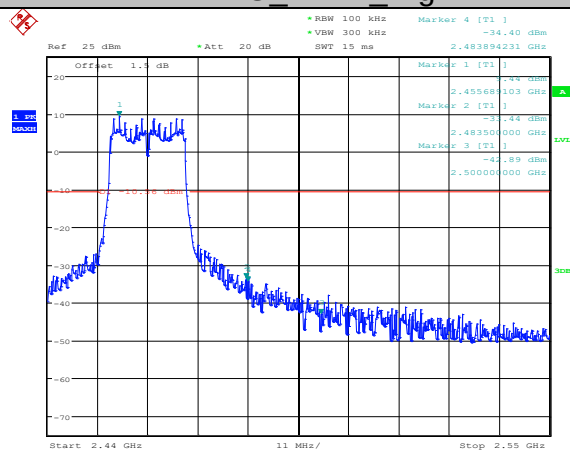


Date: 24.MAY.2018 15:25:18

11N20 ANT1 Low

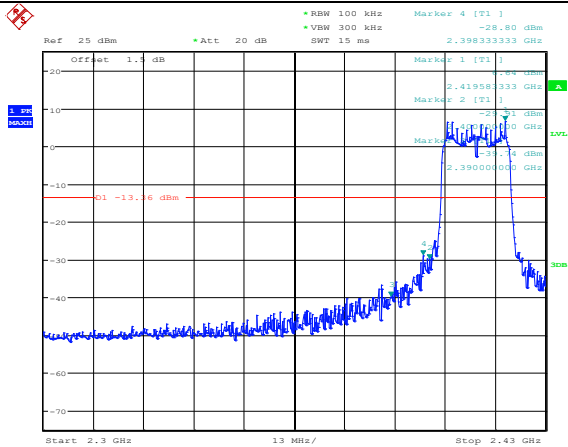


Date: 24.MAY.2018 15:33:22

11N20 ANT2 Low

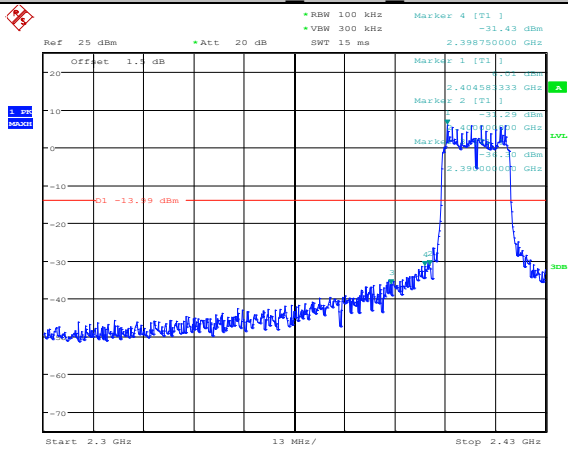


Date: 24.MAY.2018 15:42:56

11N20 ANT1_High

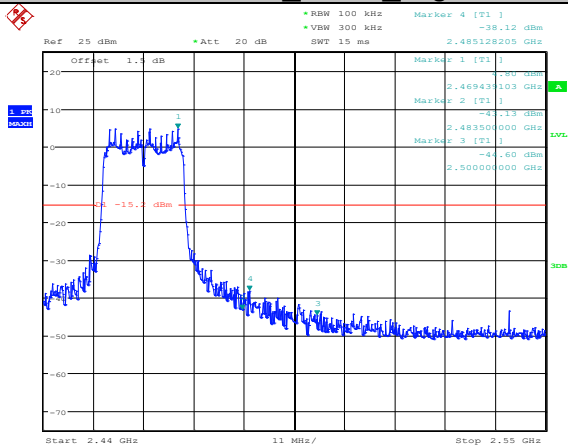


Date: 24.MAY.2018 16:16:43

11N20 ANT2_High

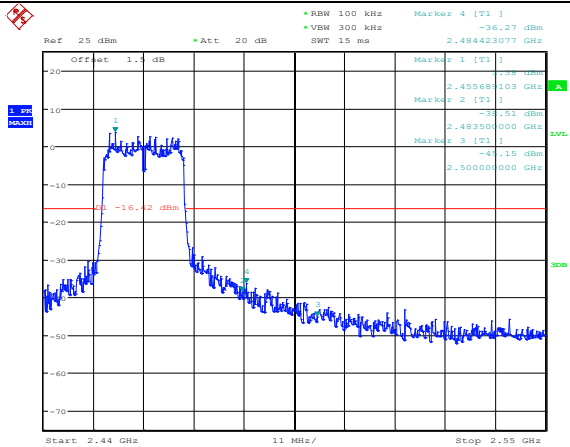


Date: 24.MAY.2018 16:27:10

11N40 ANT1 Low

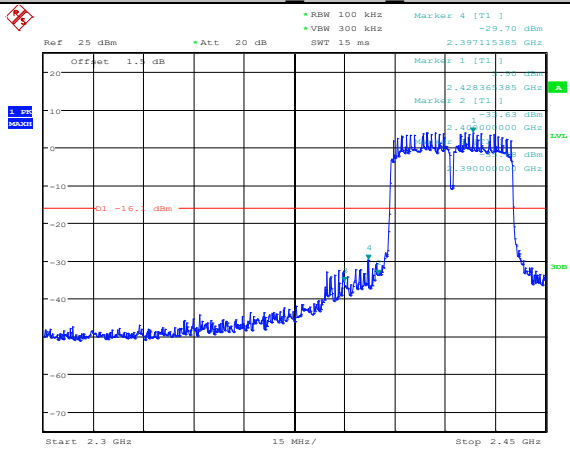


Date: 24.MAY.2018 15:37:53

11N40 ANT2 Low

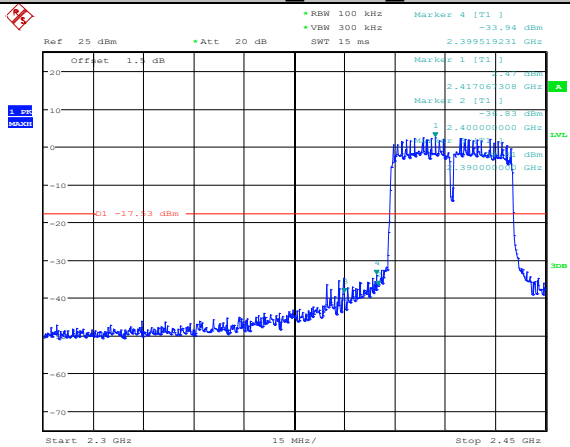


Date: 24.MAY.2018 15:48:35


11N40 ANT1 High

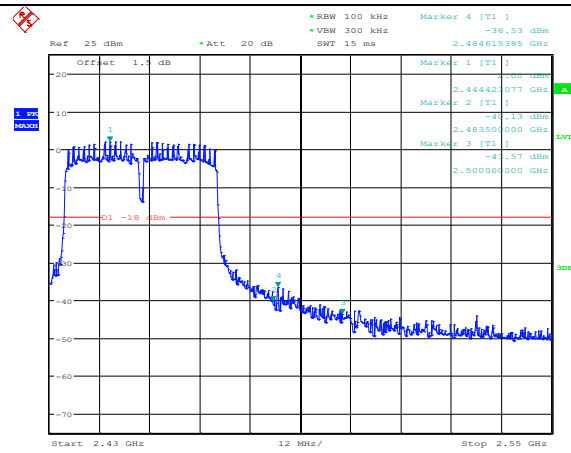

Date: 24.MAY.2018 16:23:23

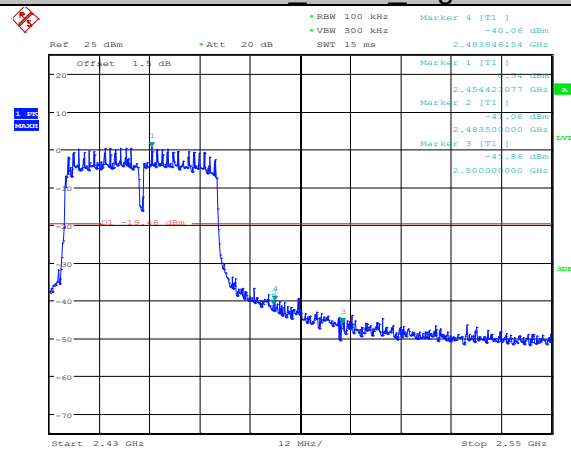
11N40 ANT2 High

Date: 24.MAY.2018 16:30:33

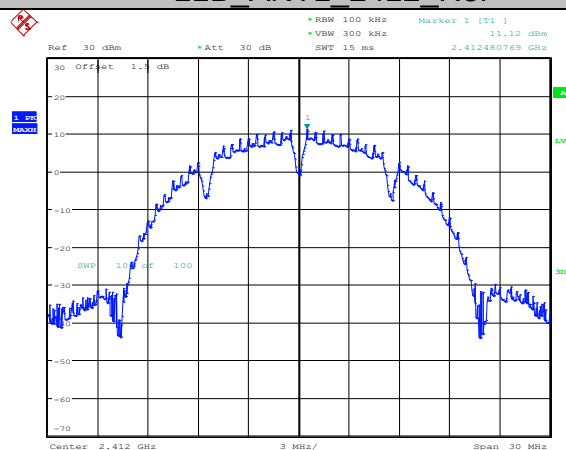
Spurious Emissions**11B ANT1 2412 Ref**

Date: 24.MAY.2018 16:07:25


11B ANT1 2412 30~1000

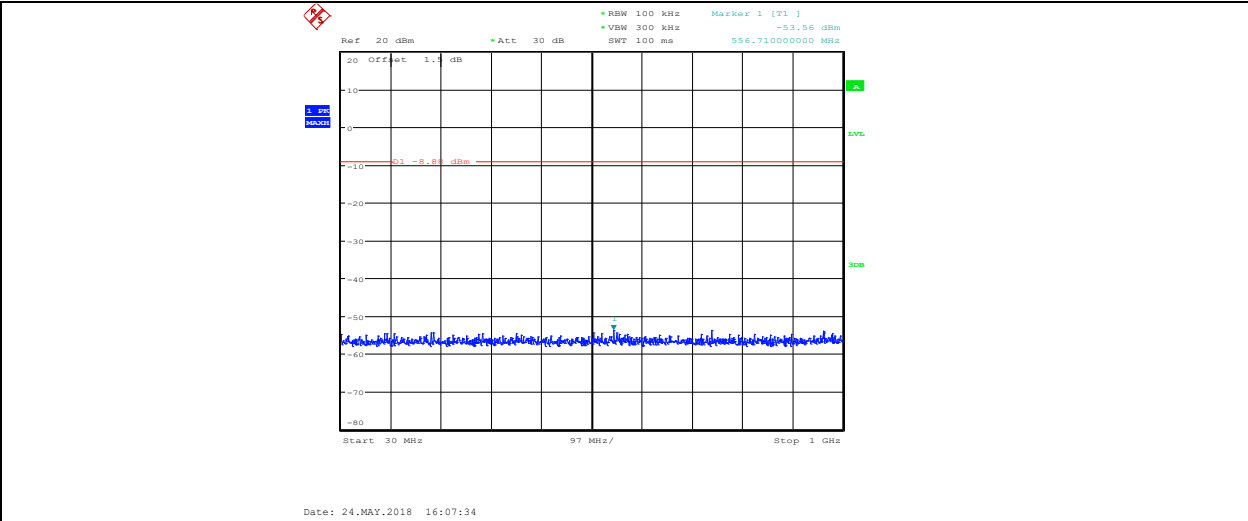


11B ANT1 2412 1000~26500

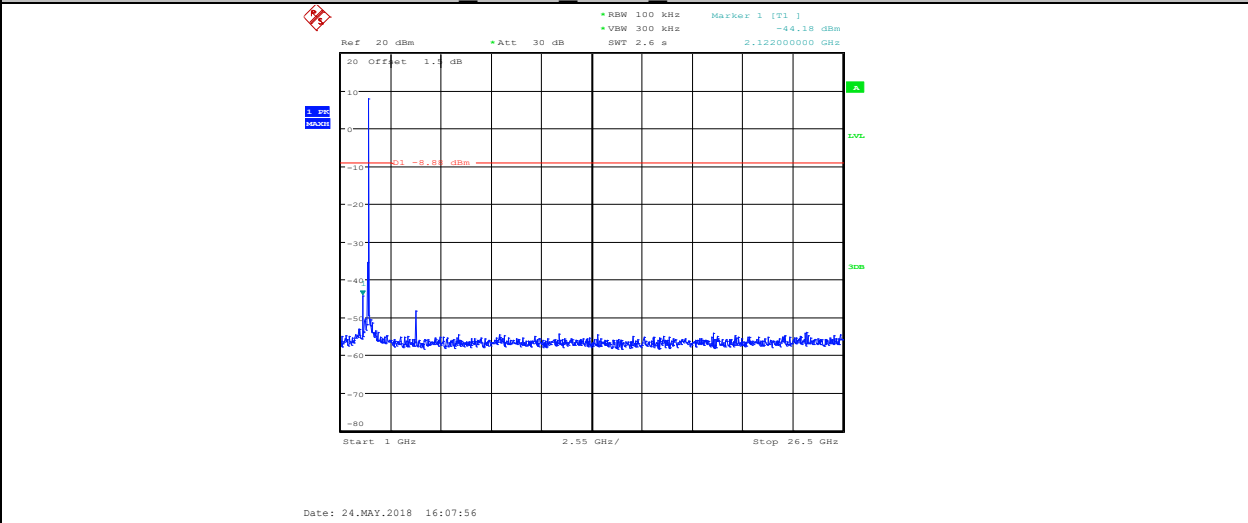


11B ANT1 2437 Ref

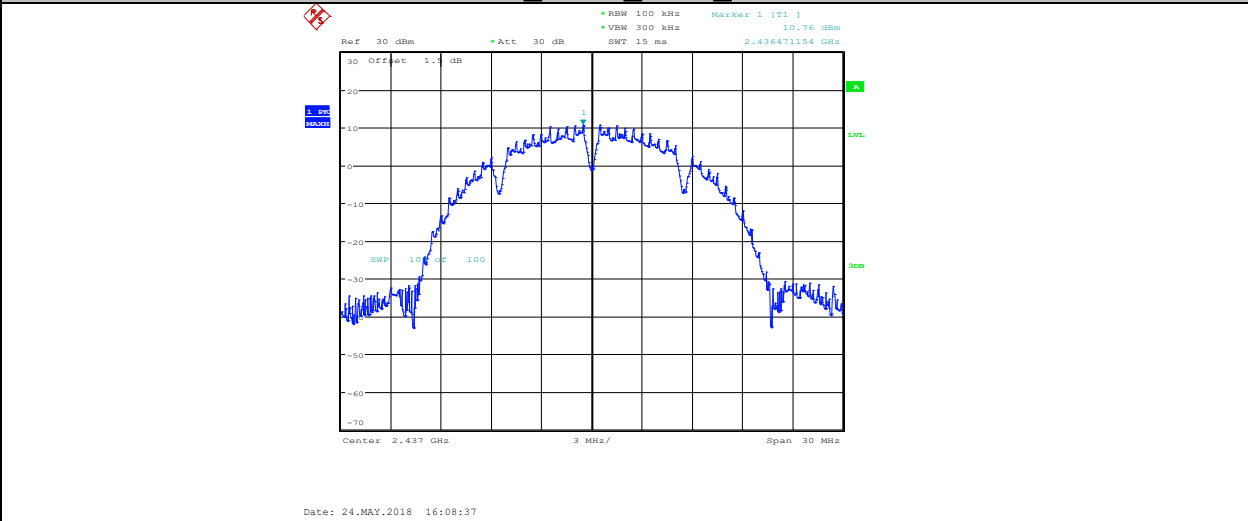


11B ANT1 2437 30~1000

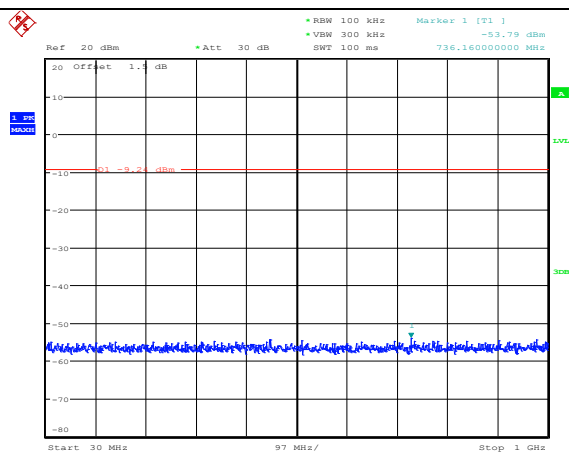

Date: 24.MAY.2018 16:08:45

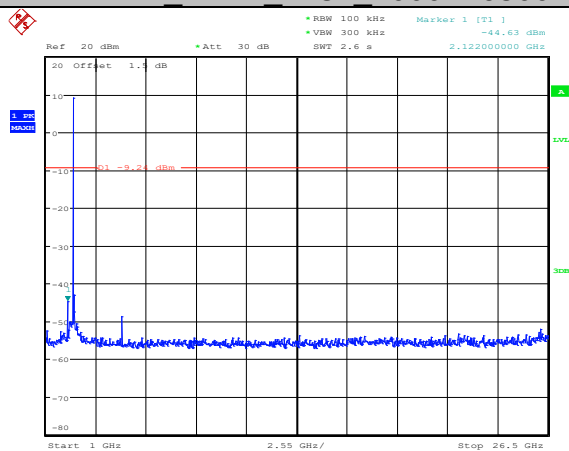
11B ANT1 2437 1000~26500

Date: 24.MAY.2018 16:09:12

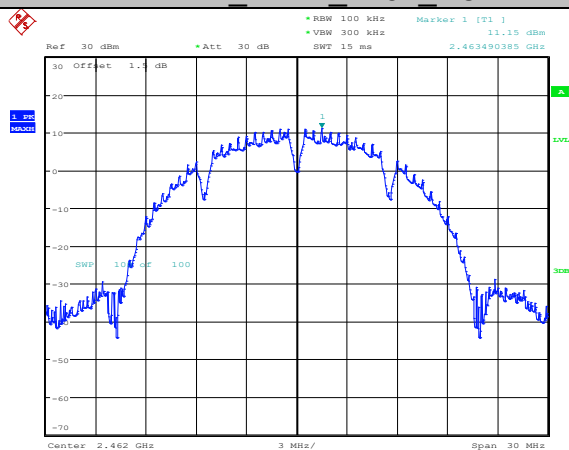
11B ANT1 2462 Ref

Date: 24.MAY.2018 16:09:37


11B ANT1 2462 30~1000

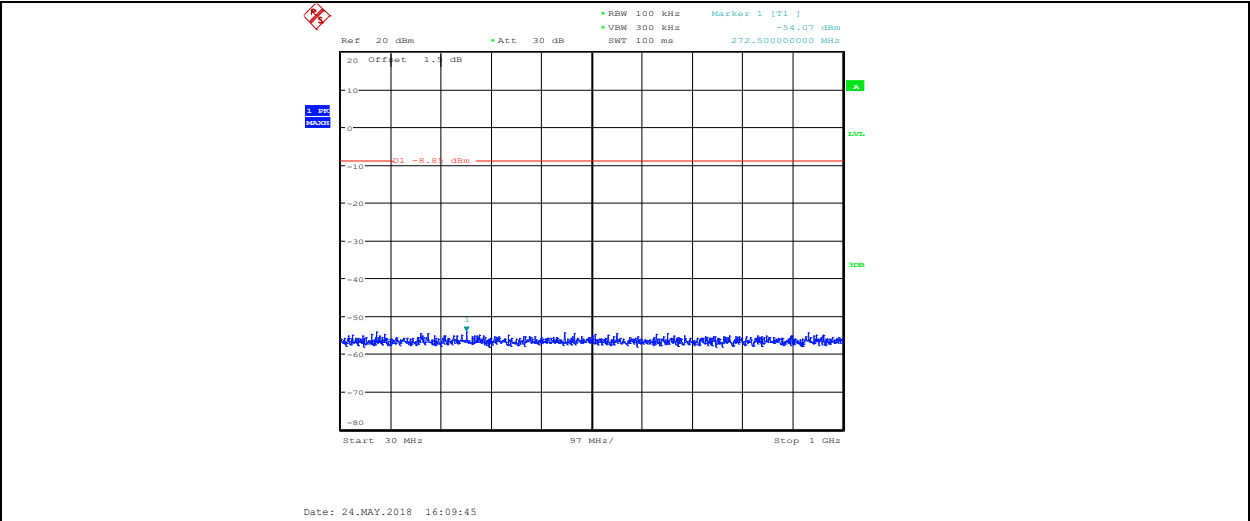


11B ANT1 2462 1000~26500

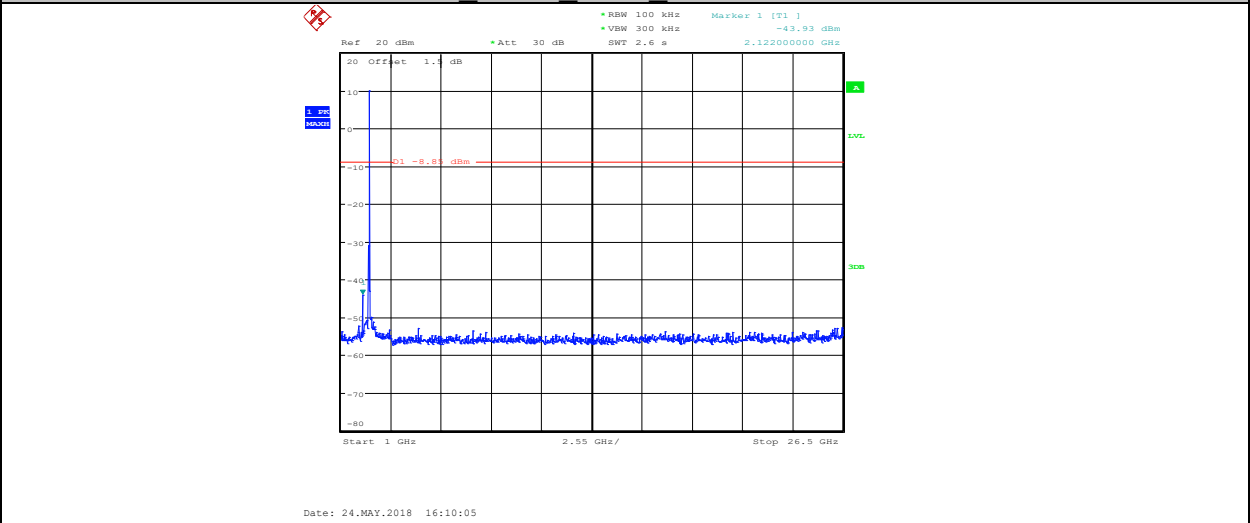


11G ANT1 2412 Ref

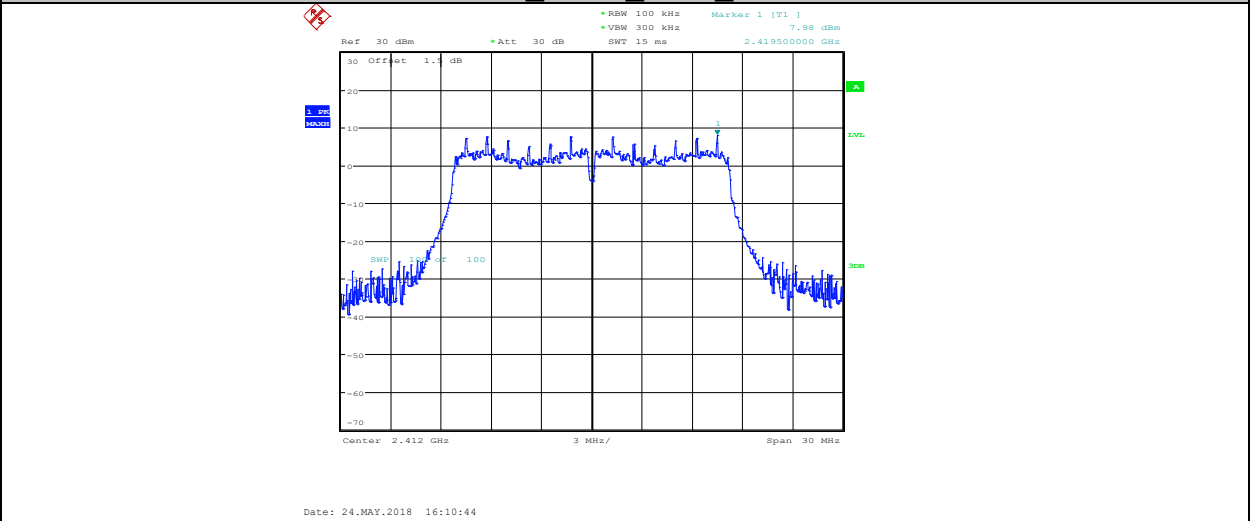


11G ANT1 2412 30~1000

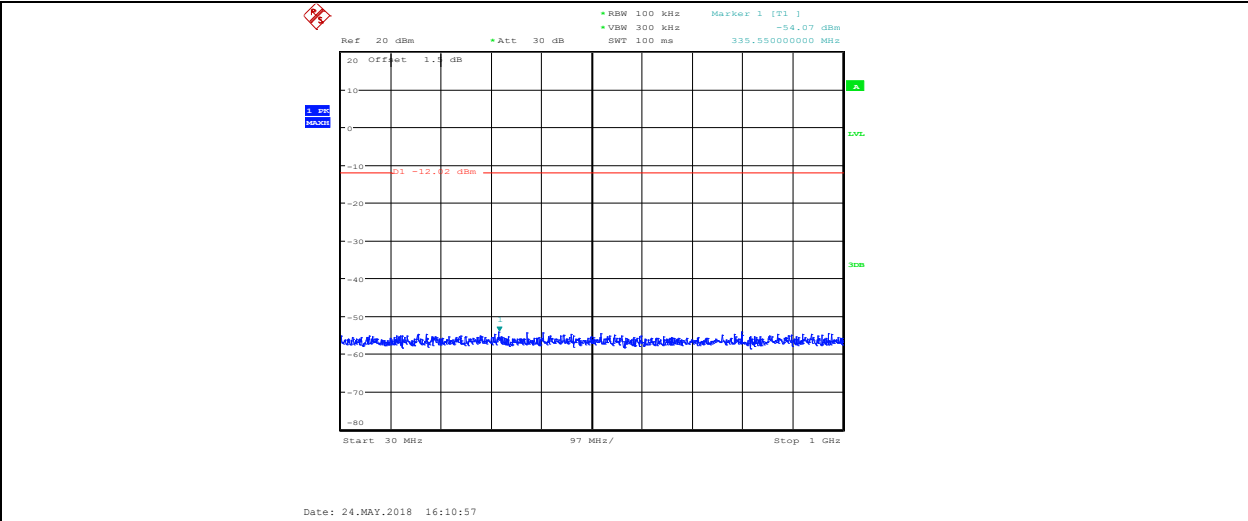


11G ANT1 2412 1000~26500

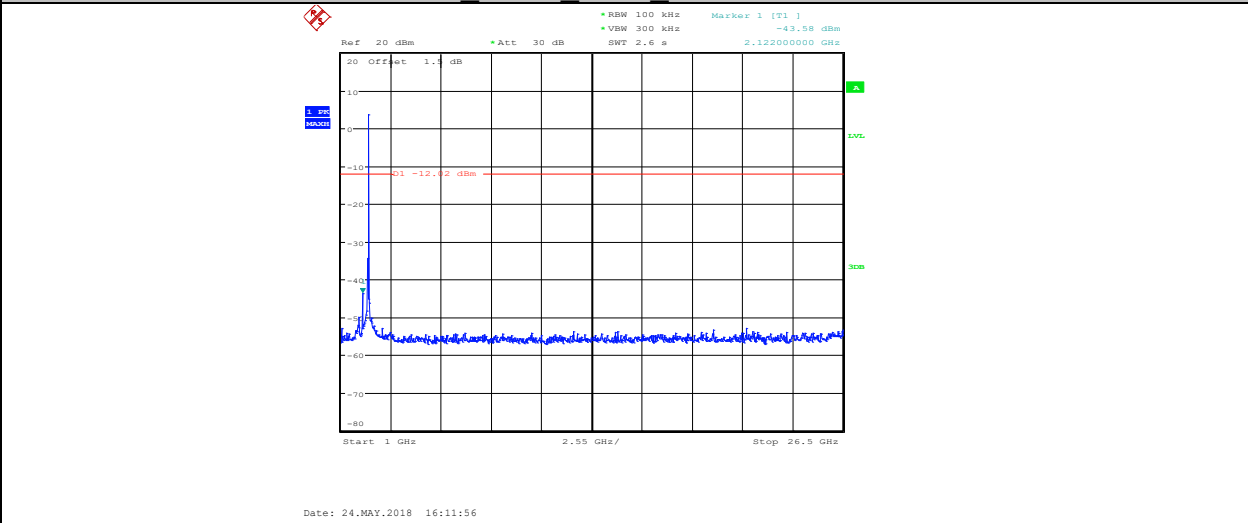

11G ANT1 2437 Ref

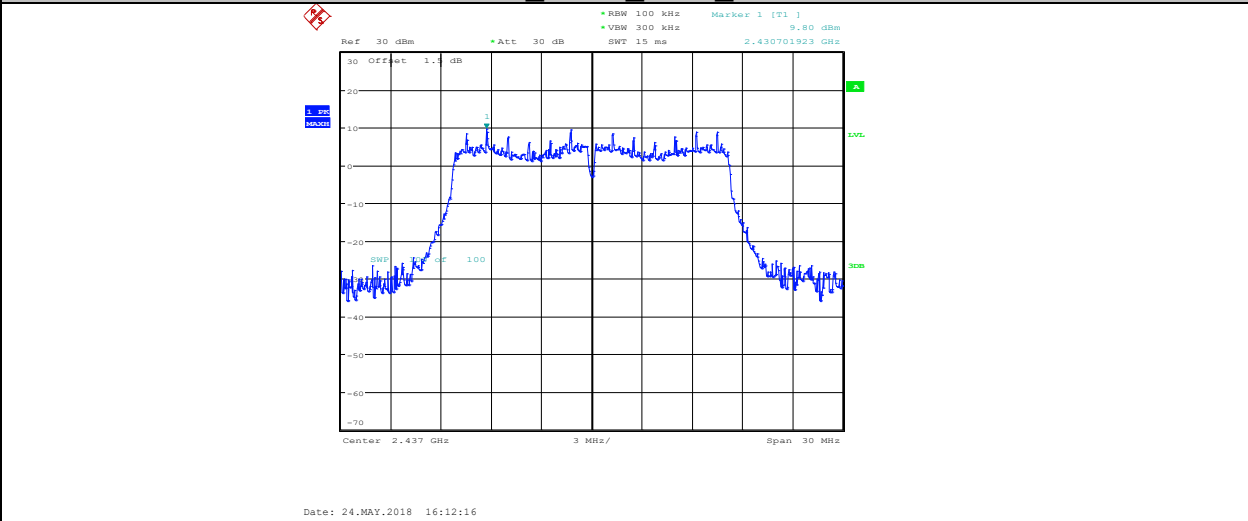


11G ANT1 2437 30~1000

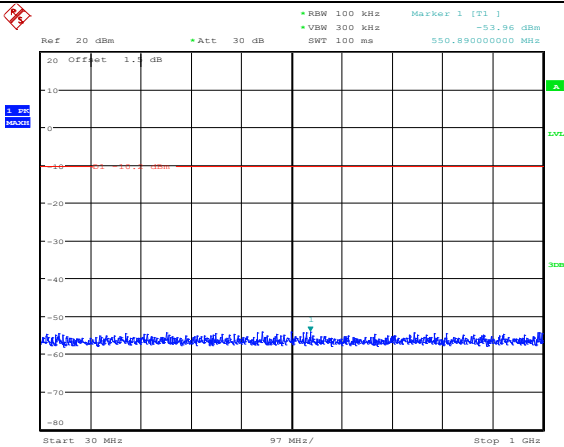


Date: 24.MAY.2018 16:12:26

11G ANT1 2437 1000~26500

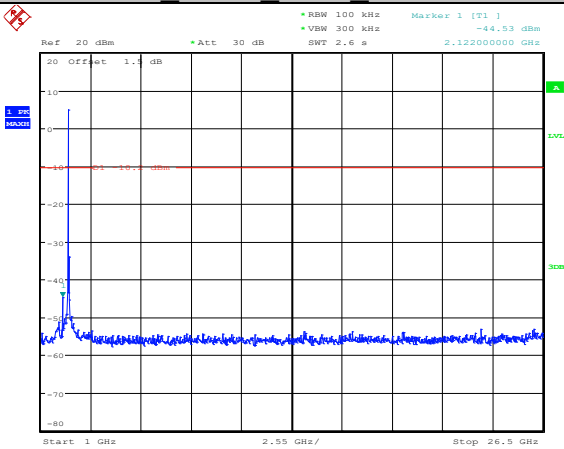


Date: 24.MAY.2018 16:12:42

11G ANT1 2462 Ref

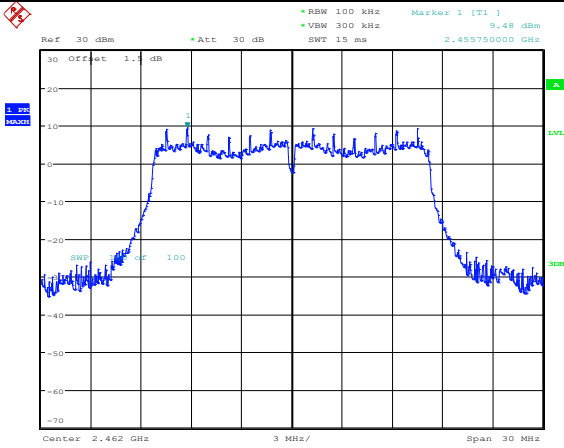


Date: 24.MAY.2018 16:13:00

11G ANT1 2462 30~1000

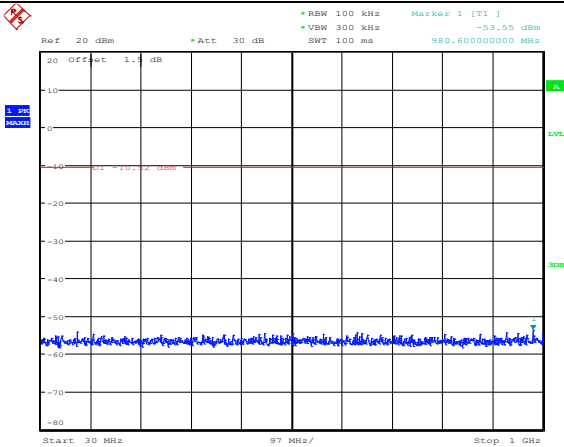


Date: 24.MAY.2018 16:13:13

11G ANT1 2462 1000~26500

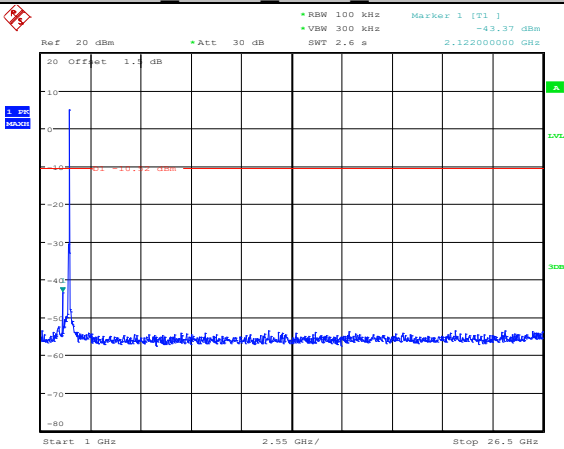


Date: 24.MAY.2018 16:13:31

11N20 ANT1 2412 Ref

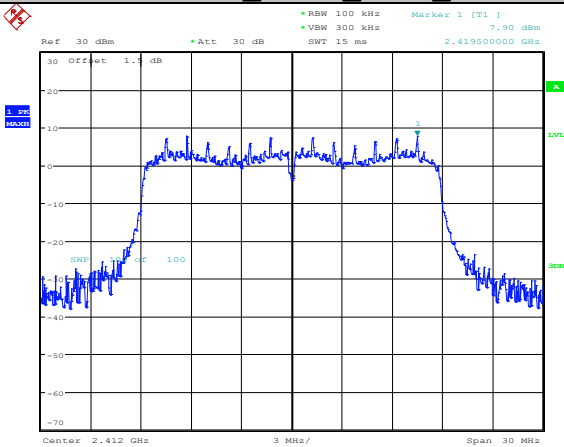


Date: 24.MAY.2018 16:14:02


11N20 ANT1 2412 30~1000

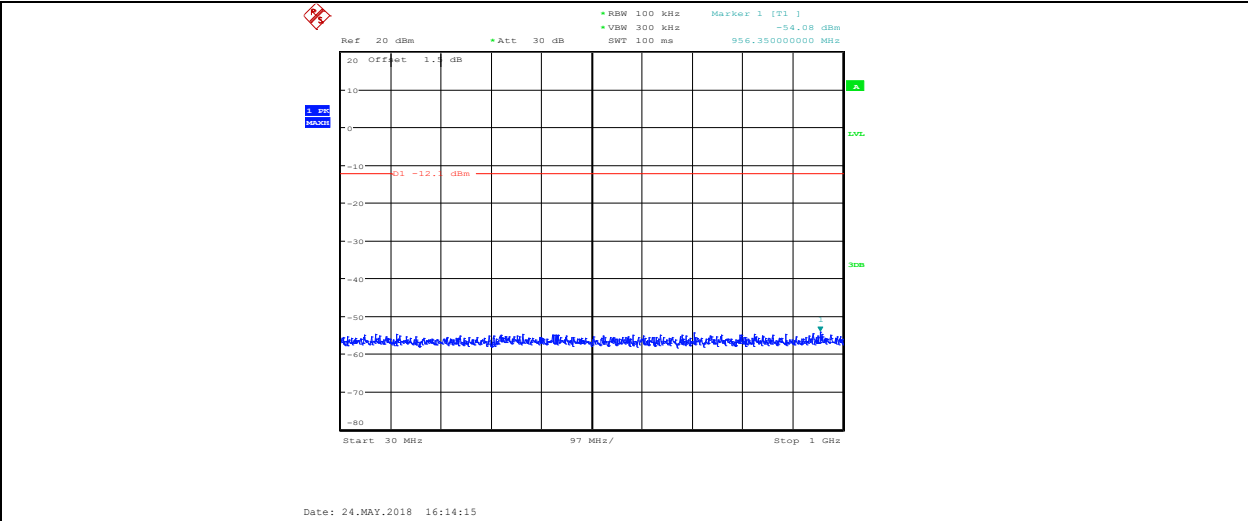


11N20 ANT1 2412 1000~26500

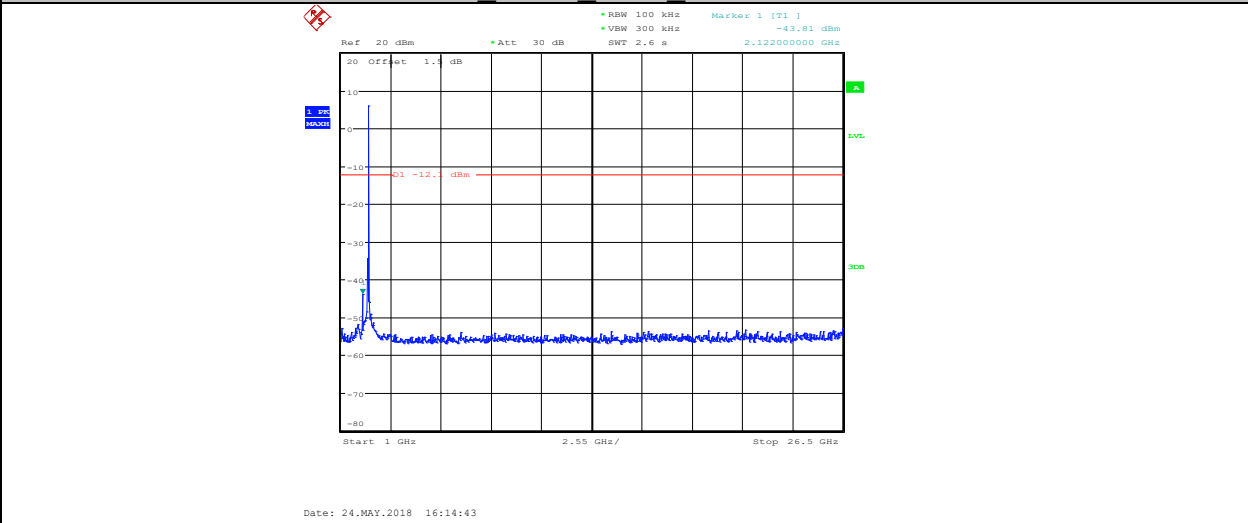


11N20 ANT2 2412 Ref

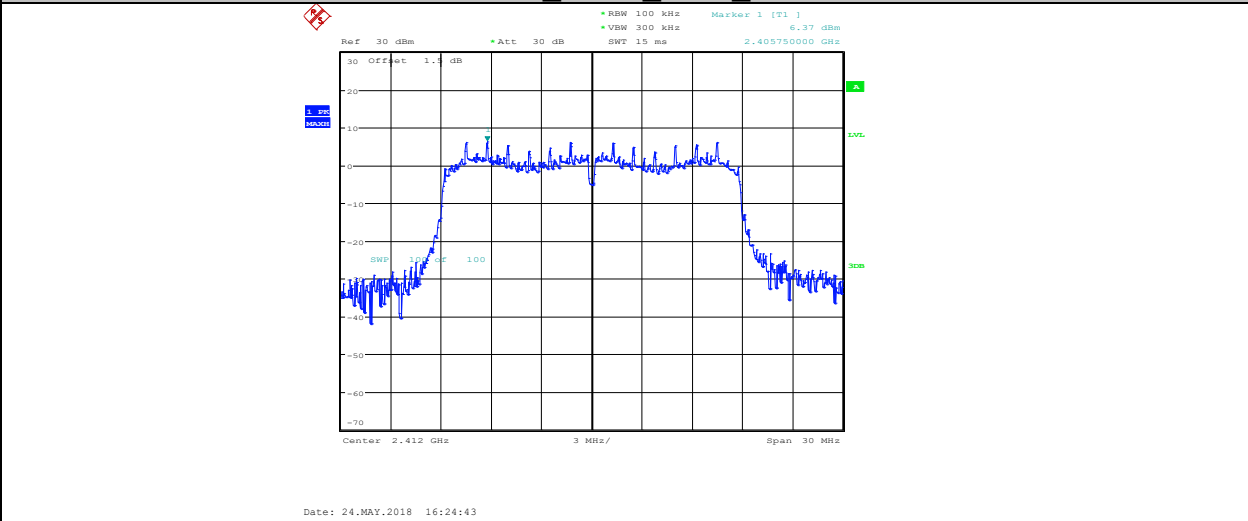


11N20 ANT2 2412 30~1000

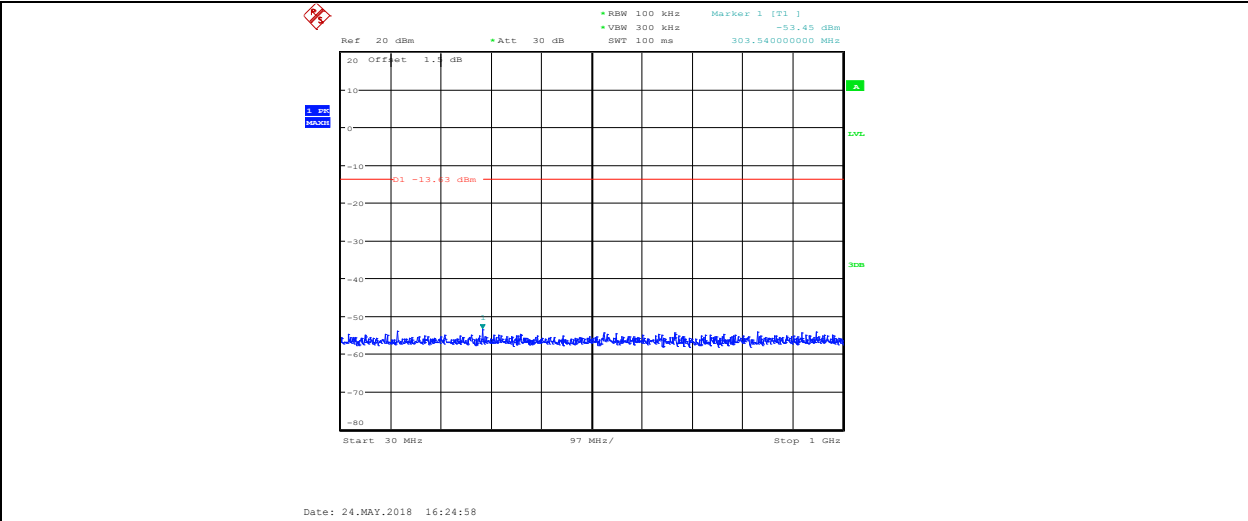


11N20 ANT2 2412 1000~26500

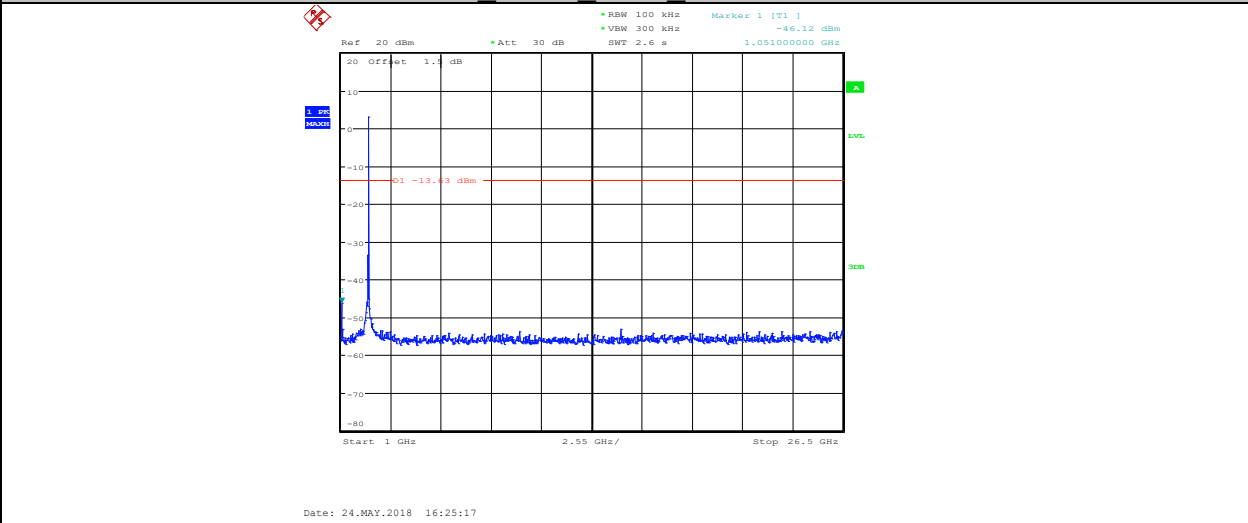


11N20 ANT1 2437 Ref

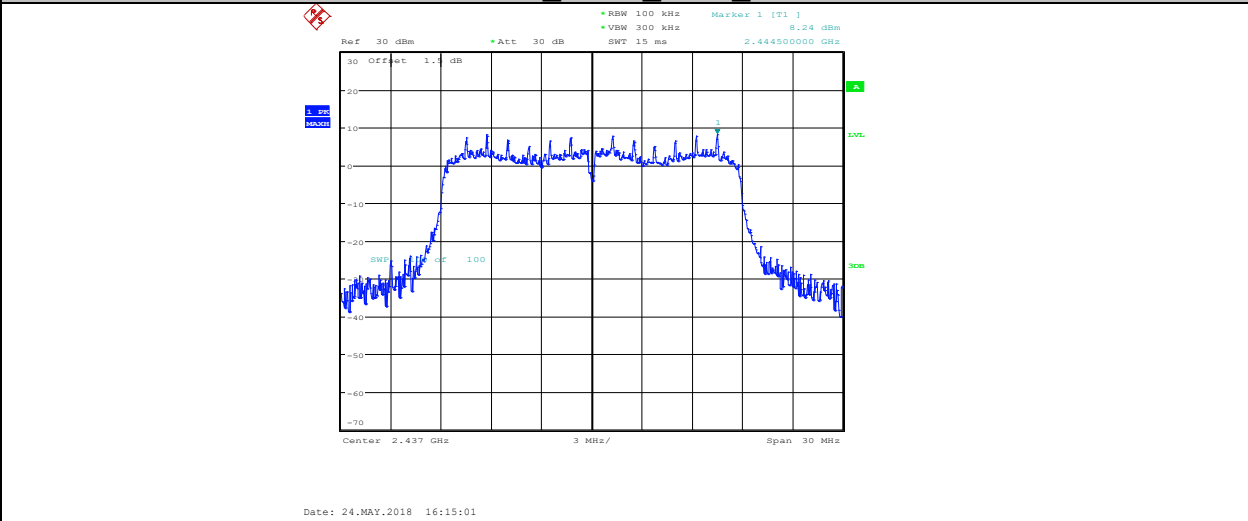


11N20 ANT1 2437 30~1000

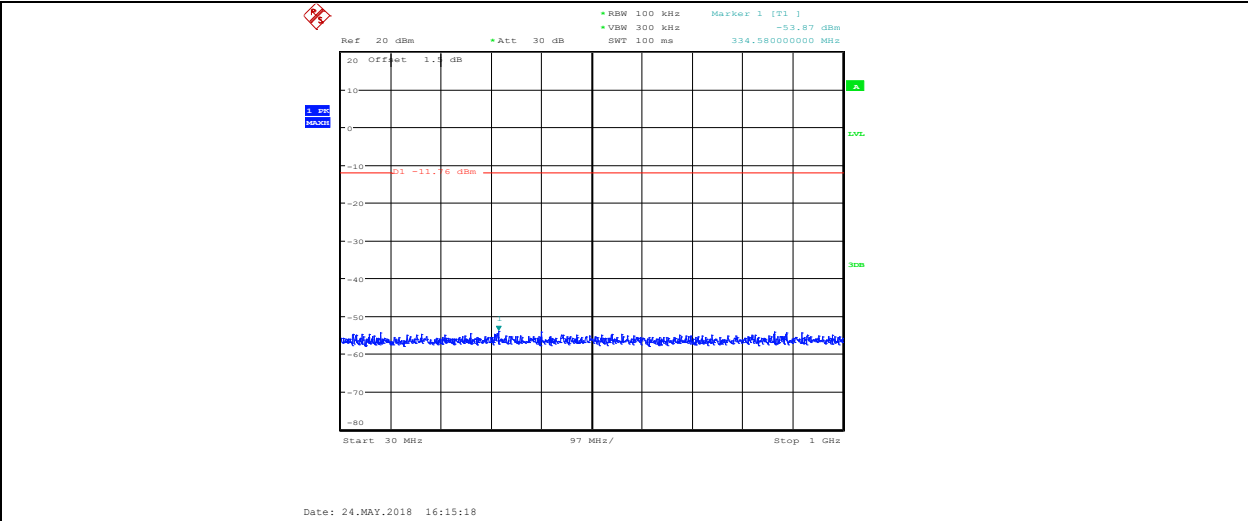


11N20 ANT1 2437 1000~26500

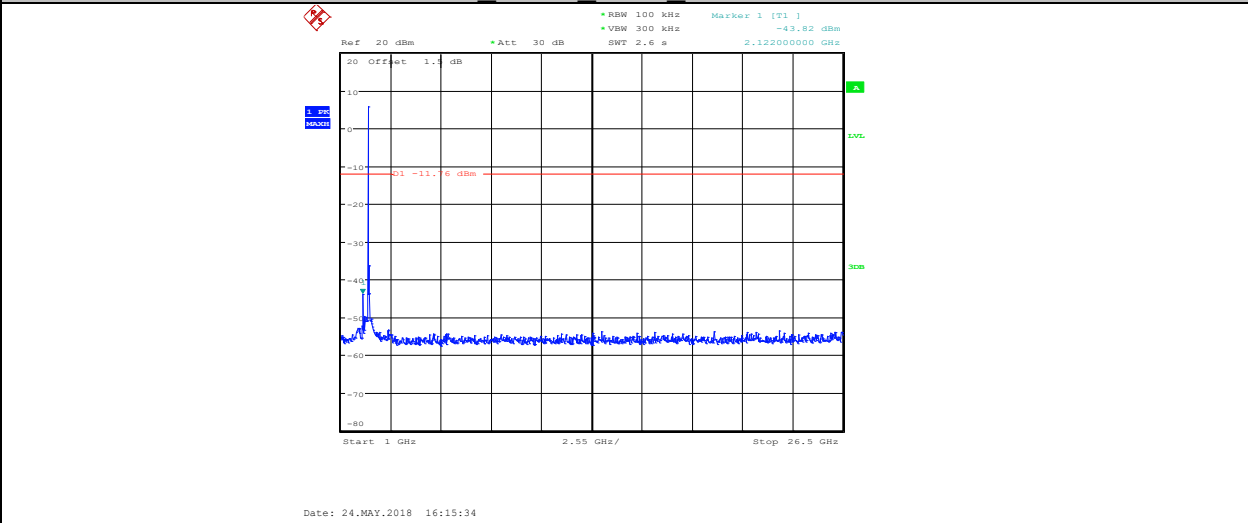


11N20 ANT2 2437 Ref

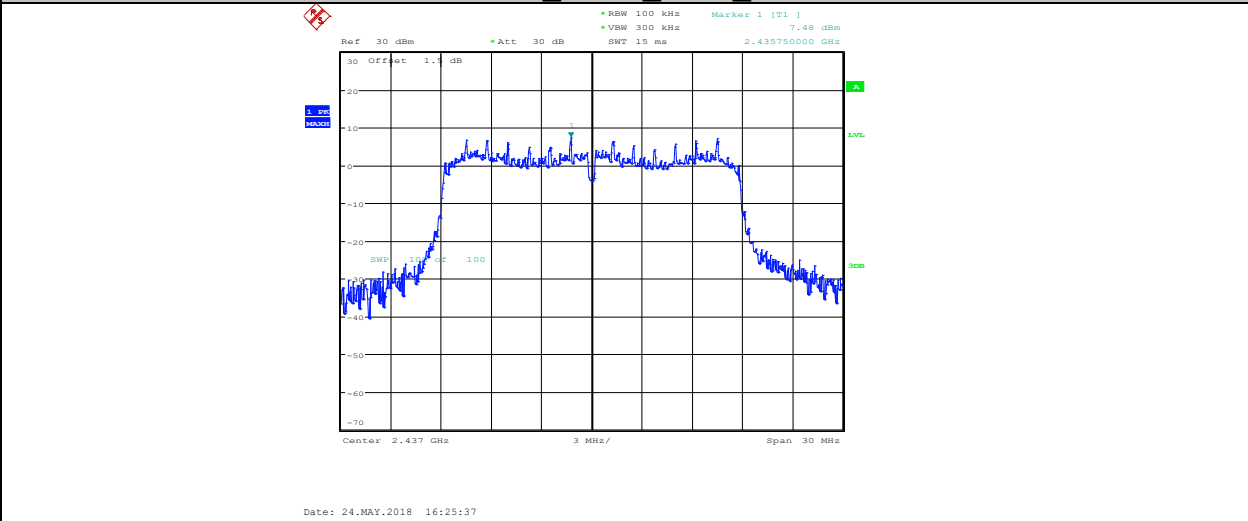


11N20 ANT2 2437 30~1000

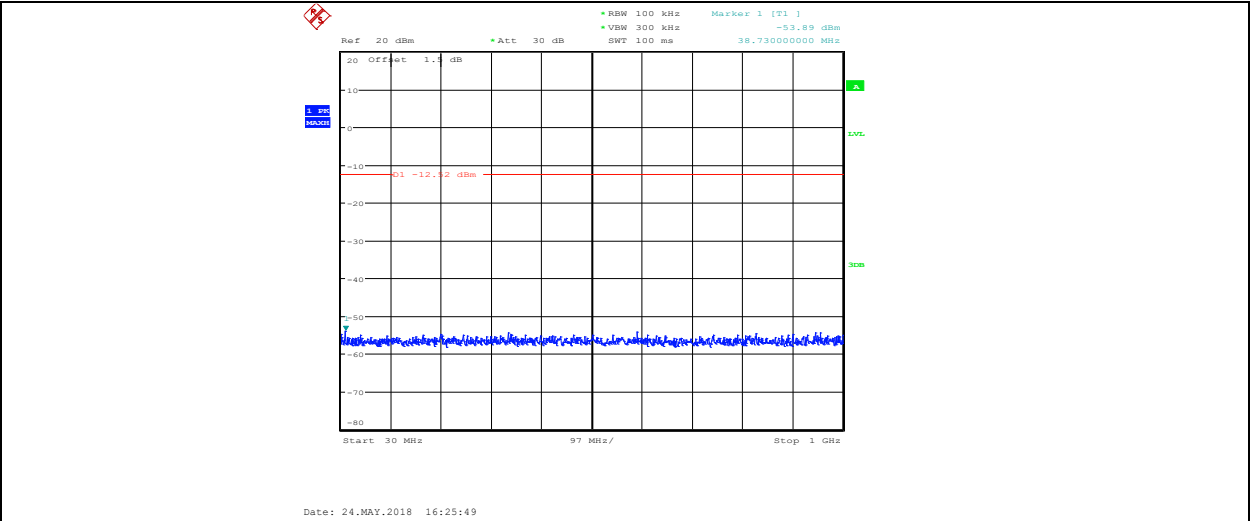


11N20 ANT2 2437 1000~26500

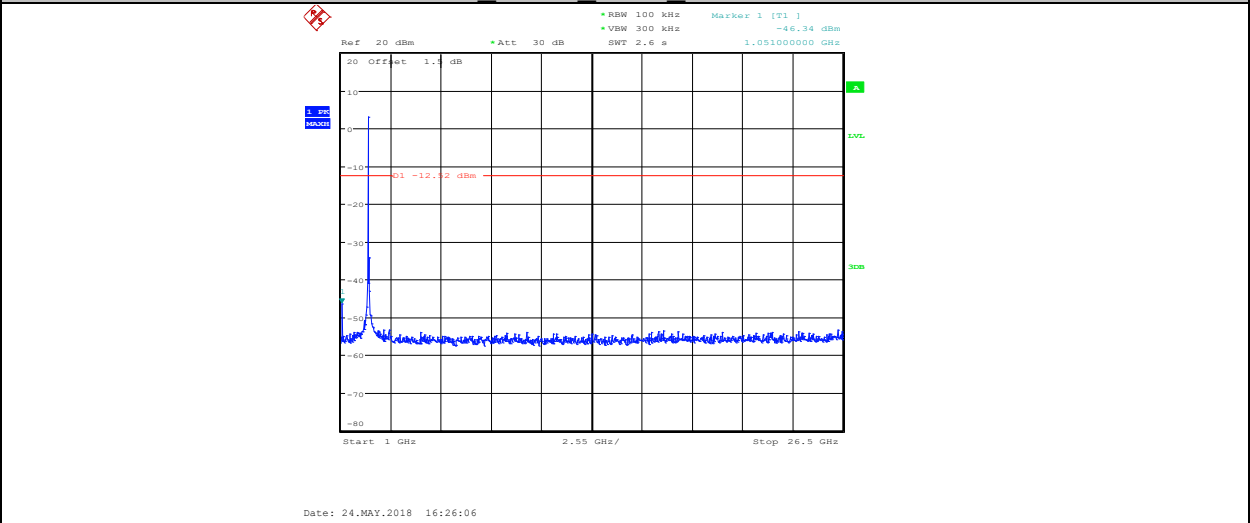


11N20 ANT1 2462 Ref

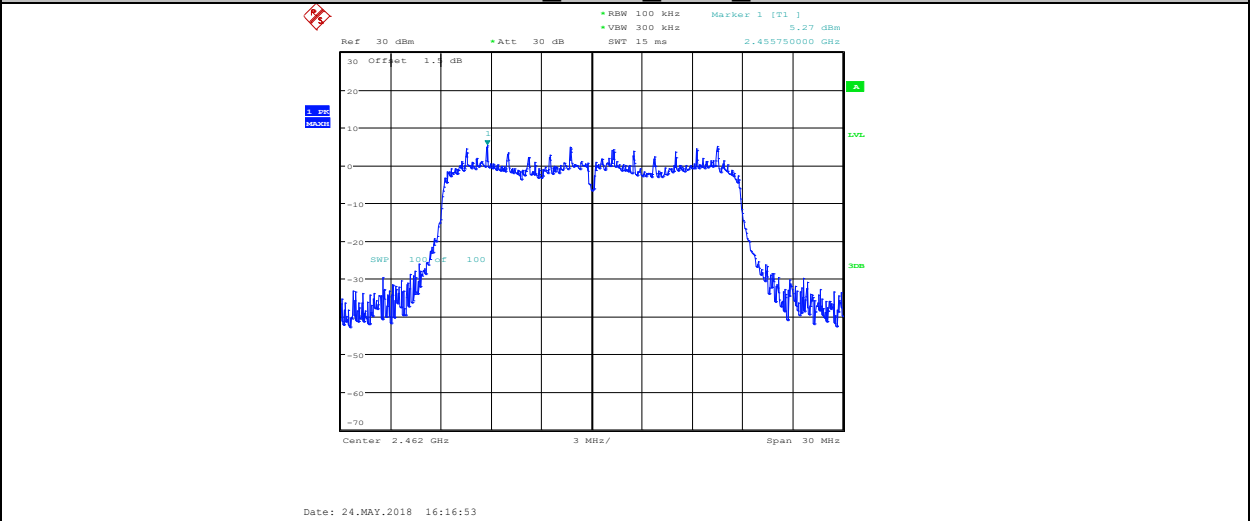


11N20 ANT1 2462 30~1000

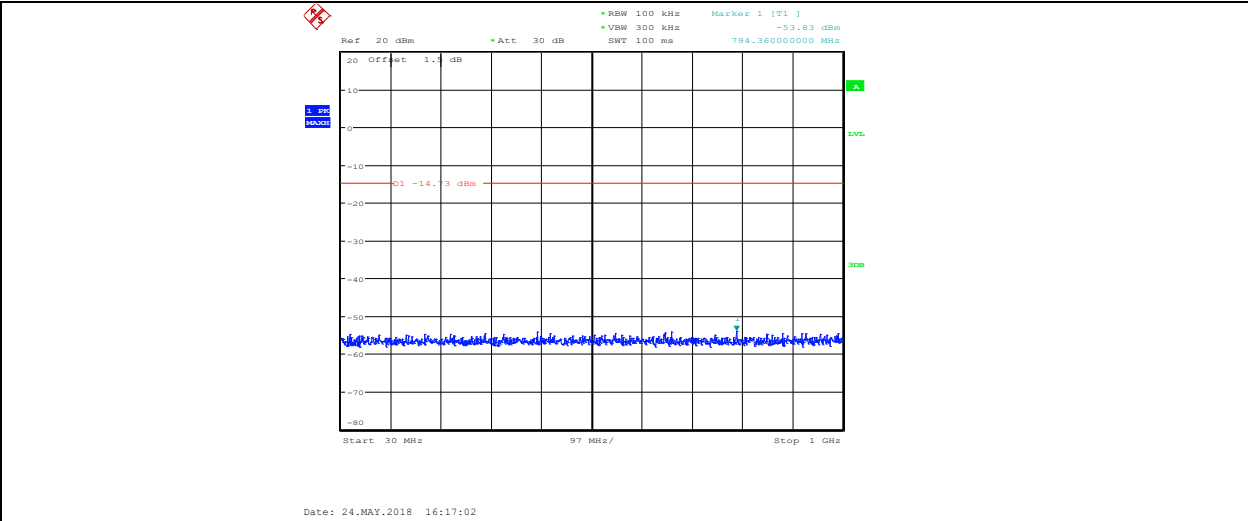


11N20 ANT1 2462 1000~26500

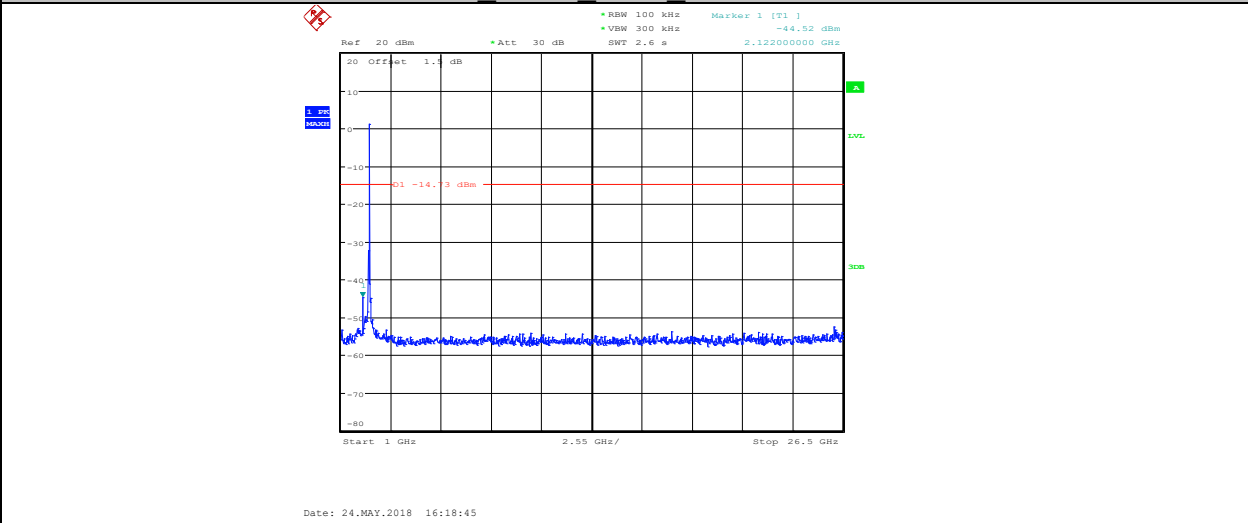


11N20 ANT2 2462 Ref

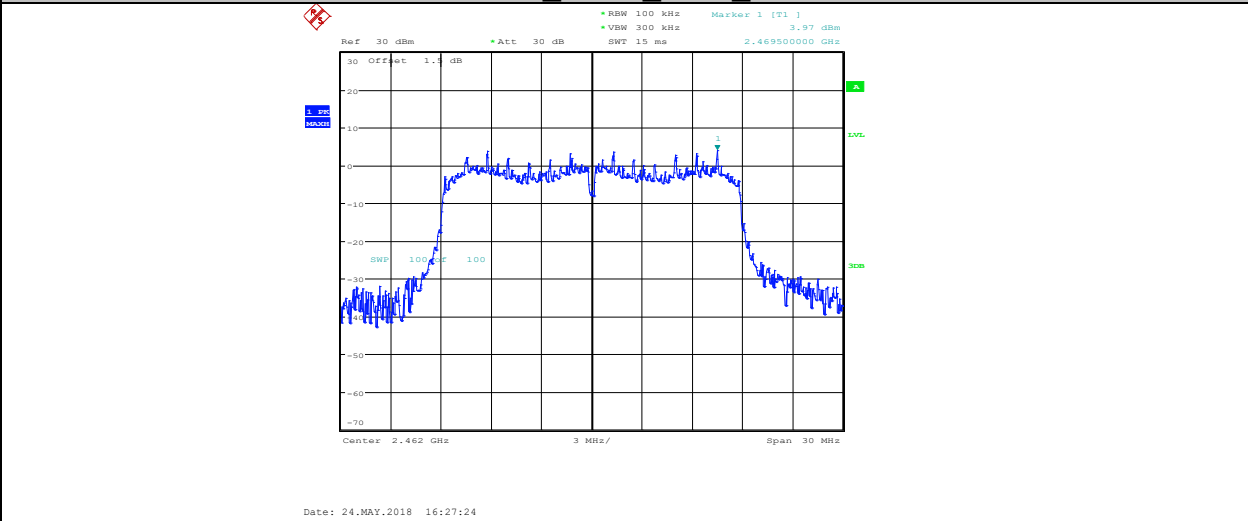


11N20 ANT2 2462 30~1000

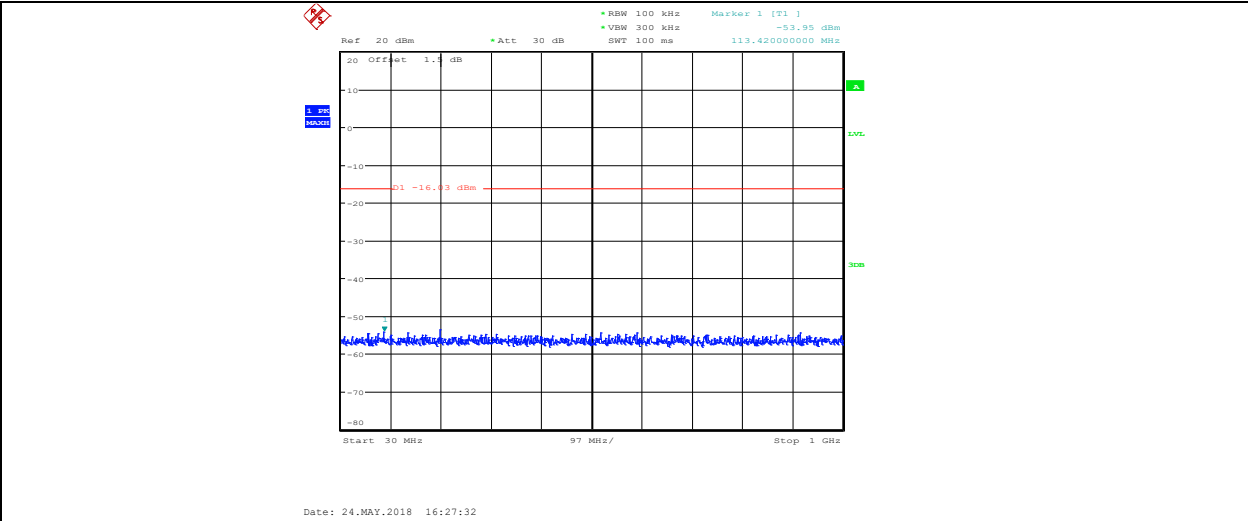


11N20 ANT2 2462 1000~26500

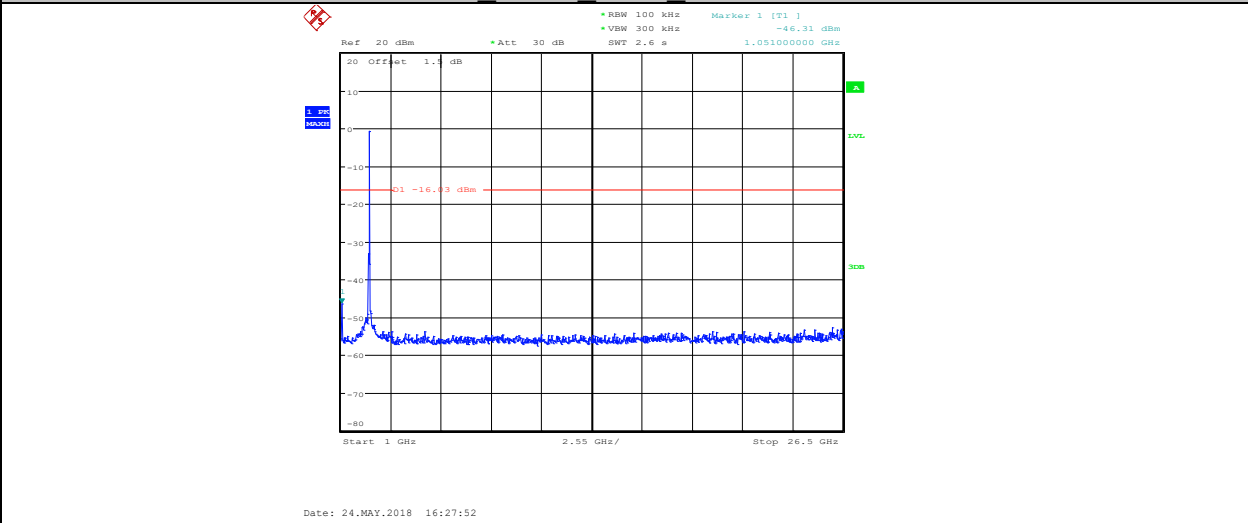

11N40 ANT1 2422 Ref

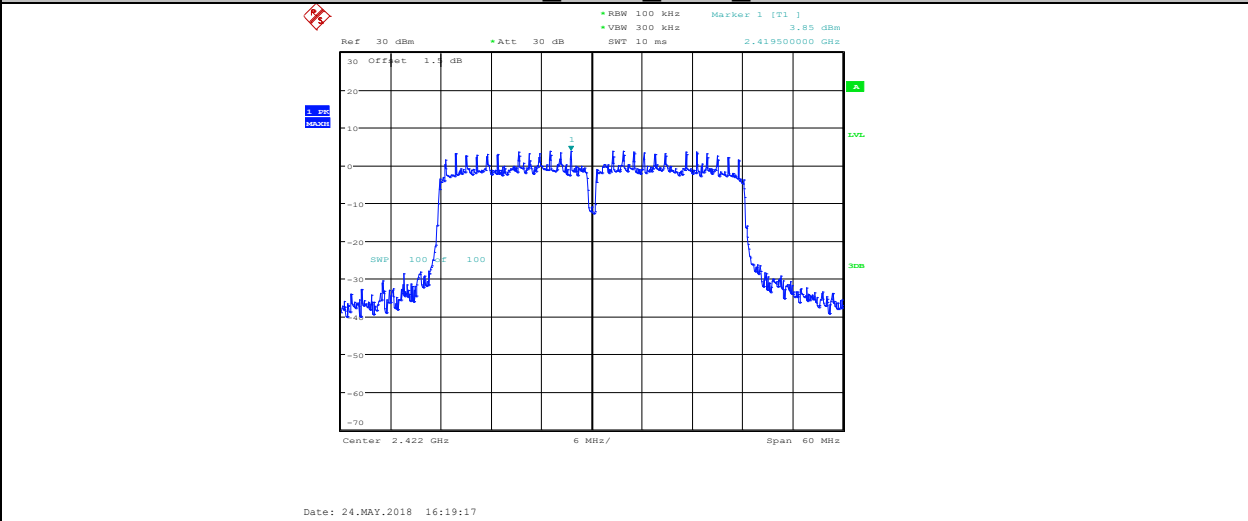


11N40 ANT1 2422 30~1000

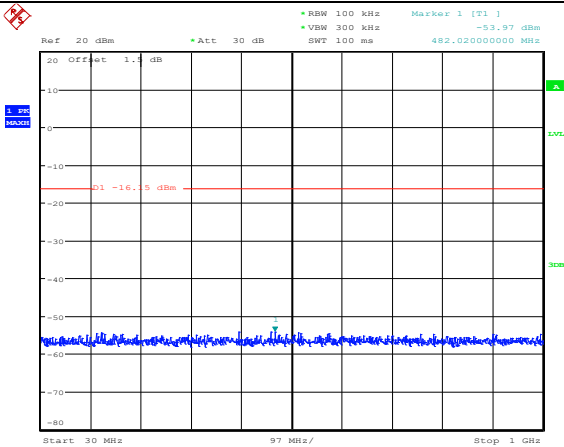


Date: 24.MAY.2018 16:19:29

11N40 ANT1 2422 1000~26500

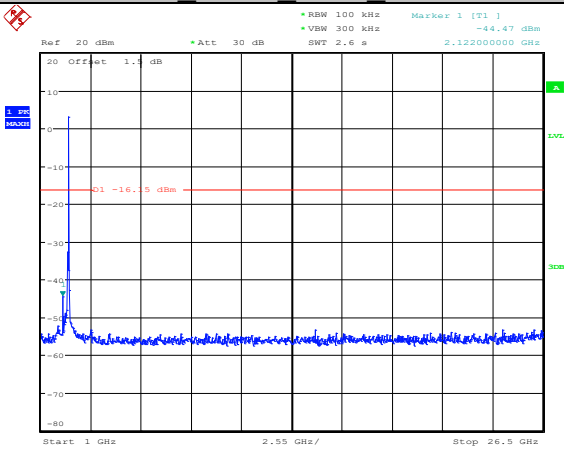


Date: 24.MAY.2018 16:19:45

11N40 ANT2 2422 Ref

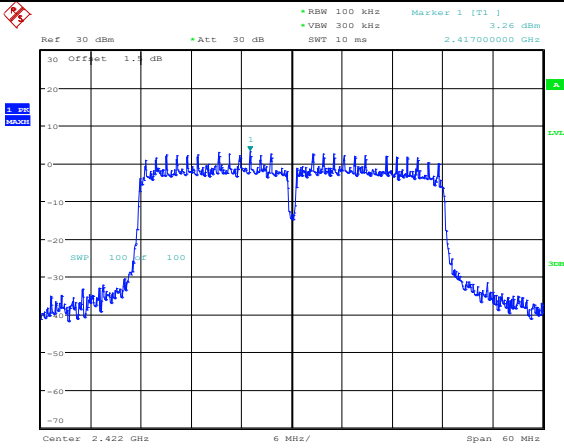


Date: 24.MAY.2018 16:28:18


11N40 ANT2 2422 30~1000

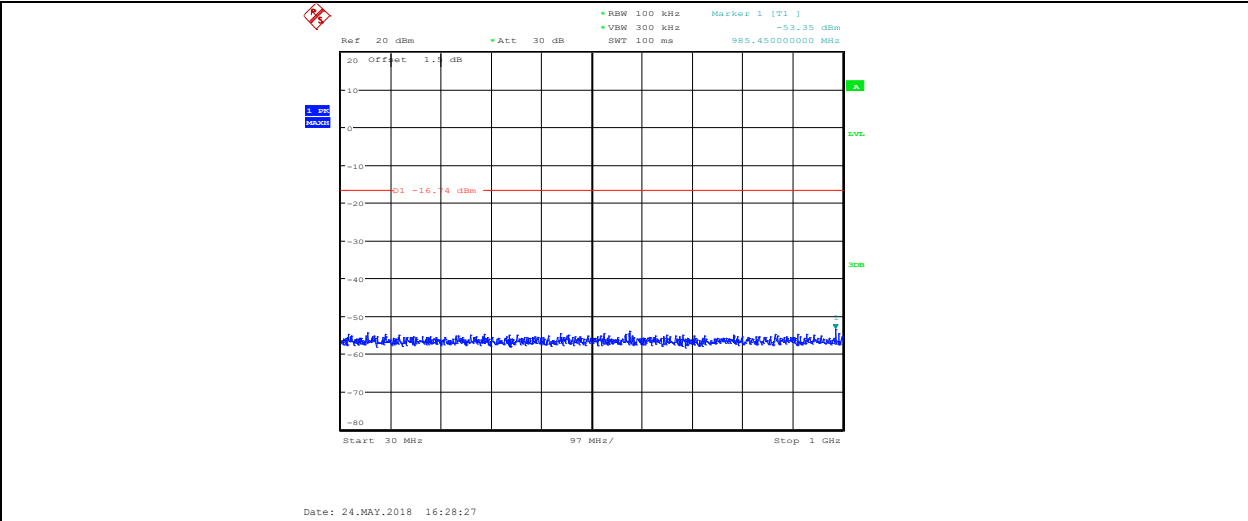


11N40 ANT2 2422 1000~26500

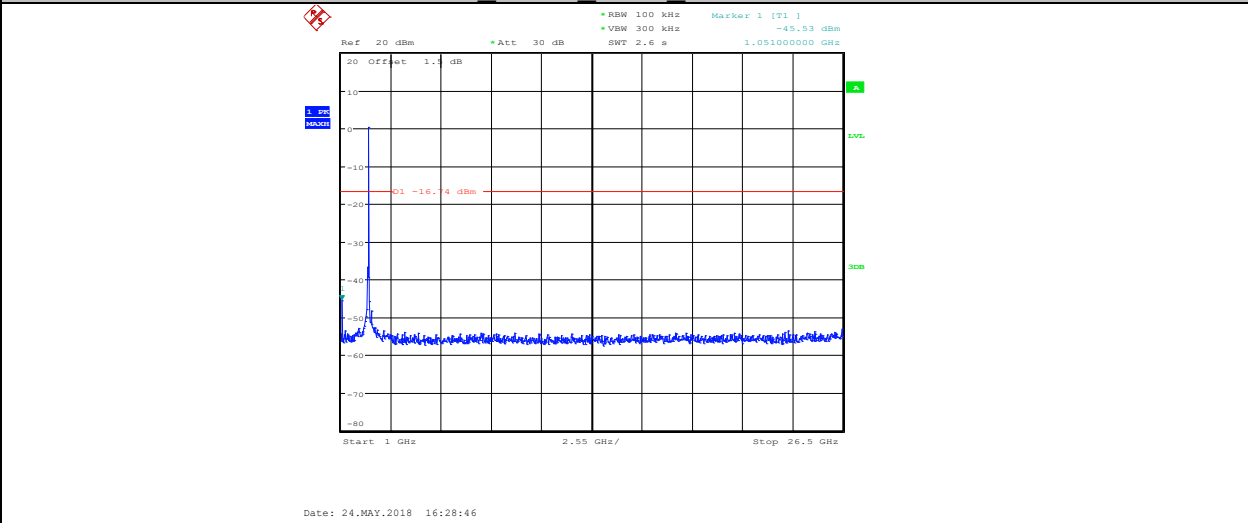

11N40 ANT1 2437 Ref

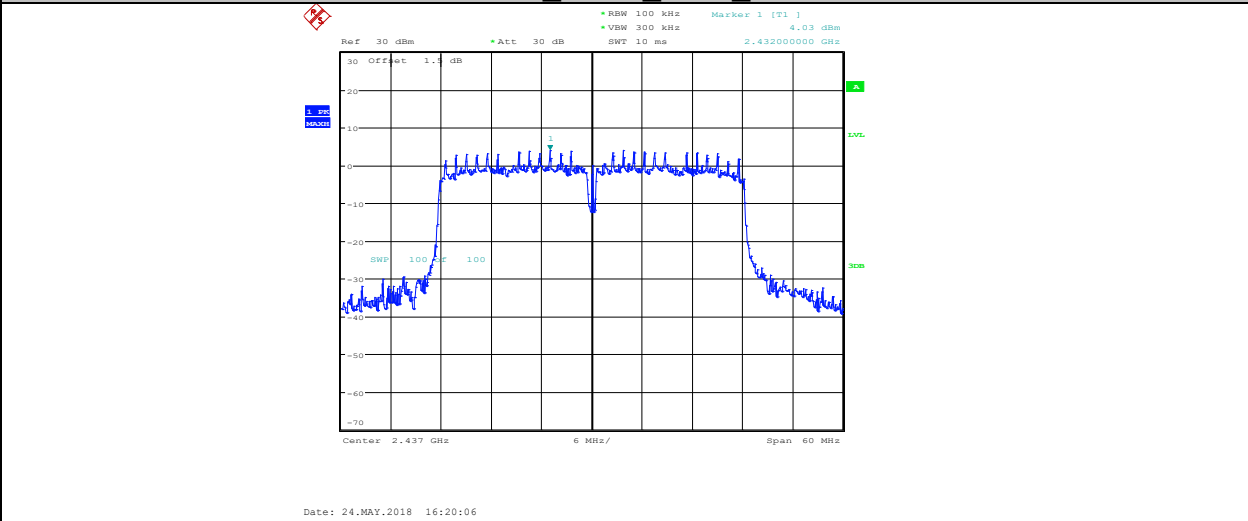


11N40 ANT1 2437 30~1000

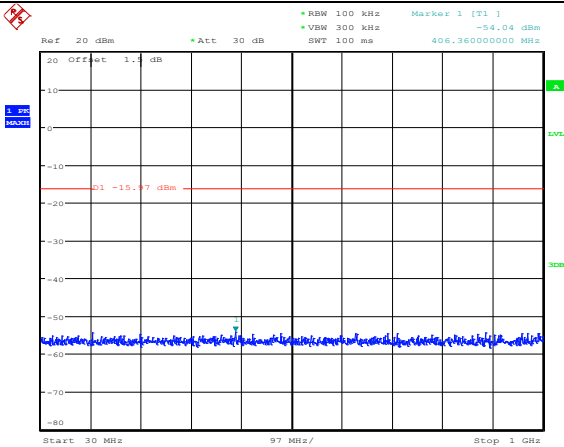


Date: 24.MAY.2018 16:20:15

11N40_ANT1_2437_1000~26500

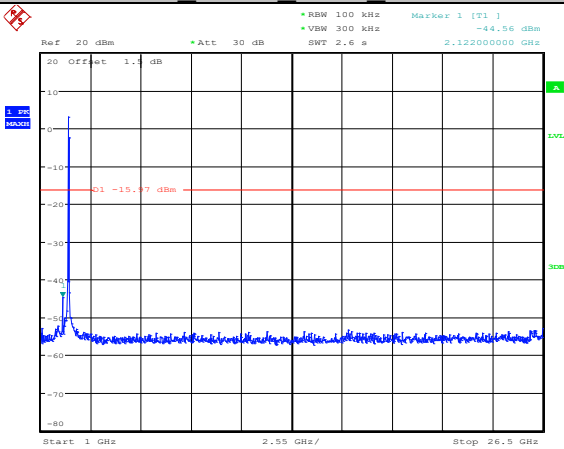


Date: 24.MAY.2018 16:20:36

11N40_ANT2_2437_Ref

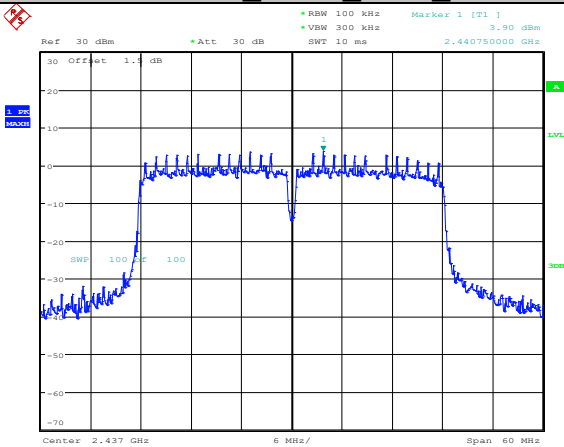


Date: 24.MAY.2018 16:29:06

11N40_ANT2_2437_30~1000

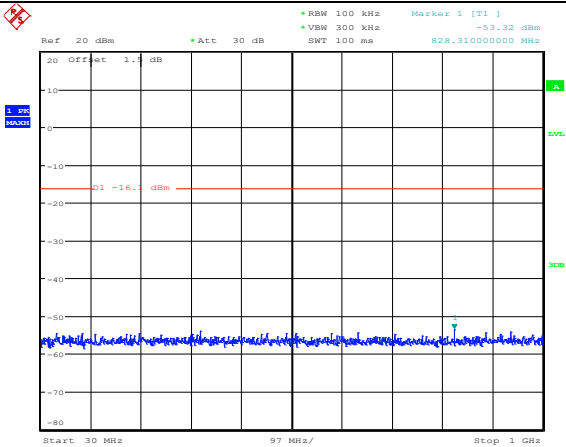


Date: 24.MAY.2018 16:29:15

11N40 ANT2 2437 1000~26500

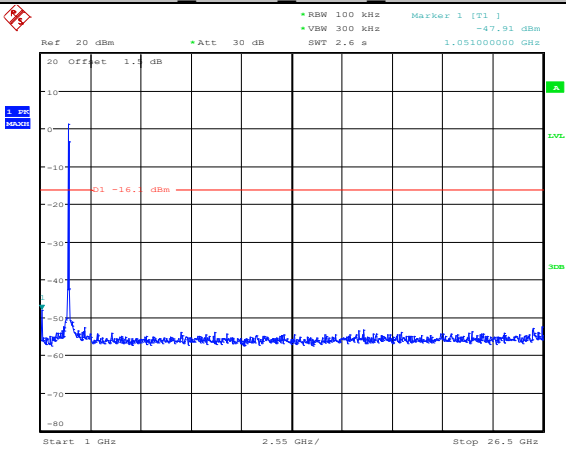


Date: 24.MAY.2018 16:29:31

11N40 ANT1 2452 Ref

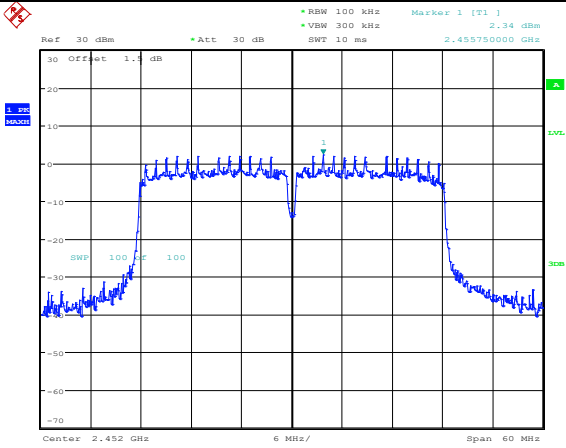


Date: 24.MAY.2018 16:23:35


11N40 ANT1 2452 30~1000

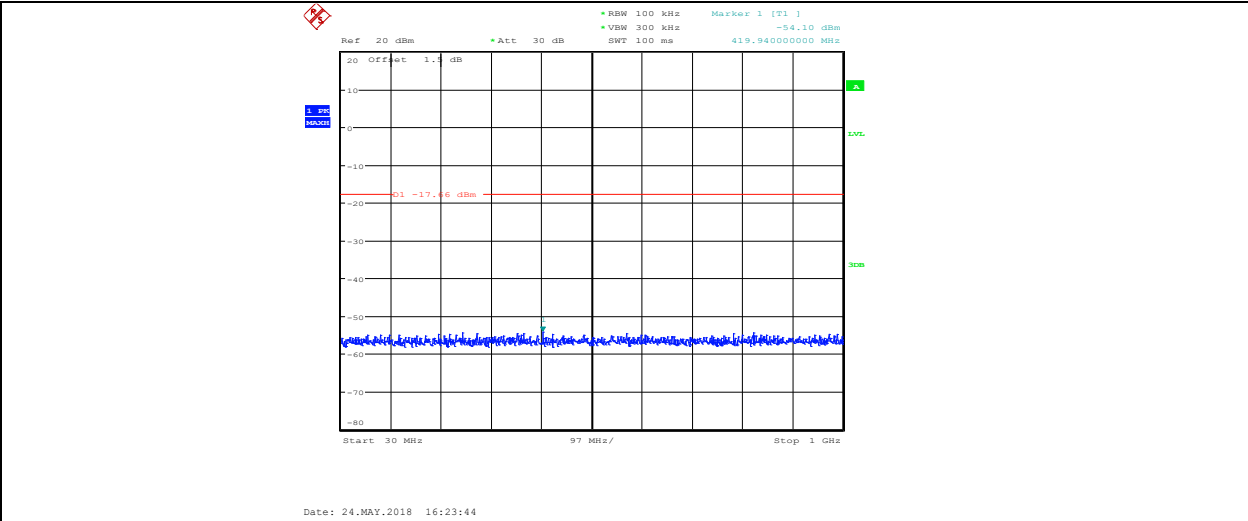

11N40 ANT1 2452 1000~26500

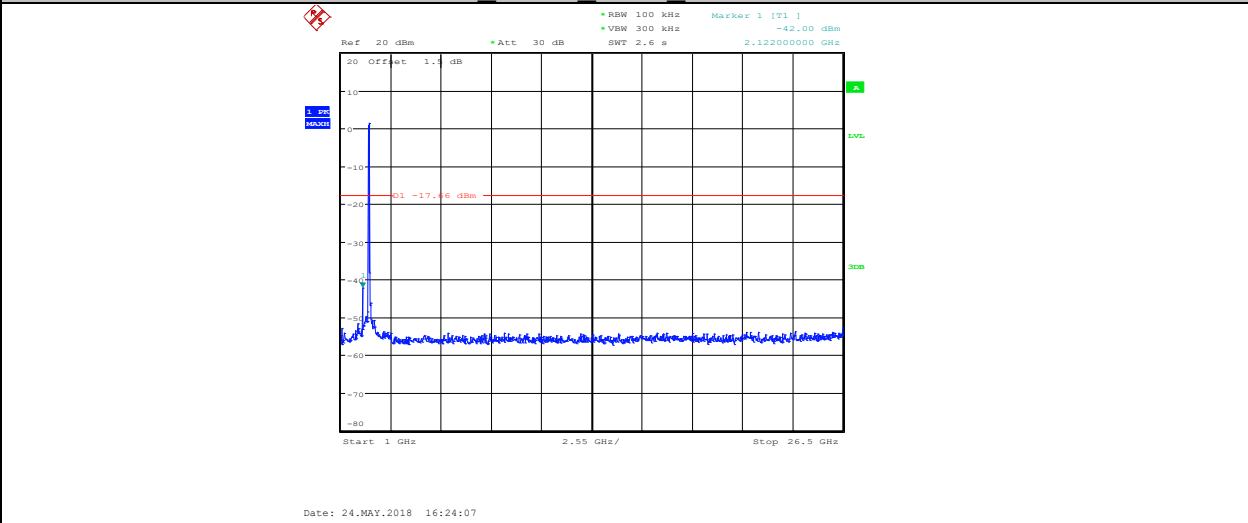

11N40 ANT2 2452 Ref

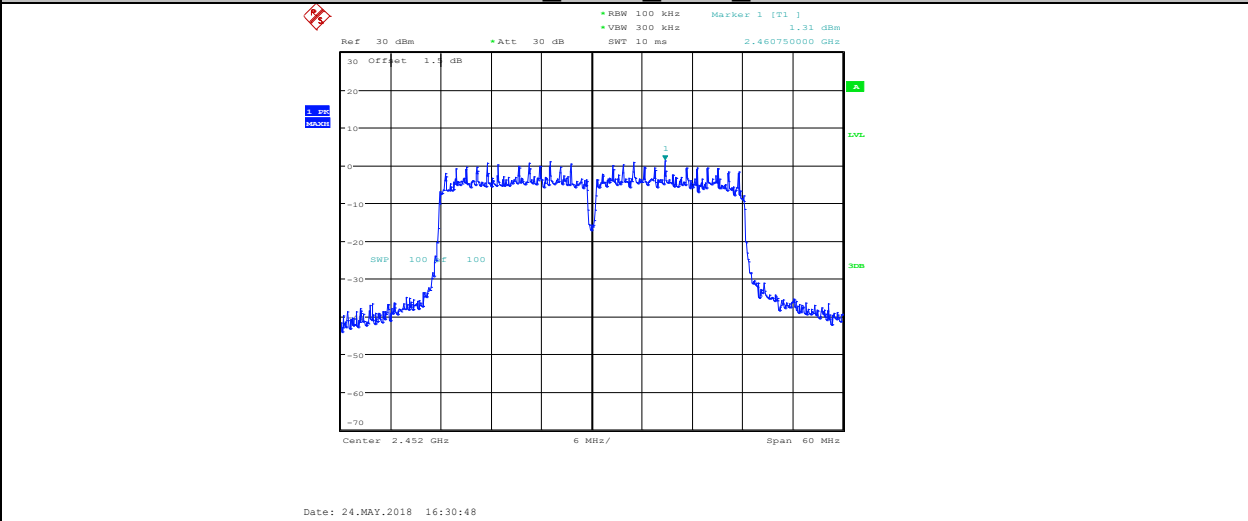

11N40 ANT2 2452 30~1000



Ref 20 dBm • Att 30 dB • RSW 100 kHz • VBW 300 kHz SWEPT 1 [T2 1] -46.29 dBm 1.051000000 GHz

20 Offset 1.5 dB

10

0

-10

-20

-30

-40

-50

-60

-70

-80

01 -18.69 dBm


Start 1 GHz 2.55 GHz/ Stop 26.5 GHz

Date: 24.MAY.2018 16:31:19


7. Radiated Spurious Emissions

7.1. Block diagram of test setup


In 3m Anechoic Chamber Test Setup Diagram for 9kHz-30MHz

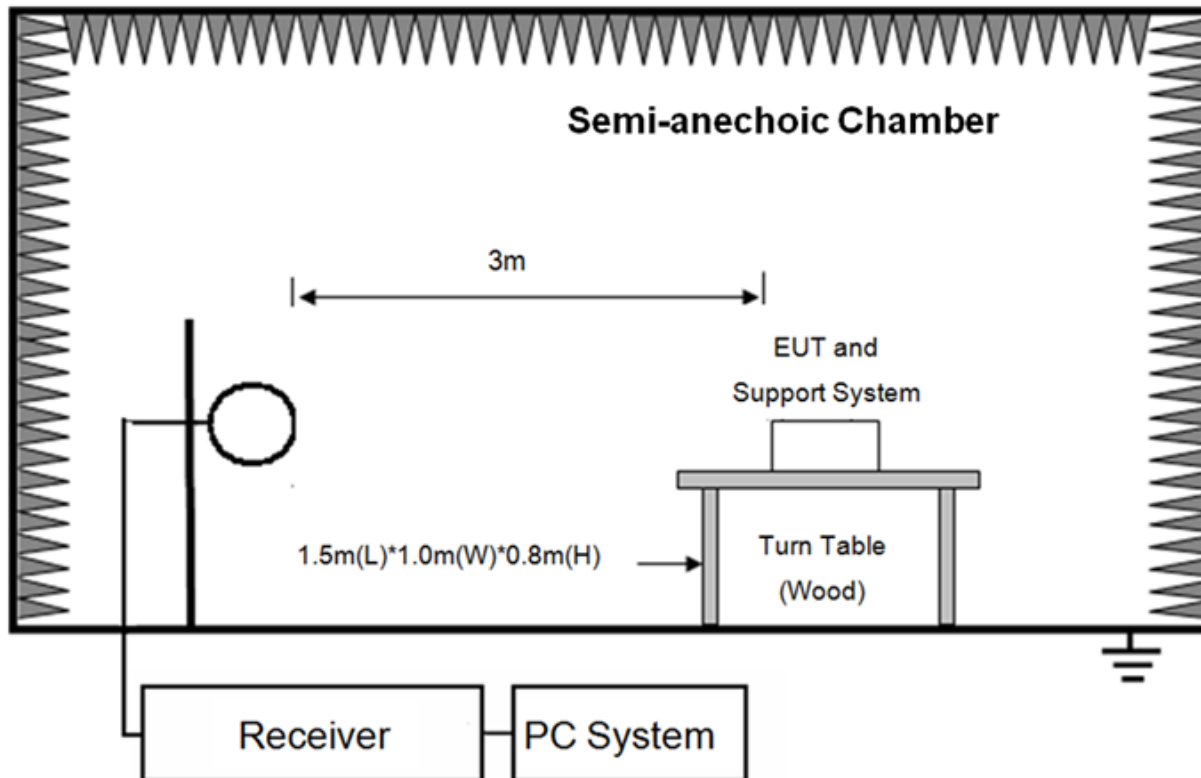

In 3m Anechoic Chamber Test Setup Diagram for 30MHz-1GHz

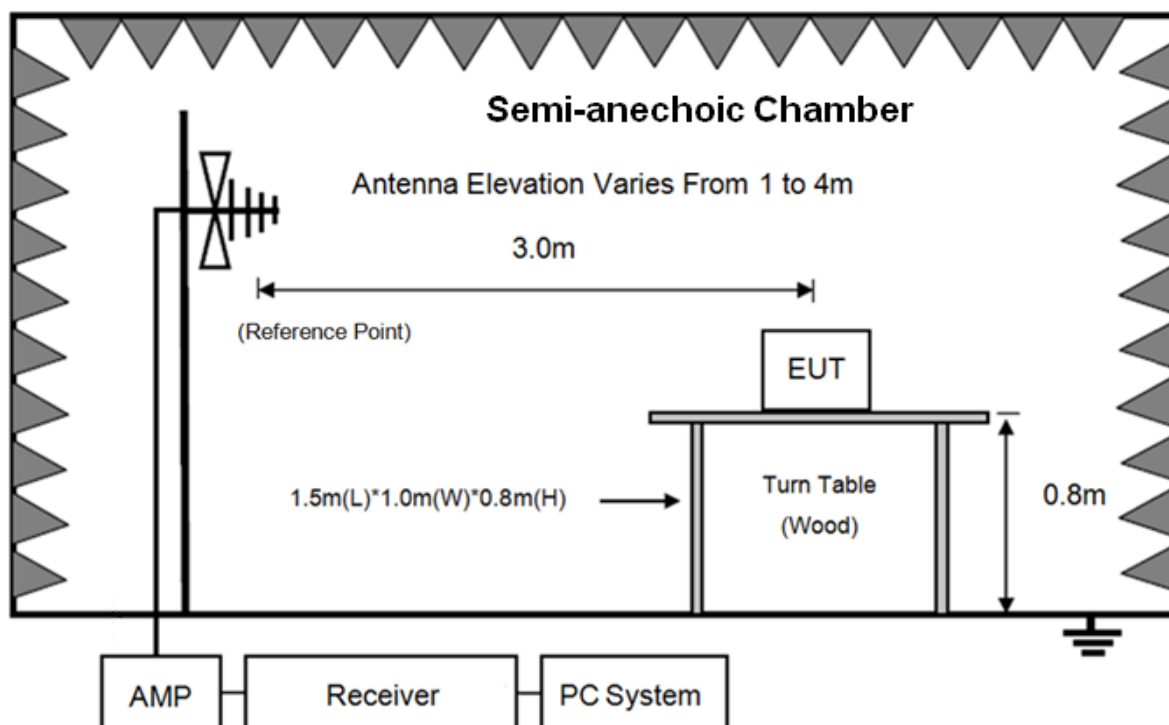

In 3m Anechoic Chamber Test Setup Diagram for frequency above 1GHz

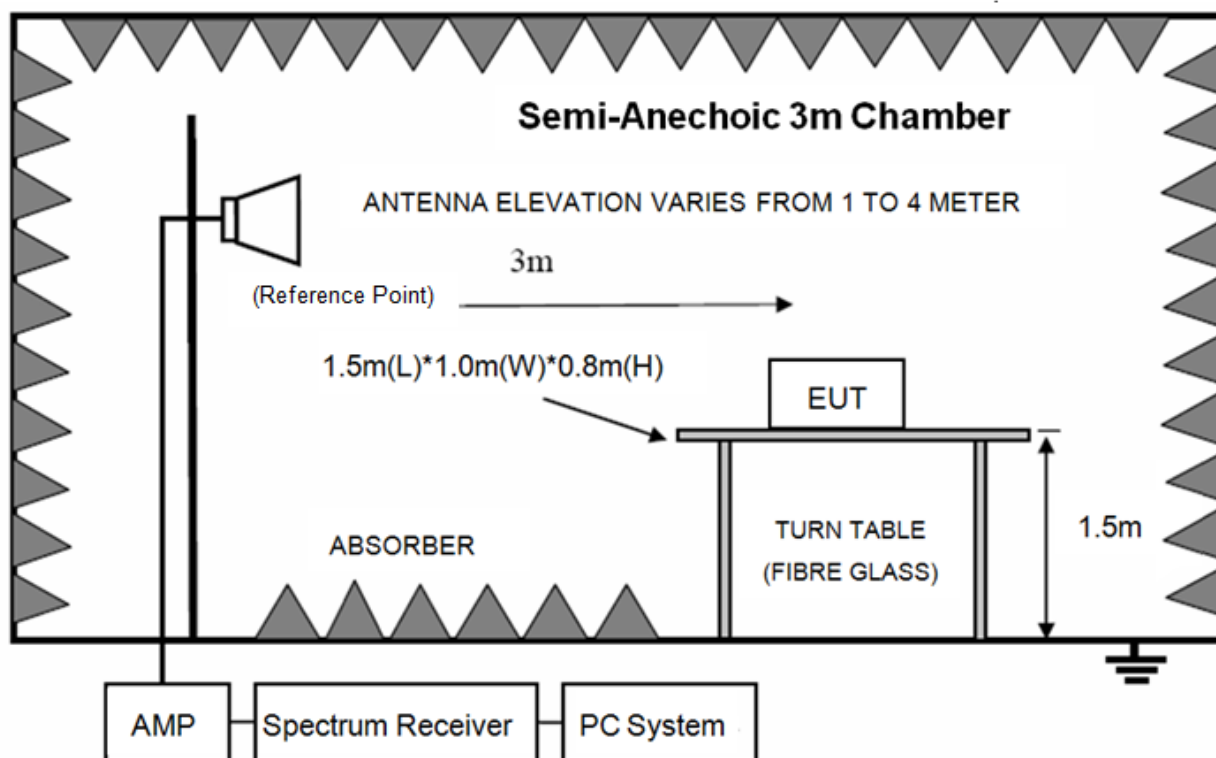

Note: For harmonic emissions test a appropriate high pass filter was inserted in the input port of AMP.

7.2. Limit

8.2.1 FCC 15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.1772&4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.2072&4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.G
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

8.2.2 FCC 15.209 Limit.

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		$\mu\text{V/m}$	$\text{dB}(\mu\text{V})/\text{m}$
0.009 ~ 0.490	300	$2400/F(\text{kHz})$	$67.6-20\log(F)$
0.490 ~ 1.705	30	$24000/F(\text{kHz})$	$87.6-20\log(F)$
1.705 ~ 30.0	30	30	29.54
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 $\text{dB}(\mu\text{V})/\text{m}$ (Peak) 54.0 $\text{dB}(\mu\text{V})/\text{m}$ (Average)	

Note: (1) The emission limits shown in the above table are based on measurements employing a CISPR QP detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000MHz. Radiated emissions limits in these three bands are based on measurements employing an average detector.

(2) At frequencies below 30MHz, measurement may be performed at a distance closer than that specified, and the limit at closer measurement distance can be extrapolated by below formula:

$$\text{Limit}_{3\text{m}}(\text{dB}\mu\text{V/m}) = \text{Limit}_{30\text{m}}(\text{dB}\mu\text{V/m}) + 40\log(30\text{m}/3\text{m})$$

8.2.3 Limit for this EUT

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

7.3. Test Procedure

(1) EUT height should be 0.8m for below 1GHz at a semi-anechoic chamber while EUT height should be 1.5m for above 1GHz at full chamber or semi-anechoic chamber ground with absorbers.

(2) The antenna used as below table.

Test frequency range	Test antenna used	Measuring distance
9kHz-30MHz	Active Loop antenna	3 m
30MHz-1GHz	Trilog Broadband Antenna	3 m
1GHz-18GHz	Double Ridged Horn Antenna(1GHz-18GHz)	3 m
18GHz-40GHz	Horn Antenna(18GHz-40GHz)	1 m

According ANSI C63.10:2013 clause 6.4.4.2 and 6.5.3, for measurements below 30 MHz, the loop antenna was positioned with its plane vertical from the EUT and rotated about its vertical axis for maximum response at each azimuth position around the EUT. And the loop antenna also be positioned with its plane horizontal at the specified distance from the EUT. The center of the loop is 1 m above the ground. for measurement above 30MHz, the Trilog Broadband Antenna or Horn Antenna was located

3m from EUT, Measurements were made with the antenna positioned in both the horizontal and vertical planes of

Polarization, and the measurement antenna was varied from 1 m to 4 m. in height above the reference ground plane to obtain the maximum signal strength.

(3) Below pre-scan procedure was first performed in order to find prominent frequency spectrum radiated emissions from 9kHz to 25GHz:

(a) Scanning the peak frequency spectrum with the antenna specified in step (3), and the EUT was rotated 360 degree, the antenna height was varied from 1m to 4m(Except loop antenna, it's fixed 1m above ground.)

(b) Change work frequency or channel of device if practicable.

(c) Change modulation type of device if practicable.

(d) Change power supply range from 85% to 115% of the rated supply voltage

(e) Rotated EUT though three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions.

Spectrum frequency from 9kHz to 25GHz (tenth harmonic of fundamental frequency) was investigated, and no any obvious emission were detected from 18GHz to 25GHz, so below final test was performed with frequency range from 9kHz to 18GHz.

(4) For final emissions measurements at each frequency of interest, the EUT was rotated and the antenna height was varied between 1m and 4m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.10 2013 on Radiated Emission test.

(5) The emissions from 9kHz to 1GHz were measured based on CISPR QP detector except for the frequency bands 9-90kHz, 110-490kHz, for emissions from 9kHz-90kHz,110kHz-490kHz and above 1GHz were measured based on average detector, for emissions above 1GHz, peak emissions also be measured and need comply with Peak limit.

(6) The emissions from 9kHz to 1GHz, QP or average values were measured with EMI receiver with below RBW

Frequency band	RBW
9kHz-150kHz	200Hz
150kHz-30MHz	9kHz
30MHz-1GHz	120kHz

(7) For emissions above 1GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1MHz, VBW is set at 3MHz for Peak measure; RMS detector RBW 1MHz VBW 3MHz for Average measure(according ANSI C63.10:2013 clause 4.2.3.2.3 procedure for average measure).

7.4. Test result

PASS. (See below detailed test result)

All the emissions except fundamental emission from 9kHz to 25GHz were comply with 15.209 limit.

Note1: According exploratory test no any obvious emission were detected from 9kHz to 30MHz and 18GHz to 25GHz, so the final test was performed with frequency range from 30MHz to 18GHz and recorded in below.

Note2: For emissions below 1GHz, according exploratory explorer test, when change Tx mode and channel, have no distinct influence on emissions level, so for emissions below 1GHz, the final test was only performed with EUT working in ANT1, 11b, Tx CH6 mode.


Radiated Emission test (below 1GHz)

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#
Test Date : 2018-05-15
EUT : Wi-Fi ROUTER
Power Supply : AC 120V/60Hz
Condition : Temp:24.5'C,Humi:55%,
 Press:100.1kPa
Memo :

D:\2018 RE1# Report Data\Q18042804-1E M2\FCC
 BELOW1G.EM6
Tested By : Talent
Model Number : M2
Test Mode : Tx mode
Antenna/Distance : 2017 VULB 9163 1#/3m/VERTICAL

Data: 1

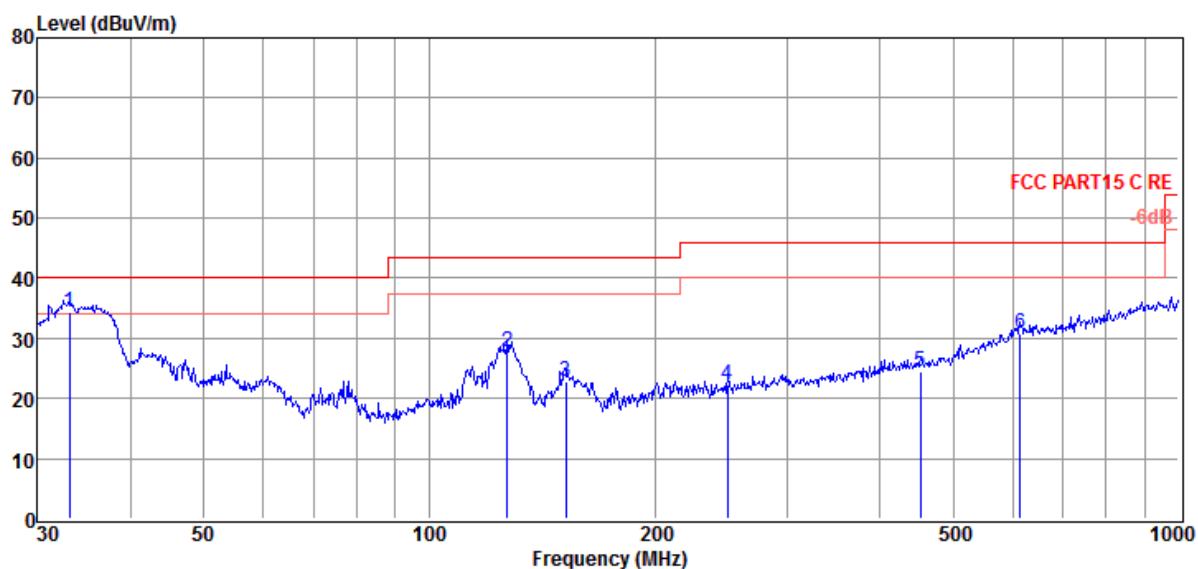

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	33.10	19.36	11.15	0.00	3.81	34.32	40.00	-5.68	QP	VERTICAL
2	127.22	14.60	8.52	0.00	4.62	27.74	43.50	-15.76	QP	VERTICAL
3	152.13	9.79	8.15	0.00	4.78	22.72	43.50	-20.78	QP	VERTICAL
4	250.30	4.39	12.50	0.00	5.30	22.19	46.00	-23.81	QP	VERTICAL
5	452.72	2.52	16.48	0.00	5.60	24.60	46.00	-21.40	QP	VERTICAL
6	614.21	4.50	19.45	0.00	6.72	30.67	46.00	-15.33	QP	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2018 RE1# Report Data\Q18042804-1E M2\FCC
BELOW1G.EM6

Test Date : 2018-05-15

Tested By : Talent

EUT : Wi-Fi ROUTER

Model Number : M2

Power Supply : AC 120V/60Hz


Test Mode : Tx mode

Condition : Temp:24.5'C,Humi:55%,
Press:100.1kPa

Antenna/Distance : 2017 VULB 9163 1#/3m/HORIZONTAL

Memo :

Data: 2

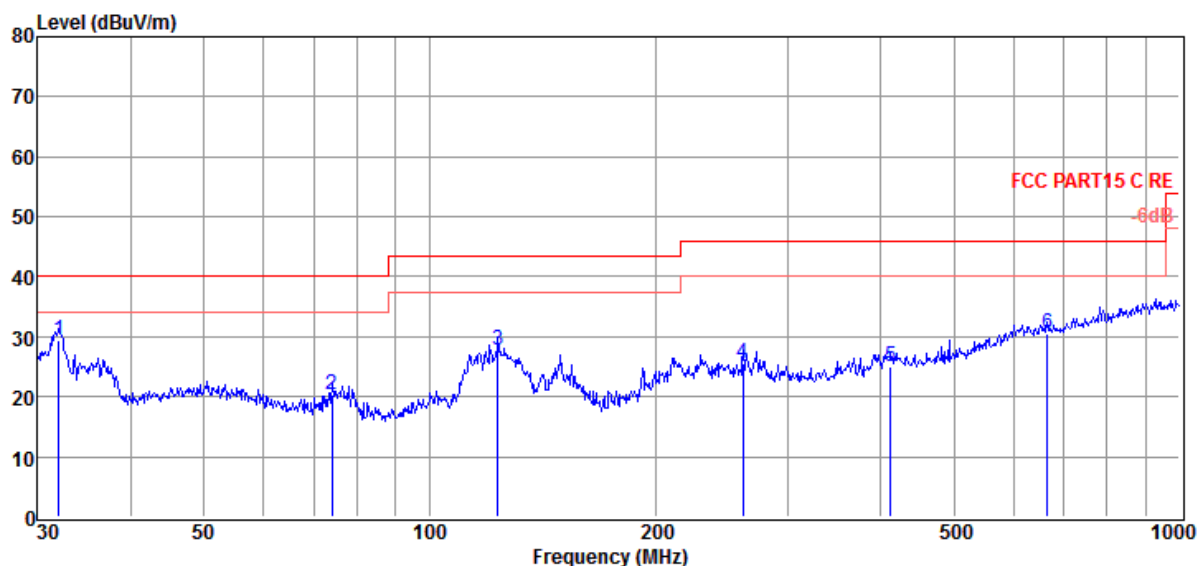

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	32.07	14.76	10.91	0.00	3.80	29.47	40.00	-10.53	QP	HORIZONTAL
2	74.14	7.63	8.51	0.00	4.21	20.35	40.00	-19.65	QP	HORIZONTAL
3	123.27	14.19	8.89	0.00	4.59	27.67	43.50	-15.83	QP	HORIZONTAL
4	261.98	7.62	12.70	0.00	5.35	25.67	46.00	-20.33	QP	HORIZONTAL
5	411.82	3.77	15.50	0.00	5.87	25.14	46.00	-20.86	QP	HORIZONTAL
6	665.80	3.89	19.60	0.00	6.90	30.39	46.00	-15.61	QP	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2019 Report test data\Q19080706-1E M2\FCC BELOW
1G.EM6

Test Date : 2019-08-22

Tested By : Huang

EUT : Wi-Fi ROUTER

Model Number : M2


Power Supply : AC 120V/60Hz with new Adapter

Test Mode : Tx mode

Condition : Temp:24.5'C,Humi:55%,Press:100.1kPa

Antenna/Distance : 2018 VULB 9163 1#/3m/VERTICAL

Memo :

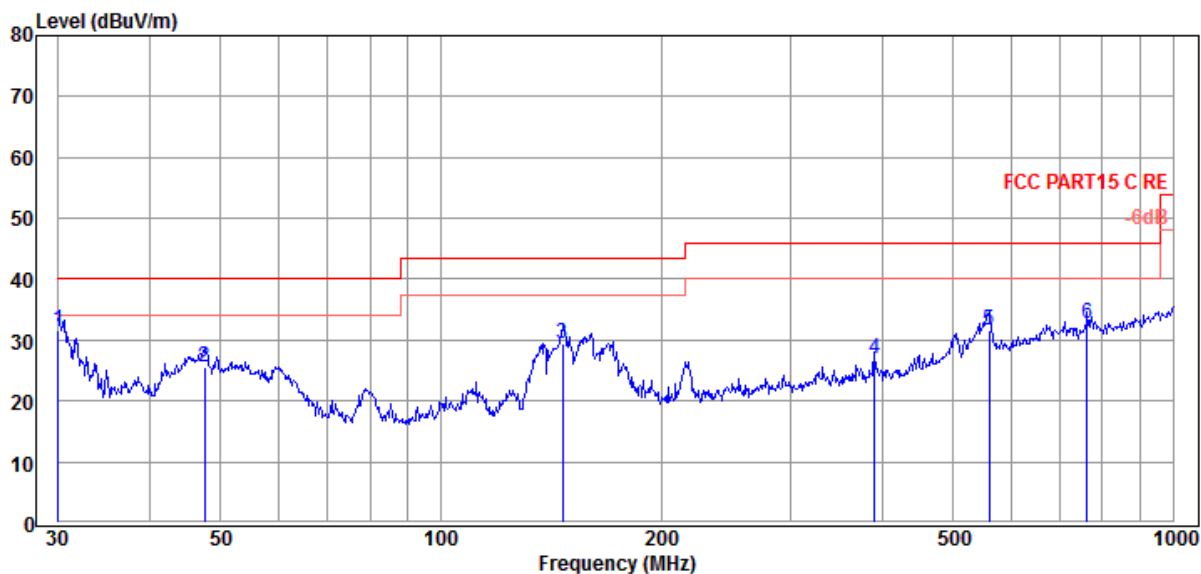

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	30.00	16.91	11.10	3.64	31.65	40.00	-8.35	QP	VERTICAL
2	47.49	7.51	14.32	3.85	25.68	40.00	-14.32	QP	VERTICAL
3	146.37	16.45	8.51	4.49	29.45	43.50	-14.05	QP	VERTICAL
4	390.72	6.03	15.47	5.48	26.98	46.00	-19.02	QP	VERTICAL
5	560.69	7.70	17.98	5.98	31.66	46.00	-14.34	QP	VERTICAL
6	763.38	5.69	20.49	6.53	32.71	46.00	-13.29	QP	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2019 Report test data\Q19080706-1E M2\FCC BELOW
1G.EM6

EUT : Wi-Fi ROUTER

Model Number : M2

EUT : WI-FI ROUTER

Model Number : M2


Power Supply : AC 120V/60Hz with new Adapter

Test Mode : Tx mode

Condition : Temp:24.5'C,Humi:55%,Press:100.1kPa

Antenna/Distance : 2018 VULB 9163 1#/3m/HORIZONTAL

Memo :

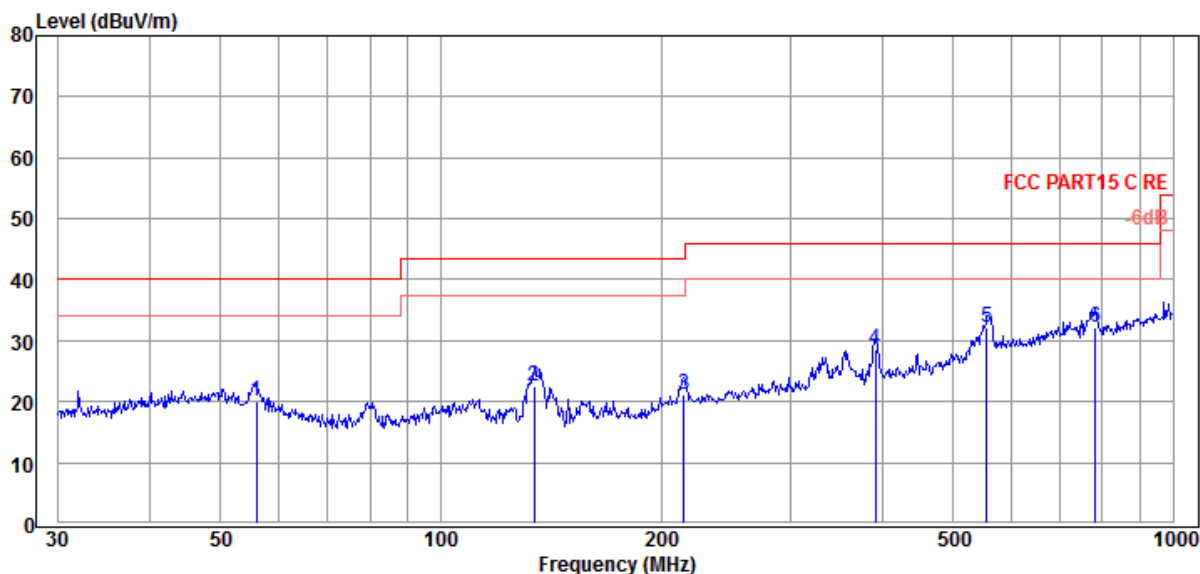

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	56.00	3.59	12.61	3.92	20.12	40.00	-19.88	QP	HORIZONTAL
2	134.09	8.93	9.17	4.39	22.49	43.50	-21.01	QP	HORIZONTAL
3	214.51	4.33	11.85	4.87	21.05	43.50	-22.45	QP	HORIZONTAL
4	392.10	7.71	15.49	5.48	28.68	46.00	-17.32	QP	HORIZONTAL
5	556.77	8.28	17.93	5.98	32.19	46.00	-13.81	QP	HORIZONTAL
6	782.35	4.96	20.60	6.57	32.13	46.00	-13.87	QP	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

Radiated Emission test (above 1GHz)

Freq (MHz)	Read level (dBμV)	Antenna Factor (dB/m)	PRM Factor (dB)	Cable Loss (dB)	Result Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector type	Polarization
11b CH1									
4824.00	52.93	34.72	43.91	7.40	51.14	74.00	-22.86	Peak	HORIZONTAL
6100.00	46.86	35.70	43.23	8.22	47.55	74.00	-26.45	Peak	HORIZONTAL
7018.00	46.17	36.81	43.51	8.35	47.82	74.00	-26.18	Peak	HORIZONTAL
8633.00	45.54	37.35	43.99	9.95	48.85	74.00	-25.15	Peak	HORIZONTAL
9993.00	47.06	38.19	44.40	10.89	51.74	74.00	-22.26	Peak	HORIZONTAL
12016.00	45.01	38.90	44.10	10.98	50.79	74.00	-23.21	Peak	HORIZONTAL
4824.00	55.18	34.72	43.91	7.40	53.39	54.00	-0.61	Average	VERTICAL
4824.00	55.80	34.72	43.91	7.40	54.01	74.00	-19.99	Peak	VERTICAL
5964.00	45.91	35.69	43.22	8.19	46.57	74.00	-27.43	Peak	VERTICAL
7392.00	46.14	36.96	43.62	8.68	48.16	74.00	-25.84	Peak	VERTICAL
8480.00	44.93	37.30	43.94	9.78	48.07	74.00	-25.93	Peak	VERTICAL
9823.00	45.62	38.02	44.35	10.80	50.09	74.00	-23.91	Peak	VERTICAL
10877.00	48.17	38.73	44.27	11.04	53.67	74.00	-20.33	Peak	VERTICAL
11b CH6									
4874.00	51.12	34.80	43.87	7.46	49.51	74.00	-24.49	Peak	HORIZONTAL
6253.00	46.90	35.70	43.28	8.24	47.56	74.00	-26.44	Peak	HORIZONTAL
8633.00	46.33	37.35	43.99	9.95	49.64	74.00	-24.36	Peak	HORIZONTAL
9500.00	46.35	37.70	44.25	10.63	50.43	74.00	-23.57	Peak	HORIZONTAL
10860.00	47.99	38.72	44.27	11.04	53.48	74.00	-20.52	Peak	HORIZONTAL
12679.00	44.80	38.98	44.27	11.23	50.74	74.00	-23.26	Peak	HORIZONTAL
4874.00	55.31	34.80	43.87	7.46	53.70	74.00	-20.30	Peak	VERTICAL
6049.00	46.80	35.70	43.21	8.22	47.51	74.00	-26.49	Peak	VERTICAL
7443.00	46.32	36.98	43.63	8.73	48.40	74.00	-25.60	Peak	VERTICAL
9041.00	45.68	37.52	44.11	10.39	49.48	74.00	-24.52	Peak	VERTICAL
9517.00	46.03	37.72	44.26	10.64	50.13	74.00	-23.87	Peak	VERTICAL
10758.00	47.90	38.65	44.29	11.02	53.28	74.00	-20.72	Peak	VERTICAL
11b CH11									
4519.00	49.10	34.23	44.09	7.10	46.34	74.00	-27.66	Peak	HORIZONTAL
5913.00	47.18	35.67	43.25	8.16	47.76	74.00	-26.24	Peak	HORIZONTAL
7834.00	45.33	37.13	43.75	9.08	47.79	74.00	-26.21	Peak	HORIZONTAL
9058.00	45.73	37.52	44.12	10.40	49.53	74.00	-24.47	Peak	HORIZONTAL
10656.00	47.88	38.59	44.30	11.00	53.17	74.00	-20.83	Peak	HORIZONTAL
12356.00	45.32	38.83	44.19	11.11	51.07	74.00	-22.93	Peak	HORIZONTAL
4927.00	53.98	34.88	43.84	7.51	52.53	74.00	-21.47	Peak	VERTICAL
7188.00	45.92	36.88	43.56	8.50	47.74	74.00	-26.26	Peak	VERTICAL
8735.00	46.24	37.39	44.02	10.07	49.68	74.00	-24.32	Peak	VERTICAL
10384.00	47.29	38.43	44.34	10.96	52.34	74.00	-21.66	Peak	VERTICAL
10656.00	48.33	38.59	44.30	11.00	53.62	74.00	-20.38	Peak	VERTICAL
12560.00	45.43	38.86	44.24	11.18	51.23	74.00	-22.77	Peak	VERTICAL

Note: 1.30MHz~25GHz: (Scan with 11b mode ANT 1 and ANT 2, 11g mode ANT 1 and ANT 2, 11n HT20 mode ANT 1 and ANT 2, 11n HT40 mode ANT 1 and ANT 2, the worst case is 11b ANT 2 mode)


2. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. For emissions above 1GHz. If peak results comply with AV limit, AV Result is deemed to comply with AV limit.

8. Radiated Band Edge Compliance

8.1. Block diagram of test setup

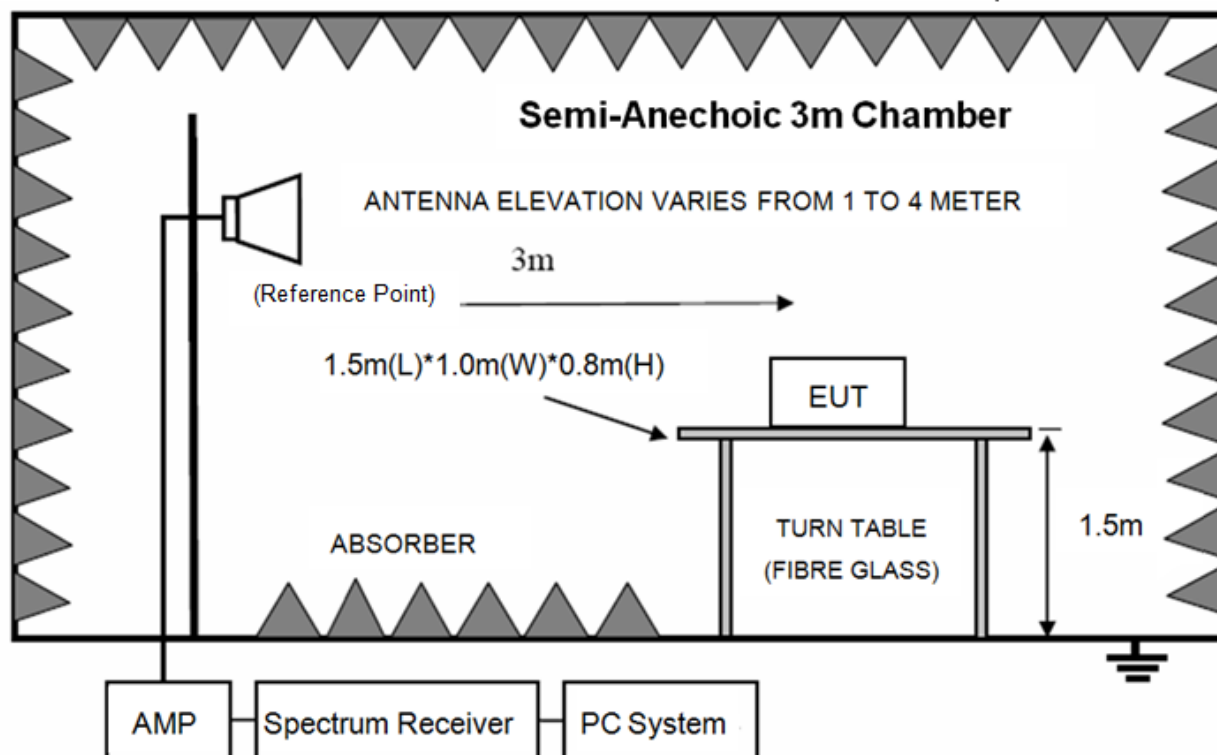

8.2. Limit

All restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions outside operation frequency band 2400MHz to 2483.5MHz shall be at least 20dB below the fundamental emissions, or comply with RSS-Gen Issue 3 clause 7.2.5 (Same as FCC 15.209) limits.

8.3. Test Procedure

Same with clause 8.3 except change investigated frequency range from 2100MHz to 2450MHz and 2450MHz to 2500MHz.

Remark: All restriction band have been tested, and only the worse case is shown in report.

8.4. Test result

PASS. (See below detailed test result)

Note: 11b, 11g, n20 mode ANT 1 and ANT 2, 11n HT20 mode ANT 1 and ANT 2, mode all have been tested, only Ant 2 mode is worse case and reported.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2018 RE1# Report Data\Q18042804-1E M2\FCC
ABOVE1G5.19.EM6

Test Date : 2018-05-19

Tested By : Talent

EUT : Wi-Fi ROUTER

Model Number : M2

Power Supply : AC 120V/60Hz


Test Mode : Tx mode

Condition : Temp:24.5'C,Humi:55%,
Press:100.1kPa

Antenna/Distance : 2017 HF907/3m/VERTICAL

Memo : 11B 2412

Data: 46

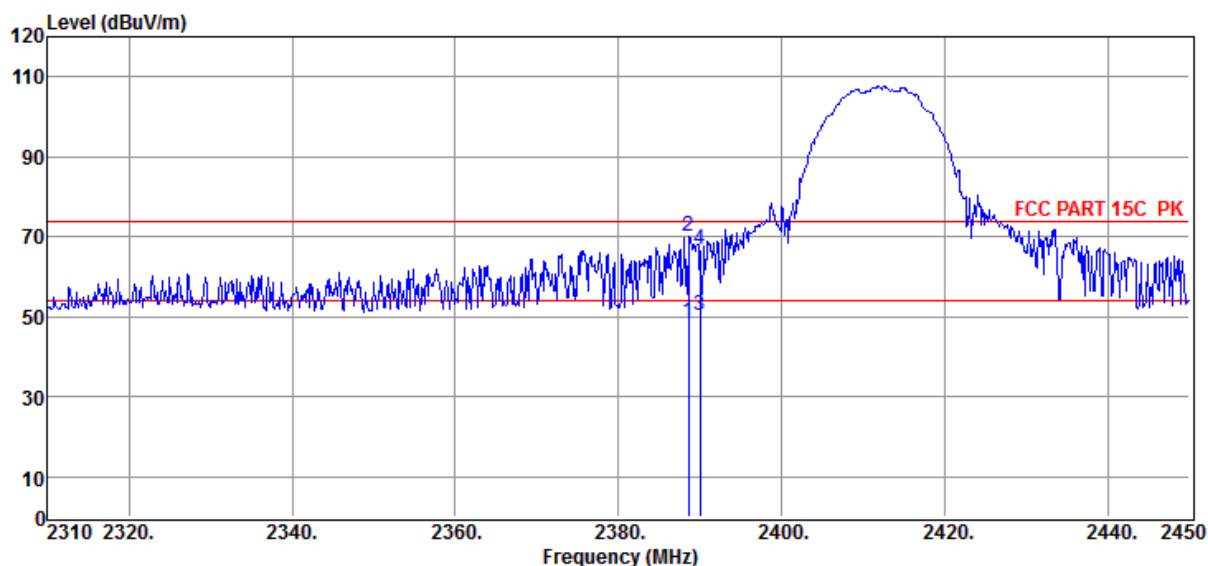

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2388.54	50.74	27.00	44.32	5.11	48.53	54.00	-5.47	Average	VERTICAL
2	2388.54	72.29	27.00	44.32	5.11	70.08	74.00	-3.92	Peak	VERTICAL
3	2390.00	52.44	27.00	44.32	5.11	50.23	54.00	-3.77	Average	VERTICAL
4	2390.00	69.10	27.00	44.32	5.11	66.89	74.00	-7.11	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#
Test Date : 2018-05-19
EUT : Wi-Fi ROUTER
Power Supply : AC 120V/60Hz
Condition : Temp:24.5'C,Humi:55%,
Press:100.1kPa
Memo : 11B 2412

Tested By : Talent
Model Number : M2
Test Mode : Tx mode
Antenna/Distance : 2017 HF907/3m/HORIZONTAL

D:\2018 RE1# Report Data\Q18042804-1E M2\FCC
ABOVE1G5.19.EM6

Data: 47

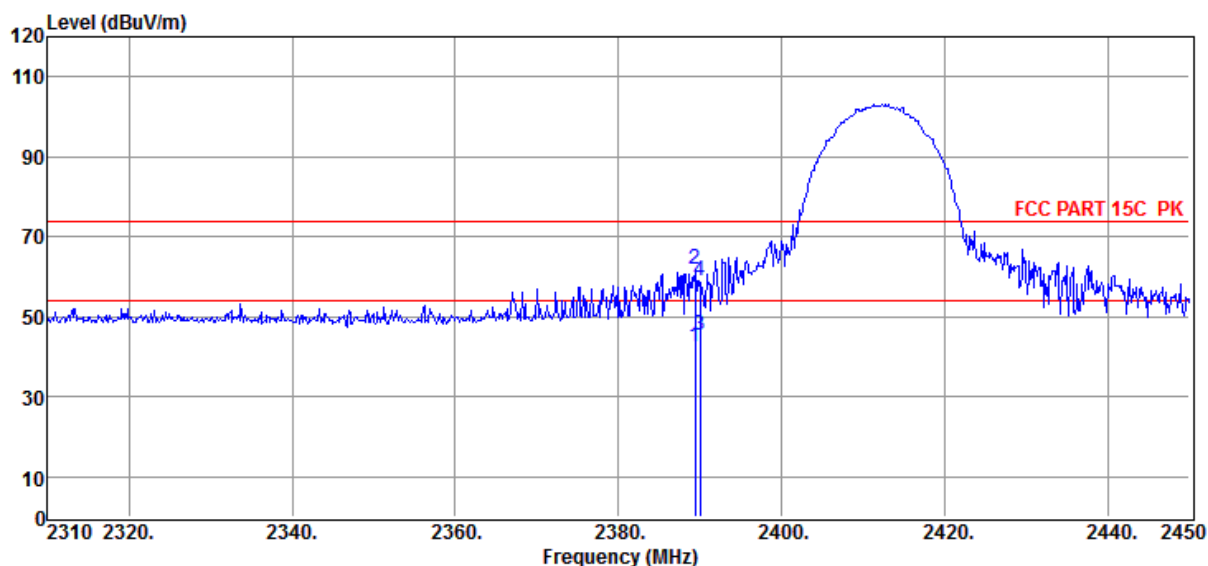

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2389.38	44.76	27.00	44.32	5.11	42.55	54.00	-11.45	Average	HORIZONTAL
2	2389.38	64.14	27.00	44.32	5.11	61.93	74.00	-12.07	Peak	HORIZONTAL
3	2390.00	47.45	27.00	44.32	5.11	45.24	54.00	-8.76	Average	HORIZONTAL
4	2390.00	61.16	27.00	44.32	5.11	58.95	74.00	-15.05	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#
Test Date : 2018-05-19
EUT : Wi-Fi ROUTER
Power Supply : AC 120V/60Hz
Condition : Temp:24.5'C,Humi:55%,
Press:100.1kPa
Memo : 11B 2462

Tested By : Talent
Model Number : M2
Test Mode : Tx mode
Antenna/Distance : 2017 HF907/3m/VERTICAL

D:\2018 RE1# Report Data\Q18042804-1E M2\FCC ABOVE1G5.19.EM6

Data: 49

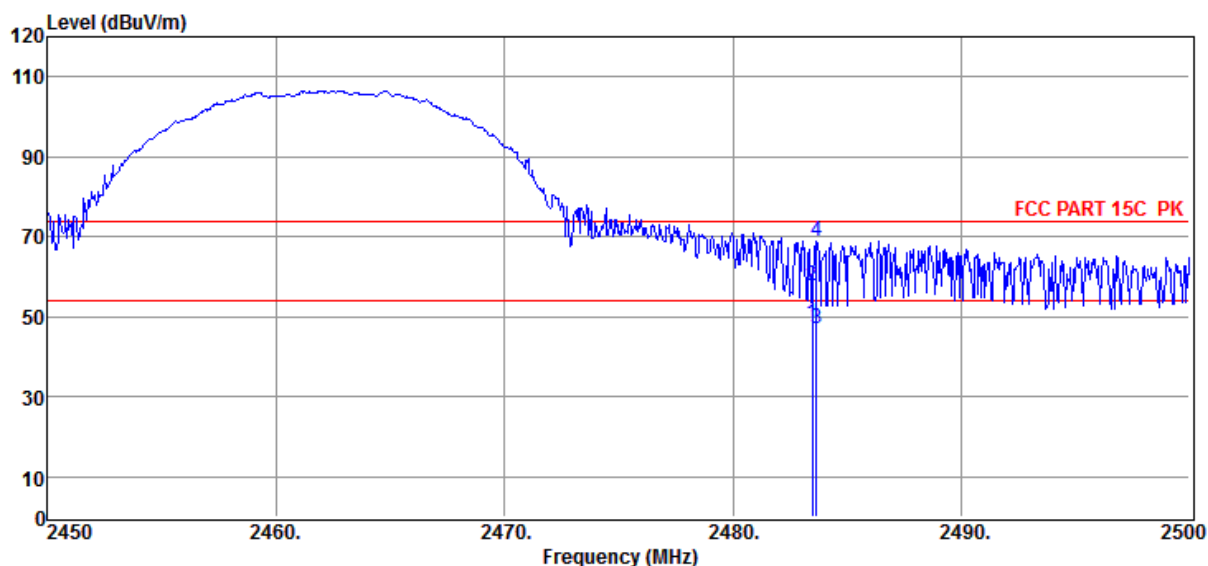

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	50.17	27.34	44.32	5.21	48.40	54.00	-5.60	Average	VERTICAL
2	2483.50	59.69	27.34	44.32	5.21	57.92	74.00	-16.08	Peak	VERTICAL
3	2483.65	48.95	27.34	44.32	5.21	47.18	54.00	-6.82	Average	VERTICAL
4	2483.65	70.43	27.34	44.32	5.21	68.66	74.00	-5.34	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#
Test Date : 2018-05-19
EUT : Wi-Fi ROUTER
Power Supply : AC 120V/60Hz
Condition : Temp:24.5'C,Humi:55%,
Press:100.1kPa
Memo : 11B 2462

Tested By : Talent
Model Number : M2
Test Mode : Tx mode
Antenna/Distance : 2017 HF907/3m/HORIZONTAL

D:\2018 RE1# Report Data\Q18042804-1E M2\FCC
ABOVE1G5.19.EM6

Data: 50

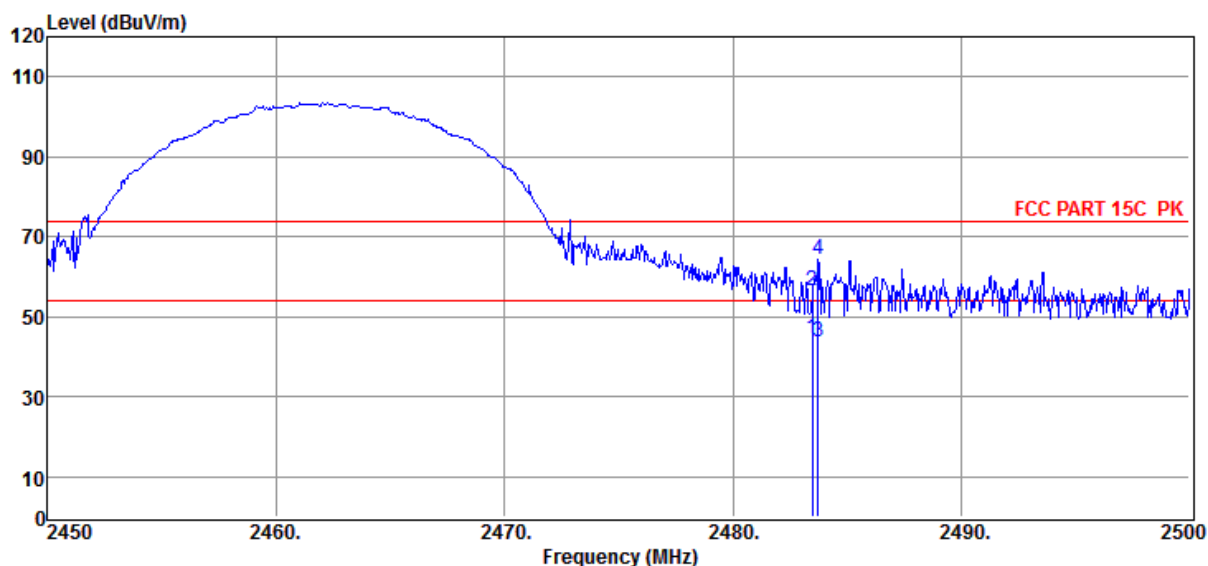

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	46.41	27.34	44.32	5.21	44.64	54.00	-9.36	Average	HORIZONTAL
2	2483.50	58.43	27.34	44.32	5.21	56.66	74.00	-17.34	Peak	HORIZONTAL
3	2483.75	45.38	27.34	44.32	5.21	43.61	54.00	-10.39	Average	HORIZONTAL
4	2483.75	65.99	27.34	44.32	5.21	64.22	74.00	-9.78	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#
Test Date : 2018-05-19
EUT : Wi-Fi ROUTER
Power Supply : AC 120V/60Hz
Condition : Temp:24.5'C,Humi:55%,
Press:100.1kPa
Memo : 11G 2412

Tested By : Talent
Model Number : M2
Test Mode : Tx mode
Antenna/Distance : 2017 HF907/3m/HORIZONTAL

D:\2018 RE1# Report Data\Q18042804-1E M2\FCC
ABOVE1G5.19.EM6

Data: 51

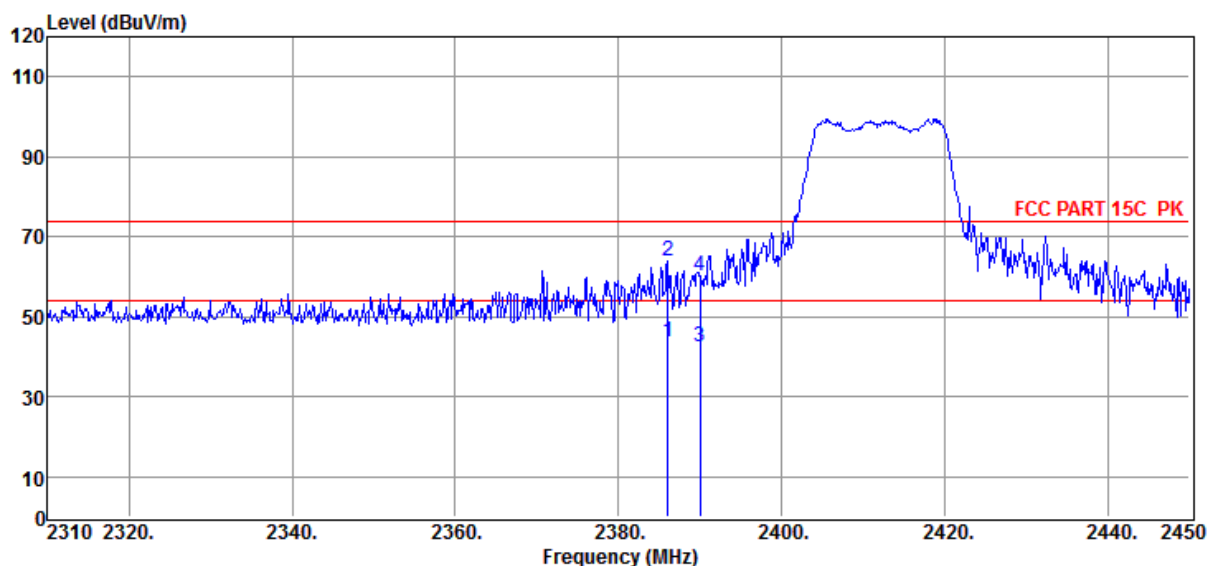

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2386.02	45.77	26.99	44.32	5.10	43.54	54.00	-10.46	Average	HORIZONTAL
2	2386.02	66.05	26.99	44.32	5.10	63.82	74.00	-10.18	Peak	HORIZONTAL
3	2390.00	44.50	27.00	44.32	5.11	42.29	54.00	-11.71	Average	HORIZONTAL
4	2390.00	62.60	27.00	44.32	5.11	60.39	74.00	-13.61	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.


3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#
Test Date : 2018-05-19
EUT : Wi-Fi ROUTER
Power Supply : AC 120V/60Hz
Condition : Temp:24.5'C,Humi:55%,
Press:100.1kPa
Memo : 11G 2412

D:\2018 RE1# Report Data\Q18042804-1E M2\FCC ABOVE1G5.19.EM6
Tested By : Talent
Model Number : M2
Test Mode : Tx mode
Antenna/Distance : 2017 HF907/3m/VERTICAL

Data: 52

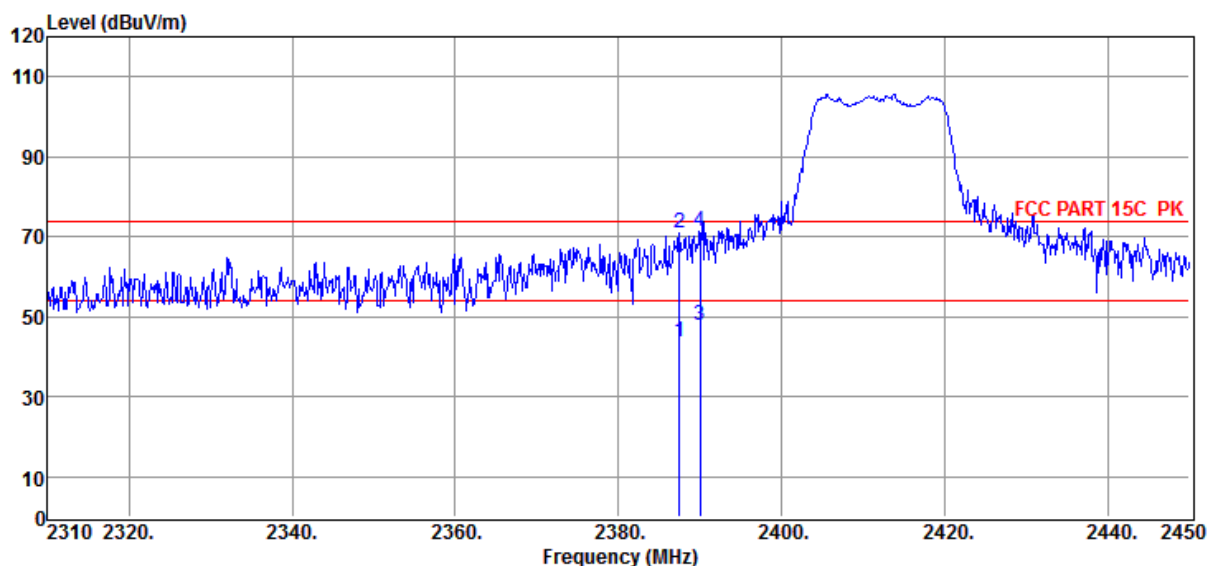

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2387.42	45.97	26.99	44.32	5.11	43.75	54.00	-10.25	Average	VERTICAL
2	2387.42	73.13	26.99	44.32	5.11	70.91	74.00	-3.09	Peak	VERTICAL
3	2390.00	49.85	27.00	44.32	5.11	47.64	54.00	-6.36	Average	VERTICAL
4	2390.00	73.59	27.00	44.32	5.11	71.38	74.00	-2.62	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#
Test Date : 2018-05-19
EUT : Wi-Fi ROUTER
Power Supply : AC 120V/60Hz
Condition : Temp:24.5'C,Humi:55%,
Press:100.1kPa
Memo : 11G 2462

Tested By : Talent
Model Number : M2
Test Mode : Tx mode
Antenna/Distance : 2017 HF907/3m/VERTICAL

D:\2018 RE1# Report Data\Q18042804-1E M2\FCC ABOVE1G5.19.EM6

Data: 53

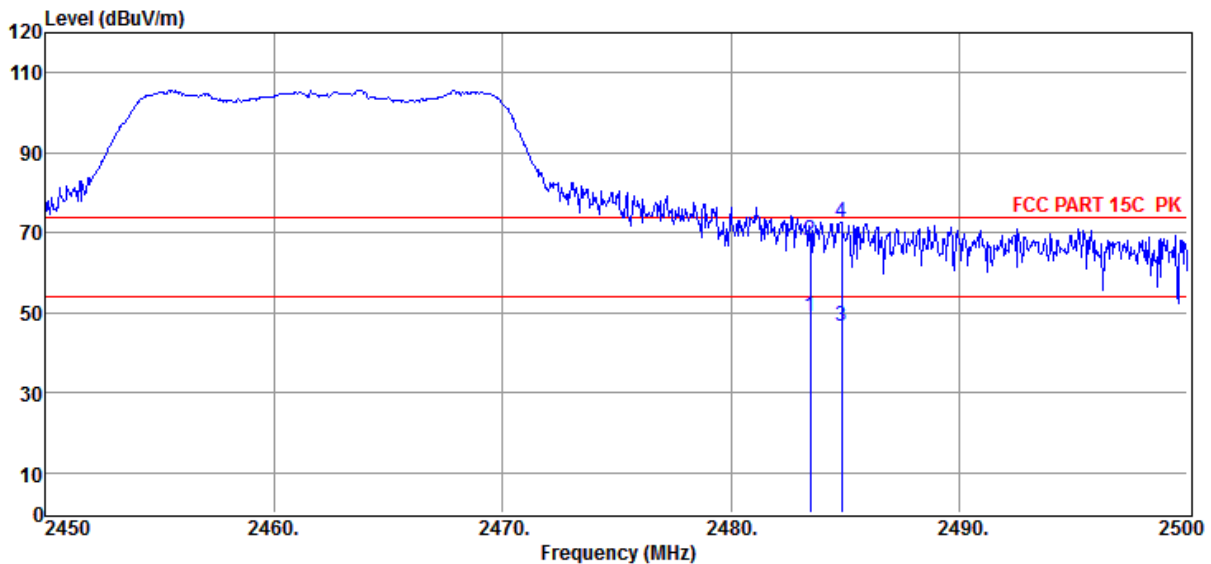

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	50.78	27.34	44.32	5.21	49.01	54.00	-4.99	Average	VERTICAL
2	2483.50	70.01	27.34	44.32	5.21	68.24	74.00	-5.76	Peak	VERTICAL
3	2484.85	48.41	27.35	44.32	5.21	46.65	54.00	-7.35	Average	VERTICAL
4	2484.85	74.49	27.35	44.32	5.21	72.73	74.00	-1.27	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#
Test Date : 2018-05-19
EUT : Wi-Fi ROUTER
Power Supply : AC 120V/60Hz
Condition : Temp:24.5'C,Humi:55%,
 Press:100.1kPa
Memo : 11G 2462

Tested By : Talent
Model Number : M2
Test Mode : Tx mode
Antenna/Distance : 2017 HF907/3m/HORIZONTAL

D:\2018 RE1# Report Data\Q18042804-1E M2\FCC
 ABOVE1G5.19.EM6

Data: 54

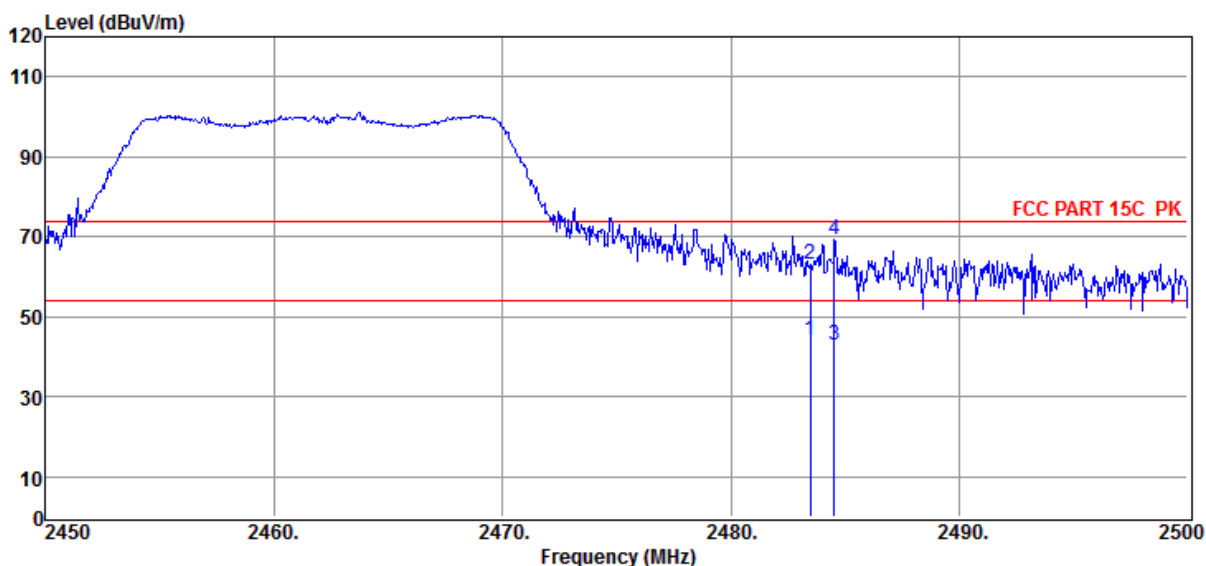

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	45.72	27.34	44.32	5.21	43.95	54.00	-10.05	Average	HORIZONTAL
2	2483.50	64.75	27.34	44.32	5.21	62.98	74.00	-11.02	Peak	HORIZONTAL
3	2484.55	44.51	27.34	44.32	5.21	42.74	54.00	-11.26	Average	HORIZONTAL
4	2484.55	71.16	27.34	44.32	5.21	69.39	74.00	-4.61	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#
Test Date : 2018-05-19
EUT : Wi-Fi ROUTER
Power Supply : AC 120V/60Hz
Condition : Temp:24.5'C,Humi:55%,
Press:100.1kPa
Memo : 11N20 2412

Tested By : Talent
Model Number : M2
Test Mode : Tx mode
Antenna/Distance : 2017 HF907/3m/HORIZONTAL

D:\2018 RE1# Report Data\Q18042804-1E M2\FCC
ABOVE1G5.19.EM6

Data: 55

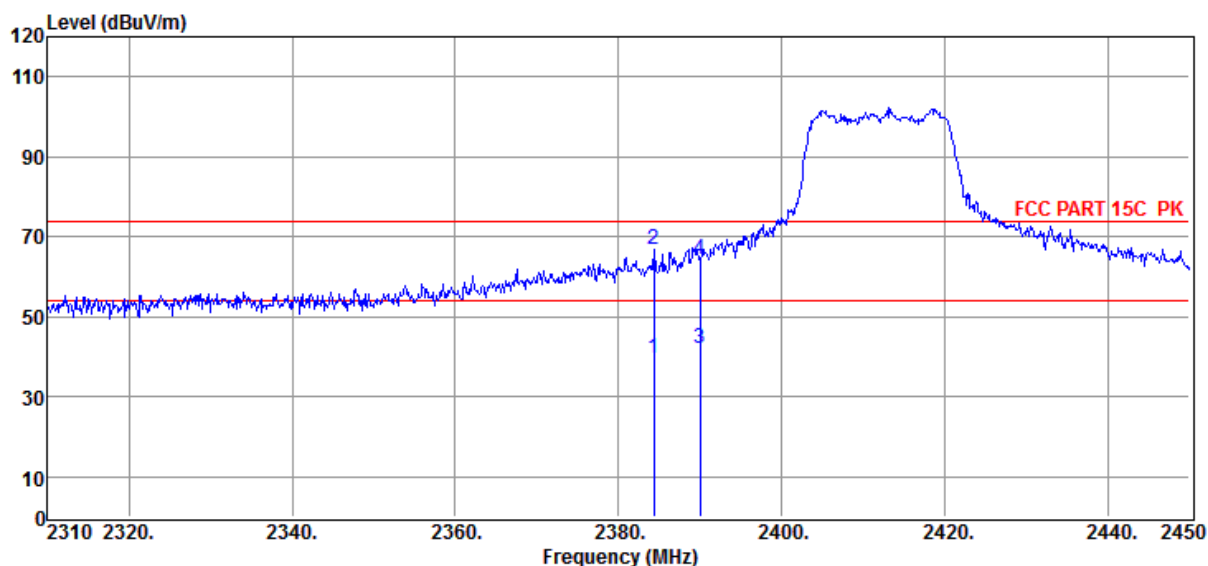

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2384.34	42.00	26.98	44.32	5.10	39.76	54.00	-14.24	Average	HORIZONTAL
2	2384.34	69.12	26.98	44.32	5.10	66.88	74.00	-7.12	Peak	HORIZONTAL
3	2390.00	44.27	27.00	44.32	5.11	42.06	54.00	-11.94	Average	HORIZONTAL
4	2390.00	66.35	27.00	44.32	5.11	64.14	74.00	-9.86	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#
Test Date : 2018-05-19
EUT : Wi-Fi ROUTER
Power Supply : AC 120V/60Hz
Condition : Temp:24.5'C,Humi:55%,
Press:100.1kPa
Memo : 11N20 2412

Tested By : Talent
Model Number : M2
Test Mode : Tx mode
Antenna/Distance : 2017 HF907/3m/VERTICAL

D:\2018 RE1# Report Data\Q18042804-1E M2\FCC
ABOVE1G5.19.EM6

Data: 56

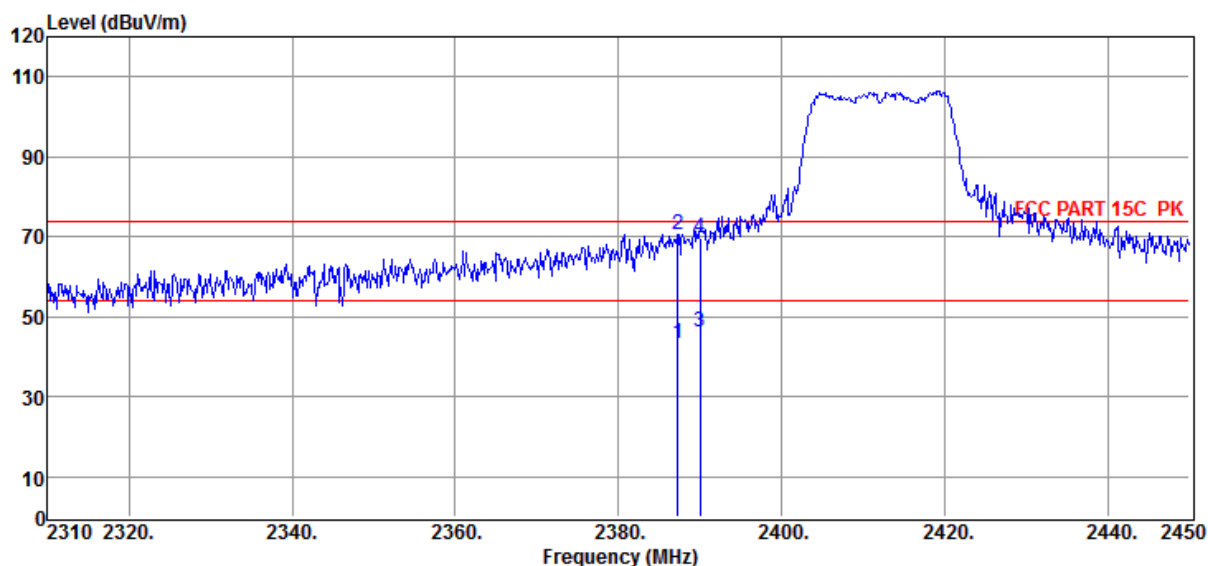

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2387.28	45.41	26.99	44.32	5.11	43.19	54.00	-10.81	Average	VERTICAL
2	2387.28	72.93	26.99	44.32	5.11	70.71	74.00	-3.29	Peak	VERTICAL
3	2390.00	48.58	27.00	44.32	5.11	46.37	54.00	-7.63	Average	VERTICAL
4	2390.00	72.08	27.00	44.32	5.11	69.87	74.00	-4.13	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#
Test Date : 2018-05-19
EUT : Wi-Fi ROUTER
Power Supply : AC 120V/60Hz
Condition : Temp:24.5'C,Humi:55%,
 Press:100.1kPa
Memo : 11N20 2462

Tested By : Talent
Model Number : M2
Test Mode : Tx mode
Antenna/Distance : 2017 HF907/3m/HORIZONTAL

D:\2018 RE1# Report Data\Q18042804-1E M2\FCC
 ABOVE1G5.19.EM6

Data: 59

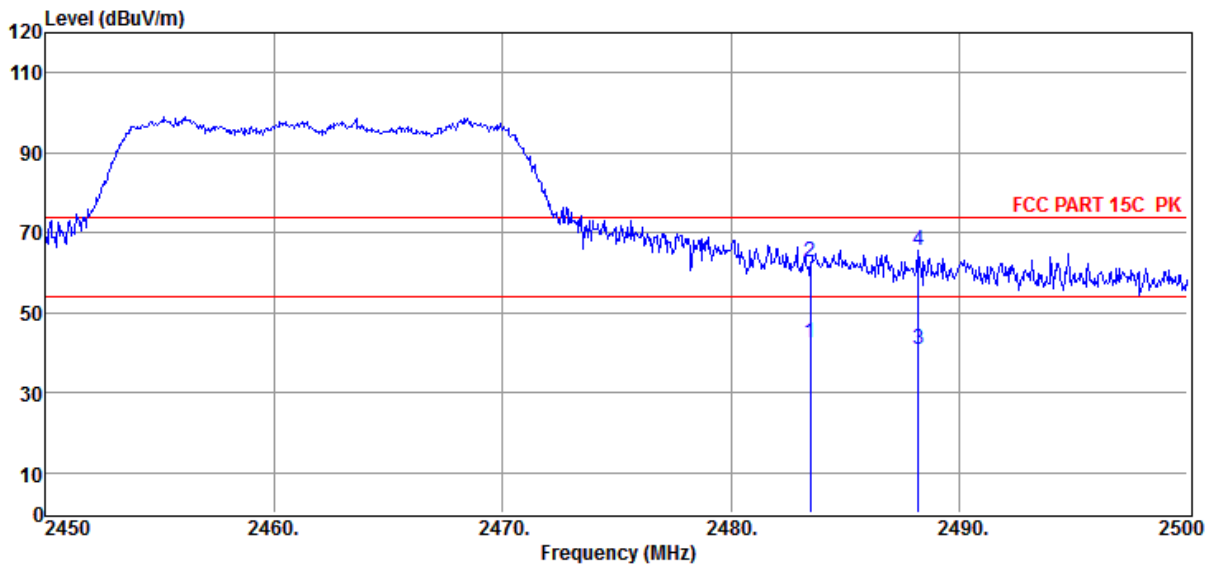

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	44.21	27.34	44.32	5.21	42.44	54.00	-11.56	Average	HORIZONTAL
2	2483.50	64.49	27.34	44.32	5.21	62.72	74.00	-11.28	Peak	HORIZONTAL
3	2488.20	42.51	27.36	44.32	5.22	40.77	54.00	-13.23	Average	HORIZONTAL
4	2488.20	67.32	27.36	44.32	5.22	65.58	74.00	-8.42	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#
Test Date : 2018-05-19
EUT : Wi-Fi ROUTER
Power Supply : AC 120V/60Hz
Condition : Temp:24.5'C,Humi:55%,
Press:100.1kPa
Memo : 11N20 2462

Tested By : Talent
Model Number : M2
Test Mode : Tx mode
Antenna/Distance : 2017 HF907/3m/VERTICAL

D:\2018 RE1# Report Data\Q18042804-1E M2\FCC ABOVE1G5.19.EM6

Data: 58

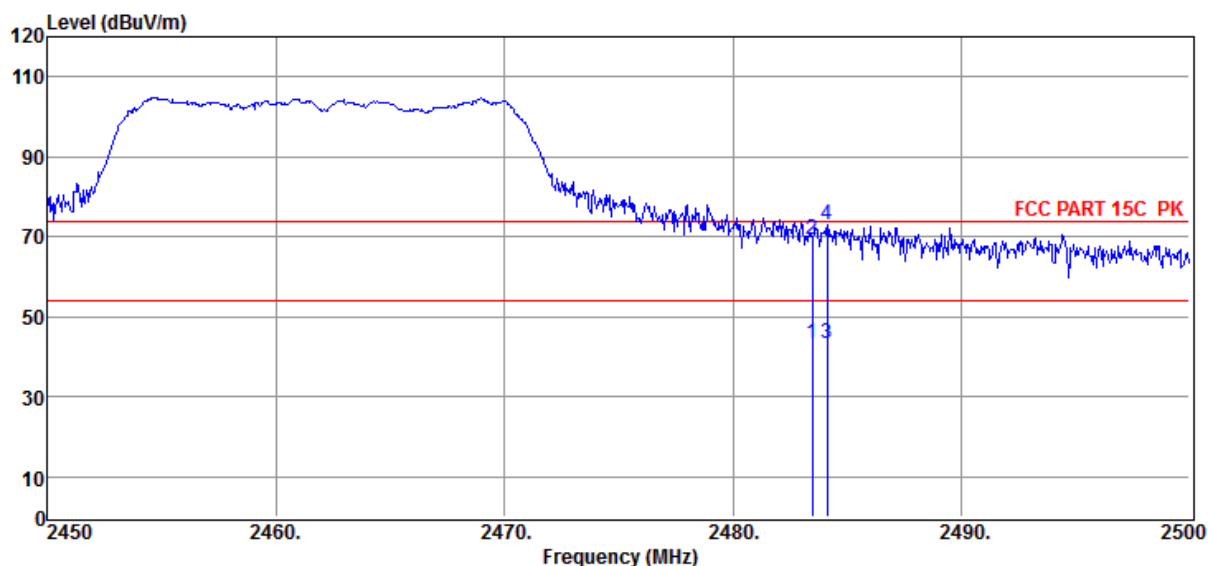

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	45.24	27.34	44.32	5.21	43.47	54.00	-10.53	Average	VERTICAL
2	2483.50	70.99	27.34	44.32	5.21	69.22	74.00	-4.78	Peak	VERTICAL
3	2484.15	44.95	27.34	44.32	5.21	43.18	54.00	-10.82	Average	VERTICAL
4	2484.15	74.67	27.34	44.32	5.21	72.90	74.00	-1.10	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#
Test Date : 2018-05-19
EUT : Wi-Fi ROUTER
Power Supply : AC 120V/60Hz
Condition : Temp:24.5'C,Humi:55%,
Press:100.1kPa
Memo : 11N40 2422

Tested By : Talent
Model Number : M2
Test Mode : Tx mode
Antenna/Distance : 2017 HF907/3m/HORIZONTAL

D:\2018 RE1# Report Data\Q18042804-1E M2\FCC
ABOVE1G5.19.EM6

Data: 60

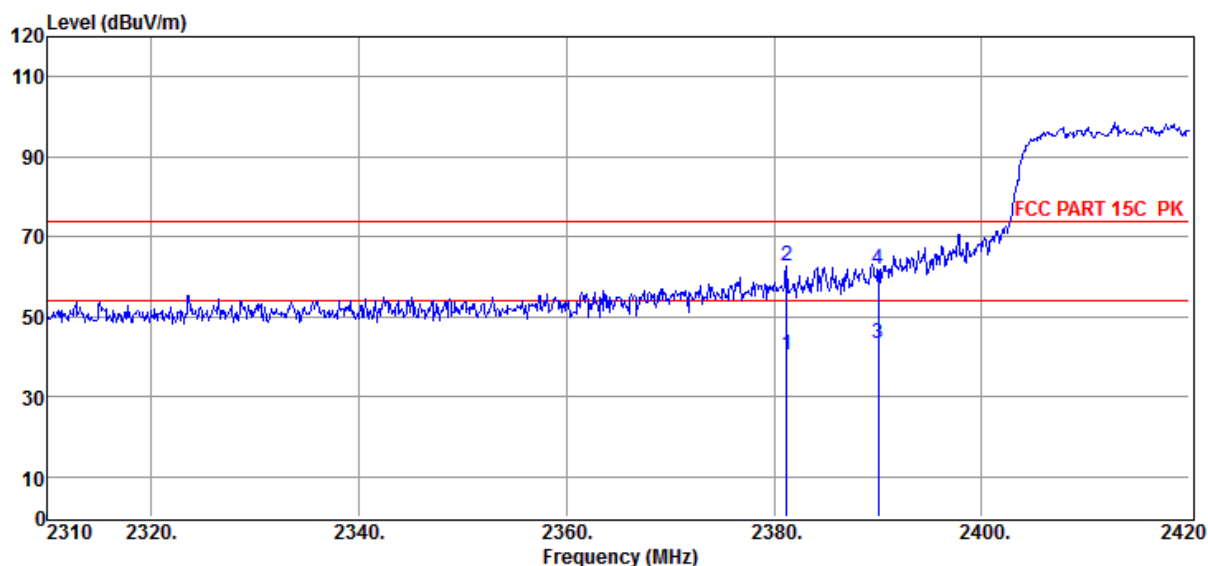

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2381.17	42.80	26.97	44.32	5.10	40.55	54.00	-13.45	Average	HORIZONTAL
2	2381.17	64.78	26.97	44.32	5.10	62.53	74.00	-11.47	Peak	HORIZONTAL
3	2390.00	45.44	27.00	44.32	5.11	43.23	54.00	-10.77	Average	HORIZONTAL
4	2390.00	64.18	27.00	44.32	5.11	61.97	74.00	-12.03	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#
Test Date : 2018-05-19
EUT : Wi-Fi ROUTER
Power Supply : AC 120V/60Hz
Condition : Temp:24.5'C,Humi:55%,
Press:100.1kPa
Memo : 11N40 2422

Tested By : Talent
Model Number : M2
Test Mode : Tx mode
Antenna/Distance : 2017 HF907/3m/VERTICAL

D:\2018 RE1# Report Data\Q18042804-1E M2\FCC
ABOVE1G5.19.EM6

Data: 61

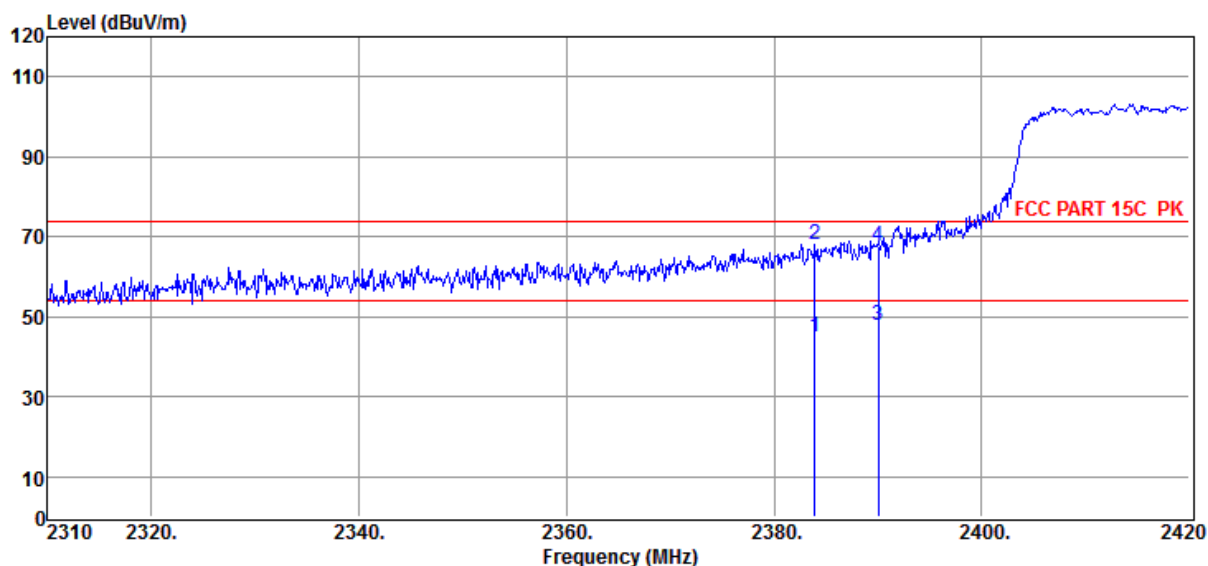

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2383.92	47.32	26.98	44.32	5.10	45.08	54.00	-8.92	Average	VERTICAL
2	2383.92	70.42	26.98	44.32	5.10	68.18	74.00	-5.82	Peak	VERTICAL
3	2390.00	50.22	27.00	44.32	5.11	48.01	54.00	-5.99	Average	VERTICAL
4	2390.00	69.65	27.00	44.32	5.11	67.44	74.00	-6.56	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#
Test Date : 2018-05-19
EUT : Wi-Fi ROUTER
Power Supply : AC 120V/60Hz
Condition : Temp:24.5'C,Humi:55%,
Press:100.1kPa
Memo : 11N40 2452

Tested By : Talent
Model Number : M2
Test Mode : Tx mode
Antenna/Distance : 2017 HF907/3m/VERTICAL

D:\2018 RE1# Report Data\Q18042804-1E M2\FCC
ABOVE1G5.19.EM6

Data: 63

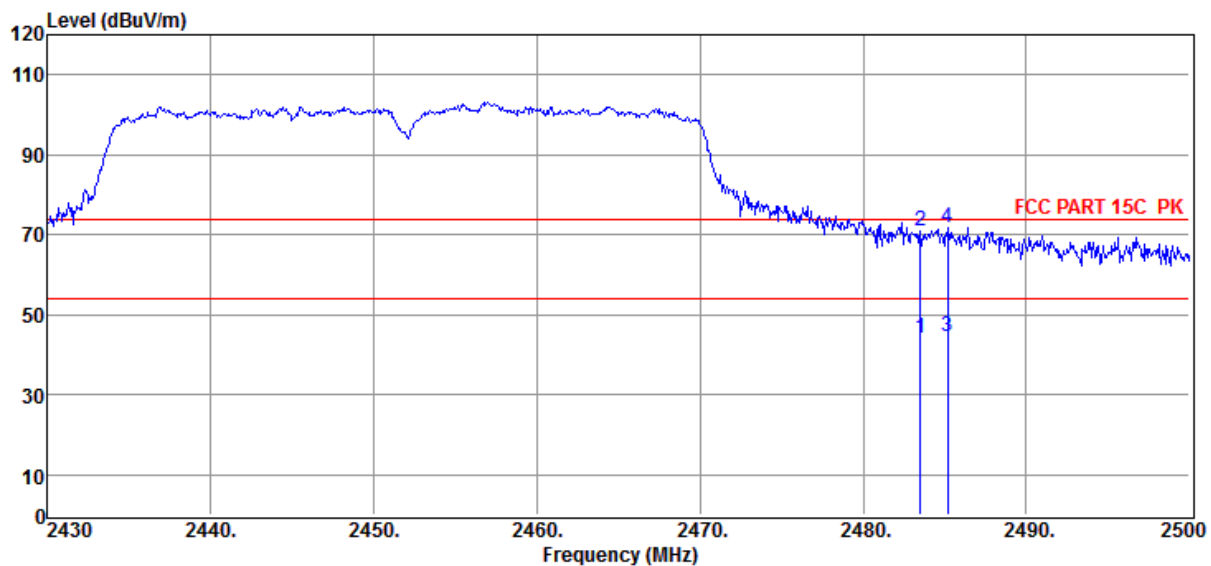

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	45.72	27.34	44.32	5.21	43.95	54.00	-10.05	Average	VERTICAL
2	2483.50	72.72	27.34	44.32	5.21	70.95	74.00	-3.05	Peak	VERTICAL
3	2485.16	46.15	27.35	44.32	5.21	44.39	54.00	-9.61	Average	VERTICAL
4	2485.16	73.46	27.35	44.32	5.21	71.70	74.00	-2.30	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#
Test Date : 2018-05-19
EUT : Wi-Fi ROUTER
Power Supply : AC 120V/60Hz
Condition : Temp:24.5'C,Humi:55%,
Press:100.1kPa
Memo : 11N40 2452

Tested By : Talent
Model Number : M2
Test Mode : Tx mode
Antenna/Distance : 2017 HF907/3m/HORIZONTAL

D:\2018 RE1# Report Data\Q18042804-1E M2\FCC
ABOVE1G5.19.EM6

Data: 64

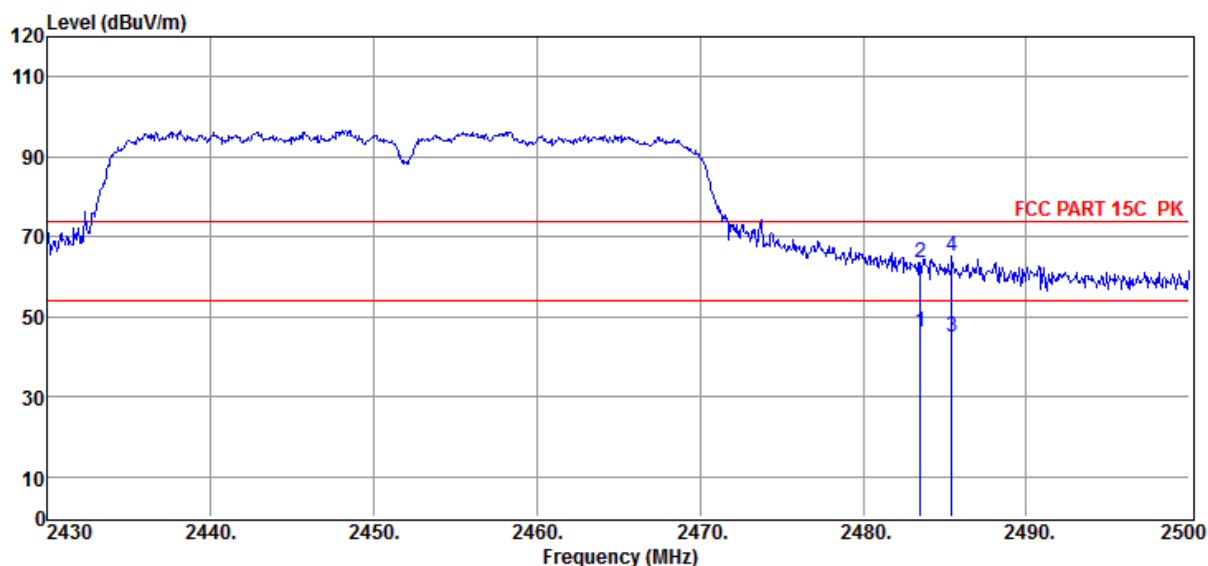

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	48.12	27.34	44.32	5.21	46.35	54.00	-7.65	Average	HORIZONTAL
2	2483.50	65.25	27.34	44.32	5.21	63.48	74.00	-10.52	Peak	HORIZONTAL
3	2485.44	46.85	27.35	44.32	5.21	45.09	54.00	-8.91	Average	HORIZONTAL
4	2485.44	66.77	27.35	44.32	5.21	65.01	74.00	-8.99	Peak	HORIZONTAL


Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

9. Power Line Conducted Emission

9.1. Block diagram of test setup

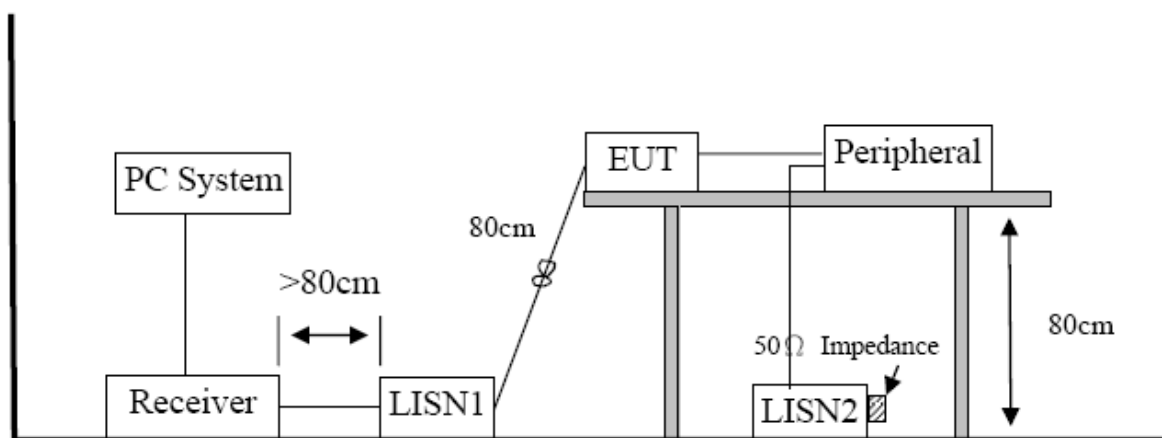

9.2. Power Line Conducted Emission Limits(Class B)

Frequency	Quasi-Peak Level dB(μ V)	Average Level dB(μ V)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Note 1: * Decreasing linearly with logarithm of frequency.

Note 2: The lower limit shall apply at the transition frequencies.

9.3. Test Procedure

The EUT and Support equipment, if needed, were put placed on a non-metallic table, 80cm above the ground plane.

All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.

All support equipment power received from a second LISN.

Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.

The Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.

During the above scans, the emissions were maximized by cable manipulation.

After the preliminary scan, we found the test mode producing the highest emission level.

The EUT configuration and worse cable configuration of the above highest emission levels were recorded for reference of the final test.

EUT and support equipment were set up on the test bench as per the configuration with highest emission level in the preliminary test.

A scan was taken on both power lines, Neutral and Line, recording at least the six highest emissions.

Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit.

The test data of the worst-case condition(s) was recorded.

The bandwidth of test receiver is set at 9 kHz.

9.4. Test Result

PASS. (See below detailed test result)

Note1: All emissions not reported below are too low against the prescribed limits.


Note2: “----” means peak detection; “----” means average detection

Note3: Pre-test AC conducted emission at both voltage AC 120V/60Hz and AC 240V/50Hz, recorded worst case.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room **D:\2018 CE Test Data\Y\Yi Wang\CE.EM6**
Test Date : 2018-05-31 **Tested By** : Shaul
EUT : Wi-Fi ROUTER **Model Number** : M2
Power Supply : AC 120V/60Hz **Test Mode** : Tx mode
Condition : Temp:24.5°C,Humi:55%,
Press:100.1kPa **LISN** : 2017 ENV216/LINE
Memo :

Data: 2

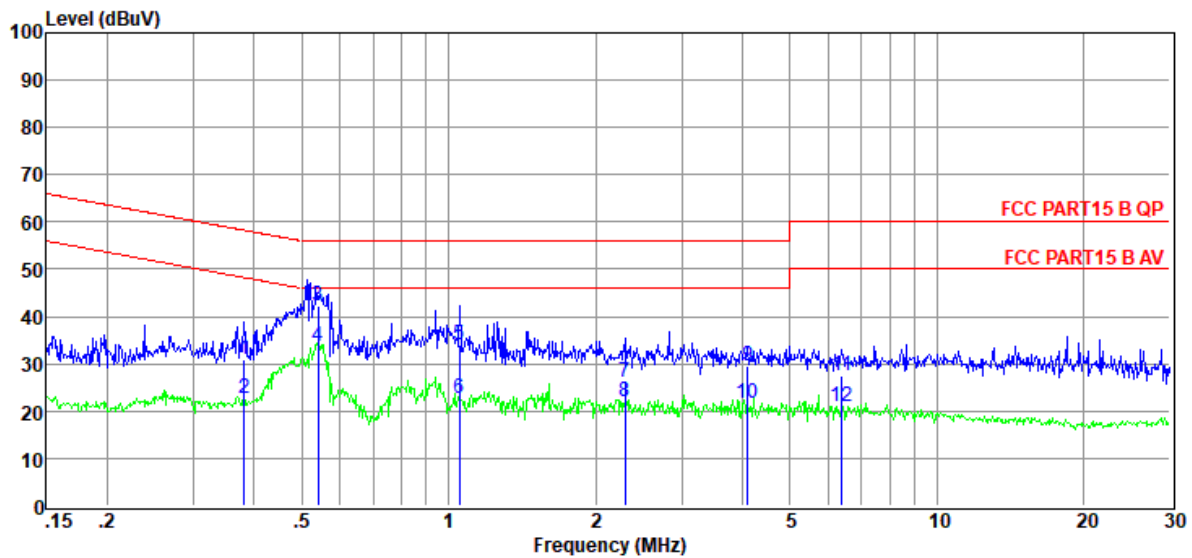

Item	Freq.	Read Level	LISN Factor	Cable Loss	Pulse Limiter Factor	Result Level	Limit Line	Over Limit	Detector	Phase
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)		
1	0.38	11.64	9.53	0.04	9.83	31.04	58.25	-27.21	QP	LINE
2	0.38	3.35	9.53	0.04	9.83	22.75	48.25	-25.50	Average	LINE
3	0.54	22.84	9.54	0.05	9.81	42.24	56.00	-13.76	QP	LINE
4	0.54	14.32	9.54	0.05	9.81	33.72	46.00	-12.28	Average	LINE
5	1.05	14.41	9.57	0.14	9.86	33.98	56.00	-22.02	QP	LINE
6	1.05	3.22	9.57	0.14	9.86	22.79	46.00	-23.21	Average	LINE
7	2.30	6.40	9.61	0.12	9.87	26.00	56.00	-30.00	QP	LINE
8	2.30	2.51	9.61	0.12	9.87	22.11	46.00	-23.89	Average	LINE
9	4.09	9.90	9.63	0.10	9.87	29.50	56.00	-26.50	QP	LINE
10	4.09	1.92	9.63	0.10	9.87	21.52	46.00	-24.48	Average	LINE
11	6.39	7.82	9.69	0.11	9.88	27.50	60.00	-32.50	QP	LINE
12	6.39	1.45	9.69	0.11	9.88	21.13	50.00	-28.87	Average	LINE

Note: 1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.

2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.


3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).

4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site	: DDT 1# Shield Room	D:\2018 CE Test Data\Y\Yi Wang\CE.EM6
Test Date	: 2018-05-31	Tested By : Shaul
EUT	: Wi-Fi ROUTER	Model Number : M2
Power Supply	: AC 120V/60Hz	Test Mode : Tx mode
Condition	: Temp:24.5°C,Humi:55%, Press:100.1kPa	LISN : 2017 ENV216/NEUTRAL
Memo	:	

Data: 4

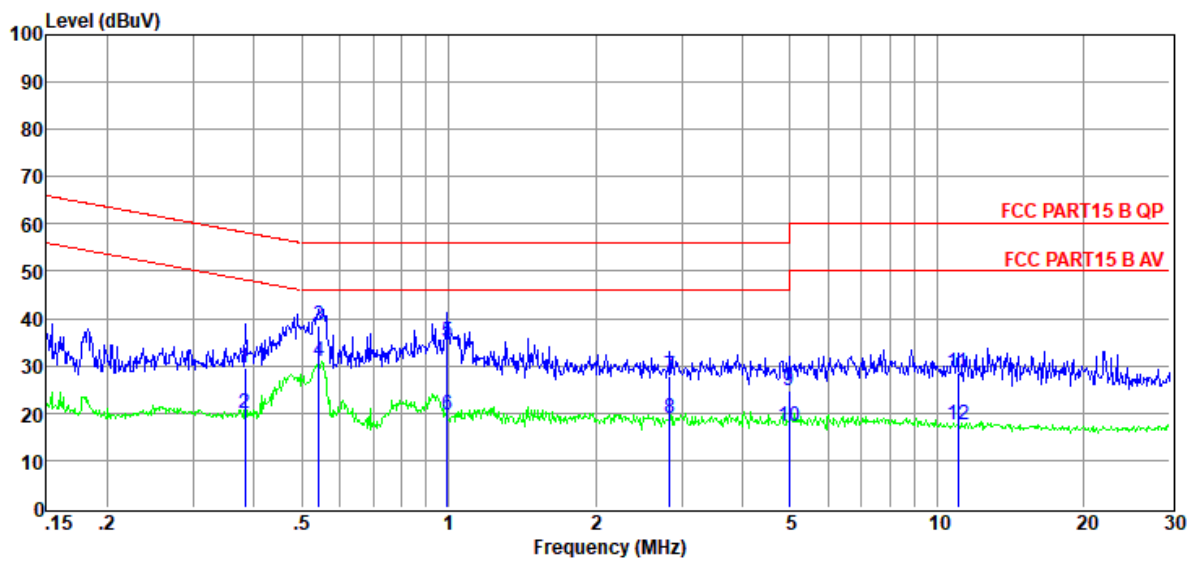

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBμV)	Limit Line (dBμV)	Over Limit (dB)	Detector	Phase
1	0.38	10.15	9.37	0.04	9.83	29.39	58.21	-28.82	QP	NEUTRAL
2	0.38	0.57	9.37	0.04	9.83	19.81	48.21	-28.40	Average	NEUTRAL
3	0.54	19.17	9.34	0.05	9.81	38.37	56.00	-17.63	QP	NEUTRAL
4	0.54	11.63	9.34	0.05	9.81	30.83	46.00	-15.17	Average	NEUTRAL
5	0.99	15.78	9.30	0.14	9.86	35.08	56.00	-20.92	QP	NEUTRAL
6	0.99	0.17	9.30	0.14	9.86	19.47	46.00	-26.53	Average	NEUTRAL
7	2.84	8.61	9.32	0.11	9.87	27.91	56.00	-28.09	QP	NEUTRAL
8	2.84	-0.40	9.32	0.11	9.87	18.90	46.00	-27.10	Average	NEUTRAL
9	4.98	5.57	9.28	0.10	9.87	24.82	56.00	-31.18	QP	NEUTRAL
10	4.98	-2.03	9.28	0.10	9.87	17.22	46.00	-28.78	Average	NEUTRAL
11	11.02	9.04	9.44	0.12	9.90	28.50	60.00	-31.50	QP	NEUTRAL
12	11.02	-1.82	9.44	0.12	9.90	17.64	50.00	-32.36	Average	NEUTRAL

Note: 1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.

2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.


3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).

4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room **D:\2019 CE report data\Q19080706-1E\20190830 CE.EM6**
Test Date : 2019-08-30 **Tested By** : Eddie
EUT : Wi-Fi ROUTER **Model Number** : M2
Power Supply : AC 120V/60Hz with new Adapter **Test Mode** : Tx mode
Condition : Temp:24.5°C,Humi:55%,Press:101.4KPa **LISN** : 2018 ENV216/LINE

Memo :

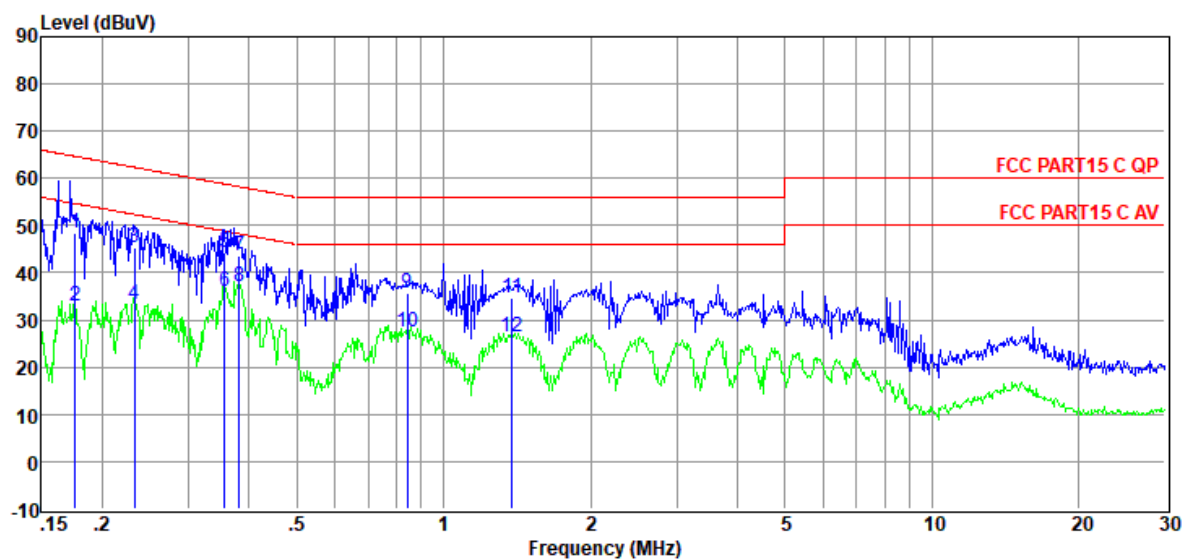

Item	Freq.	Read Level	LISN Factor	Cable Loss	Pulse Limite r Factor	Result Level	Limit Line	Over Limit	Detector	Phase
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)		
1	0.18	28.92	9.63	0.02	9.86	48.43	64.68	-16.25	QP	LINE
2	0.18	13.31	9.63	0.02	9.86	32.82	54.68	-21.86	Average	LINE
3	0.23	25.73	9.63	0.02	9.86	45.24	62.35	-17.11	QP	LINE
4	0.23	13.80	9.63	0.02	9.86	33.31	52.35	-19.04	Average	LINE
5	0.36	24.66	9.63	0.02	9.86	44.17	58.83	-14.66	QP	LINE
6	0.36	16.43	9.63	0.02	9.86	35.94	48.83	-12.89	Average	LINE
7	0.38	24.23	9.64	0.02	9.86	43.75	58.25	-14.50	QP	LINE
8	0.38	17.64	9.64	0.02	9.86	37.16	48.25	-11.09	Average	LINE
9	0.84	16.06	9.64	0.06	9.87	35.63	56.00	-20.37	QP	LINE
10	0.84	7.90	9.64	0.06	9.87	27.47	46.00	-18.53	Average	LINE
11	1.38	15.07	9.65	0.08	9.87	34.67	56.00	-21.33	QP	LINE
12	1.38	6.83	9.65	0.08	9.87	26.43	46.00	-19.57	Average	LINE

Note: 1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.


2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).

4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

: DDT 1# Shield Room
 D:\2019 CE report data\Q19080706-1E\20190830 CE.EM6
Test Date : 2019-08-30 **Tested By** : Eddie
EUT : Wi-Fi ROUTER **Model Number** : M2
Power Supply : AC 120V/60Hz with new Adapter **Test Mode** : Tx mode
Condition : Temp:24.5°C,Humi:55%,Press:101.4KPa **LISN** : 2018 ENV216/NEUTRAL
Memo :

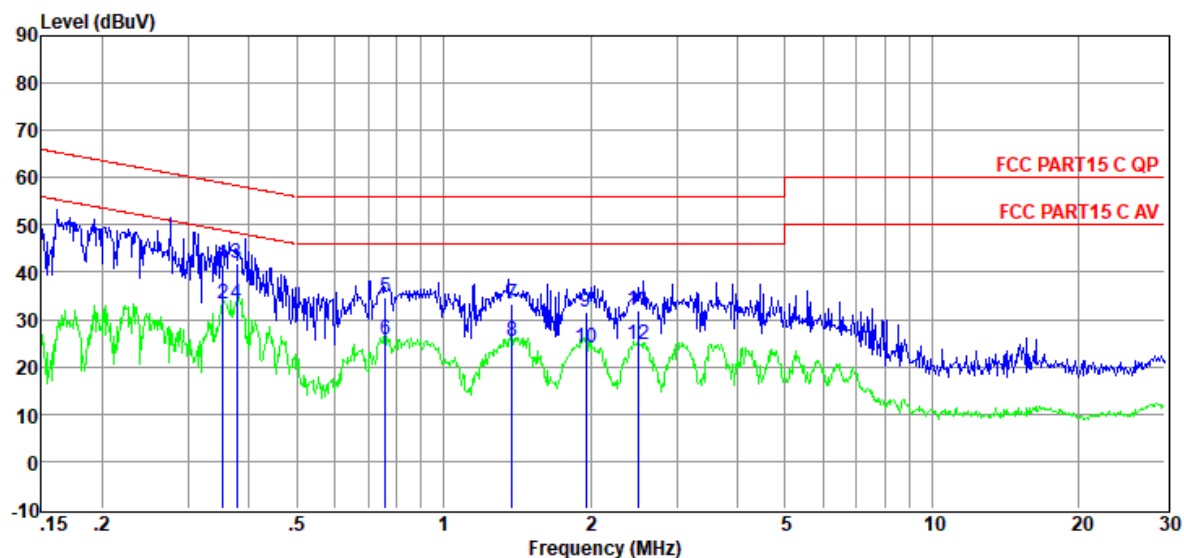

Item	Freq.	Read Level	LISN Factor	Cable Loss	Pulse Limiter Factor	Result Level	Limit Line	Over Limit	Detector	Phase
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)		
1	0.35	21.91	9.64	0.02	9.86	41.43	58.87	-17.44	QP	NEUTRAL
2	0.35	13.68	9.64	0.02	9.86	33.20	48.87	-15.67	Average	NEUTRAL
3	0.38	22.28	9.64	0.02	9.86	41.80	58.34	-16.54	QP	NEUTRAL
4	0.38	13.79	9.64	0.02	9.86	33.31	48.34	-15.03	Average	NEUTRAL
5	0.76	15.30	9.64	0.04	9.86	34.84	56.00	-21.16	QP	NEUTRAL
6	0.76	6.36	9.64	0.04	9.86	25.90	46.00	-20.10	Average	NEUTRAL
7	1.38	13.62	9.66	0.08	9.87	33.23	56.00	-22.77	QP	NEUTRAL
8	1.38	5.67	9.66	0.08	9.87	25.28	46.00	-20.72	Average	NEUTRAL
9	1.96	12.04	9.67	0.06	9.87	31.64	56.00	-24.36	QP	NEUTRAL
10	1.96	4.49	9.67	0.06	9.87	24.09	46.00	-21.91	Average	NEUTRAL
11	2.50	12.38	9.68	0.04	9.87	31.97	56.00	-24.03	QP	NEUTRAL
12	2.50	5.01	9.68	0.04	9.87	24.60	46.00	-21.40	Average	NEUTRAL

Note: 1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.

2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).

4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

10. Antenna Requirements

10.1. Limit

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

10.2. Result

The antennas used for this product are integrated antenna and other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the transmit antenna is only -1dBi.

END OF REPORT