



FCC Part 15E Test Report

FCC ID: 2APRB-A023A-W6

Applicant: Guangdong Juan Intelligent Technology Joint Stock Co., Ltd.

Address: THE FIRST AND SECOND FLOORS OF BUILDING 2(PLANT NO.2), WEST SIDE OF SHANXI VILLAGE, DASHI STREET, PANYU DISTRICT, GUANGZHOU,China

Manufacturer: Guangdong Juan Intelligent Technology Joint Stock Co., Ltd.

Address: THE FIRST AND SECOND FLOORS OF BUILDING 2(PLANT NO.2), WEST SIDE OF SHANXI VILLAGE, DASHI STREET, PANYU DISTRICT, GUANGZHOU,China

EUT: WiFi Cube Camera with 3MP (Sealed Card Slot)

Trade Mark: N/A

Model Number: A023A-W6-WL-1
A023A-W6-WL-2, A023A-W6-JAIOTLink

Date of Receipt: Apr. 14, 2025

Test Date: Apr. 14, 2025 - Apr. 22, 2025

Date of Report: Apr. 22, 2025

Prepared By: Shenzhen DL Testing Technology Co., Ltd.

Address: 101-201, Comprehensive Building, Tongzhou Electronics Longgang Factory Area, No.1 Baolong Fifth Road, Baolong Community, Baolong Street, Longgang District, Shenzhen, China

Applicable Standards: FCC PART 15 E 15.407
ANSI C63.10:2013

Test Result: Pass

Report Number: DLE-250415007R

Prepared (Test Engineer): Ken Tan

Reviewer (Supervisor): Jack Bu

Approved (Manager): Jade Yang



This test report is based on a single evaluation of one sample of above mentioned products. It is not permitted to be duplicated in extracts without written approval of Shenzhen DL Testing Technology Co., Ltd.



Table of Contents	Page
1 . SUMMARY OF TEST RESULTS	5
1.1 MEASUREMENT UNCERTAINTY	6
2 . GENERAL INFORMATION	7
2.1 GENERAL DESCRIPTION OF EUT	7
2.2 DESCRIPTION OF TEST MODES	9
2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	10
2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	10
2.5 TABLE OF PARAMETERS OF TEST SOFTWARE SETTING	10
2.6 EQUIPMENTS LIST FOR ALL TEST ITEMS	11
3 . EMC EMISSION TEST	12
3.1 CONDUCTED EMISSION MEASUREMENT	12
3.1.1 POWER LINE CONDUCTED EMISSION LIMITS	12
3.1.2 TEST PROCEDURE	12
3.1.3 DEVIATION FROM TEST STANDARD	12
3.1.4 TEST SETUP	13
3.1.5 EUT OPERATING CONDITIONS	13
3.1.6 TEST RESULTS	13
3.2 RADIATED EMISSION MEASUREMENT	16
3.2.1 RADIATED EMISSION LIMITS	16
3.2.2 TEST PROCEDURE	17
3.2.3 DEVIATION FROM TEST STANDARD	17
3.2.4 TEST SETUP	18
3.2.5 EUT OPERATING CONDITIONS	19
3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)	20
TEMPERATURE:	20
RELATIVE HUMIDTITY:	20
PRESSURE:	20
TEST VOLTAGE :	20
TEST MODE :	20
POLARIZATION :	20
3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ)	21
TEMPERATURE:	21
RELATIVE HUMIDITY:	21
PRESSURE:	21
POLARIZATION :	21
TEST VOLTAGE :	21



Table of Contents	Page
TEST MODE :	21
TEST VOLTAGE	22
3.2.8 TEST RESULTS (1GHZ~40GHZ)	23
3.3 RADIATED BAND EMISSION MEASUREMENT	29
3.3.1 TEST REQUIREMENT:	29
3.3.2 TEST PROCEDURE	30
3.3.3 DEVIATION FROM TEST STANDARD	30
3.3.4 TEST SETUP	30
3.3.5 EUT OPERATING CONDITIONS	31
4 . AVERAGING OUTPUT POWER	37
4.1 APPLIED PROCEDURES / LIMIT	37
4.1.1 TEST PROCEDURE	37
4.1.2 DEVIATION FROM STANDARD	37
4.1.3 TEST SETUP	37
4.1.4 EUT OPERATION CONDITIONS	37
4.1.5 TEST RESULTS	38
5 . POWER SPECTRAL DENSITY TEST	43
5.1 APPLIED PROCEDURES / LIMIT	43
5.1.1 TEST PROCEDURE	43
5.1.2 DEVIATION FROM STANDARD	43
5.1.3 TEST SETUP	43
5.1.4 EUT OPERATION CONDITIONS	43
5.1.5 TEST RESULTS	44
6 . 6DB&26DB&99% BANDWIDTH TEST	49
6.1 APPLIED PROCEDURES / LIMIT	49
6.1.1 TEST PROCEDURE	49
6.1.2 DEVIATION FROM STANDARD	49
6.1.3 TEST SETUP	49
6.1.4 EUT OPERATION CONDITIONS	50
6.1.5 TEST RESULTS	50
7 . DUTY CYCLE TEST SIGNAL	55
7.1 APPLIED PROCEDURES / LIMIT	55
7.1.1 TEST PROCEDURE	55
7.1.2 DEVIATION FROM STANDARD	55
7.1.3 TEST SETUP	55
7.1.4 EUT OPERATION CONDITIONS	55
7.1.5 TEST RESULTS	56
8 . FREQUENCY STABILITY	61
8.1 APPLIED PROCEDURES / LIMIT	61



Table of Contents	Page
8.1.1 TEST PROCEDURE	61
8.1.2 DEVIATION FROM STANDARD	61
8.1.3 TEST SETUP	61
8.1.4 EUT OPERATION CONDITIONS	61
8.1.5 TEST RESULTS	62
9 . TRANSMISSION IN THE ABSENCE OF DATA	64
9.1 STANDARD REQUIREMENT	64
9.2 TEST RESULT	64
10 . ANTENNA REQUIREMENT	64
10.1 STANDARD REQUIREMENT	64
10.2 EUT ANTENNA	64
11 . TEST SEUUP PHOTO	64
12 . EUT PHOTO	64



1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.407) , Subpart E			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	
15.407(b), 15.205, 15.209	Radiated Spurious Emission	PASS	
15.407(b), 15.205, 15.209	Band Edge Emission	PASS	
15.407 (a)	Average Output Power	PASS	
15.407 (a)	Power Spectral Density	PASS	
15.407(a) (e)	26dB bandwidth and 99%dB Bandwidth 6dB bandwidth and 99%dB Bandwidth	PASS	
15.407(g)	Frequency Stability	PASS	
15.407(c)	Transmission in case of Absence of Information	PASS	
15.203	Antenna Requirement	PASS	

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report

Test lab: Shenzhen DL Testing Technology Co., Ltd.

Address: 101-201, Comprehensive Building, Tongzhou Electronics Longgang Factory Area, No.1
Baolong Fifth Road, Baolong Community, Baolong Street, Longgang District, Shenzhen, China

The test results presented in this report relate only to the object tested.

This report shall not be reproduced, except in full, without the written approval of the Issuing DL Testing Laboratory. The authenticity of this Test Report and its contents can be verified by

contacting the DL Testing, responsible for this Test Report.

FCC Test Firm Registration Number: 854456

Designation Number: CN1307

IC Registered No.: 27485

CAB ID.: CN0118



1.1 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$ · providing a level of confidence of approximately **95 %** °

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 2.56\text{dB}$
2	RF power,conducted	$\pm 0.42\text{dB}$
3	Spurious emissions,conducted	$\pm 2.76\text{dB}$
4	All emissions,radiated(<30MHz)	$\pm 3.54\text{dB}$
5	All emissions,radiated(<1G)	$\pm 3.65\text{dB}$
6	All emissions,radiated(>1G)	$\pm 4.89\text{dB}$
7	Occupied bandwidth	$\pm 0.2\text{MHz}$
8	PSD	$\pm 0.69\text{dB}$
9	Temperature	$\pm 0.5^{\circ}\text{C}$
10	Humidity	$\pm 2\%$
11	Time	$\pm 2\%$



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Product Name:	WiFi Cube Camera with 3MP (Sealed Card Slot)
Trademark	N/A
Model No.:	A023A-W6-WL-1 A023A-W6-WL-2, A023A-W6-JAIOTLink
Model Difference	All models are same as the samples except model name, they have the same structure and circuit.
Operation Frequency:	5180-5240, 5745-5825MHz(802.11a/n(HT20)) 5190-5230, 5755-5795MHz(802.11n(HT40))
Channel numbers:	See channel list
Channel separation:	5MHz
Modulation technology:	64QAM, 16QAM, QPSK, BPSK for OFDM
Rate of Transmitter	802.11a: 6Mbps, 9Mbps, 12Mbps, 18Mbps, 24Mbps, 36Mbps, 48Mbps,54Mbps 802.11n: Up to 300Mbps
Antenna Type:	Internal Antenna
Antenna gain:	4.58dBi
Power Supply:	DC 5V from USB Port

Note:

- 1.For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
- 2.The EUT's all information provided by client.



2. Channel List

Channel List for 802.11a/n(HT20)			
Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	44	5220
40	5200	48	5240

Channel List for 802.11n(HT40)			
Channel	Frequency (MHz)	Channel	Frequency (MHz)
38	5190	46	5230

Channel List for 802.11a/n(HT20)			
Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	161	5805
153	5765	165	5825
157	5785		

Channel List for 802.11n(HT40)			
Channel	Frequency (MHz)	Channel	Frequency (MHz)
151	5755	159	5795



2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Description			
Pretest Mode	Channel	Band 1	Band 4
Mode 1	802.11a/nHT20	CH36, CH44, CH48	CH149, CH157, CH165
Mode 2	802.11nHT40	CH38, CH46	CH151, CH159
Mode 3	Link Mode		


For Conducted & Radiated Emission			
Pretest Mode	Channel	Band 1	Band 4
Mode 1	802.11a/nHT20	CH36, CH44, CH48	CH149, CH157, CH165
Mode 2	802.11nHT40	CH38, CH46	CH151, CH159
Mode 3	Link Mode		

Note: 1. The measurements are performed at the highest, middle, lowest available channels.
2. During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.




2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Radiated Spurious Emission Test



Power Line Conducted Emission Test



2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Model/Type No.	Series No.	Note
E-1	WiFi Cube Camera with 3MP (Sealed Card Slot)	A023A-W6-WL-1	N/A	EUT
E-2	Adapter	HW-0501000E	N/A	XIAOMI

Item	Shielded Type	Ferrite Core	Length	Note

Note:

- (1) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

2.5 TABLE OF PARAMETERS OF TEST SOFTWARE SETTING

During testing, channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the end product.

Max output power Setting			
Test software Version	Test program: RF Test_V1.4		
Mode	802.11a	802.11n HT20	802.11n HT40
Data Rate	6Mbps	MSC0	MSC0
Power Setting of Softwave	60	60	66



2.6 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation test, Band-edge test and 6db bandwidth test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	Agilent	E4408B	MY50140780	Nov. 01, 2024	Oct. 31, 2025
2	Test Receiver (9kHz-7GHz)	R&S	ESRP7	101393	Nov. 01, 2024	Oct. 31, 2025
3	Bilog Antenna (30MHz-1GHz)	R&S	VULB9162	00306	Nov. 01, 2024	Oct. 31, 2025
4	Horn Antenna (1GHz-18GHz)	Schwarzbeck	BBHA9120D	02139	Nov. 01, 2024	Oct. 31, 2025
5	Horn Antenna (18GHz-40GHz)	A.H. Systems	SAS-574	588	Nov. 01, 2024	Oct. 31, 2025
6	Amplifier (9KHz-6GHz)	Schwarzbeck	BBV9743B	00153	Nov. 01, 2024	Oct. 31, 2025
7	Amplifier (1GHz-18GHz)	EMEC	EM01G8GA	00270	Nov. 01, 2024	Oct. 31, 2025
8	Amplifier (18GHz-40GHz)	Quanjuda	DLE-161	97	Nov. 01, 2024	Oct. 31, 2025
9	Loop Antenna (9KHz-30MHz)	Schwarzbeck	FMZB1519B	00014	Nov. 01, 2024	Oct. 31, 2025
10	RF cables1 (9kHz-1GHz)	ChengYu	966	004	Nov. 01, 2024	Oct. 31, 2025
11	RF cables2 (1GHz-40GHz)	ChengYu	966	003	Nov. 01, 2024	Oct. 31, 2025
12	Antenna connector	Florida RF Labs	N/A	RF 01#	Nov. 01, 2024	Oct. 31, 2025
13	Power probe	KEYSIGHT	U2021XA	MY55210018	Nov. 01, 2024	Oct. 31, 2025
14	Signal Analyzer 9kHz-26.5GHz	Agilent	N9020A	MY55370280	Nov. 01, 2024	Oct. 31, 2025
15	Test Receiver 20kHz-40GHz	R&S	ESU 40	100376	Nov. 01, 2024	Oct. 31, 2025
16	D.C. Power Supply	LongWei	PS-305D	010964729	Nov. 01, 2024	Oct. 31, 2025
17	Temperature & humidity chamber	Changfeng	CF-150-40-P	CF170802-01	Nov. 01, 2024	Oct. 31, 2025

Conduction Test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	843 Shielded Room	YIHENG	843 Room	843	Nov. 05, 2023	Nov. 04, 2026
2	EMI Receiver	R&S	ESR	101421	Nov. 01, 2024	Oct. 31, 2025
3	LISN	R&S	ENV216	102417	Nov. 01, 2024	Oct. 31, 2025
4	843 Cable 1#	ChengYu	CE Cable	001	Nov. 01, 2024	Oct. 31, 2025

Other

Item	Name	Manufacturer	Model	Software version
1	EMC Conduction Test System	FALA	EZ_EMCC	EMC-CON 3A1.1
2	EMC radiation test system	FALA	EZ_EMCC	FA-03A2
3	RF test system	MAIWEI	MTS8310	2.0.0.0
4	RF communication test system	MAIWEI	MTS8200	2.0.0.0



3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Limit (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.5 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


3.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 DEVIATION FROM TEST STANDARD

No deviation

3.1.4 TEST SETUP

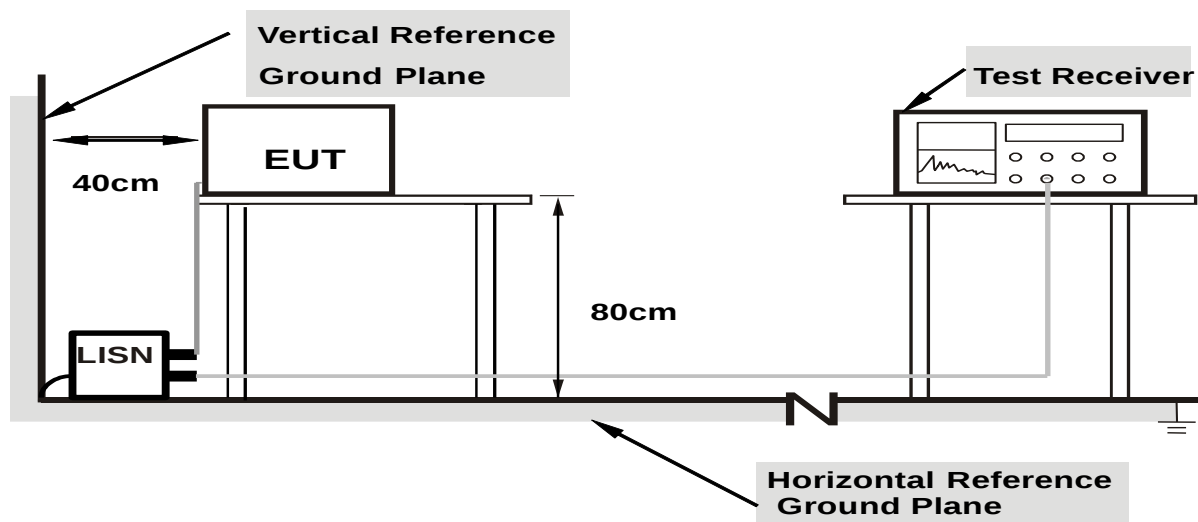

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

3.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.


3.1.6 TEST RESULTS

PASS

Please refer to the following page.



Temperature:	25 °C	Relative Humidity:	54%
Pressure:	1010hPa	Phase :	L
Test Voltage :	AC 120V/60Hz	Test Mode:	Mode 3

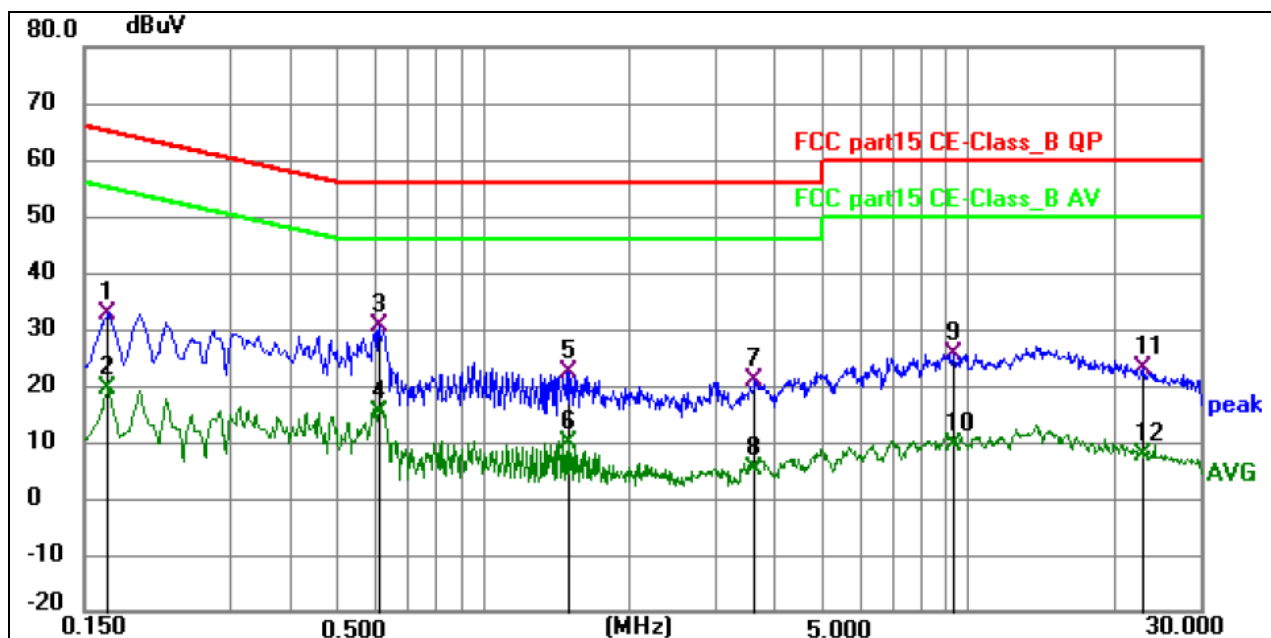


Remark:

Margin = Limit – Level, Correct Factor = Cable lose + LISN insertion loss, Level= Reading + Correct factor

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1680	22.72	10.03	32.75	65.06	-32.31	QP	P	
2	0.1680	9.33	10.03	19.36	55.06	-35.70	AVG	P	
3 *	0.6090	20.43	10.13	30.56	56.00	-25.44	QP	P	
4	0.6090	4.92	10.13	15.05	46.00	-30.95	AVG	P	
5	1.5090	12.12	10.06	22.18	56.00	-33.82	QP	P	
6	1.5090	-0.24	10.06	9.82	46.00	-36.18	AVG	P	
7	3.6240	10.71	10.17	20.88	56.00	-35.12	QP	P	
8	3.6240	-4.87	10.17	5.30	46.00	-40.70	AVG	P	
9	9.3480	14.54	11.16	25.70	60.00	-34.30	QP	P	
10	9.3480	-1.65	11.16	9.51	50.00	-40.49	AVG	P	
11	22.8120	10.47	12.42	22.89	60.00	-37.11	QP	P	
12	22.8120	-4.62	12.42	7.80	50.00	-42.20	AVG	P	



Temperature:	25 °C	Relative Humidity:	54%
Pressure:	1010hPa	Phase :	N
Test Voltage :	AC 120V/60Hz	Test Mode:	Mode 3

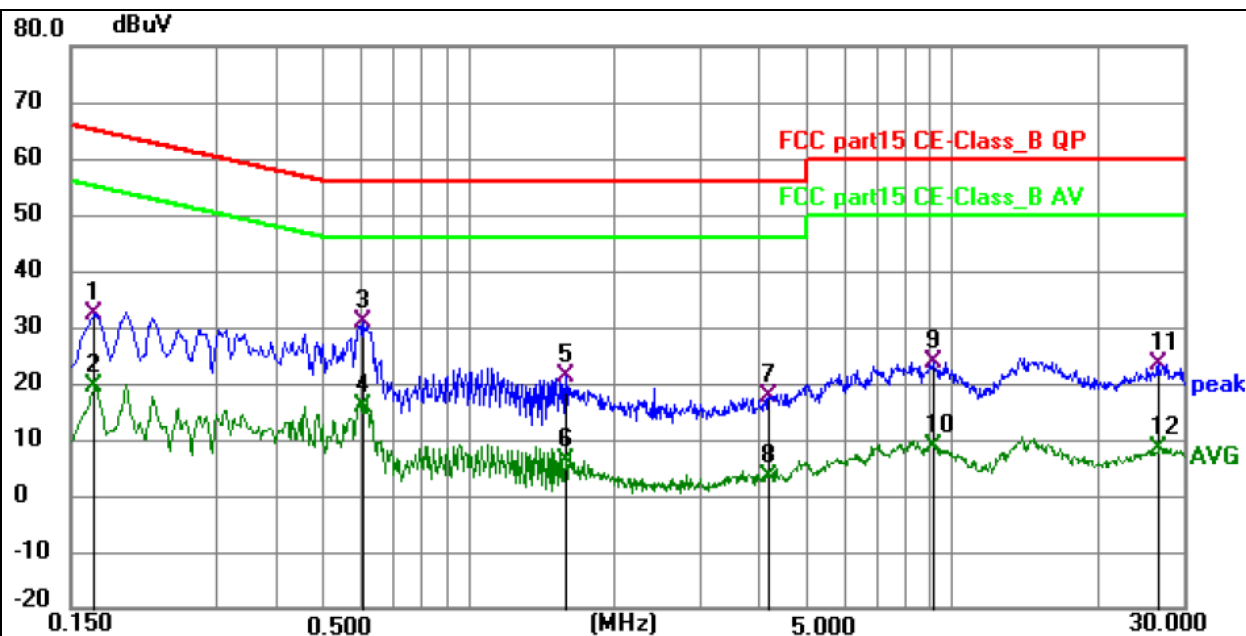

Remark:

Margin = Limit – Level, Correct Factor = Cable lose + LISN insertion loss, Level= Reading + Correct factor

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1680	22.15	10.15	32.30	65.06	-32.76	QP	P	
2	0.1680	9.28	10.15	19.43	55.06	-35.63	AVG	P	
3 *	0.6045	20.86	10.17	31.03	56.00	-24.97	QP	P	
4	0.6045	5.58	10.17	15.75	46.00	-30.25	AVG	P	
5	1.5900	11.25	10.07	21.32	56.00	-34.68	QP	P	
6	1.5900	-3.72	10.07	6.35	46.00	-39.65	AVG	P	
7	4.1640	7.49	10.16	17.65	56.00	-38.35	QP	P	
8	4.1640	-6.77	10.16	3.39	46.00	-42.61	AVG	P	
9	9.1995	12.65	11.09	23.74	60.00	-36.26	QP	P	
10	9.1995	-2.25	11.09	8.84	50.00	-41.16	AVG	P	
11	26.7945	10.51	12.78	23.29	60.00	-36.71	QP	P	
12	26.7945	-4.23	12.78	8.55	50.00	-41.45	AVG	P	



3.2 RADIATED EMISSION MEASUREMENT

3.2.1 RADIATED EMISSION LIMITS

15.407(b) Undesirable emission limits. Except as shown in paragraph (b) (10) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating solely in the 5.725-5.850GHz band:
All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	40GHz
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average



Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

3.2.2 TEST PROCEDURE

Below 1GHz test procedure as below:

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 metre to 1.5 metre.
- Test the EUT in the lowest channel, the middle channel, the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

3.2.3 DEVIATION FROM TEST STANDARD


No deviation

3.2.4 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

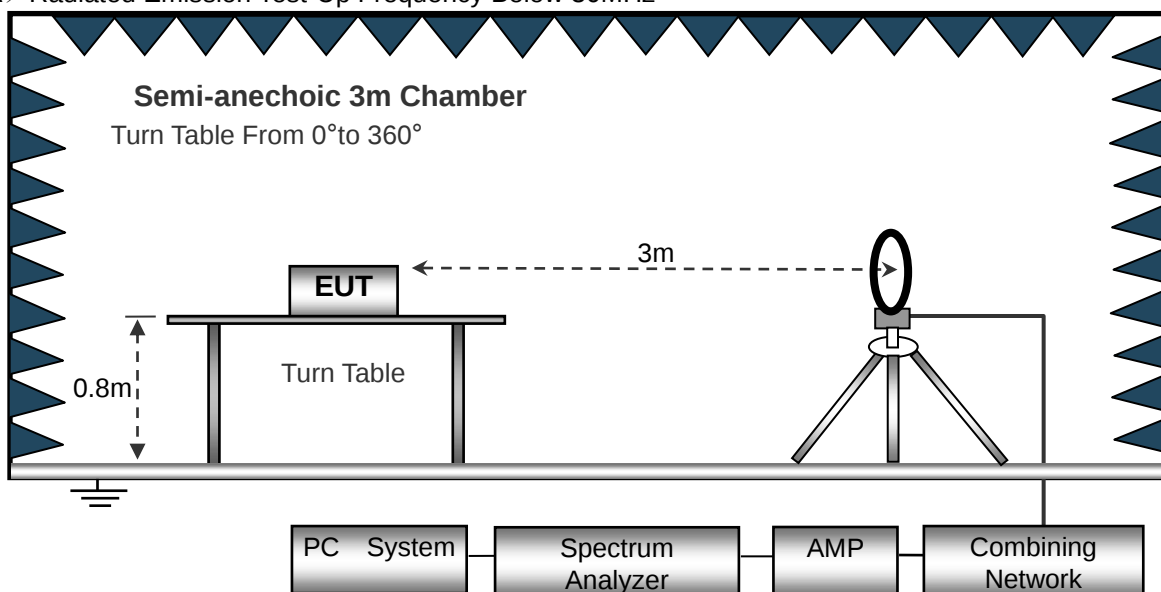

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

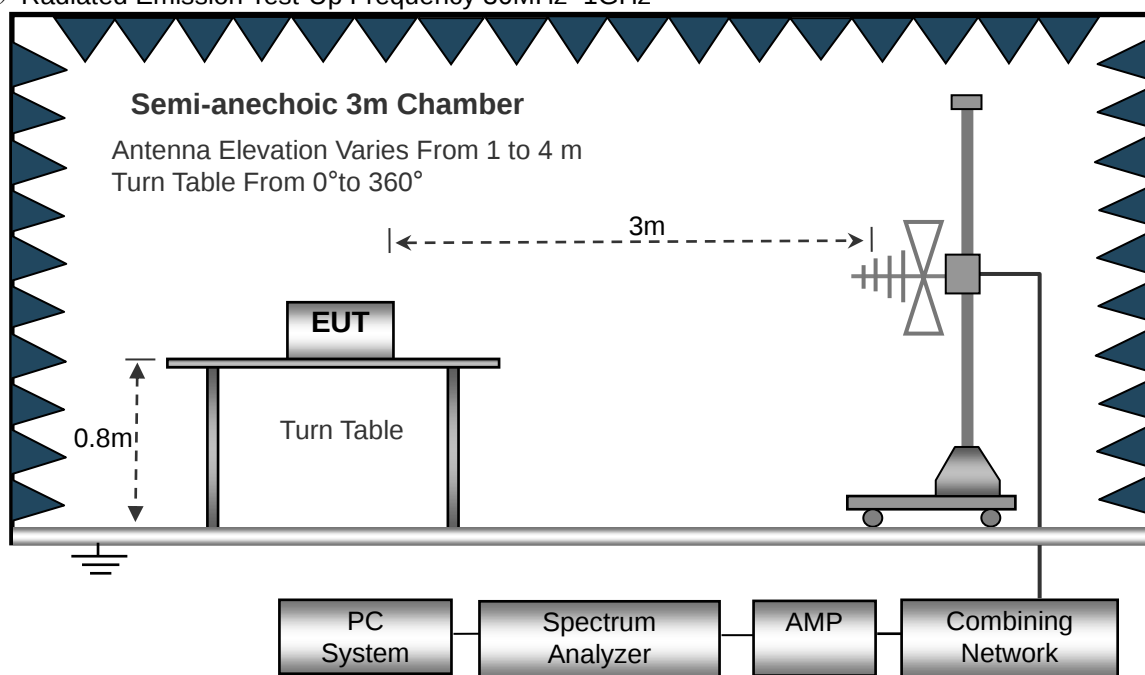

(C) Radiated Emission Test-Up Frequency Above 1GHz

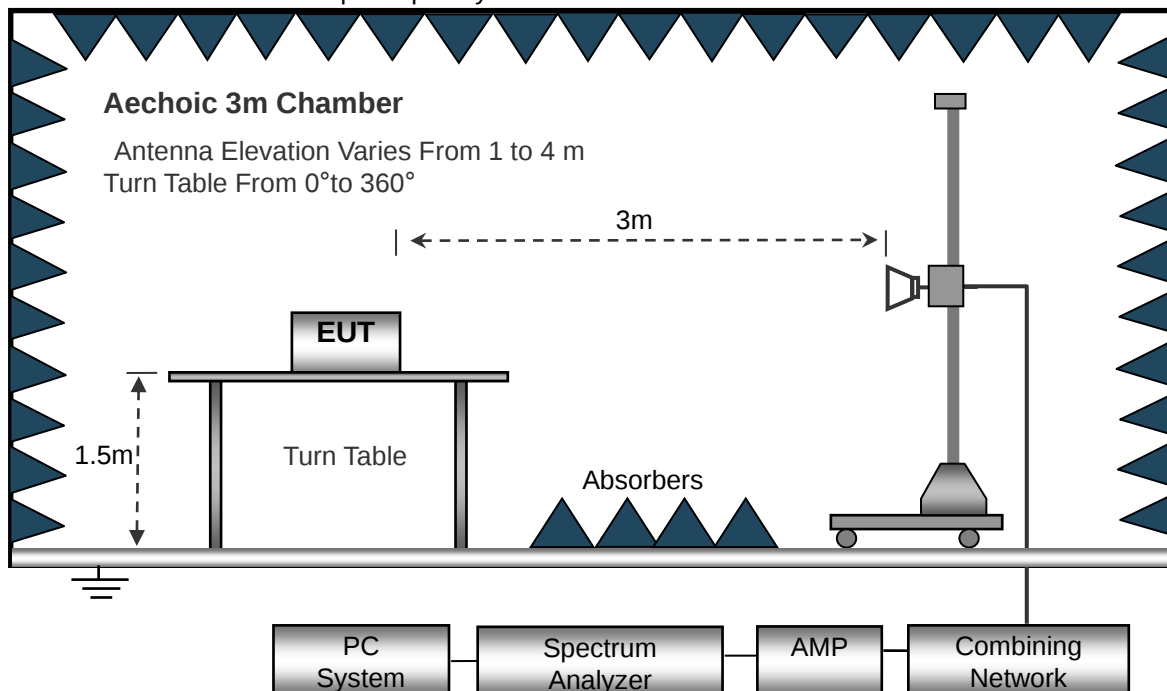

3.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.

**3.2.6 TEST RESULTS (Between 9KHz – 30 MHz)**

Temperature:	20℃	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Mode 3	Polarization :	--

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	PASS
--	--	--	--	PASS

NOTE:


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance}/\text{test distance})$ (dB);

Limit line = specific limits(dBuV) + distance extrapolation factor.

**3.2.7 TEST RESULTS (Between 30MHz – 1GHz)**

Temperature:	26℃	Relative Humidity:	54%
Pressure:	1010 hPa	Polarization :	Horizontal
Test Voltage :	AC 120V/60Hz		
Test Mode :	Mode 3		

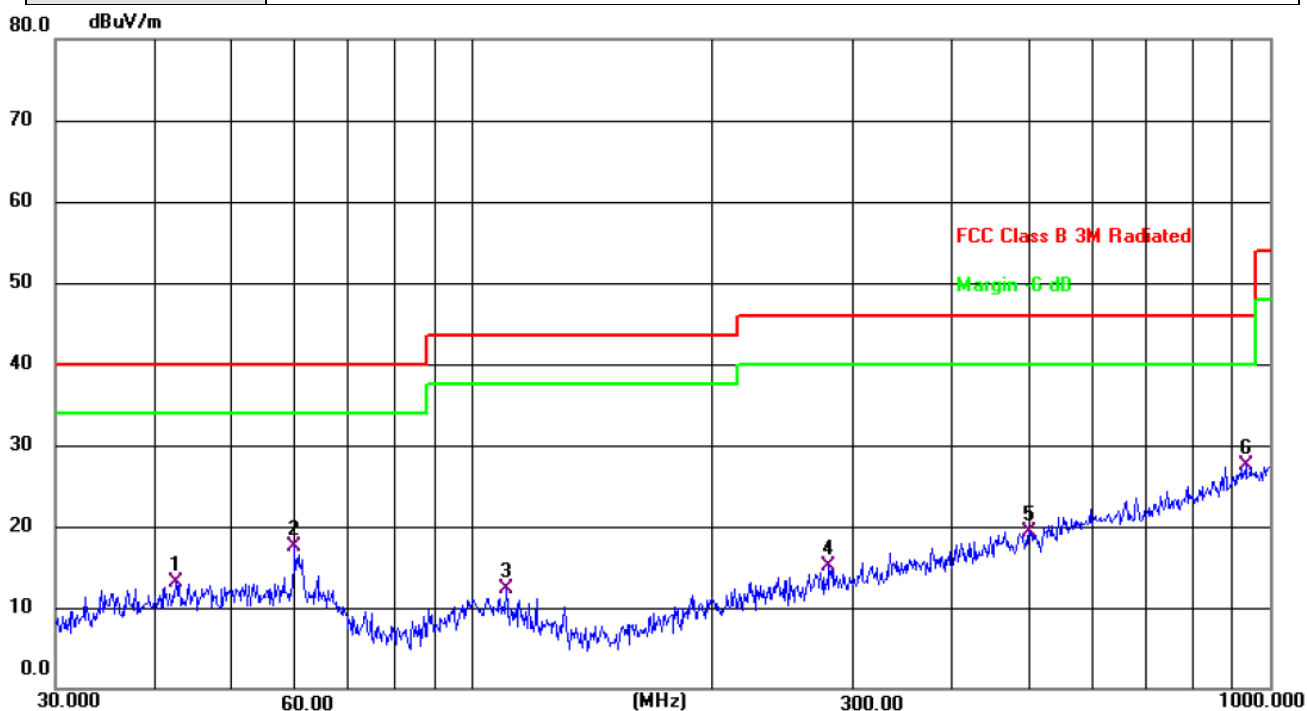

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		42.4508	26.52	-13.50	13.02	40.00	-26.98	QP
2		59.8588	31.04	-13.61	17.43	40.00	-22.57	QP
3		110.1816	27.08	-14.75	12.33	43.50	-31.17	QP
4		280.0237	27.28	-12.24	15.04	46.00	-30.96	QP
5		499.4247	26.74	-7.37	19.37	46.00	-26.63	QP
6	*	932.2715	27.54	-0.03	27.51	46.00	-18.49	QP

Remark:

Correct Factor = Cable loss + Antenna factor – Preamplifier;

Level = Reading Level + Correct Factor; Margin = Level - Limit;



Temperature:	26°C	Relative Humidity:	54%
Pressure:	1010 hPa	Polarization :	Vertical
test voltage :	AC 120V/60Hz		
Test Mode :	Mode 3		



No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector
		MHz	dBuV	dB	dBuV/m	dB/m	dB	
1		37.8121	28.89	-14.58	14.31	40.00	-25.69	QP
2	*	59.4405	31.79	-13.61	18.18	40.00	-21.82	QP
3		105.2717	28.65	-14.67	13.98	43.50	-29.52	QP
4		203.5227	28.22	-14.91	13.31	43.50	-30.19	QP
5		359.1860	28.49	-10.36	18.13	46.00	-27.87	QP
6		682.3484	28.40	-4.54	23.86	46.00	-22.14	QP

Remark:

Correct Factor = Cable loss + Antenna factor – Preamplifier;

Level = Reading Level + Correct Factor; Margin = Level - Limit;

**3.2.8 TEST RESULTS (1ghz~40ghZ)**

802.11a band 1

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:5180									
V	10360	56.95	49.05	15.3	37.39	60.59	68.2	-7.61	PK
V	10360	41.47	49.05	15.3	37.39	45.11	54	-8.89	AV
V	15540	53.14	49.16	15.27	40.45	59.7	74	-14.30	PK
V	15540	39.27	49.16	15.27	40.45	45.83	54	-8.17	AV
H	10360	56.66	49.05	15.3	37.39	60.3	68.2	-7.90	PK
H	10360	40.27	49.05	15.3	37.39	43.91	54	-10.09	AV
H	15540	51.67	49.16	15.27	40.45	58.23	74	-15.77	PK
H	15540	39.02	49.16	15.27	40.45	45.58	54	-8.42	AV
operation frequency:5200									
V	10400	57.99	49.09	15.34	37.42	61.66	68.2	-6.54	PK
V	10400	39.58	49.09	15.34	37.42	43.25	54	-10.75	AV
V	15600	52.91	49.18	15.29	40.47	59.49	74	-14.51	PK
V	15600	38.38	49.18	15.29	40.47	44.96	54	-9.04	AV
H	10400	56.48	49.09	15.34	37.42	60.15	68.2	-8.05	PK
H	10400	39.39	49.09	15.34	37.42	43.06	54	-10.94	AV
H	15600	53.49	49.18	15.29	40.47	60.07	74	-13.93	PK
H	15600	38.78	49.18	15.29	40.47	45.36	54	-8.64	AV
operation frequency:5240									
V	10480	58.5	49.11	15.37	37.46	62.22	68.2	-5.98	PK
V	10480	39.99	49.11	15.37	37.46	43.71	54	-10.29	AV
V	15720	53.93	49.21	15.34	40.51	60.57	74	-13.43	PK
V	15720	38.26	49.21	15.34	40.51	44.9	54	-9.10	AV
H	10480	57.83	49.11	15.37	31.31	55.4	68.2	-12.80	PK
H	10480	45.73	49.11	15.37	31.31	43.3	54	-10.70	AV
H	15720	54.66	49.21	15.34	40.51	61.3	74	-12.70	PK
H	15720	37.26	49.21	15.34	40.51	43.9	54	-10.10	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11n HT20

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:5180									
V	10360	56.69	49.05	15.3	37.39	60.33	68.2	-7.87	PK
V	10360	38.75	49.05	15.3	37.39	42.39	54	-11.61	AV
V	15540	52.76	49.16	15.27	40.45	59.32	74	-14.68	PK
V	15540	38.9	49.16	15.27	40.45	45.46	54	-8.54	AV
H	10360	57.4	49.05	15.3	37.39	61.04	68.2	-7.16	PK
H	10360	39.91	49.05	15.3	37.39	43.55	54	-10.45	AV
H	15540	51.55	49.16	15.27	40.45	58.11	74	-15.89	PK
H	15540	38.66	49.16	15.27	40.45	45.22	54	-8.78	AV
operation frequency:5200									
V	10400	56.57	49.09	15.34	37.42	60.24	68.2	-7.96	PK
V	10400	39.5	49.09	15.34	37.42	43.17	54	-10.83	AV
V	15600	52.42	49.18	15.29	40.47	59	74	-15.00	PK
V	15600	38.34	49.18	15.29	40.47	44.92	54	-9.08	AV
H	10400	55.85	49.09	15.34	37.42	59.52	68.2	-8.68	PK
H	10400	40.33	49.09	15.34	37.42	44	54	-10.00	AV
H	15600	54.24	49.18	15.29	40.47	60.82	74	-13.18	PK
H	15600	39.77	49.18	15.29	40.47	46.35	54	-7.65	AV
operation frequency:5240									
V	10480	57.59	49.11	15.37	37.46	61.31	68.2	-6.89	PK
V	10480	40.78	49.11	15.37	37.46	44.5	54	-9.50	AV
V	15720	52.42	49.21	15.34	40.51	59.06	74	-14.94	PK
V	15720	38.41	49.21	15.34	40.51	45.05	54	-8.95	AV
H	10480	58.2	49.11	15.37	31.31	55.77	68.2	-12.43	PK
H	10480	44.72	49.11	15.37	31.31	42.29	54	-11.71	AV
H	15720	51.93	49.21	15.34	40.51	58.57	74	-15.43	PK
H	15720	39.32	49.21	15.34	40.51	45.96	54	-8.04	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11n HT40

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:5190									
V	10380	56.58	49.07	15.33	37.41	60.25	68.2	-7.95	PK
V	10380	39.49	49.07	15.33	37.41	43.16	54	-10.84	AV
V	15570	52.72	49.17	15.28	40.46	59.29	74	-14.71	PK
V	15570	38.51	49.17	15.28	40.46	45.08	54	-8.92	AV
H	10380	56.55	49.07	15.33	37.41	60.22	68.2	-7.98	PK
H	10380	40.29	49.07	15.33	37.41	43.96	54	-10.04	AV
H	15570	52.54	49.17	15.28	40.46	59.11	74	-14.89	PK
H	15570	38.8	49.17	15.28	40.46	45.37	54	-8.63	AV
operation frequency:5230									
V	10460	57.6	49.11	15.37	37.46	61.32	68.2	-6.88	PK
V	10460	39.76	49.11	15.37	37.46	43.48	54	-10.52	AV
V	15690	52.64	49.21	15.34	40.51	59.28	74	-14.72	PK
V	15690	38.48	49.21	15.34	40.51	45.12	54	-8.88	AV
H	10460	57.98	49.11	15.37	31.31	55.55	68.2	-12.65	PK
H	10460	44.95	49.11	15.37	31.31	42.52	54	-11.48	AV
H	15690	53.14	49.21	15.34	40.51	59.78	74	-14.22	PK
H	15690	39.97	49.21	15.34	40.51	46.61	54	-7.39	AV
Remark:									
1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit									
2. If peak below the average limit, the average emission was no test.									
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.									



802.11a band 4

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:5745									
V	11490	54.59	49.05	15.3	37.39	58.23	74	-15.77	PK
V	11490	42.07	49.05	15.3	37.39	45.71	54	-8.29	AV
V	17235	55.92	49.16	15.27	40.45	62.48	68.2	-5.72	PK
V	17235	41.17	49.16	15.27	40.45	47.73	54	-6.27	AV
H	11490	52.54	49.05	15.3	37.39	56.18	74	-17.82	PK
H	11490	43.11	49.05	15.3	37.39	46.75	54	-7.25	AV
H	17235	51.48	49.16	15.27	40.45	58.04	68.2	-10.16	PK
H	17235	41.09	49.16	15.27	40.45	47.65	54	-6.35	AV
operation frequency:5785									
V	11570	51.86	49.09	15.34	37.42	55.53	74	-18.47	PK
V	11570	42.22	49.09	15.34	37.42	45.89	54	-8.11	AV
V	17355	50.66	49.18	15.29	40.47	57.24	68.2	-10.96	PK
V	17355	41.34	49.18	15.29	40.47	47.92	54	-6.08	AV
H	11570	51.23	49.09	15.34	37.42	54.9	74	-19.10	PK
H	11570	42.42	49.09	15.34	37.42	46.09	54	-7.91	AV
H	17355	48.82	49.18	15.29	40.47	55.4	68.2	-12.80	PK
H	17355	41.23	49.18	15.29	40.47	47.81	54	-6.19	AV
operation frequency:5825									
V	11650	52.73	49.11	15.37	37.46	56.45	74	-17.55	PK
V	11650	42.23	49.11	15.37	37.46	45.95	54	-8.05	AV
V	17475	50.04	49.21	15.34	40.51	56.68	68.2	-11.52	PK
V	17475	40.74	49.21	15.34	40.51	47.38	54	-6.62	AV
H	11650	58.2	49.11	15.37	31.31	55.77	74	-18.23	PK
H	11650	49.43	49.11	15.37	31.31	47	54	-7.00	AV
H	17475	49.74	49.21	15.34	40.51	56.38	68.2	-11.82	PK
H	17475	40.7	49.21	15.34	40.51	47.34	54	-6.66	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11n HT20

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:5745									
V	11490	49.92	49.05	15.3	37.39	53.56	74	-20.44	PK
V	11490	42.56	49.05	15.3	37.39	46.2	54	-7.80	AV
V	17235	49.13	49.16	15.27	40.45	55.69	68.2	-12.51	PK
V	17235	41	49.16	15.27	40.45	47.56	54	-6.44	AV
H	11490	49.68	49.05	15.3	37.39	53.32	74	-20.68	PK
H	11490	41.9	49.05	15.3	37.39	45.54	54	-8.46	AV
H	17235	48.59	49.16	15.27	40.45	55.15	68.2	-13.05	PK
H	17235	41.11	49.16	15.27	40.45	47.67	54	-6.33	AV
operation frequency:5785									
V	11570	52.96	49.09	15.34	37.42	56.63	74	-17.37	PK
V	11570	42.81	49.09	15.34	37.42	46.48	54	-7.52	AV
V	17355	49.91	49.18	15.29	40.47	56.49	68.2	-11.71	PK
V	17355	41.23	49.18	15.29	40.47	47.81	54	-6.19	AV
H	11570	50.44	49.09	15.34	37.42	54.11	74	-19.89	PK
H	11570	44.36	49.09	15.34	37.42	48.03	54	-5.97	AV
H	17355	49.61	49.18	15.29	40.47	56.19	68.2	-12.01	PK
H	17355	41.34	49.18	15.29	40.47	47.92	54	-6.08	AV
operation frequency:5825									
V	11650	51.82	49.11	15.37	37.46	55.54	74	-18.46	PK
V	11650	42.01	49.11	15.37	37.46	45.73	54	-8.27	AV
V	17475	48.8	49.21	15.34	40.51	55.44	68.2	-12.76	PK
V	17475	41.23	49.21	15.34	40.51	47.87	54	-6.13	AV
H	11650	58.39	49.11	15.37	31.31	55.96	74	-18.04	PK
H	11650	45.05	49.11	15.37	31.31	42.62	54	-11.38	AV
H	17475	49.84	49.21	15.34	40.51	56.48	68.2	-11.72	PK
H	17475	41	49.21	15.34	40.51	47.64	54	-6.36	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11n HT40

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:5755									
V	11510	49.82	49.07	15.33	37.41	53.49	74	-20.51	PK
V	11510	41.62	49.07	15.33	37.41	45.29	54	-8.71	AV
V	17265	50.11	49.17	15.28	40.46	56.68	68.2	-11.52	PK
V	17265	41.17	49.17	15.28	40.46	47.74	54	-6.26	AV
H	11510	49.1	49.07	15.33	37.41	52.77	74	-21.23	PK
H	11510	42.01	49.07	15.33	37.41	45.68	54	-8.32	AV
H	17265	50.1	49.17	15.28	40.46	56.67	68.2	-11.53	PK
H	17265	40.81	49.17	15.28	40.46	47.38	54	-6.62	AV
operation frequency:5795									
V	11590	49.73	49.11	15.37	37.46	53.45	74	-20.55	PK
V	11590	41.66	49.11	15.37	37.46	45.38	54	-8.62	AV
V	17385	48.87	49.21	15.34	40.51	55.51	68.2	-12.69	PK
V	17385	40.83	49.21	15.34	40.51	47.47	54	-6.53	AV
H	11590	58.13	49.11	15.37	31.31	55.7	74	-18.30	PK
H	11590	44.95	49.11	15.37	31.31	42.52	54	-11.48	AV
H	17385	49.42	49.21	15.34	40.51	56.06	68.2	-12.14	PK
H	17385	41.21	49.21	15.34	40.51	47.85	54	-6.15	AV
Remark: 1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit 2. If peak below the average limit, the average emission was no test. 3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.									

**3.3 RADIATED BAND EMISSION MEASUREMENT****3.3.1 TEST REQUIREMENT:**

15.407 (b)

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating solely in the 5.725-5.850 GHz band:

(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

(ii) Devices certified before March 2, 2017 with antenna gain greater than 10 dBi may demonstrate compliance with the emission limits in § 15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease by March 2, 2018. Devices certified before March 2, 2018 with antenna gain of 10 dBi or less may demonstrate compliance with the emission limits in § 15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease before March 2, 2020.

The provisions of §15.205 apply to intentional radiators operating under this section, 15.205 Restricted bands of operation

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	Band 1:5000MHz-5150MHz, Band 4:5600MHz-5785MHz
Stop Frequency	Band 1:5350MHz-5460MHz, Band 4:5780MHz-6000MHz
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average



3.3.2 TEST PROCEDURE

Above 1GHz test procedure as below:

- a. 1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel,the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

3.3.3 DEVIATION FROM TEST STANDARD

No deviation

3.3.4 TEST SETUP

Radiated Emission Test-Up Frequency Above 1GHz

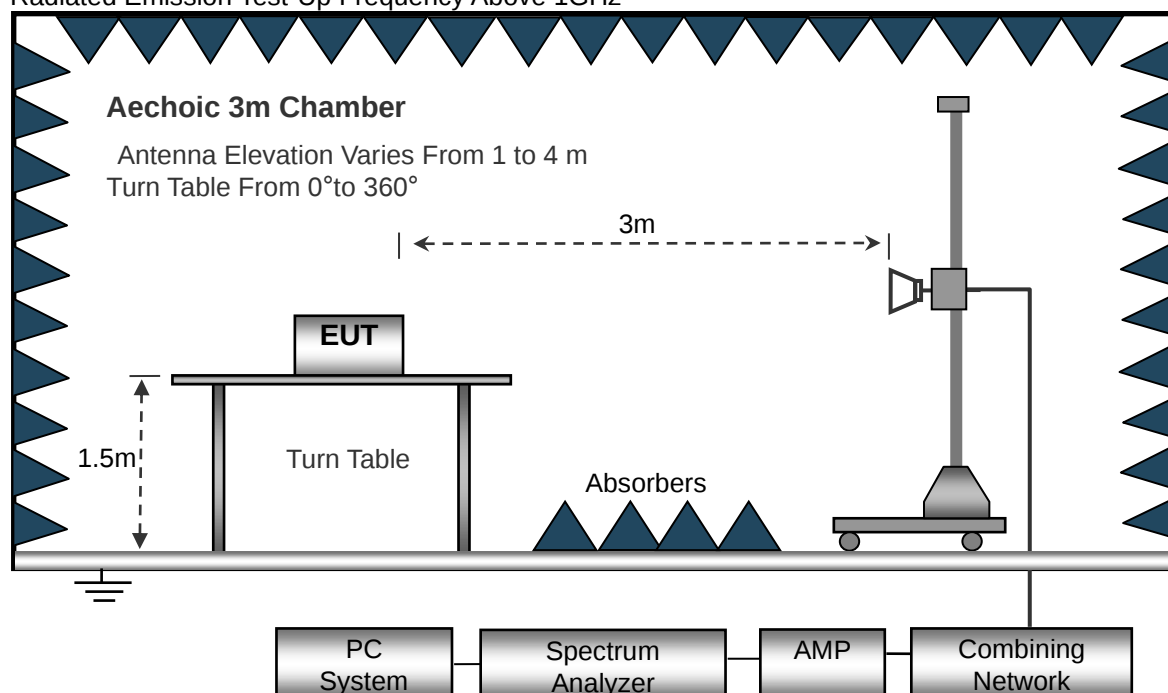



3.3.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.

3.3.6 TEST RESULT

802.11a(Band 1)

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:5180									
V	5110	53.01	49.12	15.6	37.34	56.83	74	-17.17	PK
V	5110	39.69	49.12	15.6	37.34	43.51	54	-10.49	AV
H	5135	54.1	49.19	15.24	40.43	60.58	74	-13.42	PK
H	5135	36.57	49.19	15.24	40.43	43.05	54	-10.95	AV
V	5110	52.32	49.12	15.6	37.34	56.14	74	-17.86	PK
V	5110	37.27	49.12	15.6	37.34	41.09	54	-12.91	AV
H	5135	53.94	49.19	15.24	40.43	60.42	74	-13.58	PK
H	5135	33.35	49.19	15.24	40.43	39.83	54	-14.17	AV
operation frequency:5240									
V	5360	52.89	49.13	15.32	37.46	56.54	74	-17.46	PK
V	5360	35.57	49.13	15.32	37.46	39.22	54	-14.78	AV
H	5385	52.92	49.24	15.36	40.51	59.55	74	-14.45	PK
H	5385	31.88	49.24	15.36	40.51	38.51	54	-15.49	AV
V	5360	52.39	49.13	15.32	31.31	49.89	74	-24.11	PK
V	5360	40.47	49.13	15.32	31.31	37.97	54	-16.03	AV
H	5385	52.2	49.24	15.36	40.51	58.83	74	-15.17	PK
H	5385	32.57	49.24	15.36	40.51	39.2	54	-14.8	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11n HT20

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
operation frequency:5180									
V	5110	51.38	49.12	15.6	37.34	55.2	74	-18.8	PK
V	5110	32.86	49.12	15.6	37.34	36.68	54	-17.32	AV
H	5135	51.63	49.19	15.24	40.43	58.11	74	-15.89	PK
H	5135	33.35	49.19	15.24	40.43	39.83	54	-14.17	AV
V	5110	51	49.12	15.6	37.34	54.82	74	-19.18	PK
V	5110	33.08	49.12	15.6	37.34	36.9	54	-17.1	AV
H	5135	50.6	49.19	15.24	40.43	57.08	74	-16.92	PK
H	5135	32.07	49.19	15.24	40.43	38.55	54	-15.45	AV
operation frequency:5240									
V	5360	53.01	49.13	15.32	37.46	56.66	74	-17.34	PK
V	5360	34.58	49.13	15.32	37.46	38.23	54	-15.77	AV
H	5385	50.6	49.24	15.36	40.51	57.23	74	-16.77	PK
H	5385	33.08	49.24	15.36	40.51	39.71	54	-14.29	AV
V	5360	54.01	49.13	15.32	31.31	51.51	74	-22.49	PK
V	5360	36.41	49.13	15.32	31.31	33.91	54	-20.09	AV
H	5385	51.16	49.24	15.36	40.51	57.79	74	-16.21	PK
H	5385	33.61	49.24	15.36	40.51	40.24	54	-13.76	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11n HT40

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:5190									
V	5110	52.55	49.12	15.33	37.41	56.17	74	-17.83	PK
V	5110	35.4	49.12	15.33	37.41	39.02	54	-14.98	AV
H	5135	51.56	49.19	15.28	40.46	58.11	74	-15.89	PK
H	5135	34.26	49.19	15.28	40.46	40.81	54	-13.19	AV
V	5110	52.5	49.12	15.33	37.41	56.12	74	-17.88	PK
V	5110	34.78	49.12	15.33	37.41	38.4	54	-15.6	AV
H	5135	50.45	49.19	15.28	40.46	57	74	-17	PK
H	5135	35.08	49.19	15.28	40.46	41.63	54	-12.37	AV
operation frequency:5230									
V	5360	53.21	49.13	15.32	37.46	56.86	74	-17.14	PK
V	5360	37.25	49.13	15.32	37.46	40.9	54	-13.1	AV
H	5385	50.09	49.24	15.36	40.51	56.72	74	-17.28	PK
H	5385	36.35	49.24	15.36	40.51	42.98	54	-11.02	AV
V	5360	54.28	49.13	15.32	31.31	51.78	74	-22.22	PK
V	5360	41.71	49.13	15.32	31.31	39.21	54	-14.79	AV
H	5385	52.48	49.24	15.36	40.51	59.11	74	-14.89	PK
H	5385	36.3	49.24	15.36	40.51	42.93	54	-11.07	AV
Remark:									
1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit									
2. If peak below the average limit, the average emission was no test.									
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.									



802.11a(Band 4)

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBUV)	(dB)	(dB)	(dB/m)	(dBUV/m)	(dBUV/m)	(dB)	
operation frequency:5745									
V	5650	51.07	46.38	12.43	35.65	52.77	68.2	-15.43	PK
V	5650	40.62	46.38	12.43	35.65	42.32	54	-11.68	AV
H	5720	51.45	46.56	12.47	35.76	53.12	68.2	-15.08	PK
H	5720	40.81	46.56	12.47	35.76	42.48	54	-11.52	AV
V	5650	51.76	46.38	12.43	35.65	53.46	68.2	-14.74	PK
V	5650	40.81	46.38	12.43	35.65	42.51	54	-11.49	AV
H	5720	51.05	46.56	12.47	35.76	52.72	68.2	-15.48	PK
H	5720	40.74	46.56	12.47	35.76	42.41	54	-11.59	AV
operation frequency:5825									
V	5855	51.64	46.55	12.65	35.87	53.61	68.2	-14.59	PK
V	5855	39.91	46.55	12.65	35.87	41.88	54	-12.12	AV
H	5875	52.16	46.58	12.67	35.93	54.18	68.2	-14.02	PK
H	5875	39.64	46.58	12.67	35.93	41.66	54	-12.34	AV
V	5855	50.81	46.55	12.65	35.87	52.78	68.2	-15.42	PK
V	5855	38.85	46.55	12.65	35.87	40.82	54	-13.18	AV
H	5875	50.73	46.58	12.67	35.93	52.75	68.2	-15.45	PK
H	5875	39.08	46.58	12.67	35.93	41.1	54	-12.9	AV
Remark:									
1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit									
2. If peak below the average limit, the average emission was no test.									
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.									



802.11n HT20

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:5745									
V	5650	51.54	47.36	13.18	36.26	53.62	68.2	-14.58	PK
V	5650	41.67	47.36	13.18	36.26	43.75	54	-10.25	AV
H	5720	51.5	47.38	13.2	36.29	53.61	68.2	-14.59	PK
H	5720	41.38	47.38	13.2	36.29	43.49	54	-10.51	AV
V	5650	51.87	47.36	13.18	36.26	53.95	68.2	-14.25	PK
V	5650	41	47.36	13.18	36.26	43.08	54	-10.92	AV
H	5720	51.2	47.38	13.2	36.29	53.31	68.2	-14.89	PK
H	5720	39.99	47.38	13.2	36.29	42.1	54	-11.9	AV
operation frequency:5825									
V	5855	51.27	46.38	12.43	35.65	52.97	68.2	-15.23	PK
V	5855	41.23	46.38	12.43	35.65	42.93	54	-11.07	AV
H	5875	51.27	46.56	12.47	35.76	52.94	68.2	-15.26	PK
H	5875	41.5	46.56	12.47	35.76	43.17	54	-10.83	AV
V	5855	51.48	46.38	12.43	35.65	53.18	68.2	-15.02	PK
V	5855	40.01	46.38	12.43	35.65	41.71	54	-12.29	AV
H	5875	51.05	46.56	12.47	35.76	52.72	68.2	-15.48	PK
H	5875	40.04	46.56	12.47	35.76	41.71	54	-12.29	AV
Remark:									
1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit									
2. If peak below the average limit, the average emission was no test.									
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.									



802.11n HT40

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:5745									
V	5650	51.52	47.36	13.18	36.26	53.6	68.2	-14.6	PK
V	5650	41.96	47.36	13.18	36.26	44.04	54	-9.96	AV
H	5720	51.85	47.38	13.2	36.29	53.96	68.2	-14.24	PK
H	5720	40.24	47.38	13.2	36.29	42.35	54	-11.65	AV
V	5650	51.89	47.36	13.18	36.26	53.97	68.2	-14.23	PK
V	5650	40.88	47.36	13.18	36.26	42.96	54	-11.04	AV
H	5720	51.52	47.38	13.2	36.29	53.63	68.2	-14.57	PK
H	5720	41.3	47.38	13.2	36.29	43.41	54	-10.59	AV
operation frequency:5825									
V	5855	51.17	46.38	12.43	35.65	52.87	68.2	-15.33	PK
V	5855	41.18	46.38	12.43	35.65	42.88	54	-11.12	AV
H	5875	51.17	46.56	12.47	35.76	52.84	68.2	-15.36	PK
H	5875	41.45	46.56	12.47	35.76	43.12	54	-10.88	AV
V	5855	51.38	46.38	12.43	35.65	53.08	68.2	-15.12	PK
V	5855	39.97	46.38	12.43	35.65	41.67	54	-12.33	AV
H	5875	50.95	46.56	12.47	35.76	52.62	68.2	-15.58	PK
H	5875	40	46.56	12.47	35.76	41.67	54	-12.33	AV
Remark: 1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit 2. If peak below the average limit, the average emission was no test. 3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.									



4. AVERAGING OUTPUT POWER

4.1 APPLIED PROCEDURES / LIMIT

For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

4.1.1 TEST PROCEDURE

Method SA-2 uses trace averaging across ON and OFF times of the EUT transmissions, followed by duty cycle correction. The procedure for this method is as follows:

- a) Measure the duty cycle D of the transmitter output signal as described in 12.2.
- b) Set span to encompass the entire 26 dB EBW or 99% OBW of the signal.
- c) Set RBW=1 MHz.
- d) Set VBW ≥ 3 MHz.
- e) Number of points in sweep $\geq [2 \times \text{span} / \text{RBW}]$. (This gives bin-to-bin spacing $\leq \text{RBW} / 2$, so that narrowband signals are not lost between frequency bins.)
- f) Sweep time = auto.
- g) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
- h) Do not use sweep triggering. Allow the sweep to "free run."
- i) Trace average at least 100 traces in power averaging (rms) mode; however, the number of traces to be averaged shall be increased above 100 as needed such that the average accurately represents the true average over the ON and OFF periods of the transmitter.
- j) Compute power by integrating the spectrum across the 26 dB EBW or 99% OBW of the signal using the instrument's band power measurement function with band limits set equal to the EBW or OBW band edges. If the instrument does not have a band power function, then sum the spectrum levels (in power units) at 1MHz intervals extending across the 26 dB EBW or 99% OBW of the spectrum.
- k) Add $[10 \log (1 / D)]$, where D is the duty cycle, to the measured power to compute the average power during the actual transmission times (because the measurement represents an average over both the ON and off times of the transmission). For example, add $[10 \log (1 / 0.25)] = 6$ dB if the duty cycle is 25%.

4.1.2 DEVIATION FROM STANDARD

No deviation.

4.1.3 TEST SETUP



4.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.



4.1.5 TEST RESULTS


Temperature:	25 °C	Relative Humidity:	60%
Pressure:	1012 hPa	Test Voltage :	AC 120V/60Hz

Band	Mode	Test Channel	Average Output Power (dBm)	Duty factor (dB)	Total Output Power(dBm)	LIMIT (dBm)
Band 1	802.11a	Low	4.496	1.12	5.616	23.98
		Middle	3.539	0.87	4.409	23.98
		High	3.989	1.12	5.109	23.98
	802.11n HT20	Low	4.105	0.13	4.235	23.98
		Middle	3.228	0.13	3.358	23.98
		High	4.746	0.13	4.876	23.98
	802.11n HT40	Low	4.304	0.26	4.564	23.98
		High	4.041	0.32	4.361	23.98


Band	Mode	Test Channel	Average Output Power (dBm)	Duty factor (dB)	Total Output Power(dBm)	LIMIT (dBm)
Band 4	802.11a	Low	4.445	0.87	5.315	30
		Middle	4.03	1.06	5.09	30
		High	4.483	1.12	5.603	30
	802.11n HT20	Low	3.166	0.13	3.296	30
		Middle	4.887	0.13	5.017	30
		High	4.294	0.13	4.424	30
	802.11n HT40	Low	3.975	0.26	4.235	30
		High	3.613	0.32	3.933	30




802.11a

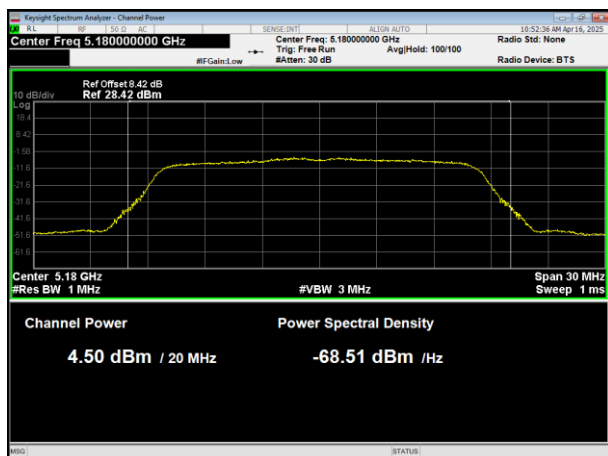


802.11n HT20

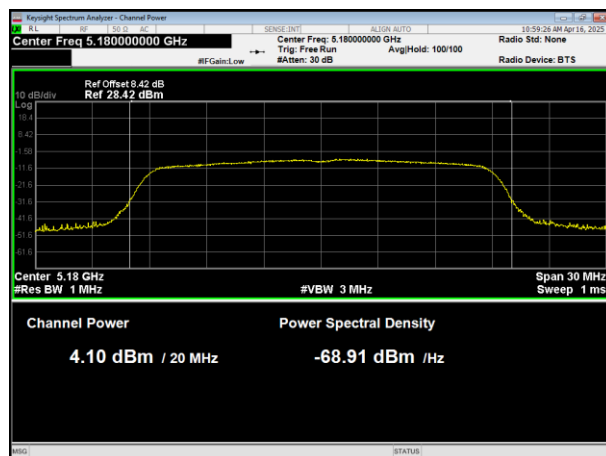


5180MHz

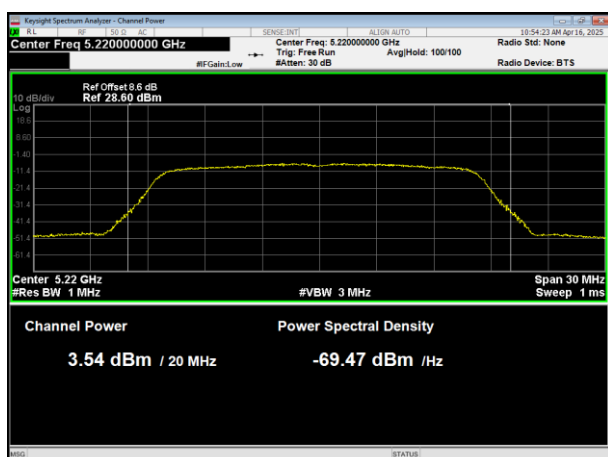


5180MHz

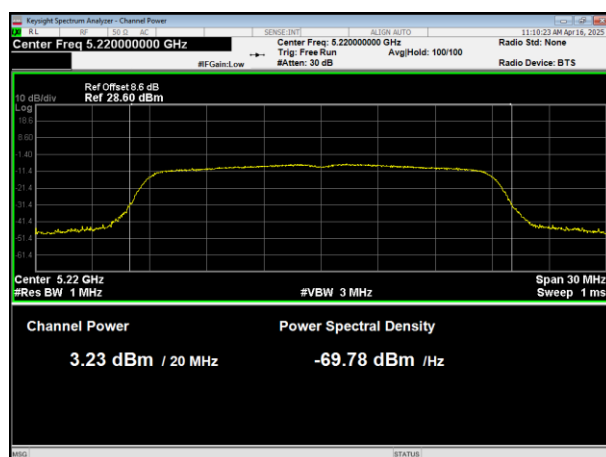

5200MHz

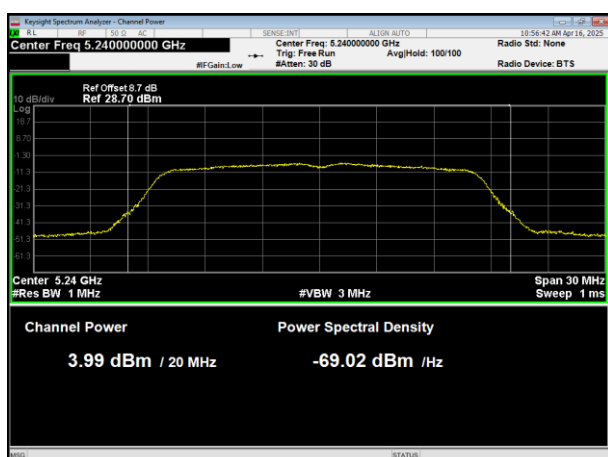

5200MHz

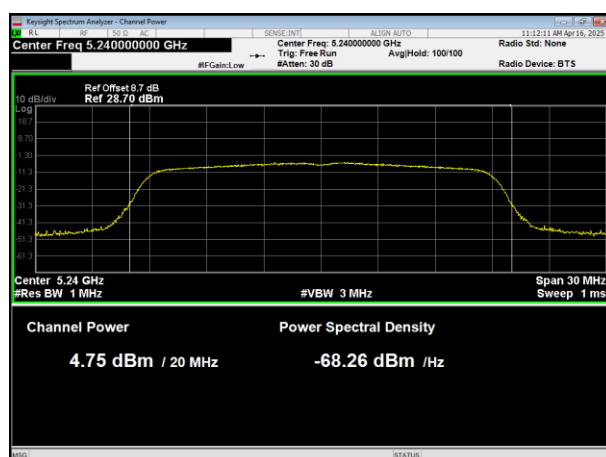


5240MHz


5240MHz



802.11n HT40

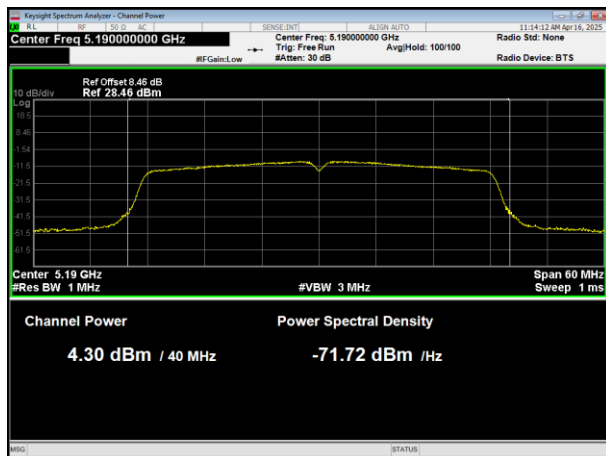


5190MHz

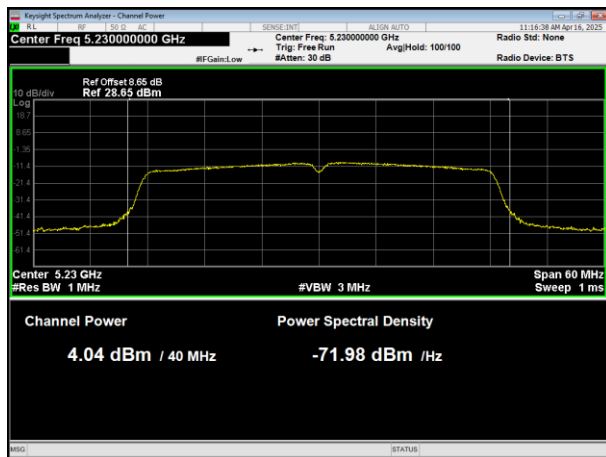


5230MHz




802.11a

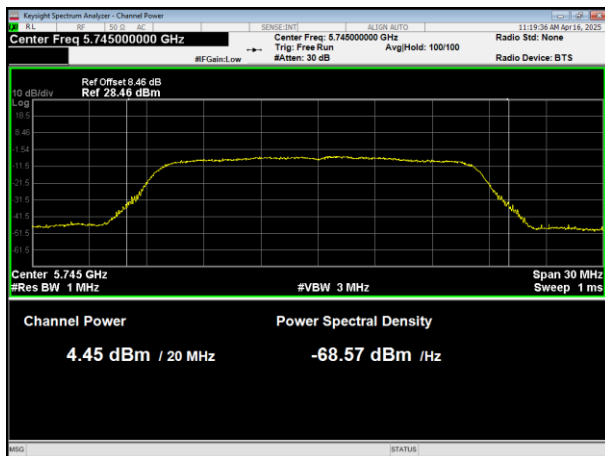


802.11n HT20

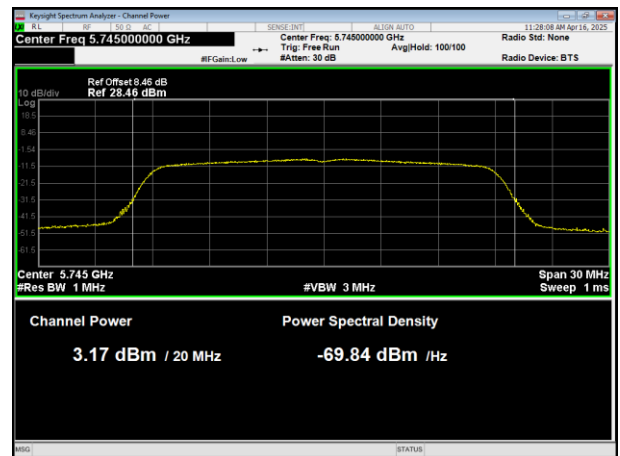


5745MHz

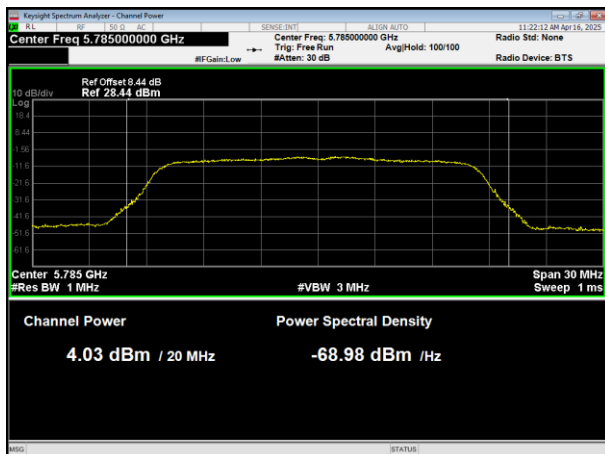


5745MHz

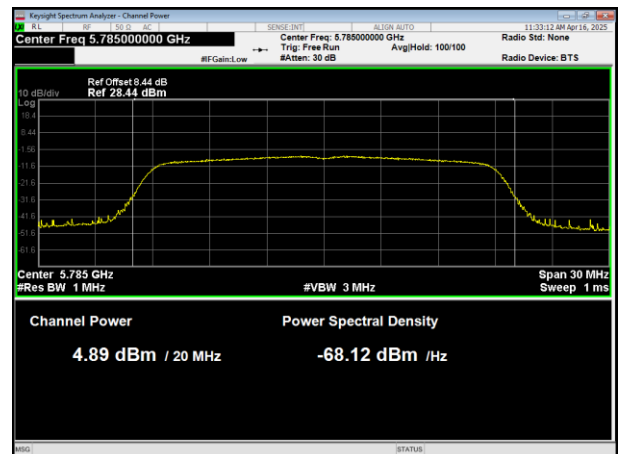

5785MHz

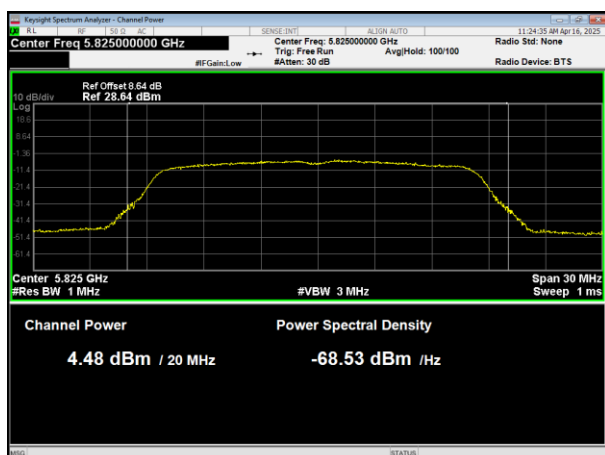

5785MHz

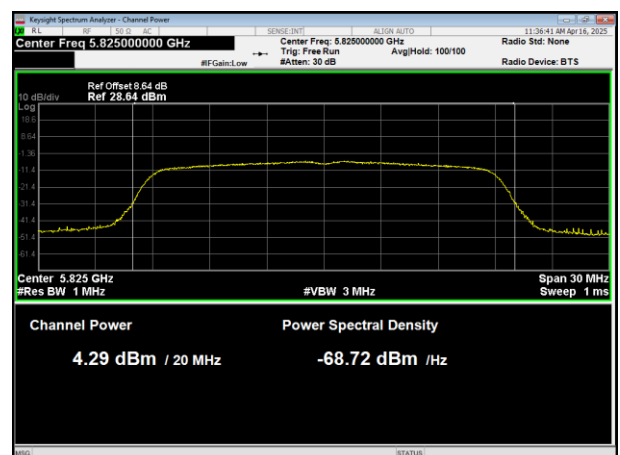


5825MHz


5825MHz



802.11n HT40

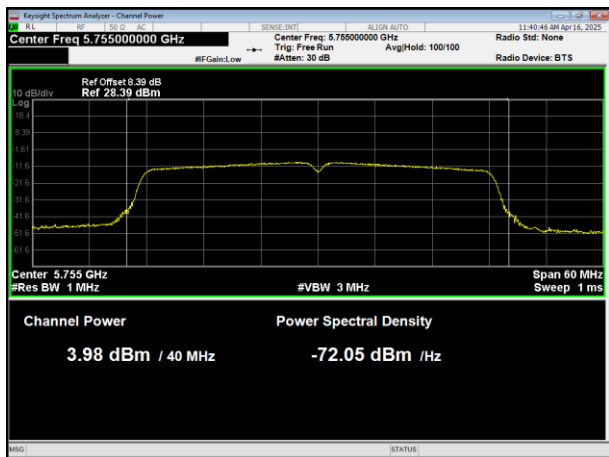

5755MHz

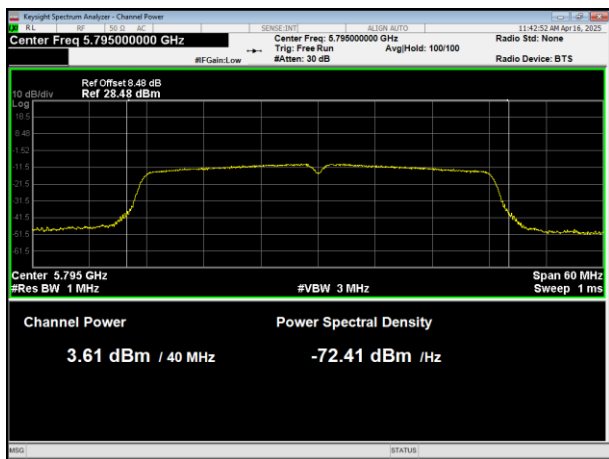

5795MHz



5. POWER SPECTRAL DENSITY TEST

5.1 APPLIED PROCEDURES / LIMIT

In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band.

In addition, the maximum power spectral density shall not exceed 30 dBm in any 500 kHz band.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	= the frequency band of operation
RB	RBW $\geq$ 1MHz for band 1 RBW $\geq$ 510KHz for band 4
VB	VBW $\geq$ 3RBW
Detector	RMS (i.e., power averaging).
Trace	Average
Sweep Time	Auto


5.1.1 TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. The testing follows FCC KDB 789033 D02.
3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to Spectrum.
4. For U-NII1, U-NII-2A, U-NII-2C Band:
Set RBW=1MHz, VBW=3MHz, where span is enough to capture the entire bandwidth, Sweep time = Auto (601 pts), detector = sample, traces 100 sweeps of video averaging. (SA-2 with the omission of procedure x, the integration with 26dB EBW bandwidth)
For U-NII-3 Band:
Set RBW=510 kHz, VBW=3*RBW, where span is enough to capture the entire bandwidth, Sweep time = Auto (601 pts), detector = sample, traces 100 sweeps of video averaging. (SA-2 with the omission of procedure x, the integration with 26dB EBW bandwidth)
5. Use the cursor on spectrum to peak search the highest level of trace
6. Record the max. reading and add 10 log(1/duty cycle).
we test all antennas, the antenna 1 was worst mode and the data recording in the report.
7. Duty factor Reference is made to the test results in Section 7.1.5.

5.1.2 DEVIATION FROM STANDARD

No deviation.

5.1.3 TEST SETUP

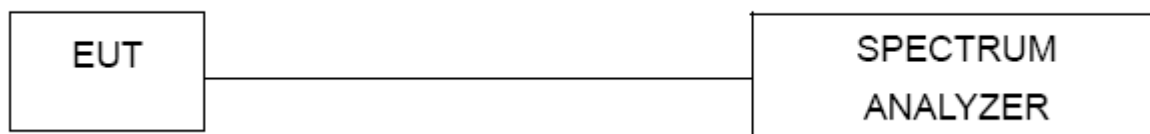

5.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.


**5.1.5 TEST RESULTS**

	Mode	Test Channel	Reading Level (dBm/MHz)	Duty factor (dB)	PSD (dBm/MHz)	Limit (dBm)	Result
Band1	802.11a	Low	-4.8	1.12	-3.68	11.00	PASS
		Middle	-5.745	0.87	-4.875	11.00	PASS
		High	-5.422	1.12	-4.302	11.00	PASS
	802.11n20	Low	-5.808	0.13	-5.678	11.00	PASS
		Middle	-6.256	0.13	-6.126	11.00	PASS
		High	-5.048	0.13	-4.918	11.00	PASS
	802.11n40	Low	-8.147	0.26	-7.887	11.00	PASS
		High	-8.315	0.32	-7.995	11.00	PASS


	Mode	Test Channel	Reading Level (dBm/510kHz)	Duty factor (dB)	PSD (dBm/500kHz)	Limit (dBm/500kHz)	Result
Band4	802.11a	Low	-7.941	0.87	-7.071	30.00	PASS
		Middle	-8.215	1.06	-7.155	30.00	PASS
		High	-7.742	1.12	-6.622	30.00	PASS
	802.11n20	Low	-9.521	0.13	-9.391	30.00	PASS
		Middle	-7.754	0.13	-7.624	30.00	PASS
		High	-8.466	0.13	-8.336	30.00	PASS
	802.11n40	Low	-11.908	0.26	-11.648	30.00	PASS
		High	-12.228	0.32	-11.908	30.00	PASS




802.11a

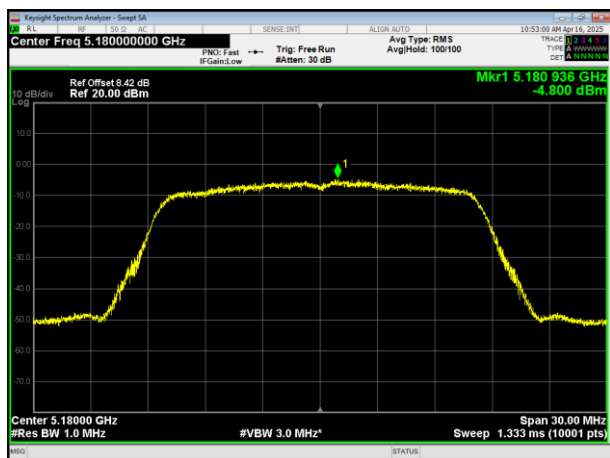


802.11n HT20

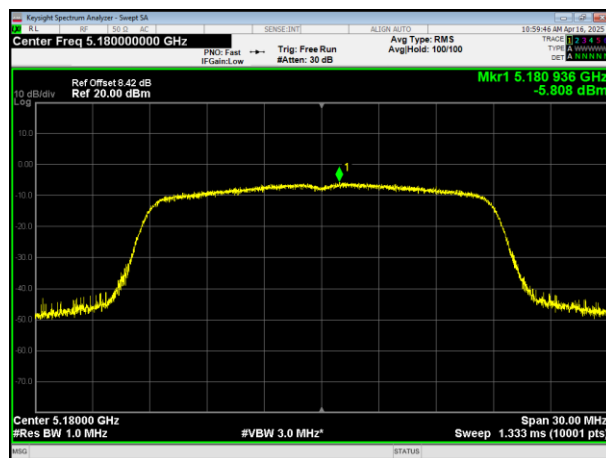


5180MHz

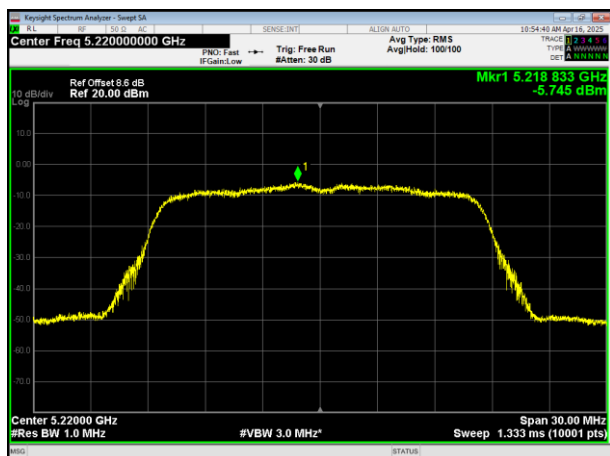


5180MHz

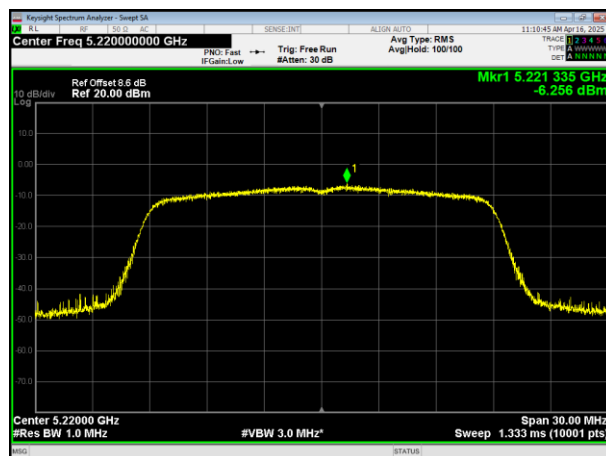

5200MHz

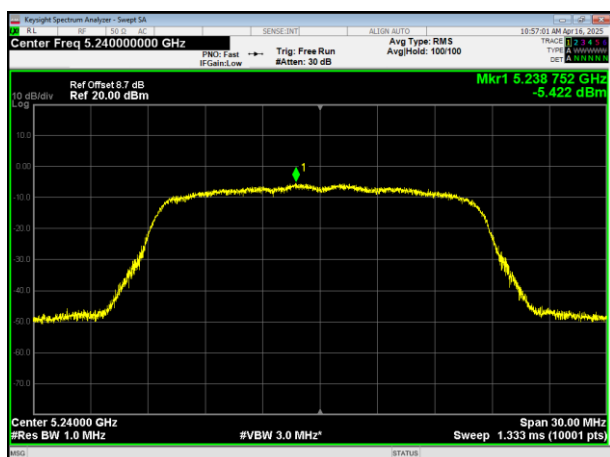

5200MHz

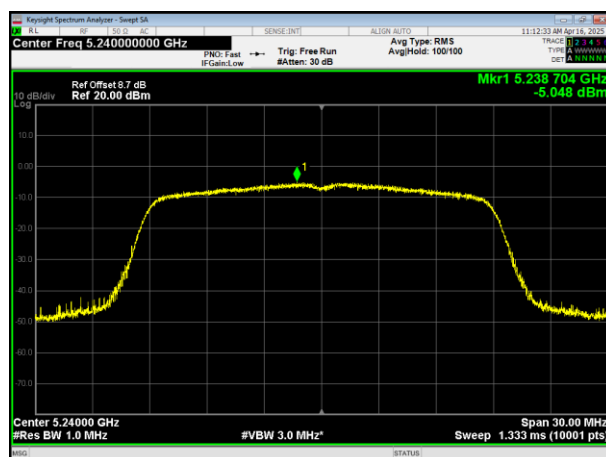


5240MHz


5240MHz



802.11n HT40

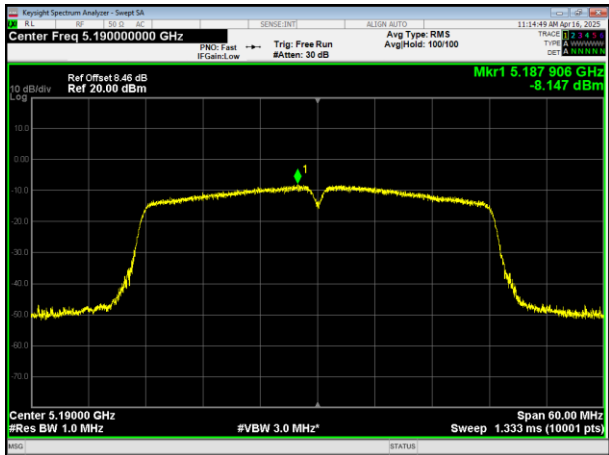


5190MHz

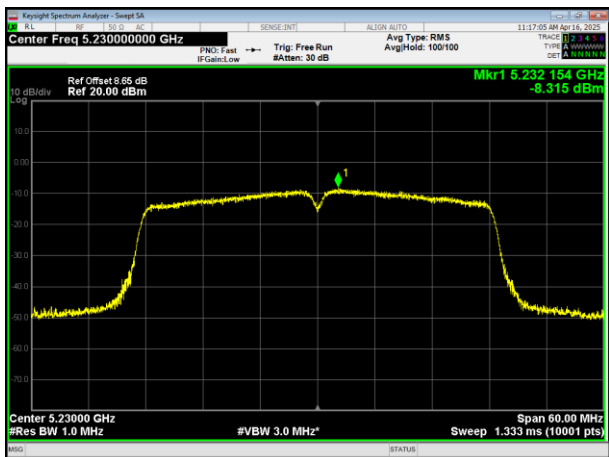


5230MHz




802.11a

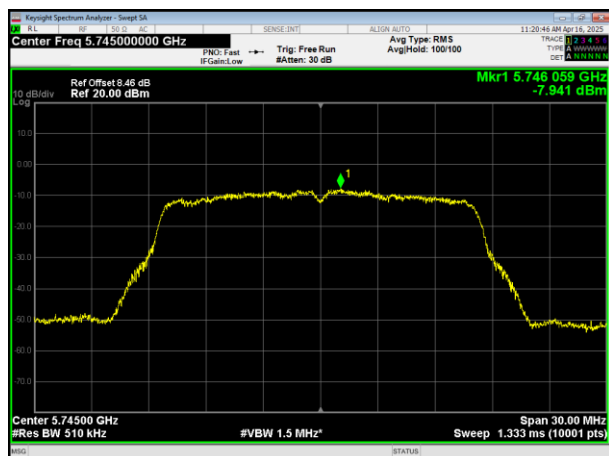


802.11n HT20

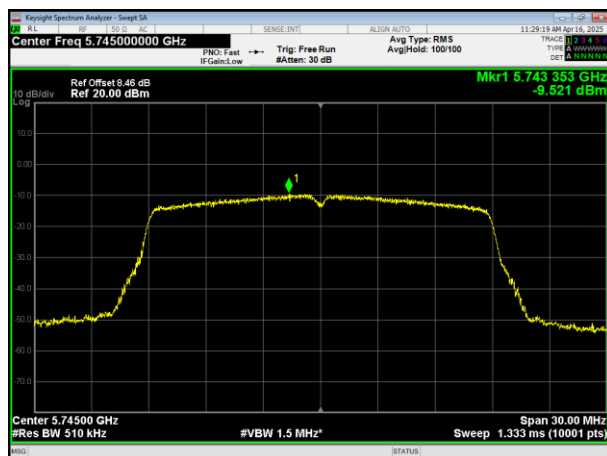


5745MHz

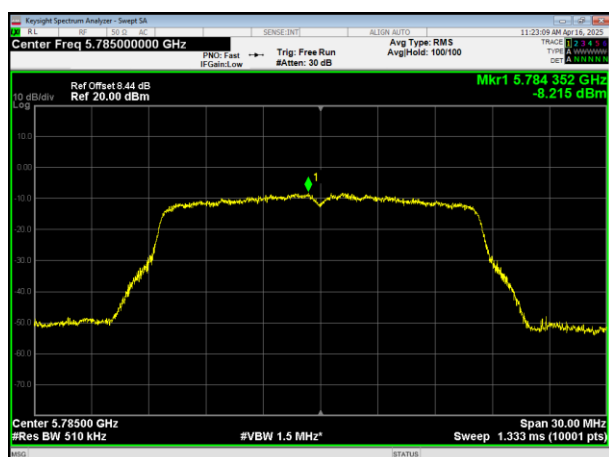


5745MHz

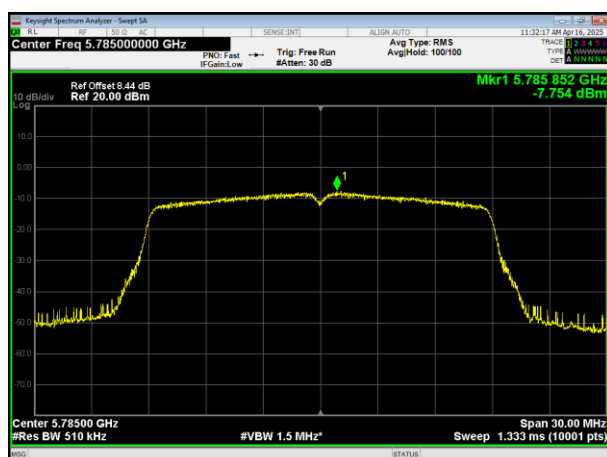

5785MHz

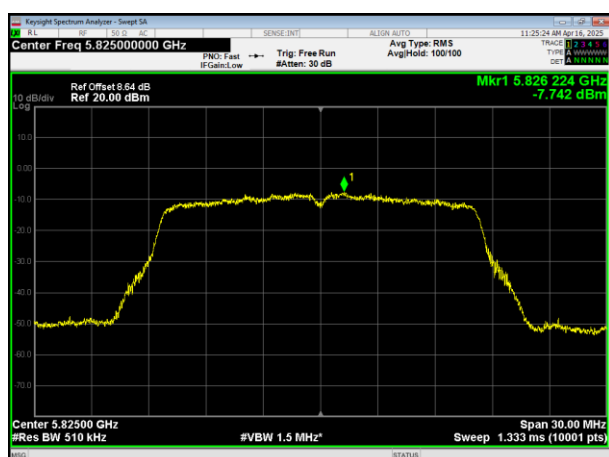

5785MHz

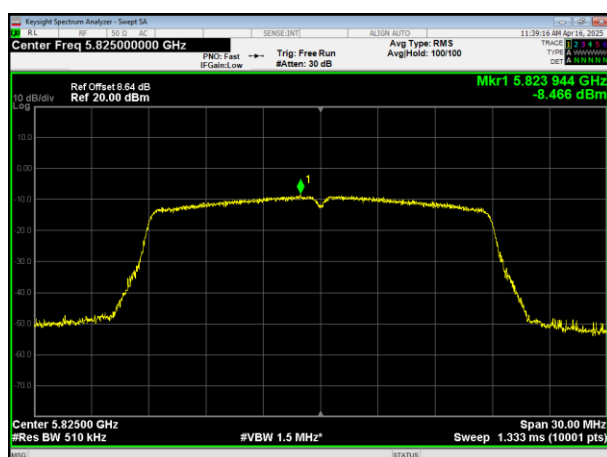


5825MHz


5825MHz



802.11n HT40

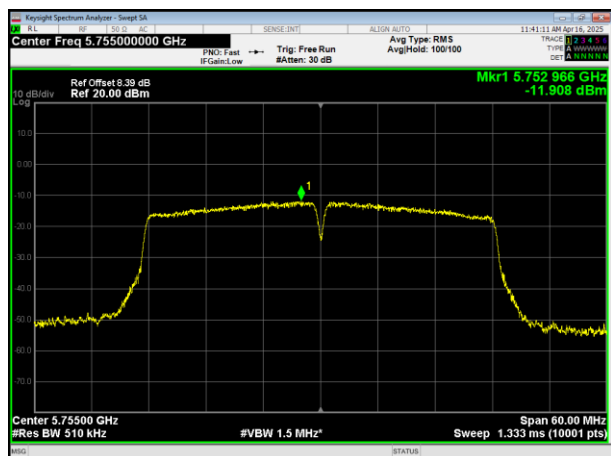

5755MHz

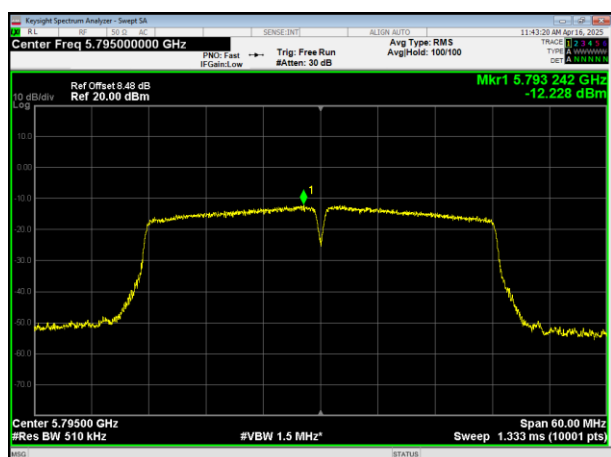

5795MHz



6. 6DB&26DB&99% BANDWIDTH TEST

6.1 APPLIED PROCEDURES / LIMIT

The 26 dB bandwidth is used to determine the conducted power limits.

There is no limit bandwidth for U-NII-1, U-NII-2-A and U-NII-2-C.

The minimum of 6dB Bandwidth measurement is 0.5 MHz for U-NII-3

6.1.1 TEST PROCEDURE

6dB Bandwidth	
Spectrum Parameters	Setting
RBW	100KHz
VBW	300KHz
Span	30MHz(20MHz Bandwidth mode) 60MHz(40MHz Bandwidth mode) 120MHz(80MHz Bandwidth mode)
Sweep Time	Auto
Detector	Peak
Trace Mode	Max Hold

26dB Bandwidth	
Spectrum Parameters	Setting
RBW	approximately 1% of the emission bandwidth
VBW	>RBW
Span	30MHz(20MHz Bandwidth mode) 60MHz(40MHz Bandwidth mode) 120MHz(80MHz Bandwidth mode)
Sweep Time	Auto
Detector	Peak
Trace Mode	Max Hold

99% Occupied Bandwidth	
Spectrum Parameters	Setting
RBW	1% to 5% of the OBW
VBW	Approximately three times the RBW
Span	between 1.5 times and 5.0 times the OBW
Sweep Time	Auto
Detector	Peak
Trace Mode	Max Hold

6.1.2 DEVIATION FROM STANDARD

No deviation.

6.1.3 TEST SETUP





6.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.


6.1.5 TEST RESULTS

		Test Channel	26dB Bandwidth (MHz)	Result
Band 1	802.11a	Low	19.635	Pass
		Middle	19.61	Pass
		High	19.674	Pass
	802.11n HT20	Low	20.322	Pass
		Middle	20.24	Pass
		High	20.213	Pass
	802.11n HT40	Low	39.727	Pass
		High	40.411	Pass


		Test Channel	6dB Bandwidth (MHz)	6dB Bandwidth Limit (MHz)	Result
Band 4	802.11a	Low	16.309	>0.5	Pass
		Middle	15.327	>0.5	Pass
		High	16.329	>0.5	Pass
	802.11n HT20	Low	13.777	>0.5	Pass
		Middle	15.66	>0.5	Pass
		High	15.315	>0.5	Pass
	802.11n HT40	Low	33.847	>0.5	Pass
		High	34.995	>0.5	Pass




802.11a

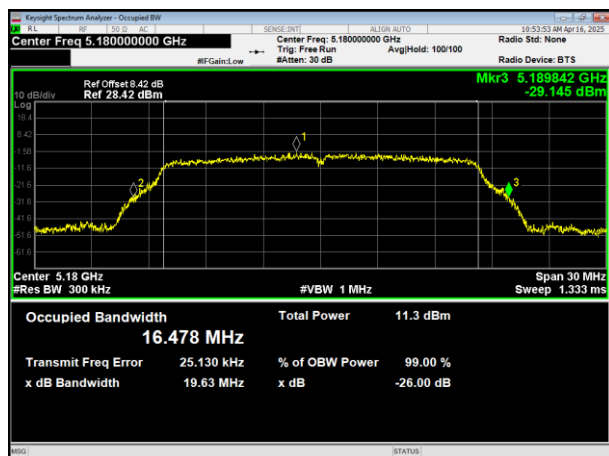


802.11n HT20

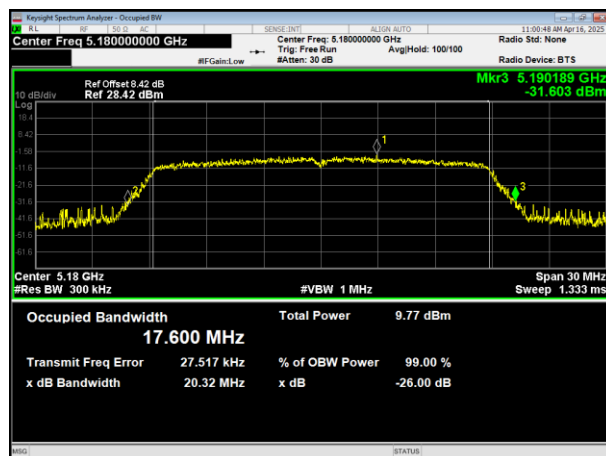


5180MHz

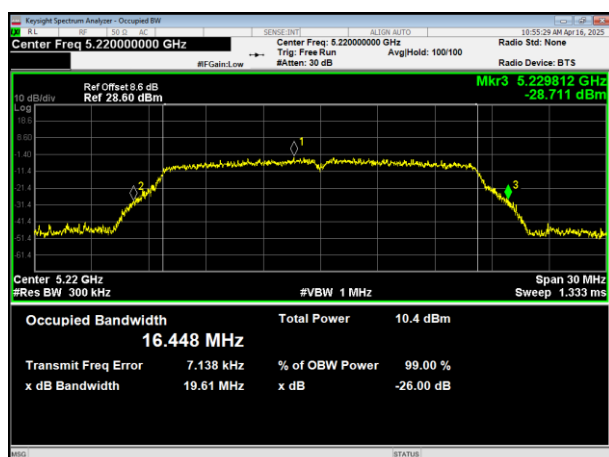


5180MHz

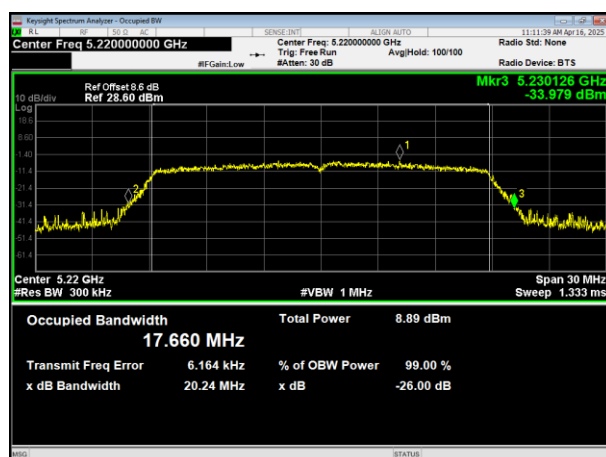

5200MHz

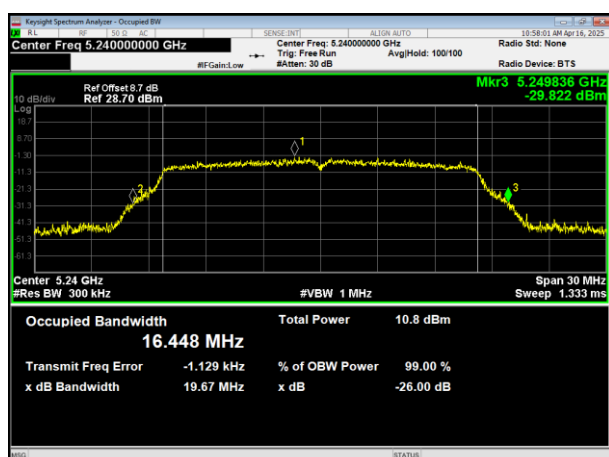

5200MHz

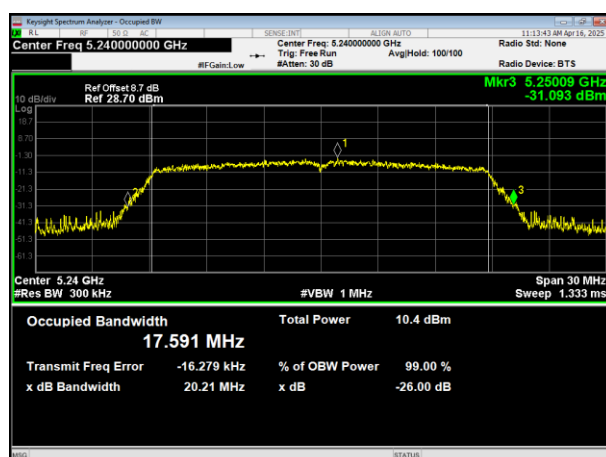


5240MHz


5240MHz



802.11n HT40

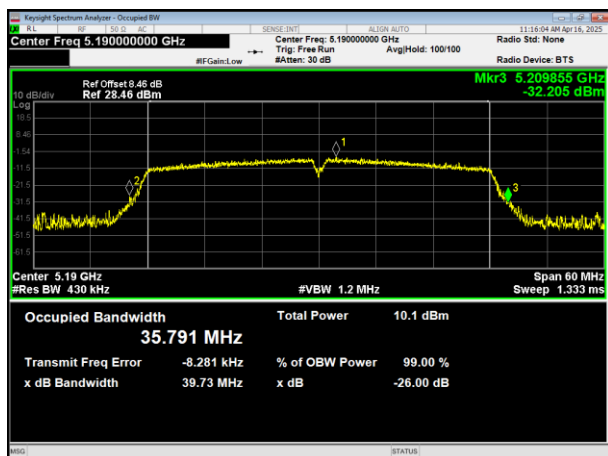


5190MHz

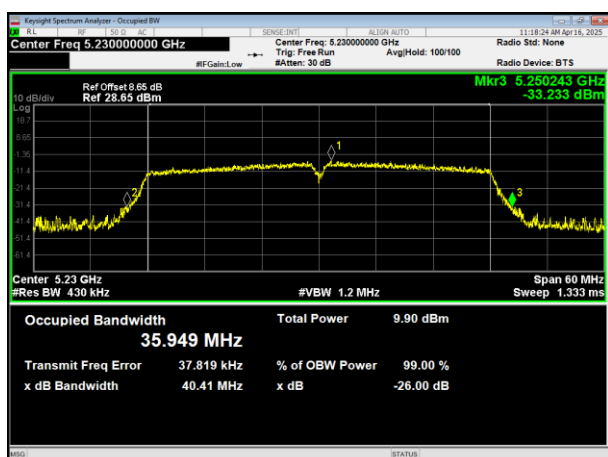


5230MHz




802.11a

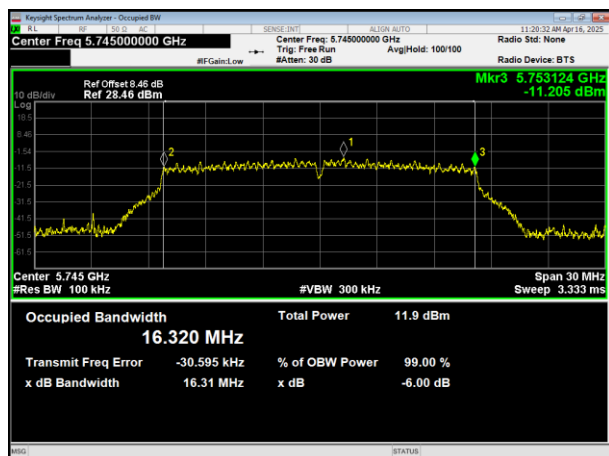


802.11n HT20

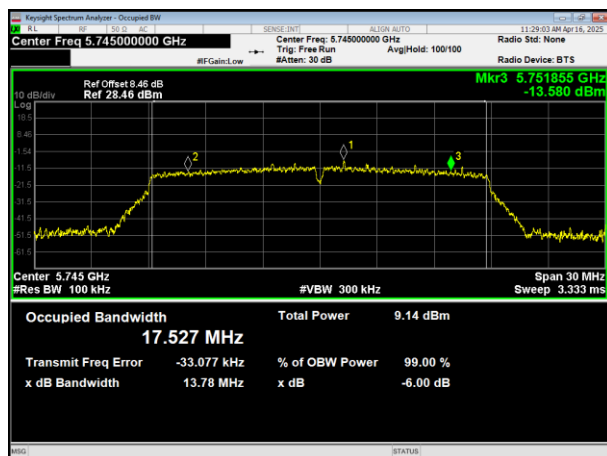


5745MHz

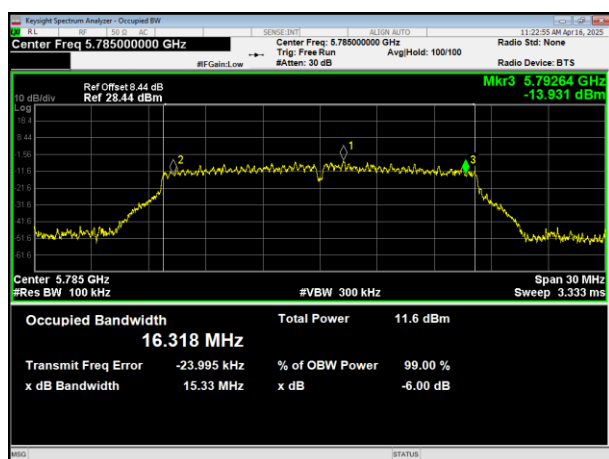


5745MHz

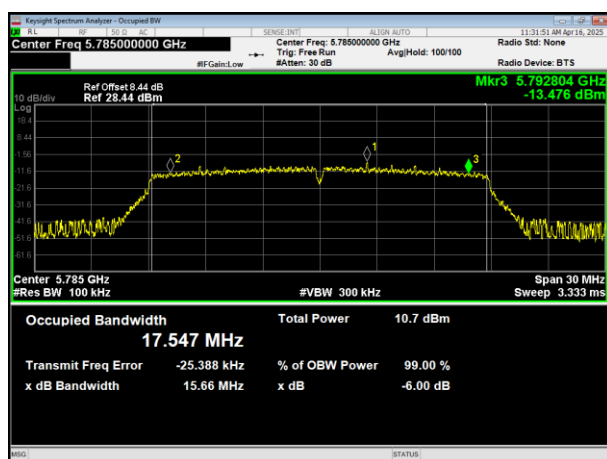

5785MHz

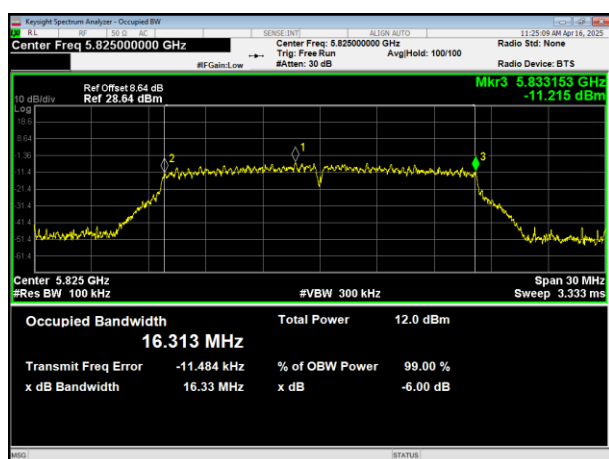

5785MHz

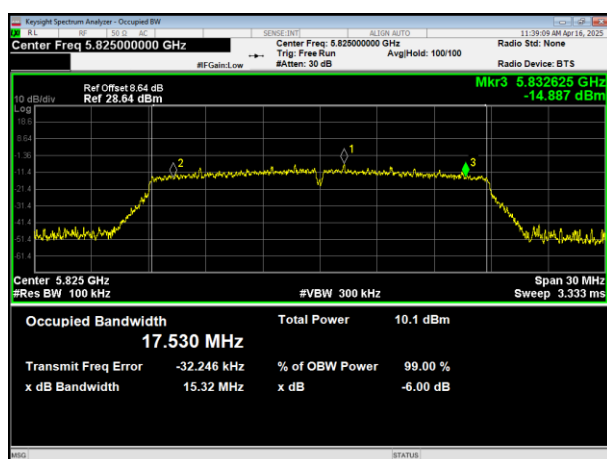


5825MHz


5825MHz



802.11n HT40

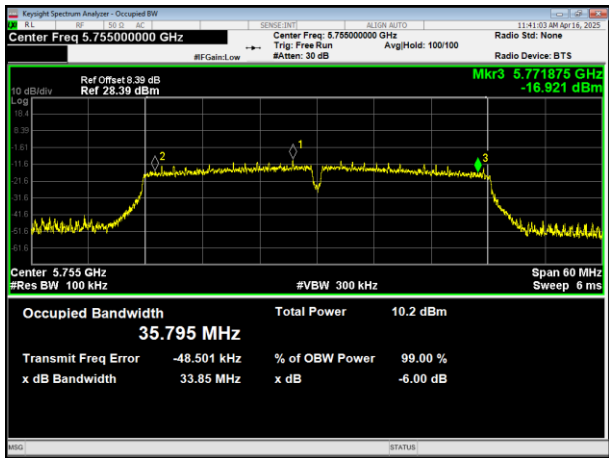

5755MHz

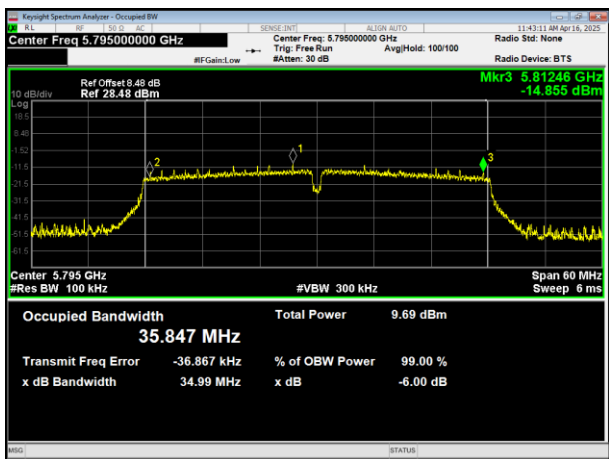

5795MHz



7. DUTY CYCLE TEST SIGNAL

7.1 APPLIED PROCEDURES / LIMIT

Pre-analysis Check: While conducting average power measurement, duty cycle of each mode shall be checked to ensure its duty cycle in order to compensate for the loss due to insufficient ratio of duty cycle. All duty cycle is pre-scanned, and result as obtained below shows only the most representative ones where duty cycle is conducted as the given transmission with given virtual operation that expresses the percentage.


7.1.1 TEST PROCEDURE

1. Set RBW = 1 MHz.
2. Set the video bandwidth (VBW) $\geq$ RBW.
3. Detector = Peak.
4. Sweep = auto couple.
5. Allow the trace to stabilize.
6. Span=0

7.1.2 DEVIATION FROM STANDARD

No deviation.

7.1.3 TEST SETUP

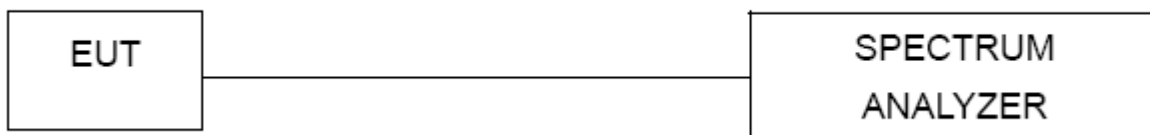

7.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.


**7.1.5 TEST RESULTS**

		Test Channel	Duty Cycle(%)	Duty Fator (dB) 10 * log (1/ Duty cycle)
Band 1	802.11a	Low	77.27	1.12
		Middle	81.82	0.87
		High	77.27	1.12
	802.11n HT20	Low	97.04	0.13
		Middle	97.04	0.13
		High	97.04	0.13
	802.11n HT40	Low	94.2	0.26
		High	92.86	0.32


		Test Channel	Duty Cycle(%)	Duty Fator (dB) 10 * log (1/ Duty cycle)
Band 4	802.11a	Low	81.82	0.87
		Middle	78.26	1.06
		High	77.27	1.12
	802.11n HT20	Low	97.01	0.13
		Middle	97.01	0.13
		High	97.01	0.13
	802.11n HT40	Low	94.2	0.26
		High	92.86	0.32




802.11a

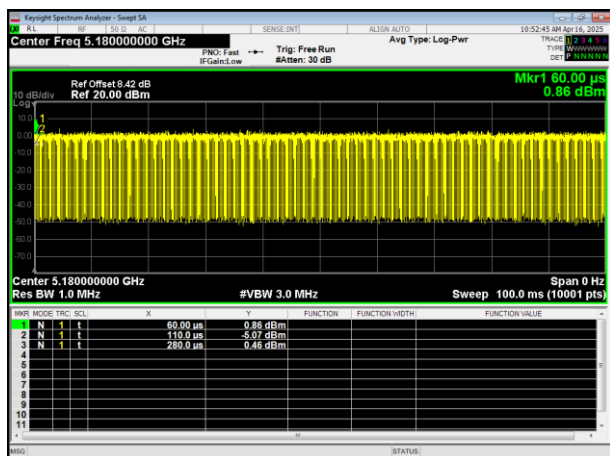


802.11n HT20

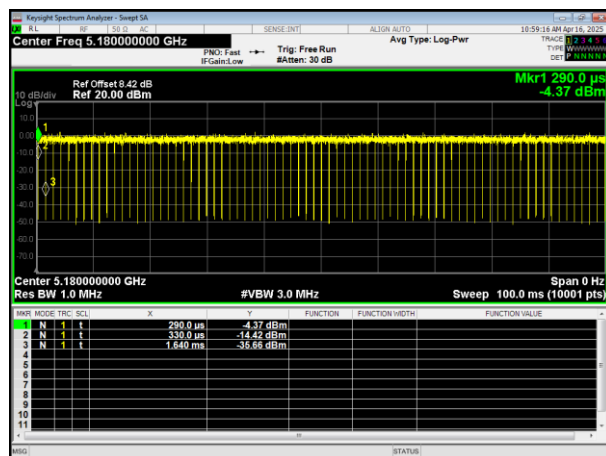


5180MHz

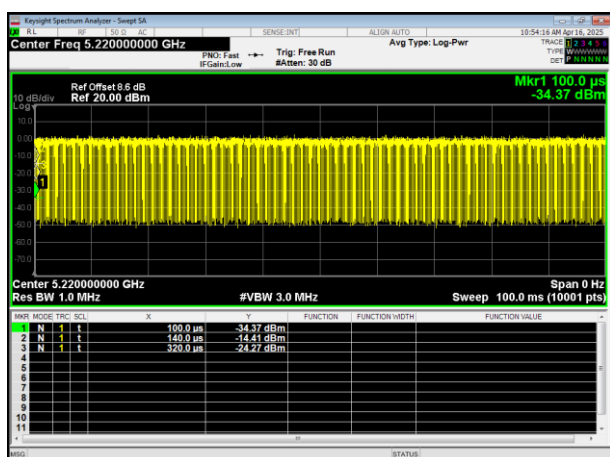


5180MHz

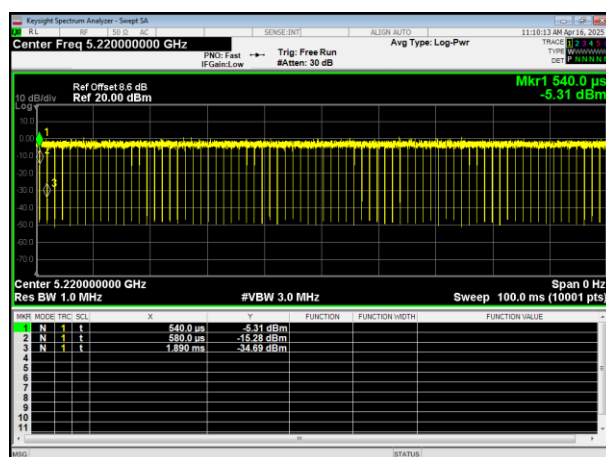

5200MHz

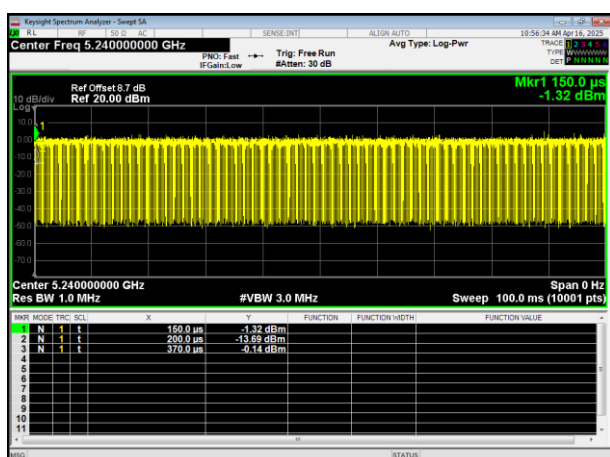

5200MHz

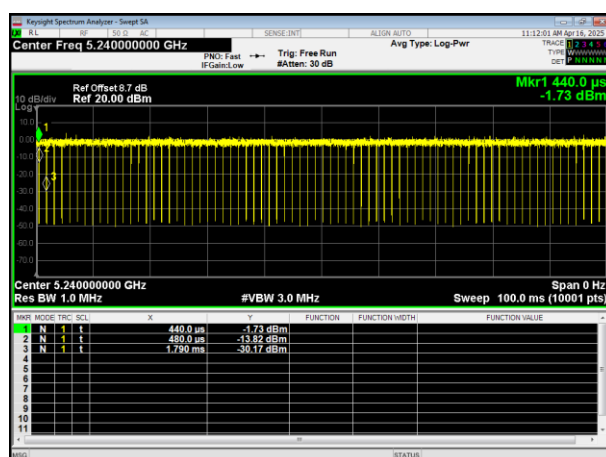


5240MHz




5240MHz



802.11n HT40

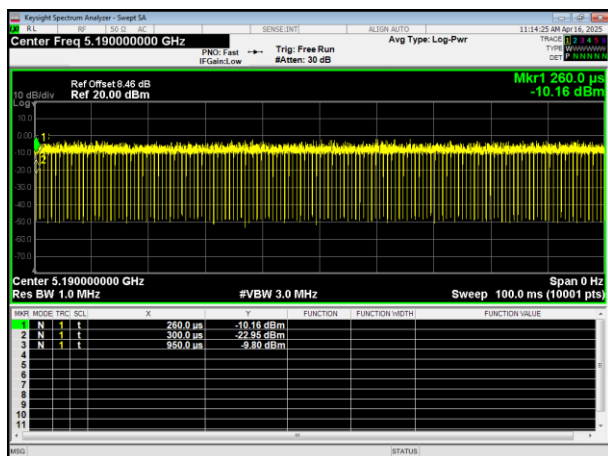


5190MHz

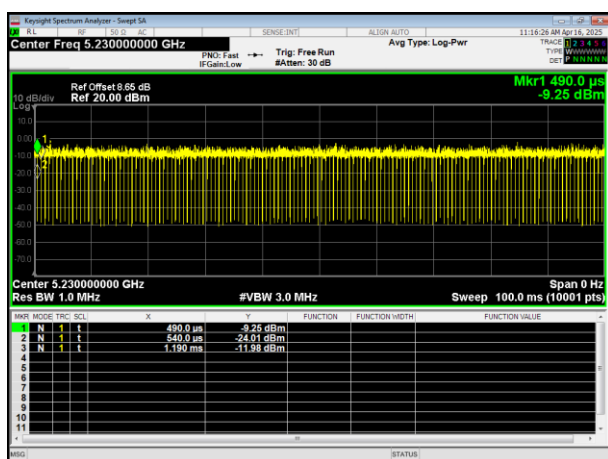


5230MHz




802.11a

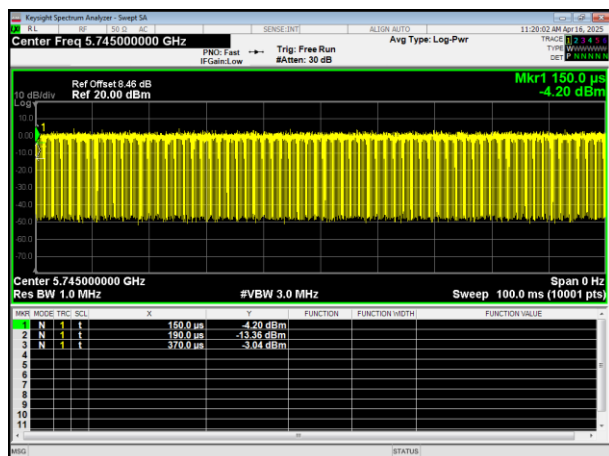


802.11n HT20

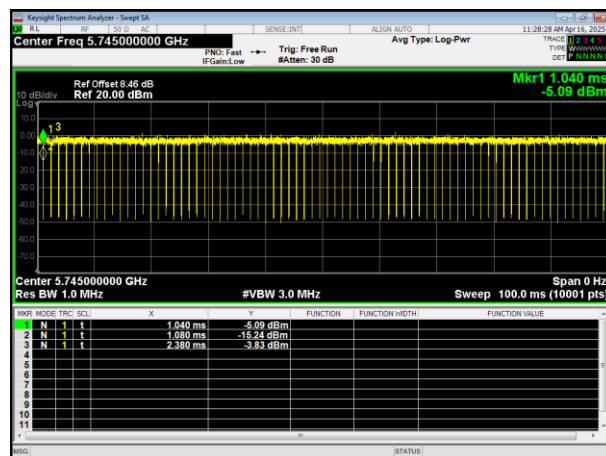


5745MHz

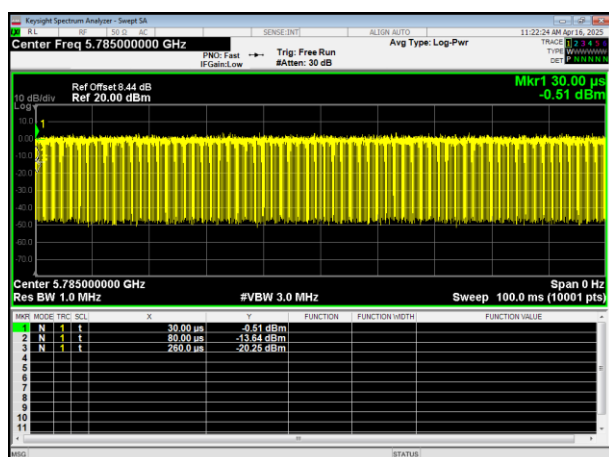


5745MHz

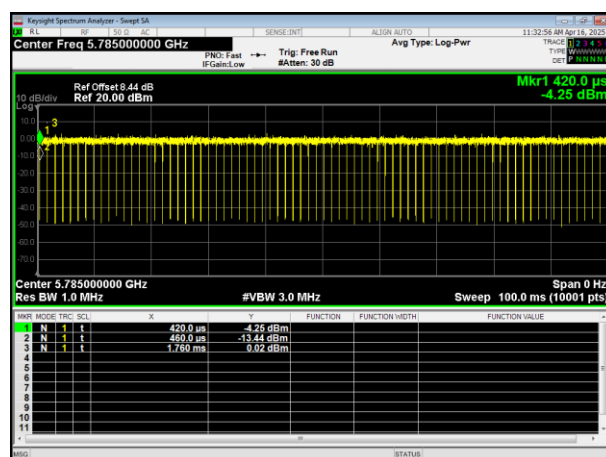

5785MHz

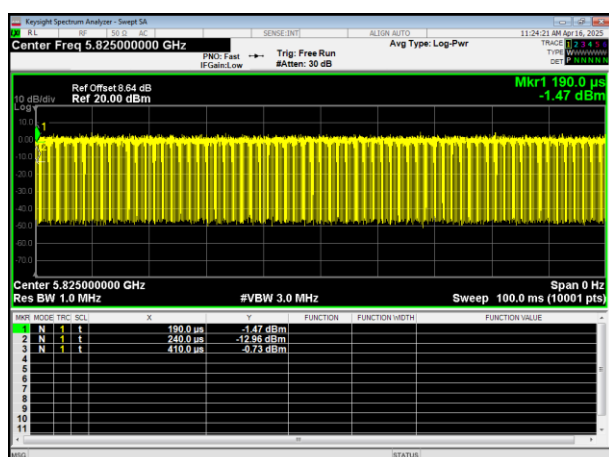

5785MHz

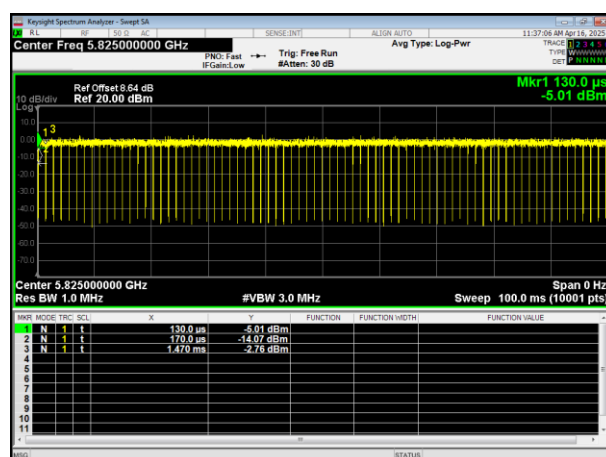


5825MHz


5825MHz



802.11n HT40

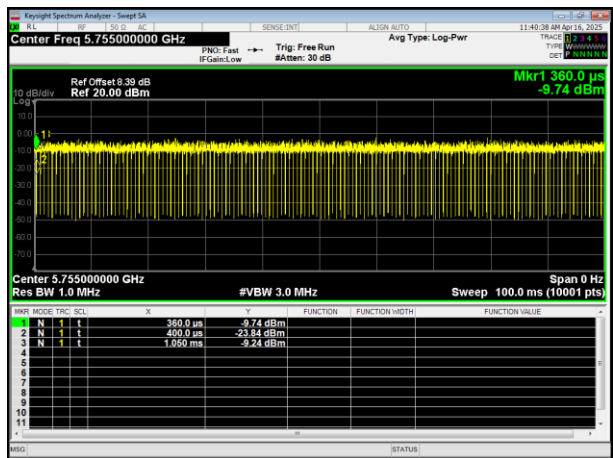

5755MHz

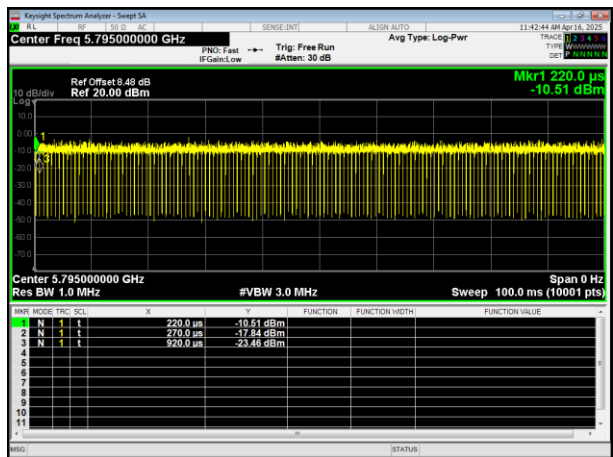

5795MHz



8. FREQUENCY STABILITY

8.1 APPLIED PROCEDURES / LIMIT

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.


8.1.1 TEST PROCEDURE

1. The EUT was placed inside temperature chamber and powered and powered by nominal DC voltage.
2. Set EUT as normal operation.
3. Turn the EUT on and couple its output to spectrum.
4. Turn the EUT off and set the chamber to the highest temperature specified.
5. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT and measure the operating frequency.
6. Repeat step with the temperature chamber set to the lowest temperature.

8.1.2 DEVIATION FROM STANDARD

No deviation.

8.1.3 TEST SETUP

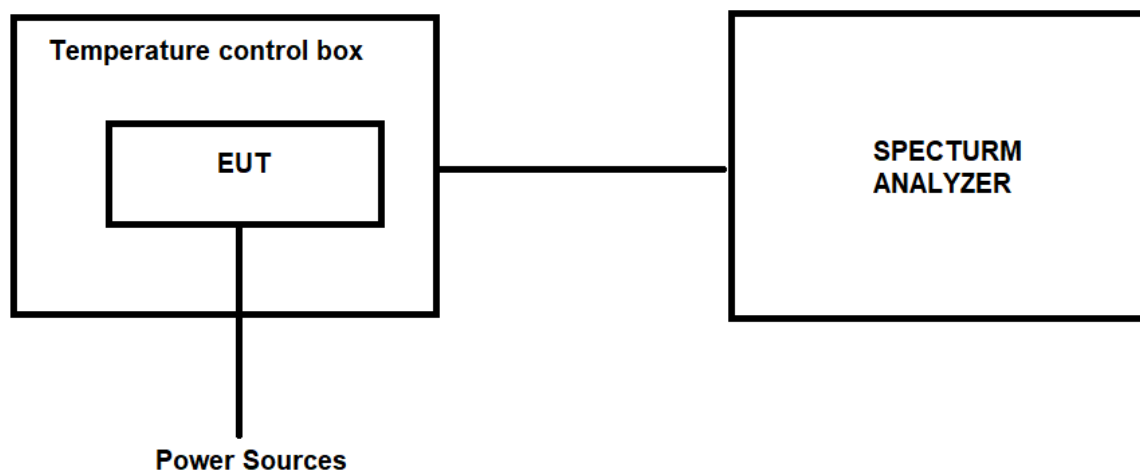

8.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.



8.1.5 TEST RESULTS

Test Voltage	Test Temp.	Measured Frequency	Spectrum Frequency (MHz)		Δ Frequency (MHz)	
		(MHz)	802.11a	802.11n HT20	802.11a	802.11n HT20
5.5V	-20℃	5180	5180.0398	5180.0462	7.6834	8.9189
		5220	5220.0432	5220.0390	8.2759	7.4713
		5240	5240.0313	5240.0288	5.9733	5.4962
		5745	5745.0468	5745.0468	8.1462	8.1462
		5785	5785.0392	5785.0385	6.7761	6.6551
		5825	5825.0404	5825.0424	6.9356	7.2790
4.5V		5180	5180.0277	5180.0310	5.3475	5.9846
		5220	5220.0435	5220.0429	8.3333	8.2184
		5240	5240.0299	5240.0311	5.7061	5.9351
		5745	5745.0361	5745.0297	6.2837	5.1697
		5785	5785.0422	5785.0434	7.2947	7.5022
		5825	5825.0554	5825.0513	9.5107	8.8069
5V	25℃	5180	5180.0655	5180.0579	12.6448	11.1776
		5220	5220.0302	5220.0305	5.7854	5.8429
		5240	5240.0444	5240.0380	8.4733	7.2519
		5745	5745.0393	5745.0394	6.8407	6.8581
		5785	5785.0493	5785.0507	8.5220	8.7640
		5825	5825.0361	5825.0295	6.1974	5.0644
5.5V	50℃	5180	5180.0387	5180.0380	7.4710	7.3359
		5220	5220.0269	5220.0310	5.1533	5.9387
		5240	5240.0455	5240.0418	8.6832	7.9771
		5745	5745.0693	5745.0730	12.0627	12.7067
		5785	5785.0502	5785.0497	8.6776	8.5912
		5825	5825.0674	5825.0697	11.5708	11.9657
4.5V	50℃	5180	5180.0383	5180.0388	7.3938	7.4903
		5220	5220.0328	5220.0333	6.2835	6.3793
		5240	5240.0387	5240.0419	7.3855	7.9962
		5745	5745.0493	5745.0496	8.5814	8.6336
		5785	5785.0370	5785.0328	6.3959	5.6698
		5825	5825.0833	5825.0808	14.3004	13.8712



Test Voltage	Test Temp.	Measured Frequency (MHz)	Spectrum Frequency (MHz)	Δ Frequency (MHz)
			802.11n HT40	802.11n HT40
5.5V	-20°C	5190	5190.0280	5.3950
		5230	5230.0429	8.2027
		5755	5755.0574	9.9739
		5795	5795.0689	11.8896
4.5V		5190	5190.0270	5.2023
		5230	5230.0422	8.0688
		5755	5755.0304	5.2824
		5795	5795.0533	9.1976
5V	25°C	5190	5190.0280	5.3950
		5230	5230.0748	14.3021
		5755	5755.0277	4.8132
		5795	5795.0660	11.3891
5.5V	50°C	5190	5190.0687	13.2370
		5230	5230.0574	10.9751
		5755	5755.0562	9.7654
		5795	5795.0385	6.6437
4.5V	50°C	5190	5190.0646	12.4470
		5230	5230.0449	8.5851
		5755	5755.0440	7.6455
		5795	5795.0522	9.0078



9. TRANSMISSION IN THE ABSENCE OF DATA

9.1 STANDARD REQUIREMENT

According to §15.407(c)

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization a description of how this requirement is met.

9.2 TEST RESULT

No non-compliance noted:
Refer to the theory of operation.

10. ANTENNA REQUIREMENT

10.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

10.2 EUT ANTENNA

The EUT antenna is Internal Antenna, It comply with the standard requirement.

11. TEST SEUUP PHOTO

Reference to the appendix I for details.

12. EUT PHOTO

Reference to the appendix II for details.

******* END OF REPORT *******