



FCC RF Test Report

APPLICANT : CHEP
EQUIPMENT : Asset Tracker
BRAND NAME : CHEP
MODEL NAME : Ultra Scout1
FCC ID : 2APRD-ULTRASCOUT1
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System
TEST DATE(S) : Jul. 01, 2025 ~ Jul. 15, 2025

We, Sporton International Inc. (ShenZhen), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (ShenZhen), the test report shall not be reproduced except in full.

Fly Liang

Approved by: Fly Liang



Sporton International Inc. (ShenZhen)

1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055

People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test.....	5
1.5 Modification of EUT	5
1.6 Testing Location	6
1.7 Test Software.....	6
1.8 Applicable Standards.....	6
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	7
2.1 Carrier Frequency and Channel	7
2.2 Test Mode.....	7
2.3 Connection Diagram of Test System.....	8
2.4 EUT Operation Test Setup	8
2.5 Measurement Results Explanation Example.....	8
3 TEST RESULT	9
3.1 6dB and 99% Bandwidth Measurement	9
3.2 Output Power Measurement.....	11
3.3 Power Spectral Density Measurement	12
3.4 Conducted Band Edges and Spurious Emission Measurement	14
3.5 Radiated Band Edges and Spurious Emission Measurement	27
3.6 Antenna Requirements.....	31
4 LIST OF MEASURING EQUIPMENT	32
5 MEASUREMENT UNCERTAINTY	33
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. RADIATED SPURIOUS EMISSION	
APPENDIX C. DUTY CYCLE PLOTS	
APPENDIX D. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR543007B	Rev. 01	Initial issue of report	Jul. 23, 2025

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.1	-	99% Bandwidth	-	Report Only	-
3.2	15.247(b)	Power Output Measurement	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	Conducted Band Edges	$\leq 20\text{dBc}$	Pass	-
		Conducted Spurious Emission		Pass	-
3.5	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 3.09 dB at 4824.00 MHz
-	15.207	AC Conducted Emission	15.207(a)	Not Required	1
3.6	15.203 & 15.247(b)	Antenna Requirement	15.203 & 15.247(b)	Pass	-
Remark1: The device is powered by the Battery only.					

Conformity Assessment Condition:

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
- The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

CHEP

2901 Tasman Drive Suite 101 Santa Clara, CA 95054

1.2 Manufacturer

Minewing (Shenzhen) Electronics Integrated Co., Ltd

Floor #2, Building H2, Hongfa Tech Park, No 32, Tangtou Road, Shiyan Town, Bao'an District, Shenzhen, China, 518108

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Asset Tracker
Brand Name	CHEP
Model Name	Ultra Scout1
FCC ID	2APRD-ULTRASCOUT1
SN Code	Conducted: 1250144000001613 Radiation: 1250144000001615
HW Version	GEN1
SW Version	10.01.0003-P
EUT Stage	Production Unit

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Channel Frequency Range	2412 MHz ~ 2462 MHz
Maximum (Peak) Output Power to antenna	802.11b : 11.93 dBm (0.0156 W) 802.11g : 18.89 dBm (0.0774 W) 802.11n HT20 : 18.93 dBm (0.0782 W) 802.11n HT40 : 18.90 dBm (0.0776 W)
99% Occupied Bandwidth	802.11b : 13.26MHz 802.11g : 16.77MHz 802.11n HT20 : 17.61MHz 802.11n HT40 : 35.36MHz
Antenna Type / Gain	PCB Antenna type with gain -2.5 dBi
Type of Modulation	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)

1.5 Modification of EUT

No modifications are made to the EUT during all test items.



1.6 Testing Location

Sporton International Inc. (ShenZhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City, Guangdong Province 518103 People's Republic of China TEL: +86-755-86066985		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	TH01-SZ 03CH04-SZ	CN1256	421272

1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH04-SZ	AUDIX	E3	6.2009-8-24

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart C §15.247
- FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X/Z plane) were recorded in this report.

2.1 Carrier Frequency and Channel


Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437	-	-

2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.

Modulation	Data Rate
802.11b	1 Mbps
802.11g	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0

2.3 Connection Diagram of Test System

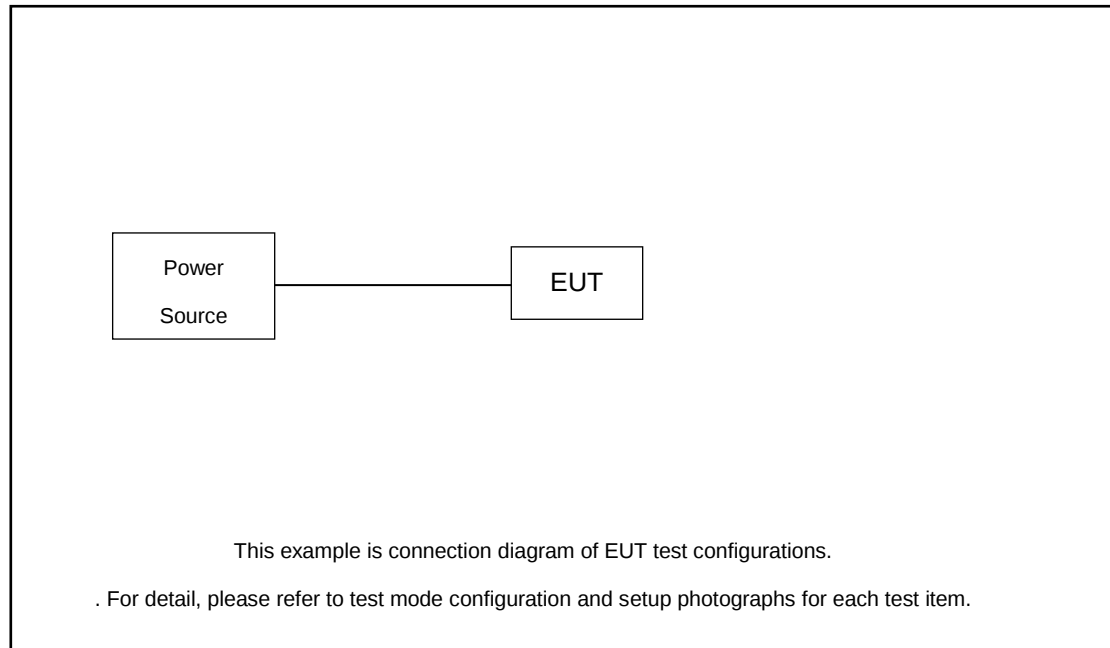

2.4 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuous transmit.

2.5 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 1.3 dB and 10dB attenuator.

Offset(dB) = RF cable loss(dB) + attenuator factor(dB).

= 1.3 + 10 = 11.3 (dB)

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.8
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) $\geq 3 \times \text{RBW}$. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) = 1%~5% of OBW and set the Video bandwidth (VBW) approximately three times the RBW.
6. Measure and record the results in the test report.


3.1.4 Test Setup





3.1.5 Test Result of 6dB and 99% Occupied Bandwidth

Please refer to Appendix A.

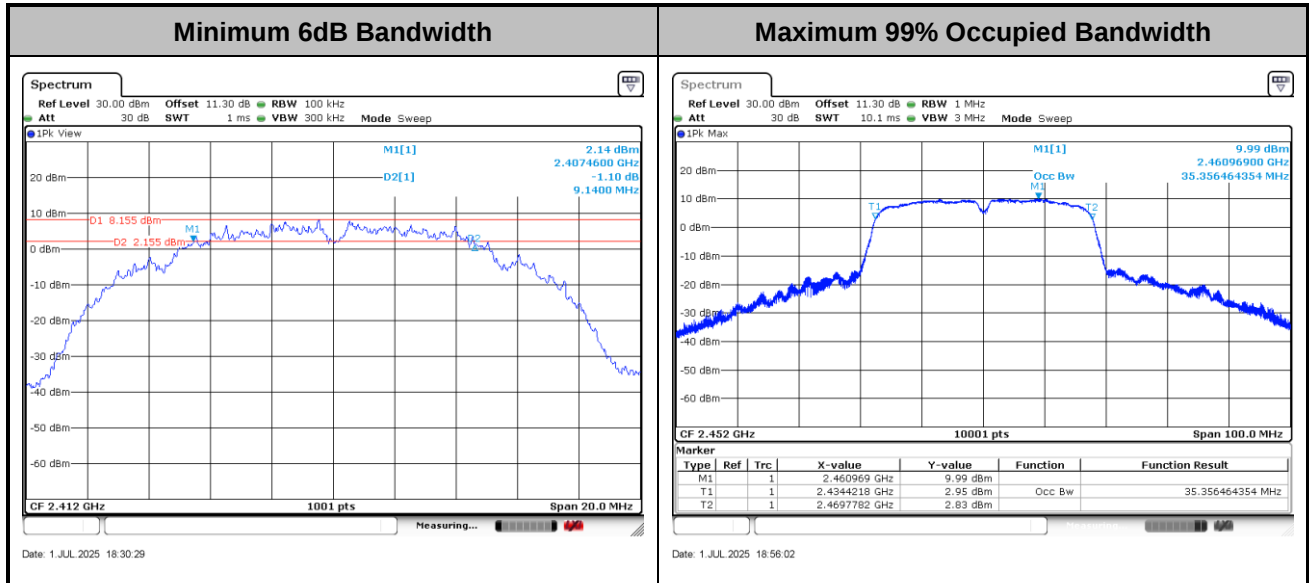

Note : The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna with directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of ANSI C63.10-2013 clause 11.9.1.3 PKPM1 Peak power meter or ANSI C63.10-2013 clause 11.9.2.3.1 Method AVGPM method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

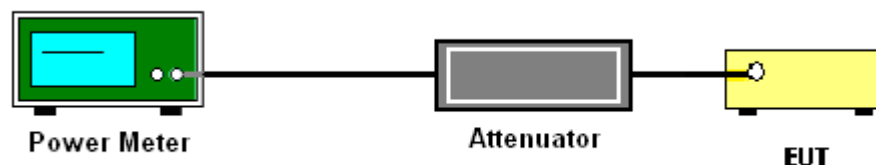

3.2.5 Test Result of Peak Output Power

Please refer to Appendix A.

3.2.6 Test Result of Average Output Power (Reporting Only)

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures


1. The testing follows Measurement Procedure of ANSI C63.10-2013 clause 11.10.2 Method PKPSD.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.

3.3.4 Test Setup

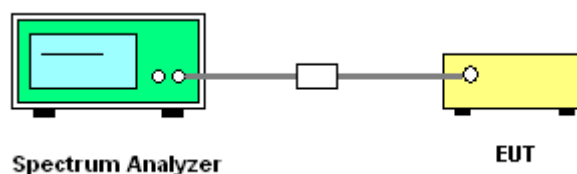

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

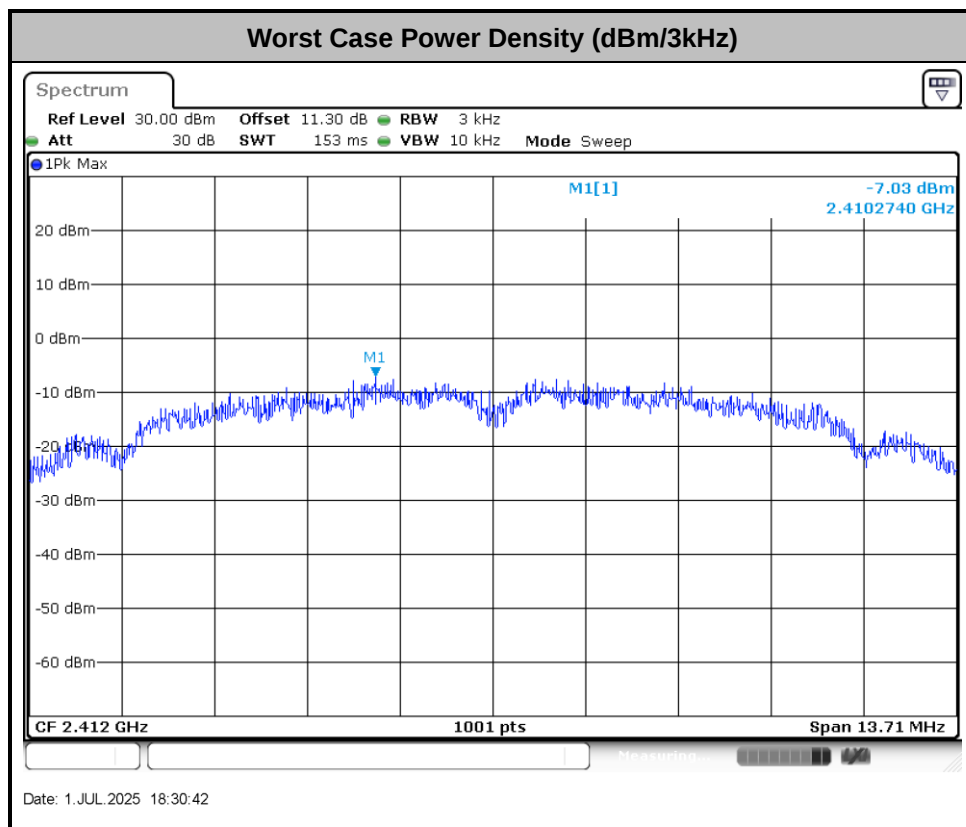

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement.


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.11
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup

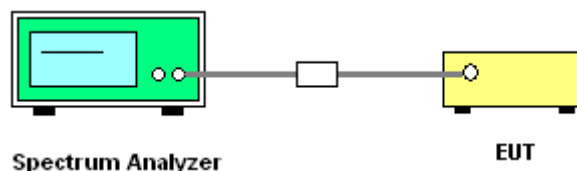




3.4.5 Test Result of Conducted Band Edges and Spurious Emission

Test Engineer :	Sam Zheng	Temperature :	24~26°C
		Relative Humidity :	50~53%


Number of TX = 1, Ant. 1 (Measured)

Test Mode :	802.11b	Test Channel :	01
-------------	---------	----------------	----

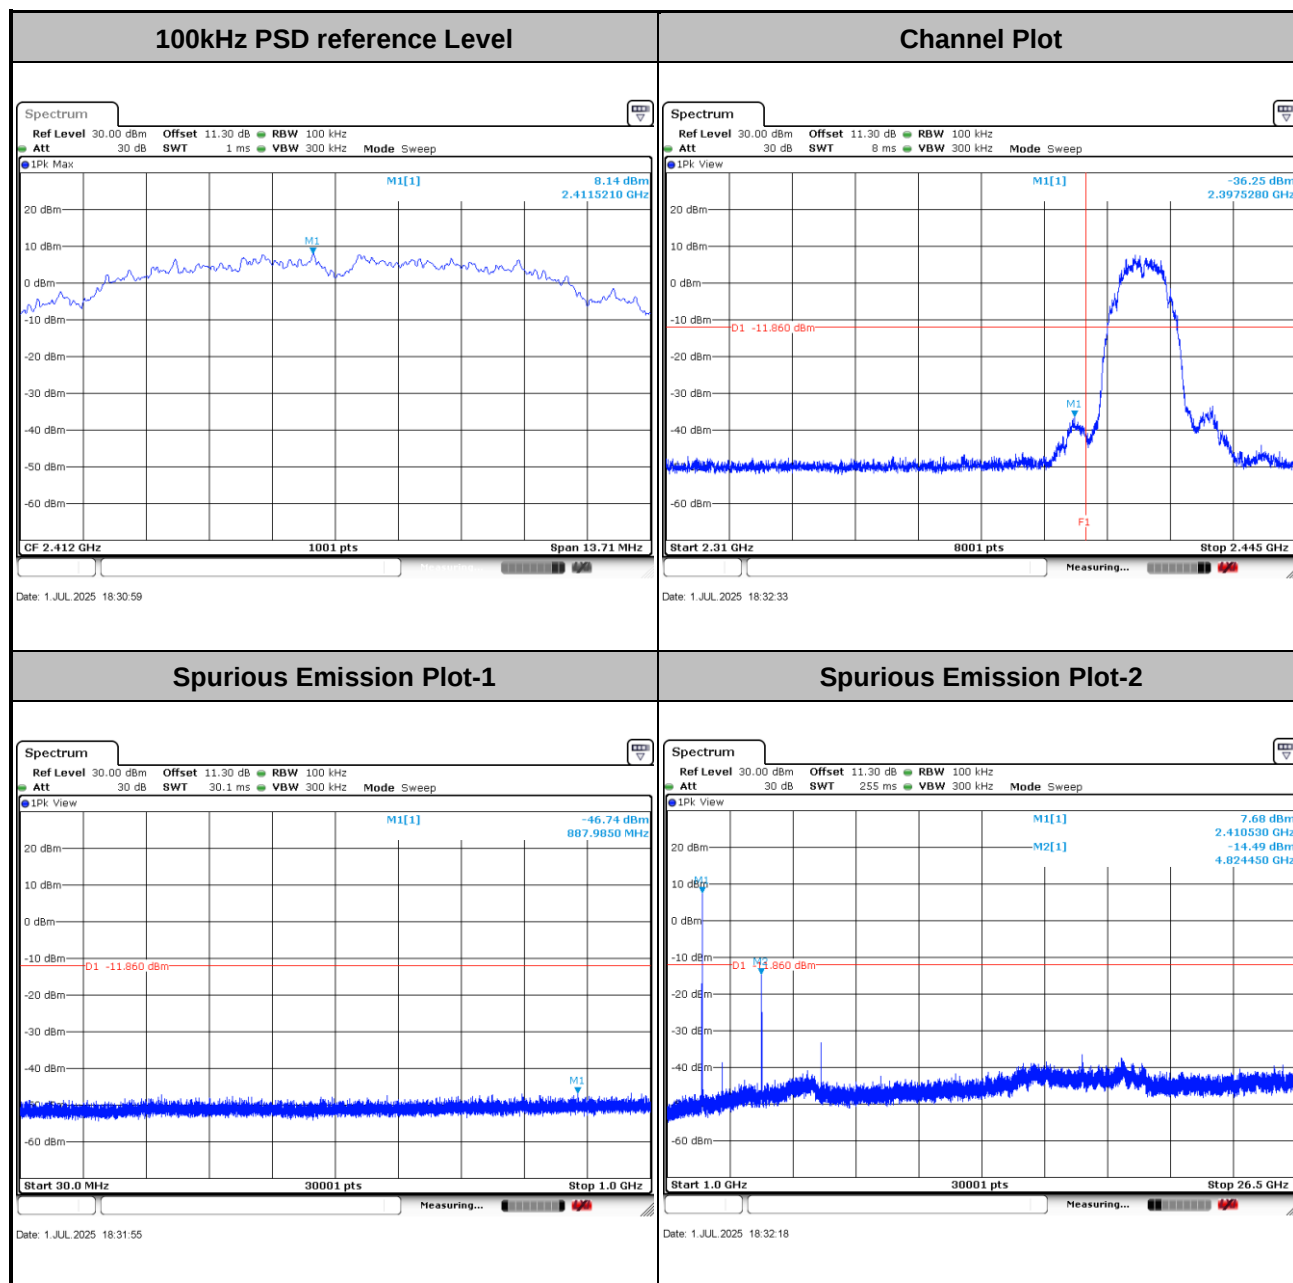




Test Mode :	802.11b	Test Channel :	06
-------------	---------	----------------	----

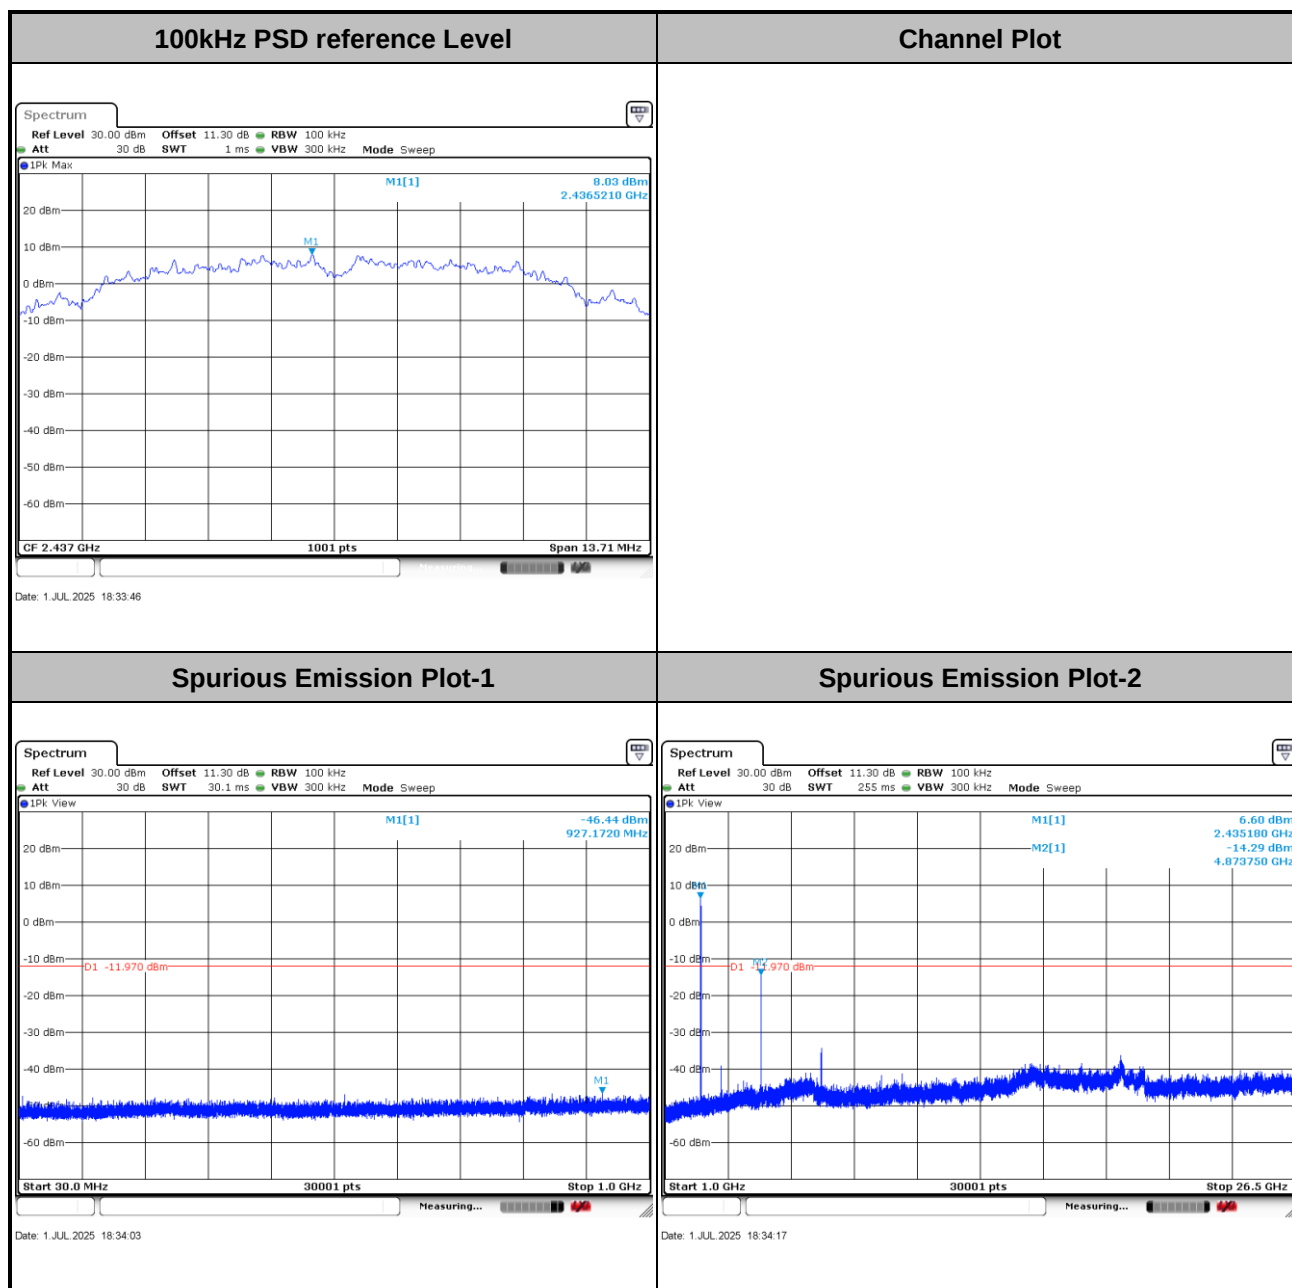




Test Mode :	802.11b	Test Channel :	11
-------------	---------	----------------	----

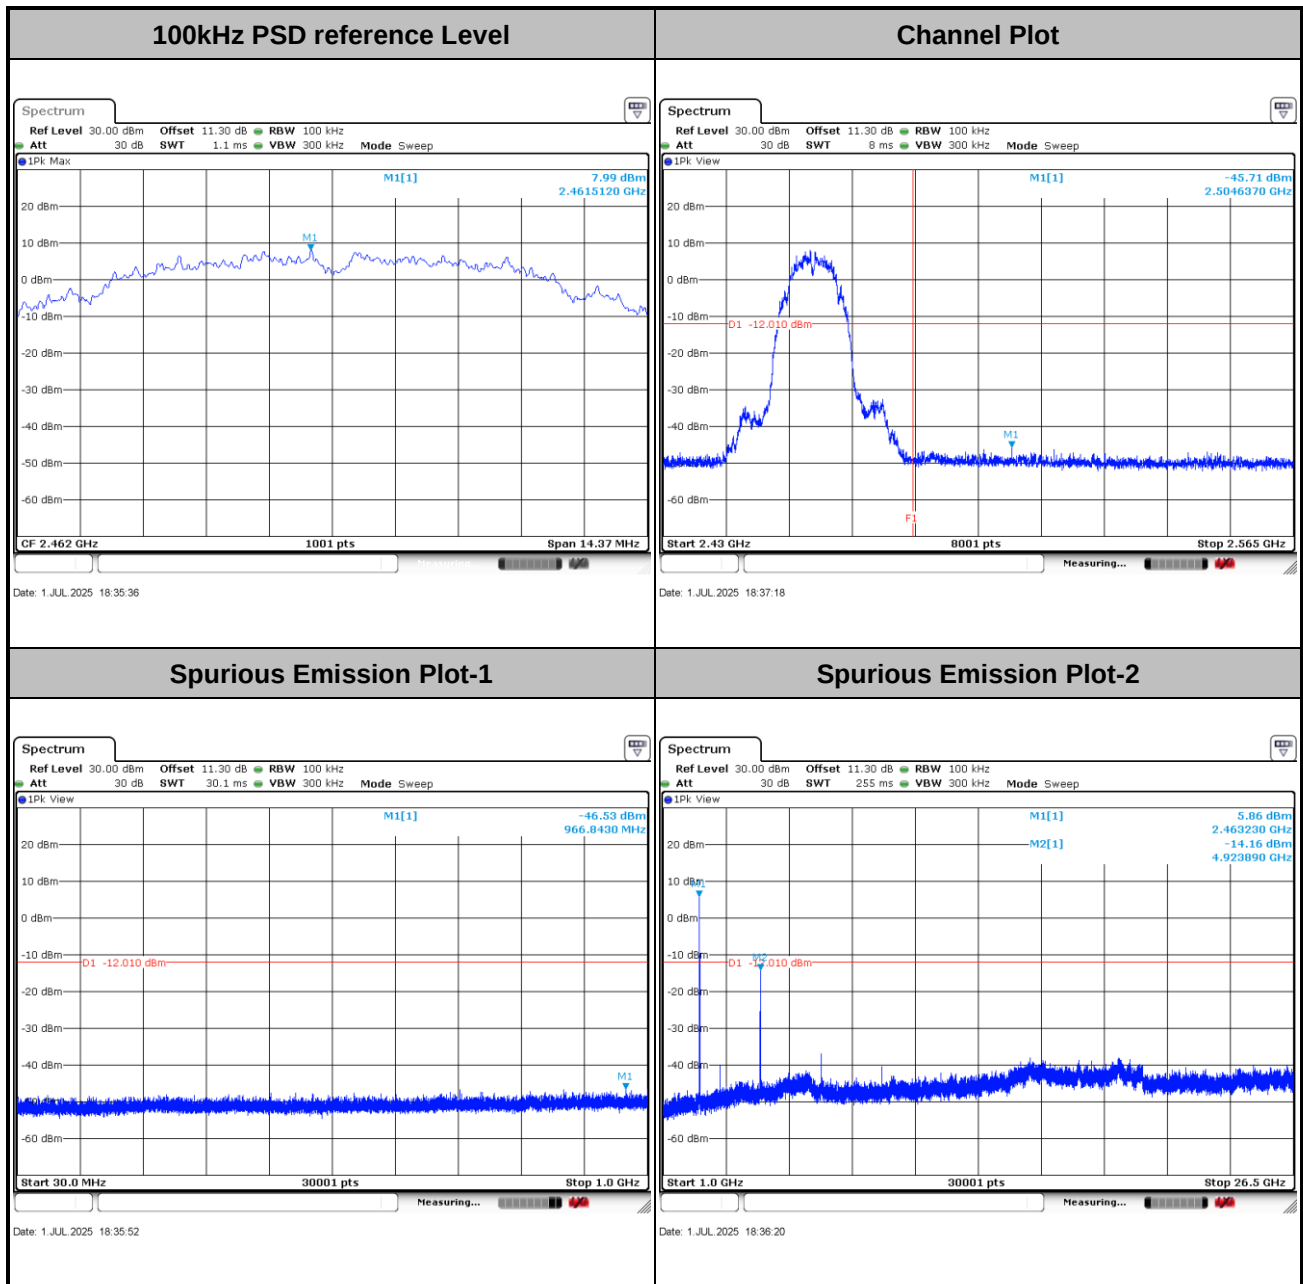




Test Mode :	802.11g	Test Channel :	01
-------------	---------	----------------	----

100kHz PSD reference Level

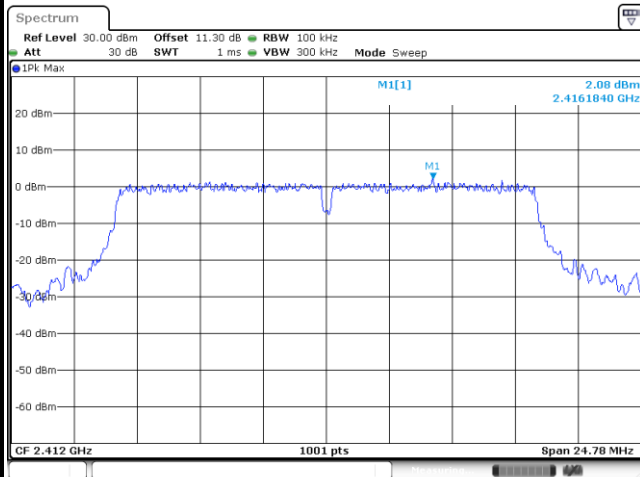


Date: 1 JUL 2025 18:39:21

Channel Plot

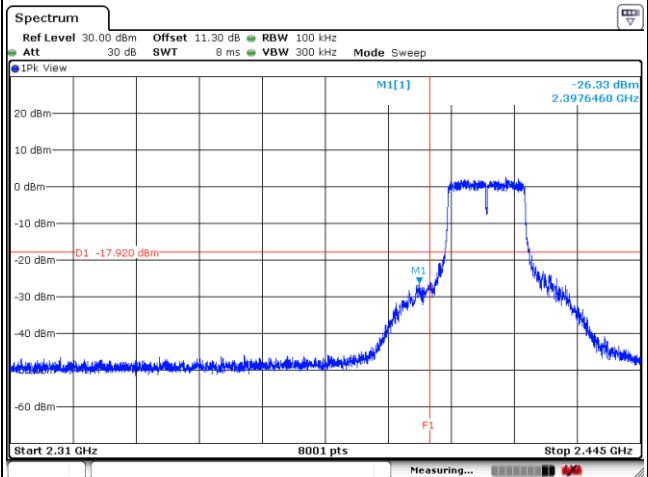


Date: 2 JUL 2025 11:47:19

Spurious Emission Plot-1

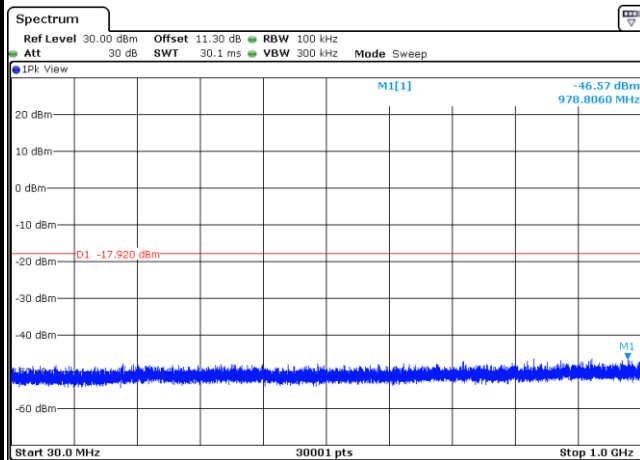

Date: 1 JUL 2025 18:39:37

Spurious Emission Plot-2

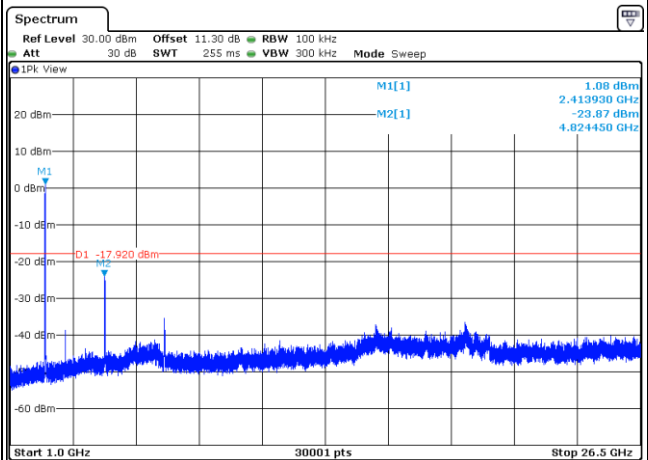


Date: 1 JUL 2025 18:39:54




Test Mode :	802.11g	Test Channel :	06
-------------	---------	----------------	----

100kHz PSD reference Level

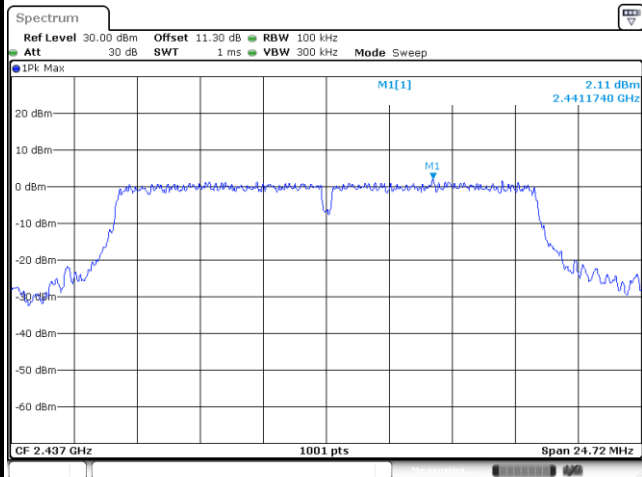


Channel Plot

Spurious Emission Plot-1

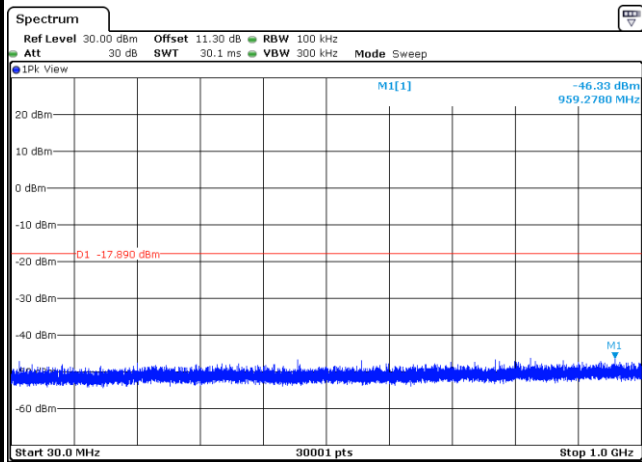


Spurious Emission Plot-2

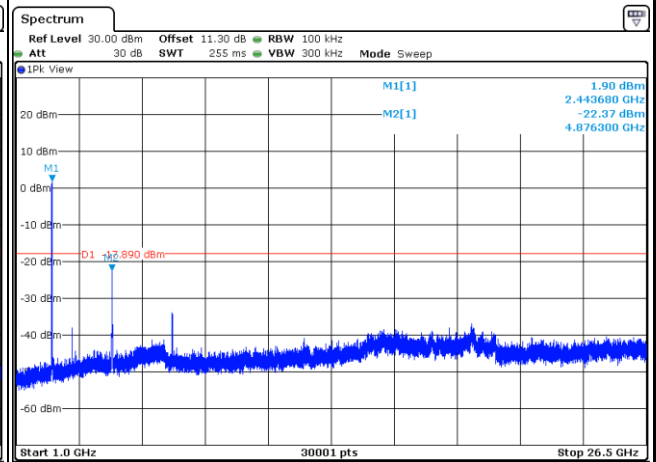




Test Mode :	802.11g	Test Channel :	11
-------------	---------	----------------	----

100kHz PSD reference Level

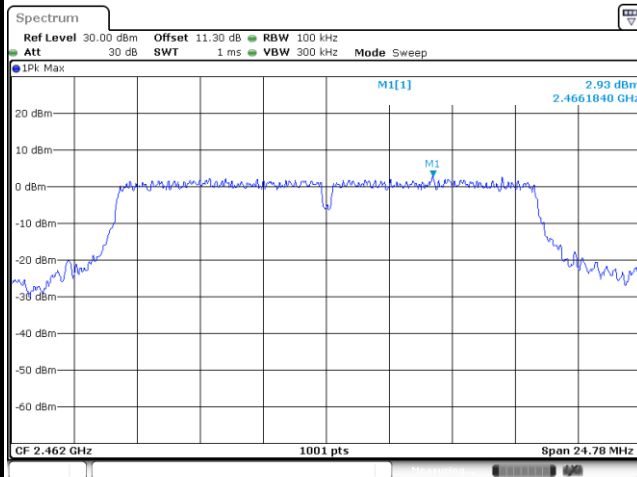


Date: 1 JUL 2025 18:44:57

Channel Plot

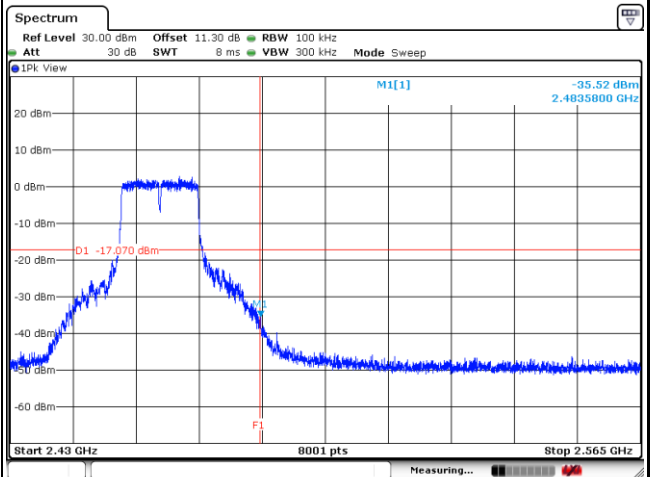


Date: 1 JUL 2025 18:45:48

Spurious Emission Plot-1

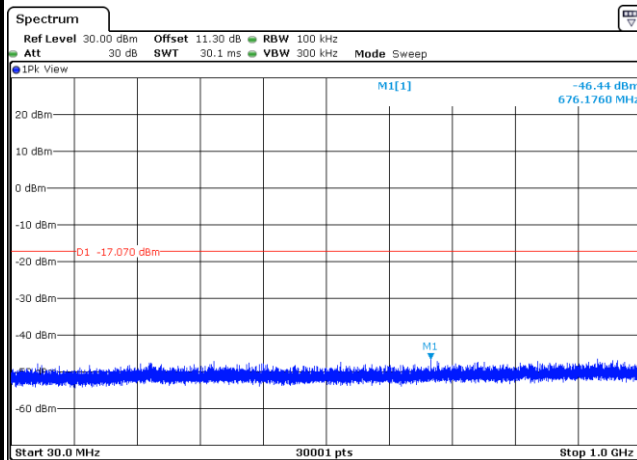

Date: 1 JUL 2025 18:45:18

Spurious Emission Plot-2

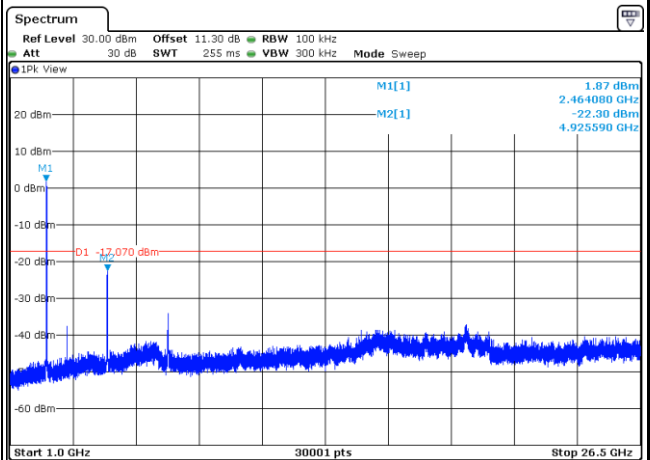


Date: 1 JUL 2025 18:45:36




Test Mode : 802.11n HT20

Test Channel : 01


100kHz PSD reference Level

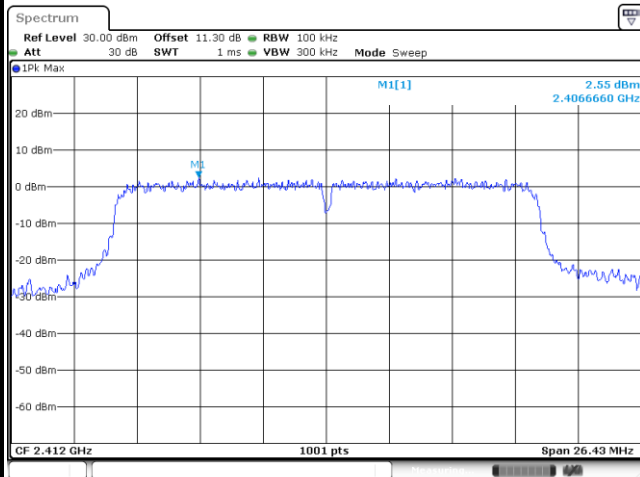


Channel Plot

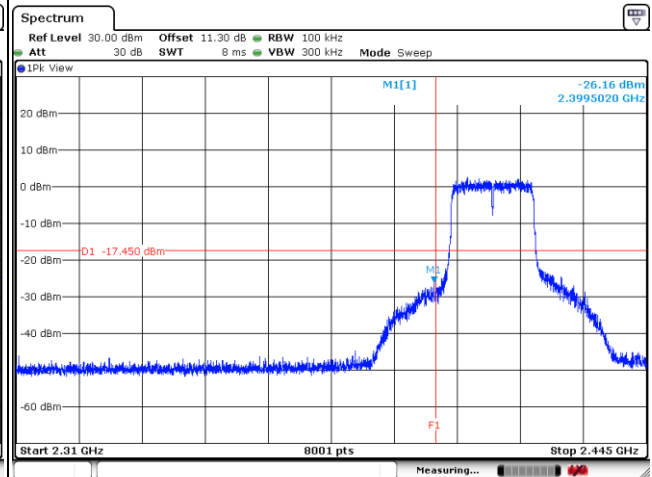

Spurious Emission Plot-1

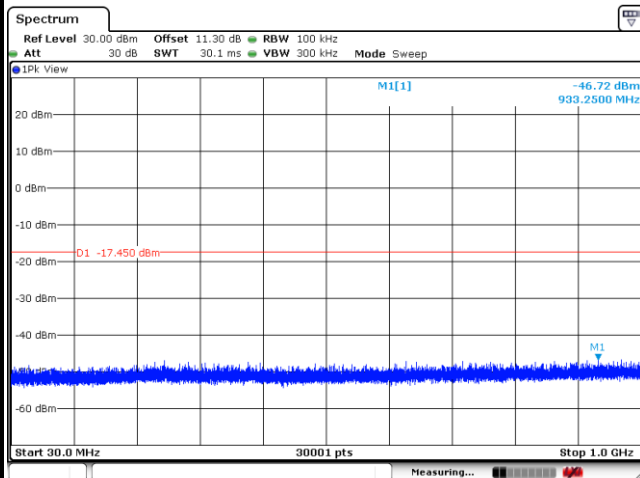


Spurious Emission Plot-2

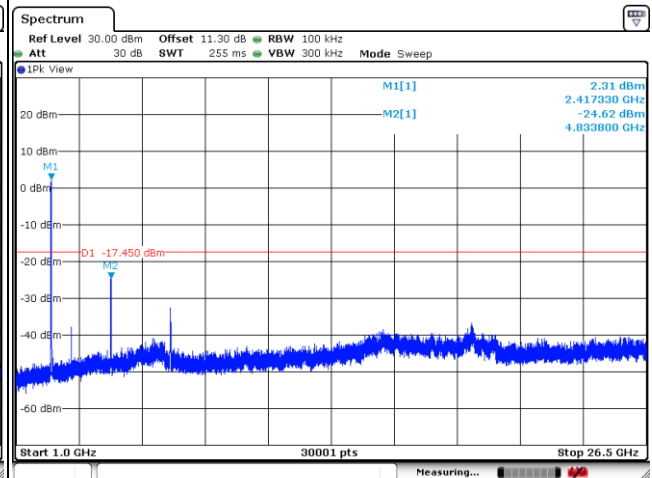




Test Mode :	802.11n HT20	Test Channel :	06
-------------	--------------	----------------	----

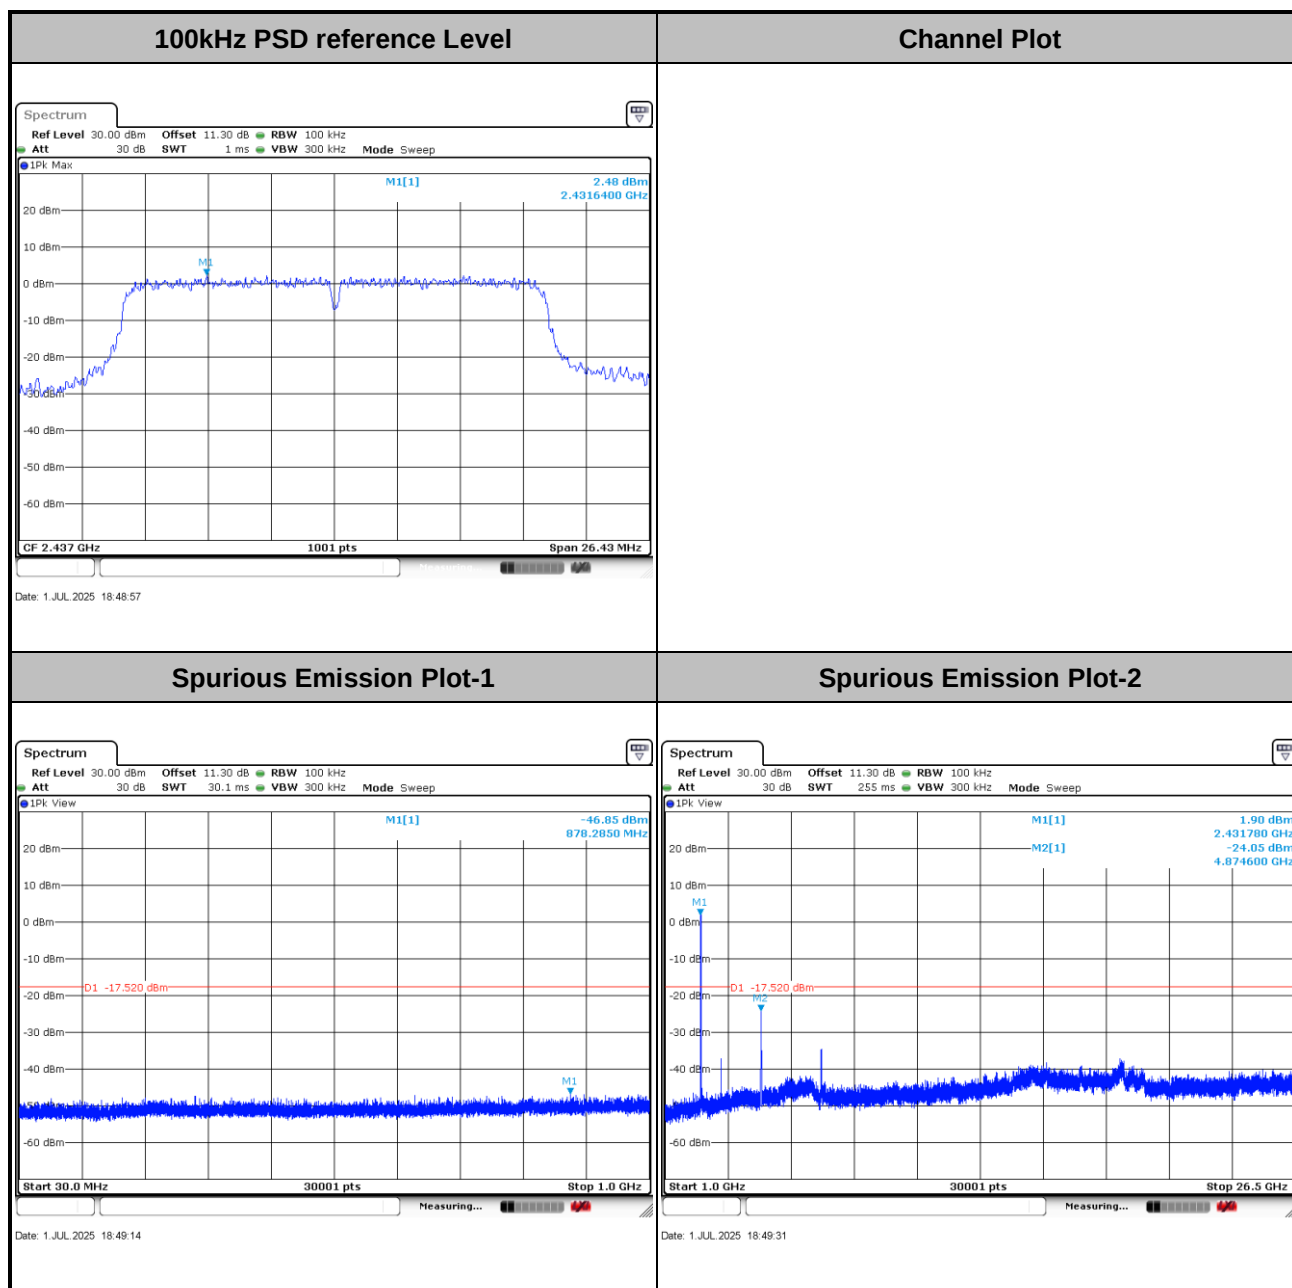



Test Mode :	802.11n HT20	Test Channel :	11
-------------	--------------	----------------	----

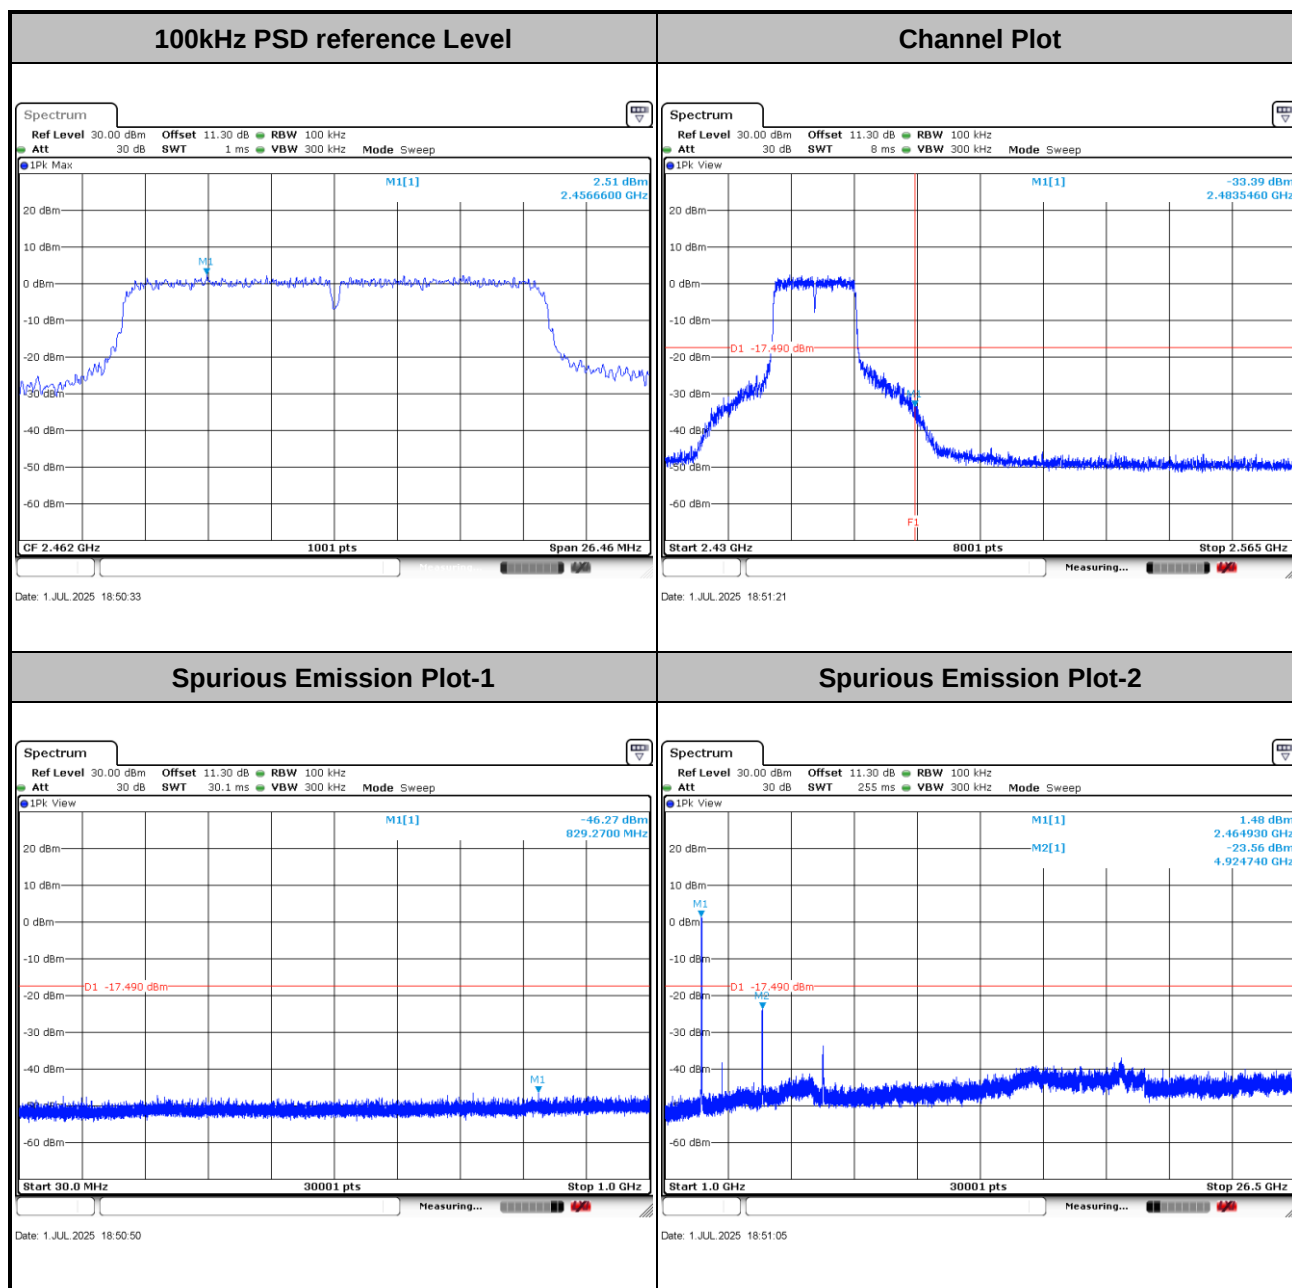




Test Mode : 802.11n HT40


Test Channel : 03

100kHz PSD reference Level

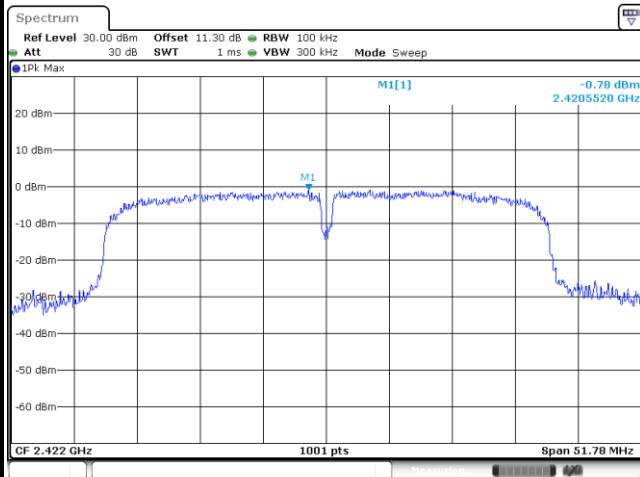


Date: 1 JUL 2025 18:52:45

Channel Plot

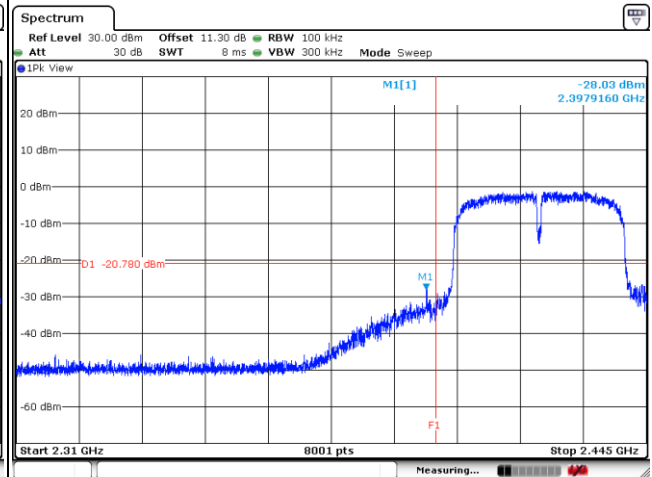


Date: 1 JUL 2025 18:53:38

Spurious Emission Plot-1

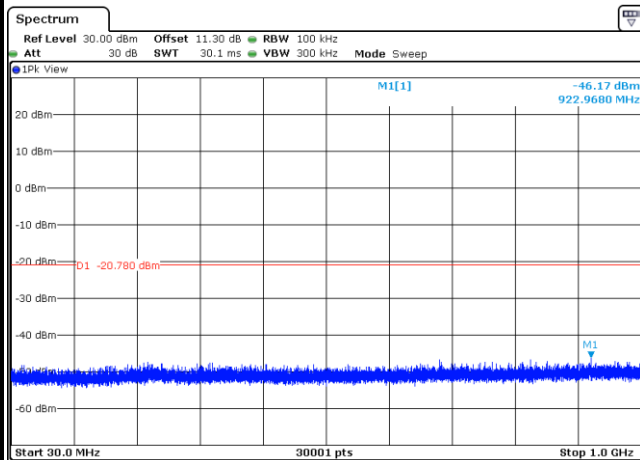

Date: 1 JUL 2025 18:53:02


Spurious Emission Plot-2

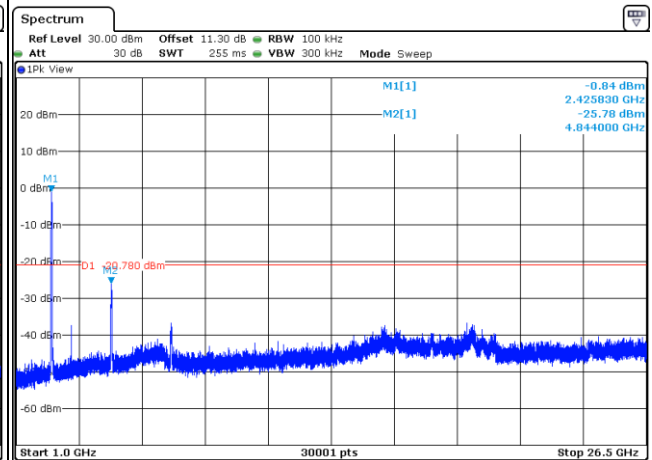

Date: 1 JUL 2025 18:53:22




Test Mode :	802.11n HT40	Test Channel :	06
-------------	--------------	----------------	----

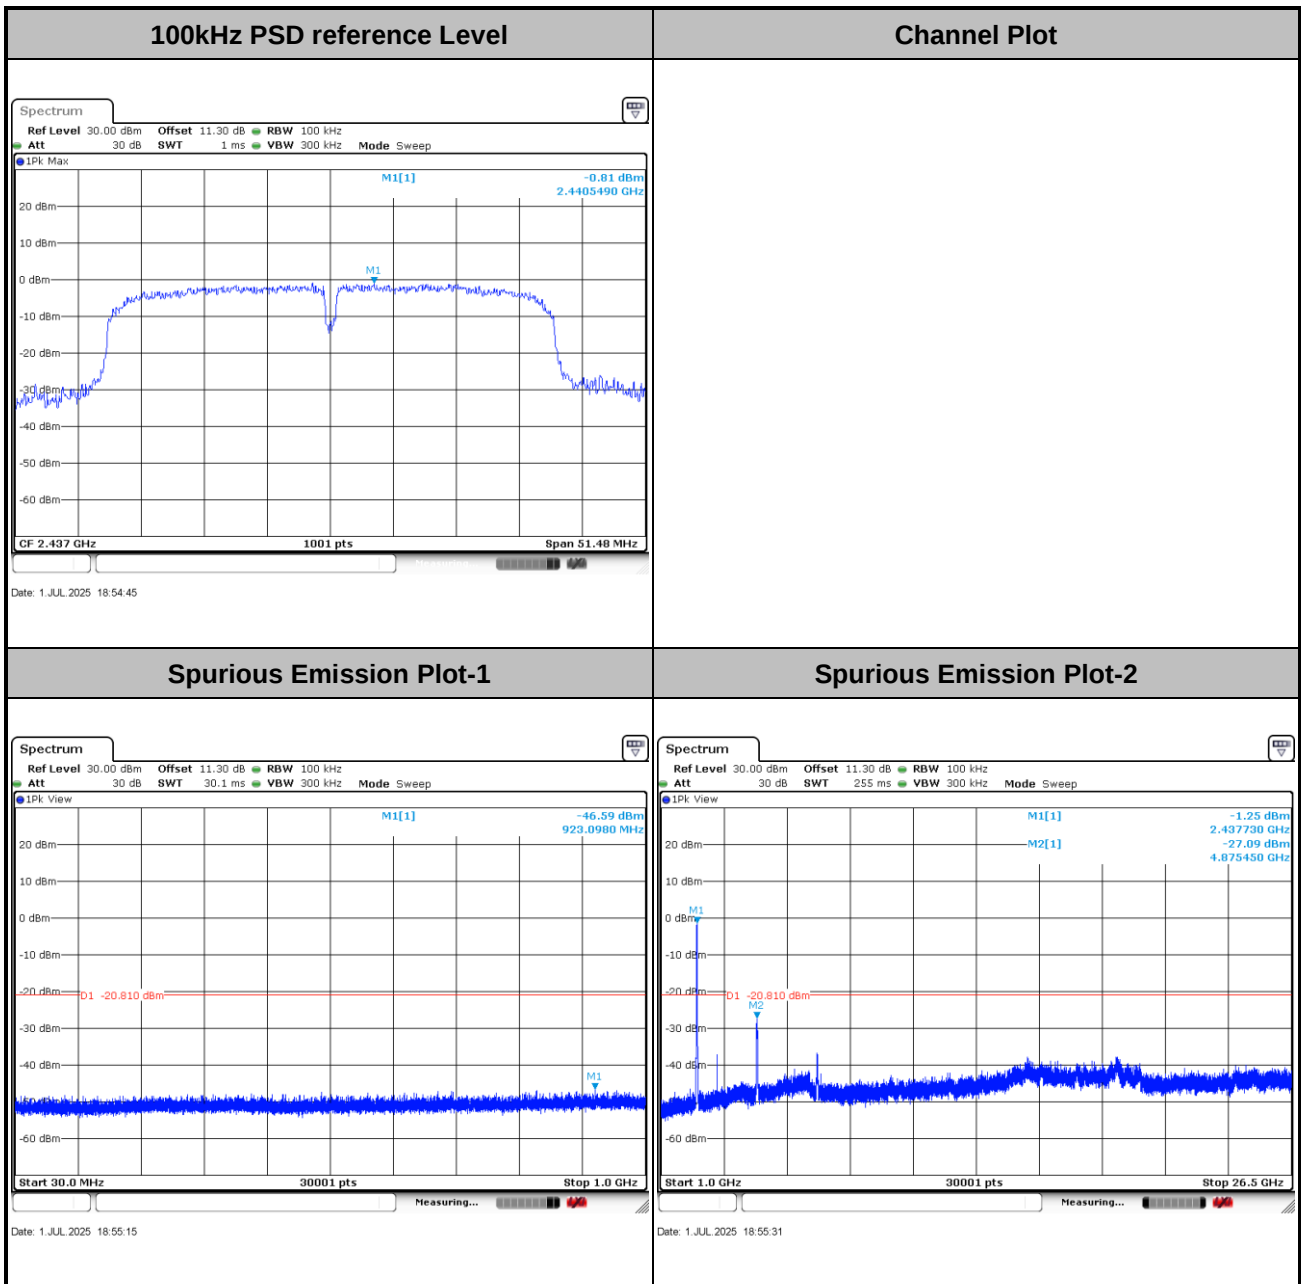




Test Mode :	802.11n HT40	Test Channel :	09
-------------	--------------	----------------	----

100kHz PSD reference Level

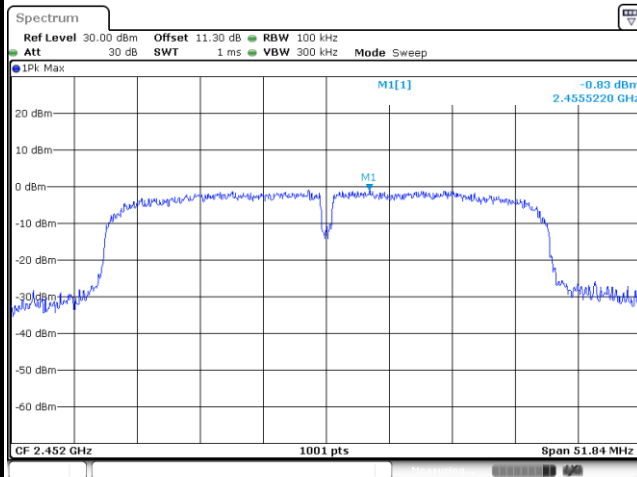


Date: 1 JUL 2025 18:56:50

Channel Plot

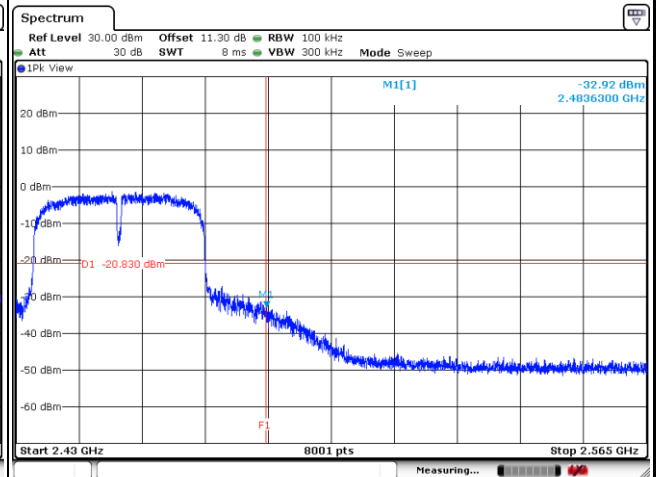


Date: 1 JUL 2025 18:57:44

Spurious Emission Plot-1

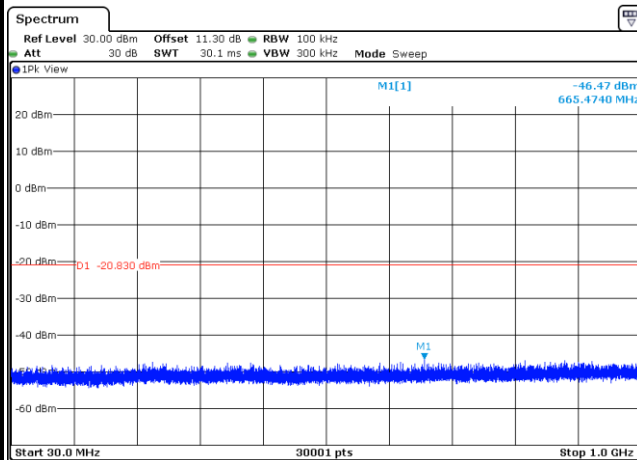

Date: 1 JUL 2025 18:57:14

Spurious Emission Plot-2

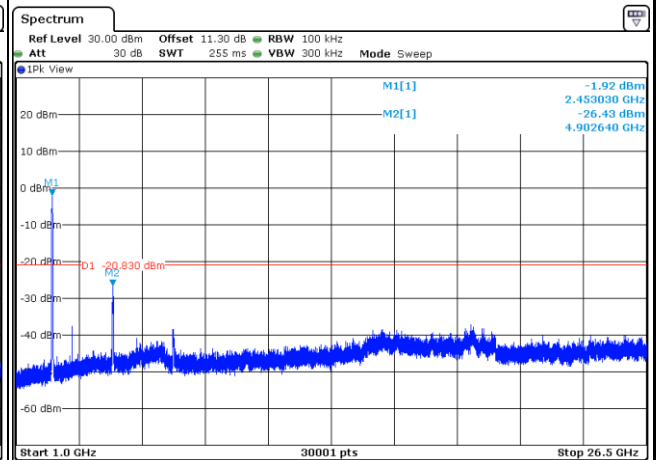

Date: 1 JUL 2025 18:57:30

3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures


1. The testing follows ANSI C63.10-2013 clause 11.11 & 11.12
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.

For average measurement:


 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated emissions below 30MHz

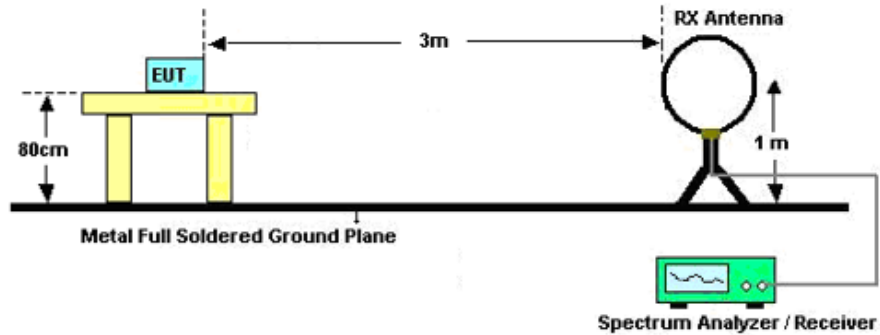

For radiated emissions from 30MHz to 1GHz

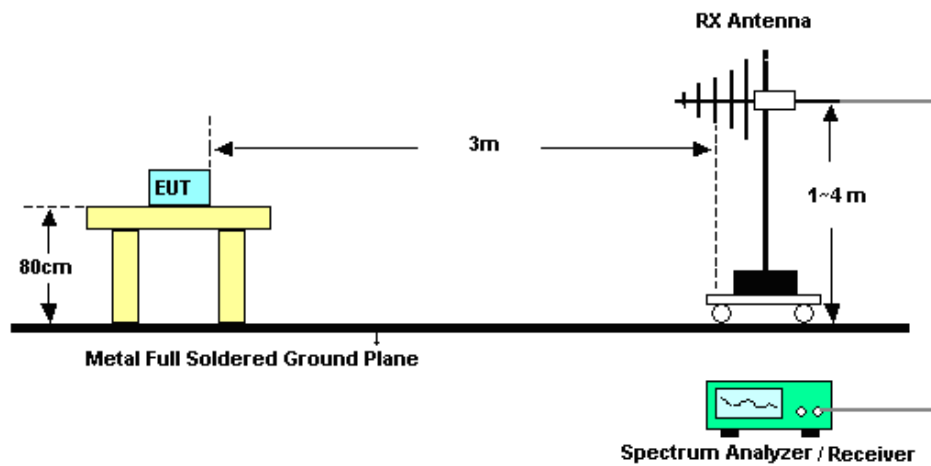

For radiated emissions above 1GHz

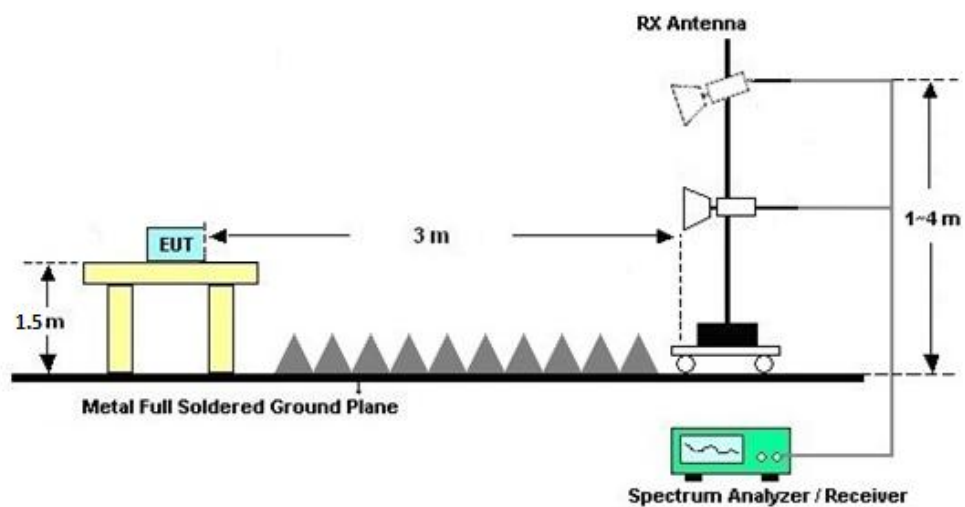



3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix B.

3.5.7 Duty Cycle

Please refer to Appendix C.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix B.



3.6 Antenna Requirements

3.6.1 Standard Applicable

If directional gain of transmitting Antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached Antenna or of an Antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.6.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.6.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver	R&S	ESR7	101404	9kHz~7GHz	Oct. 14, 2024	Jul. 15, 2025	Oct. 13, 2025	Radiation (03CH04-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150213	10Hz~44GHz	Jul. 03, 2025	Jul. 15, 2025	Jul. 02, 2026	Radiation (03CH04-SZ)
Loop Antenna	R&S	HFH2-Z2E	101141	9kHz~30MHz	Dec. 28, 2024	Jul. 15, 2025	Dec. 27, 2025	Radiation (03CH04-SZ)
Bilog Antenna	TeseQ	CBL6111D	41909	30MHz~1GHz	May 09, 2025	Jul. 15, 2025	May 08, 2026	Radiation (03CH04-SZ)
Double Ridge Guide Antenna	ETS-Lindgren	Burgeon-3117	00240057	1GHz~18GHz	Jul. 03, 2025	Jul. 15, 2025	Jul. 02, 2026	Radiation (03CH04-SZ)
Horn Antenna	SCHWARZBECK	BBHA9170	9170#679	15GHz~40GHz	Jul. 04, 2025	Jul. 15, 2025	Jul. 03, 2026	Radiation (03CH04-SZ)
LF Amplifier	EM Electronics	EM330	060773	20MHz~3GHz	Apr. 02, 2025	Jul. 15, 2025	Apr. 01, 2026	Radiation (03CH04-SZ)
HF Amplifier	MITEQ	AMF-7D-00101800-30-10P-R	1943528	1GHz~18GHz	Oct. 14, 2024	Jul. 15, 2025	Oct. 13, 2025	Radiation (03CH04-SZ)
HF Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz	Jul. 03, 2025	Jul. 15, 2025	Jul. 02, 2026	Radiation (03CH04-SZ)
Amplifier	Agilent Technologies	83017A	MY57280136	500MHz~26.5GHz	Jul. 03, 2025	Jul. 15, 2025	Jul. 02, 2026	Radiation (03CH04-SZ)
AC Power Source	APC	AFV-S-600B	F119050019	N/A	Oct. 14, 2024	Jul. 15, 2025	Oct. 13, 2025	Radiation (03CH04-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Jul. 15, 2025	NCR	Radiation (03CH04-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Jul. 15, 2025	NCR	Radiation (03CH04-SZ)
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 02, 2025	Jul. 01, 2025~Jul. 02, 2025	Apr. 01, 2026	Conducted (TH01-SZ)
Pulse Power Sensor	Anritsu	MA2411B	1339473	30MHz~40GHz	Dec. 25, 2024	Jul. 01, 2025~Jul. 02, 2025	Dec. 24, 2025	Conducted (TH01-SZ)
Power Meter	Anritsu	ML2495A	1218010	50MHz Bandwidth	Oct.14,2024	Jul. 01, 2025~Jul. 02, 2025	Oct. 13, 2025	Conducted (TH01-SZ)

NCR: No Calibration Required

5 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Spurious Emission & Bandedge	± 1.34 dB
Occupied Channel Bandwidth	± 0.012 MHz
Conducted Power	± 1.34 dB
Conducted Power Spectral Density	± 1.32 dB
Frequency	± 1.3 Hz

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.1 dB
---	--------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.8 dB
---	--------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.1 dB
---	--------

----- THE END -----



Appendix A. Conducted Test Results

Appendix A. Test Result of Conducted Test Items

Test Engineer:	He Qingsheng	Temperature:	21~25	°C
Test Date:	2025/7/1~2025/7/2	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

2.4GHz Band								
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
					Ant 1	Ant 1		
11b	1Mbps	1	1	2412	13.19	9.14	0.50	Pass
11b	1Mbps	1	6	2437	13.18	9.14	0.50	Pass
11b	1Mbps	1	11	2462	13.26	9.58	0.50	Pass
11g	6Mbps	1	1	2412	16.72	16.52	0.50	Pass
11g	6Mbps	1	6	2437	16.70	16.48	0.50	Pass
11g	6Mbps	1	11	2462	16.77	16.52	0.50	Pass
HT20	MCS0	1	1	2412	17.60	17.62	0.50	Pass
HT20	MCS0	1	6	2437	17.59	17.62	0.50	Pass
HT20	MCS0	1	11	2462	17.61	17.64	0.50	Pass
HT40	MCS0	1	3	2422	35.35	34.52	0.50	Pass
HT40	MCS0	1	6	2437	35.34	34.32	0.50	Pass
HT40	MCS0	1	9	2452	35.36	34.56	0.50	Pass

TEST RESULTS DATA
Average Output Power

2.4GHz Band										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
					Ant 1	Ant 1	Ant 1	Ant 1	Ant 1	
11b	1Mbps	1	1	2412	8.60	30.00	-2.50	6.10	36.00	Pass
11b	1Mbps	1	6	2437	8.60	30.00	-2.50	6.10	36.00	Pass
11b	1Mbps	1	11	2462	9.10	30.00	-2.50	6.60	36.00	Pass
11g	6Mbps	1	1	2412	10.20	30.00	-2.50	7.70	36.00	Pass
11g	6Mbps	1	6	2437	9.60	30.00	-2.50	7.10	36.00	Pass
11g	6Mbps	1	11	2462	10.30	30.00	-2.50	7.80	36.00	Pass
HT20	MCS0	1	1	2412	10.30	30.00	-2.50	7.80	36.00	Pass
HT20	MCS0	1	6	2437	9.60	30.00	-2.50	7.10	36.00	Pass
HT20	MCS0	1	11	2462	10.50	30.00	-2.50	8.00	36.00	Pass
HT40	MCS0	1	3	2422	10.30	30.00	-2.50	7.80	36.00	Pass
HT40	MCS0	1	6	2437	8.80	30.00	-2.50	6.30	36.00	Pass
HT40	MCS0	1	9	2452	8.40	30.00	-2.50	5.90	36.00	Pass

Setting
Ant 1
50.00
48.00
45.00
33.00
34.00
32.00
31.00
33.00
30.00
28.00
33.00
36.00

Note: Measured power (dBm) has offset with cable loss.

TEST RESULTS DATA
Peak Output Power

2.4GHz Band										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
					Ant 1	Ant 1	Ant 1	Ant 1	Ant 1	
11b	1Mbps	1	1	2412	11.25	30.00	-2.50	8.75	36.00	Pass
11b	1Mbps	1	6	2437	11.46	30.00	-2.50	8.96	36.00	Pass
11b	1Mbps	1	11	2462	11.93	30.00	-2.50	9.43	36.00	Pass
11g	6Mbps	1	1	2412	18.65	30.00	-2.50	16.15	36.00	Pass
11g	6Mbps	1	6	2437	18.34	30.00	-2.50	15.84	36.00	Pass
11g	6Mbps	1	11	2462	18.89	30.00	-2.50	16.39	36.00	Pass
HT20	MCS0	1	1	2412	18.88	30.00	-2.50	16.38	36.00	Pass
HT20	MCS0	1	6	2437	17.96	30.00	-2.50	15.46	36.00	Pass
HT20	MCS0	1	11	2462	18.93	30.00	-2.50	16.43	36.00	Pass
HT40	MCS0	1	3	2422	18.90	30.00	-2.50	16.40	36.00	Pass
HT40	MCS0	1	6	2437	17.92	30.00	-2.50	15.42	36.00	Pass
HT40	MCS0	1	9	2452	17.63	30.00	-2.50	15.13	36.00	Pass

Note: Measured power (dBm) has offset with cable loss.

TEST RESULTS DATA
Peak Power Spectral Density

2.4GHz Band								
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm/3kHz)	DG (dBi)	Peak PSD Limit (dBm/3kHz)	Pass/Fail
					Ant 1	Ant 1	Ant 1	
11b	1Mbps	1	1	2412	-7.03	-2.50	8.00	Pass
11b	1Mbps	1	6	2437	-7.14	-2.50	8.00	Pass
11b	1Mbps	1	11	2462	-7.14	-2.50	8.00	Pass
11g	6Mbps	1	1	2412	-13.03	-2.50	8.00	Pass
11g	6Mbps	1	6	2437	-13.10	-2.50	8.00	Pass
11g	6Mbps	1	11	2462	-12.08	-2.50	8.00	Pass
HT20	MCS0	1	1	2412	-11.43	-2.50	8.00	Pass
HT20	MCS0	1	6	2437	-11.82	-2.50	8.00	Pass
HT20	MCS0	1	11	2462	-11.18	-2.50	8.00	Pass
HT40	MCS0	1	3	2422	-13.85	-2.50	8.00	Pass
HT40	MCS0	1	6	2437	-13.49	-2.50	8.00	Pass
HT40	MCS0	1	9	2452	-13.70	-2.50	8.00	Pass

Measured power density (dBm) has offset with cable loss.



Appendix B. Radiated Spurious Emission Test Data

Test Engineer :	Wenbo Xiao	Relative Humidity :	48~49%
		Temperature :	24~25℃

Radiated Spurious Emission Test Modes





Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 7	2400-2483.5	SISO	802.11b	01	2412	1Mbps	-	-
Mode 8	2400-2483.5	SISO	802.11b	06	2437	1Mbps	-	-
Mode 9	2400-2483.5	SISO	802.11b	11	2462	1Mbps	-	-
Mode 10	2400-2483.5	SISO	802.11g	01	2412	6Mbps	-	-
Mode 11	2400-2483.5	SISO	802.11g	06	2437	6Mbps	-	-
Mode 12	2400-2483.5	SISO	802.11g	11	2462	6Mbps	-	-
Mode 13	2400-2483.5	SISO	802.11n HT20	01	2412	MCS0	-	-
Mode 14	2400-2483.5	SISO	802.11n HT20	06	2437	MCS0	-	-
Mode 15	2400-2483.5	SISO	802.11n HT20	11	2462	MCS0	-	-
Mode 16	2400-2483.5	SISO	802.11n HT40	03	2422	MCS0	-	-
Mode 17	2400-2483.5	SISO	802.11n HT40	09	2452	MCS0	-	-
Mode 18	2400-2483.5	SISO	802.11b	01	2412	1Mbps	-	LF
Mode 19	2400-2483.5	SISO	802.11n HT40	06	2437	MCS0	-	-







Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
7	802.11b	01	2385.53	43.69	54.00	-10.31	V	Average	Pass	Band Edge
7	802.11b	01	4824.00	50.91	54.00	-3.09	V	Average	Pass	Harmonic
8	802.11b	06	2483.75	45.02	54.00	-8.98	H	Average	Pass	Band Edge
8	802.11b	06	4874.00	50.86	54.00	-3.14	V	Average	Pass	Harmonic
9	802.11b	11	2487.57	45.57	54.00	-8.43	H	Average	Pass	Band Edge
9	802.11b	11	4924.00	50.60	54.00	-3.40	V	Average	Pass	Harmonic
10	802.11g	01	2389.95	41.18	54.00	-12.82	H	Average	Pass	Band Edge
10	802.11g	01	4824.00	50.88	54.00	-3.12	V	Average	Pass	Harmonic
11	802.11g	06	-	-	-	-	-	-	-	Band Edge
11	802.11g	06	4874.00	50.71	54.00	-3.29	V	Average	Pass	Harmonic
12	802.11g	11	2483.62	46.01	54.00	-7.99	H	Average	Pass	Band Edge
12	802.11g	11	4924.00	50.67	54.00	-3.33	V	Average	Pass	Harmonic
13	802.11n HT20	01	2389.43	40.22	54.00	-13.78	H	Average	Pass	Band Edge
13	802.11n HT20	01	4824.00	50.80	54.00	-3.20	V	Average	Pass	Harmonic
14	802.11n HT20	06	2488.98	42.56	54.00	-11.44	H	Average	Pass	Band Edge
14	802.11n HT20	06	4874.00	50.75	54.00	-3.25	V	Average	Pass	Harmonic
15	802.11n HT20	11	2483.62	47.20	54.00	-6.80	H	Average	Pass	Band Edge
15	802.11n HT20	11	4924.00	50.87	54.00	-3.13	V	Average	Pass	Harmonic
16	802.11n HT40	03	2485.80	44.04	54.00	-9.96	H	Average	Pass	Band Edge
16	802.11n HT40	03	4844.00	50.76	54.00	-3.24	V	Average	Pass	Harmonic
17	802.11n HT40	09	2484.54	50.11	54.00	-3.89	H	Average	Pass	Band Edge
17	802.11n HT40	09	4904.00	50.85	54.00	-3.15	V	Average	Pass	Harmonic
18	802.11b	01	75.59	32.99	40.00	-7.01	H	PEAK	PASS	LF
19	802.11n HT40	06	-	-	-	-	-	-	-	Band Edge
19	802.11n HT40	06	4874.00	50.59	54.00	-3.41	V	Average	Pass	Harmonic

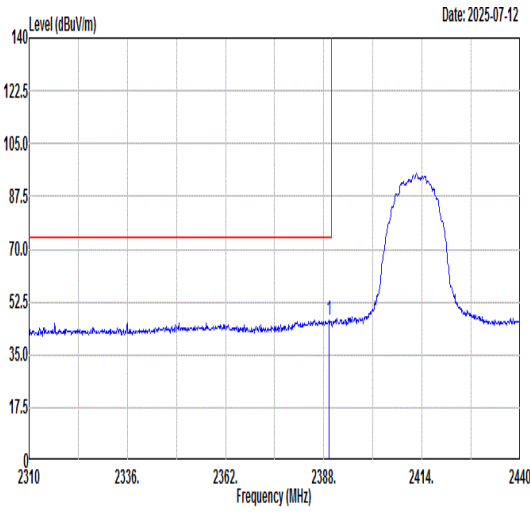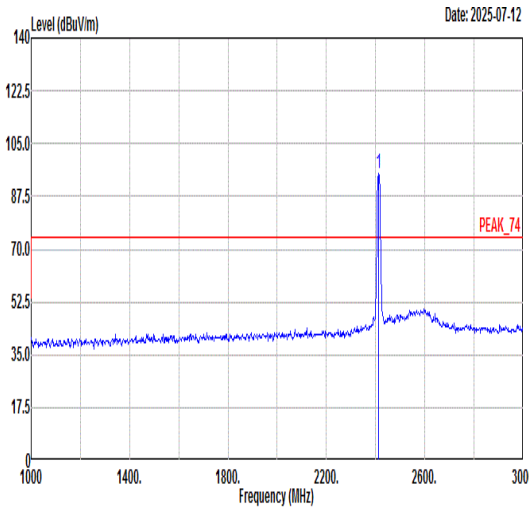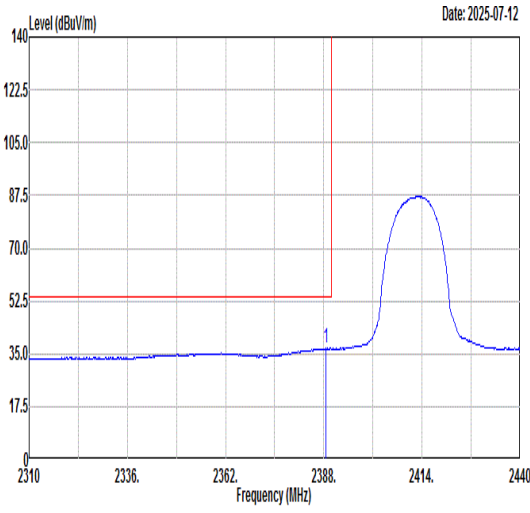
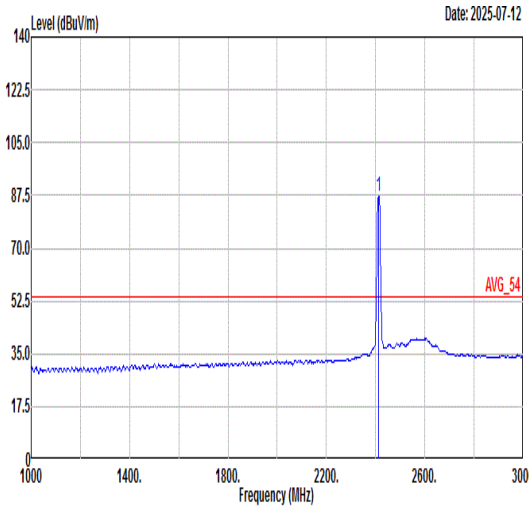


		7																																																																																												
Mode		Band Edge																																																																																												
		2400-2483.5_802.11b_CH01_2412MHz																																																																																												
ANT		SISO																																																																																												
Pol.		Horizontal					Fundamental																																																																																							
Peak	 Level (dBuV/m) Date: 2025-07-12 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.30</td><td>46.39</td><td>74.00</td><td>-27.61</td><td>44.57</td><td>30.60</td><td>5.36</td><td>34.14</td><td>162</td><td>360</td><td>PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2389.30	46.39	74.00	-27.61	44.57	30.60	5.36	34.14	162	360	PEAK	 Level (dBuV/m) Date: 2025-07-12 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>94.95</td><td>-----</td><td>-----</td><td>93.09</td><td>30.62</td><td>5.38</td><td>34.14</td><td>162</td><td>360</td><td>PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2412.00	94.95	-----	-----	93.09	30.62	5.38	34.14	162	360	PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																					
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																					
1	2389.30	46.39	74.00	-27.61	44.57	30.60	5.36	34.14	162	360	PEAK																																																																																			
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																						
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																					
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																					
1	2412.00	94.95	-----	-----	93.09	30.62	5.38	34.14	162	360	PEAK																																																																																			
Avg	 Level (dBuV/m) Date: 2025-07-12 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2388.52</td><td>36.87</td><td>54.00</td><td>-17.13</td><td>35.05</td><td>30.60</td><td>5.36</td><td>34.14</td><td>162</td><td>360</td><td>AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2388.52	36.87	54.00	-17.13	35.05	30.60	5.36	34.14	162	360	AVERAGE	 Level (dBuV/m) Date: 2025-07-12 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>87.13</td><td>-----</td><td>-----</td><td>85.27</td><td>30.62</td><td>5.38</td><td>34.14</td><td>162</td><td>360</td><td>AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2412.00	87.13	-----	-----	85.27	30.62	5.38	34.14	162	360	AVERAGE
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																					
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																					
1	2388.52	36.87	54.00	-17.13	35.05	30.60	5.36	34.14	162	360	AVERAGE																																																																																			
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																						
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																					
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																					
1	2412.00	87.13	-----	-----	85.27	30.62	5.38	34.14	162	360	AVERAGE																																																																																			

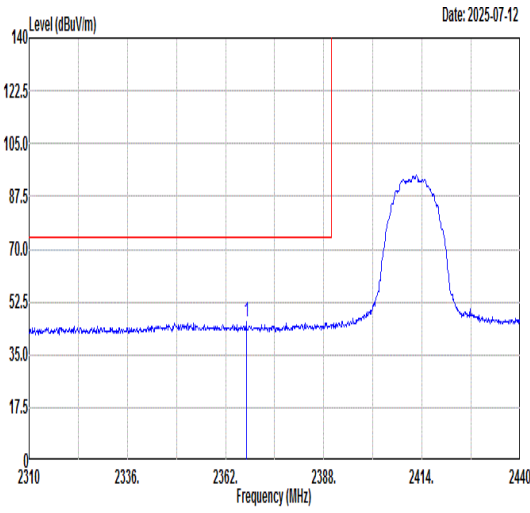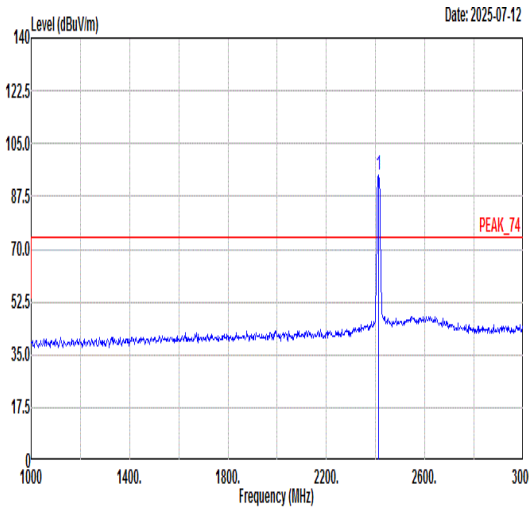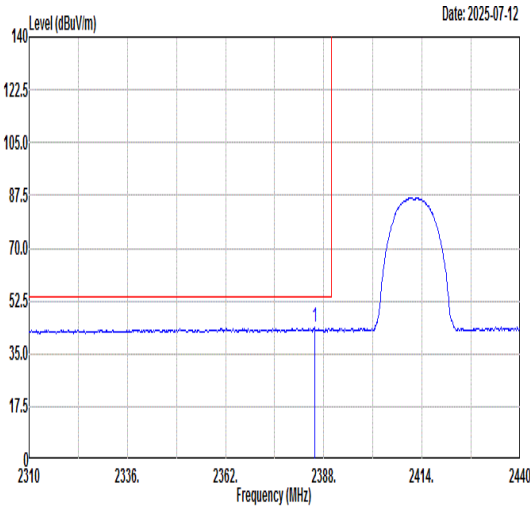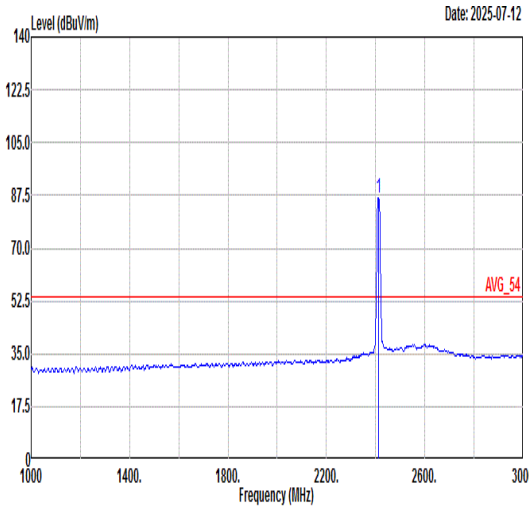

		7																																																																																										
Mode		Band Edge																																																																																										
		2400-2483.5_802.11b_CH01_2412MHz																																																																																										
ANT		SISO																																																																																										
Pol.		Vertical					Fundamental																																																																																					
Peak	 Level (dBuV/m) Date: 2025-07-12 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2367.46</td><td>45.75</td><td>74.00</td><td>-28.25</td><td>43.96</td><td>30.60</td><td>5.34</td><td>34.15</td><td>100</td><td>91 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2367.46	45.75	74.00	-28.25	43.96	30.60	5.34	34.15	100	91 PEAK	 Level (dBuV/m) Date: 2025-07-12 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>94.45</td><td>-----</td><td>-----</td><td>92.59</td><td>30.62</td><td>5.38</td><td>34.14</td><td>100</td><td>91 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	94.45	-----	-----	92.59	30.62	5.38	34.14	100	91 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	2367.46	45.75	74.00	-28.25	43.96	30.60	5.34	34.15	100	91 PEAK																																																																																		
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	2412.00	94.45	-----	-----	92.59	30.62	5.38	34.14	100	91 PEAK																																																																																		
Avg	 Level (dBuV/m) Date: 2025-07-12 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2385.53</td><td>43.69</td><td>54.00</td><td>-10.31</td><td>41.89</td><td>30.60</td><td>5.35</td><td>34.15</td><td>100</td><td>91 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2385.53	43.69	54.00	-10.31	41.89	30.60	5.35	34.15	100	91 AVERAGE	 Level (dBuV/m) Date: 2025-07-12 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>86.60</td><td>-----</td><td>-----</td><td>84.74</td><td>30.62</td><td>5.38</td><td>34.14</td><td>100</td><td>91 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	86.60	-----	-----	84.74	30.62	5.38	34.14	100	91 AVERAGE
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	2385.53	43.69	54.00	-10.31	41.89	30.60	5.35	34.15	100	91 AVERAGE																																																																																		
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	2412.00	86.60	-----	-----	84.74	30.62	5.38	34.14	100	91 AVERAGE																																																																																		

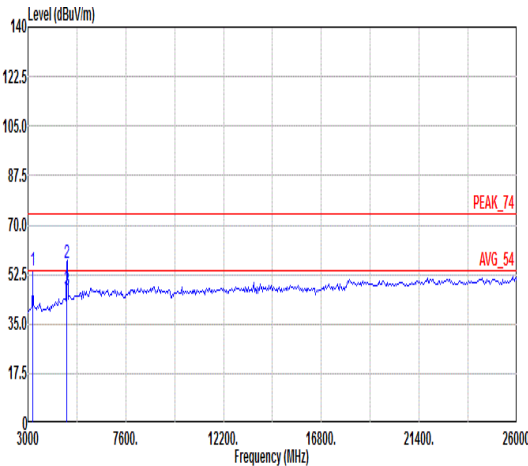
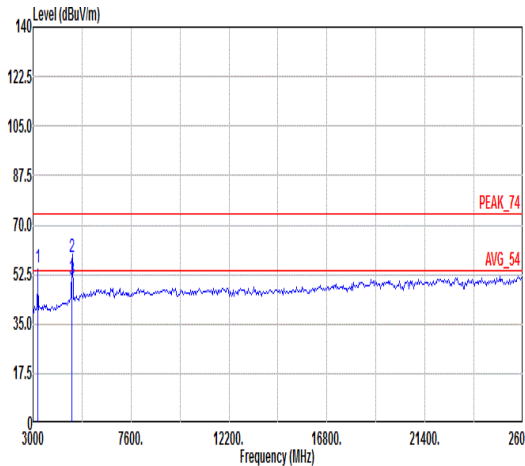


Mode	7																																																																																																																																											
	Harmonic																																																																																																																																											
	2400-2483.5_802.11b_CH01_2412MHz																																																																																																																																											
ANT	SISO																																																																																																																																											
Pol.	Horizontal						Vertical																																																																																																																																					
Peak Avg																																																																																																																																												
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>3210.00</td><td>53.92</td><td>74.00</td><td>-20.08</td><td>78.86</td><td>32.65</td><td>6.62</td><td>64.21</td><td>300</td><td>358</td><td>Peak</td></tr><tr><td>2</td><td>4824.00</td><td>56.26</td><td>74.00</td><td>-17.74</td><td>75.80</td><td>36.42</td><td>8.88</td><td>64.84</td><td>100</td><td>122</td><td>Peak</td></tr><tr><td>3</td><td>4824.00</td><td>46.88</td><td>54.00</td><td>-7.12</td><td>66.42</td><td>36.42</td><td>8.88</td><td>64.84</td><td>100</td><td>122</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	3210.00	53.92	74.00	-20.08	78.86	32.65	6.62	64.21	300	358	Peak	2	4824.00	56.26	74.00	-17.74	75.80	36.42	8.88	64.84	100	122	Peak	3	4824.00	46.88	54.00	-7.12	66.42	36.42	8.88	64.84	100	122	Average	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>3210.00</td><td>54.95</td><td>74.00</td><td>-19.05</td><td>79.89</td><td>32.65</td><td>6.62</td><td>64.21</td><td>273</td><td>309</td><td>Peak</td></tr><tr><td>2</td><td>4824.00</td><td>58.66</td><td>74.00</td><td>-15.34</td><td>78.20</td><td>36.42</td><td>8.88</td><td>64.84</td><td>109</td><td>300</td><td>Peak</td></tr><tr><td>3</td><td>4824.00</td><td>50.91</td><td>54.00</td><td>-3.09</td><td>70.45</td><td>36.42</td><td>8.88</td><td>64.84</td><td>109</td><td>300</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	3210.00	54.95	74.00	-19.05	79.89	32.65	6.62	64.21	273	309	Peak	2	4824.00	58.66	74.00	-15.34	78.20	36.42	8.88	64.84	109	300	Peak	3	4824.00	50.91	54.00	-3.09	70.45	36.42	8.88	64.84	109	300	Average
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																				
	Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																			
1	3210.00	53.92	74.00	-20.08	78.86	32.65	6.62	64.21	300	358	Peak																																																																																																																																	
2	4824.00	56.26	74.00	-17.74	75.80	36.42	8.88	64.84	100	122	Peak																																																																																																																																	
3	4824.00	46.88	54.00	-7.12	66.42	36.42	8.88	64.84	100	122	Average																																																																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																			
1	3210.00	54.95	74.00	-19.05	79.89	32.65	6.62	64.21	273	309	Peak																																																																																																																																	
2	4824.00	58.66	74.00	-15.34	78.20	36.42	8.88	64.84	109	300	Peak																																																																																																																																	
3	4824.00	50.91	54.00	-3.09	70.45	36.42	8.88	64.84	109	300	Average																																																																																																																																	



		8																																																																																	
Mode		Band Edge - L																																																																																	
		2400-2483.5_802.11b_CH06_2437MHz																																																																																	
ANT		SISO																																																																																	
Pol.		Horizontal					Fundamental																																																																												
Peak	Date: 2025-07-13					Date: 2025-07-13																																																																													
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2375.15	49.49	74.00	-24.51	45.01	33.28	5.35	34.15	100	103	PEAK		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	105.41	-----	-----	100.68	33.44	5.41	34.12	100	103
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																										
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																										
1	2375.15	49.49	74.00	-24.51	45.01	33.28	5.35	34.15	100	103	PEAK																																																																								
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																										
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																										
1	2437.00	105.41	-----	-----	100.68	33.44	5.41	34.12	100	103	PEAK																																																																								
Avg	Date: 2025-07-13					Date: 2025-07-13																																																																													
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2389.25	39.51	54.00	-14.49	34.98	33.31	5.36	34.14	100	103	AVERAGE		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	97.56	-----	-----	92.83	33.44	5.41	34.12	100	103
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																										
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																										
1	2389.25	39.51	54.00	-14.49	34.98	33.31	5.36	34.14	100	103	AVERAGE																																																																								
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																										
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																										
1	2437.00	97.56	-----	-----	92.83	33.44	5.41	34.12	100	103	AVERAGE																																																																								

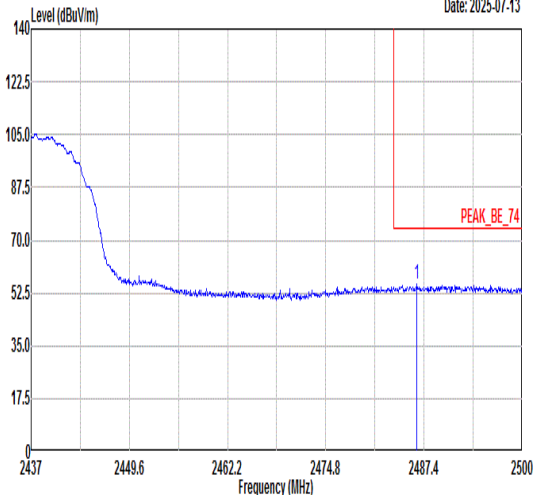
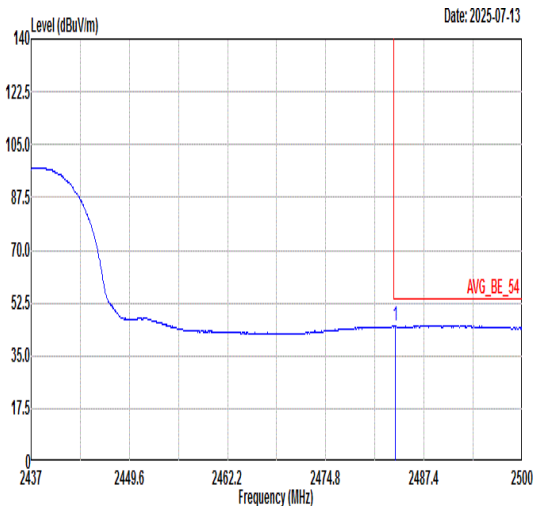


Mode	8																																												
	Band Edge - R																																												
	2400-2483.5_802.11b_CH06_2437MHz																																												
ANT	SISO																																												
Pol.	Horizontal					Fundamental																																							
Peak	Date: 2025-07-13 					Blank																																							
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2486.46</td><td>55.62</td><td>74.00</td><td>-18.38</td><td>50.71</td><td>33.56</td><td>5.46</td><td>34.11</td><td>100</td><td>103 PEAK</td></tr></table>											Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2486.46	55.62	74.00	-18.38
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																					
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																				
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																				
1	2486.46	55.62	74.00	-18.38	50.71	33.56	5.46	34.11	100	103 PEAK																																			
Avg	Date: 2025-07-13 					Blank																																							
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.75</td><td>45.02</td><td>54.00</td><td>-8.98</td><td>40.11</td><td>33.56</td><td>5.46</td><td>34.11</td><td>100</td><td>103 AVERAGE</td></tr></table>											Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2483.75	45.02	54.00	-8.98
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																					
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																				
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																				
1	2483.75	45.02	54.00	-8.98	40.11	33.56	5.46	34.11	100	103 AVERAGE																																			



		8																																																																																																																								
Mode		Band Edge - L																																																																																																																								
		2400-2483.5_802.11b_CH06_2437MHz																																																																																																																								
ANT		SISO																																																																																																																								
Pol.		Vertical					Fundamental																																																																																																																			
Peak	Level (dBuV/m) Date: 2025-07-13 Frequency (MHz) <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th></tr></thead><tbody><tr><td>1</td><td>2330.83</td><td>46.95</td><td>74.00</td><td>-27.05</td><td>42.65</td><td>33.16</td><td>5.31</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td>34.17</td><td>378</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>309</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>PEAK</td></tr></tbody></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	1	2330.83	46.95	74.00	-27.05	42.65	33.16	5.31							34.17	378								309								PEAK	Level (dBuV/m) Date: 2025-07-13 Frequency (MHz) <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th></tr></thead><tbody><tr><td>1</td><td>2437.00</td><td>99.64</td><td>-----</td><td>-----</td><td>94.91</td><td>33.44</td><td>5.41</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td>34.12</td><td>378</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>309</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>PEAK</td></tr></tbody></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	1	2437.00	99.64	-----	-----	94.91	33.44	5.41							34.12	378								309								PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																																																			
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm																																																																																																																			
1	2330.83	46.95	74.00	-27.05	42.65	33.16	5.31																																																																																																																			
						34.17	378																																																																																																																			
							309																																																																																																																			
							PEAK																																																																																																																			
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																																																			
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm																																																																																																																			
1	2437.00	99.64	-----	-----	94.91	33.44	5.41																																																																																																																			
						34.12	378																																																																																																																			
							309																																																																																																																			
							PEAK																																																																																																																			
Avg	Level (dBuV/m) Date: 2025-07-13 Frequency (MHz) <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th></tr></thead><tbody><tr><td>1</td><td>2310.38</td><td>36.64</td><td>54.00</td><td>-17.36</td><td>32.42</td><td>33.11</td><td>5.29</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td>34.18</td><td>378</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>309</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>AVERAGE</td></tr></tbody></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	1	2310.38	36.64	54.00	-17.36	32.42	33.11	5.29							34.18	378								309								AVERAGE	Level (dBuV/m) Date: 2025-07-13 Frequency (MHz) <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th></tr></thead><tbody><tr><td>1</td><td>2437.00</td><td>91.80</td><td>-----</td><td>-----</td><td>87.07</td><td>33.44</td><td>5.41</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td>34.12</td><td>378</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>309</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>AVERAGE</td></tr></tbody></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	1	2437.00	91.80	-----	-----	87.07	33.44	5.41							34.12	378								309								AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																																																			
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm																																																																																																																			
1	2310.38	36.64	54.00	-17.36	32.42	33.11	5.29																																																																																																																			
						34.18	378																																																																																																																			
							309																																																																																																																			
							AVERAGE																																																																																																																			
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																																																			
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm																																																																																																																			
1	2437.00	91.80	-----	-----	87.07	33.44	5.41																																																																																																																			
						34.12	378																																																																																																																			
							309																																																																																																																			
							AVERAGE																																																																																																																			

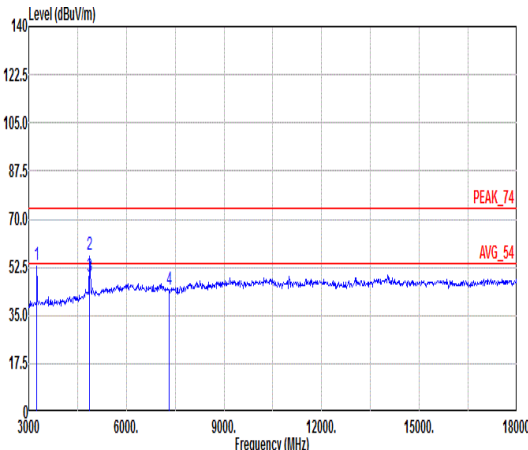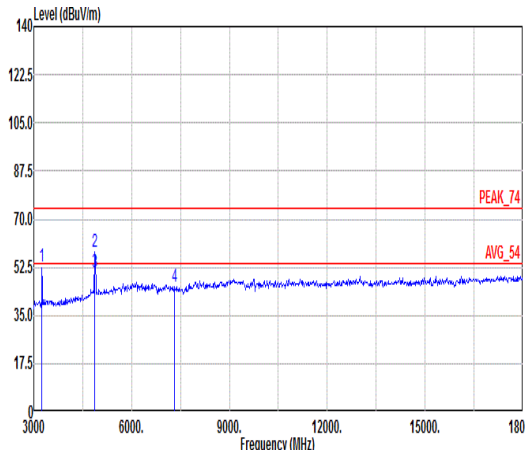

Mode	8																																																																																							
	Harmonic																																																																																							
	2400-2483.5_802.11b_CH06_2437MHz																																																																																							
ANT	SISO																																																																																							
Pol.	Horizontal						Vertical																																																																																	
Peak Avg																																																																																								
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>3250.00</td><td>53.62</td><td>74.00</td><td>-20.38</td><td>78.51</td><td>32.75</td><td>6.61</td><td>64.25</td><td>297</td><td>357</td><td>Peak</td></tr><tr><td>2</td><td>4874.00</td><td>57.09</td><td>74.00</td><td>-16.91</td><td>76.70</td><td>36.50</td><td>8.72</td><td>64.83</td><td>100</td><td>122</td><td>Peak</td></tr><tr><td>3</td><td>4874.00</td><td>49.18</td><td>54.00</td><td>-4.82</td><td>68.79</td><td>36.50</td><td>8.72</td><td>64.83</td><td>100</td><td>122</td><td>Average</td></tr><tr><td>4</td><td>7311.00</td><td>44.61</td><td>74.00</td><td>-29.39</td><td>62.55</td><td>36.89</td><td>10.18</td><td>65.01</td><td>---</td><td>---</td><td>Peak</td></tr></table>													Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	3250.00	53.62	74.00	-20.38	78.51	32.75	6.61	64.25	297	357	Peak	2	4874.00	57.09	74.00	-16.91	76.70	36.50	8.72	64.83	100	122	Peak	3	4874.00	49.18	54.00	-4.82	68.79	36.50	8.72	64.83	100	122	Average	4	7311.00	44.61	74.00	-29.39	62.55	36.89	10.18	65.01	---	---	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																															
1	3250.00	53.62	74.00	-20.38	78.51	32.75	6.61	64.25	297	357	Peak																																																																													
2	4874.00	57.09	74.00	-16.91	76.70	36.50	8.72	64.83	100	122	Peak																																																																													
3	4874.00	49.18	54.00	-4.82	68.79	36.50	8.72	64.83	100	122	Average																																																																													
4	7311.00	44.61	74.00	-29.39	62.55	36.89	10.18	65.01	---	---	Peak																																																																													



Mode	9																																																																																	
	Band Edge																																																																																	
	2400-2483.5_802.11b_CH11_2462MHz																																																																																	
ANT	SISO																																																																																	
Pol.	Horizontal	Fundamental																																																																																
Peak	Level (dBuV/m) Date: 2025-07-13 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 2462 2469.6 2477.2 2484.8 2492.4 2500 Frequency (MHz) PEAK_BE_74 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2485.37</td><td>56.57</td><td>74.00</td><td>-17.43</td><td>51.66</td><td>33.56</td><td>5.46</td><td>34.11</td><td>100 113 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2485.37	56.57	74.00	-17.43	51.66	33.56	5.46	34.11	100 113 PEAK	Level (dBuV/m) Date: 2025-07-13 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 1000 1400 1800 2200 2600 3000 Frequency (MHz) PEAK_74 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>105.20</td><td>-----</td><td>-----</td><td>100.38</td><td>33.50</td><td>5.44</td><td>34.12</td><td>100 113 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	105.20	-----	-----	100.38	33.50	5.44	34.12	100 113 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																									
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2485.37	56.57	74.00	-17.43	51.66	33.56	5.46	34.11	100 113 PEAK																																																																									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2462.00	105.20	-----	-----	100.38	33.50	5.44	34.12	100 113 PEAK																																																																									
Avg	Level (dBuV/m) Date: 2025-07-13 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 2462 2469.6 2477.2 2484.8 2492.4 2500 Frequency (MHz) AVG_BE_54 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2487.57</td><td>45.57</td><td>54.00</td><td>-8.43</td><td>40.64</td><td>33.57</td><td>5.46</td><td>34.10</td><td>100 113 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2487.57	45.57	54.00	-8.43	40.64	33.57	5.46	34.10	100 113 AVERAGE	Level (dBuV/m) Date: 2025-07-13 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 1000 1400 1800 2200 2600 3000 Frequency (MHz) AVG_54 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>97.43</td><td>-----</td><td>-----</td><td>92.61</td><td>33.50</td><td>5.44</td><td>34.12</td><td>100 113 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	97.43	-----	-----	92.61	33.50	5.44	34.12	100 113 AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2487.57	45.57	54.00	-8.43	40.64	33.57	5.46	34.10	100 113 AVERAGE																																																																									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2462.00	97.43	-----	-----	92.61	33.50	5.44	34.12	100 113 AVERAGE																																																																									



Mode	9																																																																																	
	Band Edge																																																																																	
	2400-2483.5_802.11b_CH11_2462MHz																																																																																	
ANT	SISO																																																																																	
Pol.	Vertical	Fundamental																																																																																
Peak	Level (dBuV/m) Date: 2025-07-13 PEAK_BE_74 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2485.79</td><td>50.26</td><td>74.00</td><td>-23.74</td><td>45.35</td><td>33.56</td><td>5.46</td><td>34.11</td><td>328 306 PEAK</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2485.79	50.26	74.00	-23.74	45.35	33.56	5.46	34.11	328 306 PEAK	Level (dBuV/m) Date: 2025-07-13 PEAK_74 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>99.66</td><td>-----</td><td>-----</td><td>94.84</td><td>33.50</td><td>5.44</td><td>34.12</td><td>328 306 PEAK</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	99.66	-----	-----	94.84	33.50	5.44	34.12	328 306 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																									
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2485.79	50.26	74.00	-23.74	45.35	33.56	5.46	34.11	328 306 PEAK																																																																									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2462.00	99.66	-----	-----	94.84	33.50	5.44	34.12	328 306 PEAK																																																																									
Avg	Level (dBuV/m) Date: 2025-07-13 AVG_BE_54 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2488.22</td><td>39.36</td><td>54.00</td><td>-14.64</td><td>34.42</td><td>33.57</td><td>5.47</td><td>34.10</td><td>328 306 AVERAGE</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2488.22	39.36	54.00	-14.64	34.42	33.57	5.47	34.10	328 306 AVERAGE	Level (dBuV/m) Date: 2025-07-13 AVG_54 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>92.06</td><td>-----</td><td>-----</td><td>87.25</td><td>33.50</td><td>5.43</td><td>34.12</td><td>328 306 AVERAGE</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	92.06	-----	-----	87.25	33.50	5.43	34.12	328 306 AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2488.22	39.36	54.00	-14.64	34.42	33.57	5.47	34.10	328 306 AVERAGE																																																																									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2462.00	92.06	-----	-----	87.25	33.50	5.43	34.12	328 306 AVERAGE																																																																									



Mode	9																																																																																													
	Harmonic																																																																																													
	2400-2483.5_802.11b_CH11_2462MHz																																																																																													
ANT	SISO																																																																																													
Pol.	Horizontal																																																																																													
Peak Avg																																																																																														
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>3280.00</td><td>50.58</td><td>74.00</td><td>-23.42</td><td>76.50</td><td>31.75</td><td>6.61</td><td>64.28</td><td>298</td><td>356</td><td>Peak</td></tr><tr><td>2</td><td>4924.00</td><td>55.91</td><td>74.00</td><td>-18.09</td><td>76.43</td><td>35.73</td><td>8.57</td><td>64.82</td><td>100</td><td>120</td><td>Peak</td></tr><tr><td>3</td><td>4924.00</td><td>47.96</td><td>54.00</td><td>-6.04</td><td>68.48</td><td>35.73</td><td>8.57</td><td>64.82</td><td>100</td><td>120</td><td>Average</td></tr><tr><td>4</td><td>7386.00</td><td>45.08</td><td>74.00</td><td>-28.92</td><td>63.07</td><td>36.81</td><td>10.18</td><td>64.98</td><td>---</td><td>---</td><td>Peak</td></tr></table>													Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	3280.00	50.58	74.00	-23.42	76.50	31.75	6.61	64.28	298	356	Peak	2	4924.00	55.91	74.00	-18.09	76.43	35.73	8.57	64.82	100	120	Peak	3	4924.00	47.96	54.00	-6.04	68.48	35.73	8.57	64.82	100	120	Average	4	7386.00	45.08	74.00	-28.92	63.07	36.81	10.18	64.98	---	---	Peak
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	3280.00	50.58	74.00	-23.42	76.50	31.75	6.61	64.28	298	356	Peak																																																																																			
2	4924.00	55.91	74.00	-18.09	76.43	35.73	8.57	64.82	100	120	Peak																																																																																			
3	4924.00	47.96	54.00	-6.04	68.48	35.73	8.57	64.82	100	120	Average																																																																																			
4	7386.00	45.08	74.00	-28.92	63.07	36.81	10.18	64.98	---	---	Peak																																																																																			
<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>3280.00</td><td>52.19</td><td>74.00</td><td>-21.81</td><td>78.11</td><td>31.75</td><td>6.61</td><td>64.28</td><td>298</td><td>306</td><td>Peak</td></tr><tr><td>2</td><td>4924.00</td><td>58.55</td><td>74.00</td><td>-15.45</td><td>79.07</td><td>35.73</td><td>8.57</td><td>64.82</td><td>100</td><td>301</td><td>Peak</td></tr><tr><td>3</td><td>4924.00</td><td>50.60</td><td>54.00</td><td>-3.40</td><td>71.12</td><td>35.73</td><td>8.57</td><td>64.82</td><td>100</td><td>301</td><td>Average</td></tr><tr><td>4</td><td>7386.00</td><td>45.95</td><td>74.00</td><td>-28.05</td><td>63.94</td><td>36.81</td><td>10.18</td><td>64.98</td><td>---</td><td>---</td><td>Peak</td></tr></table>													Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	3280.00	52.19	74.00	-21.81	78.11	31.75	6.61	64.28	298	306	Peak	2	4924.00	58.55	74.00	-15.45	79.07	35.73	8.57	64.82	100	301	Peak	3	4924.00	50.60	54.00	-3.40	71.12	35.73	8.57	64.82	100	301	Average	4	7386.00	45.95	74.00	-28.05	63.94	36.81	10.18	64.98	---	---	Peak	
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																					
1	3280.00	52.19	74.00	-21.81	78.11	31.75	6.61	64.28	298	306	Peak																																																																																			
2	4924.00	58.55	74.00	-15.45	79.07	35.73	8.57	64.82	100	301	Peak																																																																																			
3	4924.00	50.60	54.00	-3.40	71.12	35.73	8.57	64.82	100	301	Average																																																																																			
4	7386.00	45.95	74.00	-28.05	63.94	36.81	10.18	64.98	---	---	Peak																																																																																			





Mode	10																																																																																	
	Band Edge																																																																																	
	2400-2483.5_802.11g_CH01_2412MHz																																																																																	
ANT	SISO																																																																																	
Pol.	Horizontal	Fundamental																																																																																
Peak	Level (dBuV/m) Date: 2025-07-13 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2389.56</td><td>51.03</td><td>74.00</td><td>-22.97</td><td>46.50</td><td>33.31</td><td>5.36</td><td>34.14</td><td>111</td><td>118 PEAK</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2389.56	51.03	74.00	-22.97	46.50	33.31	5.36	34.14	111	118 PEAK	Level (dBuV/m) Date: 2025-07-13 Frequency (MHz) PEAK_74 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2412.00</td><td>102.95</td><td>-----</td><td>-----</td><td>98.30</td><td>33.39</td><td>5.39</td><td>34.13</td><td>111</td><td>118 PEAK</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2412.00	102.95	-----	-----	98.30	33.39	5.39	34.13	111	118 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																									
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																									
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1 2389.56	51.03	74.00	-22.97	46.50	33.31	5.36	34.14	111	118 PEAK																																																																									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																									
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1 2412.00	102.95	-----	-----	98.30	33.39	5.39	34.13	111	118 PEAK																																																																									
Avg	Level (dBuV/m) Date: 2025-07-13 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2389.95</td><td>41.18</td><td>54.00</td><td>-12.82</td><td>36.65</td><td>33.31</td><td>5.36</td><td>34.14</td><td>111</td><td>118 AVERAGE</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2389.95	41.18	54.00	-12.82	36.65	33.31	5.36	34.14	111	118 AVERAGE	Level (dBuV/m) Date: 2025-07-13 Frequency (MHz) AVG_54 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2412.00</td><td>95.51</td><td>-----</td><td>-----</td><td>90.86</td><td>33.39</td><td>5.39</td><td>34.13</td><td>111</td><td>118 AVERAGE</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2412.00	95.51	-----	-----	90.86	33.39	5.39	34.13	111	118 AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																									
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1 2389.95	41.18	54.00	-12.82	36.65	33.31	5.36	34.14	111	118 AVERAGE																																																																									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																									
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1 2412.00	95.51	-----	-----	90.86	33.39	5.39	34.13	111	118 AVERAGE																																																																									





Mode	10																																																																																	
	Band Edge																																																																																	
	2400-2483.5_802.11g_CH01_2412MHz																																																																																	
ANT	SISO																																																																																	
Pol.	Vertical	Fundamental																																																																																
Peak	Date: 2025-07-13 Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.82</td><td>47.93</td><td>74.00</td><td>-26.07</td><td>43.40</td><td>33.31</td><td>5.36</td><td>34.14</td><td>385 283 PEAK</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2389.82	47.93	74.00	-26.07	43.40	33.31	5.36	34.14	385 283 PEAK	Date: 2025-07-13 Level (dBuV/m) Frequency (MHz) PEAK_74 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>97.94</td><td>-----</td><td>-----</td><td>93.29</td><td>33.39</td><td>5.39</td><td>34.13</td><td>385 283 PEAK</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	97.94	-----	-----	93.29	33.39	5.39	34.13	385 283 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																									
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2389.82	47.93	74.00	-26.07	43.40	33.31	5.36	34.14	385 283 PEAK																																																																									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2412.00	97.94	-----	-----	93.29	33.39	5.39	34.13	385 283 PEAK																																																																									
Avg	Date: 2025-07-13 Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.95</td><td>38.27</td><td>54.00</td><td>-15.73</td><td>33.74</td><td>33.31</td><td>5.36</td><td>34.14</td><td>385 283 AVERAGE</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	38.27	54.00	-15.73	33.74	33.31	5.36	34.14	385 283 AVERAGE	Date: 2025-07-13 Level (dBuV/m) Frequency (MHz) AVG_54 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>90.60</td><td>-----</td><td>-----</td><td>85.95</td><td>33.39</td><td>5.39</td><td>34.13</td><td>385 283 AVERAGE</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	90.60	-----	-----	85.95	33.39	5.39	34.13	385 283 AVERAGE
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																									
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2389.95	38.27	54.00	-15.73	33.74	33.31	5.36	34.14	385 283 AVERAGE																																																																									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2412.00	90.60	-----	-----	85.95	33.39	5.39	34.13	385 283 AVERAGE																																																																									

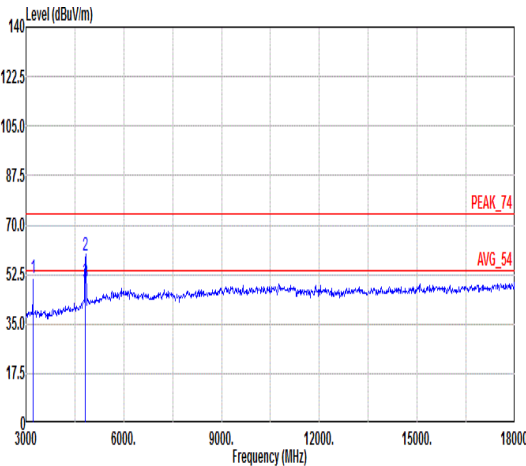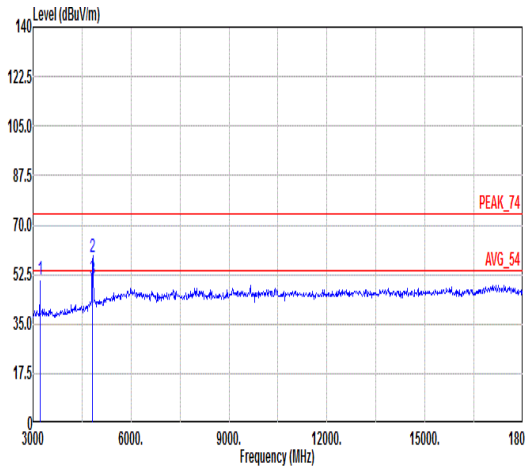

Mode	10																																																																																																																																											
	Harmonic																																																																																																																																											
	2400-2483.5_802.11g_CH01_2412MHz																																																																																																																																											
ANT	SISO																																																																																																																																											
Pol.	Horizontal						Vertical																																																																																																																																					
Peak Avg																																																																																																																																												
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>3210.00</td><td>51.39</td><td>74.00</td><td>-22.61</td><td>77.34</td><td>31.64</td><td>6.62</td><td>64.21</td><td>276</td><td>306</td><td>Peak</td></tr><tr><td>2</td><td>4824.00</td><td>59.18</td><td>74.00</td><td>-14.82</td><td>79.63</td><td>35.51</td><td>8.88</td><td>64.84</td><td>100</td><td>217</td><td>Peak</td></tr><tr><td>3</td><td>4824.00</td><td>49.74</td><td>54.00</td><td>-4.26</td><td>70.19</td><td>35.51</td><td>8.88</td><td>64.84</td><td>100</td><td>217</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	3210.00	51.39	74.00	-22.61	77.34	31.64	6.62	64.21	276	306	Peak	2	4824.00	59.18	74.00	-14.82	79.63	35.51	8.88	64.84	100	217	Peak	3	4824.00	49.74	54.00	-4.26	70.19	35.51	8.88	64.84	100	217	Average	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>3210.00</td><td>50.87</td><td>74.00</td><td>-23.13</td><td>76.82</td><td>31.64</td><td>6.62</td><td>64.21</td><td>103</td><td>306</td><td>Peak</td></tr><tr><td>2</td><td>4824.00</td><td>58.55</td><td>74.00</td><td>-15.45</td><td>79.00</td><td>35.51</td><td>8.88</td><td>64.84</td><td>103</td><td>301</td><td>Peak</td></tr><tr><td>3</td><td>4824.00</td><td>50.88</td><td>54.00</td><td>-3.12</td><td>71.33</td><td>35.51</td><td>8.88</td><td>64.84</td><td>103</td><td>301</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	3210.00	50.87	74.00	-23.13	76.82	31.64	6.62	64.21	103	306	Peak	2	4824.00	58.55	74.00	-15.45	79.00	35.51	8.88	64.84	103	301	Peak	3	4824.00	50.88	54.00	-3.12	71.33	35.51	8.88	64.84	103	301	Average
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																				
	Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																			
1	3210.00	51.39	74.00	-22.61	77.34	31.64	6.62	64.21	276	306	Peak																																																																																																																																	
2	4824.00	59.18	74.00	-14.82	79.63	35.51	8.88	64.84	100	217	Peak																																																																																																																																	
3	4824.00	49.74	54.00	-4.26	70.19	35.51	8.88	64.84	100	217	Average																																																																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																			
1	3210.00	50.87	74.00	-23.13	76.82	31.64	6.62	64.21	103	306	Peak																																																																																																																																	
2	4824.00	58.55	74.00	-15.45	79.00	35.51	8.88	64.84	103	301	Peak																																																																																																																																	
3	4824.00	50.88	54.00	-3.12	71.33	35.51	8.88	64.84	103	301	Average																																																																																																																																	

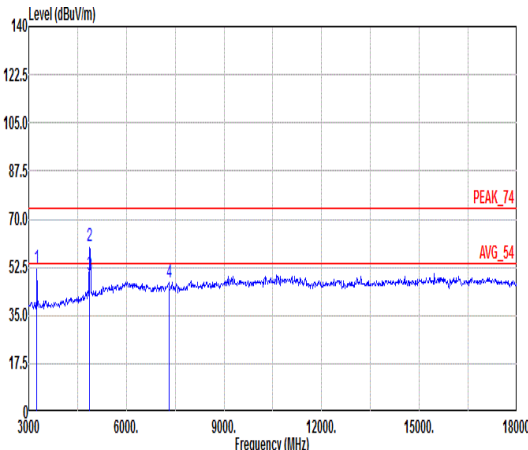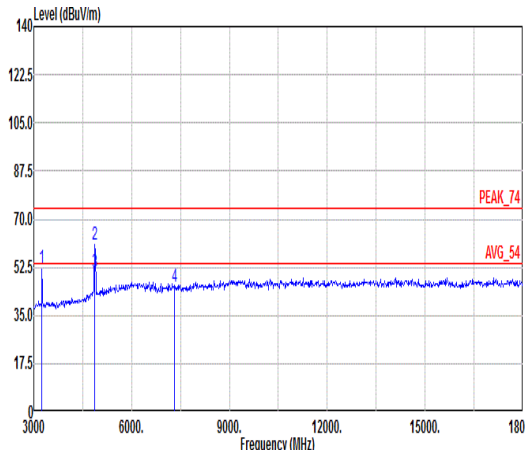

Mode	11																																																																																						
	Harmonic																																																																																						
	2400-2483.5_802.11g_CH06_2437MHz																																																																																						
ANT	SISO																																																																																						
Pol.	Horizontal																																																																																						
Peak Avg																																																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>3250.00</td><td>52.40</td><td>74.00</td><td>-21.60</td><td>78.34</td><td>31.70</td><td>6.61</td><td>64.25</td><td>297</td><td>360</td><td>Peak</td></tr><tr><td>2</td><td>4874.00</td><td>60.12</td><td>74.00</td><td>-13.88</td><td>80.61</td><td>35.62</td><td>8.72</td><td>64.83</td><td>100</td><td>217</td><td>Peak</td></tr><tr><td>3</td><td>4874.00</td><td>49.79</td><td>54.00</td><td>-4.21</td><td>70.28</td><td>35.62</td><td>8.72</td><td>64.83</td><td>100</td><td>217</td><td>Average</td></tr><tr><td>4</td><td>7311.00</td><td>47.13</td><td>74.00</td><td>-26.87</td><td>65.21</td><td>36.75</td><td>10.18</td><td>65.01</td><td>---</td><td>---</td><td>Peak</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	3250.00	52.40	74.00	-21.60	78.34	31.70	6.61	64.25	297	360	Peak	2	4874.00	60.12	74.00	-13.88	80.61	35.62	8.72	64.83	100	217	Peak	3	4874.00	49.79	54.00	-4.21	70.28	35.62	8.72	64.83	100	217	Average	4	7311.00	47.13	74.00	-26.87	65.21	36.75	10.18	65.01	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																															
	Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																													
1	3250.00	52.40	74.00	-21.60	78.34	31.70	6.61	64.25	297	360	Peak																																																																												
2	4874.00	60.12	74.00	-13.88	80.61	35.62	8.72	64.83	100	217	Peak																																																																												
3	4874.00	49.79	54.00	-4.21	70.28	35.62	8.72	64.83	100	217	Average																																																																												
4	7311.00	47.13	74.00	-26.87	65.21	36.75	10.18	65.01	---	---	Peak																																																																												
Vertical																																																																																							
																																																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>3250.00</td><td>52.41</td><td>74.00</td><td>-21.59</td><td>78.35</td><td>31.70</td><td>6.61</td><td>64.25</td><td>252</td><td>306</td><td>Peak</td></tr><tr><td>2</td><td>4874.00</td><td>60.99</td><td>74.00</td><td>-13.01</td><td>81.48</td><td>35.62</td><td>8.72</td><td>64.83</td><td>100</td><td>301</td><td>Peak</td></tr><tr><td>3</td><td>4874.00</td><td>50.71</td><td>54.00</td><td>-3.29</td><td>71.20</td><td>35.62</td><td>8.72</td><td>64.83</td><td>100</td><td>301</td><td>Average</td></tr><tr><td>4</td><td>7311.00</td><td>45.69</td><td>74.00</td><td>-28.31</td><td>63.77</td><td>36.75</td><td>10.18</td><td>65.01</td><td>---</td><td>---</td><td>Peak</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	3250.00	52.41	74.00	-21.59	78.35	31.70	6.61	64.25	252	306	Peak	2	4874.00	60.99	74.00	-13.01	81.48	35.62	8.72	64.83	100	301	Peak	3	4874.00	50.71	54.00	-3.29	71.20	35.62	8.72	64.83	100	301	Average	4	7311.00	45.69	74.00	-28.31	63.77	36.75	10.18	65.01	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																															
	Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																													
1	3250.00	52.41	74.00	-21.59	78.35	31.70	6.61	64.25	252	306	Peak																																																																												
2	4874.00	60.99	74.00	-13.01	81.48	35.62	8.72	64.83	100	301	Peak																																																																												
3	4874.00	50.71	54.00	-3.29	71.20	35.62	8.72	64.83	100	301	Average																																																																												
4	7311.00	45.69	74.00	-28.31	63.77	36.75	10.18	65.01	---	---	Peak																																																																												





		12																																																																														
Mode		Band Edge																																																																														
		2400-2483.5_802.11g_CH11_2462MHz																																																																														
ANT		SISO																																																																														
Pol.		Horizontal					Fundamental																																																																									
Peak	Level (dBuV/m) Date: 2025-07-14 Frequency (MHz)					Level (dBuV/m) Date: 2025-07-14 Frequency (MHz)																																																																										
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2484.50	56.28	74.00	-17.72	51.37	33.56	5.46	34.11	154 123 PEAK	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>101.47</td><td>-----</td><td>-----</td><td>96.67</td><td>33.49</td><td>5.43</td><td>34.12</td><td>154 123 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2462.00	101.47	-----	-----	96.67	33.49	5.43	34.12
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																							
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																							
1	2484.50	56.28	74.00	-17.72	51.37	33.56	5.46	34.11	154 123 PEAK																																																																							
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																							
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																							
1	2462.00	101.47	-----	-----	96.67	33.49	5.43	34.12	154 123 PEAK																																																																							
Avg	Level (dBuV/m) Date: 2025-07-14 Frequency (MHz)					Level (dBuV/m) Date: 2025-07-14 Frequency (MHz)																																																																										
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2483.62	46.01	54.00	-7.99	41.10	33.56	5.46	34.11	154 123 AVERAGE	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>94.02</td><td>-----</td><td>-----</td><td>89.22</td><td>33.49</td><td>5.43</td><td>34.12</td><td>154 123 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2462.00	94.02	-----	-----	89.22	33.49	5.43	34.12
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																							
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																							
1	2483.62	46.01	54.00	-7.99	41.10	33.56	5.46	34.11	154 123 AVERAGE																																																																							
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																							
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																							
1	2462.00	94.02	-----	-----	89.22	33.49	5.43	34.12	154 123 AVERAGE																																																																							







Mode	12																																																																																									
	Band Edge																																																																																									
	2400-2483.5_802.11g_CH11_2462MHz																																																																																									
ANT	SISO																																																																																									
Pol.	Vertical					Fundamental																																																																																				
Peak	Level (dBuV/m) Date: 2025-07-14 PEAK_BE_74 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2484.12</td><td>50.42</td><td>74.00</td><td>-23.58</td><td>45.51</td><td>33.56</td><td>5.46</td><td>34.11</td><td>376 283 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2484.12	50.42	74.00	-23.58	45.51	33.56	5.46	34.11	376 283 PEAK	Level (dBuV/m) Date: 2025-07-14 PEAK_74 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>98.45</td><td>-----</td><td>-----</td><td>93.65</td><td>33.49</td><td>5.43</td><td>34.12</td><td>376 283 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	98.45	-----	-----	93.65	33.49	5.43	34.12	376 283 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2484.12	50.42	74.00	-23.58	45.51	33.56	5.46	34.11	376 283 PEAK																																																																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2462.00	98.45	-----	-----	93.65	33.49	5.43	34.12	376 283 PEAK																																																																																	
Avg	Level (dBuV/m) Date: 2025-07-14 AVG_BE_54 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.51</td><td>39.79</td><td>54.00</td><td>-14.21</td><td>34.88</td><td>33.56</td><td>5.46</td><td>34.11</td><td>376 283 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2483.51	39.79	54.00	-14.21	34.88	33.56	5.46	34.11	376 283 AVERAGE	Level (dBuV/m) Date: 2025-07-14 AVG_54 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>90.84</td><td>-----</td><td>-----</td><td>86.04</td><td>33.49</td><td>5.43</td><td>34.12</td><td>376 283 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	90.84	-----	-----	86.04	33.49	5.43	34.12	376 283 AVERAGE
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2483.51	39.79	54.00	-14.21	34.88	33.56	5.46	34.11	376 283 AVERAGE																																																																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2462.00	90.84	-----	-----	86.04	33.49	5.43	34.12	376 283 AVERAGE																																																																																	



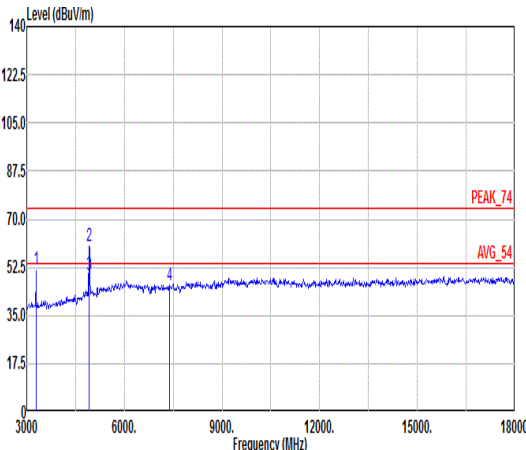
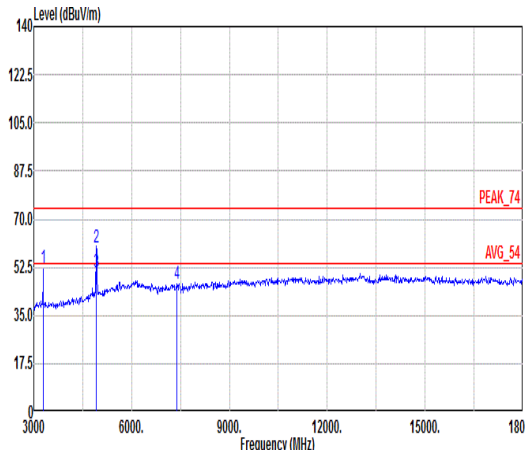


Mode	12																																																																																																																																																																											
	Harmonic																																																																																																																																																																											
	2400-2483.5_802.11g_CH11_2462MHz																																																																																																																																																																											
ANT	SISO																																																																																																																																																																											
Pol.	Horizontal										Vertical																																																																																																																																																																	
Peak Avg																																																																																																																																																																												
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>3280.00</td><td>51.65</td><td>74.00</td><td>-22.35</td><td>77.57</td><td>31.75</td><td>6.61</td><td>64.28</td><td>293</td><td>360</td><td>Peak</td></tr><tr><td>2</td><td>4924.00</td><td>59.96</td><td>74.00</td><td>-14.04</td><td>80.48</td><td>35.73</td><td>8.57</td><td>64.82</td><td>134</td><td>217</td><td>Peak</td></tr><tr><td>3</td><td>4924.00</td><td>49.47</td><td>54.00</td><td>-4.53</td><td>69.99</td><td>35.73</td><td>8.57</td><td>64.82</td><td>134</td><td>217</td><td>Average</td></tr><tr><td>4</td><td>7386.00</td><td>45.80</td><td>74.00</td><td>-28.20</td><td>63.79</td><td>36.81</td><td>10.18</td><td>64.98</td><td>---</td><td>---</td><td>Peak</td></tr></table>											Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	3280.00	51.65	74.00	-22.35	77.57	31.75	6.61	64.28	293	360	Peak	2	4924.00	59.96	74.00	-14.04	80.48	35.73	8.57	64.82	134	217	Peak	3	4924.00	49.47	54.00	-4.53	69.99	35.73	8.57	64.82	134	217	Average	4	7386.00	45.80	74.00	-28.20	63.79	36.81	10.18	64.98	---	---	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>3280.00</td><td>52.42</td><td>74.00</td><td>-21.58</td><td>78.34</td><td>31.75</td><td>6.61</td><td>64.28</td><td>246</td><td>308</td><td>Peak</td></tr><tr><td>2</td><td>4924.00</td><td>59.73</td><td>74.00</td><td>-14.27</td><td>80.25</td><td>35.73</td><td>8.57</td><td>64.82</td><td>100</td><td>302</td><td>Peak</td></tr><tr><td>3</td><td>4924.00</td><td>50.67</td><td>54.00</td><td>-3.33</td><td>71.19</td><td>35.73</td><td>8.57</td><td>64.82</td><td>100</td><td>302</td><td>Average</td></tr><tr><td>4</td><td>7386.00</td><td>46.24</td><td>74.00</td><td>-27.76</td><td>64.23</td><td>36.81</td><td>10.18</td><td>64.98</td><td>---</td><td>---</td><td>Peak</td></tr></table>											Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	3280.00	52.42	74.00	-21.58	78.34	31.75	6.61	64.28	246	308	Peak	2	4924.00	59.73	74.00	-14.27	80.25	35.73	8.57	64.82	100	302	Peak	3	4924.00	50.67	54.00	-3.33	71.19	35.73	8.57	64.82	100	302	Average	4	7386.00	46.24	74.00	-27.76	64.23	36.81	10.18	64.98	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																																																				
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																		
1	3280.00	51.65	74.00	-22.35	77.57	31.75	6.61	64.28	293	360	Peak																																																																																																																																																																	
2	4924.00	59.96	74.00	-14.04	80.48	35.73	8.57	64.82	134	217	Peak																																																																																																																																																																	
3	4924.00	49.47	54.00	-4.53	69.99	35.73	8.57	64.82	134	217	Average																																																																																																																																																																	
4	7386.00	45.80	74.00	-28.20	63.79	36.81	10.18	64.98	---	---	Peak																																																																																																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																			
1	3280.00	52.42	74.00	-21.58	78.34	31.75	6.61	64.28	246	308	Peak																																																																																																																																																																	
2	4924.00	59.73	74.00	-14.27	80.25	35.73	8.57	64.82	100	302	Peak																																																																																																																																																																	
3	4924.00	50.67	54.00	-3.33	71.19	35.73	8.57	64.82	100	302	Average																																																																																																																																																																	
4	7386.00	46.24	74.00	-27.76	64.23	36.81	10.18	64.98	---	---	Peak																																																																																																																																																																	

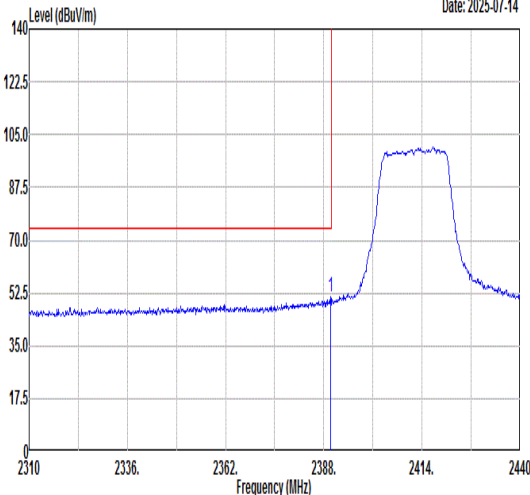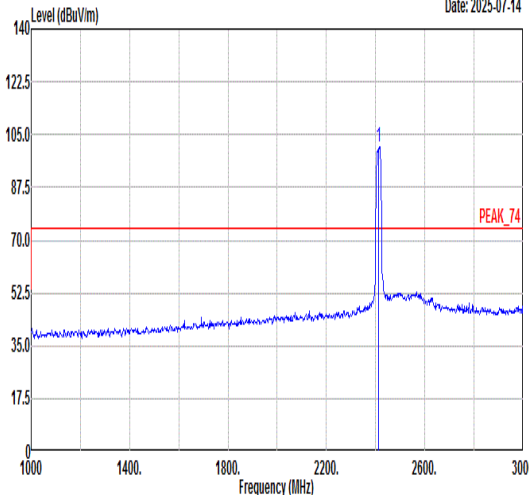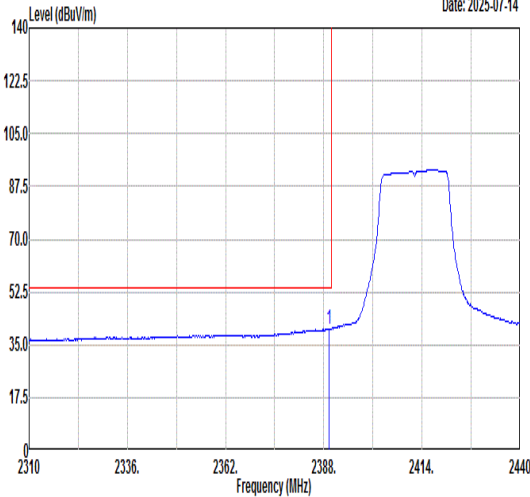
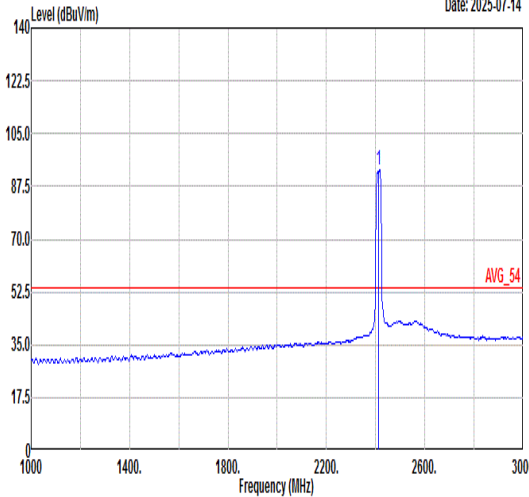


		13																																																																																							
Mode		Band Edge																																																																																							
		2400-2483.5_802.11n HT20_CH01_2412MHz																																																																																							
ANT		SISO																																																																																							
Pol.		Horizontal					Fundamental																																																																																		
Peak	Level (dBuV/m) Date: 2025-07-14  Frequency (MHz)					Level (dBuV/m) Date: 2025-07-14  Frequency (MHz)																																																																																			
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2389.82</td><td>51.17</td><td>74.00</td><td>-22.83</td><td>46.64</td><td>33.31</td><td>5.36</td><td>34.14</td><td>111</td><td>120 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2389.82	51.17	74.00	-22.83	46.64	33.31	5.36	34.14	111	120 PEAK	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2412.00</td><td>101.12</td><td>-----</td><td>-----</td><td>96.47</td><td>33.39</td><td>5.39</td><td>34.13</td><td>111</td><td>120 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2412.00	101.12	-----	-----	96.47	33.39	5.39	34.13	111
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																
1 2389.82	51.17	74.00	-22.83	46.64	33.31	5.36	34.14	111	120 PEAK																																																																																
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																
1 2412.00	101.12	-----	-----	96.47	33.39	5.39	34.13	111	120 PEAK																																																																																
Avg	Level (dBuV/m) Date: 2025-07-14  Frequency (MHz)					Level (dBuV/m) Date: 2025-07-14  Frequency (MHz)																																																																																			
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2389.43</td><td>40.22</td><td>54.00</td><td>-13.78</td><td>35.69</td><td>33.31</td><td>5.36</td><td>34.14</td><td>111</td><td>120 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2389.43	40.22	54.00	-13.78	35.69	33.31	5.36	34.14	111	120 AVERAGE	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2412.00</td><td>93.07</td><td>-----</td><td>-----</td><td>88.42</td><td>33.39</td><td>5.39</td><td>34.13</td><td>111</td><td>120 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2412.00	93.07	-----	-----	88.42	33.39	5.39	34.13	111
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																
1 2389.43	40.22	54.00	-13.78	35.69	33.31	5.36	34.14	111	120 AVERAGE																																																																																
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																
1 2412.00	93.07	-----	-----	88.42	33.39	5.39	34.13	111	120 AVERAGE																																																																																

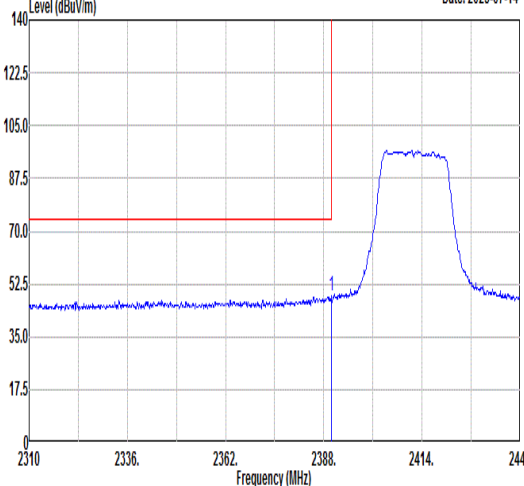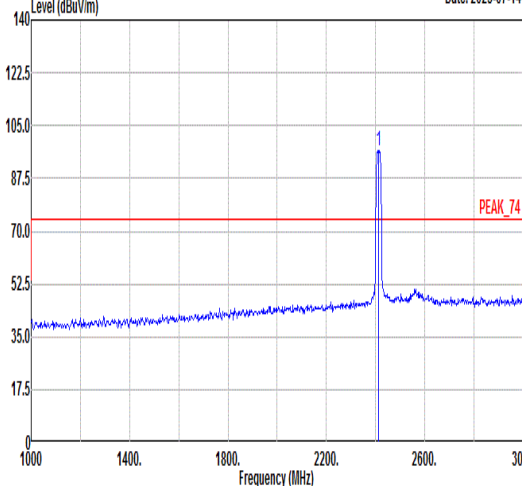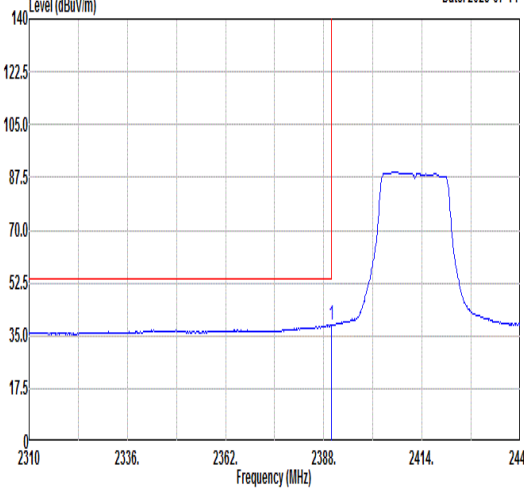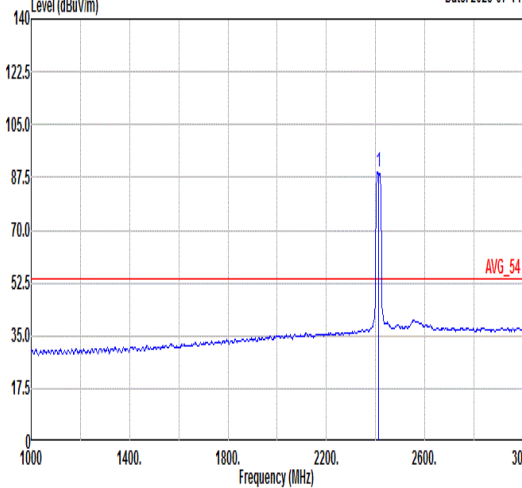

		13																																																																																							
Mode		Band Edge																																																																																							
		2400-2483.5_802.11n HT20_CH01_2412MHz																																																																																							
ANT		SISO																																																																																							
Pol.		Vertical					Fundamental																																																																																		
Peak	Level (dBuV/m) Date: 2025-07-14 					Level (dBuV/m) Date: 2025-07-14 																																																																																			
	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2389.95</td><td>48.68</td><td>74.00</td><td>-25.32</td><td>44.15</td><td>33.31</td><td>5.36</td><td>34.14</td><td>303</td><td>306 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2389.95	48.68	74.00	-25.32	44.15	33.31	5.36	34.14	303	306 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2412.00</td><td>96.79</td><td>-----</td><td>-----</td><td>92.18</td><td>33.37</td><td>5.38</td><td>34.14</td><td>303</td><td>306 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2412.00	96.79	-----	-----	92.18	33.37	5.38	34.14	303
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																
1 2389.95	48.68	74.00	-25.32	44.15	33.31	5.36	34.14	303	306 PEAK																																																																																
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																
1 2412.00	96.79	-----	-----	92.18	33.37	5.38	34.14	303	306 PEAK																																																																																
Avg	Level (dBuV/m) Date: 2025-07-14 					Level (dBuV/m) Date: 2025-07-14 																																																																																			
	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2389.95</td><td>38.52</td><td>54.00</td><td>-15.48</td><td>33.99</td><td>33.31</td><td>5.36</td><td>34.14</td><td>303</td><td>306 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2389.95	38.52	54.00	-15.48	33.99	33.31	5.36	34.14	303	306 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2412.00</td><td>89.33</td><td>-----</td><td>-----</td><td>84.74</td><td>33.36</td><td>5.37</td><td>34.14</td><td>303</td><td>306 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2412.00	89.33	-----	-----	84.74	33.36	5.37	34.14	303
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																
1 2389.95	38.52	54.00	-15.48	33.99	33.31	5.36	34.14	303	306 AVERAGE																																																																																
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																
1 2412.00	89.33	-----	-----	84.74	33.36	5.37	34.14	303	306 AVERAGE																																																																																

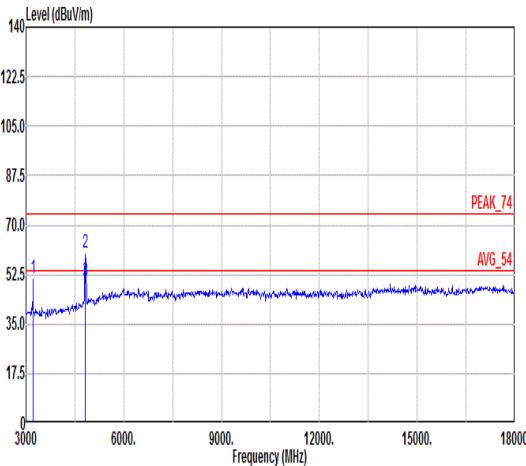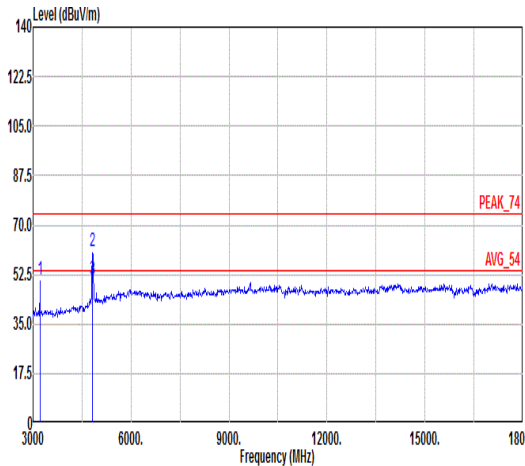

Mode	13																																																																																																																																									
	Harmonic																																																																																																																																									
	2400-2483.5_802.11n HT20_CH01_2412MHz																																																																																																																																									
ANT	SISO																																																																																																																																									
Pol.	Horizontal						Vertical																																																																																																																																			
Peak Avg																																																																																																																																										
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>3210.00</td><td>51.25</td><td>74.00</td><td>-22.75</td><td>77.20</td><td>31.64</td><td>6.62</td><td>64.21</td><td>305</td><td>360</td><td>Peak</td></tr><tr><td>2</td><td>4824.00</td><td>60.06</td><td>74.00</td><td>-13.94</td><td>80.51</td><td>35.51</td><td>8.88</td><td>64.84</td><td>100</td><td>218</td><td>Peak</td></tr><tr><td>3</td><td>4824.00</td><td>50.02</td><td>54.00</td><td>-3.98</td><td>70.47</td><td>35.51</td><td>8.88</td><td>64.84</td><td>100</td><td>218</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	3210.00	51.25	74.00	-22.75	77.20	31.64	6.62	64.21	305	360	Peak	2	4824.00	60.06	74.00	-13.94	80.51	35.51	8.88	64.84	100	218	Peak	3	4824.00	50.02	54.00	-3.98	70.47	35.51	8.88	64.84	100	218	Average	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>3210.00</td><td>50.61</td><td>74.00</td><td>-23.39</td><td>76.56</td><td>31.64</td><td>6.62</td><td>64.21</td><td>308</td><td>306</td><td>Peak</td></tr><tr><td>2</td><td>4824.00</td><td>60.91</td><td>74.00</td><td>-13.09</td><td>81.36</td><td>35.51</td><td>8.88</td><td>64.84</td><td>100</td><td>303</td><td>Peak</td></tr><tr><td>3</td><td>4824.00</td><td>50.80</td><td>54.00</td><td>-3.20</td><td>71.25</td><td>35.51</td><td>8.88</td><td>64.84</td><td>100</td><td>303</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	3210.00	50.61	74.00	-23.39	76.56	31.64	6.62	64.21	308	306	Peak	2	4824.00	60.91	74.00	-13.09	81.36	35.51	8.88	64.84	100	303	Peak	3	4824.00	50.80	54.00	-3.20	71.25	35.51	8.88	64.84	100	303	Average
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																		
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																																																		
1	3210.00	51.25	74.00	-22.75	77.20	31.64	6.62	64.21	305	360	Peak																																																																																																																															
2	4824.00	60.06	74.00	-13.94	80.51	35.51	8.88	64.84	100	218	Peak																																																																																																																															
3	4824.00	50.02	54.00	-3.98	70.47	35.51	8.88	64.84	100	218	Average																																																																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																																																		
1	3210.00	50.61	74.00	-23.39	76.56	31.64	6.62	64.21	308	306	Peak																																																																																																																															
2	4824.00	60.91	74.00	-13.09	81.36	35.51	8.88	64.84	100	303	Peak																																																																																																																															
3	4824.00	50.80	54.00	-3.20	71.25	35.51	8.88	64.84	100	303	Average																																																																																																																															



		14																																																																																
Mode		Band Edge - L																																																																																
		2400-2483.5_802.11n HT20_CH06_2437MHz																																																																																
ANT		SISO																																																																																
Pol.		Horizontal					Fundamental																																																																											
Peak	Level (dBuV/m) Date: 2025-07-14 Frequency (MHz)					Level (dBuV/m) Date: 2025-07-14 Frequency (MHz)																																																																												
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2365.88	49.11	74.00	-24.89	44.67	33.25	5.34	34.15	159	121 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2437.00</td><td>100.77</td><td>-----</td><td>-----</td><td>96.03</td><td>33.45</td><td>5.41</td><td>34.12</td><td>159</td><td>121 PEAK</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2437.00	100.77	-----	-----	96.03	33.45	5.41	34.12	159
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																									
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2365.88	49.11	74.00	-24.89	44.67	33.25	5.34	34.15	159	121 PEAK																																																																								
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																									
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2437.00	100.77	-----	-----	96.03	33.45	5.41	34.12	159	121 PEAK																																																																								
Avg	Level (dBuV/m) Date: 2025-07-14 Frequency (MHz)					Level (dBuV/m) Date: 2025-07-14 Frequency (MHz)																																																																												
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2388.36	38.67	54.00	-15.33	34.14	33.31	5.36	34.14	159	121 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2437.00</td><td>92.68</td><td>-----</td><td>-----</td><td>87.94</td><td>33.45</td><td>5.41</td><td>34.12</td><td>159</td><td>121 AVERAGE</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2437.00	92.68	-----	-----	87.94	33.45	5.41	34.12	159
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																									
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2388.36	38.67	54.00	-15.33	34.14	33.31	5.36	34.14	159	121 AVERAGE																																																																								
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																									
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2437.00	92.68	-----	-----	87.94	33.45	5.41	34.12	159	121 AVERAGE																																																																								





Mode	14																																																							
	Band Edge - R																																																							
	2400-2483.5_802.11n HT20_CH06_2437MHz																																																							
ANT	SISO																																																							
Pol.	Horizontal	Fundamental																																																						
Peak	Date: 2025-07-14 PEAK_BE_74 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th></tr><tr><td>1</td><td>2489.42</td><td>52.82</td><td>74.00</td><td>-21.18</td><td>47.88</td><td>33.57</td><td>5.47</td><td>34.10</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>159</td><td>121</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	1	2489.42	52.82	74.00	-21.18	47.88	33.57	5.47	34.10								159	121									PEAK	Blank
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark																																																
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm																																																
1	2489.42	52.82	74.00	-21.18	47.88	33.57	5.47	34.10																																																
							159	121																																																
								PEAK																																																
Avg	Date: 2025-07-14 AVG_BE_54 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th></tr><tr><td>1</td><td>2488.98</td><td>42.56</td><td>54.00</td><td>-11.44</td><td>37.62</td><td>33.57</td><td>5.47</td><td>34.10</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>159</td><td>121</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	1	2488.98	42.56	54.00	-11.44	37.62	33.57	5.47	34.10								159	121									AVERAGE	Blank
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark																																																
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm																																																
1	2488.98	42.56	54.00	-11.44	37.62	33.57	5.47	34.10																																																
							159	121																																																
								AVERAGE																																																







		14																																																																																		
Mode		Band Edge - L																																																																																		
		2400-2483.5_802.11n HT20_CH06_2437MHz																																																																																		
ANT		SISO																																																																																		
Pol.		Vertical					Fundamental																																																																													
Peak																																																																																				
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2383.91	47.47	74.00	-26.53	42.97	33.30	5.35	34.15	337 306 PEAK		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	97.09	-----	-----	92.36	33.44	5.41	34.12	337 306 PEAK				
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																											
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2383.91	47.47	74.00	-26.53	42.97	33.30	5.35	34.15	337 306 PEAK																																																																											
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																											
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2437.00	97.09	-----	-----	92.36	33.44	5.41	34.12	337 306 PEAK																																																																											
Avg																																																																																				
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2388.99	37.66	54.00	-16.34	33.13	33.31	5.36	34.14	337 306 AVERAGE		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	89.88	-----	-----	85.14	33.45	5.41	34.12	337 306 AVERAGE				
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																											
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2388.99	37.66	54.00	-16.34	33.13	33.31	5.36	34.14	337 306 AVERAGE																																																																											
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																											
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2437.00	89.88	-----	-----	85.14	33.45	5.41	34.12	337 306 AVERAGE																																																																											

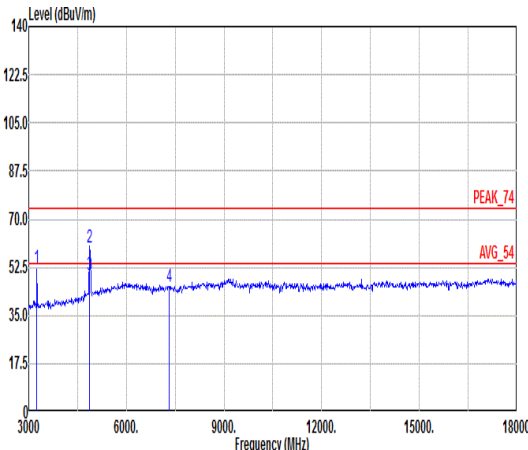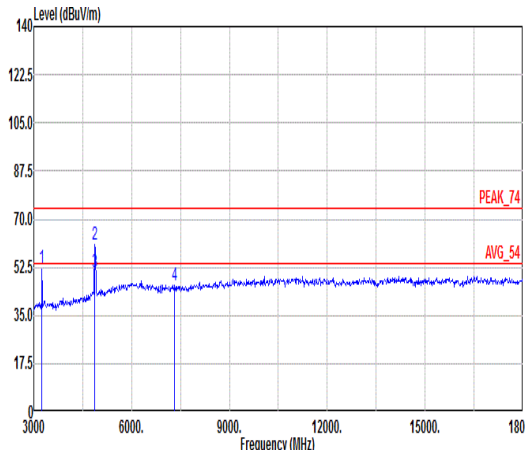

Mode	14																																																																																																																																																																			
	Harmonic																																																																																																																																																																			
	2400-2483.5_802.11n HT20_CH06_2437MHz																																																																																																																																																																			
ANT	SISO																																																																																																																																																																			
Pol.	Horizontal						Vertical																																																																																																																																																													
Peak Avg																																																																																																																																																																				
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>3250.00</td><td>52.21</td><td>74.00</td><td>-21.79</td><td>78.15</td><td>31.70</td><td>6.61</td><td>64.25</td><td>297</td><td>360</td><td>Peak</td></tr><tr><td>2</td><td>4874.00</td><td>59.93</td><td>74.00</td><td>-14.07</td><td>80.42</td><td>35.62</td><td>8.72</td><td>64.83</td><td>100</td><td>218</td><td>Peak</td></tr><tr><td>3</td><td>4874.00</td><td>49.79</td><td>54.00</td><td>-4.21</td><td>70.28</td><td>35.62</td><td>8.72</td><td>64.83</td><td>100</td><td>218</td><td>Average</td></tr><tr><td>4</td><td>7311.00</td><td>45.65</td><td>74.00</td><td>-28.35</td><td>63.73</td><td>36.75</td><td>10.18</td><td>65.01</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	3250.00	52.21	74.00	-21.79	78.15	31.70	6.61	64.25	297	360	Peak	2	4874.00	59.93	74.00	-14.07	80.42	35.62	8.72	64.83	100	218	Peak	3	4874.00	49.79	54.00	-4.21	70.28	35.62	8.72	64.83	100	218	Average	4	7311.00	45.65	74.00	-28.35	63.73	36.75	10.18	65.01	---	---	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>3250.00</td><td>52.05</td><td>74.00</td><td>-21.95</td><td>77.99</td><td>31.70</td><td>6.61</td><td>64.25</td><td>289</td><td>311</td><td>Peak</td></tr><tr><td>2</td><td>4874.00</td><td>60.66</td><td>74.00</td><td>-13.34</td><td>81.15</td><td>35.62</td><td>8.72</td><td>64.83</td><td>100</td><td>301</td><td>Peak</td></tr><tr><td>3</td><td>4874.00</td><td>50.75</td><td>54.00</td><td>-3.25</td><td>71.24</td><td>35.62</td><td>8.72</td><td>64.83</td><td>100</td><td>301</td><td>Average</td></tr><tr><td>4</td><td>7311.00</td><td>45.93</td><td>74.00</td><td>-28.07</td><td>64.01</td><td>36.75</td><td>10.18</td><td>65.01</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	3250.00	52.05	74.00	-21.95	77.99	31.70	6.61	64.25	289	311	Peak	2	4874.00	60.66	74.00	-13.34	81.15	35.62	8.72	64.83	100	301	Peak	3	4874.00	50.75	54.00	-3.25	71.24	35.62	8.72	64.83	100	301	Average	4	7311.00	45.93	74.00	-28.07	64.01	36.75	10.18	65.01	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																																												
	Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																										
1	3250.00	52.21	74.00	-21.79	78.15	31.70	6.61	64.25	297	360	Peak																																																																																																																																																									
2	4874.00	59.93	74.00	-14.07	80.42	35.62	8.72	64.83	100	218	Peak																																																																																																																																																									
3	4874.00	49.79	54.00	-4.21	70.28	35.62	8.72	64.83	100	218	Average																																																																																																																																																									
4	7311.00	45.65	74.00	-28.35	63.73	36.75	10.18	65.01	---	---	Peak																																																																																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																											
1	3250.00	52.05	74.00	-21.95	77.99	31.70	6.61	64.25	289	311	Peak																																																																																																																																																									
2	4874.00	60.66	74.00	-13.34	81.15	35.62	8.72	64.83	100	301	Peak																																																																																																																																																									
3	4874.00	50.75	54.00	-3.25	71.24	35.62	8.72	64.83	100	301	Average																																																																																																																																																									
4	7311.00	45.93	74.00	-28.07	64.01	36.75	10.18	65.01	---	---	Peak																																																																																																																																																									

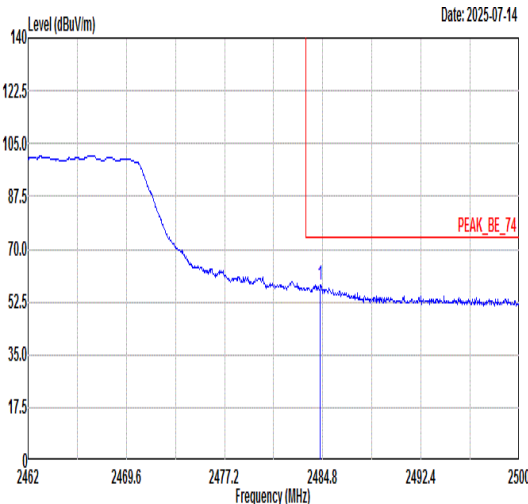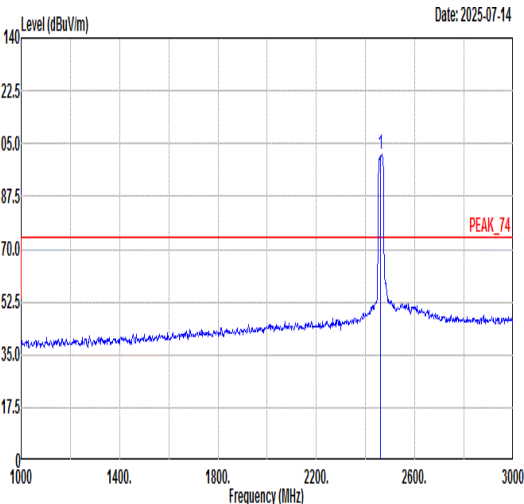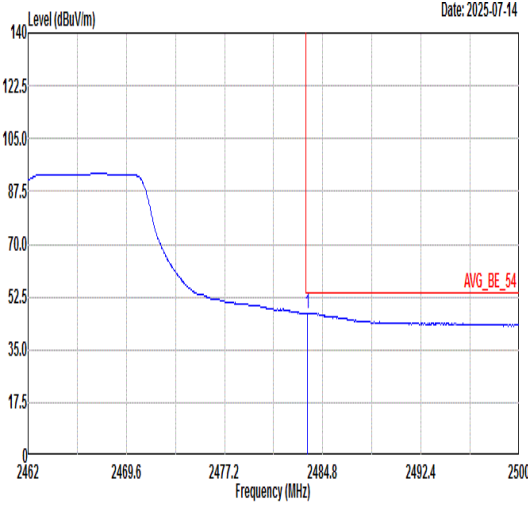
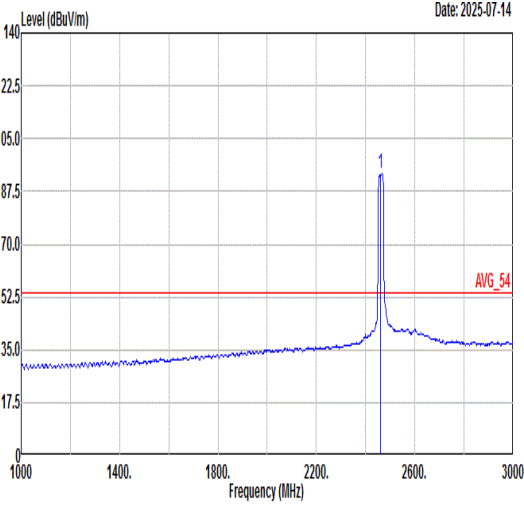


		15																																																																																							
Mode	Band Edge																																																																																								
	2400-2483.5_802.11n HT20_CH11_2462MHz																																																																																								
ANT	SISO																																																																																								
Pol.	Horizontal					Fundamental																																																																																			
Peak																																																																																									
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2484.61</td><td>58.20</td><td>74.00</td><td>-15.80</td><td>53.29</td><td>33.56</td><td>5.46</td><td>34.11</td><td>180 122 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2484.61	58.20	74.00	-15.80	53.29	33.56	5.46	34.11	180 122 PEAK	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>101.41</td><td>-----</td><td>-----</td><td>96.57</td><td>33.51</td><td>5.44</td><td>34.11</td><td>180 122 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	101.41	-----	-----	96.57	33.51	5.44	34.11
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2484.61	58.20	74.00	-15.80	53.29	33.56	5.46	34.11	180 122 PEAK																																																																																
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2462.00	101.41	-----	-----	96.57	33.51	5.44	34.11	180 122 PEAK																																																																																
Avg																																																																																									
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.62</td><td>47.20</td><td>54.00</td><td>-6.80</td><td>42.29</td><td>33.56</td><td>5.46</td><td>34.11</td><td>180 122 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2483.62	47.20	54.00	-6.80	42.29	33.56	5.46	34.11	180 122 AVERAGE	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>93.53</td><td>-----</td><td>-----</td><td>88.68</td><td>33.52</td><td>5.44</td><td>34.11</td><td>180 122 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	93.53	-----	-----	88.68	33.52	5.44	34.11
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2483.62	47.20	54.00	-6.80	42.29	33.56	5.46	34.11	180 122 AVERAGE																																																																																
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2462.00	93.53	-----	-----	88.68	33.52	5.44	34.11	180 122 AVERAGE																																																																																







Mode	15																																																																																	
	Band Edge																																																																																	
	2400-2483.5_802.11n HT20_CH11_2462MHz																																																																																	
ANT	SISO																																																																																	
Pol.	Vertical	Fundamental																																																																																
Peak	Level (dBuV/m) Date: 2025-07-14 PEAK_BE_74 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2484.23</td><td>51.90</td><td>74.00</td><td>-22.10</td><td>46.99</td><td>33.56</td><td>5.46</td><td>34.11</td><td>374 285 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2484.23	51.90	74.00	-22.10	46.99	33.56	5.46	34.11	374 285 PEAK	Level (dBuV/m) Date: 2025-07-14 PEAK_74 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>98.25</td><td>-----</td><td>-----</td><td>93.46</td><td>33.48</td><td>5.43</td><td>34.12</td><td>374 285 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	98.25	-----	-----	93.46	33.48	5.43	34.12	374 285 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																									
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2484.23	51.90	74.00	-22.10	46.99	33.56	5.46	34.11	374 285 PEAK																																																																									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2462.00	98.25	-----	-----	93.46	33.48	5.43	34.12	374 285 PEAK																																																																									
Avg	Level (dBuV/m) Date: 2025-07-14 AVG_BE_54 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.51</td><td>41.49</td><td>54.00</td><td>-12.51</td><td>36.58</td><td>33.56</td><td>5.46</td><td>34.11</td><td>374 285 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2483.51	41.49	54.00	-12.51	36.58	33.56	5.46	34.11	374 285 AVERAGE	Level (dBuV/m) Date: 2025-07-14 AVG_54 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>90.57</td><td>-----</td><td>-----</td><td>85.77</td><td>33.49</td><td>5.43</td><td>34.12</td><td>374 285 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	90.57	-----	-----	85.77	33.49	5.43	34.12	374 285 AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2483.51	41.49	54.00	-12.51	36.58	33.56	5.46	34.11	374 285 AVERAGE																																																																									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2462.00	90.57	-----	-----	85.77	33.49	5.43	34.12	374 285 AVERAGE																																																																									



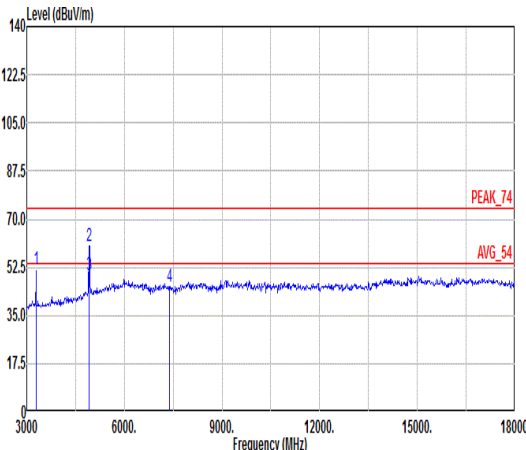
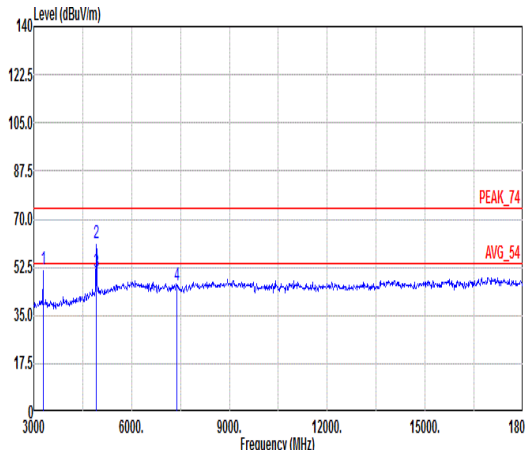


Mode	15																																																																																																																																																																																	
	Harmonic																																																																																																																																																																																	
	2400-2483.5_802.11n HT20_CH11_2462MHz																																																																																																																																																																																	
ANT	SISO																																																																																																																																																																																	
Pol.	Horizontal						Vertical																																																																																																																																																																											
Peak Avg																																																																																																																																																																																		
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>3280.00</td><td>51.88</td><td>74.00</td><td>-22.12</td><td>77.80</td><td>31.75</td><td>6.61</td><td>64.28</td><td>279</td><td>360</td><td>Peak</td></tr><tr><td>2</td><td>4924.00</td><td>60.11</td><td>74.00</td><td>-13.89</td><td>80.63</td><td>35.73</td><td>8.57</td><td>64.82</td><td>100</td><td>218</td><td>Peak</td></tr><tr><td>3</td><td>4924.00</td><td>49.74</td><td>54.00</td><td>-4.26</td><td>70.26</td><td>35.73</td><td>8.57</td><td>64.82</td><td>100</td><td>218</td><td>Average</td></tr><tr><td>4</td><td>7386.00</td><td>45.21</td><td>74.00</td><td>-28.79</td><td>63.20</td><td>36.81</td><td>10.18</td><td>64.98</td><td>---</td><td>---</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	3280.00	51.88	74.00	-22.12	77.80	31.75	6.61	64.28	279	360	Peak	2	4924.00	60.11	74.00	-13.89	80.63	35.73	8.57	64.82	100	218	Peak	3	4924.00	49.74	54.00	-4.26	70.26	35.73	8.57	64.82	100	218	Average	4	7386.00	45.21	74.00	-28.79	63.20	36.81	10.18	64.98	---	---	Peak	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>3280.00</td><td>51.68</td><td>74.00</td><td>-22.32</td><td>77.60</td><td>31.75</td><td>6.61</td><td>64.28</td><td>297</td><td>310</td><td>Peak</td></tr><tr><td>2</td><td>4924.00</td><td>61.09</td><td>74.00</td><td>-12.91</td><td>81.61</td><td>35.73</td><td>8.57</td><td>64.82</td><td>100</td><td>301</td><td>Peak</td></tr><tr><td>3</td><td>4924.00</td><td>50.87</td><td>54.00</td><td>-3.13</td><td>71.39</td><td>35.73</td><td>8.57</td><td>64.82</td><td>100</td><td>301</td><td>Average</td></tr><tr><td>4</td><td>7386.00</td><td>45.77</td><td>74.00</td><td>-28.23</td><td>63.76</td><td>36.81</td><td>10.18</td><td>64.98</td><td>---</td><td>---</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	3280.00	51.68	74.00	-22.32	77.60	31.75	6.61	64.28	297	310	Peak	2	4924.00	61.09	74.00	-12.91	81.61	35.73	8.57	64.82	100	301	Peak	3	4924.00	50.87	54.00	-3.13	71.39	35.73	8.57	64.82	100	301	Average	4	7386.00	45.77	74.00	-28.23	63.76	36.81	10.18	64.98	---	---	Peak
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																																																						
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																								
1	3280.00	51.88	74.00	-22.12	77.80	31.75	6.61	64.28	279	360	Peak																																																																																																																																																																							
2	4924.00	60.11	74.00	-13.89	80.63	35.73	8.57	64.82	100	218	Peak																																																																																																																																																																							
3	4924.00	49.74	54.00	-4.26	70.26	35.73	8.57	64.82	100	218	Average																																																																																																																																																																							
4	7386.00	45.21	74.00	-28.79	63.20	36.81	10.18	64.98	---	---	Peak																																																																																																																																																																							
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																									
1	3280.00	51.68	74.00	-22.32	77.60	31.75	6.61	64.28	297	310	Peak																																																																																																																																																																							
2	4924.00	61.09	74.00	-12.91	81.61	35.73	8.57	64.82	100	301	Peak																																																																																																																																																																							
3	4924.00	50.87	54.00	-3.13	71.39	35.73	8.57	64.82	100	301	Average																																																																																																																																																																							
4	7386.00	45.77	74.00	-28.23	63.76	36.81	10.18	64.98	---	---	Peak																																																																																																																																																																							

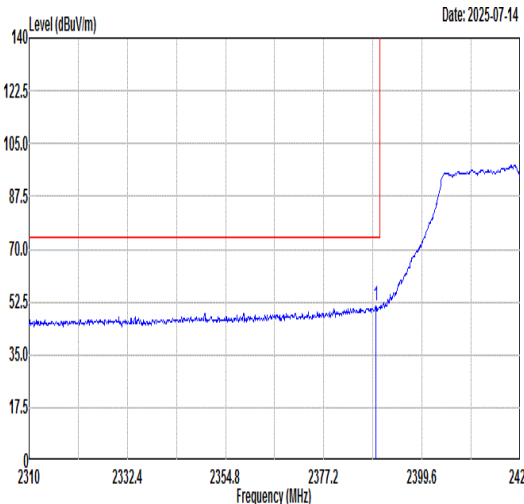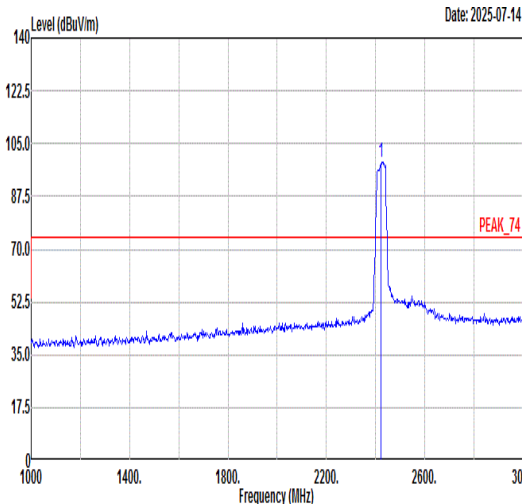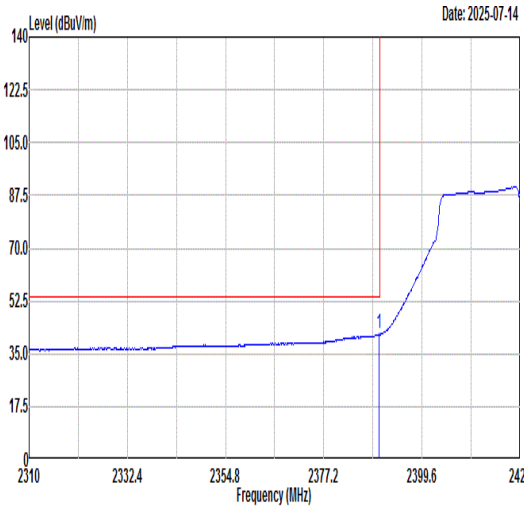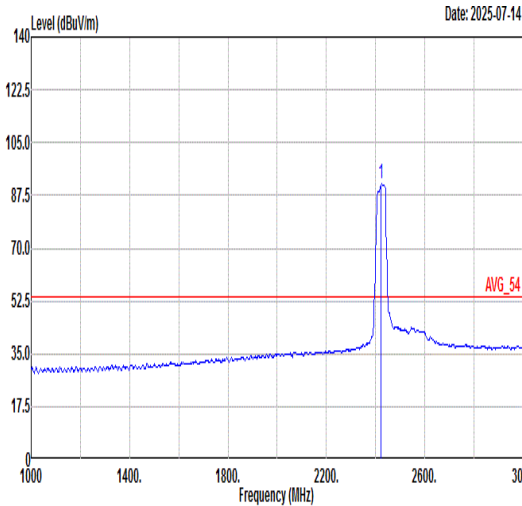

		16																																																																																
Mode		Band Edge - L																																																																																
		2400-2483.5_802.11n HT40_CH03_2422MHz																																																																																
ANT		SISO																																																																																
Pol.		Horizontal					Fundamental																																																																											
Peak	 Level (dBuV/m) vs Frequency (MHz) for Horizontal polarization. The y-axis ranges from 0 to 140 dBuV/m, and the x-axis ranges from 2310 to 2422 MHz. A red limit line is at 74.00 dB. The blue trace shows a rising signal starting around 2377.2 MHz, reaching approximately 90 dBuV/m at 2422 MHz.					 Level (dBuV/m) vs Frequency (MHz) for Fundamental polarization. The y-axis ranges from 0 to 140 dBuV/m, and the x-axis ranges from 1000 to 3000 MHz. A red limit line is at 74.00 dB. The blue trace shows a sharp peak at 2422.00 MHz, reaching approximately 98.94 dBuV/m.																																																																												
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2389.07	51.40	74.00	-22.60	46.87	33.31	5.36	34.14	100	122 PEAK	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2422.00</td><td>98.94</td><td>-----</td><td>-----</td><td>94.26</td><td>33.41</td><td>5.40</td><td>34.13</td><td>100</td><td>122 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2422.00	98.94	-----	-----	94.26	33.41	5.40	34.13	100
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2389.07	51.40	74.00	-22.60	46.87	33.31	5.36	34.14	100	122 PEAK																																																																								
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2422.00	98.94	-----	-----	94.26	33.41	5.40	34.13	100	122 PEAK																																																																								
Avg	 Level (dBuV/m) vs Frequency (MHz) for Horizontal polarization. The y-axis ranges from 0 to 140 dBuV/m, and the x-axis ranges from 2310 to 2422 MHz. A red limit line is at 54.00 dB. The blue trace shows a rising signal starting around 2377.2 MHz, reaching approximately 80 dBuV/m at 2422 MHz.					 Level (dBuV/m) vs Frequency (MHz) for Fundamental polarization. The y-axis ranges from 0 to 140 dBuV/m, and the x-axis ranges from 1000 to 3000 MHz. A red limit line is at 54.00 dB. The blue trace shows a sharp peak at 2422.00 MHz, reaching approximately 91.37 dBuV/m.																																																																												
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2389.86	41.51	54.00	-12.49	36.98	33.31	5.36	34.14	100	122 AVERAGE	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2422.00</td><td>91.37</td><td>-----</td><td>-----</td><td>86.70</td><td>33.41</td><td>5.39</td><td>34.13</td><td>100</td><td>122 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2422.00	91.37	-----	-----	86.70	33.41	5.39	34.13	100
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2389.86	41.51	54.00	-12.49	36.98	33.31	5.36	34.14	100	122 AVERAGE																																																																								
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2422.00	91.37	-----	-----	86.70	33.41	5.39	34.13	100	122 AVERAGE																																																																								

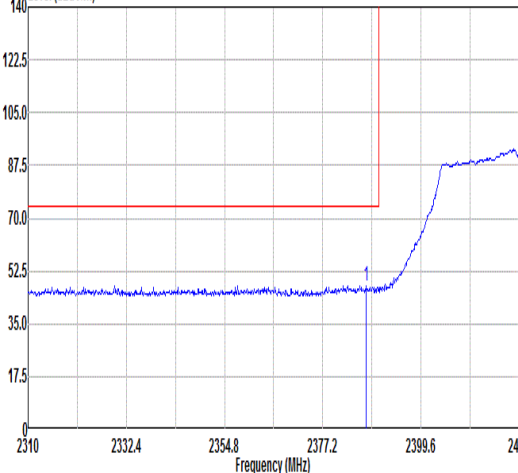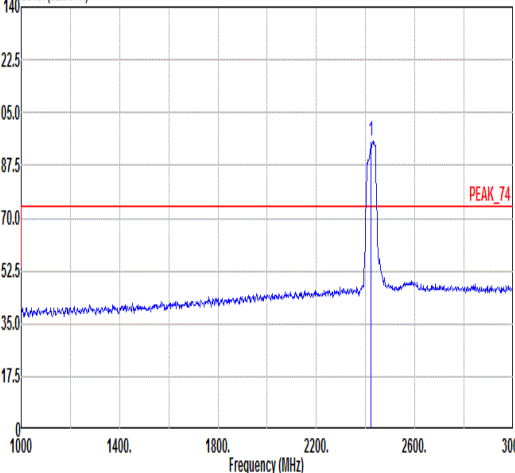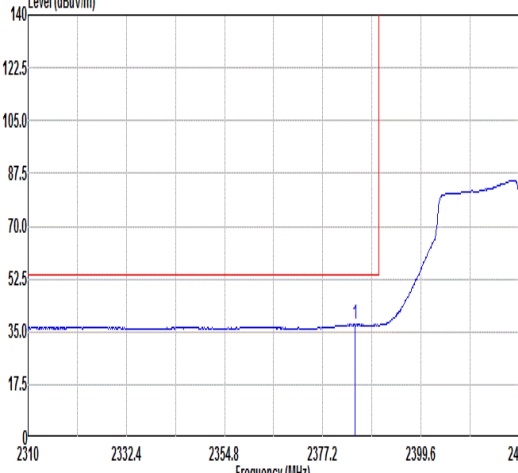
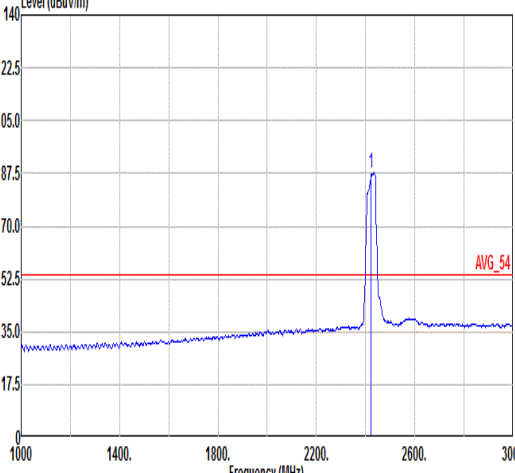


		16																																																																																								
Mode		Band Edge - L																																																																																								
		2400-2483.5_802.11n HT40_CH03_2422MHz																																																																																								
ANT		SISO																																																																																								
Pol.		Vertical					Fundamental																																																																																			
Peak	Level (dBuV/m) Date: 2025-07-14  2310 2332.4 2354.8 2377.2 2399.6 2422 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2387.17</td><td>47.62</td><td>74.00</td><td>-26.38</td><td>43.10</td><td>33.31</td><td>5.36</td><td>34.15</td><td>376 306 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2387.17	47.62	74.00	-26.38	43.10	33.31	5.36	34.15	376 306 PEAK	Level (dBuV/m) Date: 2025-07-14  1000 1400 1800 2200 2600 3000 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2422.00</td><td>95.49</td><td>-----</td><td>-----</td><td>90.80</td><td>33.42</td><td>5.40</td><td>34.13</td><td>376 306 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2422.00	95.49	-----	-----	90.80	33.42	5.40	34.13	376 306 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2387.17	47.62	74.00	-26.38	43.10	33.31	5.36	34.15	376 306 PEAK																																																																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2422.00	95.49	-----	-----	90.80	33.42	5.40	34.13	376 306 PEAK																																																																																	
Avg	Level (dBuV/m) Date: 2025-07-14  2310 2332.4 2354.8 2377.2 2399.6 2422 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2384.48</td><td>37.43</td><td>54.00</td><td>-16.57</td><td>32.93</td><td>33.30</td><td>5.35</td><td>34.15</td><td>376 306 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2384.48	37.43	54.00	-16.57	32.93	33.30	5.35	34.15	376 306 AVERAGE	Level (dBuV/m) Date: 2025-07-14  1000 1400 1800 2200 2600 3000 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2422.00</td><td>87.74</td><td>-----</td><td>-----</td><td>83.04</td><td>33.43</td><td>5.40</td><td>34.13</td><td>376 306 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2422.00	87.74	-----	-----	83.04	33.43	5.40	34.13	376 306 AVERAGE
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2384.48	37.43	54.00	-16.57	32.93	33.30	5.35	34.15	376 306 AVERAGE																																																																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2422.00	87.74	-----	-----	83.04	33.43	5.40	34.13	376 306 AVERAGE																																																																																	







Mode	16																																	
	Band Edge - R																																	
	2400-2483.5_802.11n HT40_CH03_2422MHz																																	
ANT	SISO																																	
Pol.	Vertical	Fundamental																																
Peak	Date: 2025-07-14 <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th></tr><tr><td>1</td><td>2486.74</td><td>49.21</td><td>74.00</td><td>-24.79</td><td>44.29</td><td>33.57</td><td>5.46</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	1	2486.74	49.21	74.00	-24.79	44.29	33.57	5.46	Blank
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																											
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																											
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm																											
1	2486.74	49.21	74.00	-24.79	44.29	33.57	5.46																											
Avg	Date: 2025-07-14 <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th></tr><tr><td>1</td><td>2495.79</td><td>38.19</td><td>54.00</td><td>-15.81</td><td>33.23</td><td>33.59</td><td>5.47</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	1	2495.79	38.19	54.00	-15.81	33.23	33.59	5.47	Blank
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																											
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																											
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm																											
1	2495.79	38.19	54.00	-15.81	33.23	33.59	5.47																											

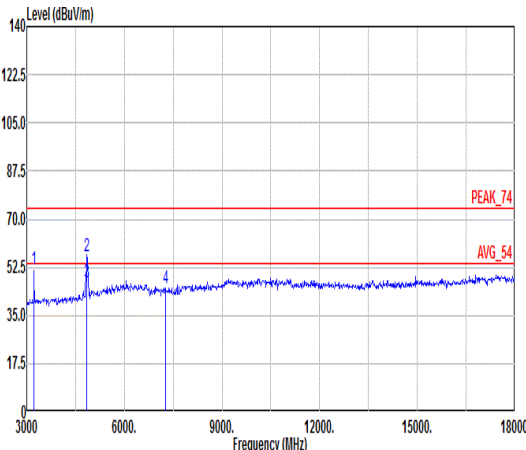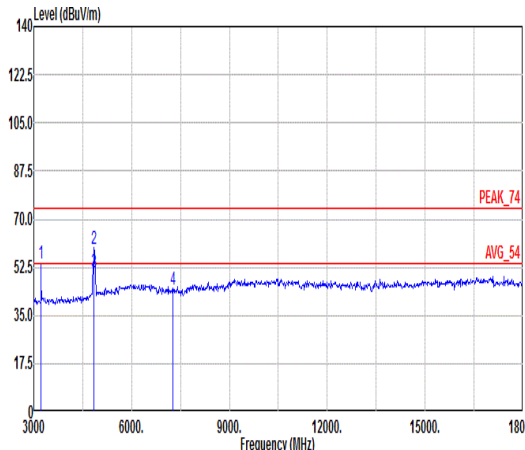

Mode	16																																																																																																																																																																		
	Harmonic																																																																																																																																																																		
	2400-2483.5_802.11n HT40_CH03_2422MHz																																																																																																																																																																		
ANT	SISO																																																																																																																																																																		
Pol.	Horizontal										Vertical																																																																																																																																																								
Peak Avg																																																																																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>3225.00</td><td>51.65</td><td>74.00</td><td>-22.35</td><td>76.25</td><td>33.01</td><td>6.61</td><td>64.22</td><td>300</td><td>360</td><td>Peak</td></tr><tr><td>2</td><td>4844.00</td><td>56.73</td><td>74.00</td><td>-17.27</td><td>77.71</td><td>35.04</td><td>8.81</td><td>64.83</td><td>100</td><td>168</td><td>Peak</td></tr><tr><td>3</td><td>4844.00</td><td>47.08</td><td>54.00</td><td>-6.92</td><td>68.06</td><td>35.04</td><td>8.81</td><td>64.83</td><td>100</td><td>168</td><td>Average</td></tr><tr><td>4</td><td>7266.00</td><td>44.66</td><td>74.00</td><td>-29.34</td><td>63.40</td><td>36.10</td><td>10.18</td><td>65.02</td><td>---</td><td>---</td><td>Peak</td></tr></table>											Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	3225.00	51.65	74.00	-22.35	76.25	33.01	6.61	64.22	300	360	Peak	2	4844.00	56.73	74.00	-17.27	77.71	35.04	8.81	64.83	100	168	Peak	3	4844.00	47.08	54.00	-6.92	68.06	35.04	8.81	64.83	100	168	Average	4	7266.00	44.66	74.00	-29.34	63.40	36.10	10.18	65.02	---	---	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>3225.00</td><td>53.76</td><td>74.00</td><td>-20.24</td><td>78.36</td><td>33.01</td><td>6.61</td><td>64.22</td><td>236</td><td>307</td><td>Peak</td></tr><tr><td>2</td><td>4844.00</td><td>59.21</td><td>74.00</td><td>-14.79</td><td>80.19</td><td>35.04</td><td>8.81</td><td>64.83</td><td>100</td><td>296</td><td>Peak</td></tr><tr><td>3</td><td>4844.00</td><td>50.76</td><td>54.00</td><td>-3.24</td><td>71.74</td><td>35.04</td><td>8.81</td><td>64.83</td><td>100</td><td>296</td><td>Average</td></tr><tr><td>4</td><td>7266.00</td><td>44.63</td><td>74.00</td><td>-29.37</td><td>63.37</td><td>36.10</td><td>10.18</td><td>65.02</td><td>---</td><td>---</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	3225.00	53.76	74.00	-20.24	78.36	33.01	6.61	64.22	236	307	Peak	2	4844.00	59.21	74.00	-14.79	80.19	35.04	8.81	64.83	100	296	Peak	3	4844.00	50.76	54.00	-3.24	71.74	35.04	8.81	64.83	100	296	Average	4	7266.00	44.63	74.00	-29.37	63.37	36.10	10.18	65.02	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																																											
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																									
1	3225.00	51.65	74.00	-22.35	76.25	33.01	6.61	64.22	300	360	Peak																																																																																																																																																								
2	4844.00	56.73	74.00	-17.27	77.71	35.04	8.81	64.83	100	168	Peak																																																																																																																																																								
3	4844.00	47.08	54.00	-6.92	68.06	35.04	8.81	64.83	100	168	Average																																																																																																																																																								
4	7266.00	44.66	74.00	-29.34	63.40	36.10	10.18	65.02	---	---	Peak																																																																																																																																																								
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																										
1	3225.00	53.76	74.00	-20.24	78.36	33.01	6.61	64.22	236	307	Peak																																																																																																																																																								
2	4844.00	59.21	74.00	-14.79	80.19	35.04	8.81	64.83	100	296	Peak																																																																																																																																																								
3	4844.00	50.76	54.00	-3.24	71.74	35.04	8.81	64.83	100	296	Average																																																																																																																																																								
4	7266.00	44.63	74.00	-29.37	63.37	36.10	10.18	65.02	---	---	Peak																																																																																																																																																								

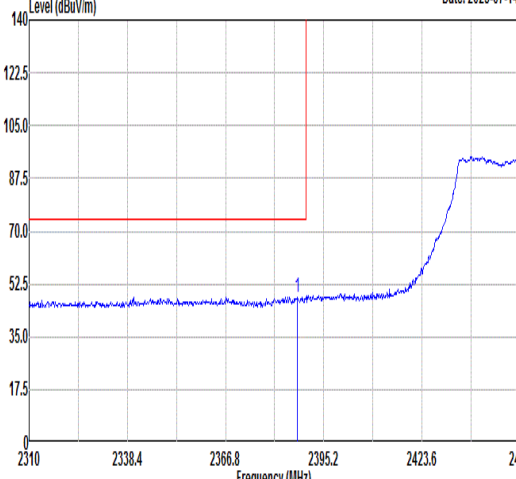
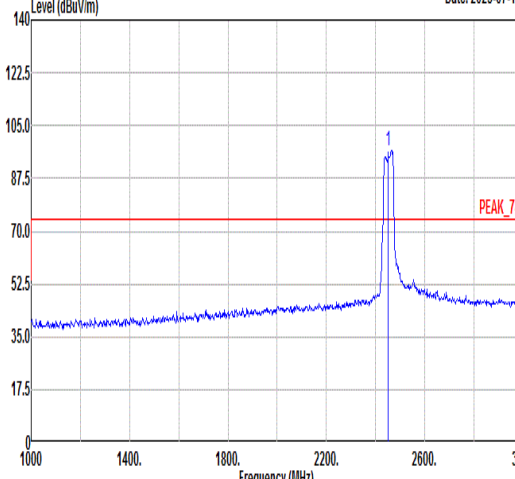
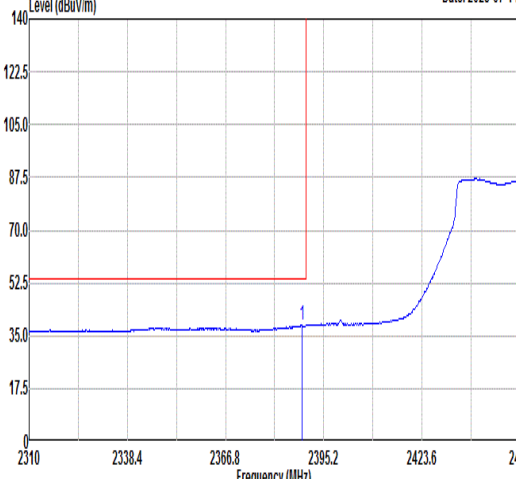
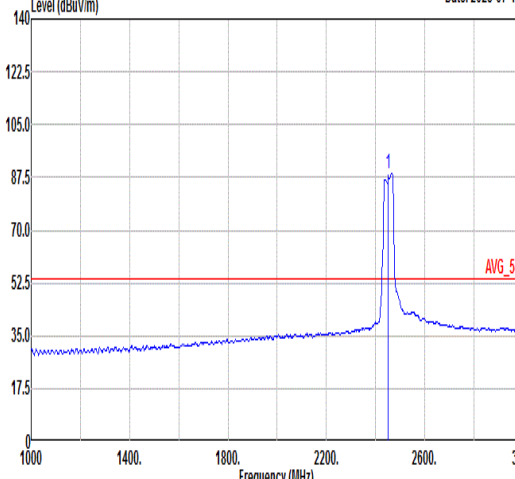


		17																																																																																							
Mode		Band Edge - L																																																																																							
		2400-2483.5_802.11n HT40_CH09_2452MHz																																																																																							
ANT		SISO																																																																																							
Pol.		Horizontal					Fundamental																																																																																		
Peak	Level (dBuV/m) Date: 2025-07-14 					Level (dBuV/m) Date: 2025-07-14 																																																																																			
	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2387.53</td><td>48.27</td><td>74.00</td><td>-25.73</td><td>43.74</td><td>33.31</td><td>5.36</td><td>34.14</td><td>177 121 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2387.53	48.27	74.00	-25.73	43.74	33.31	5.36	34.14	177 121 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2452.00</td><td>96.72</td><td>-----</td><td>-----</td><td>91.88</td><td>33.51</td><td>5.44</td><td>34.11</td><td>177 121 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2452.00	96.72	-----	-----	91.88	33.51	5.44	34.11
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2387.53	48.27	74.00	-25.73	43.74	33.31	5.36	34.14	177 121 PEAK																																																																																
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2452.00	96.72	-----	-----	91.88	33.51	5.44	34.11	177 121 PEAK																																																																																
Avg	Level (dBuV/m) Date: 2025-07-14 					Level (dBuV/m) Date: 2025-07-14 																																																																																			
	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2388.81</td><td>38.43</td><td>54.00</td><td>-15.57</td><td>33.90</td><td>33.31</td><td>5.36</td><td>34.14</td><td>177 121 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2388.81	38.43	54.00	-15.57	33.90	33.31	5.36	34.14	177 121 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2452.00</td><td>88.75</td><td>-----</td><td>-----</td><td>83.91</td><td>33.51</td><td>5.44</td><td>34.11</td><td>177 121 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2452.00	88.75	-----	-----	83.91	33.51	5.44	34.11
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2388.81	38.43	54.00	-15.57	33.90	33.31	5.36	34.14	177 121 AVERAGE																																																																																
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2452.00	88.75	-----	-----	83.91	33.51	5.44	34.11	177 121 AVERAGE																																																																																





Mode	17											
	Band Edge - R											
	2400-2483.5_802.11n HT40_CH09_2452MHz											
ANT	SISO											
Pol.	Horizontal						Fundamental					
Peak												

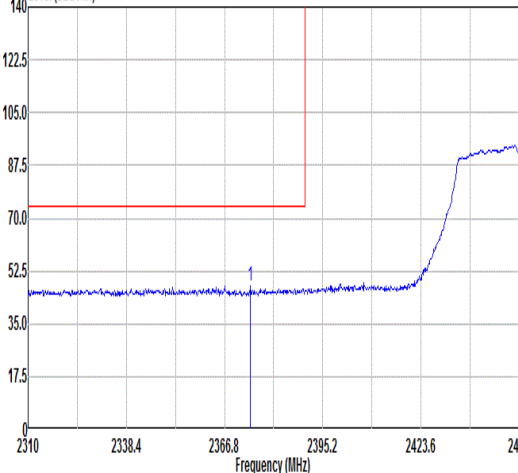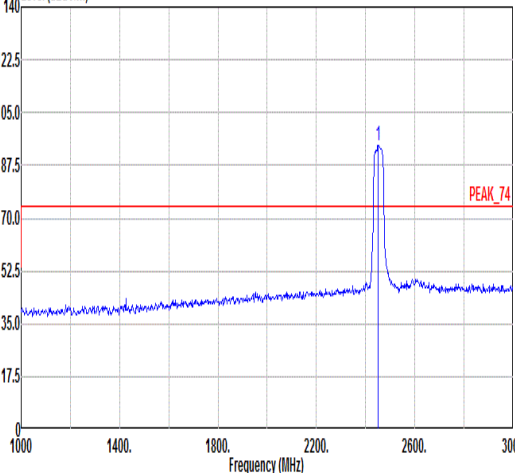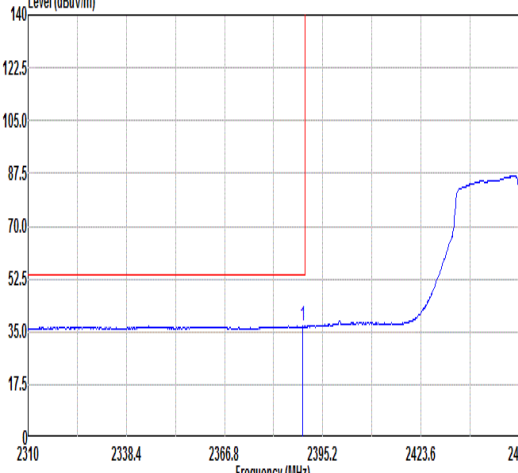
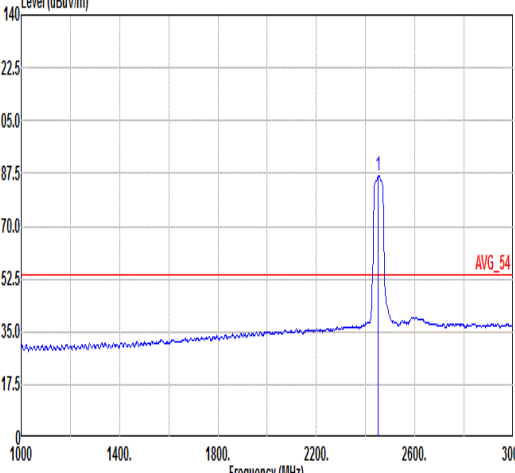


		17																																																																																								
Mode		Band Edge - L																																																																																								
		2400-2483.5_802.11n HT40_CH09_2452MHz																																																																																								
ANT		SISO																																																																																								
Pol.		Vertical					Fundamental																																																																																			
Peak	Level (dBuV/m) Date: 2025-07-14 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2374.33</td><td>47.53</td><td>74.00</td><td>-26.47</td><td>43.06</td><td>33.27</td><td>5.35</td><td>34.15</td><td>329 306 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2374.33	47.53	74.00	-26.47	43.06	33.27	5.35	34.15	329 306 PEAK	Level (dBuV/m) Date: 2025-07-14 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2452.00</td><td>94.21</td><td>-----</td><td>-----</td><td>89.42</td><td>33.48</td><td>5.43</td><td>34.12</td><td>329 306 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2452.00	94.21	-----	-----	89.42	33.48	5.43	34.12	329 306 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2374.33	47.53	74.00	-26.47	43.06	33.27	5.35	34.15	329 306 PEAK																																																																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2452.00	94.21	-----	-----	89.42	33.48	5.43	34.12	329 306 PEAK																																																																																	
Avg	Level (dBuV/m) Date: 2025-07-14 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.38</td><td>36.81</td><td>54.00</td><td>-17.19</td><td>32.28</td><td>33.31</td><td>5.36</td><td>34.14</td><td>329 306 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2389.38	36.81	54.00	-17.19	32.28	33.31	5.36	34.14	329 306 AVERAGE	Level (dBuV/m) Date: 2025-07-14 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2452.00</td><td>86.61</td><td>-----</td><td>-----</td><td>81.82</td><td>33.48</td><td>5.43</td><td>34.12</td><td>329 306 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2452.00	86.61	-----	-----	81.82	33.48	5.43	34.12	329 306 AVERAGE
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2389.38	36.81	54.00	-17.19	32.28	33.31	5.36	34.14	329 306 AVERAGE																																																																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2452.00	86.61	-----	-----	81.82	33.48	5.43	34.12	329 306 AVERAGE																																																																																	

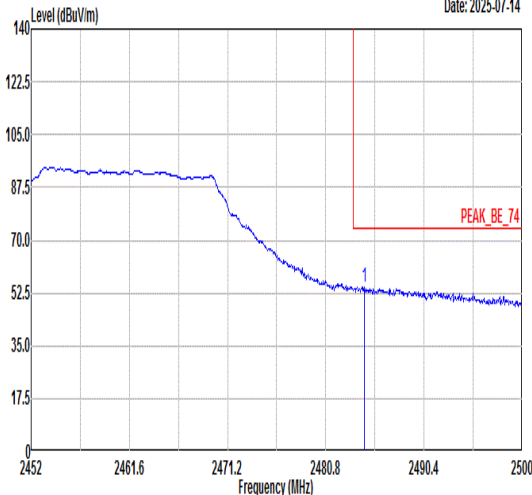
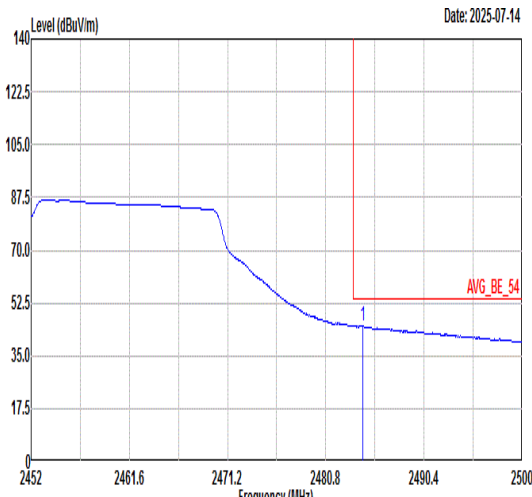


Mode	17																																					
	Band Edge - R																																					
	2400-2483.5_802.11n HT40_CH09_2452MHz																																					
ANT	SISO																																					
Pol.	Vertical	Fundamental																																				
Peak	Date: 2025-07-14 <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>(dB)</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2484.54</td><td>54.61</td><td>74.00</td><td>-19.39</td><td>49.70</td><td>33.56</td><td>5.46</td><td>34.11</td><td>329</td><td>306</td><td>PEAK</td></tr></tbody></table>		Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1	2484.54	54.61	74.00	-19.39	49.70	33.56	5.46	34.11	329	306	PEAK	Blank
	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																											
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																												
1	2484.54	54.61	74.00	-19.39	49.70	33.56	5.46	34.11	329	306	PEAK																											
Avg	Date: 2025-07-14 <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>(dB)</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2484.40</td><td>44.92</td><td>54.00</td><td>-9.08</td><td>40.01</td><td>33.56</td><td>5.46</td><td>34.11</td><td>329</td><td>306</td><td>AVERAGE</td></tr></tbody></table>		Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1	2484.40	44.92	54.00	-9.08	40.01	33.56	5.46	34.11	329	306	AVERAGE	Blank
	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																											
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																												
1	2484.40	44.92	54.00	-9.08	40.01	33.56	5.46	34.11	329	306	AVERAGE																											

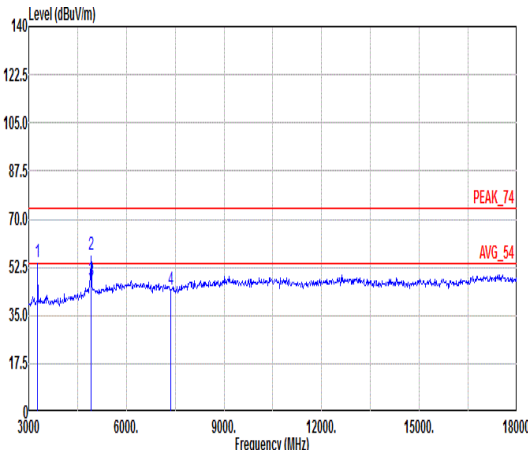
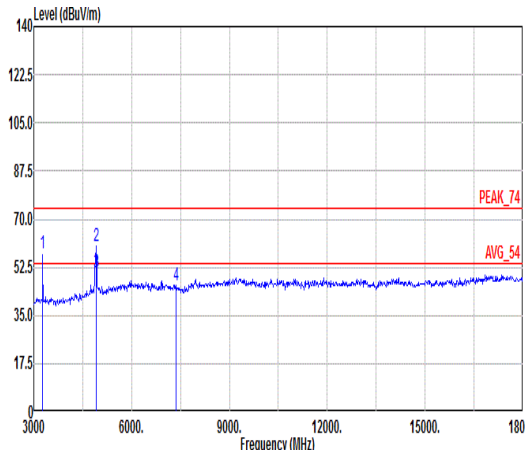


Mode	17																																																																																						
	Harmonic																																																																																						
	2400-2483.5_802.11n HT40_CH09_2452MHz																																																																																						
ANT	SISO																																																																																						
Pol.	Horizontal						Vertical																																																																																
Peak Avg																																																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>3270.00</td><td>54.36</td><td>74.00</td><td>-19.64</td><td>79.22</td><td>32.80</td><td>6.61</td><td>64.27</td><td>288</td><td>360</td><td>Peak</td></tr><tr><td>2</td><td>4904.00</td><td>56.82</td><td>74.00</td><td>-17.18</td><td>76.46</td><td>36.55</td><td>8.63</td><td>64.82</td><td>100</td><td>119</td><td>Peak</td></tr><tr><td>3</td><td>4904.00</td><td>47.60</td><td>54.00</td><td>-6.40</td><td>67.24</td><td>36.55</td><td>8.63</td><td>64.82</td><td>100</td><td>119</td><td>Average</td></tr><tr><td>4</td><td>7356.00</td><td>44.54</td><td>74.00</td><td>-29.46</td><td>62.51</td><td>36.84</td><td>10.18</td><td>64.99</td><td>---</td><td>---</td><td>Peak</td></tr></table>													Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	3270.00	54.36	74.00	-19.64	79.22	32.80	6.61	64.27	288	360	Peak	2	4904.00	56.82	74.00	-17.18	76.46	36.55	8.63	64.82	100	119	Peak	3	4904.00	47.60	54.00	-6.40	67.24	36.55	8.63	64.82	100	119	Average	4	7356.00	44.54	74.00	-29.46	62.51	36.84	10.18	64.99	---	---	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																															
1	3270.00	54.36	74.00	-19.64	79.22	32.80	6.61	64.27	288	360	Peak																																																																												
2	4904.00	56.82	74.00	-17.18	76.46	36.55	8.63	64.82	100	119	Peak																																																																												
3	4904.00	47.60	54.00	-6.40	67.24	36.55	8.63	64.82	100	119	Average																																																																												
4	7356.00	44.54	74.00	-29.46	62.51	36.84	10.18	64.99	---	---	Peak																																																																												

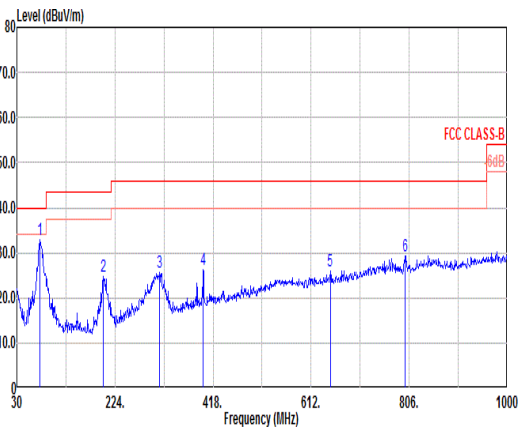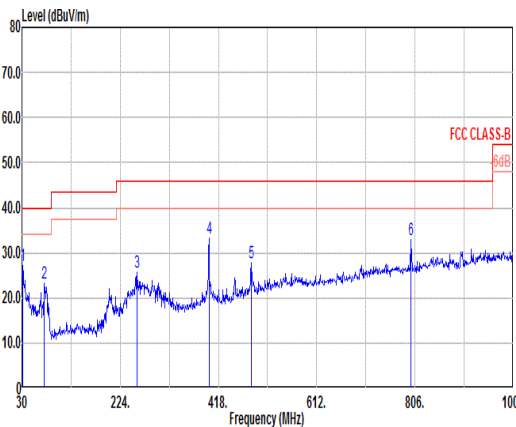

Mode	18																																																																																																																																																																																																																			
	LF																																																																																																																																																																																																																			
	2400-2483.5_802.11b-LF_CH01_2412MHz																																																																																																																																																																																																																			
ANT	SISO																																																																																																																																																																																																																			
Pol.	Horizontal						Vertical																																																																																																																																																																																																													
QPI/ Peak																																																																																																																																																																																																																				
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>75.59</td><td>32.99</td><td>40.00</td><td>-7.01</td><td>50.71</td><td>13.02</td><td>0.87</td><td>31.61</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>200.72</td><td>24.85</td><td>43.50</td><td>-18.65</td><td>39.89</td><td>15.03</td><td>1.43</td><td>31.50</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>312.27</td><td>25.58</td><td>46.00</td><td>-20.42</td><td>35.70</td><td>19.61</td><td>1.85</td><td>31.58</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>398.60</td><td>26.17</td><td>46.00</td><td>-19.83</td><td>33.37</td><td>22.01</td><td>2.10</td><td>31.31</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>649.83</td><td>25.83</td><td>46.00</td><td>-20.17</td><td>27.64</td><td>26.74</td><td>2.65</td><td>31.20</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>6</td><td>797.27</td><td>29.30</td><td>46.00</td><td>-16.70</td><td>28.67</td><td>28.79</td><td>2.93</td><td>31.09</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	75.59	32.99	40.00	-7.01	50.71	13.02	0.87	31.61	---	---	Peak	2	200.72	24.85	43.50	-18.65	39.89	15.03	1.43	31.50	---	---	Peak	3	312.27	25.58	46.00	-20.42	35.70	19.61	1.85	31.58	---	---	Peak	4	398.60	26.17	46.00	-19.83	33.37	22.01	2.10	31.31	---	---	Peak	5	649.83	25.83	46.00	-20.17	27.64	26.74	2.65	31.20	---	---	Peak	6	797.27	29.30	46.00	-16.70	28.67	28.79	2.93	31.09	---	---	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>31.94</td><td>27.28</td><td>40.00</td><td>-12.72</td><td>34.06</td><td>24.25</td><td>0.55</td><td>31.58</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>74.62</td><td>23.12</td><td>40.00</td><td>-16.88</td><td>40.94</td><td>12.92</td><td>0.86</td><td>31.60</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>257.95</td><td>25.63</td><td>46.00</td><td>-20.37</td><td>35.75</td><td>19.73</td><td>1.67</td><td>31.52</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>399.57</td><td>33.08</td><td>46.00</td><td>-12.92</td><td>40.22</td><td>22.06</td><td>2.10</td><td>31.30</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>482.99</td><td>27.81</td><td>46.00</td><td>-18.19</td><td>32.90</td><td>23.92</td><td>2.29</td><td>31.30</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>6</td><td>797.27</td><td>32.91</td><td>46.00</td><td>-13.09</td><td>32.28</td><td>28.79</td><td>2.93</td><td>31.09</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	31.94	27.28	40.00	-12.72	34.06	24.25	0.55	31.58	---	---	Peak	2	74.62	23.12	40.00	-16.88	40.94	12.92	0.86	31.60	---	---	Peak	3	257.95	25.63	46.00	-20.37	35.75	19.73	1.67	31.52	---	---	Peak	4	399.57	33.08	46.00	-12.92	40.22	22.06	2.10	31.30	---	---	Peak	5	482.99	27.81	46.00	-18.19	32.90	23.92	2.29	31.30	---	---	Peak	6	797.27	32.91	46.00	-13.09	32.28	28.79	2.93	31.09	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																																																																																												
	Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																																																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																																										
	1	75.59	32.99	40.00	-7.01	50.71	13.02	0.87	31.61	---	---	Peak																																																																																																																																																																																																								
	2	200.72	24.85	43.50	-18.65	39.89	15.03	1.43	31.50	---	---	Peak																																																																																																																																																																																																								
	3	312.27	25.58	46.00	-20.42	35.70	19.61	1.85	31.58	---	---	Peak																																																																																																																																																																																																								
	4	398.60	26.17	46.00	-19.83	33.37	22.01	2.10	31.31	---	---	Peak																																																																																																																																																																																																								
	5	649.83	25.83	46.00	-20.17	27.64	26.74	2.65	31.20	---	---	Peak																																																																																																																																																																																																								
6	797.27	29.30	46.00	-16.70	28.67	28.79	2.93	31.09	---	---	Peak																																																																																																																																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																																																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																																											
1	31.94	27.28	40.00	-12.72	34.06	24.25	0.55	31.58	---	---	Peak																																																																																																																																																																																																									
2	74.62	23.12	40.00	-16.88	40.94	12.92	0.86	31.60	---	---	Peak																																																																																																																																																																																																									
3	257.95	25.63	46.00	-20.37	35.75	19.73	1.67	31.52	---	---	Peak																																																																																																																																																																																																									
4	399.57	33.08	46.00	-12.92	40.22	22.06	2.10	31.30	---	---	Peak																																																																																																																																																																																																									
5	482.99	27.81	46.00	-18.19	32.90	23.92	2.29	31.30	---	---	Peak																																																																																																																																																																																																									
6	797.27	32.91	46.00	-13.09	32.28	28.79	2.93	31.09	---	---	Peak																																																																																																																																																																																																									

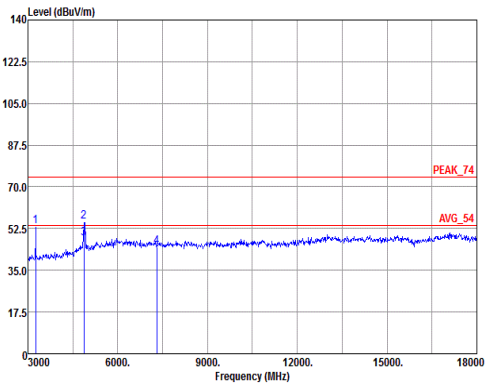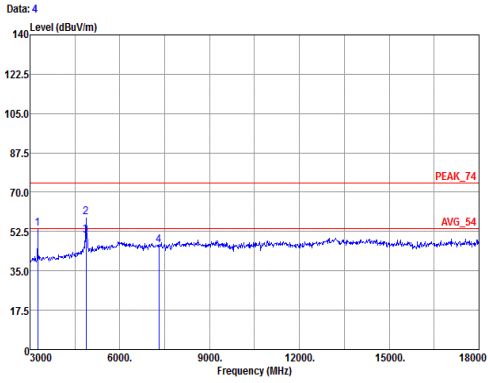


Mode	19										
	Harmonic										
	2400-2483.5_802.11n HT40_CH06_2437MHz										
ANT	SISO										
Pol.	Horizontal						Vertical				
Peak Avg											
	Freq	Level	Over Limit	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	3255.00	53.51	-20.49	74.00	78.39	32.76	6.61	64.25	132	331 Peak	
2 *	4874.00	55.26	-18.74	74.00	74.83	36.50	8.76	64.83	100	116 Peak	
3	4874.00	48.35	-5.65	54.00	67.92	36.50	8.76	64.83	100	116 Average	
4	7311.00	44.95	-29.05	74.00	62.89	36.89	10.18	65.01	---	---	Peak
	Freq	Level	Over Limit	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	3255.00	53.93	-20.07	74.00	78.81	32.76	6.61	64.25	112	91 Peak	
2 *	4874.00	58.78	-15.22	74.00	78.35	36.50	8.76	64.83	100	290 Peak	
3	4874.00	50.59	-3.41	54.00	70.16	36.50	8.76	64.83	100	290 Average	
4	7311.00	46.30	-27.70	74.00	64.24	36.89	10.18	65.01	---	---	Peak

Appendix C. Duty Cycle Plots

Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11b	100	-	-	10Hz
802.11g	100	-	-	10Hz
802.11n HT20	100	-	-	10Hz
802.11n HT40	100	-	-	10Hz


802.11b

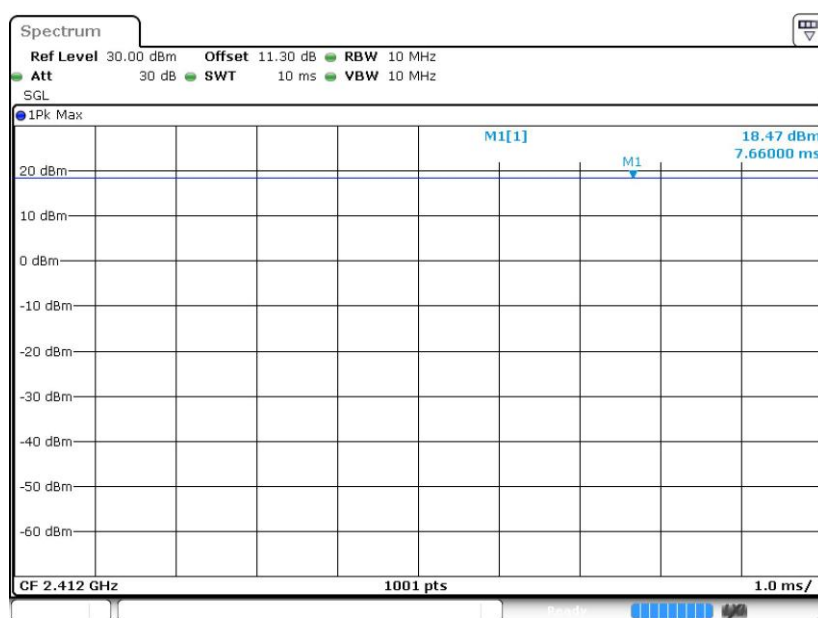

Date: 1 JUL 2025 17:20:35




802.11g

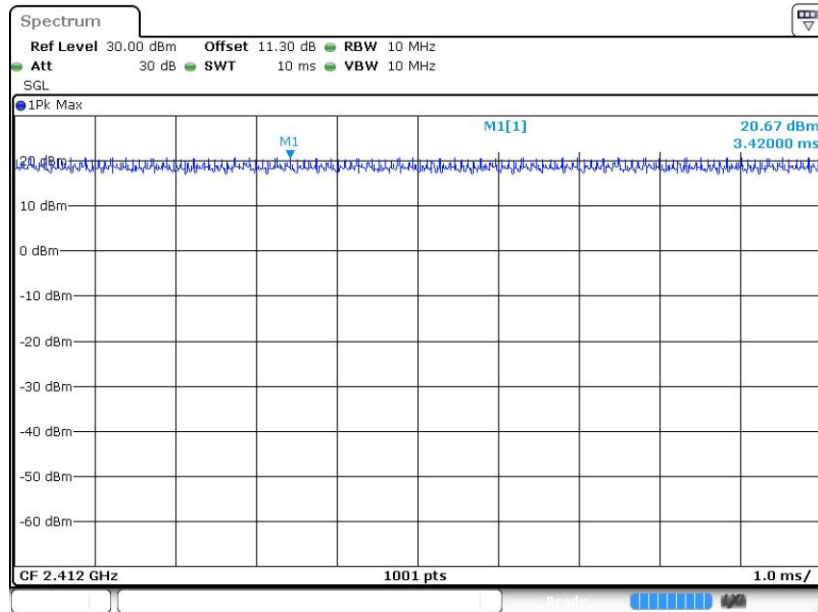

Date: 1 JUL 2025 17:21:00


802.11n HT20

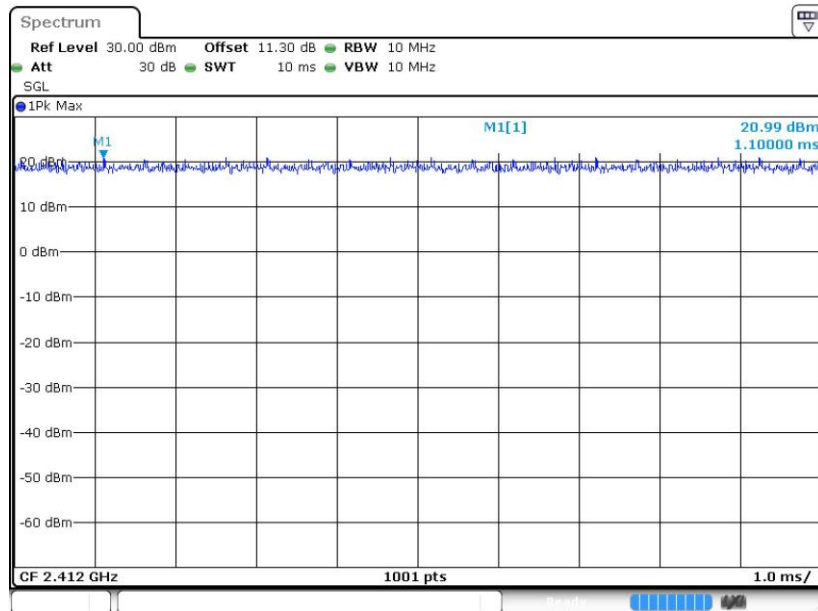

Date: 1 JUL 2025 17:21:20



802.11n HT40

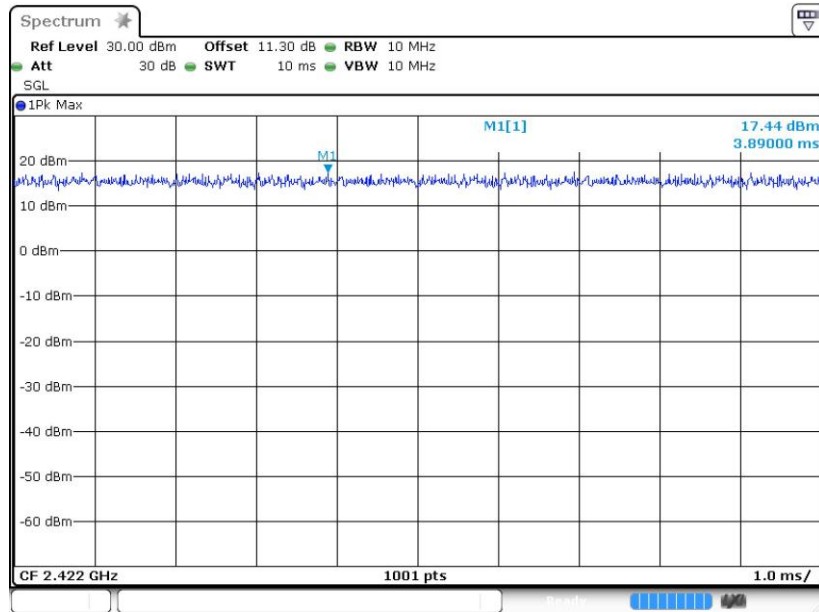

Date: 1 JUL 2025 17:21:43