



FCC Radio Test Report


FCC ID: 2APRGWR3600E

This report concerns: Original Grant

Project No. : 2502C175
Equipment : BE3600 Gigabit Dual-Band Wi-Fi 7 Router
Brand Name : Cudy
Test Model : WR3600E
Series Model : N/A
Applicant : Shenzhen Cudy Technology Co., Ltd.
Address : 7/F, Lepu Tower (West), 66 Xingke Rd, Nanshan, Shenzhen, China
Manufacturer : Shenzhen Cudy Technology Co., Ltd.
Address : 7/F, Lepu Tower (West), 66 Xingke Rd, Nanshan, Shenzhen, China
Factory : Shenzhen Cudy Technology Co., Ltd.
Address : 7/F, Lepu Tower (West), 66 Xingke Rd, Nanshan, Shenzhen, China
Date of Receipt : Feb. 21, 2025
Date of Test : Feb. 26, 2025 ~ May 26, 2025
Issued Date : Jun. 18, 2025
Report Version : R00
Test Sample : Engineering Sample No.: DG20250221150 for conducted,
DG20250221149 for others.
Standard(s) : FCC CFR Title 47, Part 15, Subpart C

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc. (Dongguan)

Prepared by : 
Sheldon Ou

Approved by : 
Chay Cai

No.3, Jinshagang 1st Road, Dalang, Dongguan, Guangdong People's Republic of China.
Tel: +86-769-8318-3000 Web: www.newbtl.com Service mail: btl_qa@newbtl.com

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** assumes no responsibility for the data provided by the customer, any statements, inferences or generalizations drawn by the customer or others from the reports issued by **BTL**.

The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the U.S. Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL's laboratory quality assurance procedures are in compliance with the ISO/IEC 17025: 2017 requirements, and accredited by the conformity assessment authorities listed in this test report.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

Table of Contents	Page
REPORT ISSUED HISTORY	6
1 . APPLICABLE STANDARDS	7
2 . SUMMARY OF TEST RESULTS	7
2.1 TEST FACILITY	8
2.2 MEASUREMENT UNCERTAINTY	8
2.3 TEST ENVIRONMENT CONDITIONS	9
3 . GENERAL INFORMATION	10
3.1 GENERAL DESCRIPTION OF EUT	10
3.2 DESCRIPTION OF TEST MODES	12
3.3 PARAMETERS OF TEST SOFTWARE	13
3.4 DUTY CYCLE	14
3.5 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	16
3.6 SUPPORT UNITS	16
3.7 CUSTOMER INFORMATION DESCRIPTION	16
4 . AC POWER LINE CONDUCTED EMISSIONS	17
4.1 LIMIT	17
4.2 TEST PROCEDURE	17
4.3 DEVIATION FROM TEST STANDARD	17
4.4 TEST SETUP	18
4.5 EUT OPERATION CONDITIONS	18
4.6 TEST RESULTS	18
5 . RADIATED EMISSIONS	19
5.1 LIMIT	19
5.2 TEST PROCEDURE	20
5.3 DEVIATION FROM TEST STANDARD	21
5.4 TEST SETUP	21
5.5 EUT OPERATION CONDITIONS	23
5.6 TEST RESULTS - 9 KHZ TO 30 MHZ	23
5.7 TEST RESULTS - 30 MHZ TO 1000 MHZ	23
5.8 TEST RESULTS - ABOVE 1000 MHZ	23
6 . BANDWIDTH	24
6.1 LIMIT	24
6.2 TEST PROCEDURE	24

Table of Contents	Page
6.3 DEVIATION FROM STANDARD	24
6.4 TEST SETUP	24
6.5 EUT OPERATION CONDITIONS	24
6.6 TEST RESULTS	24
7 . MAXIMUM OUTPUT POWER	25
7.1 LIMIT	25
7.2 TEST PROCEDURE	25
7.3 DEVIATION FROM STANDARD	25
7.4 TEST SETUP	25
7.5 EUT OPERATION CONDITIONS	25
7.6 TEST RESULTS	25
8 . CONDUCTED SPURIOUS EMISSIONS	26
8.1 LIMIT	26
8.2 TEST PROCEDURE	26
8.3 DEVIATION FROM STANDARD	26
8.4 TEST SETUP	26
8.5 EUT OPERATION CONDITIONS	26
8.6 TEST RESULTS	26
9 . POWER SPECTRAL DENSITY	27
9.1 LIMIT	27
9.2 TEST PROCEDURE	27
9.3 DEVIATION FROM STANDARD	27
9.4 TEST SETUP	27
9.5 EUT OPERATION CONDITIONS	27
9.6 TEST RESULTS	27
10 . MEASUREMENT INSTRUMENTS LIST	28
11 . EUT TEST PHOTO	30
APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS	36
APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ	39
APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ	44
APPENDIX D - RADIATED EMISSION- ABOVE 1000 MHZ	47
APPENDIX E - BANDWIDTH	86
APPENDIX F - MAXIMUM OUTPUT POWER	93

Table of Contents**Page****APPENDIX G - CONDUCTED SPURIOUS EMISSIONS****100****APPENDIX H - POWER SPECTRAL DENSITY****113**

REPORT ISSUED HISTORY

Report No.	Version	Description	Issued Date	Note
BTL-FCCP-1-2502C175	R00	Original Report.	Jun. 18, 2025	Valid

1. APPLICABLE STANDARDS

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

ANSI C63.10-2013

The following reference test guidance is not within the scope of accreditation of A2LA:

KDB 558074 D01 15.247 Meas Guidance v05r02

KDB 662911 D01 Multiple Transmitter Output v02r01

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC CFR Title 47, Part 15, Subpart C				
Standard(s) Section	Test Item	Test Result	Judgment	Remark
15.207	AC Power Line Conducted Emissions	APPENDIX A	PASS	-----
15.247(d) 15.205(a) 15.209(a)	Radiated Emissions	APPENDIX B APPENDIX C APPENDIX D	PASS	-----
15.247(a)(2)	Bandwidth	APPENDIX E	PASS	-----
15.247(b)(3)	Maximum Output Power	APPENDIX F	PASS	-----
15.247(d)	Conducted Spurious Emissions	APPENDIX G	PASS	-----
15.247(e)	Power Spectral Density	APPENDIX H	PASS	-----
15.203	Antenna Requirement	-----	PASS	Note(2)

Note:

(1) "N/A" denotes test is not applicable in this test report.

(2) The device what use a permanently attached antenna were considered sufficient to comply with the provisions of 15.203.

2.1 TEST FACILITY

For Radiated emissions 30MHz to 26.5GHz:

The test facilities used to collect the test data in this report is at the location of Room 102 & 702, Building A3, No.9, Jinshagang 1st Road, Dalang, Dongguan, Guangdong People's Republic of China.

For others:

The test facilities used to collect the test data in this report is at the location of No.3, Jinshagang 1st Road, Dalang, Dongguan, Guangdong People's Republic of China.

BTL's Registration Number for FCC: 747969

BTL's Designation Number for FCC: CN1377

2.2 MEASUREMENT UNCERTAINTY

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95.45% confidence level (based on a coverage factor (k=2))

The BTL measurement uncertainty as below table:

A. AC power line conducted emissions test:

Test Site	Method	Measurement Frequency Range	U,(dB)
DG-C02	CISPR	150kHz ~ 30MHz	2.88

B. Radiated emissions test:

Test Site	Method	Measurement Frequency Range	U,(dB)
DG-CB01	CISPR	9kHz ~ 30MHz	2.36

Test Site	Method	Measurement Frequency Range	Ant. H / V	U,(dB)
DG-CB17 (3m)	CISPR	30MHz ~ 200MHz	V	4.22
		30MHz ~ 200MHz	H	3.46
		200MHz ~ 1,000MHz	V	5.02
		200MHz ~ 1,000MHz	H	4.22

Test Site	Method	Measurement Frequency Range	U,(dB)
DG-CB18 (3m)	CISPR	1GHz ~ 6GHz	4.48
		6GHz ~ 18GHz	3.88

Test Site	Method	Measurement Frequency Range	U,(dB)
DG-CB17 (1m)	CISPR	18 ~ 26.5 GHz	3.56

C. Other Measurement:

Test Item	Uncertainty
Bandwidth	0.90 %
Maximum Output Power	1.3 dB
Conducted Spurious Emission	1.9 dB
Power Spectral Density	1.4 dB
Temperature	0.8 °C
Humidity	2.2 %

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

2.3 TEST ENVIRONMENT CONDITIONS

Test Item	Temperature	Humidity	Test Voltage	Tested By	Test Date
AC Power Line Conducted Emissions	22°C	55%	AC 120V/60Hz	Hayden Chen	Mar. 14, 2025
Radiated Emissions-9kHz to 30 MHz	20°C	50%	AC 120V/60Hz	Hayden Chen	Apr. 01, 2025
Radiated Emissions-30MHz to 1000MHz	24°C	48%	AC 120V/60Hz	Calvin Wen	Mar. 10, 2025
Radiated Emissions-Above 1000MHz	23-24°C	47-51%	AC 120V/60Hz	Drew Tan Calvin Wen	Mar. 06, 2025 Apr. 20, 2025 Apr. 30, 2025
Bandwidth	24°C	48%	AC 120V/60Hz	Jensen Zhou	Mar. 31, 2025
Maximum Output Power	23-25°C	54-57%	AC 120V/60Hz	Zhang Meers	Mar. 03, 2025~ Mar. 10, 2025
Conducted Spurious Emissions	24°C	48%	AC 120V/60Hz	Jensen Zhou	Mar. 31, 2025
Power Spectral Density	24°C	48%	AC 120V/60Hz	Jensen Zhou	Mar. 31, 2025

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	BE3600 Gigabit Dual-Band Wi-Fi 7 Router
Brand Name	Cudy
Test Model	WR3600E
Series Model	N/A
Model Difference(s)	N/A
Software Version	2.2.7
Hardware Version	V1
Power Source	DC voltage supplied from AC adapter. Model: DSA-12PF11-12 FUS 120100
Power Rating	I/P: 100-240V~50/60Hz 0.5A O/P: +12.0V $\equiv$ 1.0A 12.0W
Operation Frequency	2412 MHz ~ 2462 MHz
Modulation Type	IEEE 802.11b: DSSS IEEE 802.11g: OFDM IEEE 802.11n: OFDM IEEE 802.11ax/be: OFDMA
Bit Rate of Transmitter	IEEE 802.11b: 11/5.5/2/1 Mbps IEEE 802.11g: 54/48/36/24/18/12/9/6 Mbps IEEE 802.11n: up to 300 Mbps IEEE 802.11ax: up to 573.6 Mbps IEEE 802.11be: up to 688 Mbps
Maximum Output Power	IEEE 802.11n(HT20): 26.15 dBm (0.4121 W)

Note:

- For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

2. Channel List:

CH01 - CH11 for IEEE 802.11b, IEEE 802.11g, IEEE 802.11n(HT20), IEEE 802.11be(EHT20) CH03 - CH09 for IEEE 802.11n(HT40), IEEE 802.11ax(HE40) , IEEE 802.11be(EHT40)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	04	2427	07	2442	10	2457
02	2417	05	2432	08	2447	11	2462
03	2422	06	2437	09	2452		

3. Antenna Specification:

Ant.	Brand	P/N	Antenna Type	Connector	Gain (dBi)
1		3.N101.1643	Dipole	N/A	5.87
2		3.N101.1644	Dipole	N/A	5.61

Note:

- This EUT supports CDD, and Directional gain = $G_{ANT} + \text{Array Gain}$.
For power measurements, Array Gain=0dB ($N_{ANT} \leq 4$), so the Directional gain=5.87.
For power spectral density measurements, $N_{ANT}=2$, $N_{SS} = 1$.
So the Directional gain= $G_{ANT} + \text{Array Gain} = G_{ANT} + 10\log(N_{ANT}/N_{SS})\text{dBi} = 5.87 + 10\log(2/1)\text{dBi} = 8.88$.
Then, the power spectral density limit is $8 - (8.88 - 6) = 5.12$.
- Beamforming Gain: 3dB.

4. Table for Antenna Configuration:

Non Beamforming:

Operating Mode	TX Mode	2TX
IEEE 802.11b		V(Ant. 1 + Ant. 2)
IEEE 802.11g		V(Ant. 1 + Ant. 2)
IEEE 802.11n(HT20)		V(Ant. 1 + Ant. 2)
IEEE 802.11n(HT40)		V(Ant. 1 + Ant. 2)
IEEE 802.11ax(HE20)		V(Ant. 1 + Ant. 2)
IEEE 802.11ax(HE40)		V(Ant. 1 + Ant. 2)
IEEE 802.11be(EHT20)		V(Ant. 1 + Ant. 2)
IEEE 802.11be(EHT40)		V(Ant. 1 + Ant. 2)

Beamforming:

Operating Mode	TX Mode	2TX
IEEE 802.11n(HT20)		V(Ant. 1 + Ant. 2)
IEEE 802.11n(HT40)		V(Ant. 1 + Ant. 2)
IEEE 802.11ax(HE20)		V(Ant. 1 + Ant. 2)
IEEE 802.11ax(HE40)		V(Ant. 1 + Ant. 2)
IEEE 802.11be(EHT20)		V(Ant. 1 + Ant. 2)
IEEE 802.11be(EHT40)		V(Ant. 1 + Ant. 2)

3.2 DESCRIPTION OF TEST MODES

The test system was pre-tested based on the consideration of all possible combinations of EUT operation mode.

Pretest Mode	Description
Mode 1	TX B Mode Channel 01/06/11
Mode 2	TX G Mode Channel 01/06/11
Mode 3	TX N(HT20) Mode Channel 01/06/11
Mode 4	TX N(HT40) Mode Channel 03/06/09
Mode 5	TX BE(EHT20) Mode Channel 01/06/11
Mode 6	TX BE(EHT40) Mode Channel 03/06/09
Mode 7	TX N(HT20) Mode Channel 06

Following mode(s) was (were) found to be the worst case(s) and selected for the final test.

AC power line conducted emissions test	
Final Test Mode	Description
Mode 7	TX N(HT20) Mode Channel 06

Radiated emissions test - Below 1GHz	
Final Test Mode	Description
Mode 7	TX N(HT20) Mode Channel 06

Radiated emissions test- Above 1GHz	
Final Test Mode	Description
Mode 1	TX B Mode Channel 01/06/11
Mode 2	TX G Mode Channel 01/06/11
Mode 3	TX N(HT20) Mode Channel 01/06/11
Mode 4	TX N(HT40) Mode Channel 03/06/09
Mode 5	TX BE(EHT20) Mode Channel 01/06/11
Mode 6	TX BE(EHT40) Mode Channel 03/06/09

Conducted test	
Final Test Mode	Description
Mode 1	TX B Mode Channel 01/06/11
Mode 2	TX G Mode Channel 01/06/11
Mode 3	TX N(HT20) Mode Channel 01/06/11
Mode 4	TX N(HT40) Mode Channel 03/06/09
Mode 5	TX BE(EHT20) Mode Channel 01/06/11
Mode 6	TX BE(EHT40) Mode Channel 03/06/09

NOTE:

- (1) All the bit rate of transmitter have been tested and found the lowest rate is found to be the worst case and recorded.
- (2) For AC power line conducted emissions and radiated emission below 1 GHz test, the TX N(HT20) Mode Channel 06 is found to be the worst case and recorded.
- (3) For radiated emission above 1 GHz test, the spurious points of 1GHz~26.5GHz have been pre-tested and in this report only recorded the worst case. The remaining spurious points are all below the limit value of 20dB.
- (4) For radiated emission Harmonic 18-26.5GHz test, only tested the worst case and recorded.
- (5) IEEE 802.11ax mode and IEEE 802.11be mode only support full RU, so only the full RU is evaluated and measured inside report.
- (6) For radiated emission above 1 GHz test, the polarization of Vertical and Horizontal are evaluated, the worst case is Vertical and recorded.
- (7) EHT20/EHT40 covers HE20/HE40, due to same modulation (in full RU). The power setting for 802.11ax HE20/HE40 are the same or lower than 802.11be EHT20/EHT40.
- (8) The RF Output Power of the Beamforming mode will be lower than that of the Non Beamforming mode. Only Non Beamforming mode will be evaluated and recorded in the report.


3.3 PARAMETERS OF TEST SOFTWARE

Test Software Version	accessMTool_REL_3_3_0_6		
Frequency (MHz)	2412	2437	2462
IEEE 802.11b	66	65	65
IEEE 802.11g	74	79	74
IEEE 802.11n(HT20)	77	83	77
IEEE 802.11be(EHT20)	58	76	59
Frequency (MHz)	2422	2437	2452
IEEE 802.11n(HT40)	68	68	71
IEEE 802.11be(EHT40)	65	64	63

3.4 DUTY CYCLE

If duty cycle is $\geq 98\%$, duty factor is not required.
 If duty cycle is $< 98\%$, duty factor shall be considered.
 The output power = measured power + duty factor.


IEEE 802.11b

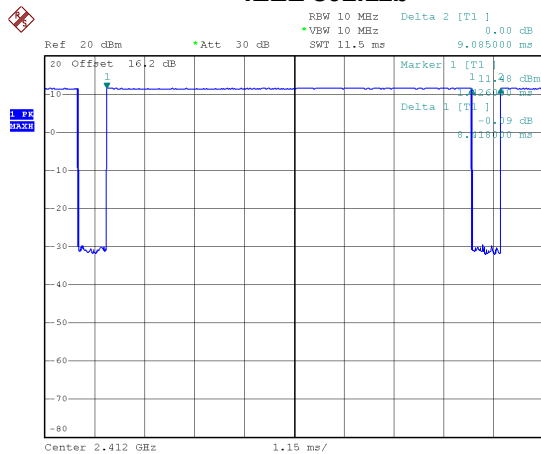

Date: 27.MAR.2025 03:36:23

Duty cycle = $8.418 \text{ ms} / 9.085 \text{ ms} = 92.66\%$
 Duty Factor = $10 \log(1/\text{Duty cycle}) = 0.33$


IEEE 802.11g

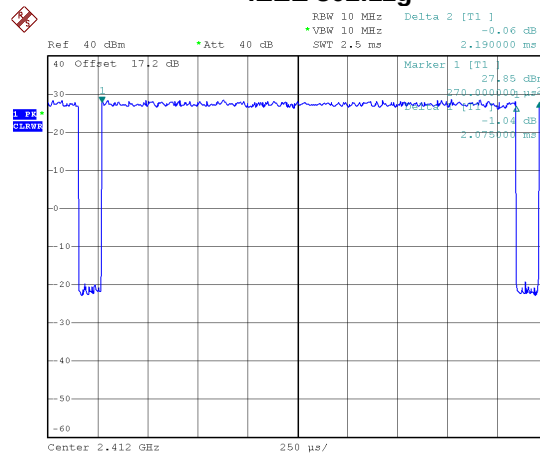

Date: 10.APR.2025 20:05:12

Duty cycle = $2.075 \text{ ms} / 2.190 \text{ ms} = 94.75\%$
 Duty Factor = $10 \log(1/\text{Duty cycle}) = 0.23$


IEEE 802.11n(HT20)

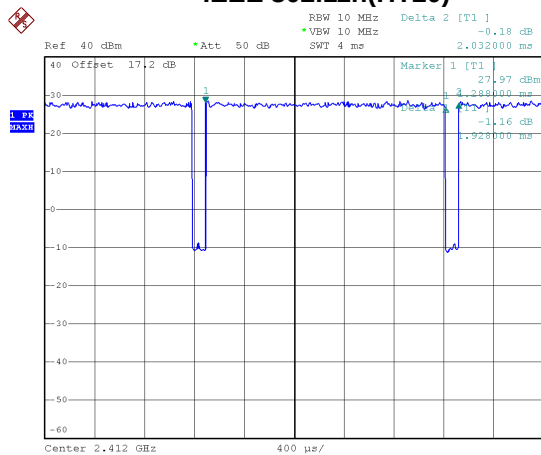

Date: 10.APR.2025 20:07:06

Duty cycle = $1.928 \text{ ms} / 2.032 \text{ ms} = 94.88\%$
 Duty Factor = $10 \log(1/\text{Duty cycle}) = 0.23$


IEEE 802.11n(HT40)

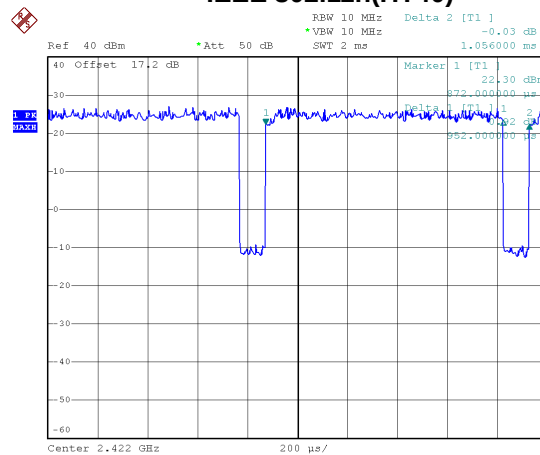

Date: 10.APR.2025 20:09:29

Duty cycle = $0.952 \text{ ms} / 1.056 \text{ ms} = 90.15\%$
 Duty Factor = $10 \log(1/\text{Duty cycle}) = 0.45$


IEEE 802.11be(EHT20)

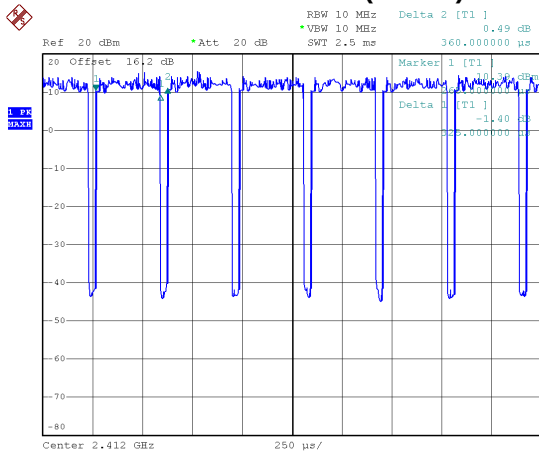

Date: 27.MAR.2025 04:15:23

Duty cycle = 0.325 ms / 0.360 ms = 90.28%
 Duty Factor = $10 \log(1/\text{Duty cycle}) = 0.44$

IEEE 802.11be(EHT40)

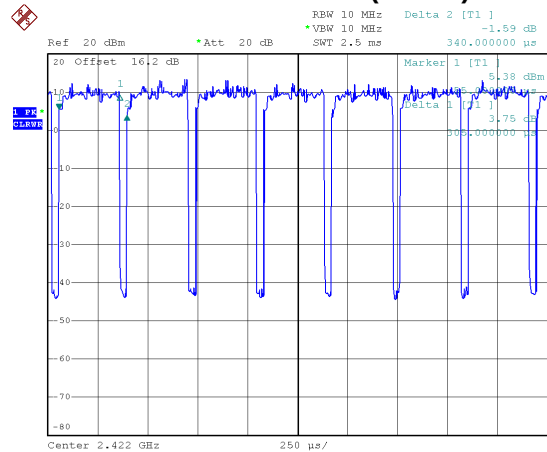

Date: 27.MAR.2025 04:16:24

Duty cycle = 0.305 ms / 0.340 ms = 89.71%
 Duty Factor = $10 \log(1/\text{Duty cycle}) = 0.47$

NOTE:

For IEEE 802.11b:

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 119 Hz.

For IEEE 802.11g:

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 482 Hz.

For IEEE 802.11n(HT20):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 519 Hz.

For IEEE 802.11n(HT40):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 1050 Hz.


For IEEE 802.11be(EHT20):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3077 Hz.

For IEEE 802.11be(EHT40):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3279 Hz.

3.5 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

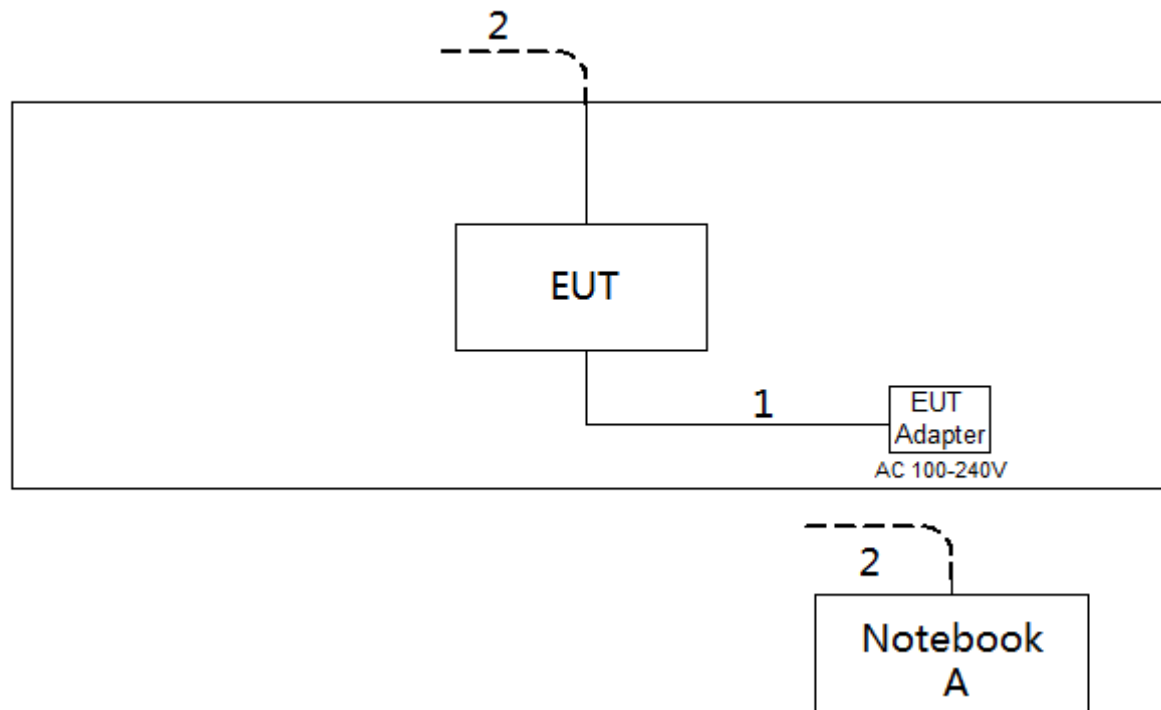

3.6 SUPPORT UNITS

Item	Equipment	Brand	Model No.	Series No.
A	Notebook	Honor	Nbl-WAQ9HNRP	N/A

Item	Cable Type	Shielded Type	Ferrite Core	Length
1	DC Cable	NO	NO	1.5m
2	RJ45 Cable	NO	NO	10m

3.7 CUSTOMER INFORMATION DESCRIPTION

- 1) The antenna gain and beamforming gain are provided by the manufacturer.
- 2) Except for AC power line conducted emissions and radiated emissions, the results of all test items include cable losses. All cable losses are provided by the testing laboratory.

4. AC POWER LINE CONDUCTED EMISSIONS

4.1 LIMIT

Frequency of Emission (MHz)	Limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56*	56 to 46*
0.5 - 5.0	56	46
5.0 - 30.0	60	50

NOTE:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

4.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item -EUT Test Photos.


The following table is the setting of the receiver:

Receiver Parameters	Setting
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

4.3 DEVIATION FROM TEST STANDARD

No deviation.

4.4 TEST SETUP

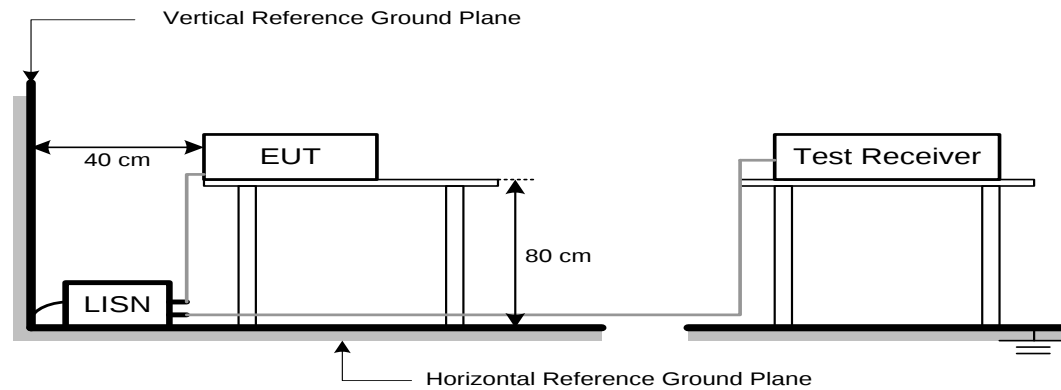

4.5 EUT OPERATION CONDITIONS

EUT was programmed to be in continuously transmitting mode.

4.6 TEST RESULTS

Please refer to the APPENDIX A.

5. RADIATED EMISSIONS

5.1 LIMIT

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

LIMITS OF RADIATED EMISSION MEASUREMENT (9 kHz-1000 MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000 MHz)

Frequency (MHz)	Band edge/ Harmonic at 3m (dBμV/m)		Harmonic at 1m (dBμV/m)	
	Peak	Average	Peak	Average
Above 1000	74	54	83.5 (Note 4)	63.5 (Note 4)

NOTE:

- (1) The limit for radiated test was performed according to FCC CFR Title 47, Part 15, Subpart C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).
- (4)

$$FS_{\text{limit}} = FS_{\text{max}} - 20\log\left(\frac{d_{\text{limit}}}{d_{\text{measure}}}\right)$$

20log (d_{limit}/d_{measure})=20log (3/1)=9.5 dB.

FS_{limit}: Harmonic at 3m Peak and Average limit.

FS_{max}: Harmonic at 1m Peak and Average Maximum value.

d_{limit}: Harmonic at 3m test distance.

d_{measure}: Harmonic Actual test distance.

5.2 TEST PROCEDURE

- The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1 GHz)
- The measuring distance of 3 m or 1m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.
- The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
(below 1 GHz)
- All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1 GHz)
- For the actual test configuration, please refer to the related Item -EUT Test Photos.

The following table is the setting of the receiver:

Spectrum Parameters	Setting
Start ~ Stop Frequency	9 kHz~150 kHz for RBW 200 Hz
Start ~ Stop Frequency	0.15 MHz~30 MHz for RBW 9 kHz
Start ~ Stop Frequency	30 MHz~1000 MHz for RBW 100 kHz

Spectrum Parameters	Setting
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1 MHz / 3 MHz for PK value 1 MHz / 1/T Hz for AVG value


Receiver Parameters	Setting
Start ~ Stop Frequency	9 kHz~90 kHz for PK/AVG detector
Start ~ Stop Frequency	90 kHz~110 kHz for QP detector
Start ~ Stop Frequency	110 kHz~490 kHz for PK/AVG detector
Start ~ Stop Frequency	490 kHz~30 MHz for QP detector
Start ~ Stop Frequency	30 MHz~1000 MHz for QP detector
Start ~ Stop Frequency	1 GHz~26.5 GHz for PK/AVG detector

5.3 DEVIATION FROM TEST STANDARD


No deviation.

5.4 TEST SETUP


9 kHz to 30 MHz

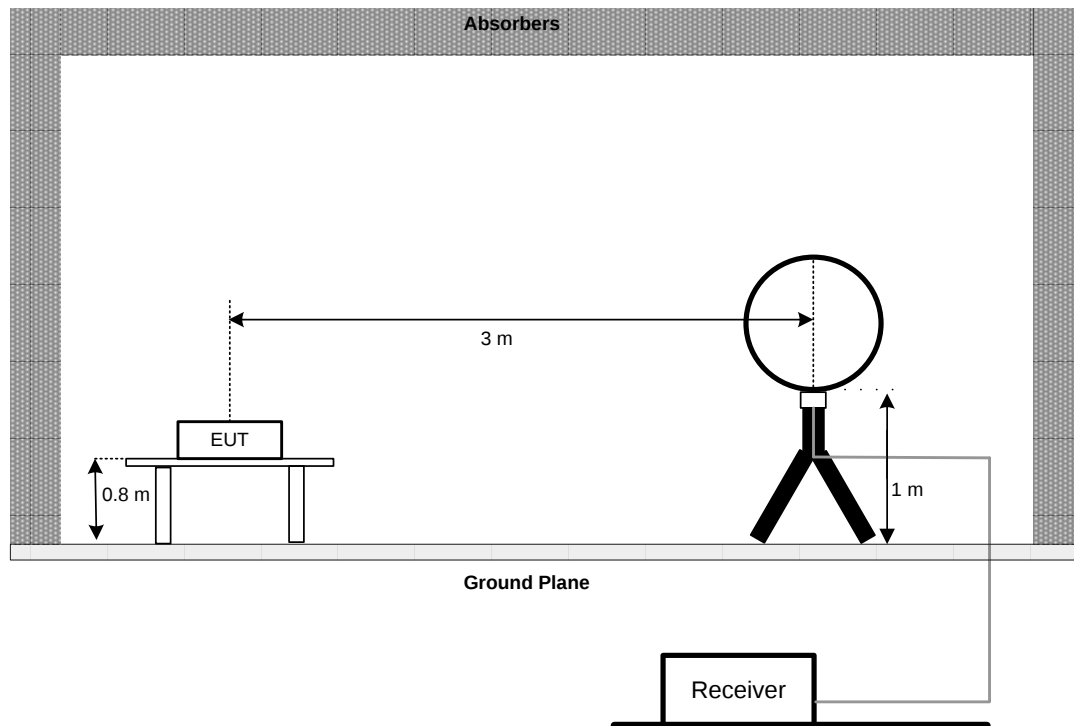


30 MHz to 1 GHz

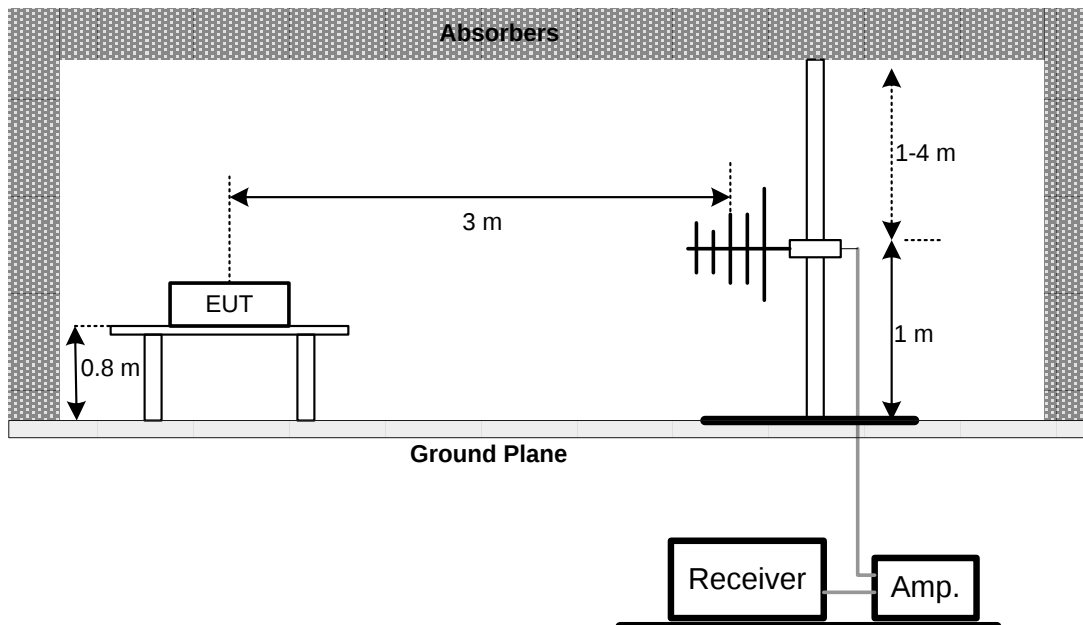

Above 1 GHz Band edge & Harmonic(1 GHz to 18 GHz)

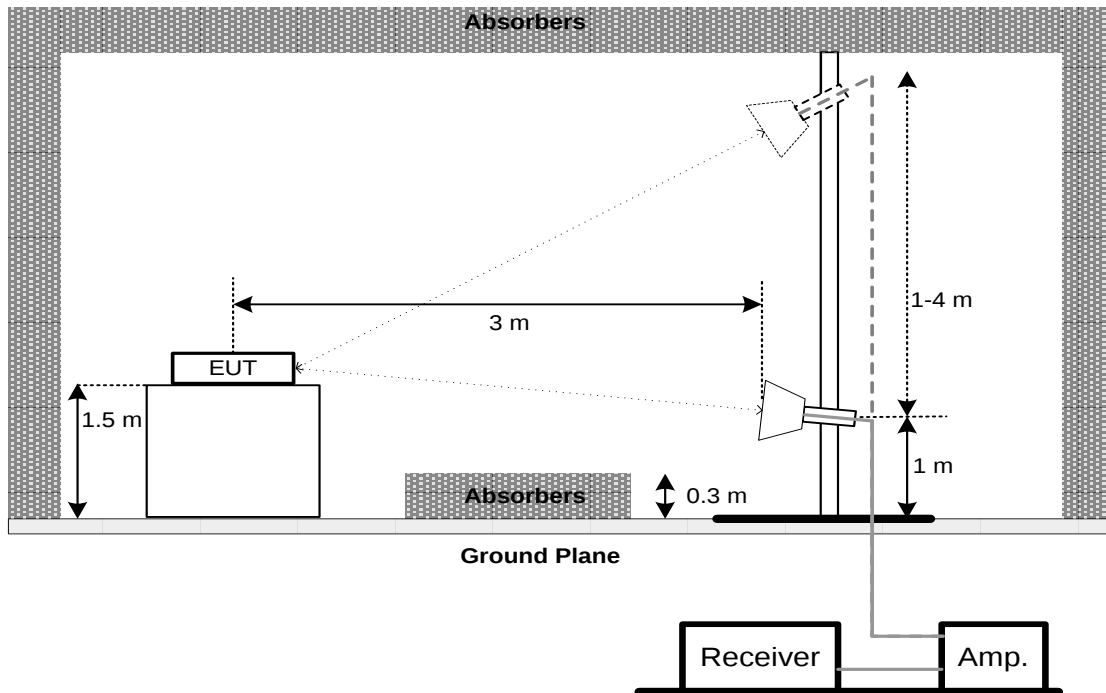

Harmonic(18 GHz to 26.5 GHz)

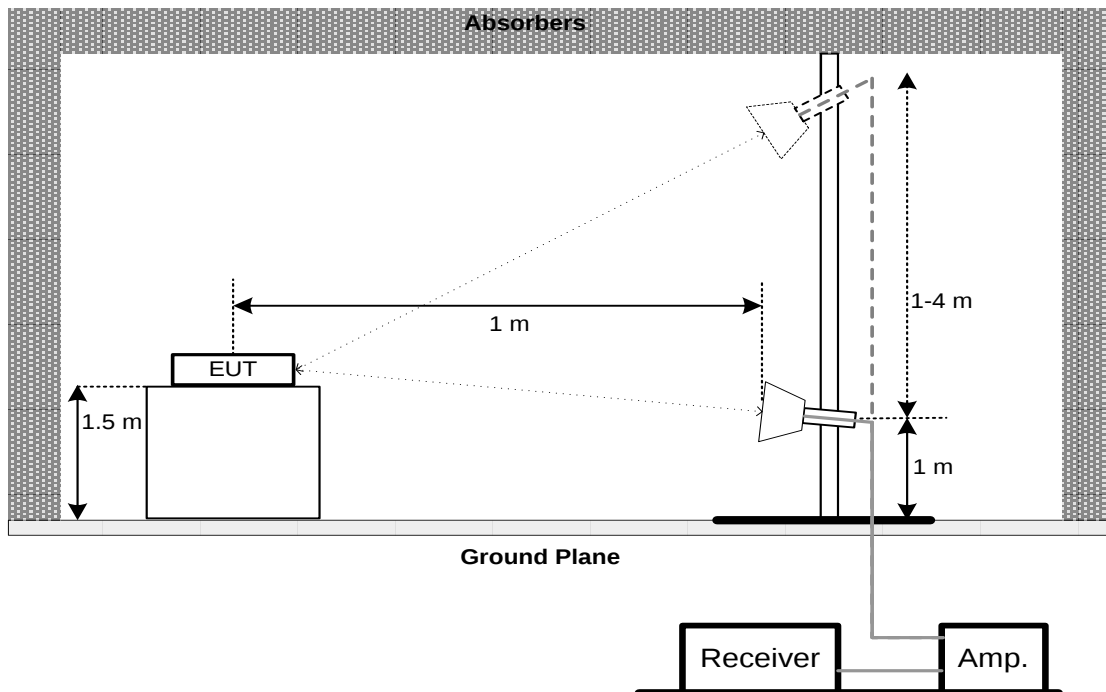

5.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

5.6 TEST RESULTS - 9 KHZ TO 30 MHZ

Please refer to the APPENDIX B.

Remark:

- (1) Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB).
- (2) Limit line = specific limits (dBuV) + distance extrapolation factor.

5.7 TEST RESULTS - 30 MHZ TO 1000 MHZ

Please refer to the APPENDIX C.

5.8 TEST RESULTS - ABOVE 1000 MHZ

Please refer to the APPENDIX D.

Remark:

- (1) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

6. BANDWIDTH

6.1 LIMIT

Section	Test Item	Limit
FCC 15.247(a)(2)	6 dB Bandwidth	Minimum 500 kHz
	99% Emission Bandwidth	-

6.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- The following table is the setting of the spectrum analyzer:

For 6 dB Bandwidth:

Spectrum Parameters	Setting
Span Frequency	> Measurement Bandwidth
RBW	100 kHz
VBW	300 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

For 99% Emission Bandwidth:

Spectrum Parameters	Setting
Span Frequency	Between 1.5 times and 5.0 times the OBW
RBW	300 kHz For 20MHz 1 MHz For 40MHz
VBW	1 MHz For 20MHz 3 MHz For 40MHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP



6.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

6.6 TEST RESULTS

Please refer to the APPENDIX E.

7. MAXIMUM OUTPUT POWER

7.1 LIMIT

Section	Test Item	Limit
FCC 15.247(b)(3)	Maximum Output Power	1.0000 Watt or 30.00 dBm


7.2 TEST PROCEDURE

- The EUT was directly connected to the peak power analyzer and antenna output port as show in the block diagram below.
- The maximum conducted output power was performed in accordance with method 11.9.2.3.1 (for AVG power) of ANSI C63.10-2013 and FCC KDB 662911 D01 v02r01 Multiple Transmitter Output.

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP

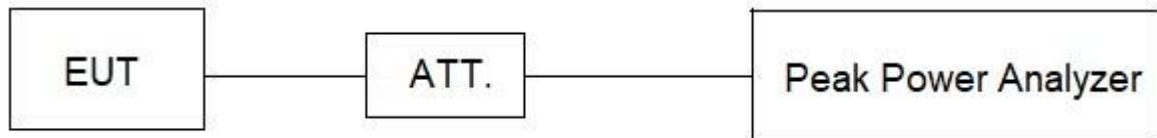

7.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

7.6 TEST RESULTS

Please refer to the APPENDIX F.

8. CONDUCTED SPURIOUS EMISSIONS

8.1 LIMIT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak Output Power limits. If the transmitter complies with the Output Power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required.

8.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- The following table is the setting of the spectrum analyzer:

Spectrum Parameters	Setting
Start Frequency	30 MHz
Stop Frequency	26.5 GHz
RBW	100 kHz
VBW	300 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

8.3 DEVIATION FROM STANDARD

No deviation.

8.4 TEST SETUP



8.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

8.6 TEST RESULTS

Please refer to the APPENDIX G.

9. POWER SPECTRAL DENSITY

9.1 LIMIT

Section	Test Item	Limit
FCC 15.247(e)	Power Spectral Density	8 dBm (in any 3 kHz)

9.2 TEST PROCEDURE


- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- The following table is the setting of the spectrum analyzer:

Spectrum Parameters	Setting
Span Frequency	25 MHz (20 MHz) / 60 MHz (40 MHz)
RBW	3 kHz
VBW	10 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

9.3 DEVIATION FROM STANDARD

No deviation.

9.4 TEST SETUP

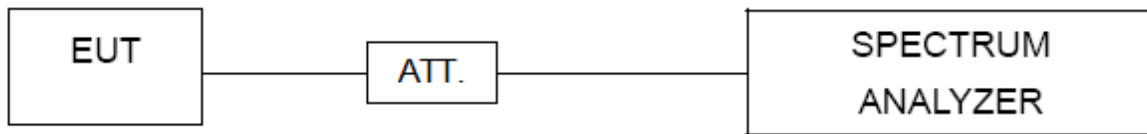

9.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

9.6 TEST RESULTS

Please refer to the APPENDIX H.

10. MEASUREMENT INSTRUMENTS LIST

AC Power Line Conducted Emissions					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	EMI TEST RECEIVER	R&S	ESCI	100382	Dec. 06, 2025
2	TWO-LINE V-NETWORK	R&S	ENV216	101447	Dec. 06, 2025
3	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
4	Cable	N/A	SFT205-NMNM-9M -001	9M	Nov. 11, 2025
5	643 Shield Room	ETS	6*4*3	N/A	N/A

Radiated Emissions - 9 kHz to 30 MHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Active Loop Antenna	Schwarzbeck	FMZB 1513-60	00025	Mar. 01, 2026
2	MXE EMI Receiver	Keysight	N9038A	MY56400091	Dec. 06, 2025
3	Cable	N/A	RW4950-3.8A-NMS M-1.5	N/A	Nov. 12, 2025
4	Cable	N/A	LMR400-NMNM-8 M	N/A	Nov. 12, 2025
5	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
6	966 Chamber room	ETS	9*6*6	N/A	May 16, 2025

Radiated Emissions - 30 MHz to 1 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Trilog-Broadband Antenna	Schwarzbeck	VULB 9168	1587	Apr. 25, 2025
2	Attenuator	EMC INSTRUMENT	EMCI-N-6-06	AT-06010	Apr. 25, 2025
3	Preamplifier	EMC INSTRUMENT	EMC001330	980865	Oct. 29, 2025
4	Cable	RegalWay	LMR400-NMNM-2. 5m	N/A	Jan. 07, 2026
5	Cable	RegalWay	LMR400-NMNM-7 m	N/A	Jan. 07, 2026
6	Cable	RegalWay	LMR400-NMNM-3 m	N/A	Jan. 07, 2026
7	Receiver	Agilent	N9038A	MY52130039	Jan. 10, 2026
8	Multi-Device Controller	ETS-Lindgren	N/A	N/A	N/A
9	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
10	966 Chamber room	ETS	9*6*6	N/A	Jan. 02, 2026

Radiated Emissions - 1 GHz to 18GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Multi-Device Controller	ETS-Lindgren	N/A	N/A	N/A
2	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
3	Cable	RegalWay	RWLP50-4.0A-SMS M-1.3M	N/A	Jan. 07, 2026
4	Cable	RegalWay	RWLP50-2.6A-3.5 M2.92MRA-3M	N/A	Jan. 07, 2026
5	Cable	RegalWay	RWLP50-4.0A-SMS M-9M	N/A	Jan. 07, 2026
6	966 Chamber room	ETS	RFD-100(SVSWR)	Q2179	Jan. 07, 2026
7	Double Ridged Horn Antenna	EMC INSTRUMENT	DRH18-E	210509A18ES	Aug. 28, 2025
8	Preamplifier	EMC INSTRUMENT	EMC118A45SE	981001	May 31, 2025
9	Attenuator	Talent Microwave	TA10A2-S-18	N/A	N/A
10	Filter	STI	STI15-9912	N/A	Oct. 29, 2025
11	MXA Signal Analyzer	KEYSIGHT	N9020B	MY63430227	Oct. 29, 2025

Radiated Emissions - Above 18 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	MXA Signal Analyzer	KEYSIGHT	N9020B	MY63380204	Oct. 29, 2025
2	Cable	RegalWay	RWLP50-2.6A-2.92 M2.92M-2M	N/A	Jan. 07, 2026
3	Cable	RegalWay	RWLP50-2.6A-3.5 M2.92MMRA-6M	N/A	Jan. 07, 2026
4	Broad-Band Horn Antenna	Schwarzbeck	BBHA9170	1227	Oct. 20, 2025
5	Preamplifier	EMC INSTRUMENT	EMC184045SE	980905	Oct. 29, 2025
6	966 Chamber room	ETS	9*6*6	N/A	Jan. 03, 2026
7	Multi-Device Controller	ETS-Lindgren	N/A	N/A	N/A
8	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Bandwidth & Conducted Spurious Emissions & Power Spectral Density					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP40	100185	May 31, 2025
2	CTA	BTL	CTA	N/A	N/A
3	Isolation attenuator	Z-Link	ASMA-16-18-2W	N/A	N/A

Maximum Output Power					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Peak Power Analyzer	Keysight	8990B	MY51000506	May 31, 2025
2	Wideband power sensor	Keysight	N1923A	MY58310004	May 31, 2025
3	Isolation attenuator	Z-Link	ASMA-10-18-2W	N/A	N/A

Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of equipment list is one year.



11. EUT TEST PHOTO

AC Power Line Conducted Emissions Test Photos





Radiated Emissions Test Photos

9 kHz to 30 MHz

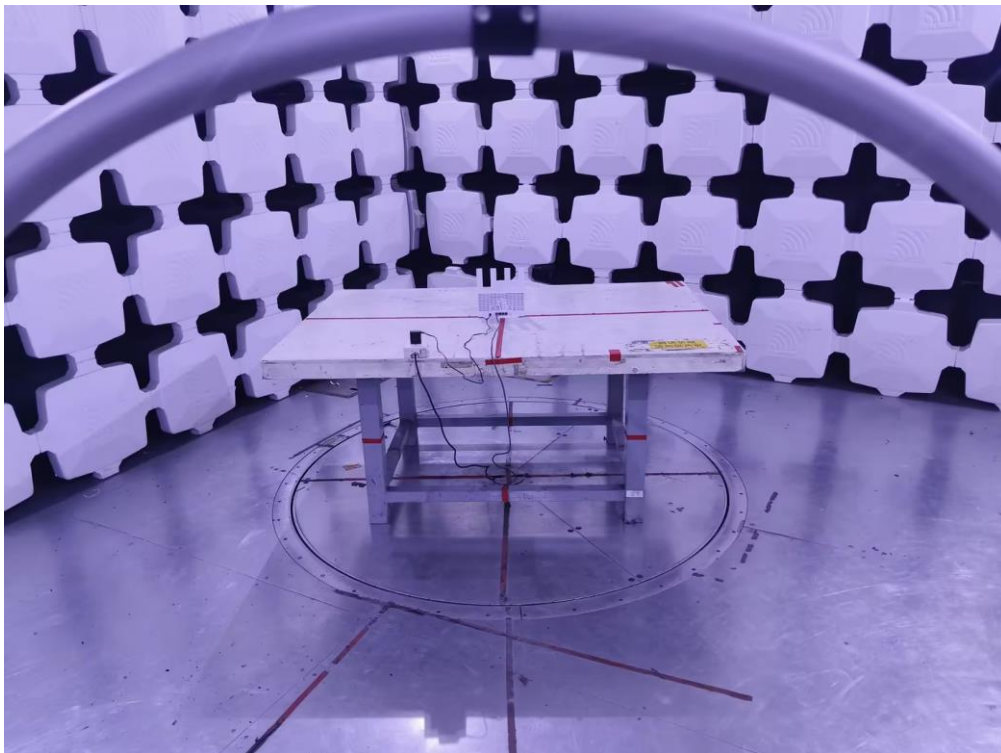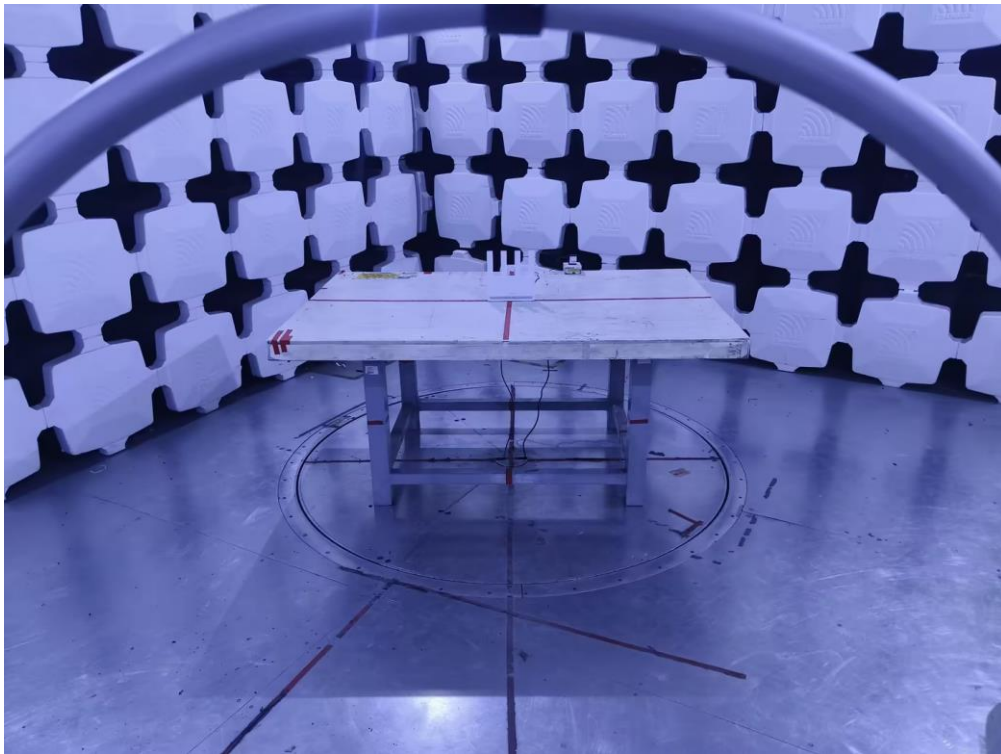



Radiated Emissions Test Photos


30 MHz to 1 GHz

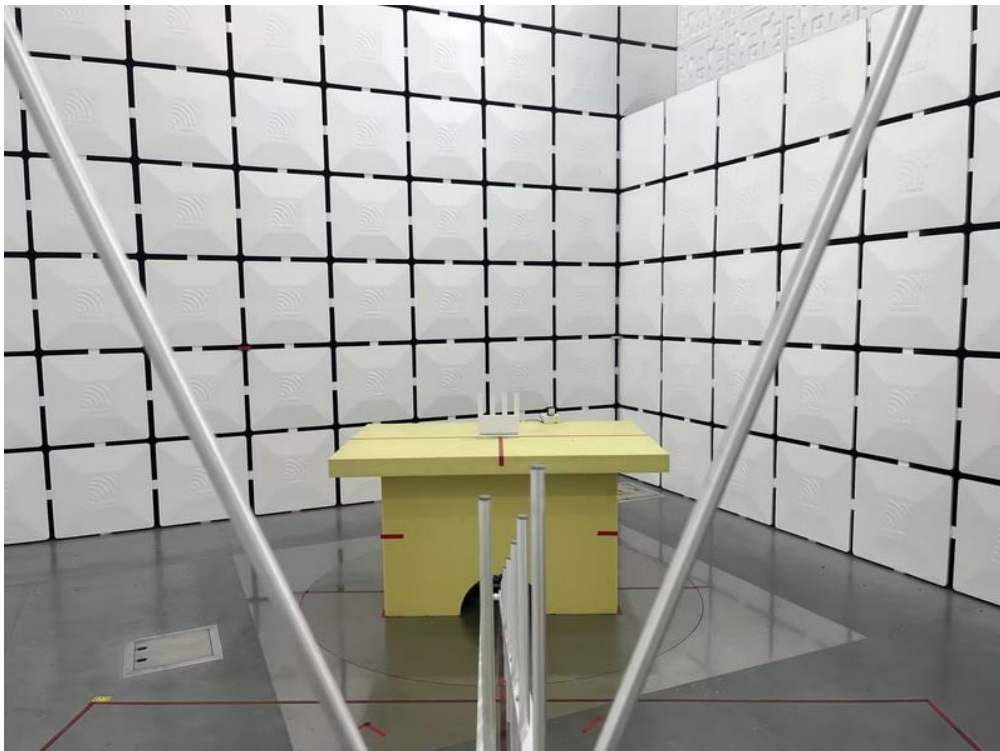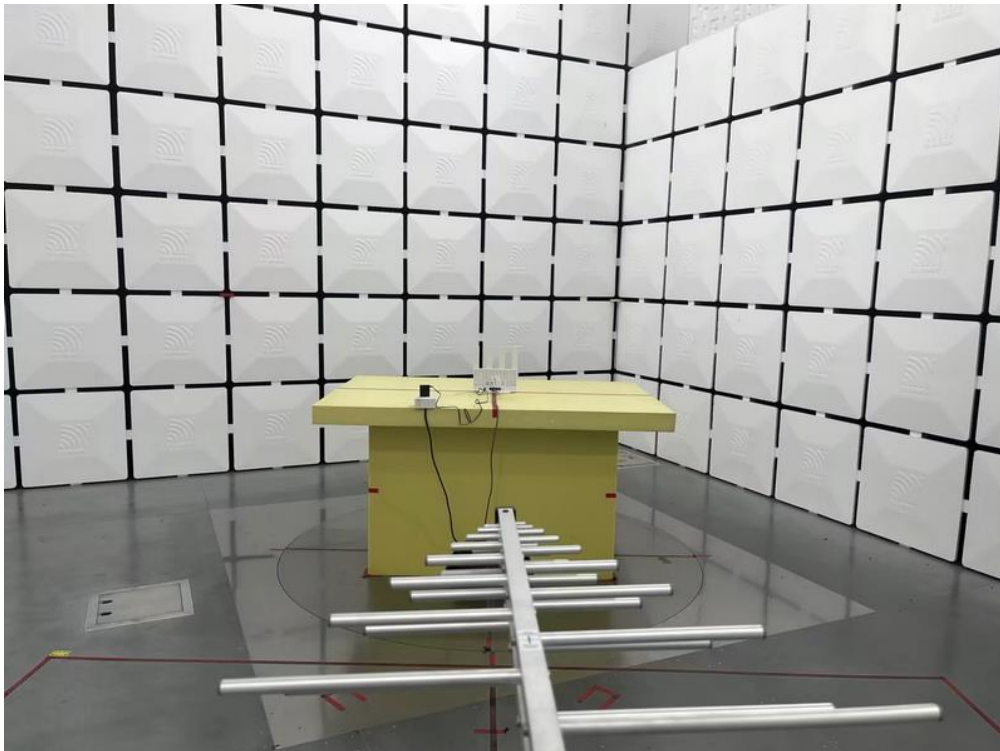



Radiated Emissions Test Photos

Band edge & Harmonic(1 GHz to 18 GHz)

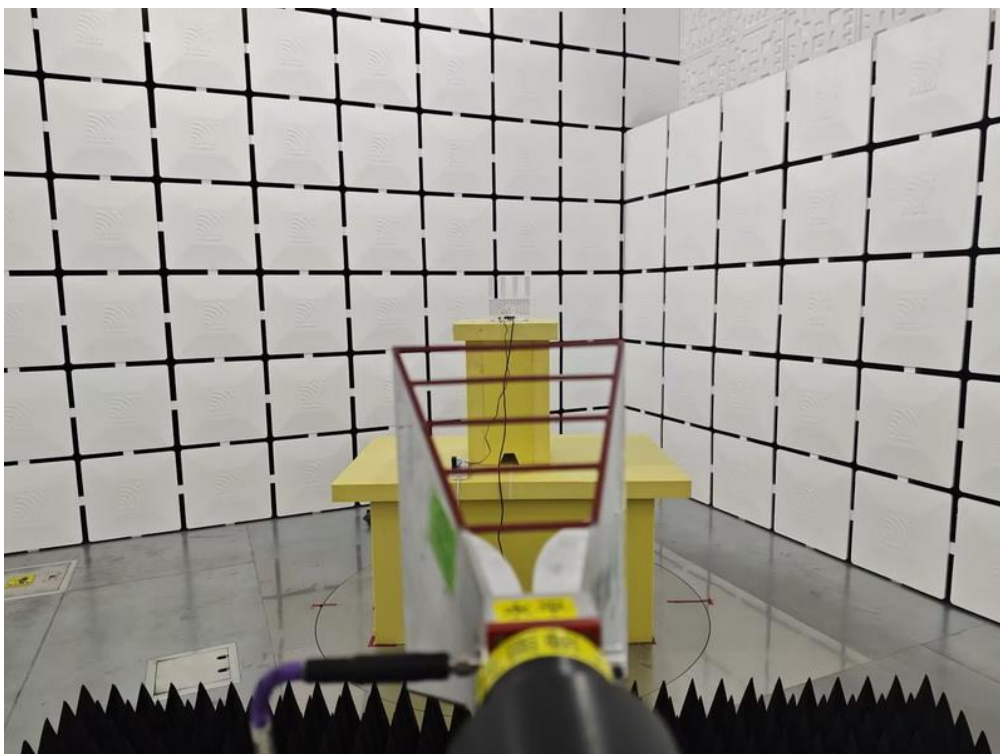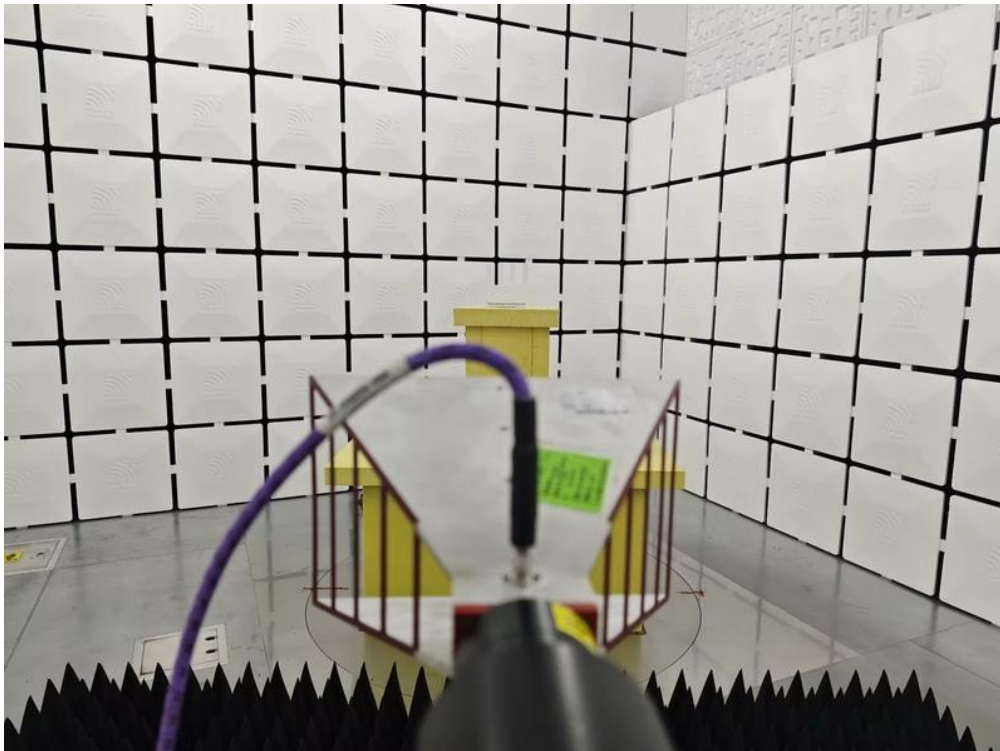

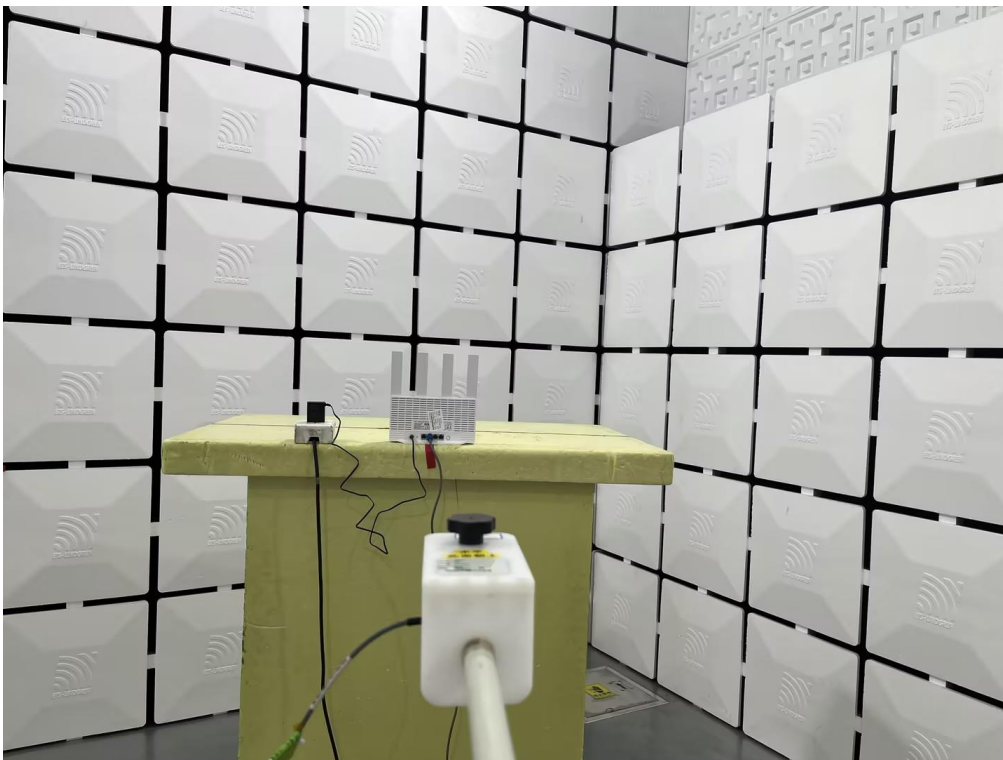
Radiated Emissions Test Photos**Harmonic(18 GHz to 26.5 GHz)**

Conducted Test Photos

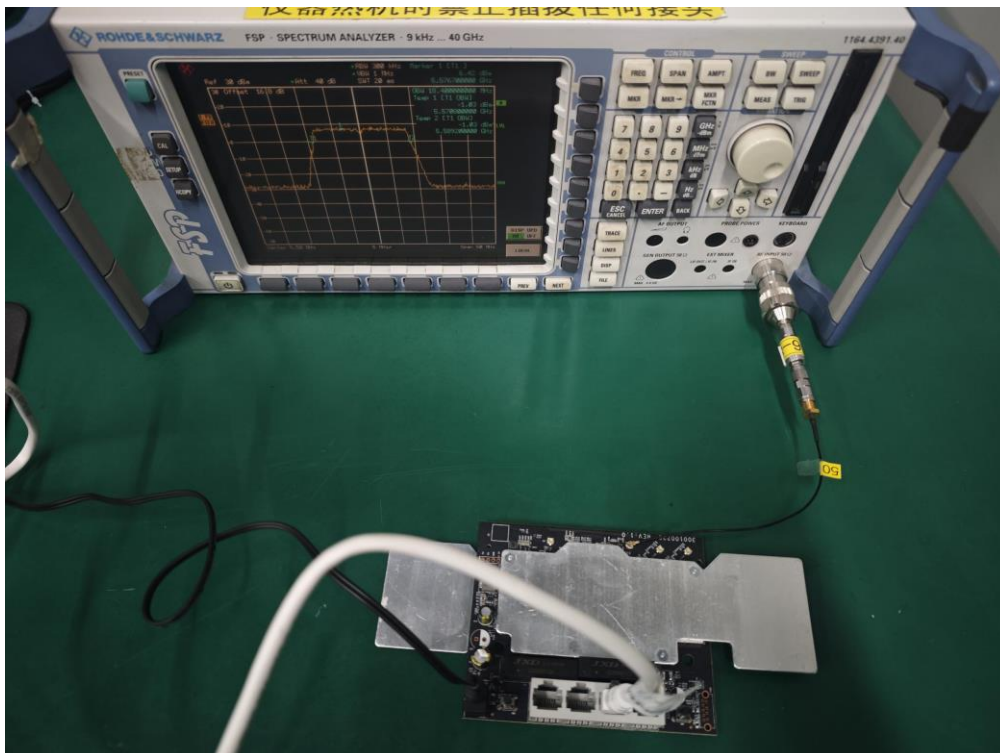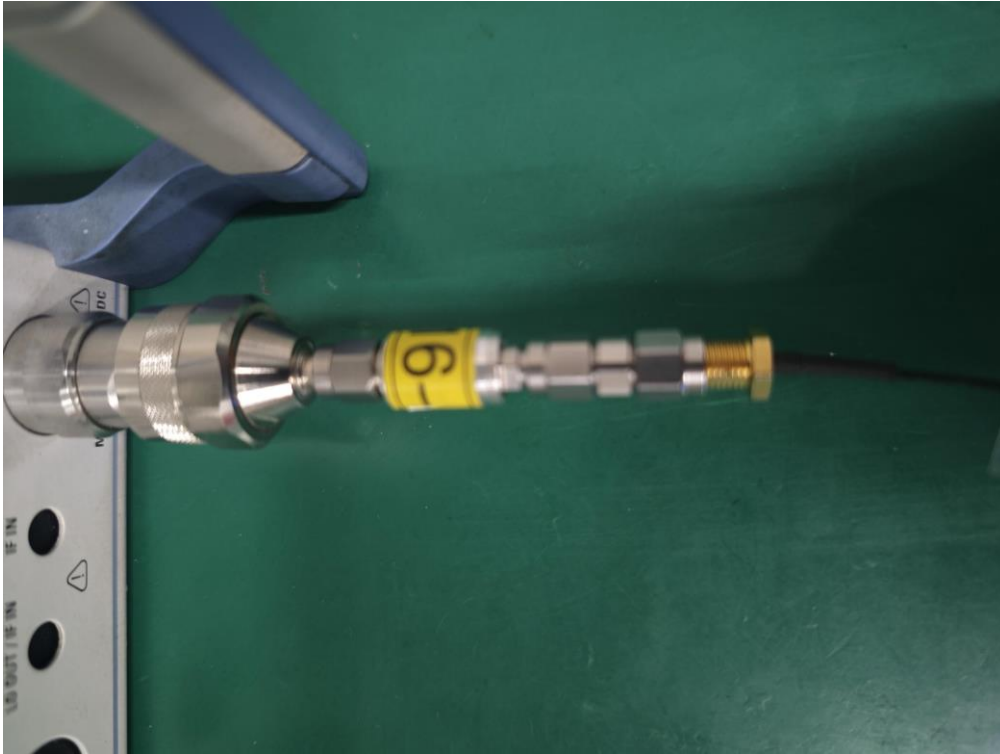

APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS

Test Mode	TX N(HT20) Mode Channel 06	Phase	Line
-----------	----------------------------	-------	------

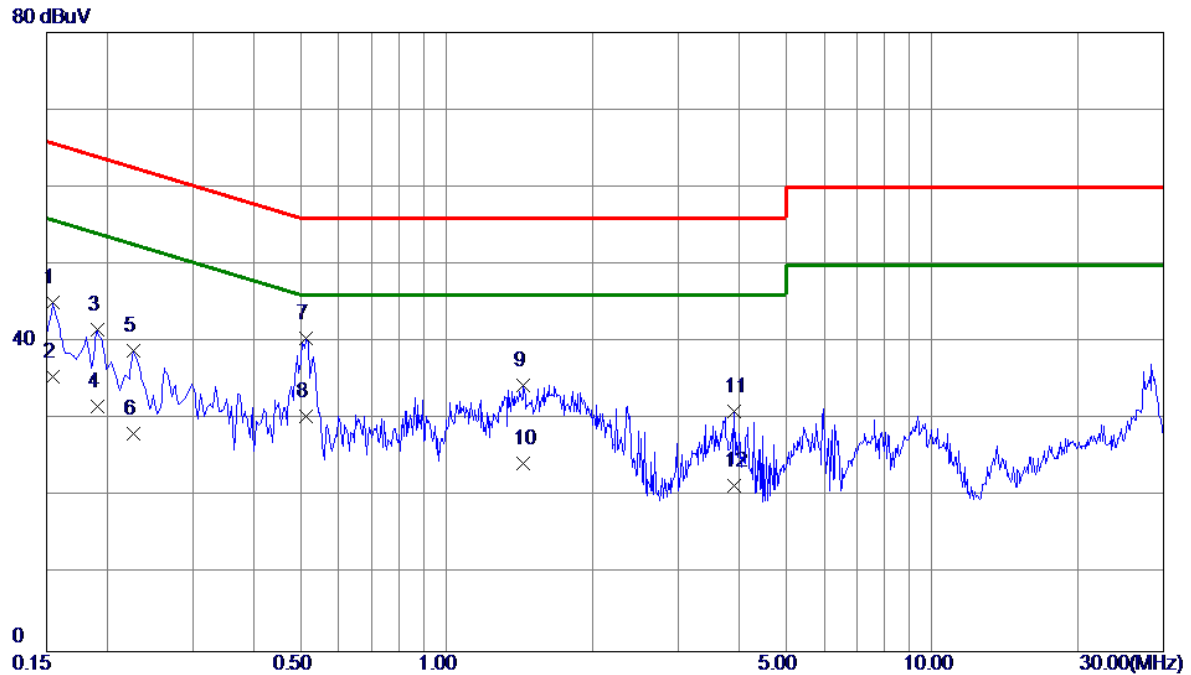


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1545	35.15	9.90	45.05	65.75	-20.70	QP	
2	0.1545	25.61	9.90	35.51	55.75	-20.24	AVG	
3	0.1905	31.74	9.91	41.65	64.01	-22.36	QP	
4	0.1905	21.80	9.91	31.71	54.01	-22.30	AVG	
5	0.2265	28.94	9.90	38.84	62.58	-23.74	QP	
6	0.2265	18.30	9.90	28.20	52.58	-24.38	AVG	
7 *	0.5144	30.52	9.96	40.48	56.00	-15.52	QP	
8	0.5144	20.50	9.96	30.46	46.00	-15.54	AVG	
9	1.4415	24.29	10.11	34.40	56.00	-21.60	QP	
10	1.4415	14.20	10.11	24.31	46.00	-21.69	AVG	
11	3.9030	20.48	10.49	30.97	56.00	-25.03	QP	
12	3.9030	10.90	10.49	21.39	46.00	-24.61	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT20) Mode Channel 06	Phase	Neutral
-----------	----------------------------	-------	---------

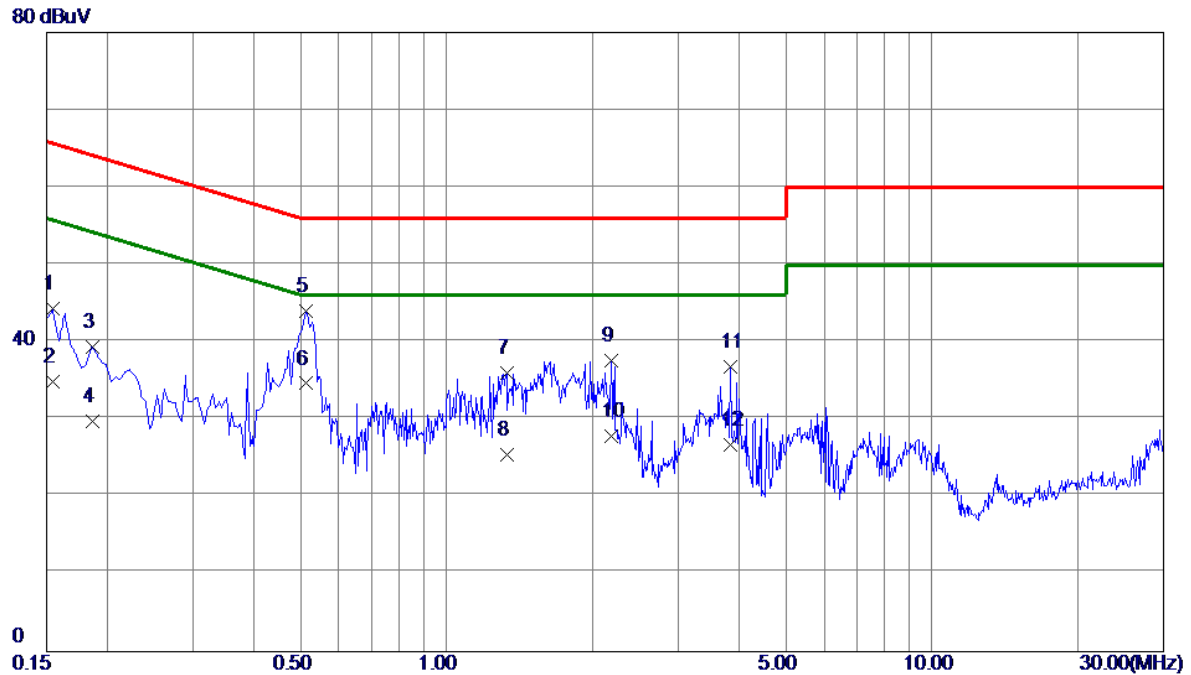


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1545	34.36	9.97	44.33	65.75	-21.42	QP	
2	0.1545	24.91	9.97	34.88	55.75	-20.87	AVG	
3	0.1860	29.44	9.97	39.41	64.21	-24.80	QP	
4	0.1860	19.80	9.97	29.77	54.21	-24.44	AVG	
5	0.5144	34.02	10.04	44.06	56.00	-11.94	QP	
6 *	0.5144	24.60	10.04	34.64	46.00	-11.36	AVG	
7	1.3290	25.78	10.15	35.93	56.00	-20.07	QP	
8	1.3290	15.30	10.15	25.45	46.00	-20.55	AVG	
9	2.1795	27.26	10.28	37.54	56.00	-18.46	QP	
10	2.1795	17.50	10.28	27.78	46.00	-18.22	AVG	
11	3.8445	26.27	10.53	36.80	56.00	-19.20	QP	
12	3.8445	16.21	10.53	26.74	46.00	-19.26	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ

Test Mode	TX N(HT20) Mode Channel 06	Polarization	Ant 0°
-----------	----------------------------	--------------	--------

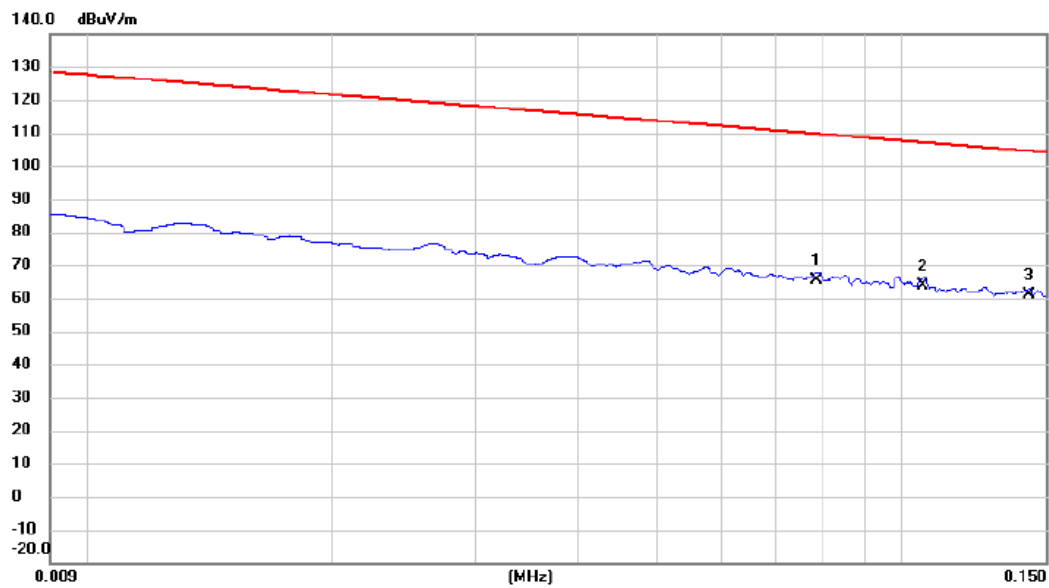


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		0.0786	44.24	21.34	65.58	109.70	-44.12	AVG	
2		0.1061	42.31	21.33	63.64	107.09	-43.45	AVG	
3	*	0.1432	39.87	21.28	61.15	104.49	-43.34	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT20) Mode Channel 06	Polarization	Ant 0°
-----------	----------------------------	--------------	--------

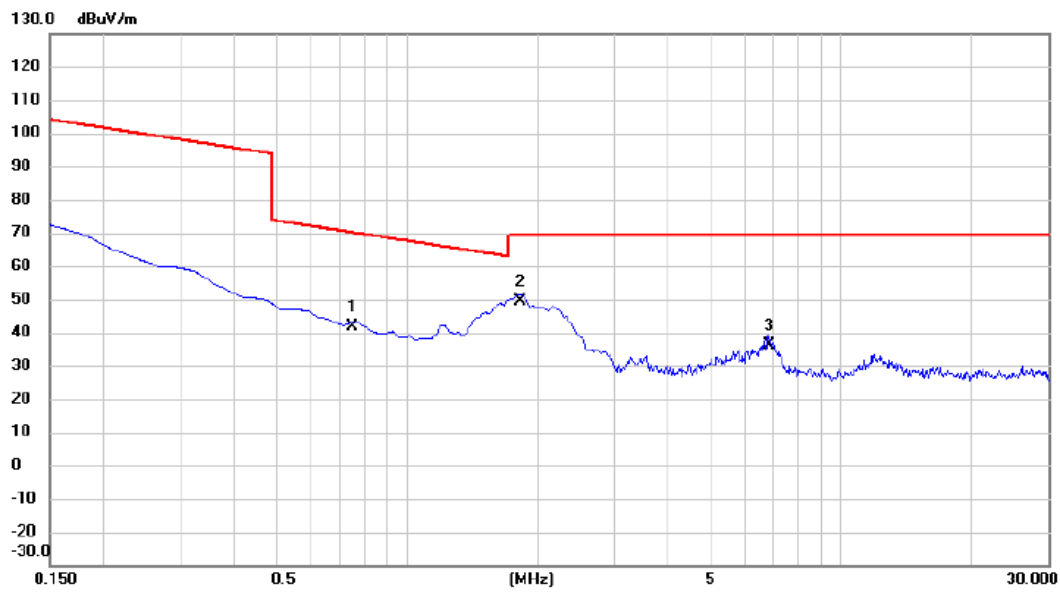


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		0.7470	20.57	21.14	41.71	70.14	-28.43	QP	
2	*	1.8216	28.19	21.13	49.32	69.54	-20.22	QP	
3		6.8364	15.24	21.14	36.38	69.54	-33.16	QP	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT20) Mode Channel 06	Polarization	Ant 90°
-----------	----------------------------	--------------	---------

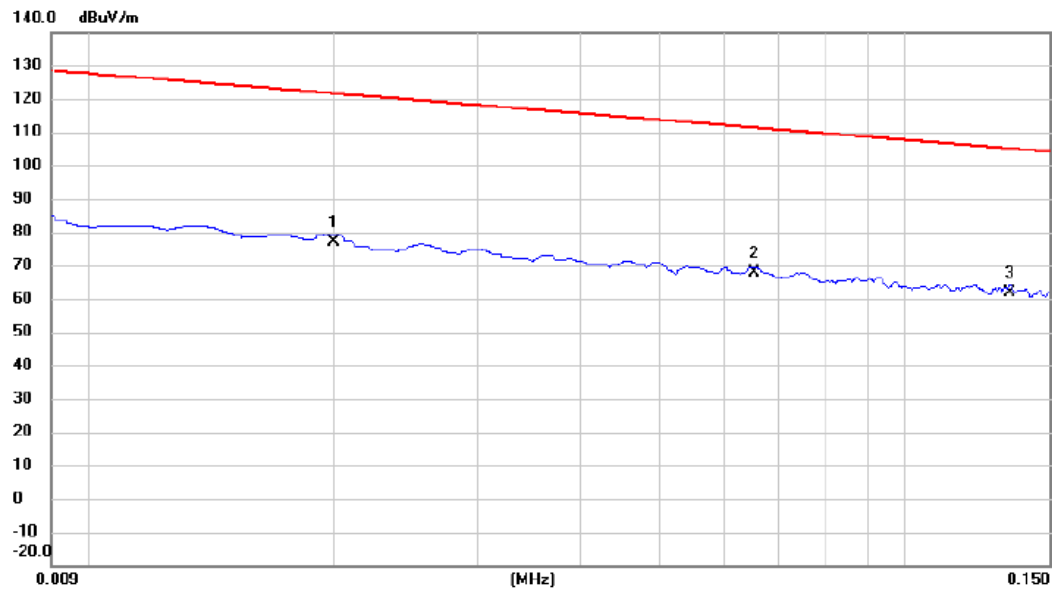


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		0.0200	56.24	20.84	77.08	121.58	-44.50	AVG	
2		0.0653	46.33	21.29	67.62	111.31	-43.69	AVG	
3	*	0.1345	40.57	21.29	61.86	105.03	-43.17	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT20) Mode Channel 06	Polarization	Ant 90°
-----------	----------------------------	--------------	---------

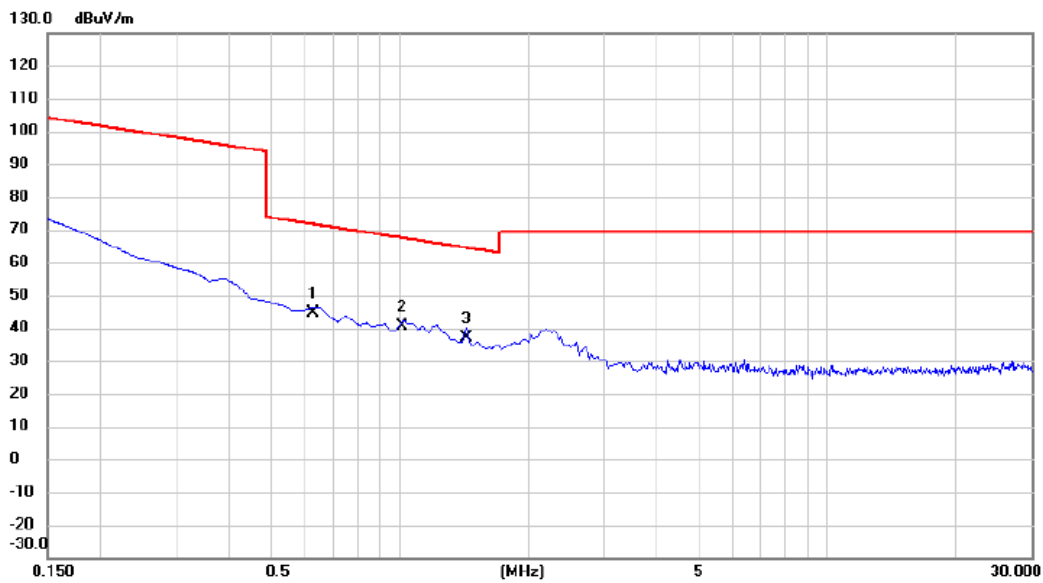

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	0.6276	23.43	21.10	44.53	71.65	-27.12	QP	
2 *	1.0156	19.26	21.20	40.46	67.47	-27.01	QP	
3	1.4336	15.68	21.16	36.84	64.48	-27.64	QP	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ

Test Mode	TX N(HT20) Mode Channel 06	Polarization	Vertical
-----------	----------------------------	--------------	----------

80 dBuV/m

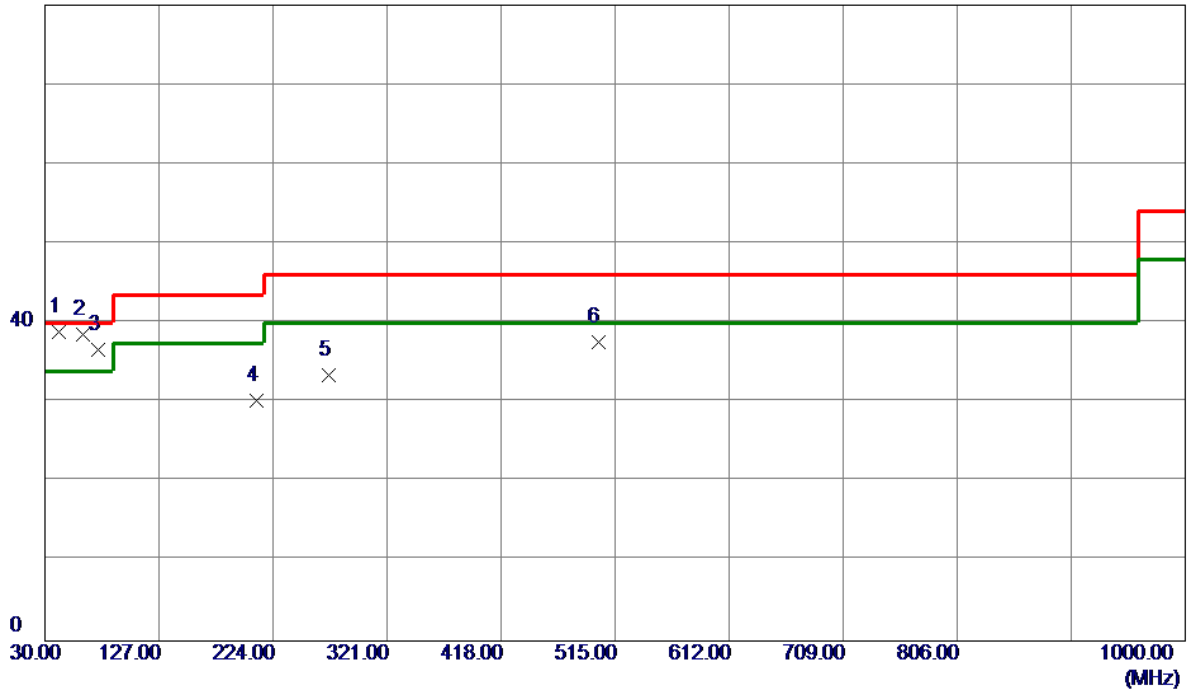


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	41. 6400	50. 72	-11. 83	38. 89	40. 00	-1. 11	QP	
2	62. 0100	50. 88	-12. 26	38. 62	40. 00	-1. 38	Peak	
3	75. 5899	51. 41	-14. 77	36. 64	40. 00	-3. 36	QP	
4	210. 4200	44. 92	-14. 66	30. 26	43. 50	-13. 24	Peak	
5	271. 5300	45. 35	-11. 84	33. 51	46. 00	-12. 49	Peak	
6	500. 4500	43. 86	-6. 23	37. 63	46. 00	-8. 37	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT20) Mode Channel 06	Polarization	Horizontal
-----------	----------------------------	--------------	------------

80 dBuV/m

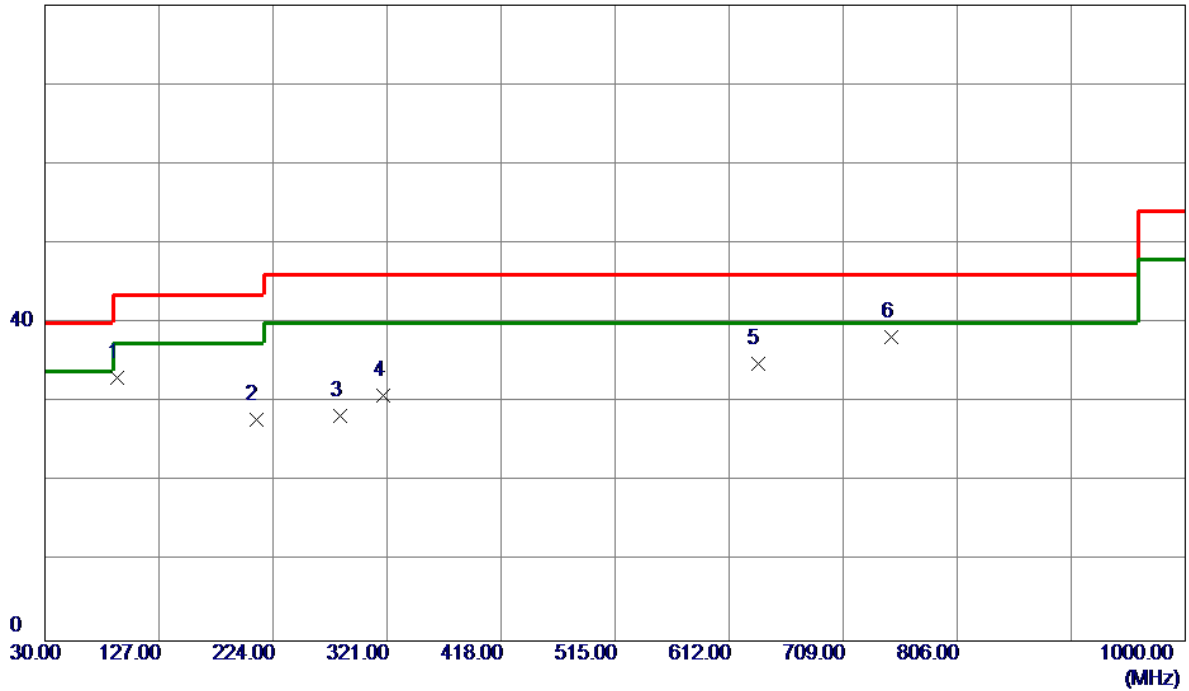

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	91.1100	50.20	-17.02	33.18	43.50	-10.32	Peak	
2	209.4500	42.44	-14.66	27.78	43.50	-15.72	Peak	
3	281.2300	39.71	-11.39	28.32	46.00	-17.68	Peak	
4	318.0900	41.16	-10.28	30.88	46.00	-15.12	Peak	
5	636.2500	38.42	-3.58	34.84	46.00	-11.16	Peak	
6 *	749.7400	39.97	-1.80	38.17	46.00	-7.83	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX D - RADIATED EMISSION- ABOVE 1000 MHZ

Test Mode	TX B Mode 2412 MHz	Polarization	Vertical
-----------	--------------------	--------------	----------

130 dBuV/m

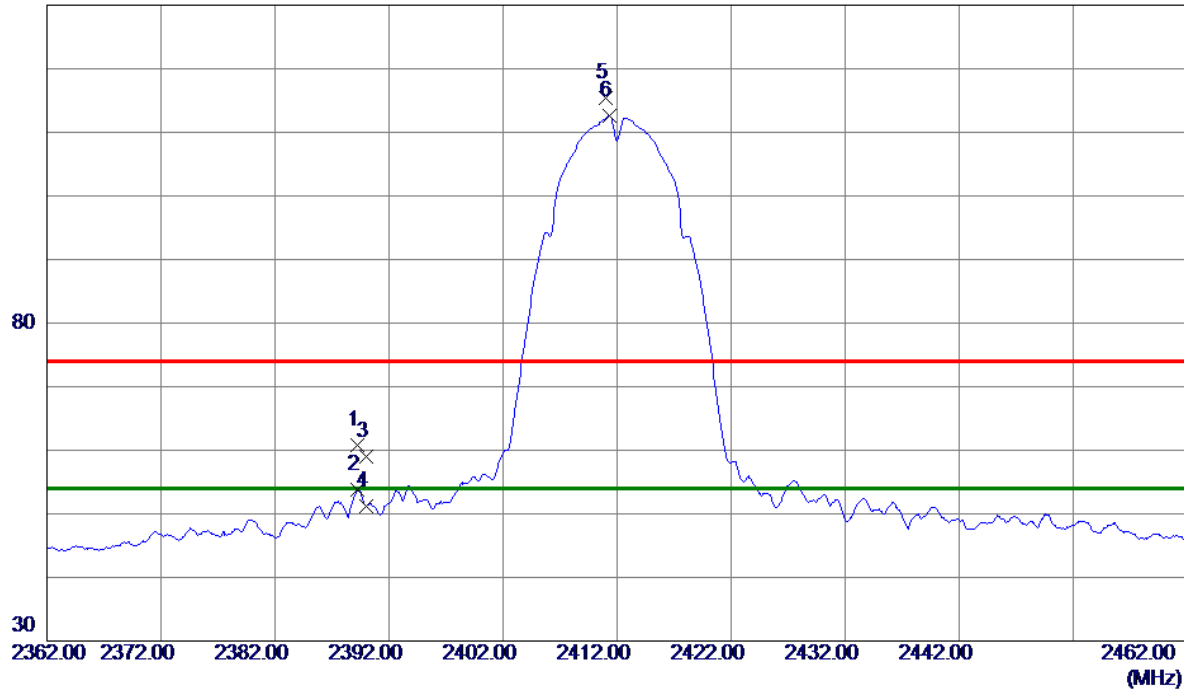


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2389.2000	52.21	8.54	60.75	74.00	-13.25	Peak	
2	2389.2000	45.22	8.54	53.76	54.00	-0.24	AVG	
3	2390.0000	50.37	8.55	58.92	74.00	-15.08	Peak	
4	2390.0000	42.57	8.55	51.12	54.00	-2.88	AVG	
5	2411.0000	106.75	8.60	115.35	74.00	41.35	Peak	No Limit
6 *	2411.3000	103.95	8.60	112.55	54.00	58.55	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX B Mode 2412 MHz	Polarization	Vertical
-----------	--------------------	--------------	----------

100 dBuV/m

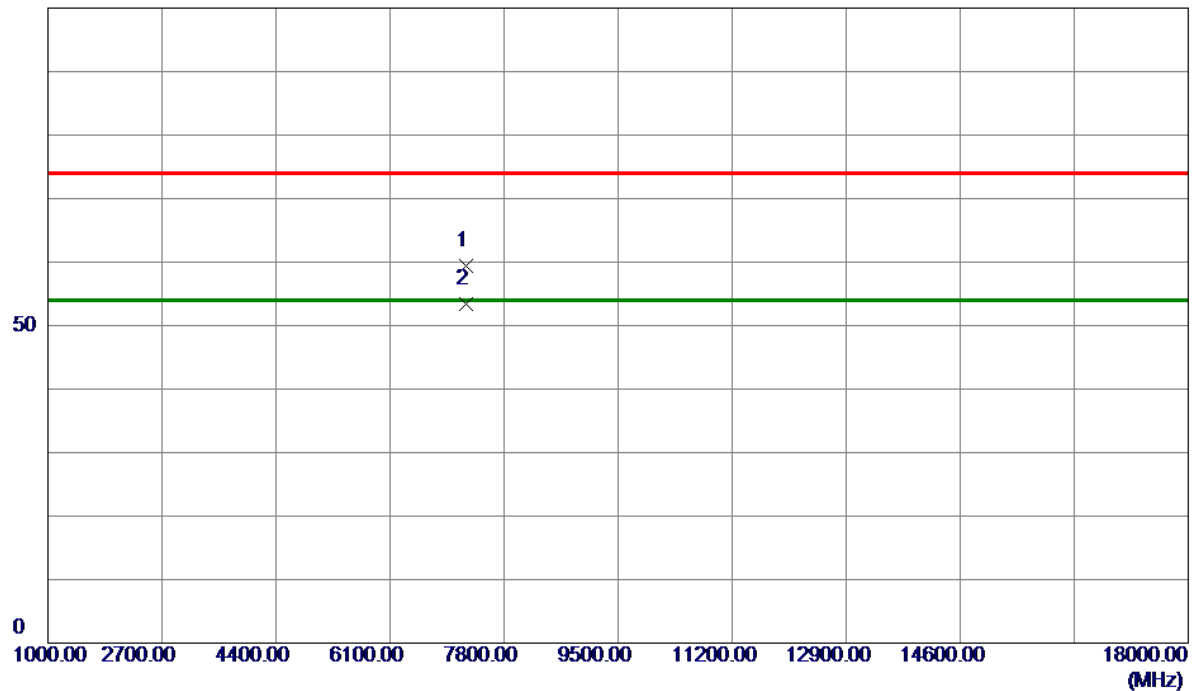


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7234.6500	50.83	8.52	59.35	74.00	-14.65	Peak	
2 *	7235.2000	44.81	8.52	53.33	54.00	-0.67	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX B Mode 2437 MHz	Polarization	Vertical
-----------	--------------------	--------------	----------

130 dBuV/m

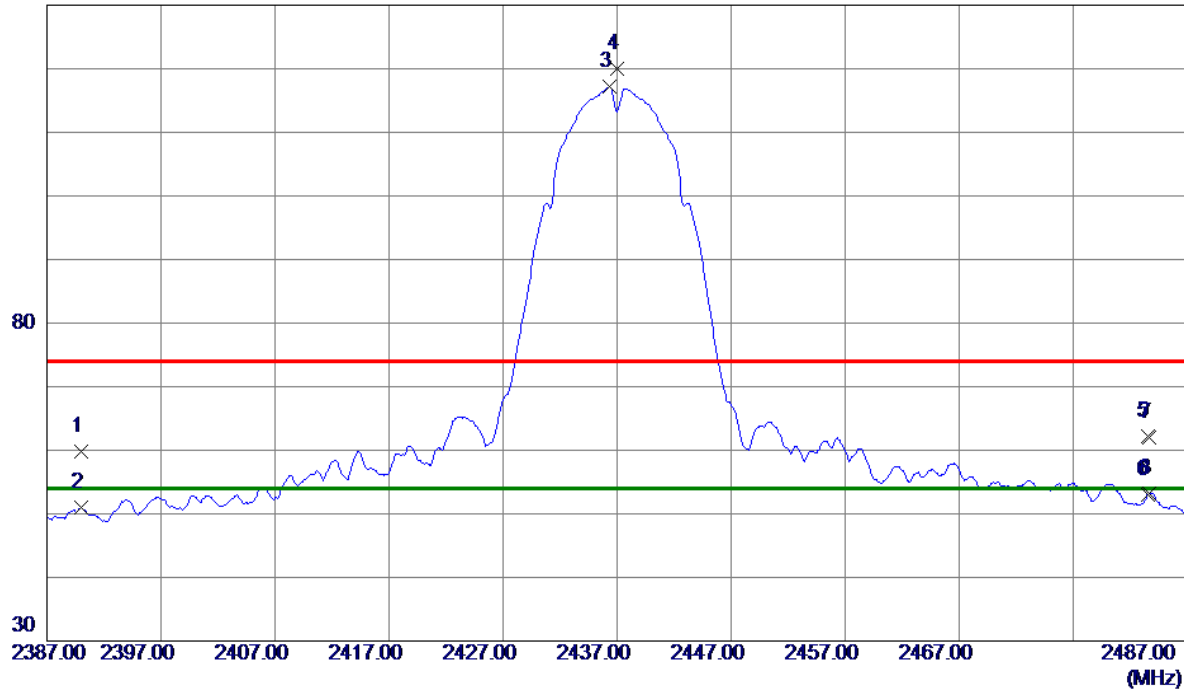


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	51.31	8.55	59.86	74.00	-14.14	Peak	
2	2390.0000	42.43	8.55	50.98	54.00	-3.02	AVG	
3 *	2436.3000	108.52	8.67	117.19	54.00	63.19	AVG	No Limit
4	2437.0000	111.26	8.67	119.93	74.00	45.93	Peak	No Limit
5	2483.5000	53.32	8.79	62.11	74.00	-11.89	Peak	
6	2483.5000	44.19	8.79	52.98	54.00	-1.02	AVG	
7	2483.7000	53.16	8.79	61.95	74.00	-12.05	Peak	
8	2483.7000	44.41	8.79	53.20	54.00	-0.80	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX B Mode 2437 MHz	Polarization	Vertical
-----------	--------------------	--------------	----------

100 dBuV/m

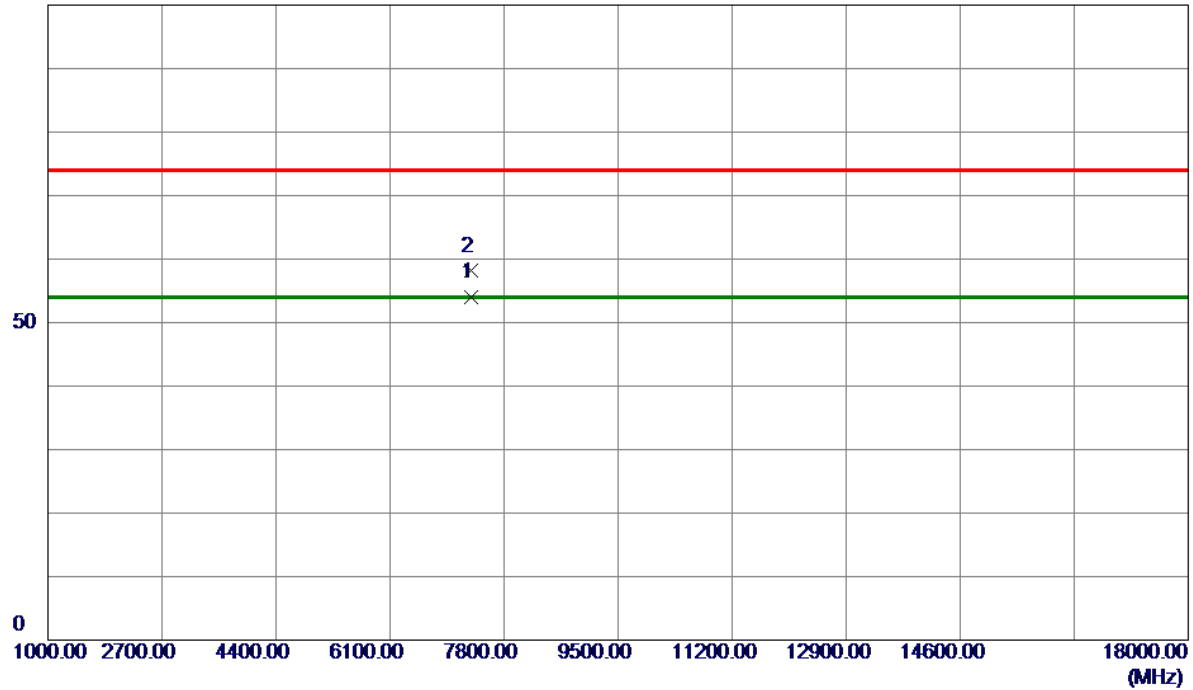


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7310.2500	45.33	8.61	53.94	54.00	-0.06	AVG	
2	7311.1200	49.49	8.61	58.10	74.00	-15.90	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX B Mode 2462 MHz	Polarization	Vertical
-----------	--------------------	--------------	----------

130 dBuV/m

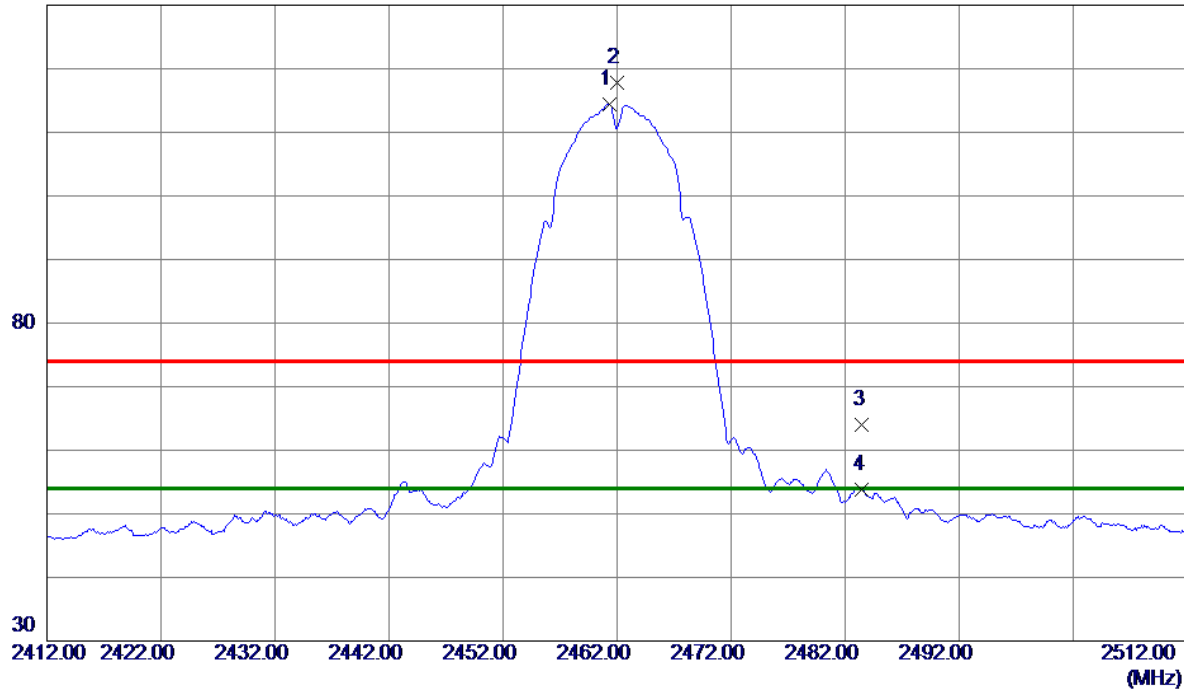


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2461.3000	105.69	8.73	114.42	54.00	60.42	AVG	No Limit
2	2462.0000	108.99	8.73	117.72	74.00	43.72	Peak	No Limit
3	2483.5000	55.22	8.79	64.01	74.00	-9.99	Peak	
4	2483.5000	45.08	8.79	53.87	54.00	-0.13	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX B Mode 2462 MHz	Polarization	Vertical
-----------	--------------------	--------------	----------

100 dBuV/m

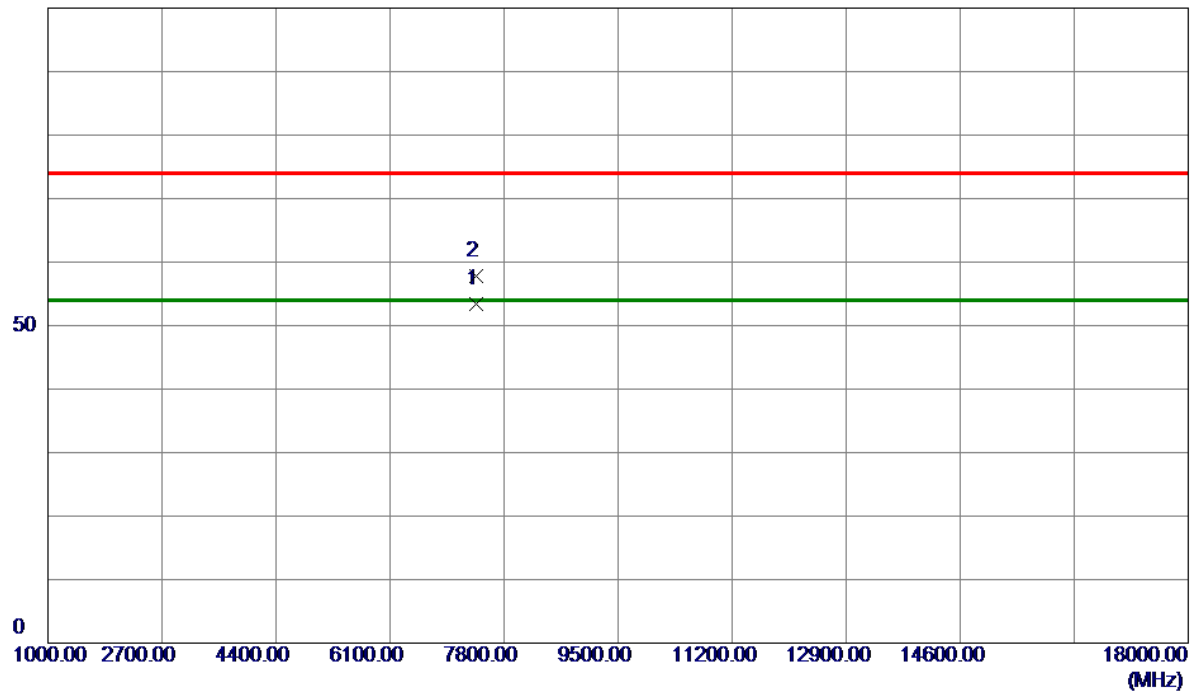


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7385.2800	44.80	8.69	53.49	54.00	-0.51	AVG	
2	7385.9700	49.09	8.69	57.78	74.00	-16.22	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX G Mode 2412 MHz	Polarization	Vertical
-----------	--------------------	--------------	----------

130 dBuV/m

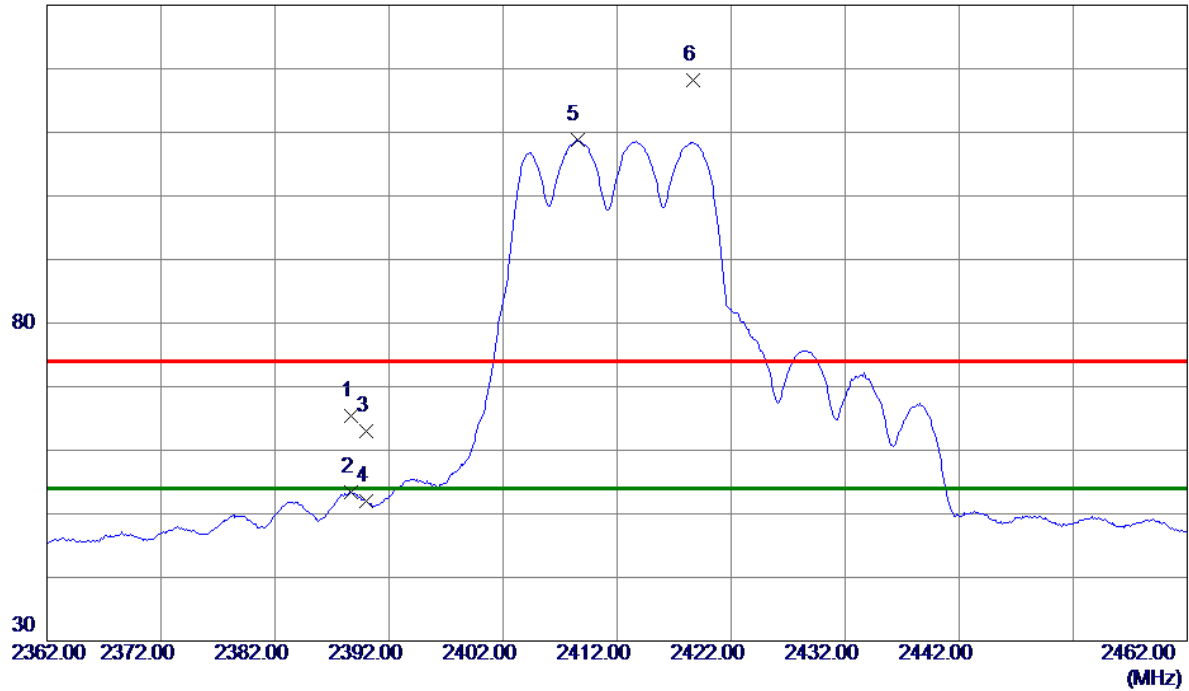


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2388.7000	56.89	8.54	65.43	74.00	-8.57	Peak	
2	2388.7000	44.82	8.54	53.36	54.00	-0.64	AVG	
3	2390.0000	54.46	8.55	63.01	74.00	-10.99	Peak	
4	2390.0000	43.42	8.55	51.97	54.00	-2.03	AVG	
5 *	2408.5000	100.15	8.59	108.74	54.00	54.74	AVG	No Limit
6	2418.7000	109.63	8.62	118.25	74.00	44.25	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX G Mode 2412 MHz	Polarization	Vertical
-----------	--------------------	--------------	----------

100 dBuV/m

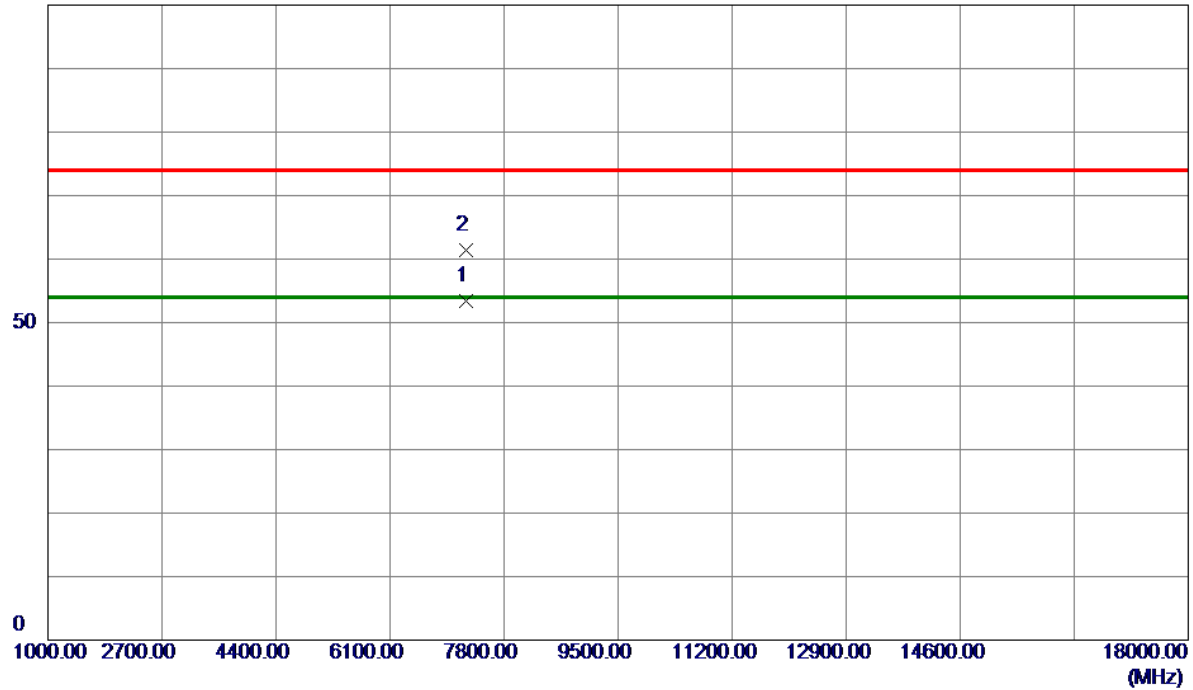


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7236.5000	44.81	8.52	53.33	54.00	-0.67	AVG	
2	7236.4500	52.79	8.52	61.31	74.00	-12.69	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX G Mode 2437 MHz	Polarization	Vertical
-----------	--------------------	--------------	----------

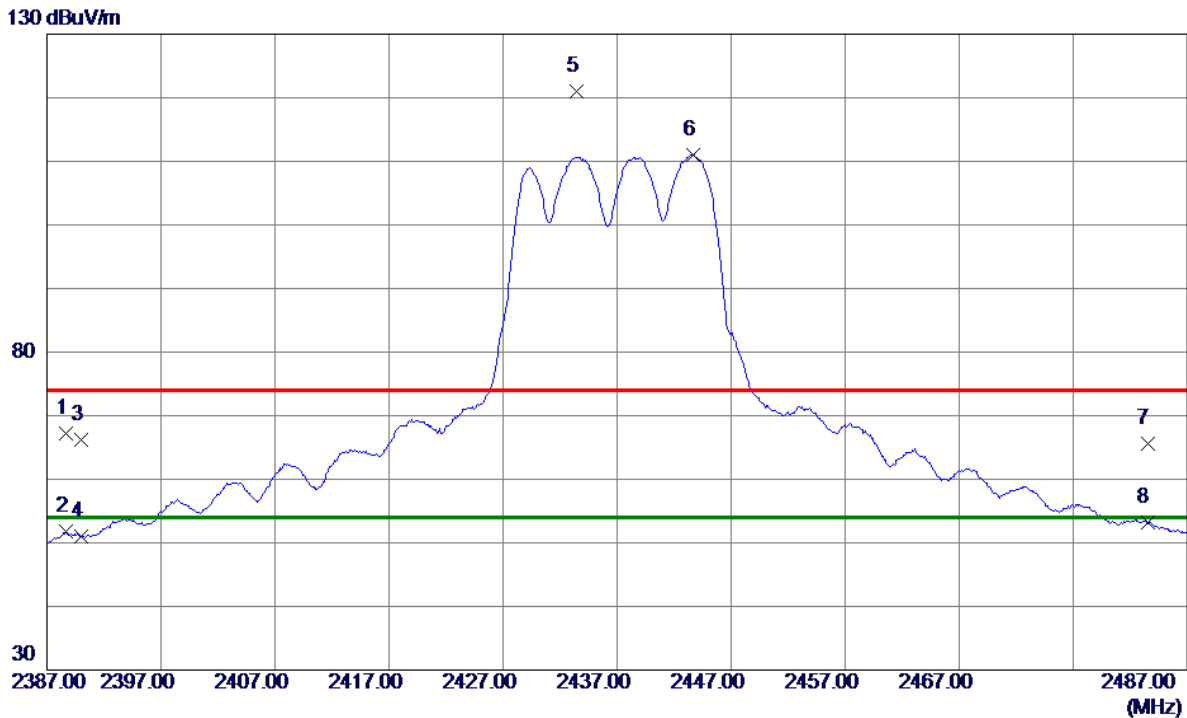


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2388.7000	58.73	8.54	67.27	74.00	-6.73	Peak	
2	2388.7000	43.24	8.54	51.78	54.00	-2.22	AVG	
3	2390.0000	57.56	8.55	66.11	74.00	-7.89	Peak	
4	2390.0000	42.45	8.55	51.00	54.00	-3.00	AVG	
5	2433.4000	112.43	8.66	121.09	74.00	47.09	Peak	No Limit
6 *	2443.7000	102.40	8.69	111.09	54.00	57.09	AVG	No Limit
7	2483.5000	56.89	8.79	65.68	74.00	-8.32	Peak	
8	2483.5000	44.33	8.79	53.12	54.00	-0.88	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX G Mode 2437 MHz	Polarization	Vertical
-----------	--------------------	--------------	----------

100 dBuV/m

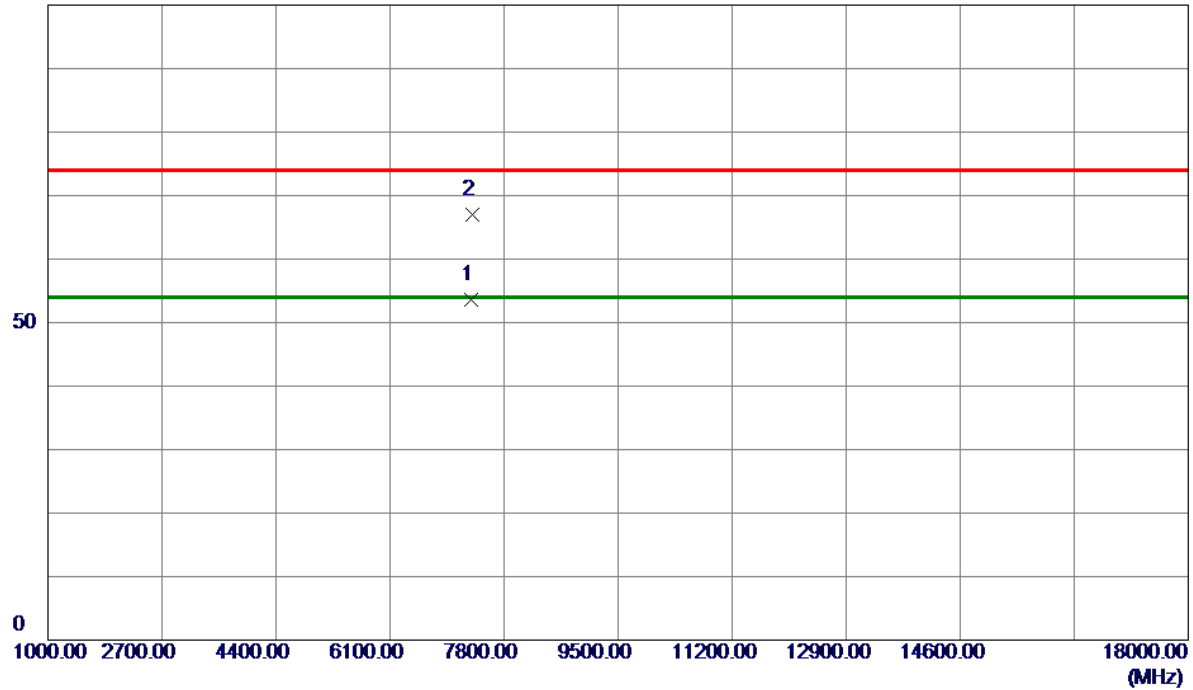


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7311.1500	44.95	8.61	53.56	54.00	-0.44	AVG	
2	7325.9000	58.35	8.62	66.97	74.00	-7.03	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX G Mode 2462 MHz	Polarization	Vertical
-----------	--------------------	--------------	----------

130 dBuV/m

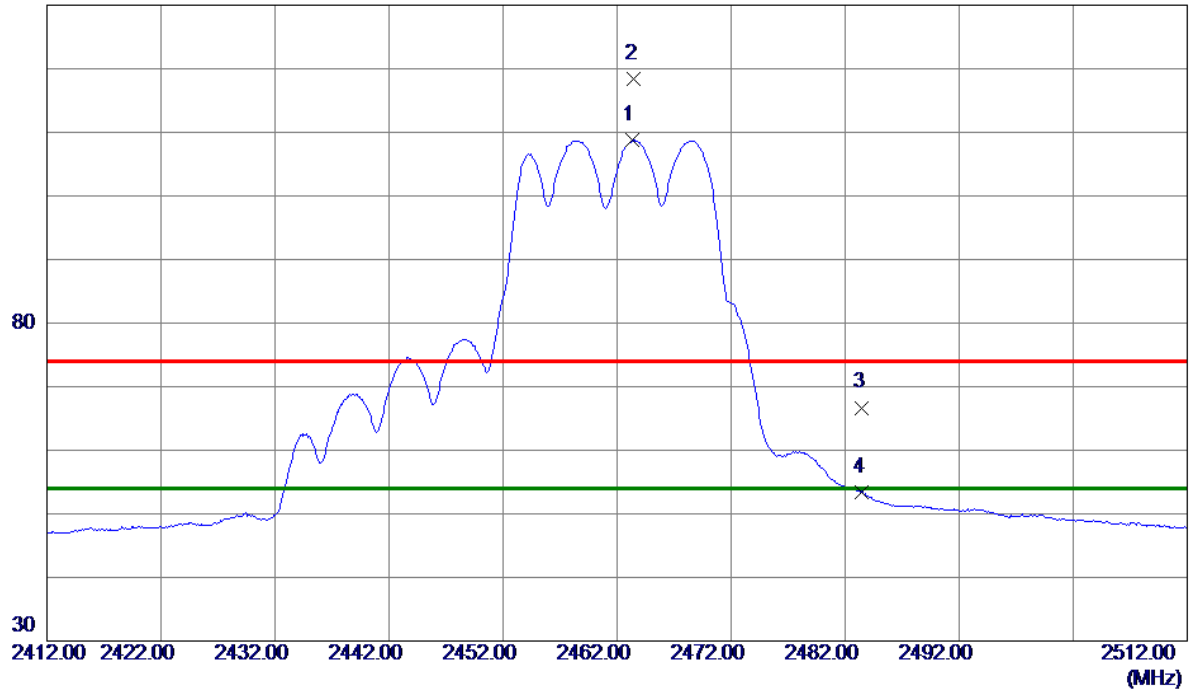


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2463.3000	100.14	8.74	108.88	54.00	54.88	AVG	No Limit
2	2463.5000	109.73	8.74	118.47	74.00	44.47	Peak	No Limit
3	2483.5000	57.91	8.79	66.70	74.00	-7.30	Peak	
4	2483.5000	44.59	8.79	53.38	54.00	-0.62	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX G Mode 2462 MHz	Polarization	Vertical
-----------	--------------------	--------------	----------

100 dBuV/m

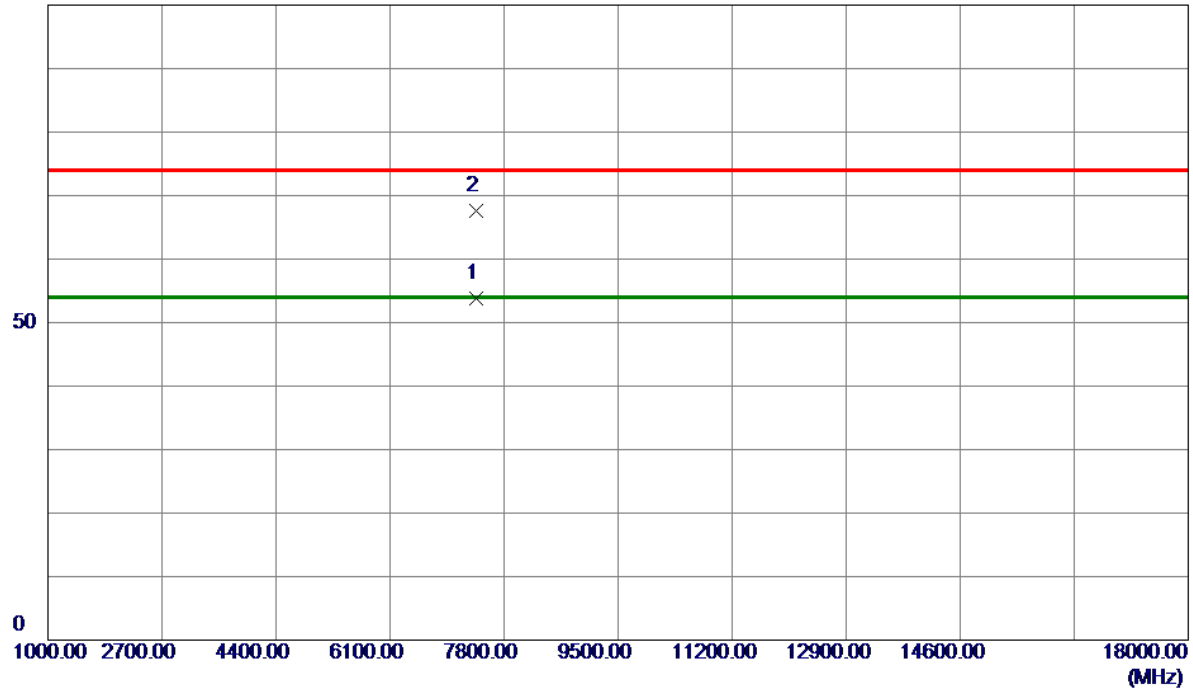


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7386.4000	45.03	8.69	53.72	54.00	-0.28	AVG	
2	7391.2500	58.83	8.70	67.53	74.00	-6.47	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT20) Mode 2412 MHz	Polarization	Vertical
-----------	--------------------------	--------------	----------

130 dBuV/m

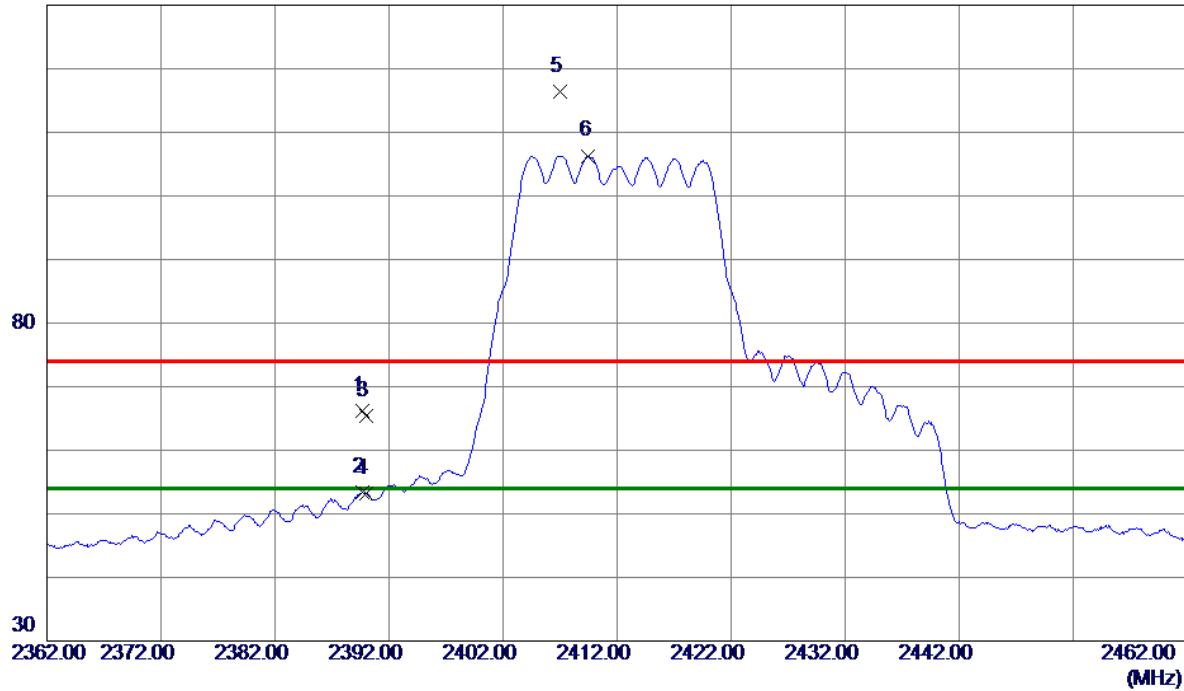


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2389.7000	57.61	8.54	66.15	74.00	-7.85	Peak	
2	2389.7000	44.79	8.54	53.33	54.00	-0.67	AVG	
3	2390.0000	56.91	8.55	65.46	74.00	-8.54	Peak	
4	2390.0000	44.58	8.55	53.13	54.00	-0.87	AVG	
5	2407.0000	107.82	8.59	116.41	74.00	42.41	Peak	No Limit
6 *	2409.5000	97.70	8.60	106.30	54.00	52.30	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT20) Mode 2412 MHz	Polarization	Vertical
-----------	--------------------------	--------------	----------

100 dBuV/m

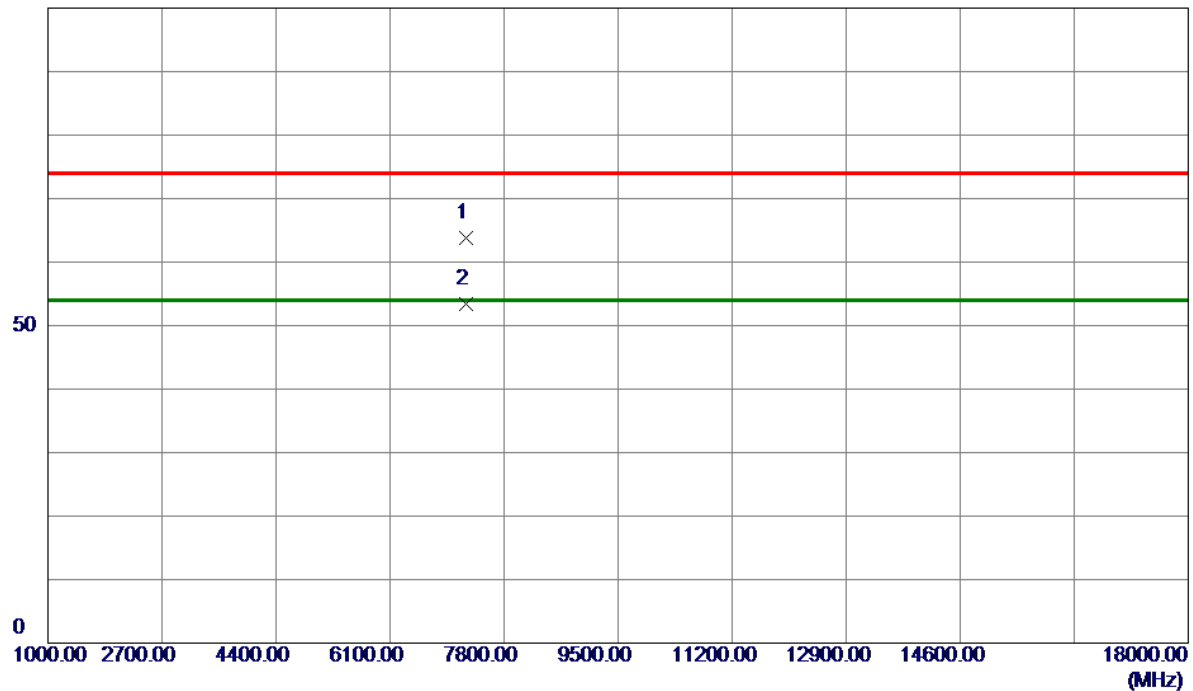


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7233.0000	55.26	8.52	63.78	74.00	-10.22	Peak	
2 *	7236.1500	44.80	8.52	53.32	54.00	-0.68	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT20) Mode 2437 MHz	Polarization	Vertical
-----------	--------------------------	--------------	----------

130 dBuV/m

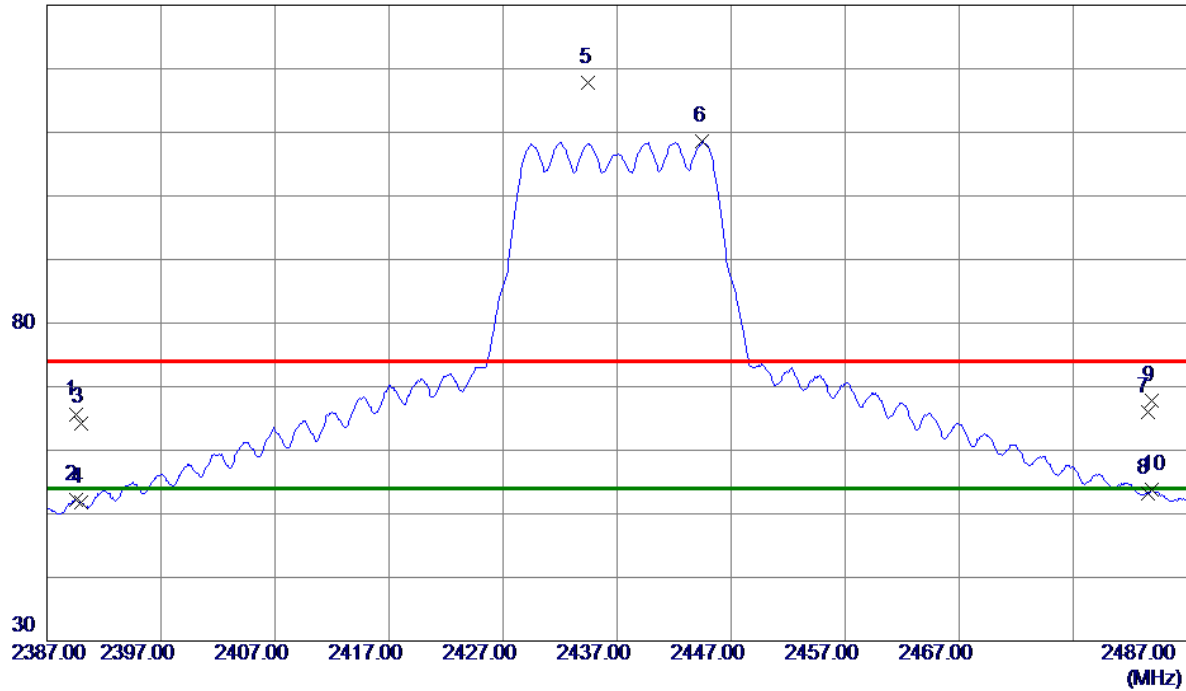

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2389.5000	57.04	8.54	65.58	74.00	-8.42	Peak	
2	2389.5000	43.65	8.54	52.19	54.00	-1.81	AVG	
3	2390.0000	55.75	8.55	64.30	74.00	-9.70	Peak	
4	2390.0000	43.16	8.55	51.71	54.00	-2.29	AVG	
5	2434.5000	109.12	8.66	117.78	74.00	43.78	Peak	No Limit
6 *	2444.5000	99.92	8.69	108.61	54.00	54.61	AVG	No Limit
7	2483.5000	57.18	8.79	65.97	74.00	-8.03	Peak	
8	2483.5000	44.42	8.79	53.21	54.00	-0.79	AVG	
9	2483.9000	59.09	8.79	67.88	74.00	-6.12	Peak	
10	2483.9000	44.92	8.79	53.71	54.00	-0.29	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT20) Mode 2437 MHz	Polarization	Vertical
-----------	--------------------------	--------------	----------

100 dBuV/m

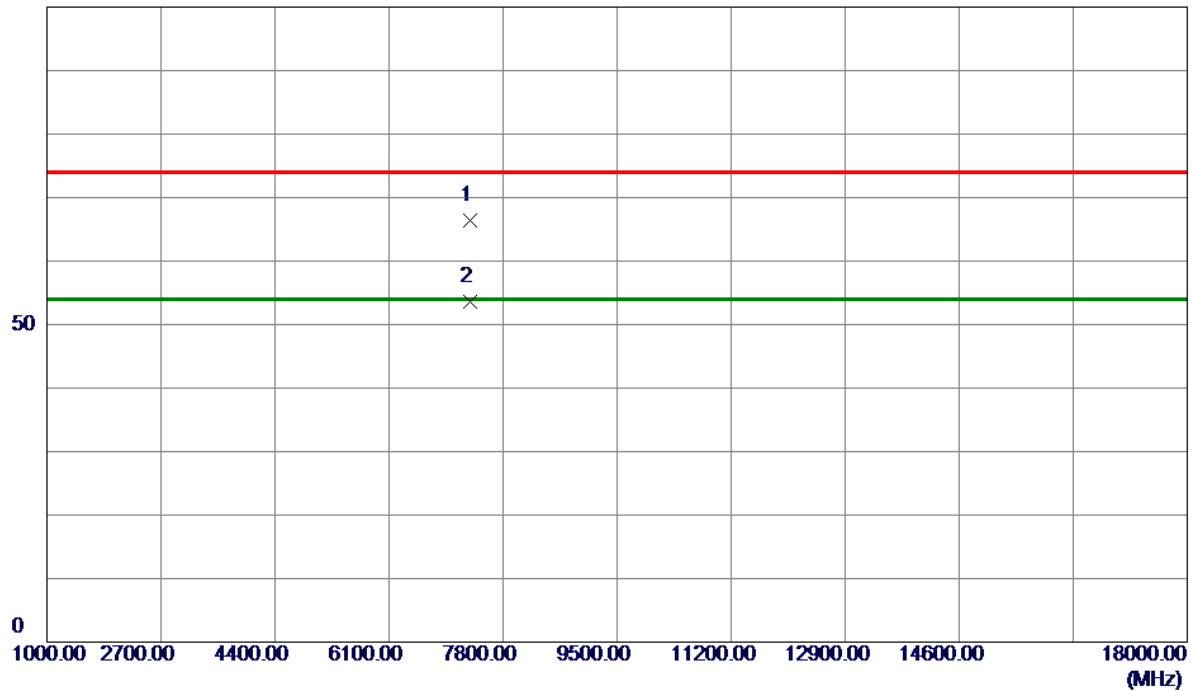


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7306.5000	57.74	8.60	66.34	74.00	-7.66	Peak	
2 *	7313.5500	44.95	8.61	53.56	54.00	-0.44	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT20) Mode 2462 MHz	Polarization	Vertical
-----------	--------------------------	--------------	----------

130 dBuV/m

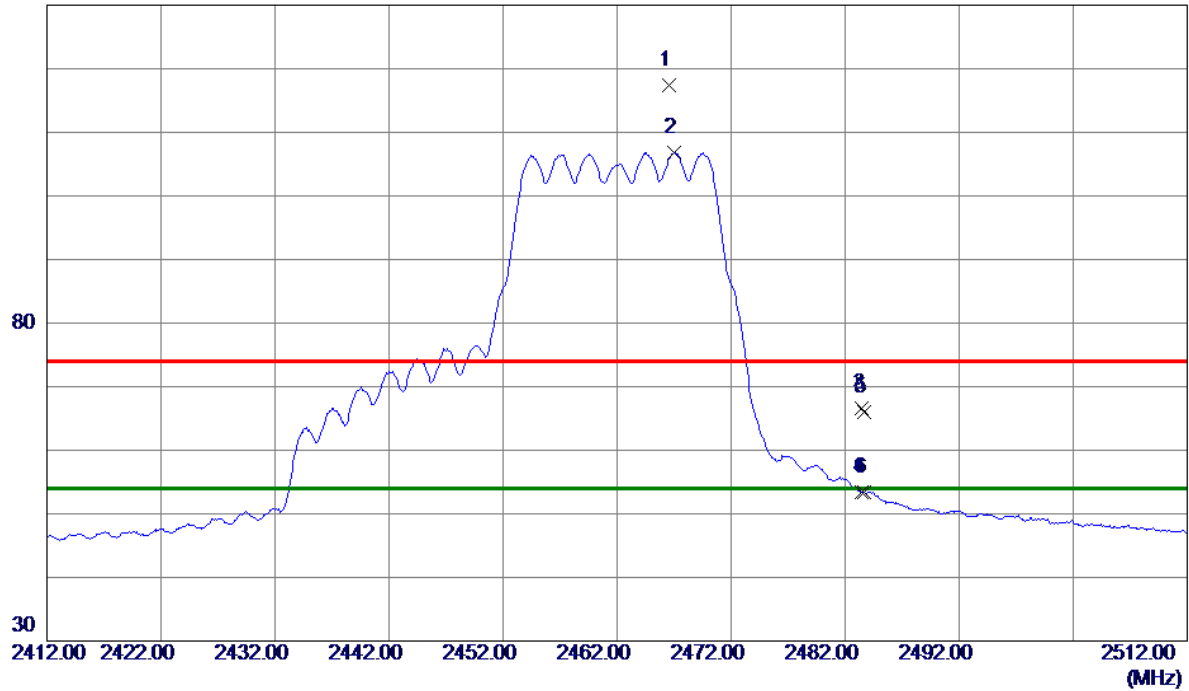


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2466.6000	108.72	8.75	117.47	74.00	43.47	Peak	No Limit
2 *	2467.0000	98.02	8.75	106.77	54.00	52.77	AVG	No Limit
3	2483.5000	57.82	8.79	66.61	74.00	-7.39	Peak	
4	2483.5000	44.57	8.79	53.36	54.00	-0.64	AVG	
5	2483.7000	57.30	8.79	66.09	74.00	-7.91	Peak	
6	2483.7000	44.70	8.79	53.49	54.00	-0.51	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT20) Mode 2462 MHz	Polarization	Vertical
-----------	--------------------------	--------------	----------

100 dBuV/m

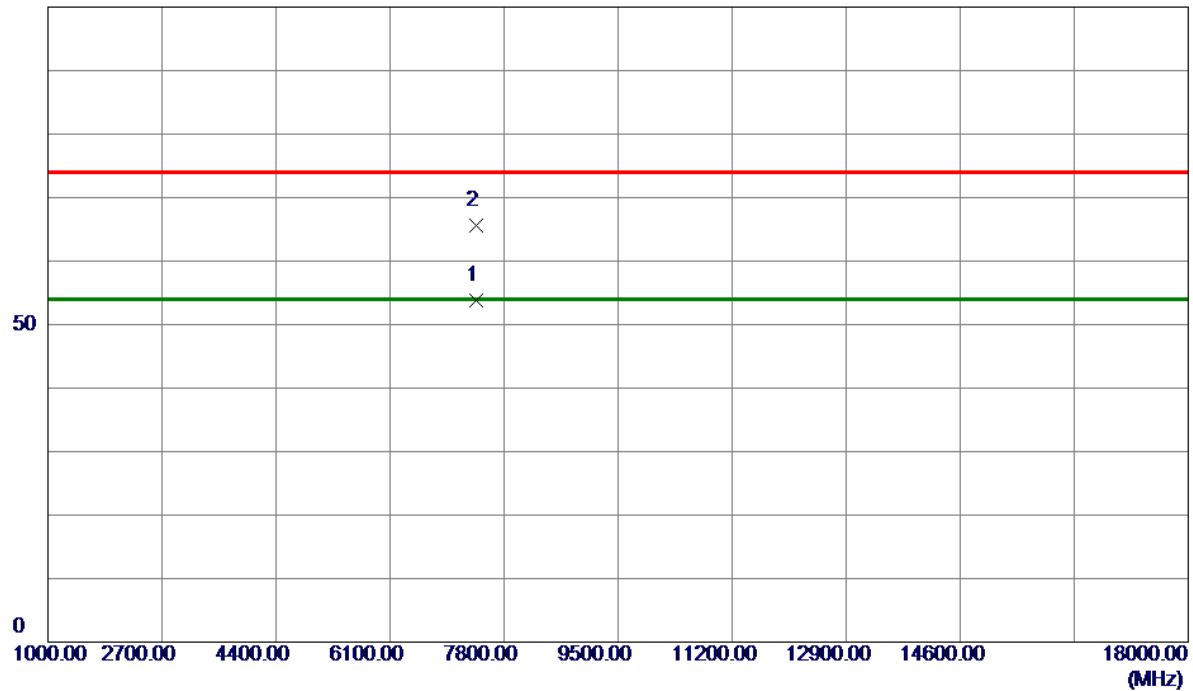


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7388.7500	45.15	8.70	53.85	54.00	-0.15	AVG	
2	7389.2000	56.93	8.70	65.63	74.00	-8.37	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT40) Mode 2422 MHz	Polarization	Vertical
-----------	--------------------------	--------------	----------

130 dBuV/m

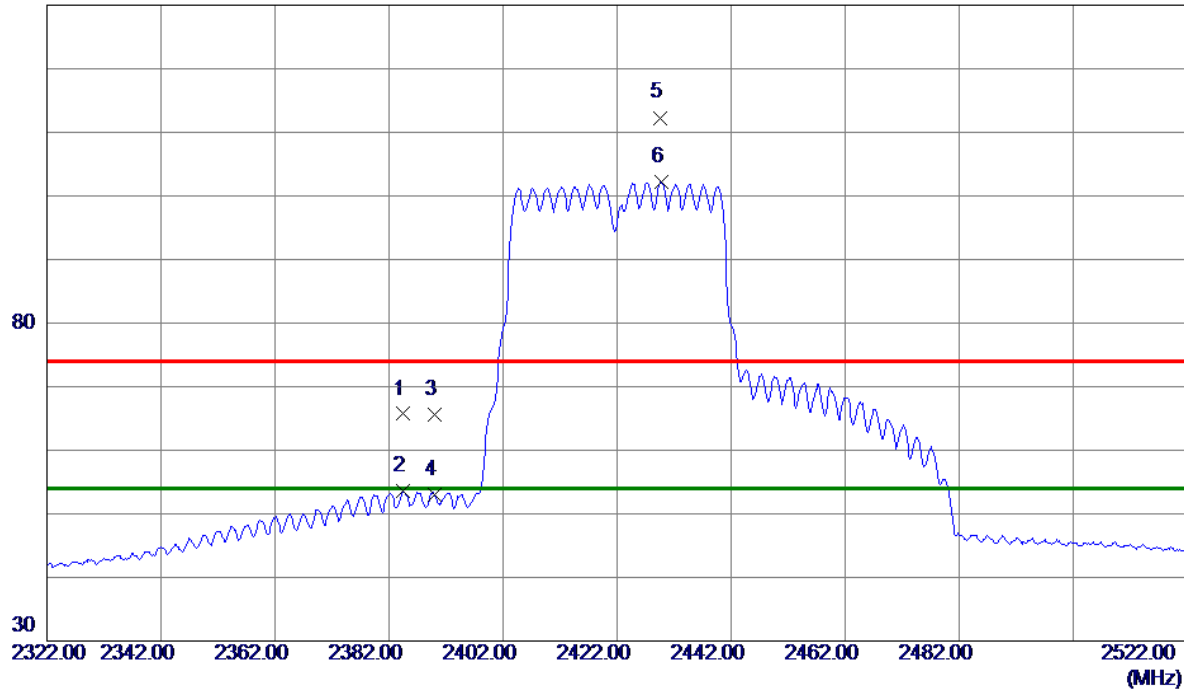


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2384.4000	57.17	8.53	65.70	74.00	-8.30	Peak	
2	2384.4000	45.09	8.53	53.62	54.00	-0.38	AVG	
3	2390.0000	57.11	8.55	65.66	74.00	-8.34	Peak	
4	2390.0000	44.37	8.55	52.92	54.00	-1.08	AVG	
5	2429.6000	103.65	8.65	112.30	74.00	38.30	Peak	No Limit
6 *	2429.8000	93.48	8.65	102.13	54.00	48.13	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT40) Mode 2422 MHz	Polarization	Vertical
-----------	--------------------------	--------------	----------

100 dBuV/m

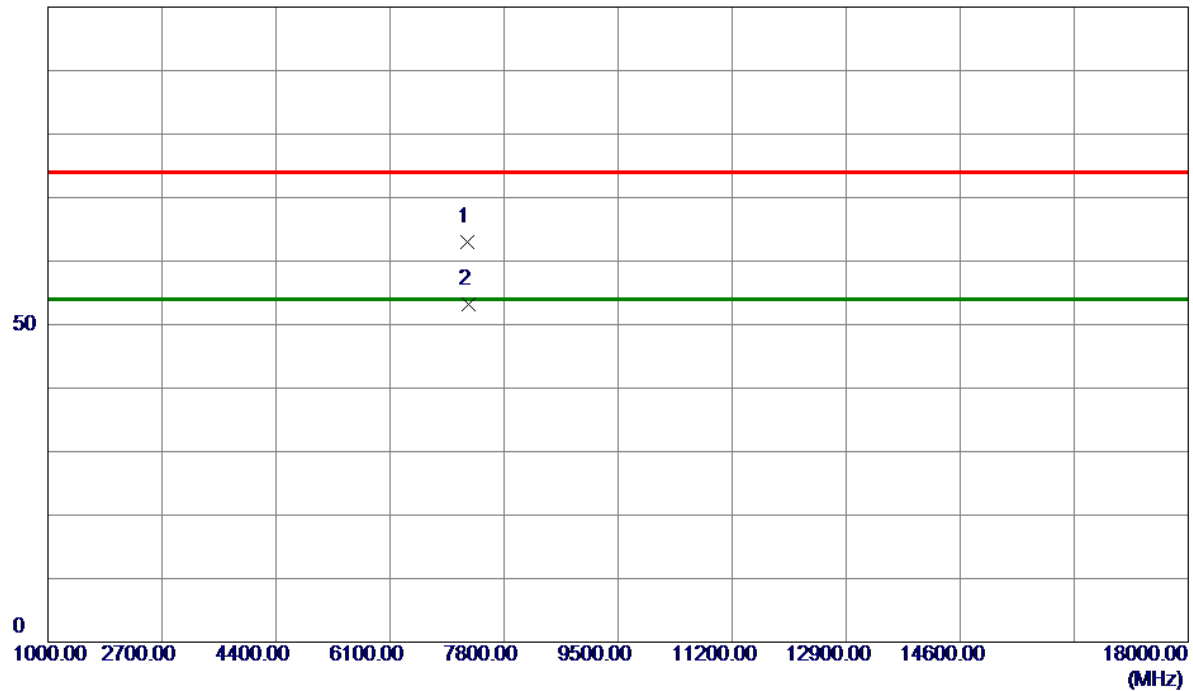


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7261.4000	54.39	8.55	62.94	74.00	-11.06	Peak	
2 *	7263.6000	44.67	8.55	53.22	54.00	-0.78	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT40) Mode 2437 MHz	Polarization	Vertical
-----------	--------------------------	--------------	----------

130 dBuV/m

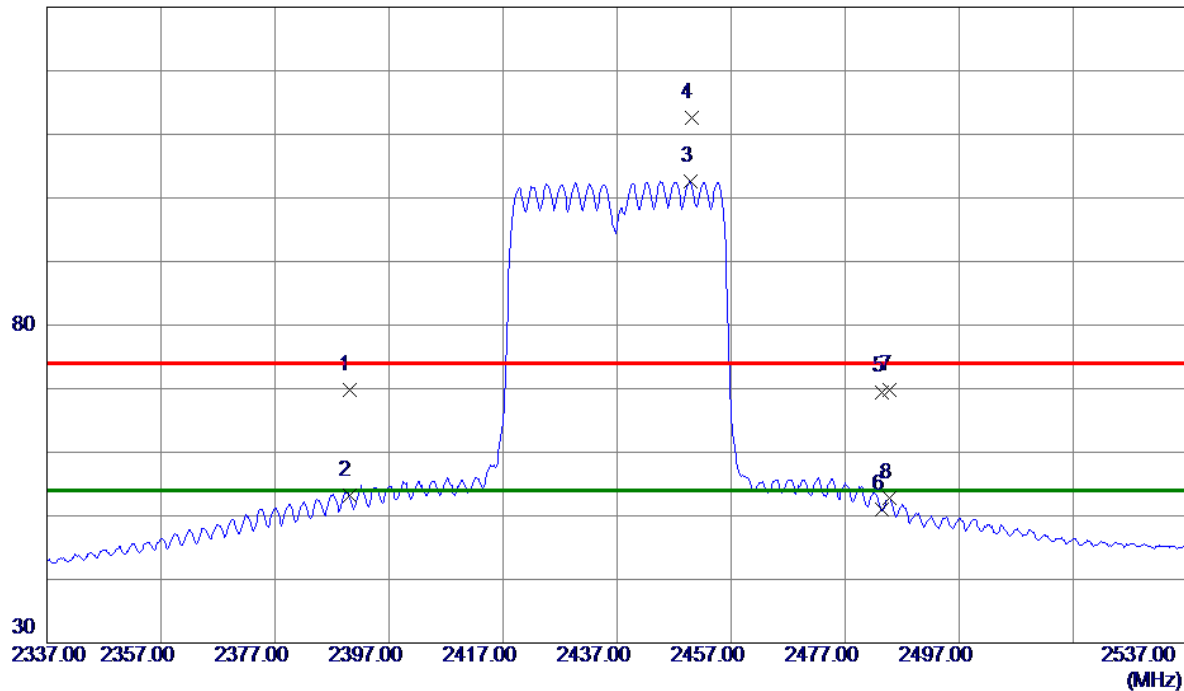


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	61.26	8.55	69.81	74.00	-4.19	Peak	
2	2390.0000	44.69	8.55	53.24	54.00	-0.76	AVG	
3 *	2449.8000	93.95	8.70	102.65	54.00	48.65	AVG	No Limit
4	2450.0000	103.86	8.70	112.56	74.00	38.56	Peak	No Limit
5	2483.5000	60.71	8.79	69.50	74.00	-4.50	Peak	
6	2483.5000	42.27	8.79	51.06	54.00	-2.94	AVG	
7	2484.8000	61.02	8.79	69.81	74.00	-4.19	Peak	
8	2484.8000	43.93	8.79	52.72	54.00	-1.28	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT40) Mode 2437 MHz	Polarization	Vertical
-----------	--------------------------	--------------	----------

100 dBuV/m

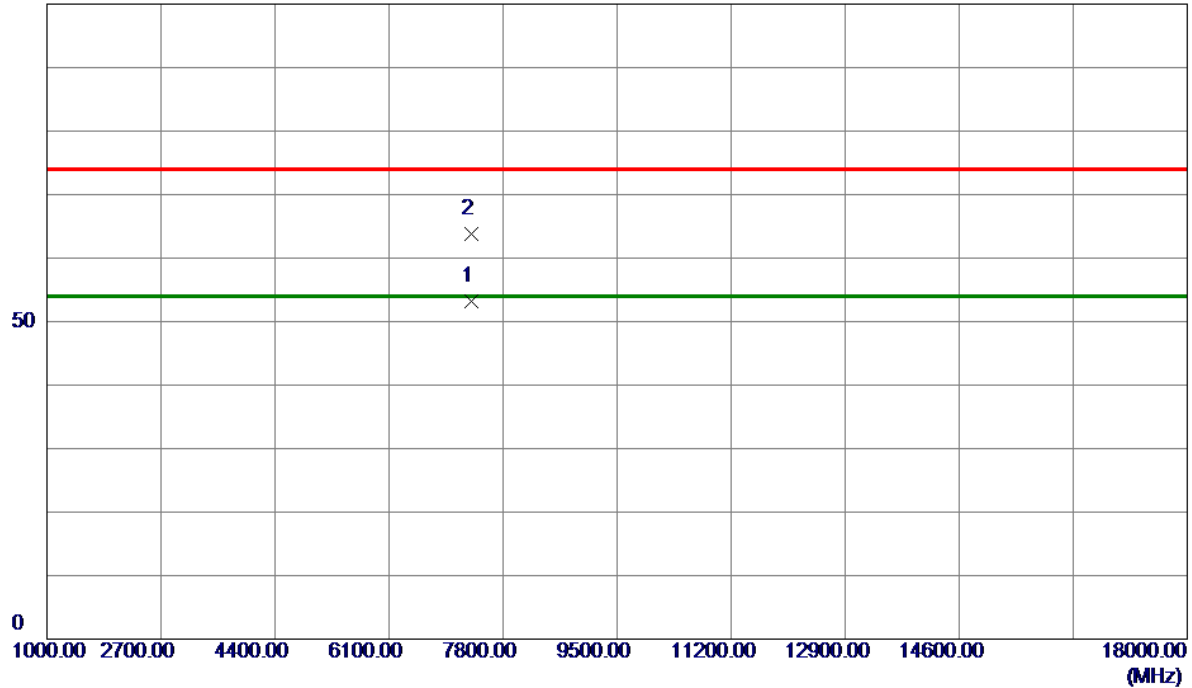


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7321.3000	44.62	8.62	53.24	54.00	-0.76	AVG	
2	7326.2000	55.20	8.63	63.83	74.00	-10.17	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT40) Mode 2452 MHz	Polarization	Vertical
-----------	--------------------------	--------------	----------

130 dBuV/m

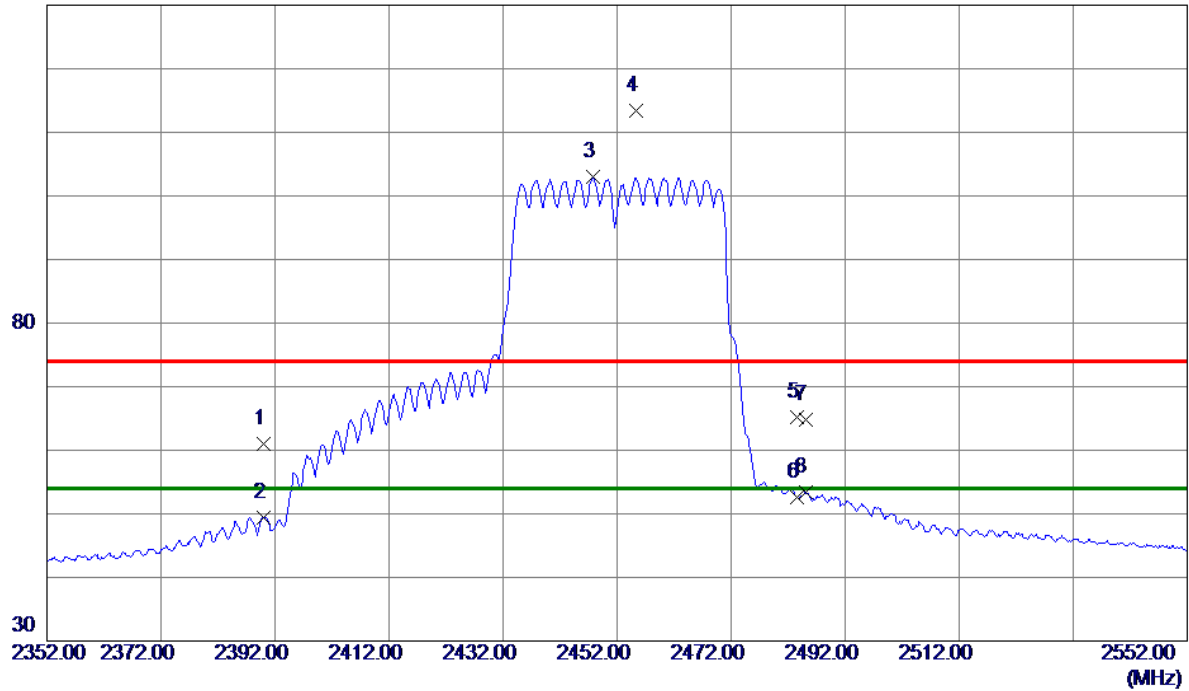


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	52.49	8.55	61.04	74.00	-12.96	Peak	
2	2390.0000	40.91	8.55	49.46	54.00	-4.54	AVG	
3 *	2447.8000	94.21	8.70	102.91	54.00	48.91	AVG	No Limit
4	2455.4000	104.77	8.72	113.49	74.00	39.49	Peak	No Limit
5	2483.5000	56.39	8.79	65.18	74.00	-8.82	Peak	
6	2483.5000	43.76	8.79	52.55	54.00	-1.45	AVG	
7	2485.0000	56.04	8.80	64.84	74.00	-9.16	Peak	
8	2485.0000	44.56	8.80	53.36	54.00	-0.64	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT40) Mode 2452 MHz	Polarization	Vertical
-----------	--------------------------	--------------	----------

100 dBuV/m

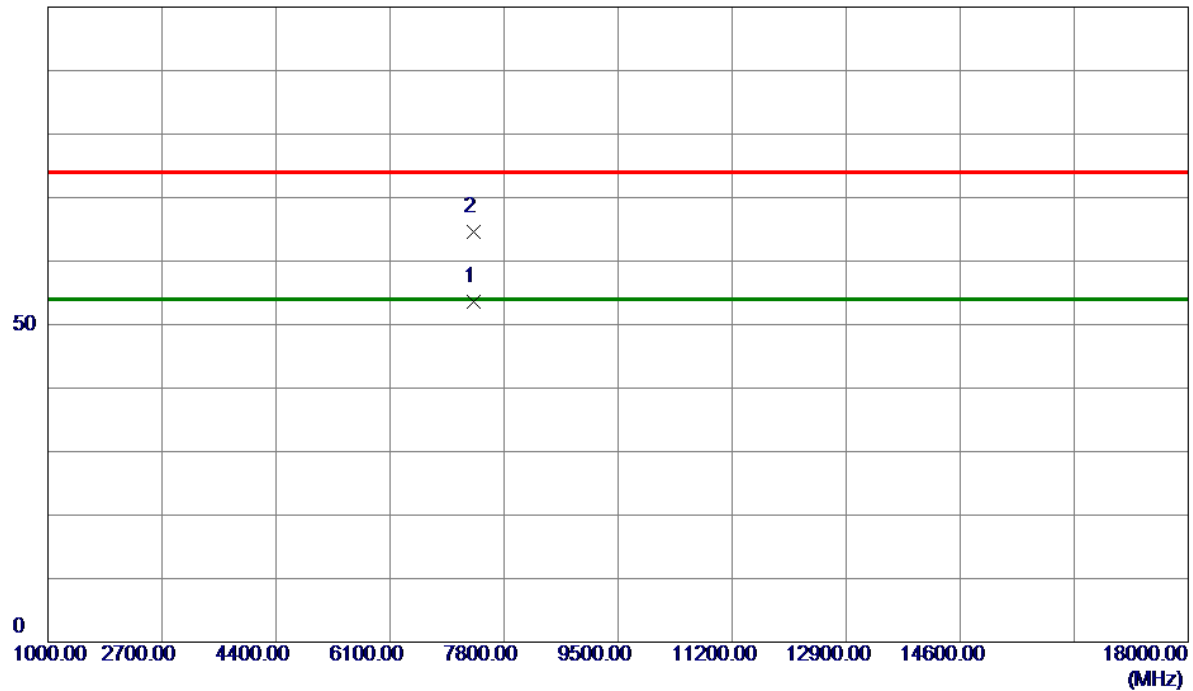


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7353.9000	44.93	8.66	53.59	54.00	-0.41	AVG	
2	7353.7000	56.01	8.66	64.67	74.00	-9.33	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX BE(EHT20) Mode 2412 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

130 dBuV/m

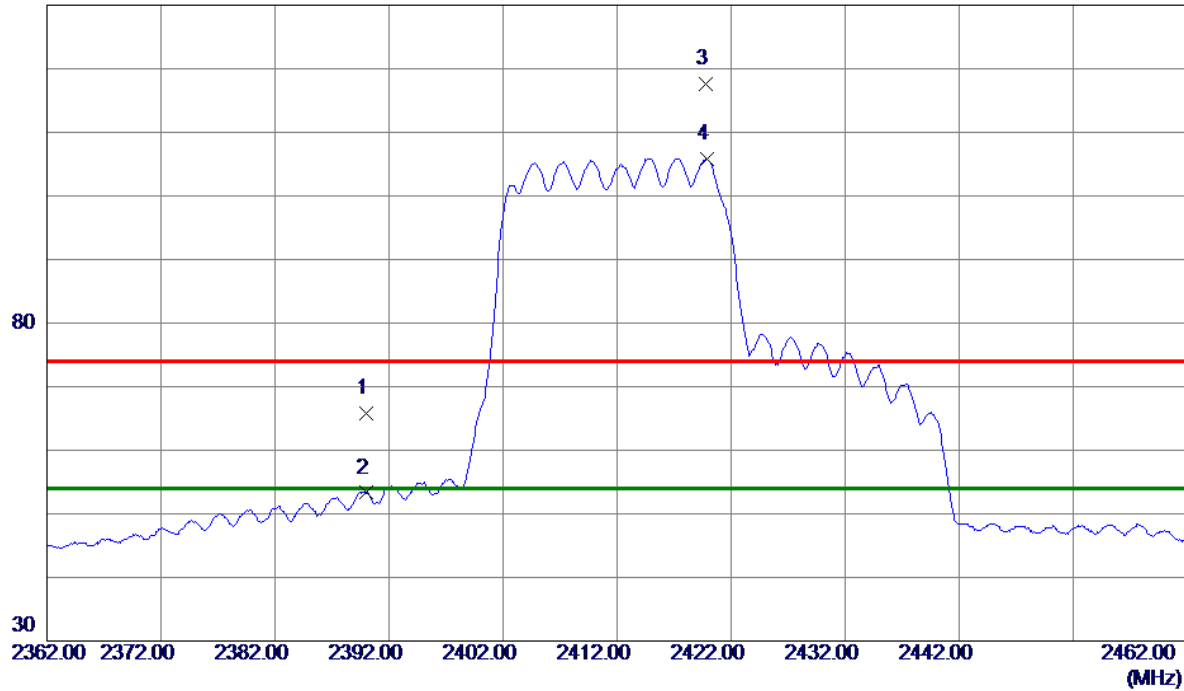


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	57.18	8.55	65.73	74.00	-8.27	Peak	
2	2390.0000	44.75	8.55	53.30	54.00	-0.70	AVG	
3	2419.8000	109.01	8.62	117.63	74.00	43.63	Peak	No Limit
4 *	2419.9000	97.23	8.62	105.85	54.00	51.85	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX BE(EHT20) Mode 2412 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

100 dBuV/m

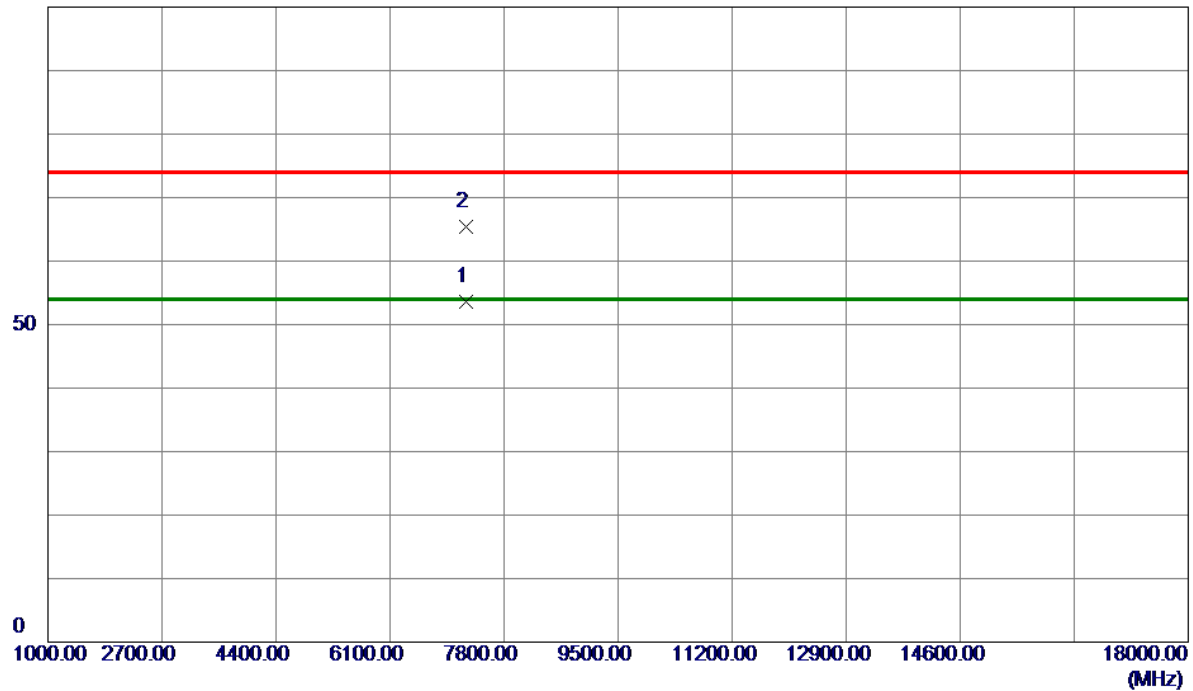


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7233.5000	45.00	8.52	53.52	54.00	-0.48	AVG	
2	7240.9000	56.87	8.53	65.40	74.00	-8.60	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX BE(EHT20) Mode 2437 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

130 dBuV/m

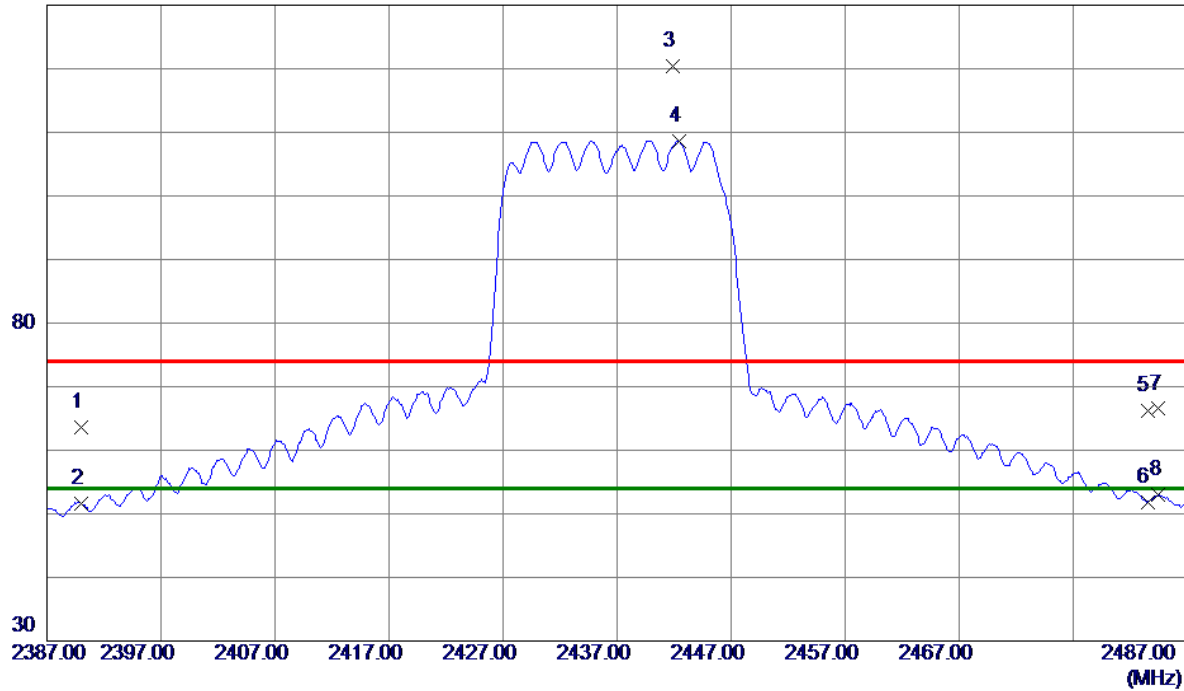


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	55.07	8.55	63.62	74.00	-10.38	Peak	
2	2390.0000	43.14	8.55	51.69	54.00	-2.31	AVG	
3	2441.9000	111.65	8.68	120.33	74.00	46.33	Peak	No Limit
4 *	2442.4000	99.95	8.68	108.63	54.00	54.63	AVG	No Limit
5	2483.5000	57.49	8.79	66.28	74.00	-7.72	Peak	
6	2483.5000	43.06	8.79	51.85	54.00	-2.15	AVG	
7	2484.5000	57.71	8.79	66.50	74.00	-7.50	Peak	
8	2484.5000	44.21	8.79	53.00	54.00	-1.00	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX BE(EHT20) Mode 2437 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

100 dBuV/m

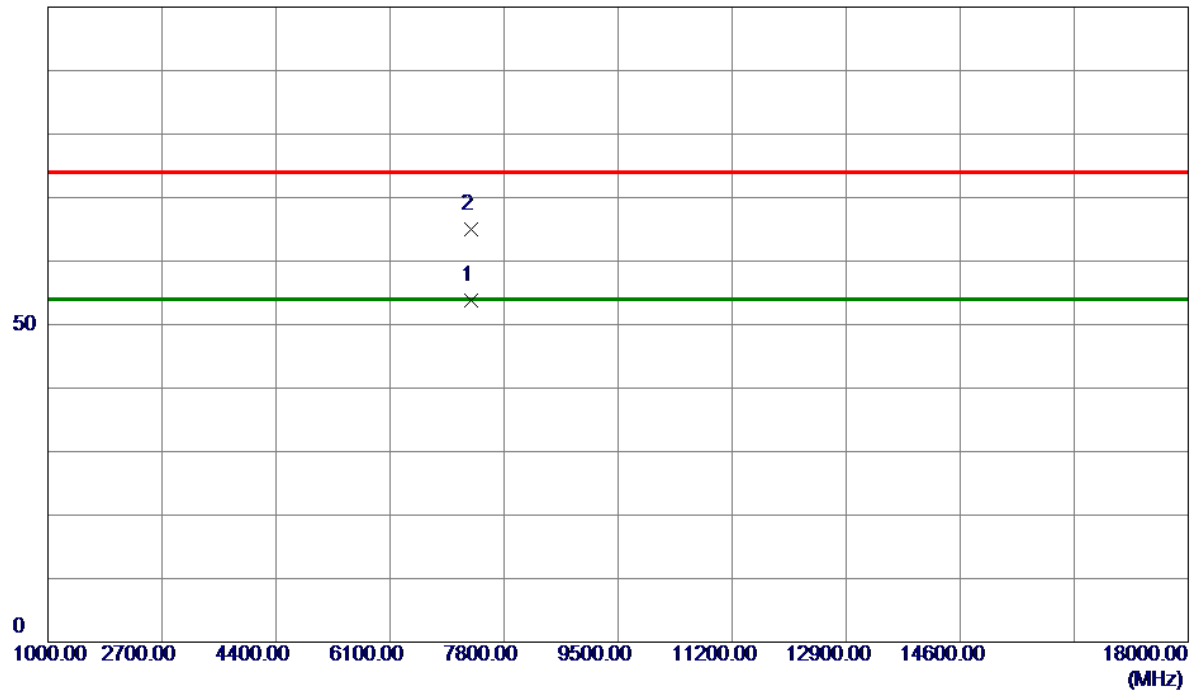


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7313.5000	45.19	8.61	53.80	54.00	-0.20	AVG	
2	7311.5000	56.33	8.61	64.94	74.00	-9.06	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX BE(EHT20) Mode 2462 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

130 dBuV/m

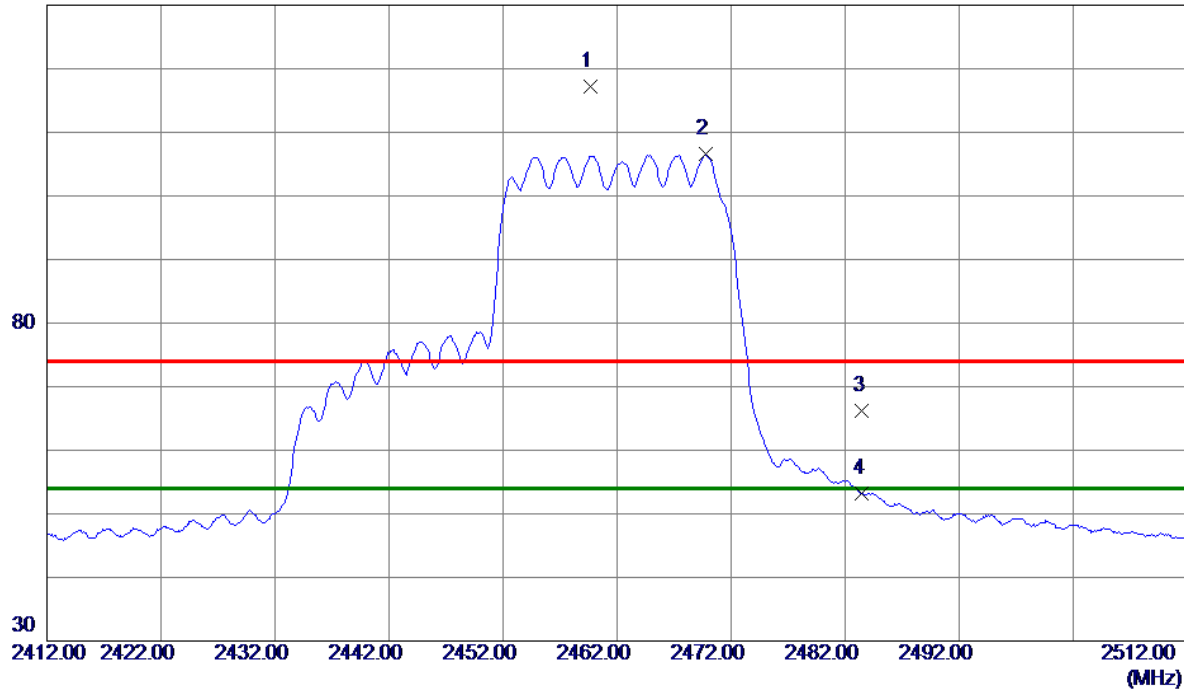

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2459.7000	108.39	8.73	117.12	74.00	43.12	Peak	No Limit
2 *	2469.8000	97.80	8.76	106.56	54.00	52.56	AVG	No Limit
3	2483.5000	57.47	8.79	66.26	74.00	-7.74	Peak	
4	2483.5000	44.41	8.79	53.20	54.00	-0.80	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX BE(EHT20) Mode 2462 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

100 dBuV/m

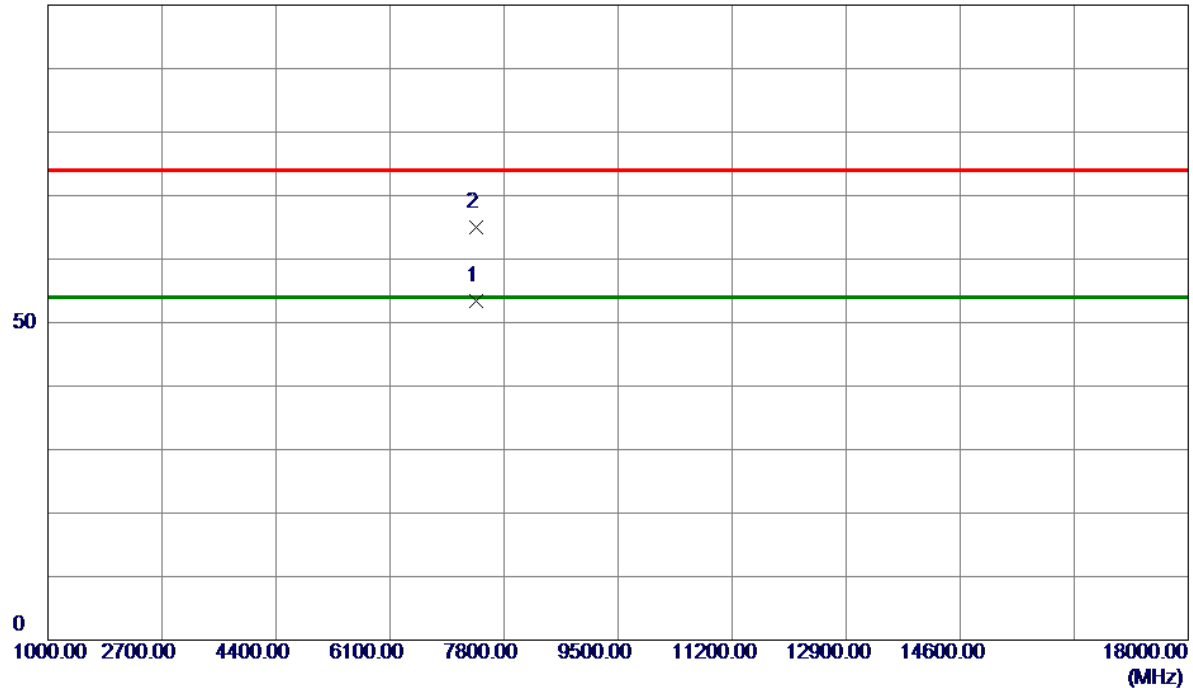


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7388.8000	44.63	8.70	53.33	54.00	-0.67	AVG	
2	7393.8000	56.30	8.70	65.00	74.00	-9.00	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX BE(EHT40) Mode 2422 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

130 dBuV/m

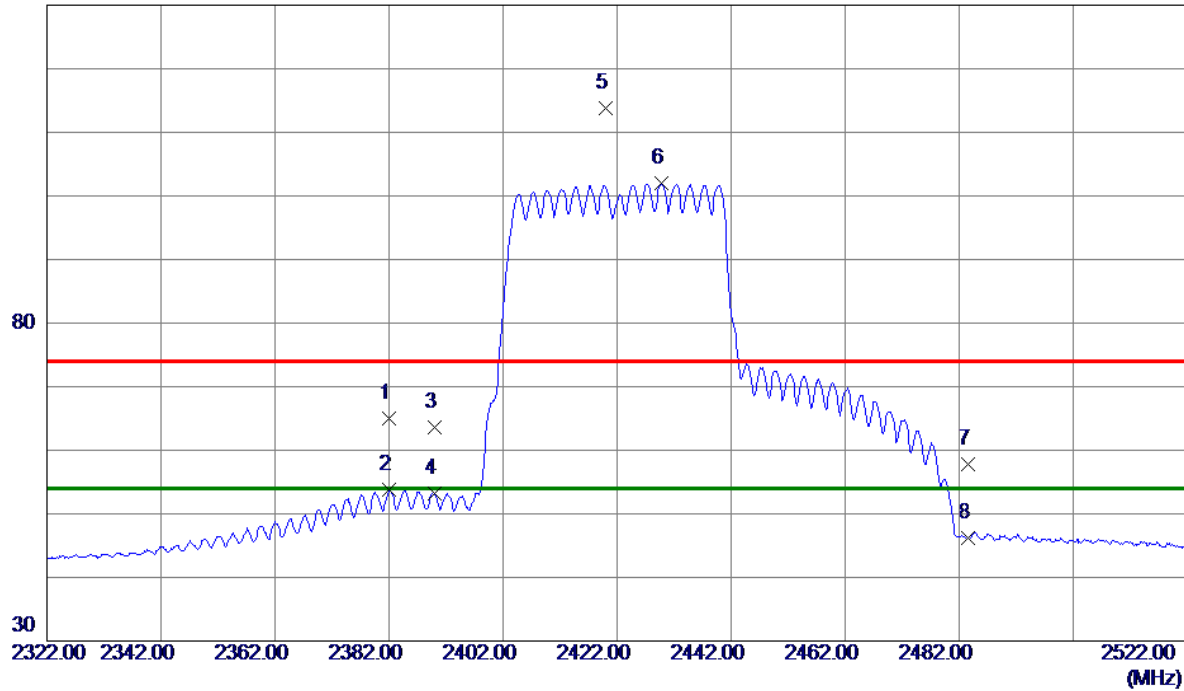


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2382.0000	56.42	8.52	64.94	74.00	-9.06	Peak	
2	2382.0000	45.25	8.52	53.77	54.00	-0.23	AVG	
3	2390.0000	55.14	8.55	63.69	74.00	-10.31	Peak	
4	2390.0000	44.59	8.55	53.14	54.00	-0.86	AVG	
5	2420.0000	105.16	8.62	113.78	74.00	39.78	Peak	No Limit
6 *	2429.8000	93.35	8.65	102.00	54.00	48.00	AVG	No Limit
7	2483.5000	49.02	8.79	57.81	74.00	-16.19	Peak	
8	2483.5000	37.34	8.79	46.13	54.00	-7.87	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX BE(EHT40) Mode 2422 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

100 dBuV/m

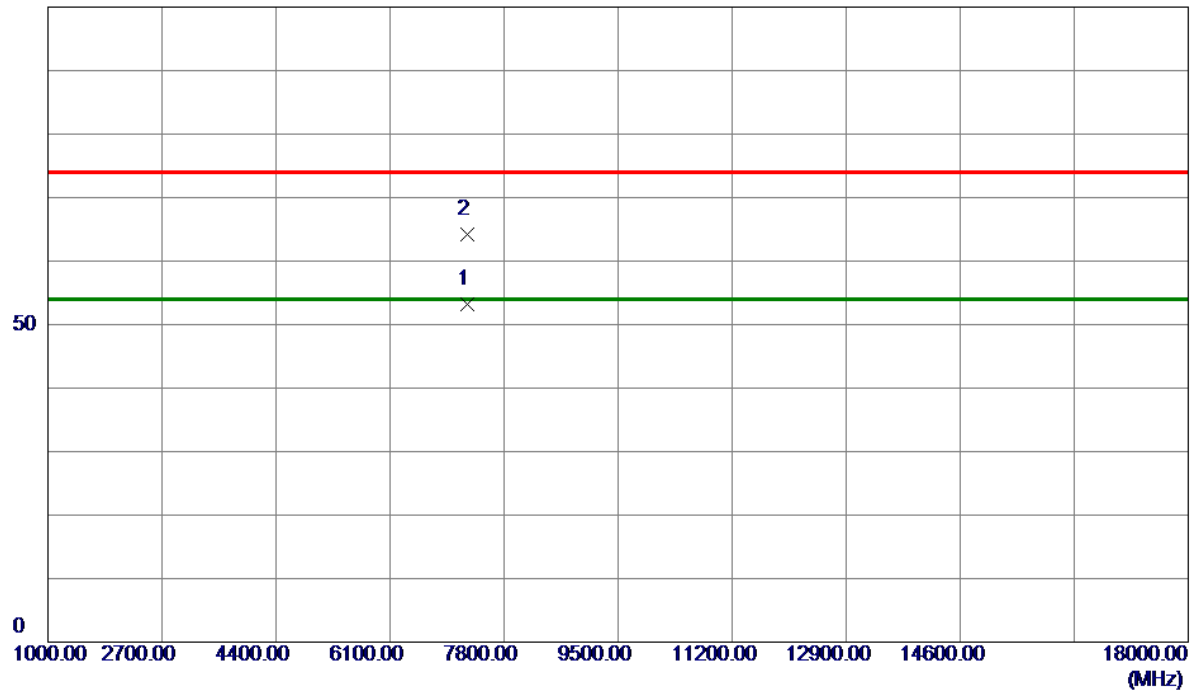


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7260.9000	44.68	8.55	53.23	54.00	-0.77	AVG	
2	7256.1000	55.63	8.54	64.17	74.00	-9.83	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX BE(EHT40) Mode 2437 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

130 dBuV/m

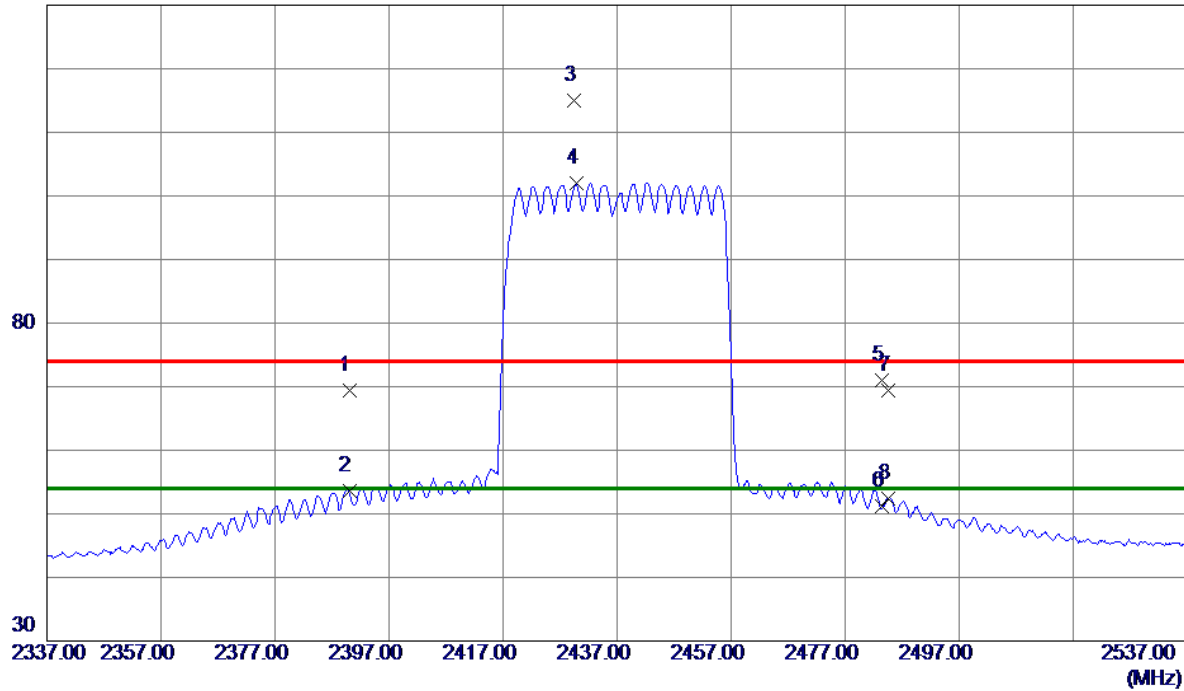


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	60.88	8.55	69.43	74.00	-4.57	Peak	
2	2390.0000	44.99	8.55	53.54	54.00	-0.46	AVG	
3	2429.4000	106.31	8.65	114.96	74.00	40.96	Peak	No Limit
4 *	2429.8000	93.43	8.65	102.08	54.00	48.08	AVG	No Limit
5	2483.5000	62.24	8.79	71.03	74.00	-2.97	Peak	
6	2483.5000	42.39	8.79	51.18	54.00	-2.82	AVG	
7	2484.6000	60.69	8.79	69.48	74.00	-4.52	Peak	
8	2484.6000	43.67	8.79	52.46	54.00	-1.54	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX BE(EHT40) Mode 2437 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

100 dBuV/m

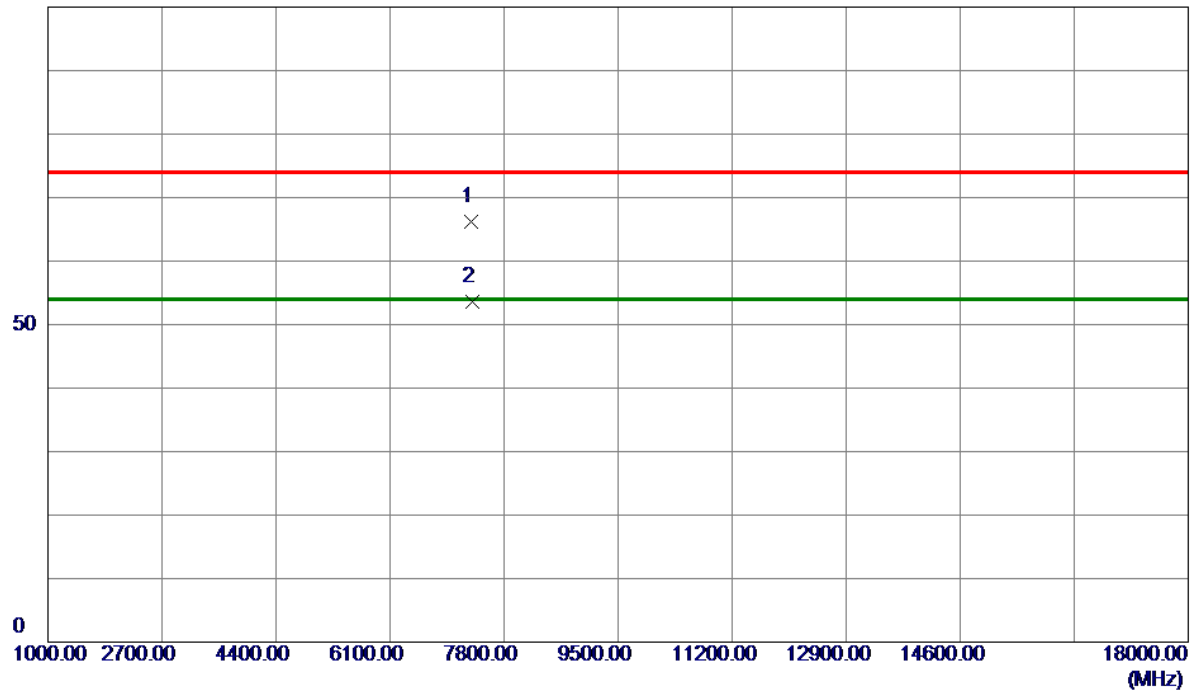

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7313.3000	57.55	8.61	66.16	74.00	-7.84	Peak	
2 *	7318.6000	44.97	8.62	53.59	54.00	-0.41	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX BE(EHT40) Mode 2452 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

130 dBuV/m

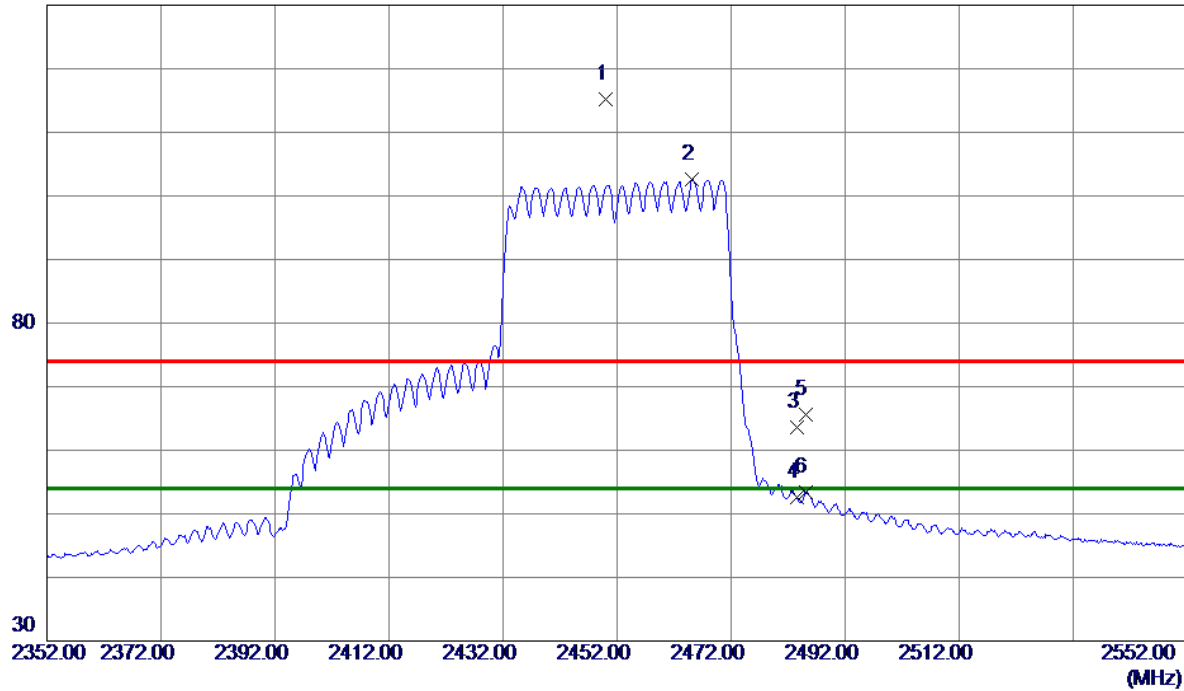

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2450.0000	106.52	8.70	115.22	74.00	41.22	Peak	No Limit
2 *	2465.2000	93.88	8.74	102.62	54.00	48.62	AVG	No Limit
3	2483.5000	54.90	8.79	63.69	74.00	-10.31	Peak	
4	2483.5000	43.87	8.79	52.66	54.00	-1.34	AVG	
5	2485.0000	56.73	8.80	65.53	74.00	-8.47	Peak	
6	2485.0000	44.54	8.80	53.34	54.00	-0.66	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX BE(EHT40) Mode 2452 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

100 dBuV/m

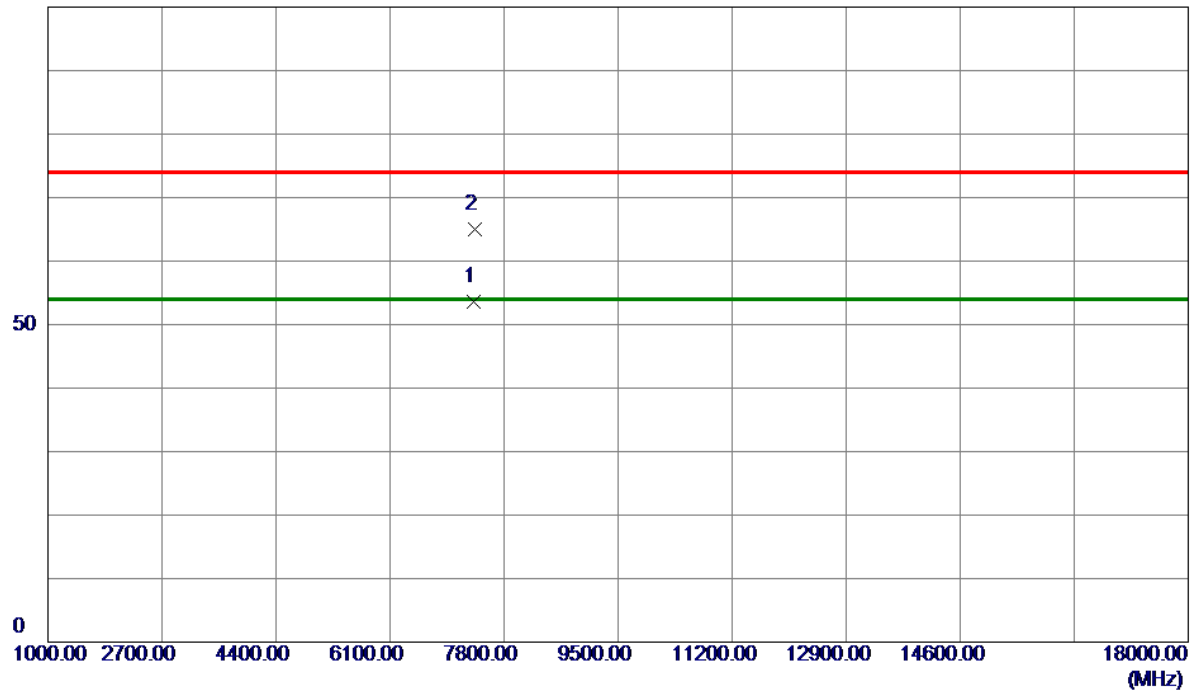


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7351.1000	45.01	8.65	53.66	54.00	-0.34	AVG	
2	7358.4000	56.29	8.66	64.95	74.00	-9.05	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT20) Mode Channel 06	Polarization	Vertical
-----------	----------------------------	--------------	----------

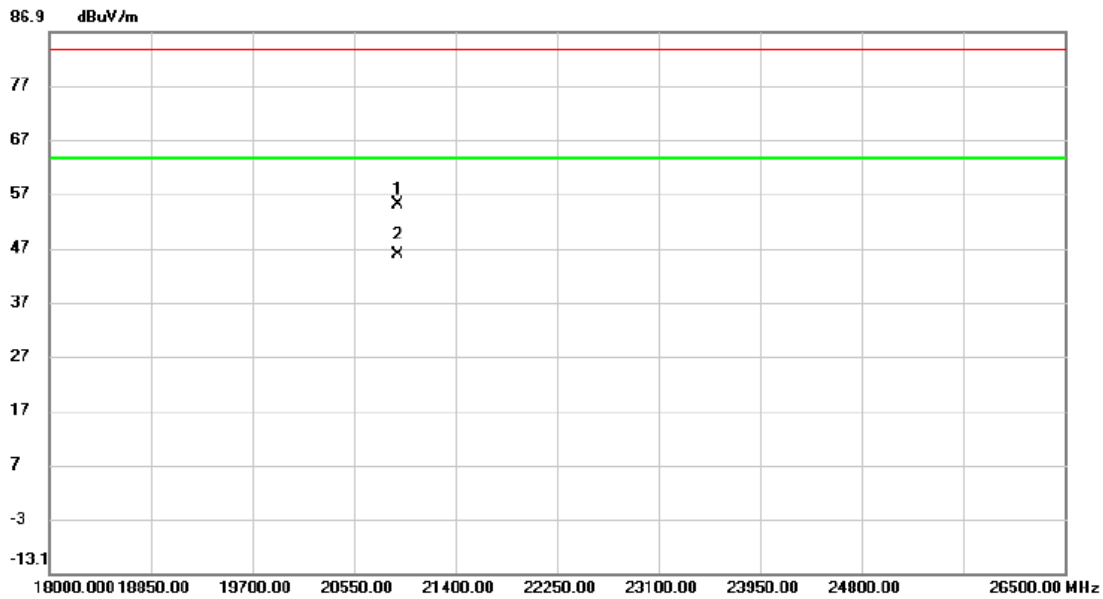


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		20915.500	51.71	3.38	55.09	83.50	-28.41	peak	
2	*	20915.500	42.38	3.38	45.76	63.50	-17.74	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT20) Mode Channel 06	Polarization	Horizontal
-----------	----------------------------	--------------	------------

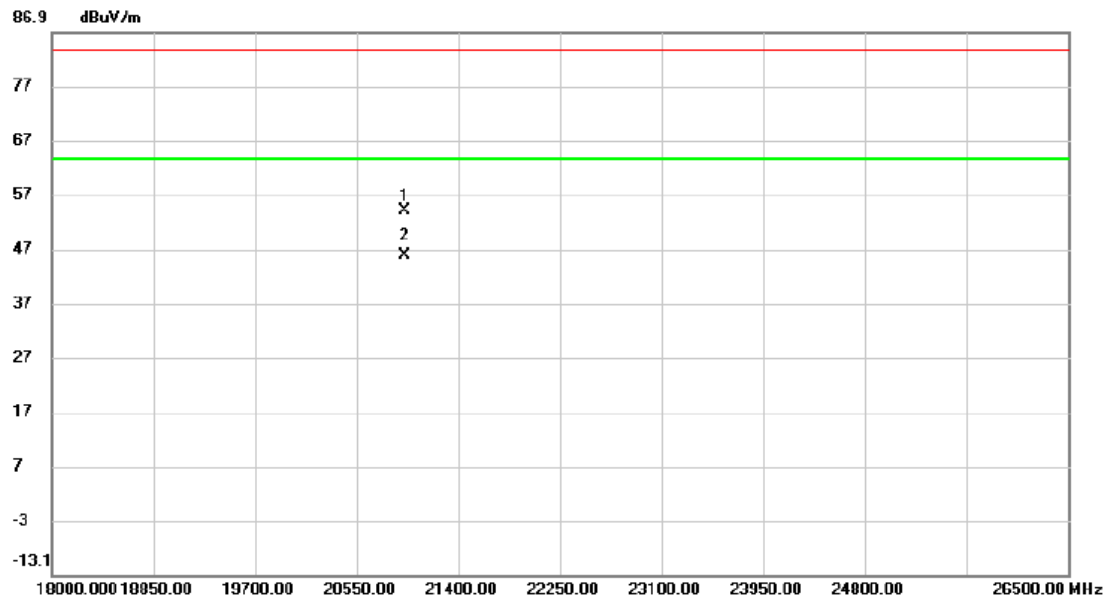

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		20949.500	50.71	3.40	54.11	83.50	-29.39	peak	
2	*	20949.500	42.36	3.40	45.76	63.50	-17.74	AVG	

REMARKS:


- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX E - BANDWIDTH

Test Mode	TX B Mode
-----------	-----------


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	6 dB Bandwidth Min. Limit (MHz)	Result
01	2412	7.120	10.480	0.5	Complies
06	2437	7.020	10.480	0.5	Complies
11	2462	7.560	10.560	0.5	Complies

CH01

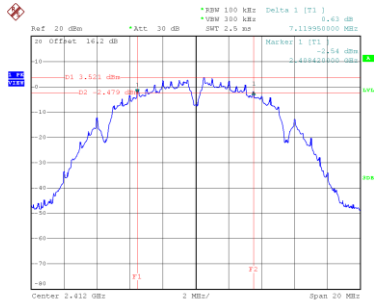


Date: 27.MAR.2025 06:00:29

CH06
6 dB Bandwidth

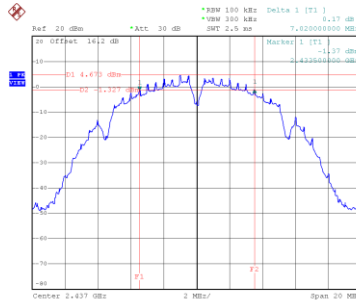


Date: 27.MAR.2025 06:02:58

CH11

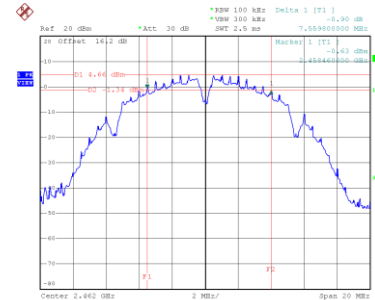


Date: 27.MAR.2025 06:05:25


99 % Occupied Bandwidth

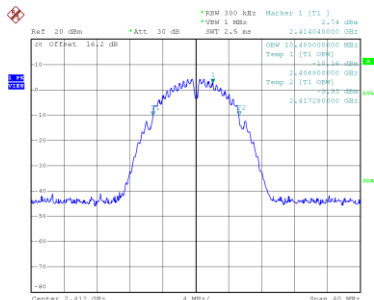

Date: 27.MAR.2025 06:00:36

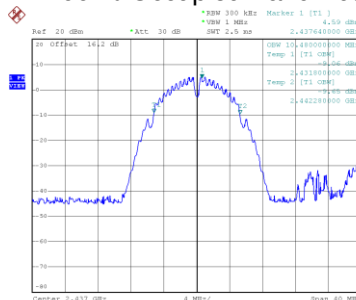

Date: 27.MAR.2025 06:03:05

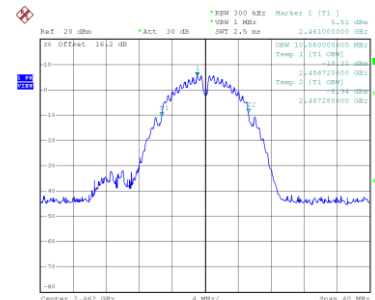


Date: 27.MAR.2025 06:05:33

Test Mode	TX G Mode
-----------	-----------


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	6 dB Bandwidth Min. Limit (MHz)	Result
01	2412	16.410	17.280	0.5	Complies
06	2437	16.390	17.360	0.5	Complies
11	2462	16.420	17.280	0.5	Complies

CH01

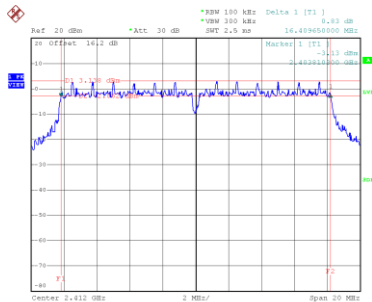


Date: 27.MAR.2025 06:20:23

CH06
6 dB Bandwidth

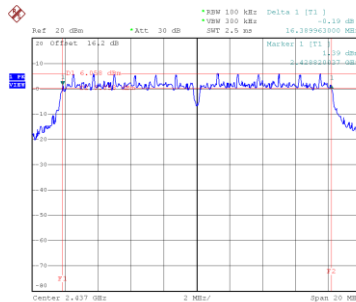


Date: 27.MAR.2025 06:23:15

CH11

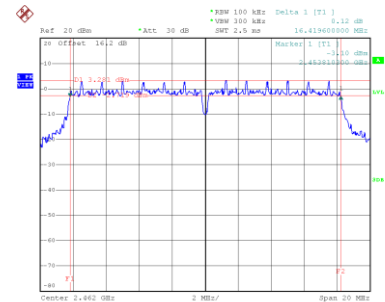


Date: 27.MAR.2025 06:25:31


99 % Occupied Bandwidth

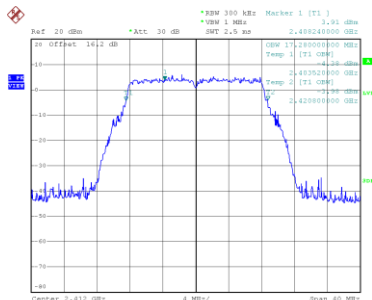

Date: 27.MAR.2025 06:20:31

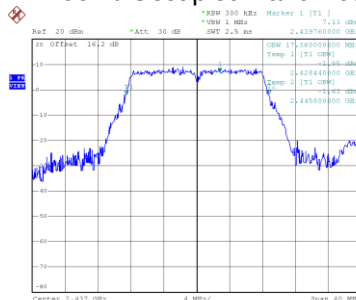

Date: 27.MAR.2025 06:23:22

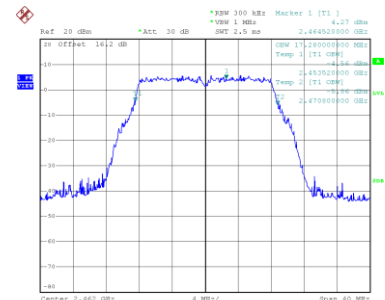


Date: 27.MAR.2025 06:25:38

Test Mode	TX N(HT20) Mode
-----------	-----------------


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	6 dB Bandwidth Min. Limit (MHz)	Result
01	2412	17.640	18.240	0.5	Complies
06	2437	17.660	18.320	0.5	Complies
11	2462	17.650	18.160	0.5	Complies

CH01

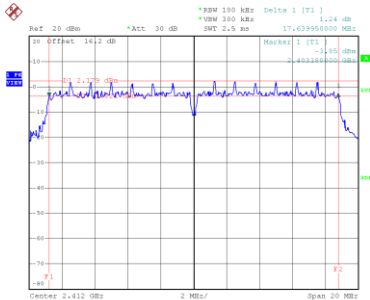


Date: 27.MAR.2025 06:27:23

CH06
6 dB Bandwidth

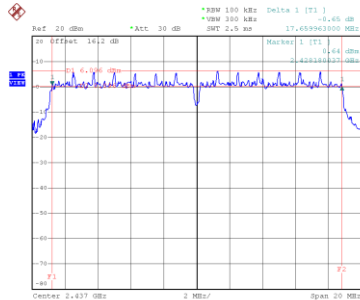


Date: 27.MAR.2025 06:29:09

CH11

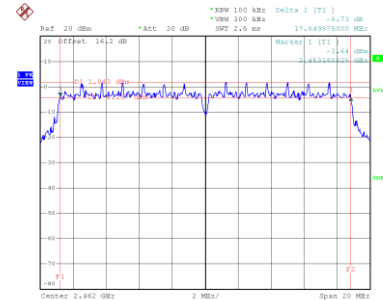


Date: 27.MAR.2025 06:30:35


99 % Occupied Bandwidth

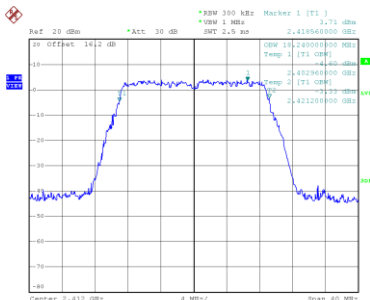

Date: 27.MAR.2025 06:27:30

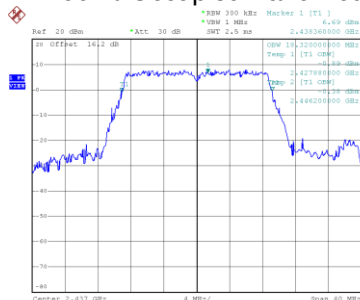

Date: 27.MAR.2025 06:29:16

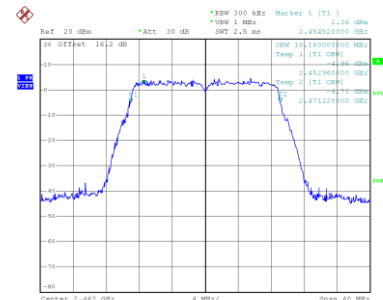


Date: 27.MAR.2025 06:30:42

Test Mode	TX N(HT40) Mode
-----------	-----------------


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	6 dB Bandwidth Min. Limit (MHz)	Result
03	2422	36.440	36.640	0.5	Complies
06	2437	36.440	36.800	0.5	Complies
09	2452	36.440	36.640	0.5	Complies

CH03

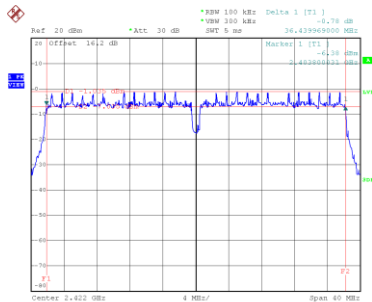


Date: 27.MAR.2025 06:53:41

CH06
6 dB Bandwidth

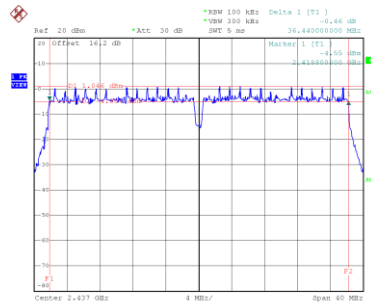


Date: 27.MAR.2025 06:57:25

CH09

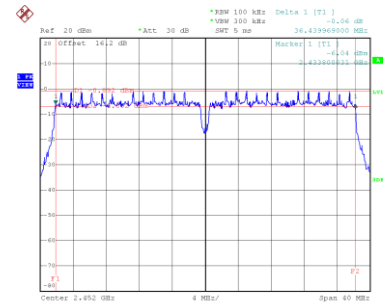


Date: 27.MAR.2025 06:59:14


99 % Occupied Bandwidth

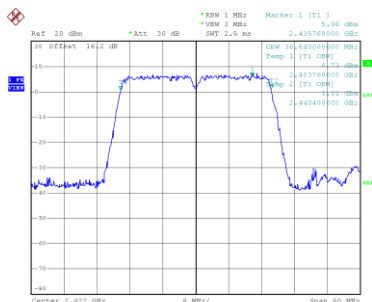

Date: 27.MAR.2025 06:53:49

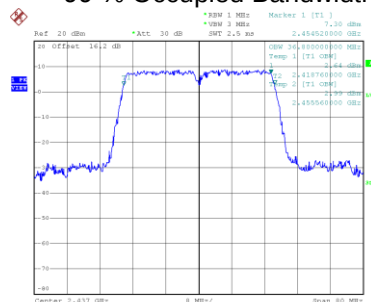

Date: 27.MAR.2025 06:57:32

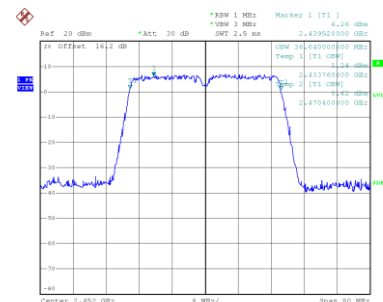


Date: 27.MAR.2025 06:59:22

Test Mode	TX BE(EHT20) Mode
-----------	-------------------


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	6 dB Bandwidth Min. Limit (MHz)	Result
01	2412	19.100	19.280	0.5	Complies
06	2437	19.060	19.280	0.5	Complies
11	2462	19.000	19.200	0.5	Complies

CH01

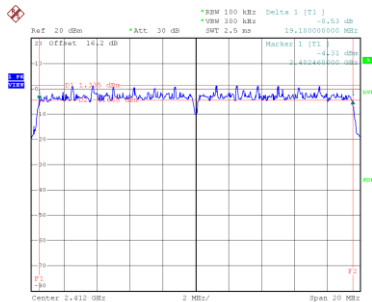


Date: 27.MAR.2025 07:59:56

CH06
6 dB Bandwidth

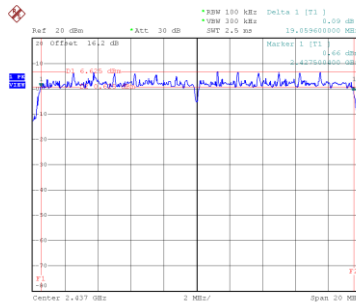


Date: 27.MAR.2025 08:04:01

CH11

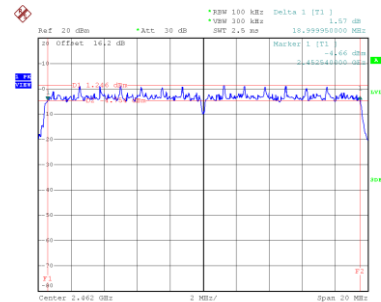


Date: 27.MAR.2025 08:08:19


99 % Occupied Bandwidth

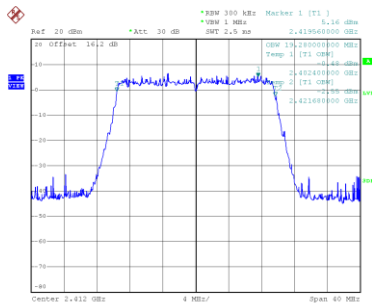

Date: 27.MAR.2025 08:00:04

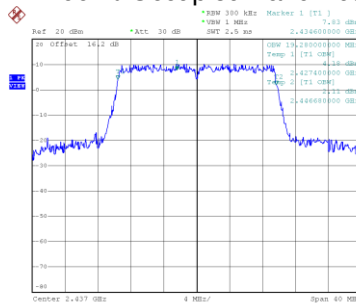

Date: 27.MAR.2025 08:04:08

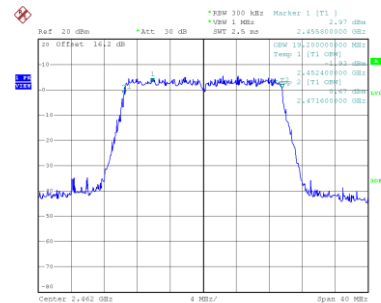


Date: 27.MAR.2025 08:08:27

Test Mode	TX BE(EHT40) Mode
-----------	-------------------


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	6 dB Bandwidth Min. Limit (MHz)	Result
03	2422	37.800	38.240	0.5	Complies
06	2437	37.910	38.240	0.5	Complies
09	2452	38.069	38.240	0.5	Complies

CH03

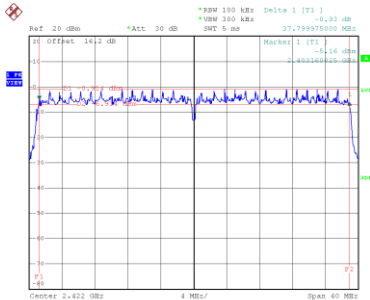


Date: 27.MAR.2025 08:22:43

CH06
6 dB Bandwidth

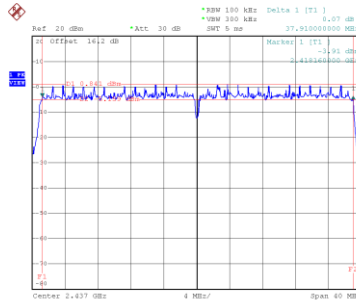


Date: 27.MAR.2025 08:24:18

CH09

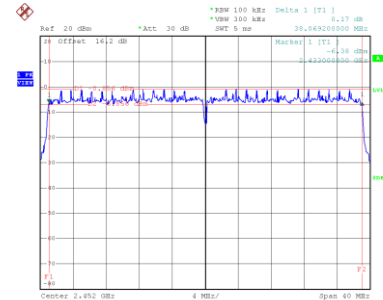


Date: 27.MAR.2025 08:25:59


99 % Occupied Bandwidth

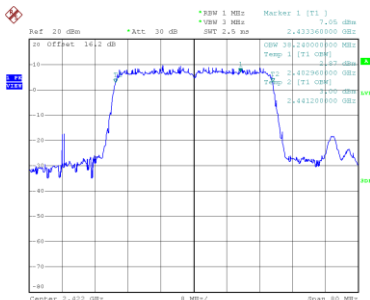

Date: 27.MAR.2025 08:22:50

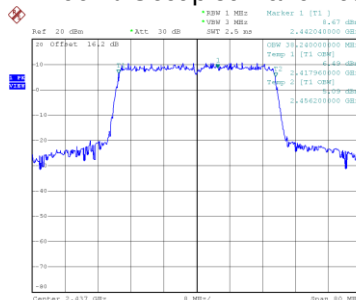

Date: 27.MAR.2025 08:24:25

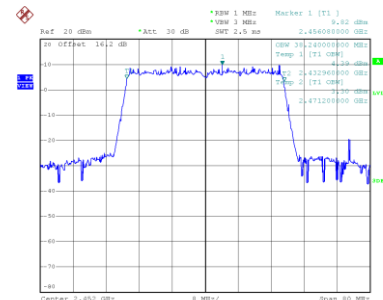

Date: 27.MAR.2025 08:26:06

APPENDIX F - MAXIMUM OUTPUT POWER

Test Mode	TX B Mode_Ant. 1
-----------	------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	18.02	0.33	18.35	30.00	1.0000	Complies
06	2437	17.44	0.33	17.77	30.00	1.0000	Complies
11	2462	17.14	0.33	17.47	30.00	1.0000	Complies

Test Mode	TX B Mode_Ant. 2
-----------	------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	17.44	0.33	17.77	30.00	1.0000	Complies
06	2437	17.53	0.33	17.86	30.00	1.0000	Complies
11	2462	17.93	0.33	18.26	30.00	1.0000	Complies

Test Mode	TX B Mode_Total
-----------	-----------------

Channel	Frequency (MHz)	Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	21.08	30.00	1.0000	Complies
06	2437	20.83	30.00	1.0000	Complies
11	2462	20.89	30.00	1.0000	Complies