
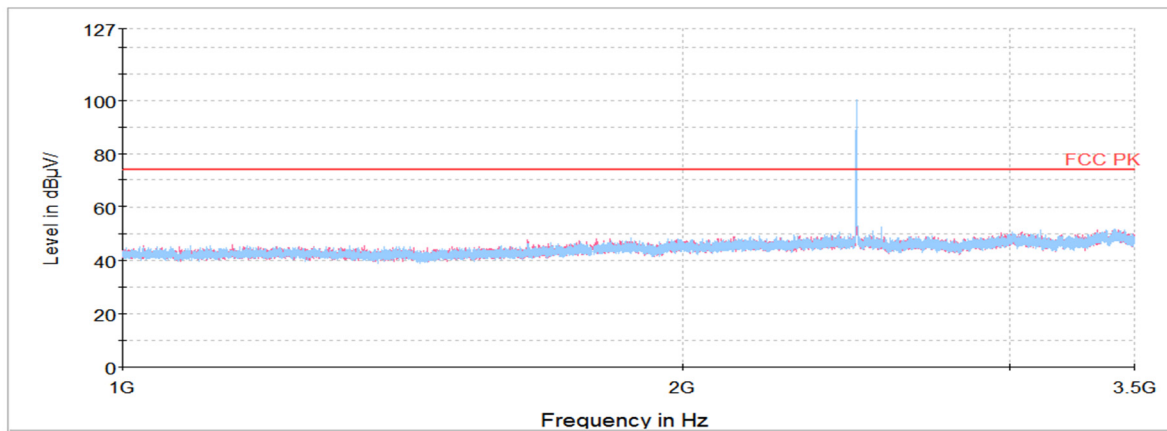
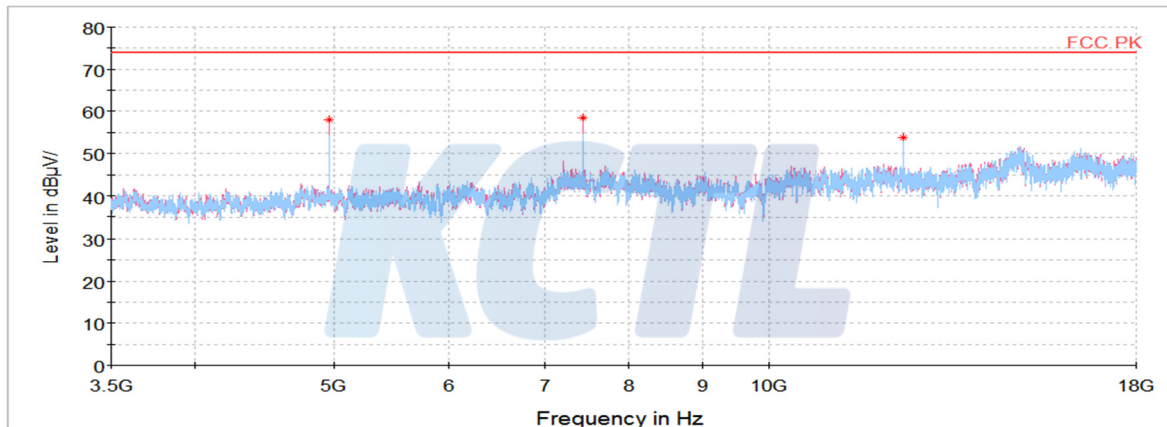
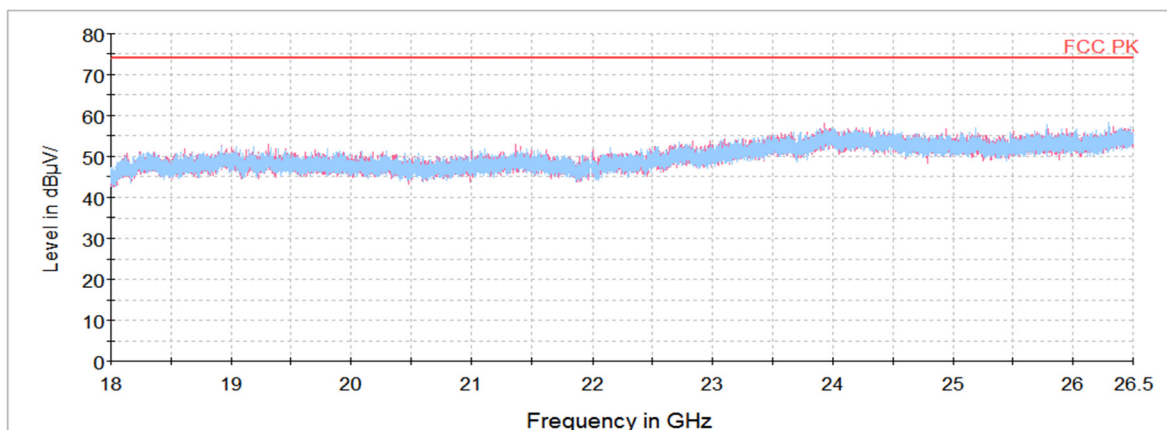


Horizontal/Vertical for 1 GHz ~ 3.5 GHz**Horizontal/Vertical for 3.5 GHz ~ 18 GHz****Horizontal/Vertical for 18 GHz ~ 26.5 GHz**

7.7. Conducted Spurious Emission

Test setup



Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operation, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation specified in §15.209(a) is not required. In addition, radiated emission limits specified in §15.209(a) (see §15.205(c)).

Limit : 20 dBc

Test procedure

ANSI C63.10-2013 - Section 6.10.4, 7.8.8

Test settings

▪ Band-edge

- 1) Span : Wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products which fall outside of the authorized band of operation
- 2) Reference level : As required to keep the signal from exceeding the maximum instrument input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log(\text{OBW}/\text{RBW})]$ below the reference level.
- 3) Attenuation: Auto (at least 10 dB preferred)
- 4) Sweep time = Coupled
- 5) RBW : 100 kHz
- 6) VBW : 300 kHz
- 7) Detector : Peak
- 8) Trace : Max hold

▪ Spurious emissions

- 1) Span : 30 MHz to 10 times the operating frequency in GHz
- 2) RBW : 100 kHz
- 3) VBW : 300 kHz
- 4) Sweep time : Coupled
- 5) Detector : Peak

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SRF0081-A


Page (67) of (76)

KCTL


Test results

Ant 1 GFSK


Conducted band-edge / Low ch.

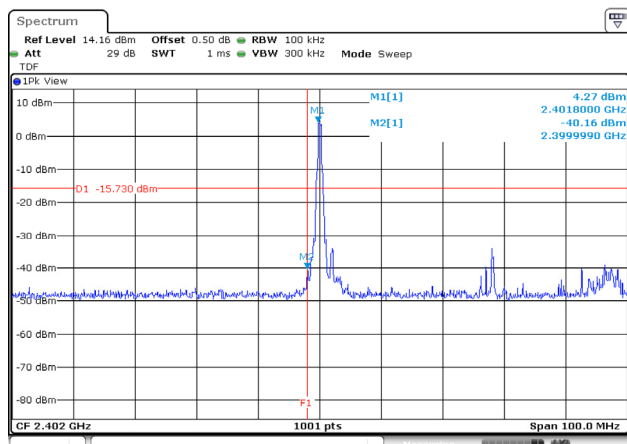


Conducted spurious / Low ch.

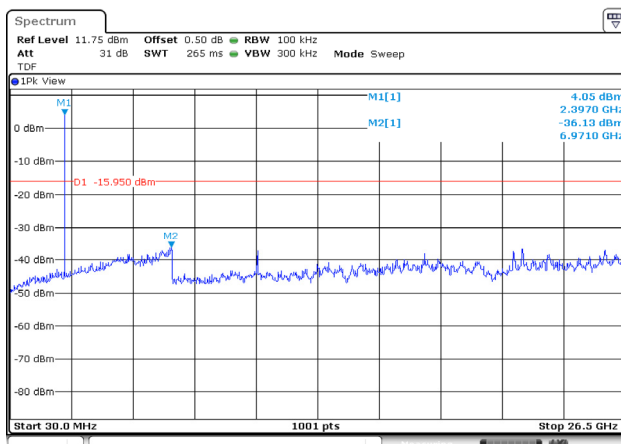


Conducted band-edge / High ch.

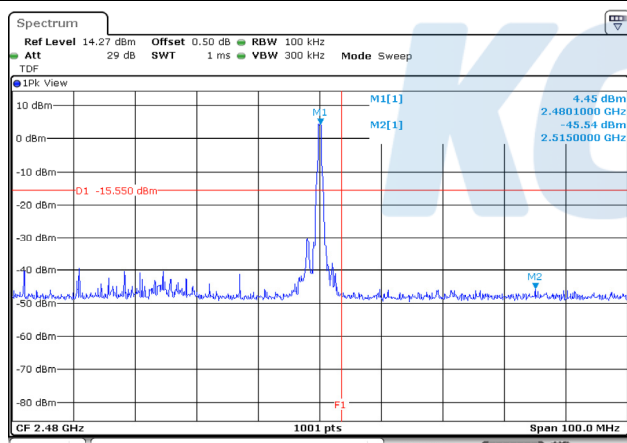


Conducted spurious / Mid ch.

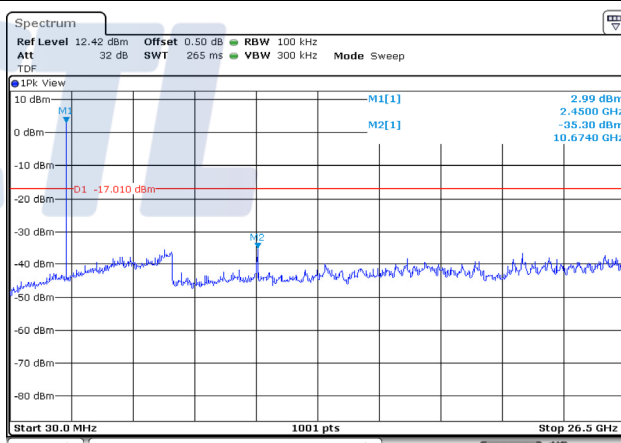

Conducted band-edge / Hopping ch.

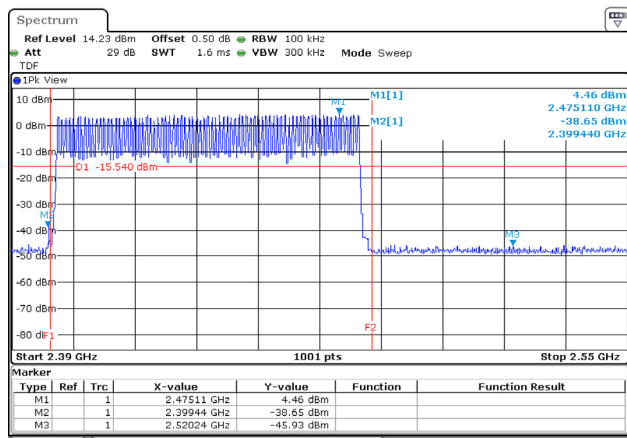

Conducted spurious / High ch.

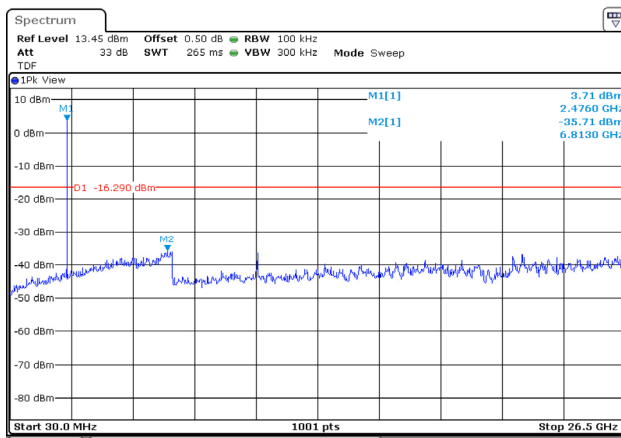

This test report shall not be reproduced, except in full, without the written approval

KCTL-TIR001-003/2

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR20-SRF0081-A

Page (68) of (76)


KCTL

$\pi/4$ DQPSK


Conducted band-edge / Low ch.

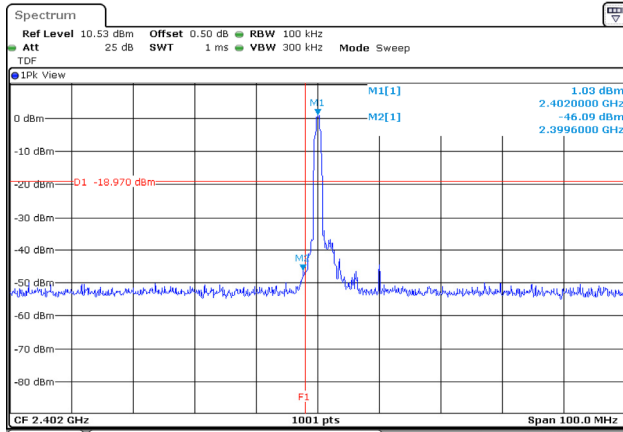


Conducted spurious / Low ch.

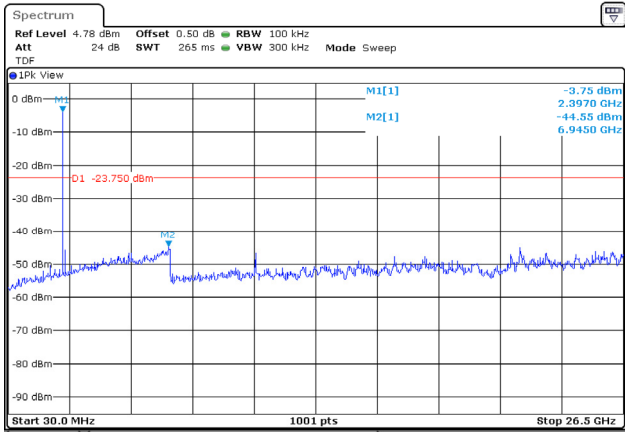


Conducted band-edge / High ch.

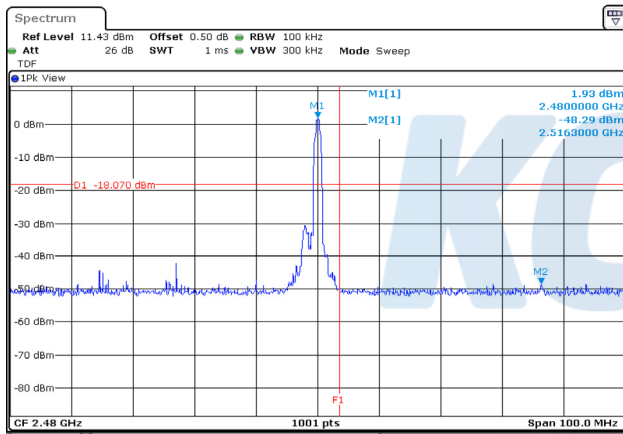


Conducted spurious / Mid ch.

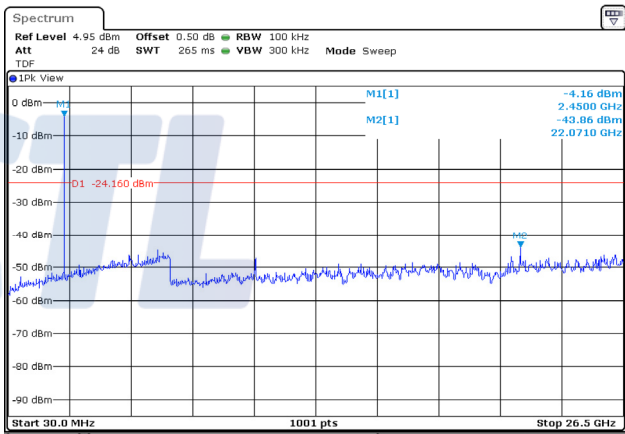

Conducted band-edge / Hopping ch.

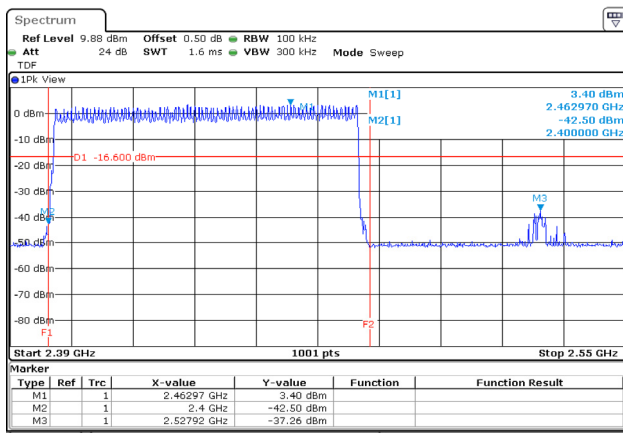

Conducted spurious / High ch.

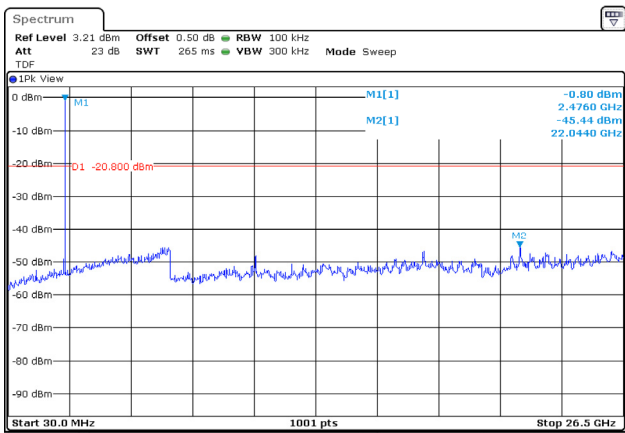

This test report shall not be reproduced, except in full, without the written approval

KCTL-TIR001-003/2

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR20-SRF0081-A

Page (69) of (76)


KCTL

8DPSK


Conducted band-edge / Low ch.

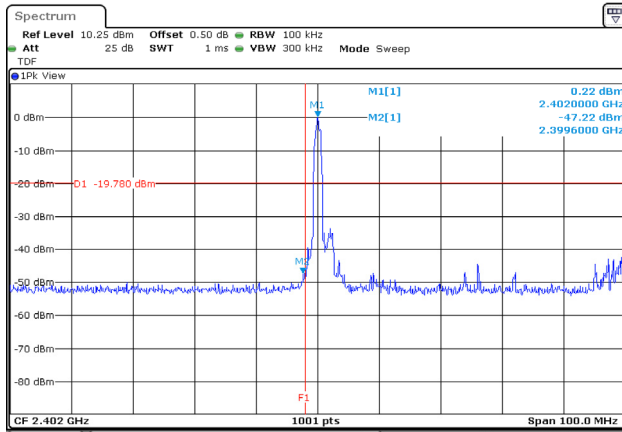


Conducted spurious / Low ch.

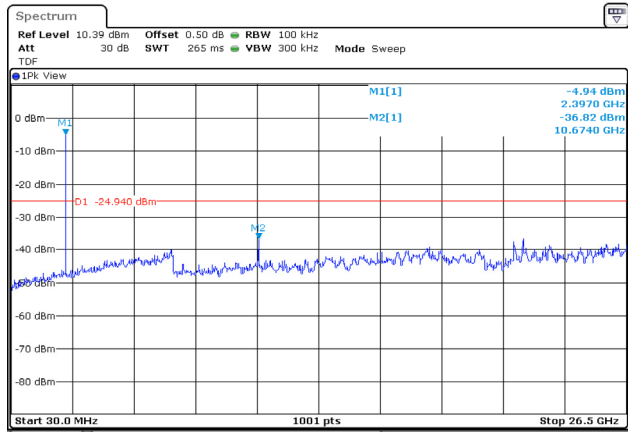


Conducted band-edge / High ch.

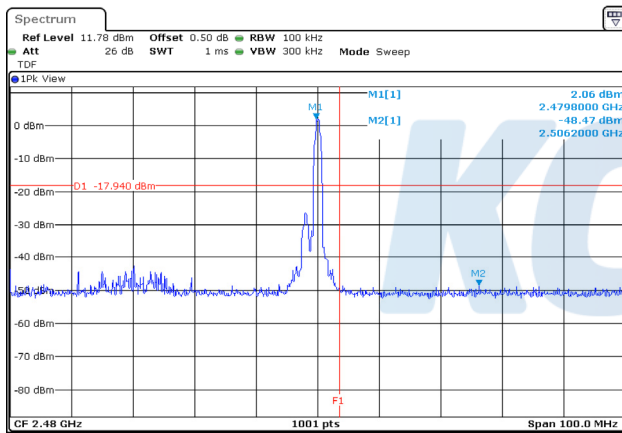


Conducted spurious / Mid ch.

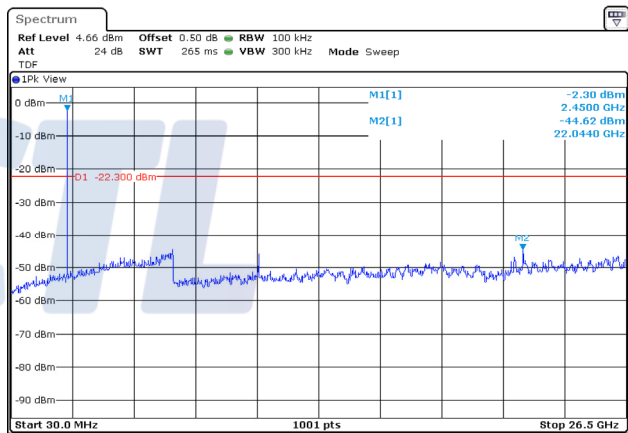

Conducted band-edge / Hopping ch.

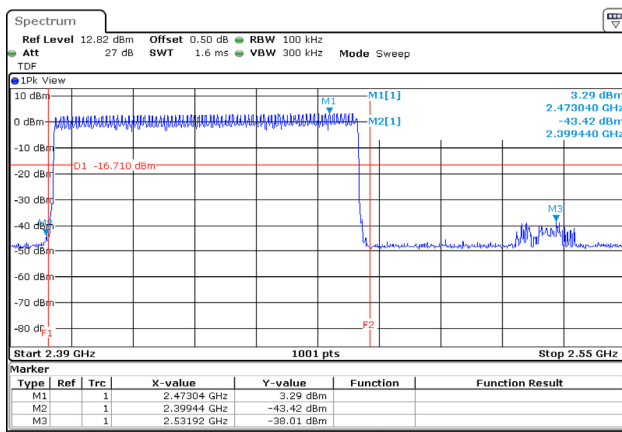

Conducted spurious / High ch.

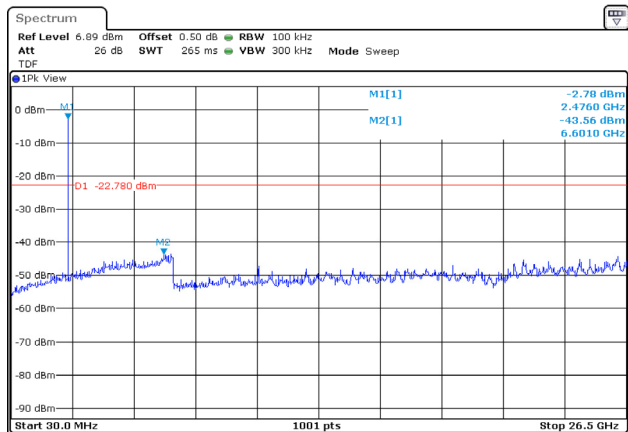

This test report shall not be reproduced, except in full, without the written approval

KCTL-TIR001-003/2

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR20-SRF0081-A

Page (70) of (76)


KCTL

Ant 2 GFSK


Conducted band-edge / Low ch.

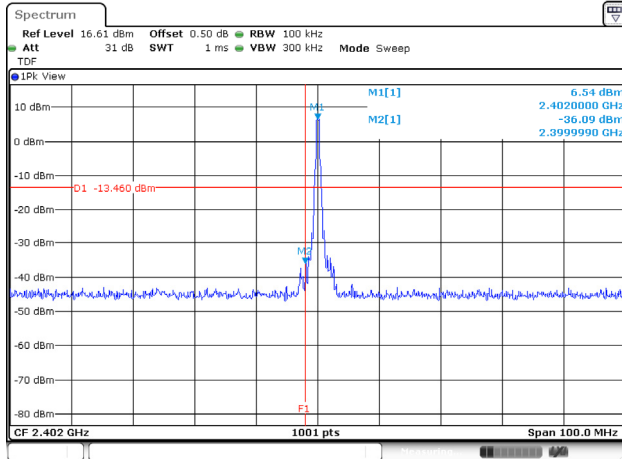


Conducted spurious / Low ch.

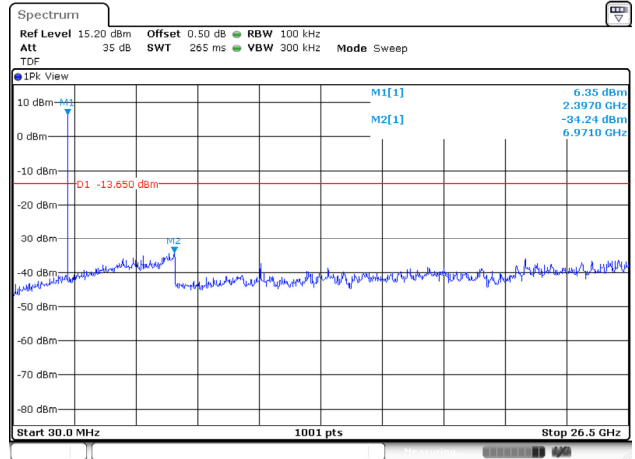


Conducted band-edge / High ch.

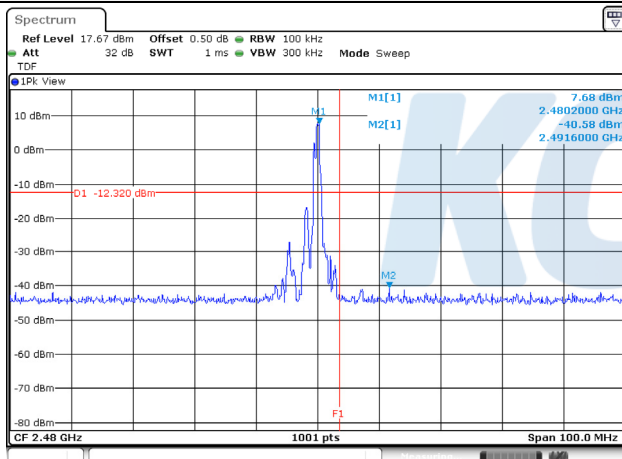


Conducted spurious / Mid ch.

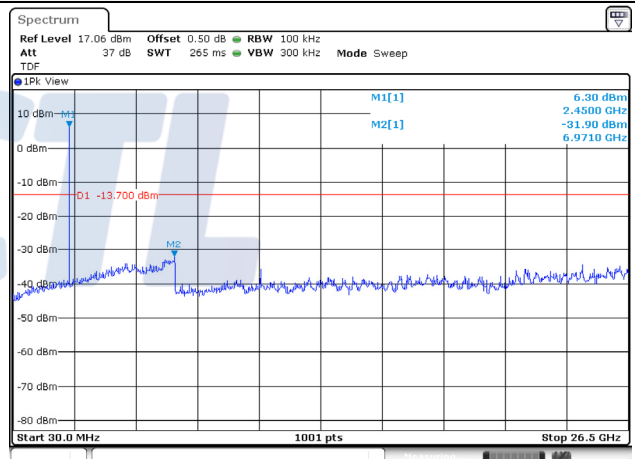

Conducted band-edge / Hopping ch.

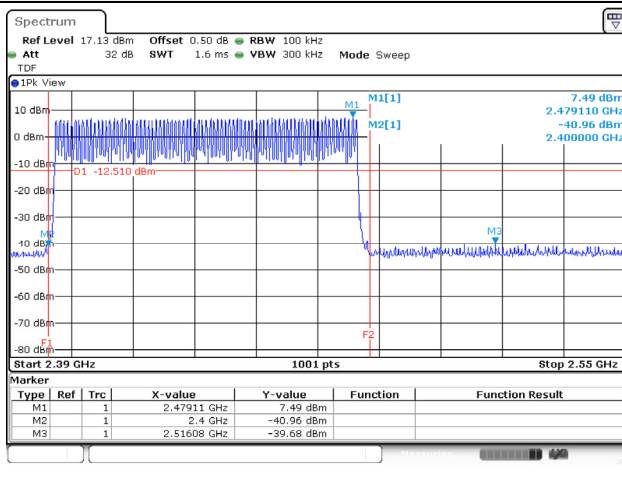

Conducted spurious / High ch.

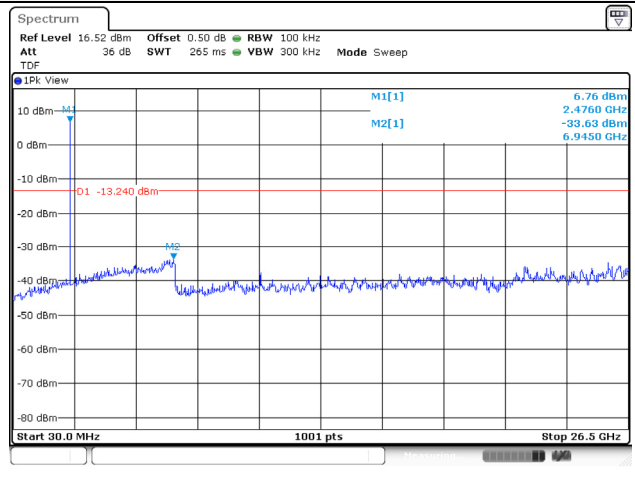

This test report shall not be reproduced, except in full, without the written approval

KCTL-TIR001-003/2

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR20-SRF0081-A

Page (71) of (76)


KCTL

$\pi/4$ DQPSK


Conducted band-edge / Low ch.

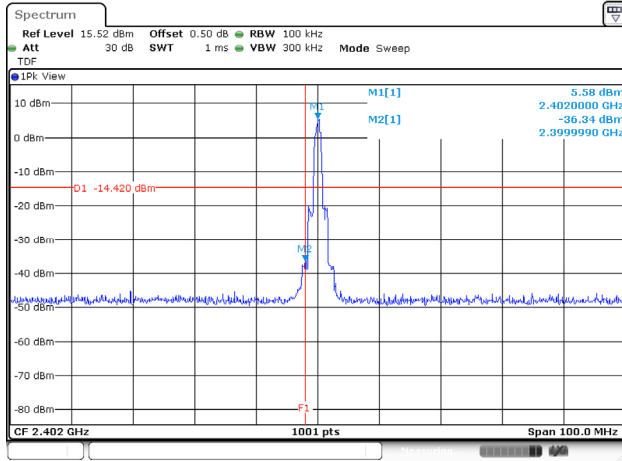


Conducted spurious / Low ch.

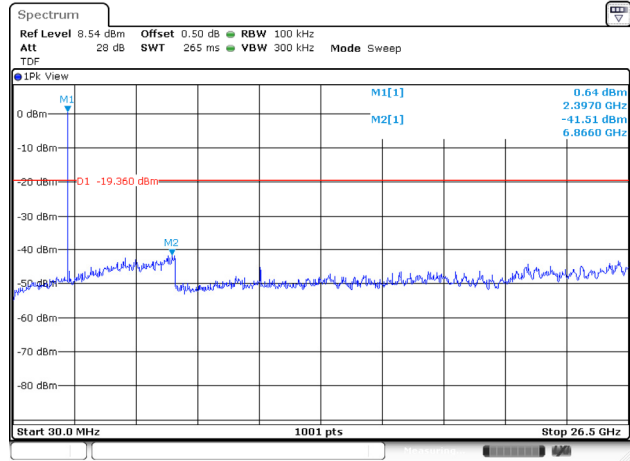


Conducted band-edge / High ch.

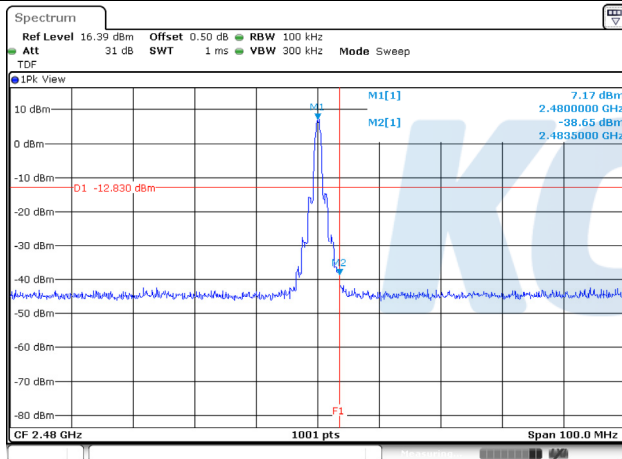


Conducted spurious / Mid ch.

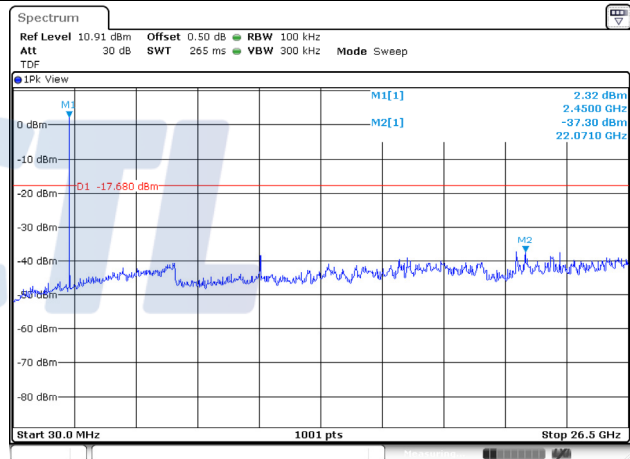

Conducted band-edge / Hopping ch.

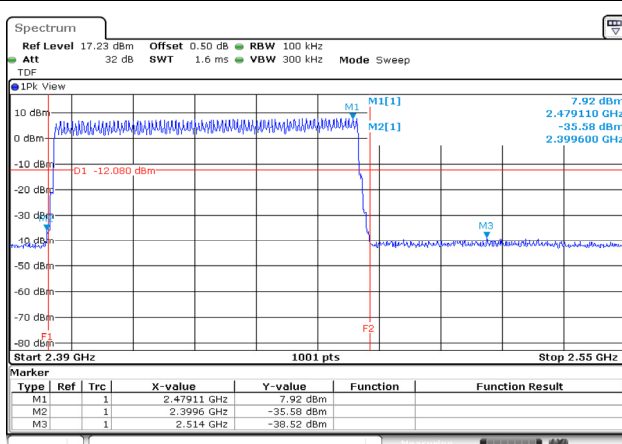

Conducted spurious / High ch.

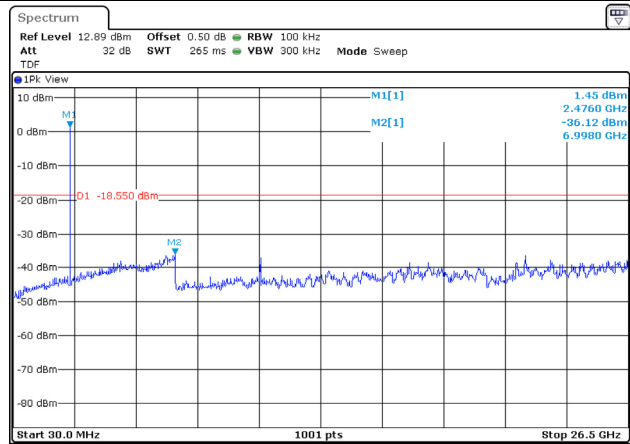

This test report shall not be reproduced, except in full, without the written approval

KCTL-TIR001-003/2

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR20-SRF0081-A

Page (72) of (76)


KCTL

8DPSK


Conducted band-edge / Low ch.

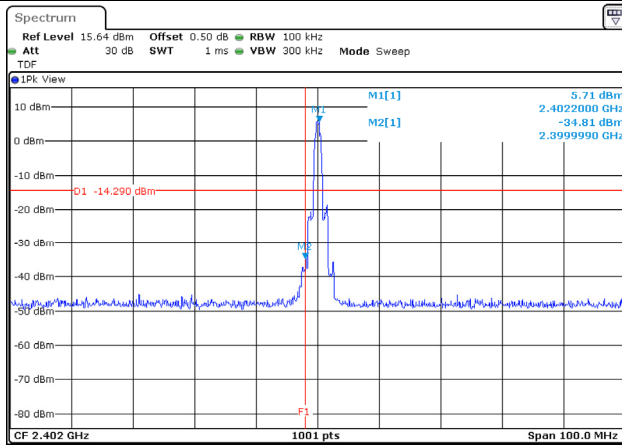


Conducted spurious / Low ch.

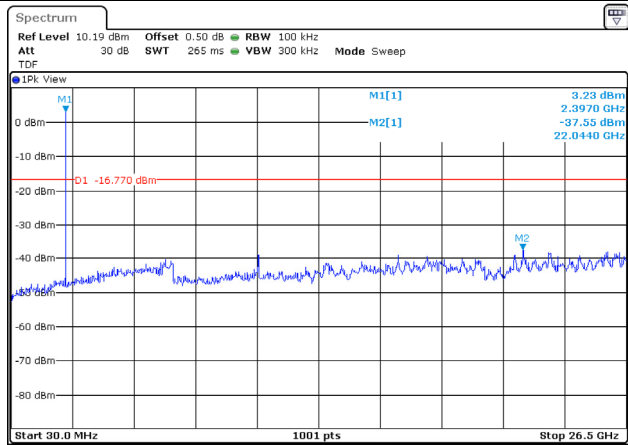


Conducted band-edge / High ch.

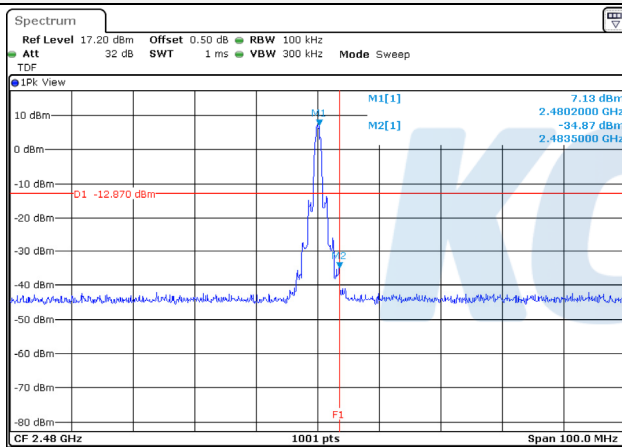


Conducted spurious / Mid ch.

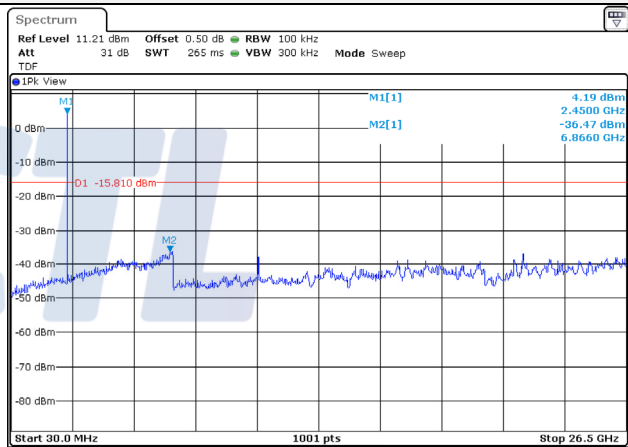

Conducted band-edge / Hopping ch.

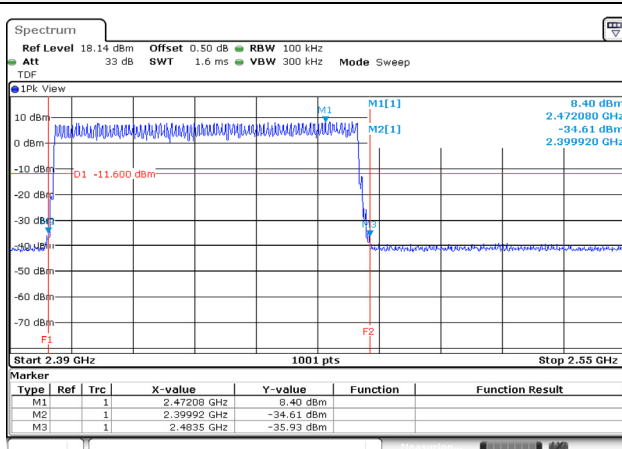

Conducted spurious / High ch.

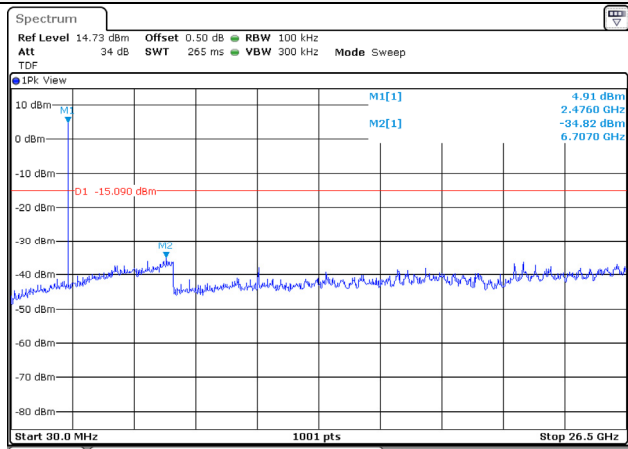


This test report shall not be reproduced, except in full, without the written approval

KCTL-TIR001-003/2

7.8. AC Conducted emission

Test setup

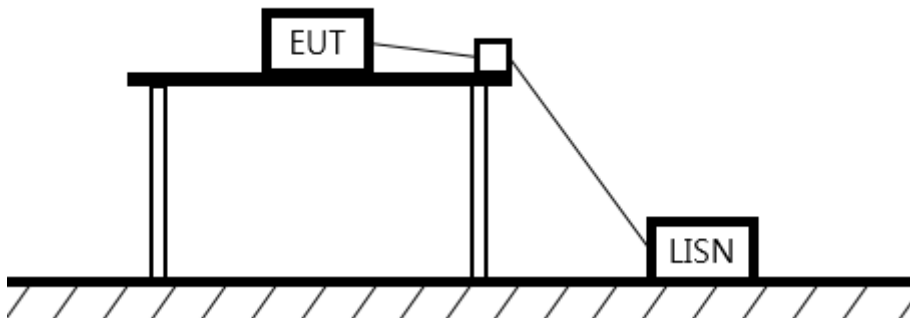

Limit

According to 15.207(a), for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohm line impedance stabilization network (LISN). Compliance with the provision of this paragraph shall be on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower applies at the boundary between the frequencies ranges.

Frequency of Emission (MHz)	Conducted limit (dB μ V/m)	
	Quasi-peak	Average
0.15 – 0.50	66 - 56*	56 - 46*
0.50 – 5.00	56	46
5.00 – 30.0	60	50

Measurement procedure

1. The EUT was placed on a wooden table of size, 1 m by 1.5 m, raised 80 cm in which is located 40 cm away from the vertical wall and 1.5m away from the side wall of the shielded room.
2. Each current-carrying conductor of the EUT power cord was individually connected through a 50 Ω /50 μ H LISN, which is an input transducer to a spectrum analyzer or an EMI/Field Intensity Meter, to the input power source.
3. Exploratory measurements were made to identify the frequency of the emission that had the highest amplitude relative to the limit by operating the EUT in a range of typical modes of operation, cable position, and with a typical system equipment configuration and arrangement. Based on the exploratory tests of the EUT, the one EUT cable configuration and arrangement and mode of operation that had produced the emission with the highest amplitude relative to the limit was selected for the final measurement.
4. The final test on all current-carrying conductors of all of the power cords to the equipment that comprises the EUT (but not the cords associated with other non-EUT equipment in the system) was then performed over the frequency range of 0.15 MHz to 30 MHz.
5. The measurements were made with the detector set to peak amplitude within a bandwidth of 10 kHz or to quasi-peak and average within a bandwidth of 9 kHz. The EUT was in transmitting mode during the measurements.

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR20-SRF0081-A

Page (74) of (76)

KCTL

Test results

Ant 1 (GFSK_Highest_2 480 MHz)

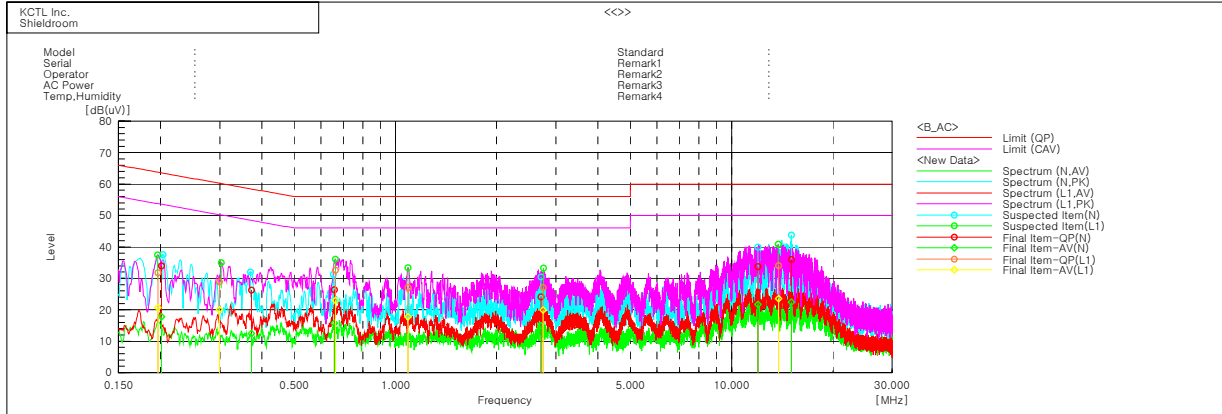

Final Result

--- N Phase ---

No.	Frequency [MHz]	Reading QP [dB(uV)]	Reading CAV [dB(uV)]	c.f. [dB]	Result QP [dB(uV)]	Result CAV [dB(uV)]	Limit QP [dB(uV)]	Limit AV [dB(uV)]	Margin QP [dB]	Margin CAV [dB]
1	0.20146	24.0	7.9	9.9	33.9	17.8	63.6	53.6	29.7	35.8
2	0.37311	16.4	2.6	9.8	26.2	12.4	58.4	48.4	32.2	36.0
3	0.65783	16.6	5.9	9.8	26.4	15.7	56.0	46.0	29.6	30.3
4	2.71268	14.5	5.3	9.6	24.1	14.9	56.0	46.0	31.9	31.1
5	11.97746	23.8	11.8	9.9	33.7	21.7	60.0	50.0	26.3	28.3
6	15.04242	26.0	12.5	9.9	35.9	22.4	60.0	50.0	24.1	27.6

--- L1 Phase ---

No.	Frequency [MHz]	Reading QP [dB(uV)]	Reading CAV [dB(uV)]	c.f. [dB]	Result QP [dB(uV)]	Result CAV [dB(uV)]	Limit QP [dB(uV)]	Limit AV [dB(uV)]	Margin QP [dB]	Margin CAV [dB]
1	0.19674	21.8	10.7	10.0	31.8	20.7	63.7	53.7	31.9	33.0
2	0.29932	19.2	10.4	9.7	28.9	20.1	60.3	50.3	31.4	30.2
3	0.66358	22.8	13.1	9.8	32.6	22.9	56.0	46.0	23.4	23.1
4	1.08832	17.2	8.0	9.8	27.0	17.8	56.0	46.0	29.0	28.2
5	2.75072	17.4	10.3	9.6	27.0	19.9	56.0	46.0	29.0	26.1
6	13.77685	24.1	13.6	9.9	34.0	23.5	60.0	50.0	26.0	26.5

KCTL Inc.


65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SRF0081-A

Page (75) of (76)

KCTL

Ant 2 (GFSK_Highest_2 480 MHz)

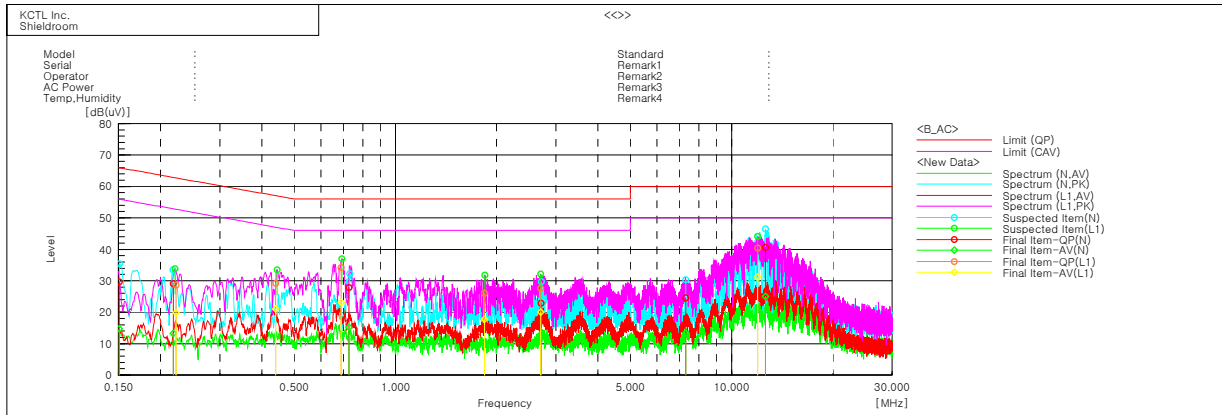

Final Result

--- N Phase ---

No.	Frequency	Reading QP	Reading CAV	c.f	Result QP	Result CAV	Limit QP	Limit AV	Margin QP	Margin CAV
	[MHz]	[dB(uV)]	[dB(uV)]	[dB]	[dB(uV)]	[dB(uV)]	[dB(uV)]	[dB(uV)]	[dB]	[dB]
1	0.15058	19.8	5.0	9.8	29.6	14.8	66.0	56.0	36.4	41.2
2	0.21817	19.3	3.5	9.8	29.1	13.3	62.9	52.9	33.8	39.6
3	0.72801	18.1	5.4	9.8	27.9	15.2	56.0	46.0	28.1	30.8
4	2.70987	13.2	3.4	9.6	22.8	13.0	56.0	46.0	33.2	33.0
5	7.29965	14.8	3.7	9.7	24.5	13.4	60.0	50.0	35.5	36.6
6	12.59505	30.7	15.1	9.9	40.6	25.0	60.0	50.0	19.4	25.0

--- L1 Phase ---

No.	Frequency	Reading QP	Reading CAV	c.f	Result QP	Result CAV	Limit QP	Limit AV	Margin QP	Margin CAV
	[MHz]	[dB(uV)]	[dB(uV)]	[dB]	[dB(uV)]	[dB(uV)]	[dB(uV)]	[dB(uV)]	[dB]	[dB]
1	0.22267	18.9	10.1	9.7	28.6	19.8	62.7	52.7	34.1	32.9
2	0.43981	19.4	11.2	9.8	29.2	21.0	57.1	47.1	27.9	26.1
3	0.68919	24.3	13.4	9.8	34.1	23.2	56.0	46.0	21.9	22.8
4	1.84123	16.3	8.0	9.7	26.0	17.7	56.0	46.0	30.0	28.3
5	2.70249	18.0	10.4	9.6	27.6	20.0	56.0	46.0	28.4	26.0
6	11.94729	30.5	21.2	9.9	40.4	31.1	60.0	50.0	19.6	18.9

8. Measurement equipment

Equipment Name	Manufacturer	Model No.	Serial No.	Next Cal. Date
Spectrum Analyzer	R & S	FSV30	100806	20.07.30
Spectrum Analyzer	R & S	FSV40	100988	20.01.04
DC Power Supply	AGILENT	E3632A	MY40001543	20.05.13
Wideband Power Sensor	R & S	NRP-Z81	102398	20.01.25
Attenuator	API Inmet	40AH2W-10	15	20.05.15
ATTENUATOR	R & S	DNF Dämpfungsglied 10 dB in N-50 Ohm	31211	20.05.13
EMI TEST RECEIVER	R & S	ESCI	100732	20.08.22
Bi-Log Antenna	SCHWARZBECK	VULB 9168	583	20.05.04
Amplifier	SONOMA INSTRUMENT	310N	284608	20.08.22
COAXIAL FIXED ATTENUATOR	Agilent	8491B-003	2708A18758	20.05.04
Horn antenna	ETS.lindgren	3116	00086635	20.05.09
Horn antenna	ETS.lindgren	3117	161225	20.05.22
AMPLIFIER	L-3 Narda-MITEQ	AMF-7D-01001800- 22-10P	2031196	20.02.21
AMPLIFIER	L-3 Narda-MITEQ	JS44-18004000-33 -8P	2000997	20.08.01
Broadband PreAmplifier	SCHWARZBECK	BBV9718	216	20.07.30
LOOP Antenna	R & S	HFH2-Z2	100355	20.08.24
Antenna Mast	Innco Systems	MA4640-XP-ET	-	-
Turn Table	Innco Systems	DT2000	79	-
Antenna Mast	Innco Systems	MA4000-EP	303	-
Turn Table	Innco Systems	DT2000	79	-
Highpass Filter	WT	WT-A1698-HS	WT160411001	20.05.14
TWO-LINE V - NETWORK	R&S	ENV216	101584	20.04.05
EMI TEST RECEIVER	R & S	ESCI	101408	20.02.22
Signal Generator	R & S	SMB100A	176206	20.01.25

End of test report