

FCC PART 15.247 TEST REPORT

For

Panasonic India Pvt Ltd

12th Floor, Ambience Tower, Ambience Island, NH-8, Gurgaon, Haryana, India

FCC ID: 2APTI-S54EI6

Report Type: Original Report	Product Type: smart phone
Report Number: RSZ190628006-00B	
Report Date: 2019-08-02	
Nancy Wang 	
Reviewed By: RF Engineer	
Prepared By: Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn	

Note: This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA* or any agency of the Federal Government. * This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk “*”.

The information marked # is provided by the applicant, the laboratory is not responsible for its authenticity.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EUT EXERCISE SOFTWARE	6
SPECIAL ACCESSORIES.....	6
EQUIPMENT MODIFICATIONS	6
SUPPORT EQUIPMENT LIST AND DETAILS	6
EXTERNAL I/O CABLE.....	6
BLOCK DIAGRAM OF TEST SETUP	7
SUMMARY OF TEST RESULTS	8
TEST EQUIPMENT LIST	9
FCC§15.247 (i), §1.1307 (b) (1) &§2.1093 – RF EXPOSURE	10
APPLICABLE STANDARD	10
FCC §15.203 – ANTENNA REQUIREMENT	11
APPLICABLE STANDARD	11
ANTENNA CONNECTOR CONSTRUCTION	11
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	12
APPLICABLE STANDARD	12
EUT SETUP.....	12
EMI TEST RECEIVER SETUP.....	12
TEST PROCEDURE	12
CORRECTED FACTOR & MARGIN CALCULATION	13
TEST RESULTS SUMMARY	13
TEST DATA	13
FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS.....	16
APPLICABLE STANDARD	16
EUT SETUP	16
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	17
TEST PROCEDURE	17
CORRECTED AMPLITUDE & MARGIN CALCULATION	17
TEST RESULTS SUMMARY	17
TEST DATA	18
FCC §15.247(a) (1)-CHANNEL SEPARATION TEST	24
APPLICABLE STANDARD	24
TEST PROCEDURE	24
TEST DATA	24

FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH.....	31
APPLICABLE STANDARD	31
TEST PROCEDURE	31
TEST DATA	31
FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST	37
APPLICABLE STANDARD	37
TEST PROCEDURE	37
TEST DATA	37
FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME).....	40
APPLICABLE STANDARD	40
TEST PROCEDURE	40
TEST DATA	40
FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT	56
APPLICABLE STANDARD	56
TEST PROCEDURE	56
TEST DATA	56
FCC §15.247(d) - BAND EDGES TESTING	57
APPLICABLE STANDARD	57
TEST PROCEDURE	57
TEST DATA	57

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Product	smart phone
Tested Model	ELUGA I6
Frequency Range	Bluetooth: 2402~2480MHz
Transmit Power (Peak Conducted Power)	Bluetooth: 7.31dBm
Modulation Technique	Bluetooth: GFSK, $\pi/4$ -DQPSK, 8DPSK
Antenna Specification	FPC Antenna: -0.29dBi
Voltage Range	DC 3.85V from battery or DC 5.0V from adapter
Date of Test	2019-06-24 to 2019-08-03
Sample serial number	EI609190000001
Received date	2019-06-28
Sample/EUT Status	Good condition
Adapter information	Model:A8A-050200U-US1 Input: AC 100-240V, 50/60Hz, 0.35A Output: DC 5V, 2A

Objective

This test report is prepared on behalf of *Panasonic India Pvt Ltd* in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

FCC Part 15.247 DTS, Part 22H /24E PCE submissions with FCC ID: 2APTI-S54EI6.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

And KDB 558074 D01 15.247 Meas Guidance v05r02.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		±5%
RF Output Power with Power meter		±0.73dB
RF conducted test with spectrum		±1.6dB
AC Power Lines Conducted Emissions		±1.95dB
Emissions, Radiated	Below 1GHz	±4.75dB
	Above 1GHz	±4.88dB
Temperature		±1 °C
Humidity		±6%
Supply voltages		±0.4%

Note: Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 342867, the FCC Designation No.: CN1221.

The test site has been registered with ISED Canada under ISED Canada Registration Number 3062B.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in an engineering mode.

EUT Exercise Software

No exercise software was made to the EUT tested. The power level is default.

Special Accessories

No special accessory.

Equipment Modifications

No modification was made to the EUT tested.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
N/A	N/A	N/A	N/A

External I/O Cable

Cable Description	Length (m)	From Port	To
Un-shielding Detachable USB Cable	1.0	EUT	Adapter

Block Diagram of Test Setup

For conducted emission:

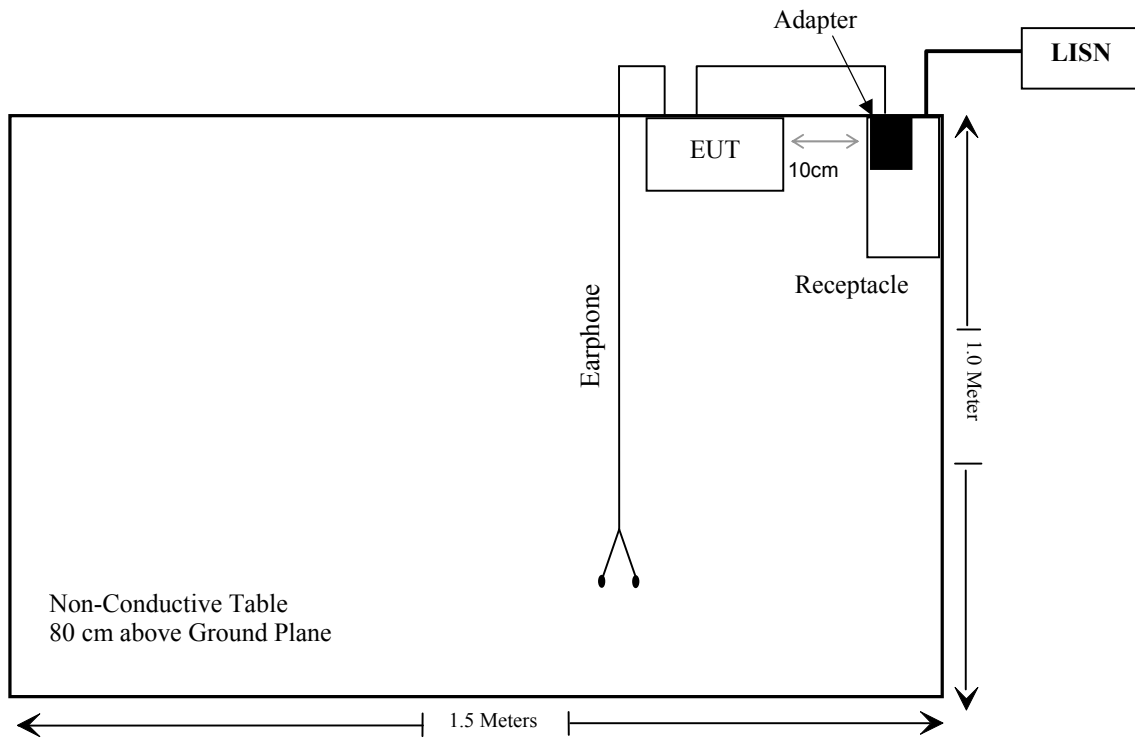

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.247 (i), §1.1307 (b) (1)& §2.1093	RF Exposure	Compliance
§15.203	Antenna Requirement	Compliance
§15.207(a)	AC Line Conducted Emissions	Compliance
§15.205, §15.209 & §15.247(d)	Radiated Emissions	Compliance
§15.247(a)(1)	20 dB Emission Bandwidth	Compliance
§15.247(a)(1)	Channel Separation Test	Compliance
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliance
§15.247(b)(1)	Peak Output Power Measurement	Compliance
§15.247(d)	Band edges	Compliance

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted Emissions Test					
Rohde & Schwarz	EMI Test Receiver	ESR	1316.3003K03-101746-zn	2018-07-11	2019-07-11
Rohde & Schwarz	LISN	ENV216	3560.6650.12-101613-Yb	2019-01-25	2020-01-25
Rohde & Schwarz	Transient Limiter	ESH3Z2	DE25985	2019-03-02	2020-03-02
Rohde & Schwarz	CE Test software	EMC 32	V8.53.0	NCR	NCR
unknwon	Conducted Emission Cable	unknwon	UF A210B-1-0720-504504	2018-11-12	2019-11-12
Radiated Emission Test					
A.H. System	Horn Antenna	SAS-200/571	135	2018-09-01	2021-08-31
Rohde & Schwarz	Signal Analyzer	FSEM	845987/005	2019-07-22	2020-07-21
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2017-12-22	2020-12-21
COM-POWER	Pre-amplifier	PA-122	181919	2018-11-12	2019-11-12
Sonoma Instrument	Amplifier	310N	186238	2019-11-12	2020-11-12
Rohde & Schwarz	EMI Test Receiver	ESR	1316.3003K03-101746-zn	2019-07-11	2020-07-11
Ducommun technologies	RF Cable	UFA147A-2362-100100	MFR64639 231029-003	2018-11-12	2019-11-12
Ducommun technologies	RF Cable	104PEA	218124002	2018-11-12	2019-11-12
Ducommun Technologies	RF Cable	RG-214	1	2019-05-21	2019-11-19
Ducommun technologies	RF Cable	RG-214	2	2018-11-12	2019-11-12
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-04	2017-12-29	2020-12-28
Heatsink Required	Amplifier	QLW-18405536-J0	15964001002	2018-11-12	2019-11-12
Sinoscite	Notch Filter	BSF2402-2480MN-0898-001	99632	2018-11-12	2019-11-12
Rohde & Schwarz	Auto test software	EMC 32	V9.10	NCR	NCR
RF Conducted Test					
Agilent	USB wideband power meter	U2021XA	MY54250003	2019-07-10	2020-07-09
WEINSCHL	3dB Attenuator	unknwon	unknwon	Each Time	
Rohde & Schwarz	SPECTRUM ANALYZER	FSU26	200120	2018-12-24	2019-12-24
Ducommun technologies	RF Cable	RG-214	3	Each Time	

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC§15.247 (i), §1.1307 (b) (1) & §2.1093 – RF EXPOSURE

Applicable Standard

According to FCC §2.1093 and §1.1307(b) (1), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB 447498 D01 General RF Exposure Guidance

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot$

$[\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

1. $f(\text{GHz})$ is the RF channel transmit frequency in GHz.

2. Power and distance are rounded to the nearest mW and mm before calculation.

3. The result is rounded to one decimal place for comparison.

4. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test Exclusion.

Worst case:

Mode	Frequency (MHz)	Max Tune-up Conducted Power (dBm)	Max Tune-up Conducted Power (mW)	Calculated Distance (mm)	Calculated value	Threshold (1-g SAR)	SAR Test Exclusion
Bluetooth	2480	7.5	5.6	5	1.8	3.0	Yes

The max tune up conducted power was declared by the applicant.

Result: No Standalone SAR test is required

FCC §15.203 – ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Antenna Connector Construction

The EUT has one internal antenna arrangement, which was permanently attached and the antenna gain is -0.29 dBi, fulfill the requirement of this section. Please refer to the EUT photos.


Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207(a)

EUT Setup

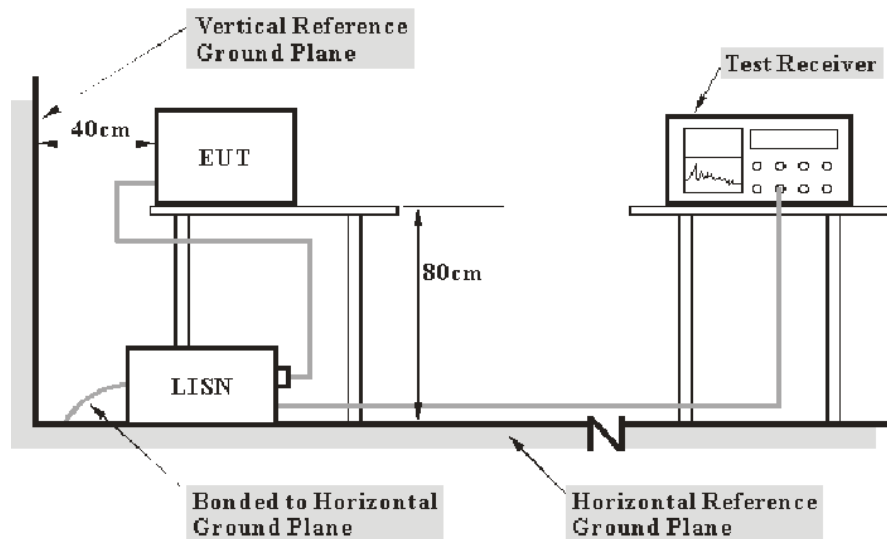

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.10-2013. The related limit was specified in FCC Part 15.207.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Corrected Factor & Margin Calculation

The Corrected factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Correction Factor} = \text{LISN VDF} + \text{Cable Loss} + \text{Transient Limiter Attenuation}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207,

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level complies with the limit if

$$L_m + U_{(Lm)} \leq L_{\text{lim}} + U_{\text{cispr}}$$

In BACL, $U_{(Lm)}$ is less than U_{cispr} , if L_m is less than L_{lim} , it implies that the EUT complies with the limit.


Test Data

Environmental Conditions


Temperature:	25 °C
Relative Humidity:	50 %
ATM Pressure:	101.0 kPa

The testing was performed by Haiguo Li on 2019-07-01.

EUT operation mode: Transmitting & charging (the worst case is 8DPSK Mode, Middle channel)

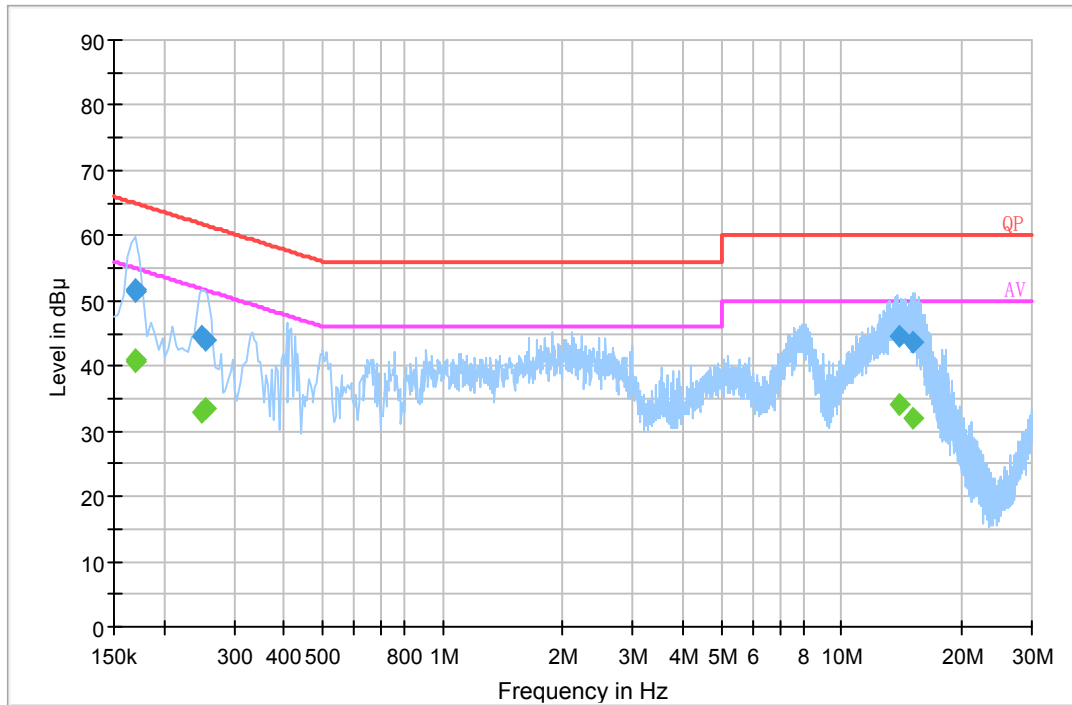AC 120V/60 Hz, Line

Frequency (MHz)	Corrected Amplitude (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/Ave./QP)
0.169500	51.4	19.9	65.0	13.6	QP
0.170501	51.8	19.9	64.9	13.1	QP
0.249500	44.4	19.8	61.8	17.4	QP
0.253500	43.9	19.8	61.6	17.7	QP
14.033950	44.7	20.0	60.0	15.3	QP
15.109970	43.5	20.0	60.0	16.5	QP
0.169500	40.8	19.9	55.0	14.2	Ave.
0.170501	40.6	19.9	54.9	14.3	Ave.
0.249500	33.0	19.8	51.8	18.8	Ave.
0.253500	33.5	19.8	51.6	18.1	Ave.
14.033950	34.1	20.0	50.0	15.9	Ave.
15.109970	31.9	20.0	50.0	18.1	Ave.

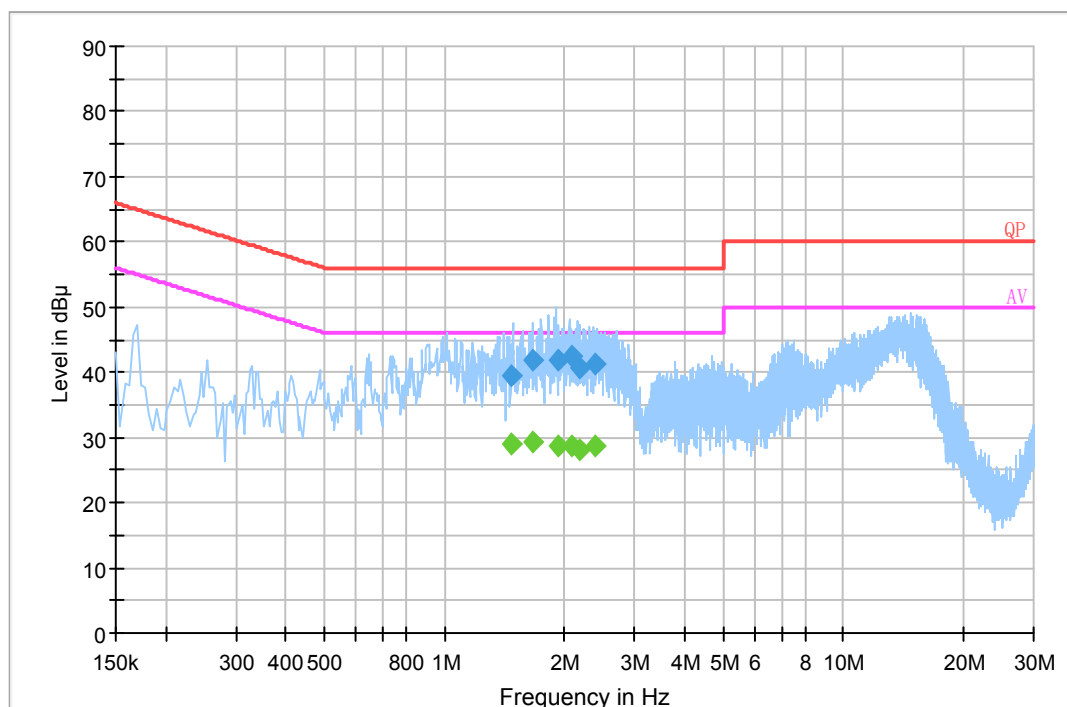AC 120V/60 Hz, Neutral



Frequency (MHz)	Corrected Amplitude (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/Ave./QP)
1.475770	39.6	19.8	56.0	16.4	QP
1.660950	41.8	19.9	56.0	14.2	QP
1.921470	41.7	19.9	56.0	14.3	QP
2.079190	42.4	19.9	56.0	13.6	QP
2.181630	40.8	19.9	56.0	15.2	QP
2.378450	41.1	19.9	56.0	14.9	QP
1.475770	28.9	19.8	46.0	17.1	Ave.
1.660950	29.2	19.9	46.0	16.8	Ave.
1.921470	28.7	19.9	46.0	17.3	Ave.
2.079190	28.8	19.9	46.0	17.2	Ave.
2.181630	28.2	19.9	46.0	17.8	Ave.
2.378450	28.6	19.9	46.0	17.4	Ave.

Note:

- 1) Correction Factor = LISN VDF (Voltage Division Factor) + Cable Loss + Transient Limiter Attenuation
- 2) Corrected Amplitude = Reading + Correction Factor
- 3) Margin = Limit – Corrected Amplitude

FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS**Applicable Standard**

FCC §15.205; §15.209; §15.247(d)

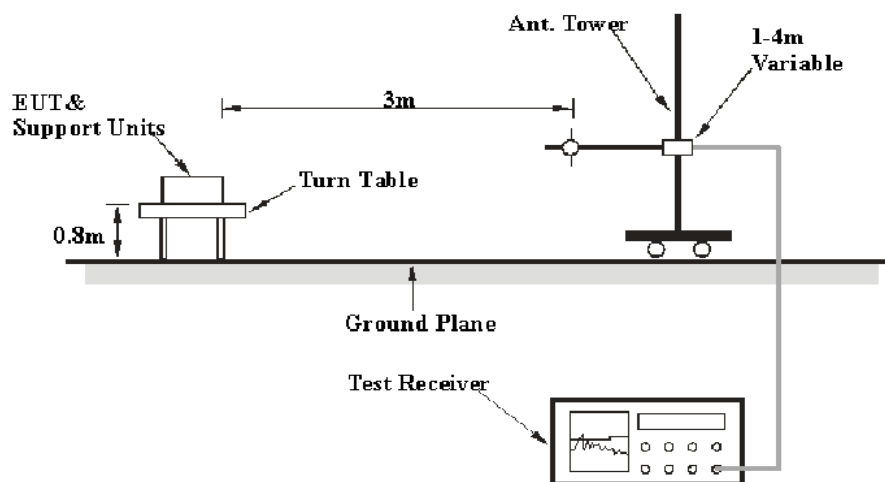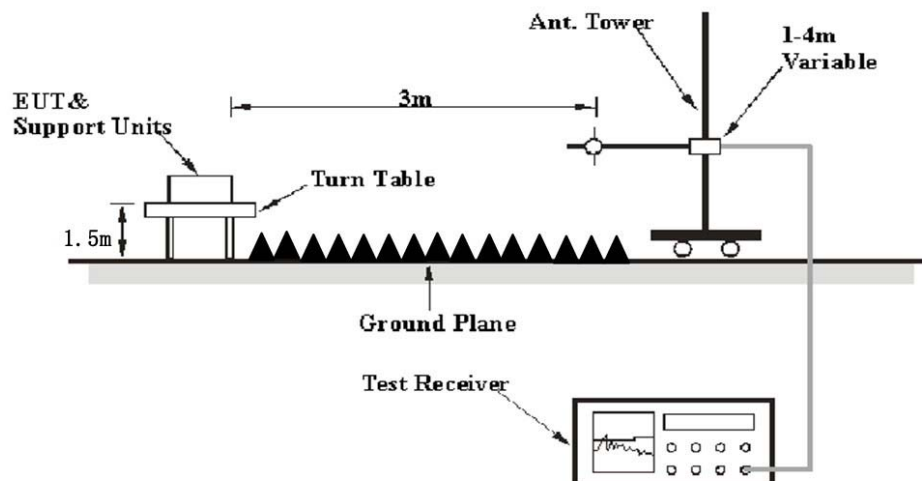EUT Setup**Below 1 GHz:****Above 1GHz:**

The radiated emission tests were performed in the 3 meters, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209 and FCC 15.247 limits.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1 MHz	3 MHz	/	PK
	1 MHz	10 Hz	/	Average

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All final data was recorded in Quasi-peak detection mode for frequency range of 30 MHz -1 GHz and peak and Average detection modes for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247.

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level complies with the limit if

$$L_m + U_{(L_m)} \leq L_{\text{lim}} + U_{\text{cispr}}$$

In BAEL, $U_{(L_m)}$ is less than U_{cispr} , if L_m is less than L_{lim} , it implies that the EUT complies with the limit.


Test Data**Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	52 %
ATM Pressure:	101.0 kPa

The testing was performed by Andy Yu on 2019-06-30 and Curry Xiang on 2019-06-24.

EUT operation mode: Transmitting (Scan with GFSK, $\pi/4$ -DQPSK, 8DPSK mode, the worst case is GFSK Mode)

30 MHz~1 GHz: (the worst case is GFSK Mode, Middle channel)

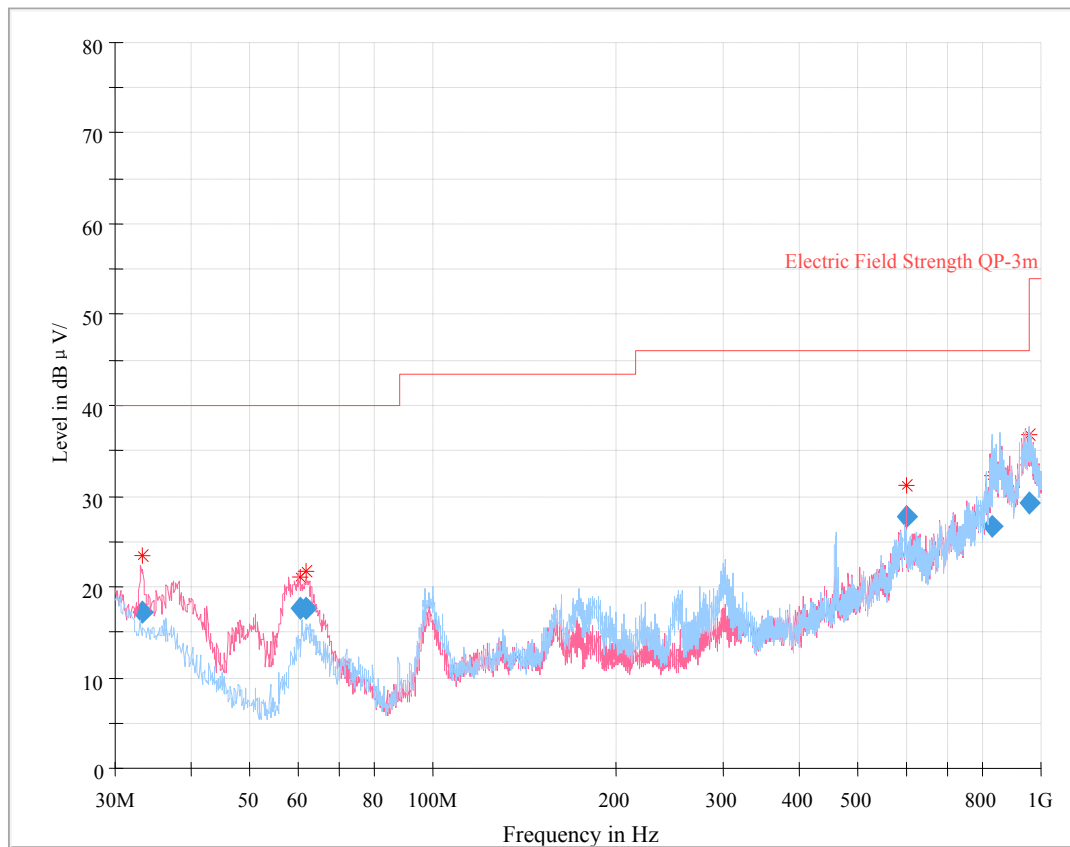

Frequency (MHz)	Corrected Amplitude (dBμV/m)	Antenna height (cm)	Antenna Polarity	Turntable position (degree)	Correction Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
33.230875	17.21	100.0	V	234.0	-9.5	40.00	22.79
60.280125	17.59	115.0	V	213.0	-20.2	40.00	22.41
61.979875	17.60	111.0	V	211.0	-20.2	40.00	22.40
600.013375	27.77	107.0	V	88.0	-1.6	46.00	18.23
830.707750	26.64	353.0	H	27.0	5.0	46.00	19.36
957.080000	29.20	330.0	H	117.0	9.4	46.00	16.80

1 GHz - 25 GHz:

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/QP/Ave.		Height (m)	Polar (H/V)				
Low Channel (2402 MHz)									
2359.26	27.88	PK	2	2.0	H	31.77	59.65	74	14.35
2359.26	13.69	Ave.	2	2.0	H	31.77	45.46	54	8.54
2493.89	28.35	PK	330	2.2	H	32.13	60.48	74	13.52
2493.89	14.61	Ave.	330	2.2	H	32.13	46.74	54	7.26
4804.00	43.19	PK	74	1.6	H	6.28	49.47	74	24.53
4804.00	28.43	Ave.	74	1.6	H	6.28	34.71	54	19.29
Middle Channel (2441 MHz)									
4882.00	42.90	PK	121	2.3	H	6.76	49.66	74	24.34
4882.00	28.25	Ave.	121	2.3	H	6.76	35.01	54	18.99
High Channel (2480 MHz)									
2364.01	27.72	PK	209	1.1	H	31.87	59.59	74	14.41
2364.01	13.84	Ave.	209	1.1	H	31.87	45.71	54	8.29
2491.72	29.17	PK	201	2.5	H	32.13	61.30	74	12.70
2491.72	17.95	Ave.	201	2.5	H	32.13	50.08	54	3.92
4960.00	43.61	PK	60	2.1	H	6.80	50.41	74	23.59
4960.00	29.03	Ave.	60	2.1	H	6.80	35.83	54	18.17

Note:

Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor


Corrected Amplitude = Corrected Factor + Reading

Margin = Limit - Corrected. Amplitude


The other spurious emission which is 20dB to the limit was not recorded.

And for the pre-scan is performed with the 2400-2483.5MHz band filter.

Pre-scan with High channel Peak Horizontal

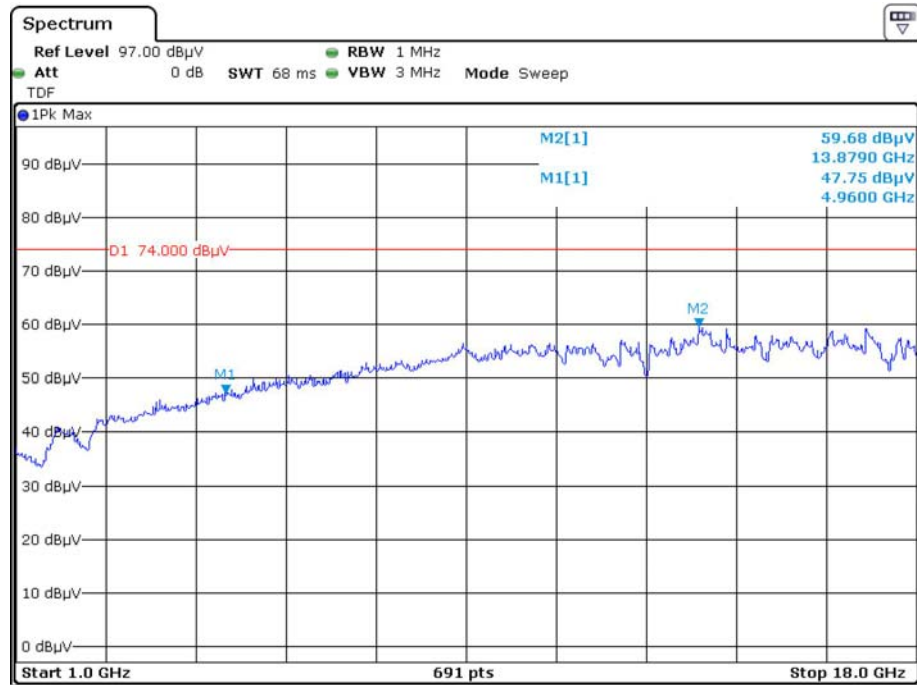


Date: 24.JUN.2019 23:03:39

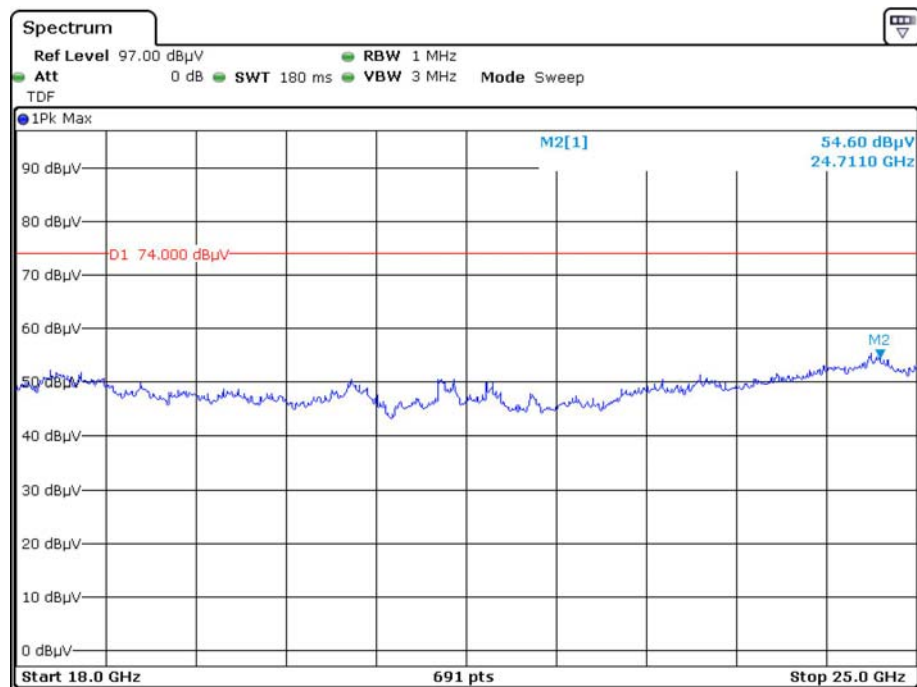


Date: 24.JUN.2019 23:47:57

Vertical

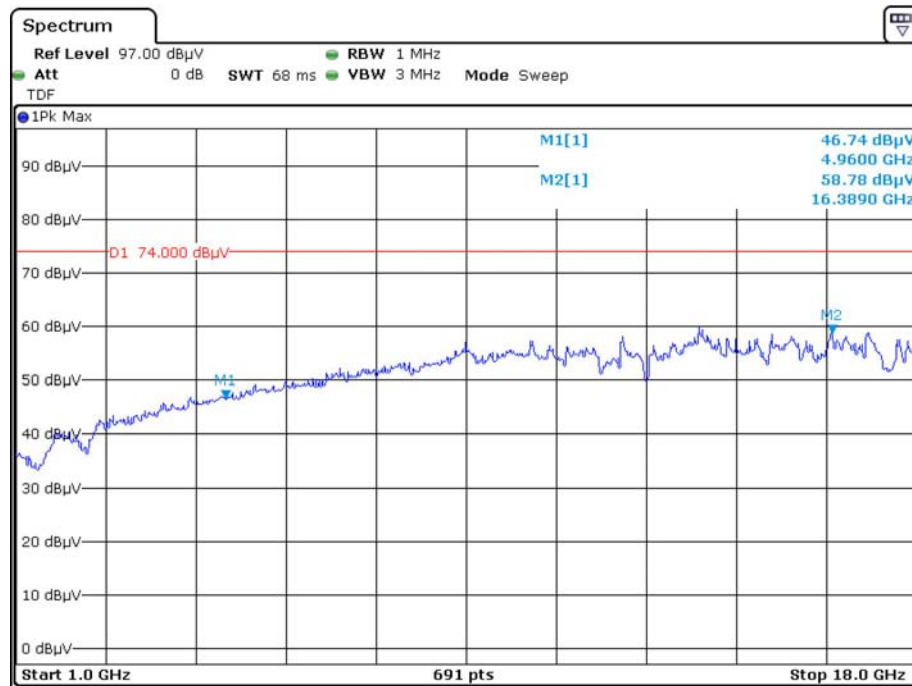


Date: 24.JUN.2019 23:11:24

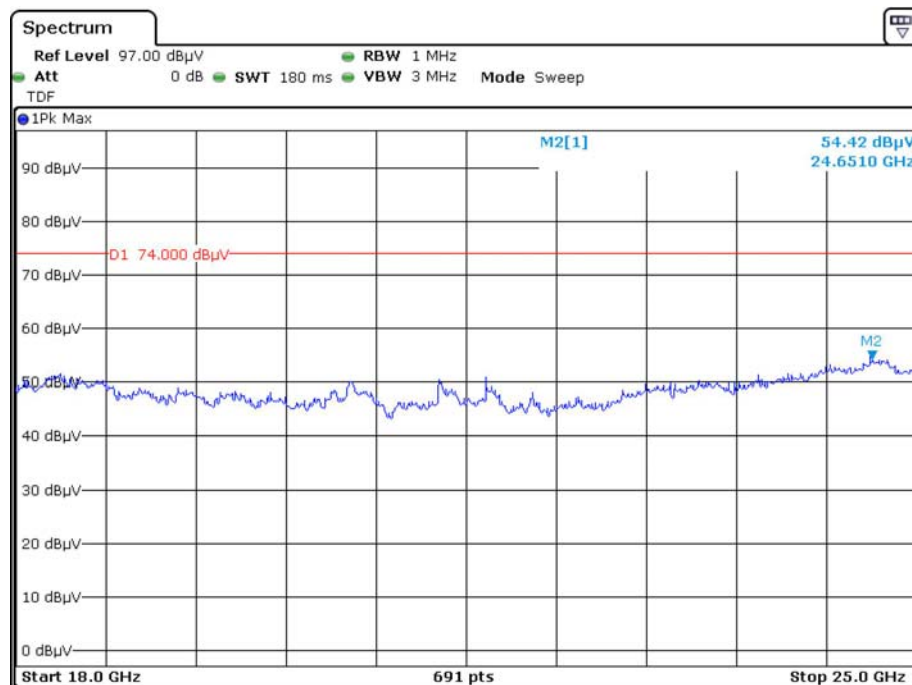


Date: 24.JUN.2019 23:53:54

Pre-scan for Average Horizontal

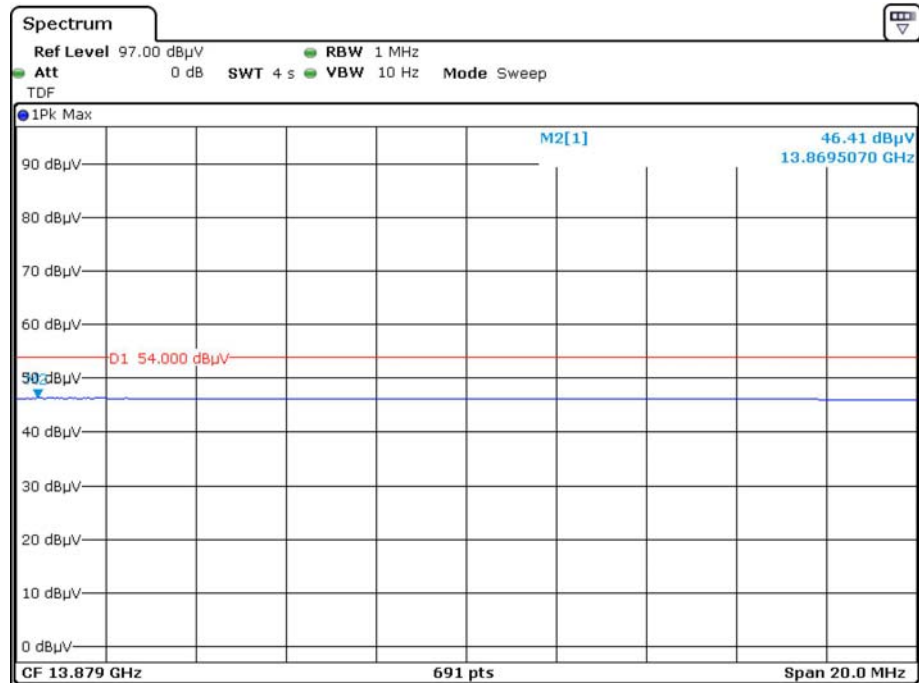


Date: 24.JUN.2019 23:07:14

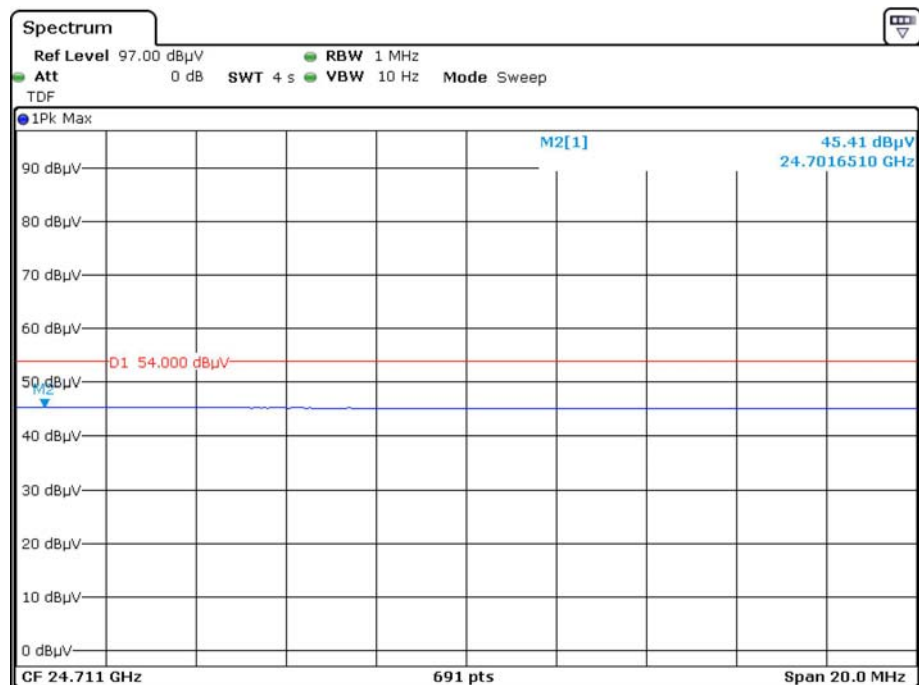


Date: 24.JUN.2019 23:50:36

Vertical

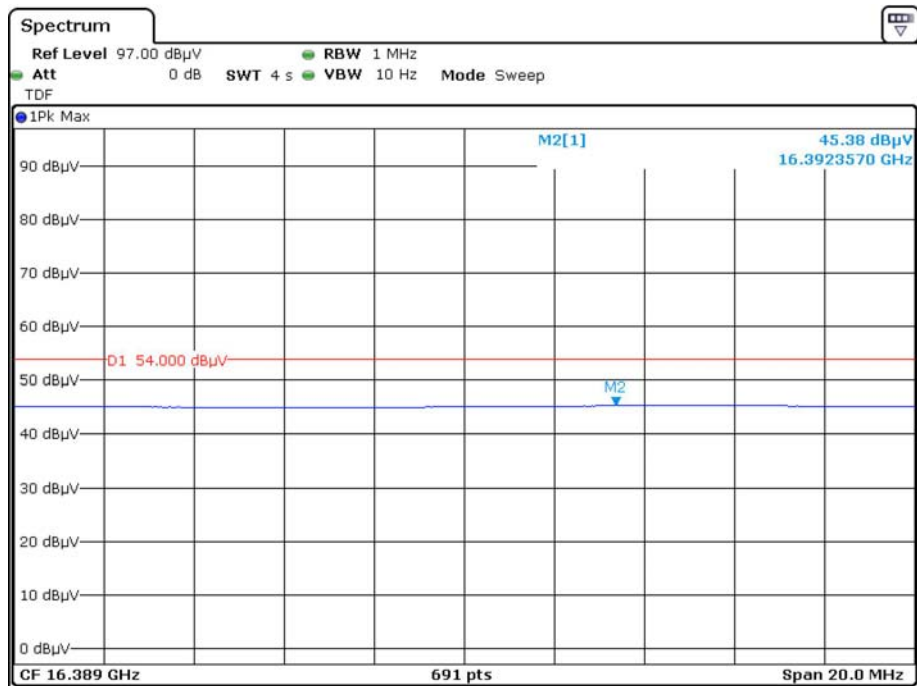

Date: 24.JUN.2019 23:15:06

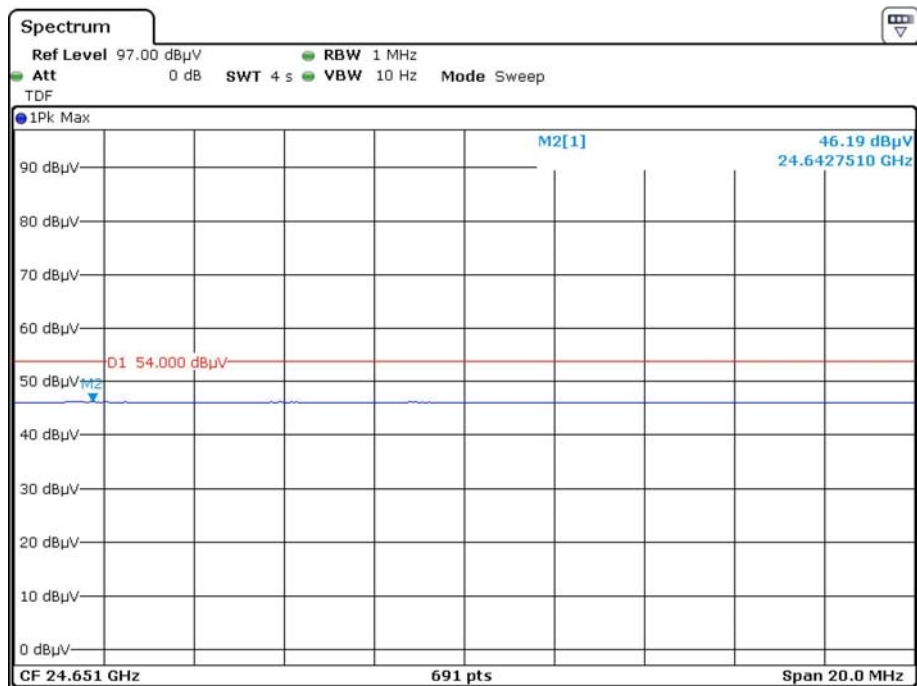

Date: 24.JUN.2019 23:57:59

FCC §15.247(a) (1)-CHANNEL SEPARATION TEST**Applicable Standard**

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

Test Procedure

1. Set the EUT in transmitting mode, maxhold the channel.
2. Set the adjacent channel of the EUT and maxhold another trace.
3. Measure the channel separation.

Test Data**Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	52 %
ATM Pressure:	101.0 kPa

The testing was performed by Leo Huang on 2019-07-03 and 2019-08-02.


EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following table and plots.

Channel	Channel Separation (MHz)	20 dBc BW (MHz)	Two-thirds of the 20 dB bandwidth (MHz)	Channel Separation Limit	Result
BDR(GFSK)					
Low	1.000	0.936	0.624	> two-thirds of the 20 dB bandwidth	Compliance
Middle	1.003	0.936	0.624	> two-thirds of the 20 dB bandwidth	Compliance
High	1.000	0.935	0.623	> two-thirds of the 20 dB bandwidth	Compliance
EDR($\pi/4$-DQPSK)					
Low	1.003	1.258	0.839	> two-thirds of the 20 dB bandwidth	Compliance
Middle	1.003	1.258	0.839	> two-thirds of the 20 dB bandwidth	Compliance
High	1.003	1.251	0.834	> two-thirds of the 20 dB bandwidth	Compliance
EDR(8DPSK)					
Low	1.000	1.267	0.845	> two-thirds of the 20 dB bandwidth	Compliance
Middle	1.000	1.267	0.845	> two-thirds of the 20 dB bandwidth	Compliance
High	1.003	1.267	0.845	> two-thirds of the 20 dB bandwidth	Compliance


Please refer to the following plots.

BDR (GFSK): Low Channel

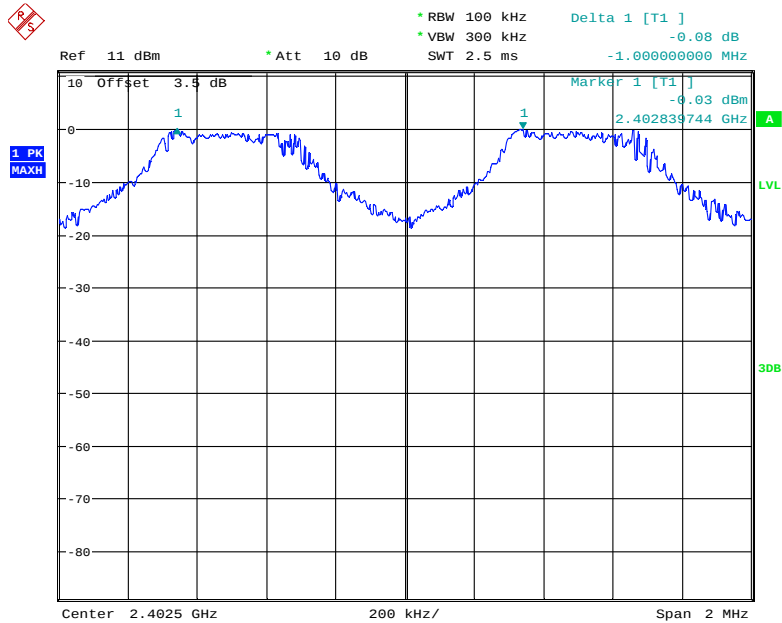


Date: 3.JUL.2019 11:32:15

BDR (GFSK): Middle Channel

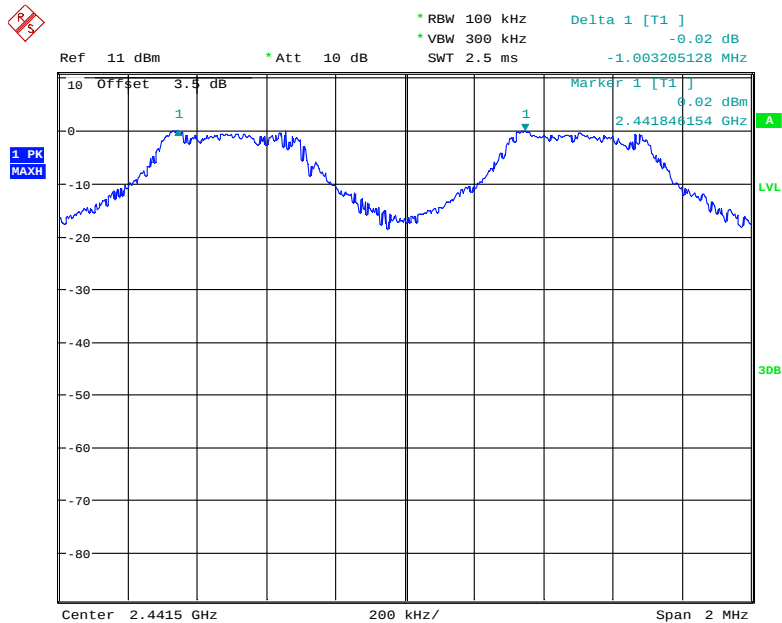


Date: 2.AUG.2019 16:39:19

BDR (GFSK): High Channel

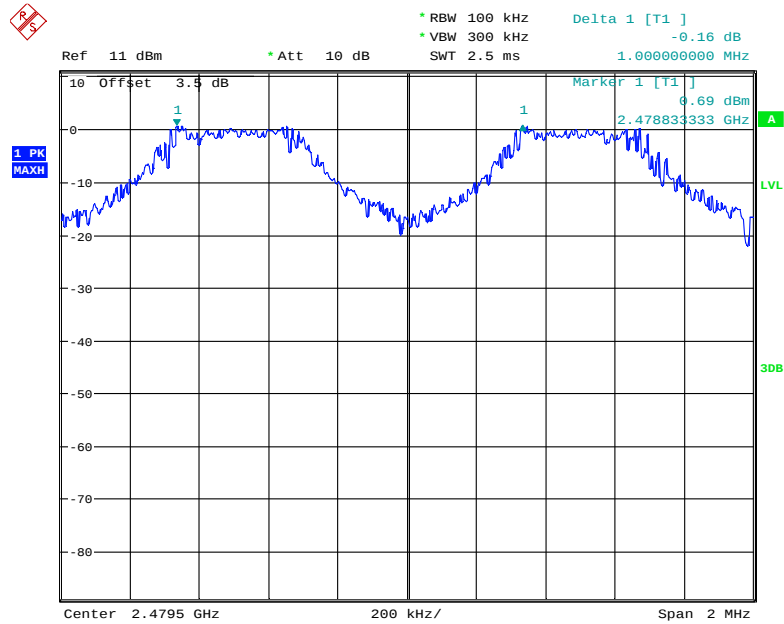


Date: 3.JUL.2019 11:38:15

EDR ($\pi/4$ -DQPSK): Low Channel

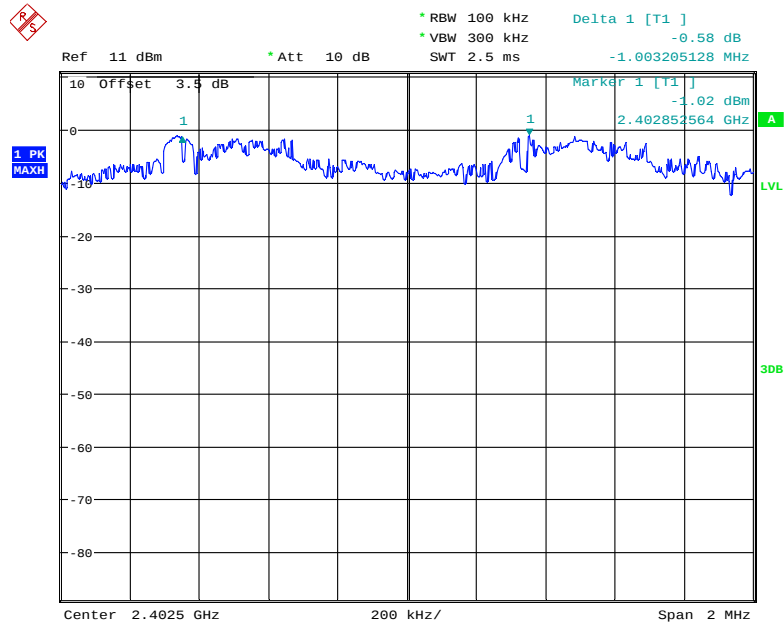


Date: 3.JUL.2019 11:46:05

EDR ($\pi/4$ -DQPSK): Middle Channel

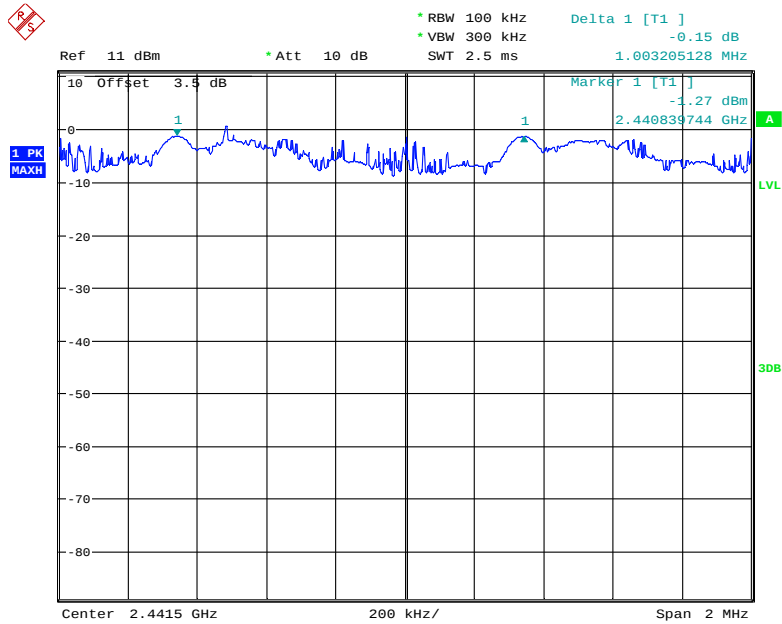


Date: 2.AUG.2019 09:00:37

EDR ($\pi/4$ -DQPSK): High Channel

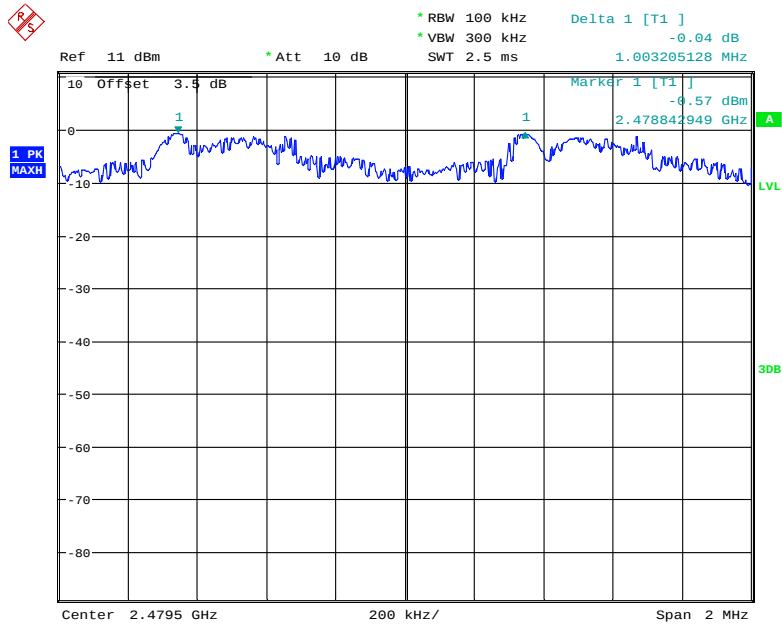


Date: 3.JUL.2019 11:40:04

EDR (8DPSK): Low Channel

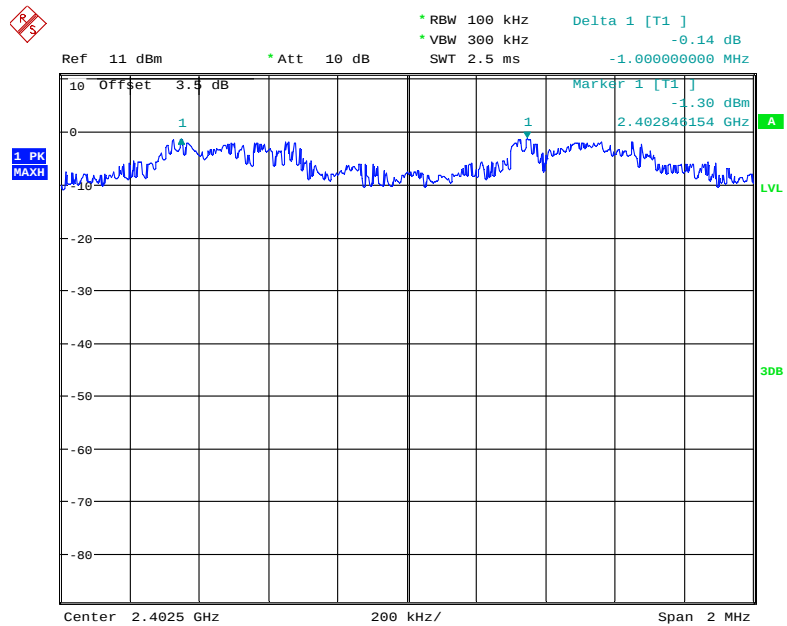


Date: 3.JUL.2019 11:48:06

EDR (8DPSK): Middle Channel

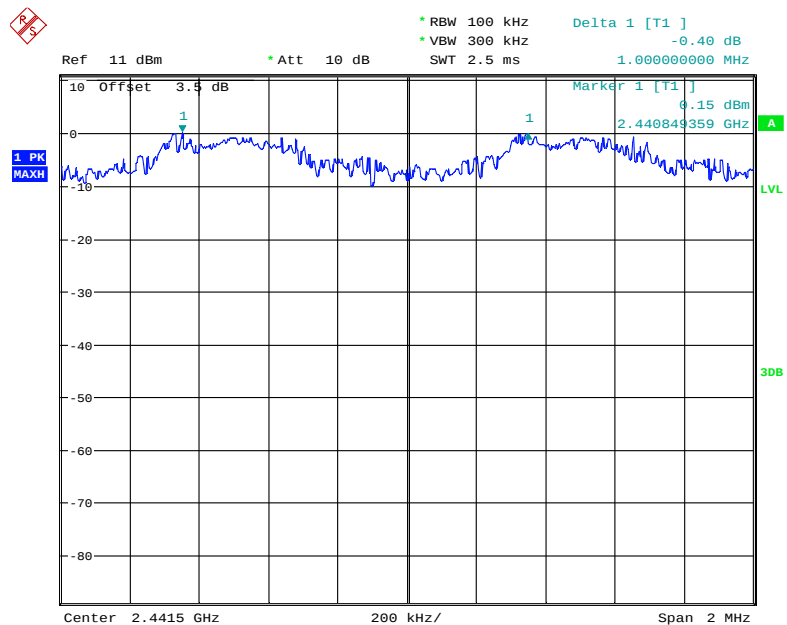

Date: 3.JUL.2019 11:50:13

EDR (8DPSK): High Channel

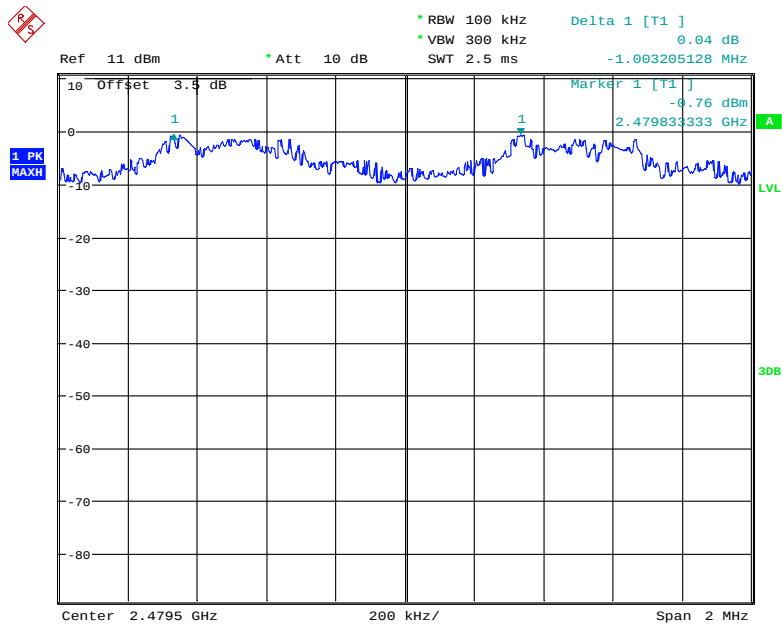

Date: 3.JUL.2019 11:52:36

FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH**Applicable Standard**

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

Test Data**Environmental Conditions**


Temperature:	25 °C
Relative Humidity:	52 %
ATM Pressure:	101.0 kPa

The testing was performed by Leo Huang on 2019-07-03.

EUT operation mode: Transmitting


Test Result: Compliance. Please refer to following table and plots.

Mode	Channel	Frequency (MHz)	20 dB Emission Bandwidth (MHz)
BDR (GFSK)	Low	2402	0.936
	Middle	2441	0.936
	High	2480	0.935
EDR ($\pi/4$-DQPSK)	Low	2402	1.258
	Middle	2441	1.258
	High	2480	1.251
EDR (8DPSK)	Low	2402	1.267
	Middle	2441	1.267
	High	2480	1.267

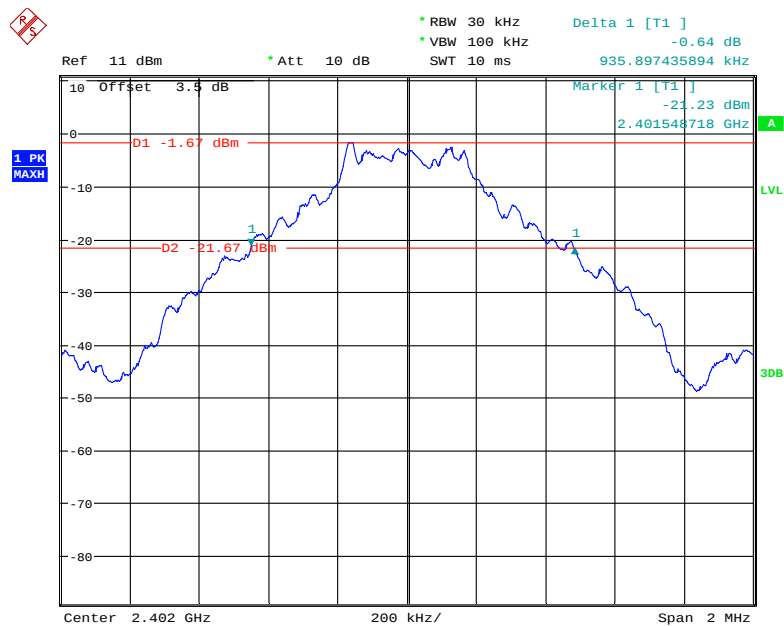BDR (GFSK): Low Channel


Date: 3.JUL.2019 10:54:21

BDR (GFSK): Middle Channel

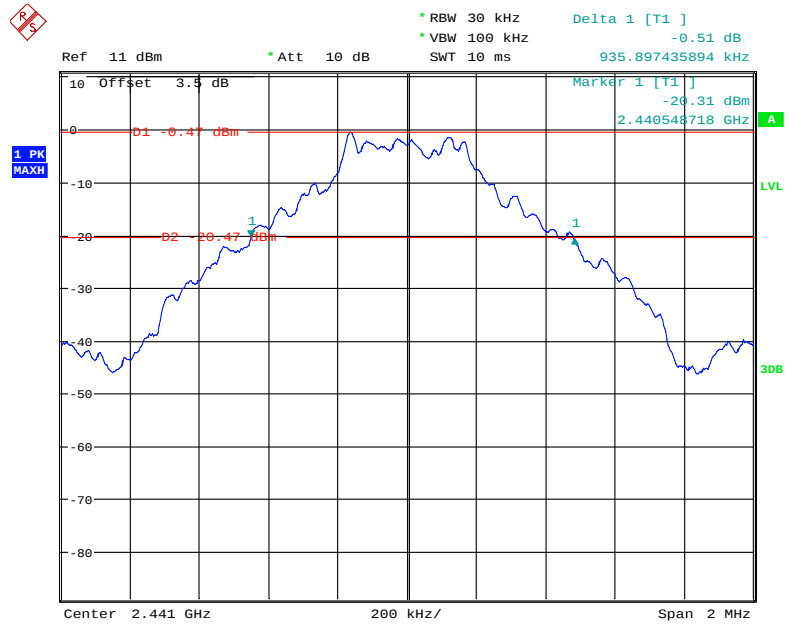


Date: 3.JUL.2019 10:53:28

BDR (GFSK): High Channel

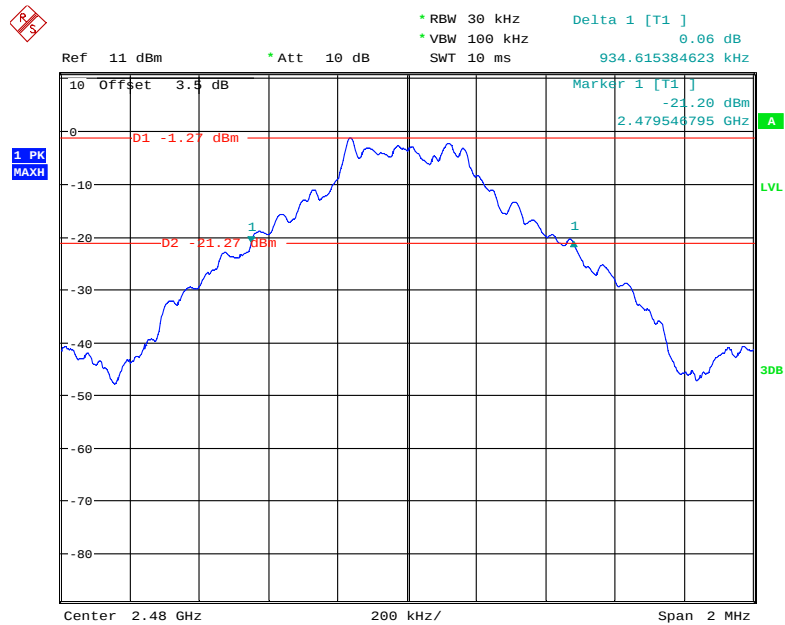


Date: 3.JUL.2019 10:52:22

EDR ($\pi/4$ -DQPSK): Low Channel

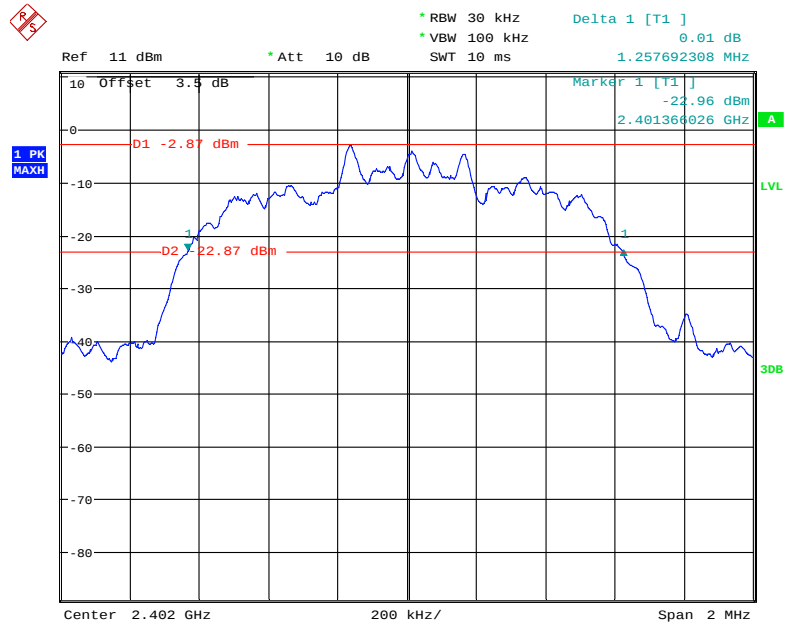

Date: 3.JUL.2019 10:48:44

EDR ($\pi/4$ -DQPSK): Middle Channel

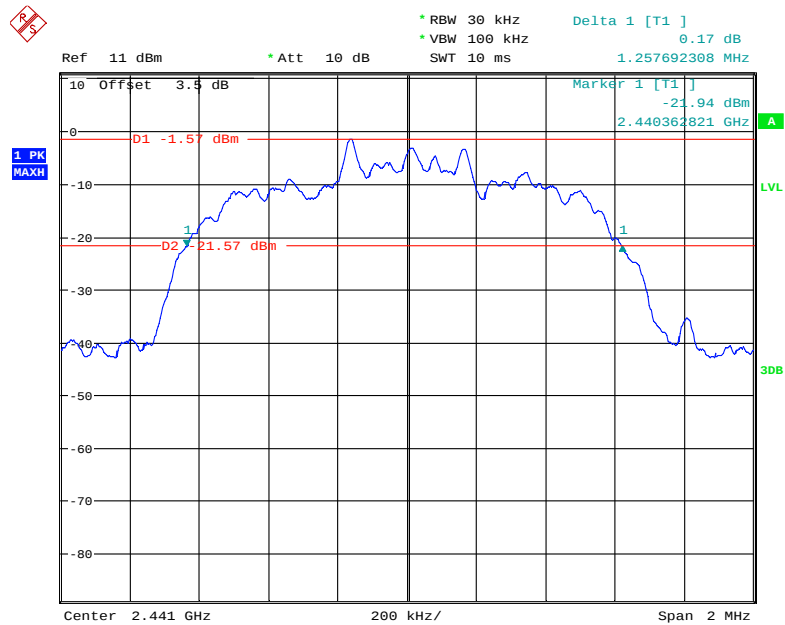

Date: 3.JUL.2019 10:49:57

Ref 11 dBm * Att 10 dB * RBW 30 kHz * VBW 100 kHz Delta 1 [T1] -0.22 dB
SWT 10 ms 1.251282051 MHz

10 Offset 3.5 dB Marker 1 [T1] -22.15 dBm
2.479369231 GHz

1 PK MAXH

D1 -2.17 dBm

D2 -22.17 dBm

3DB

Center 2.48 GHz 200 kHz/ Span 2 MHz


Date: 3.JUL.2019 10:51:06

The screenshot displays a spectrum analyzer interface with the following details:

- Top Left:** A red square icon with a white 'X' and a small 'P' in a circle.
- Top Center:**
 - Ref 11 dBm
 - * Att 10 dB
- Top Right:**
 - * RBW 30 kHz
 - * VBW 100 kHz
 - SWT 10 ms
 - Delta 1 [T1] 0.35 dB
 - 1.267307692 MHz
- Plot Area:**
 - Y-axis: Power in dBm, ranging from -80 to 10.
 - X-axis: Frequency in kHz, ranging from 200 kHz to 2 MHz.
 - Signal: A blue trace showing a signal with two marked levels, D1 and D2.
 - Marker 1 [T1] at -24.55 dBm, 2.401366026 GHz.
 - Marker 2 [T2] at -24.55 dBm, 2.401366026 GHz.
 - Level D1: -4.37 dBm.
 - Level D2: -24.37 dBm.
 - Level 1 PK MAXH: -4.37 dBm.
 - Level 3DB: -24.37 dBm.
 - Level LVL: -24.55 dBm.
- Bottom:**
 - Center 2.402 GHz
 - 200 kHz/
 - Span 2 MHz


Date: 3.JUL.2019 10:47:19

EDR (8DPSK): Middle Channel

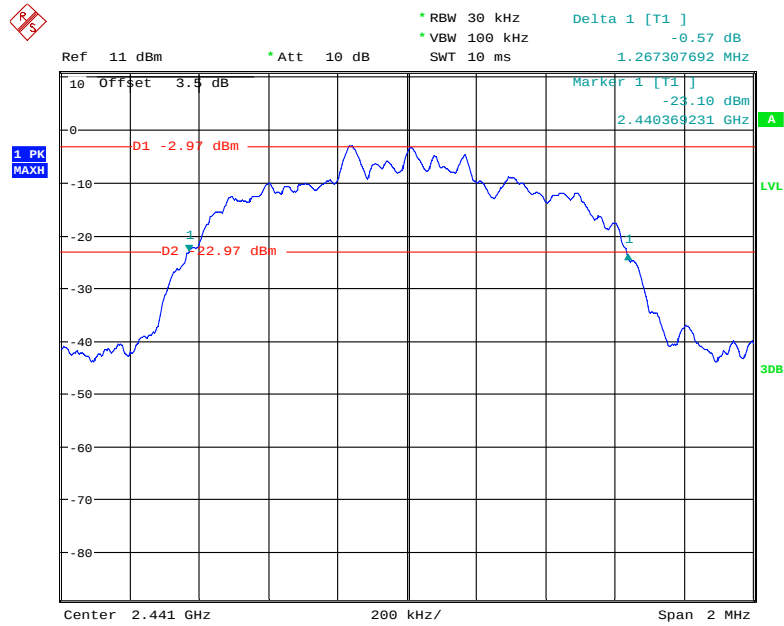

Date: 3.JUL.2019 10:46:05

EDR (8DPSK): High Channel

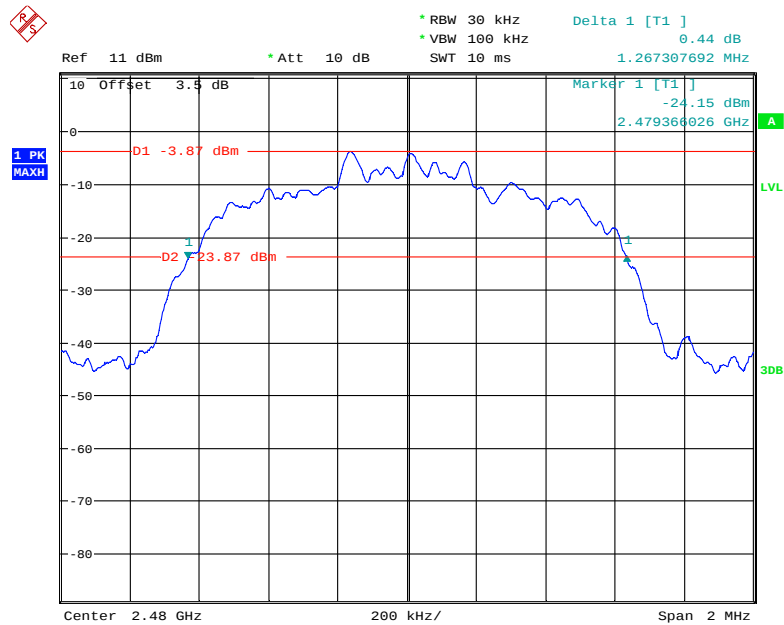

Date: 3.JUL.2019 10:44:30

FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST**Applicable Standard**

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the max-hold function record the quantity of the channel.

Test Data**Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	52 %
ATM Pressure:	101.0 kPa


The testing was performed by Leo Huang on 2019-04-30.

EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following table and plots.


Mode	Frequency Range (MHz)	Number of Hopping Channel (CH)	Limit (CH)
BDR (GFSK)	2400-2483.5	79	≥15
EDR (π/4-DQPSK)	2400-2483.5	79	≥15
EDR (8DPSK)	2400-2483.5	79	≥15

BDR (GFSK): Number of Hopping Channels

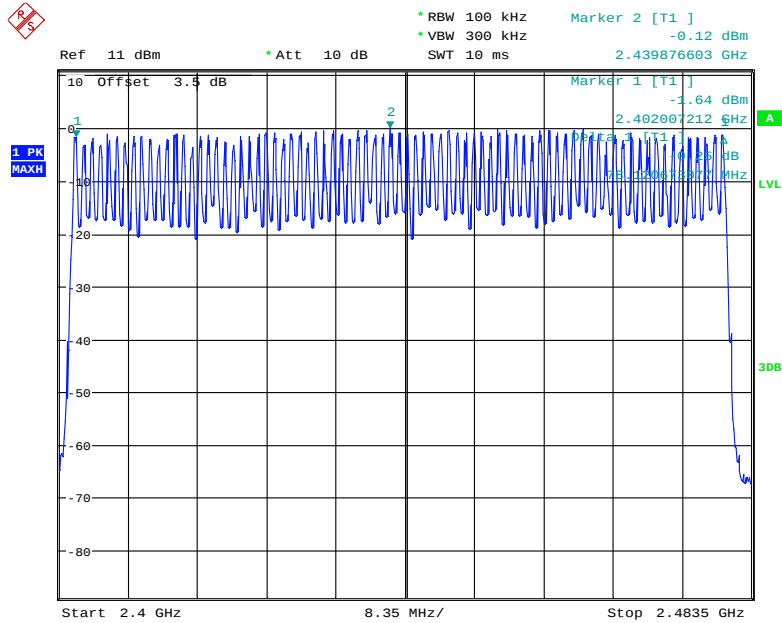


Date: 2.AUG.2019 09:15:37

EDR ($\pi/4$ -DQPSK): Number of Hopping Channels

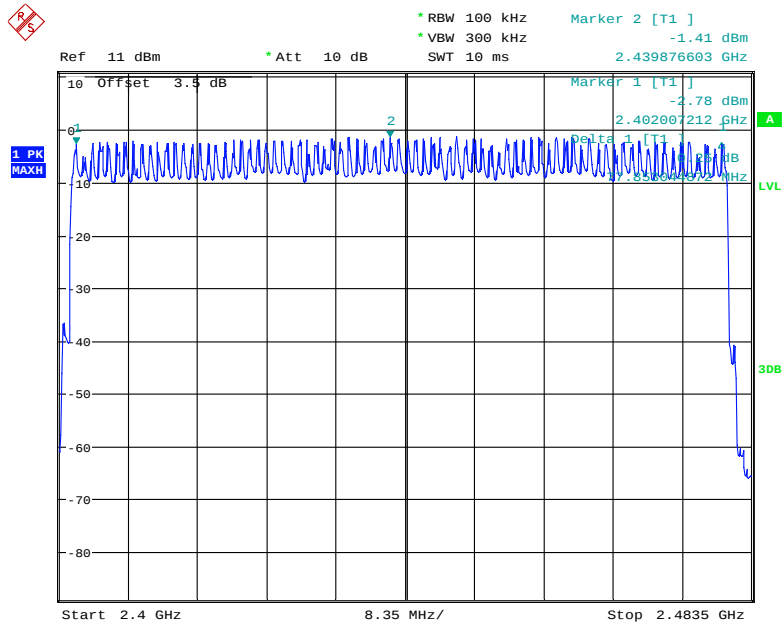

Date: 2.AUG.2019 09:19:36

EDR (8DPSK): Number of Hopping Channels

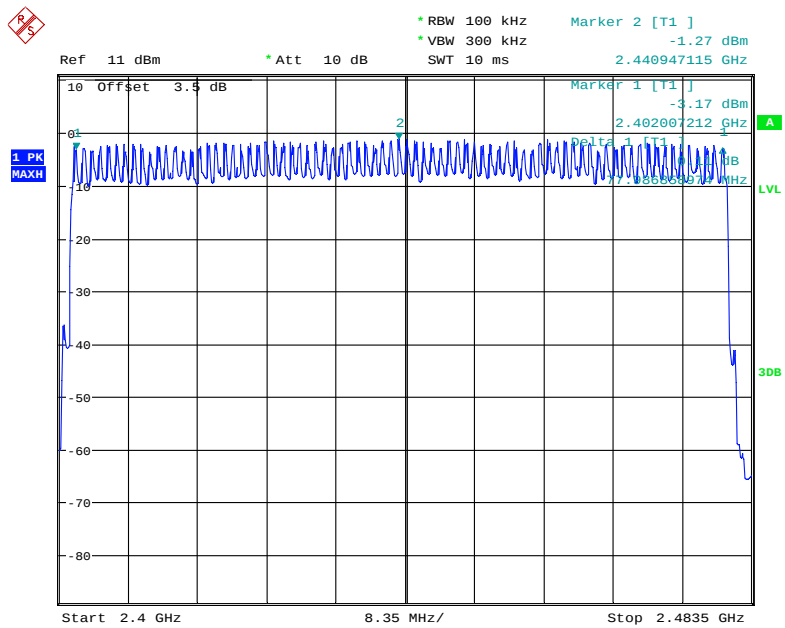

Date: 2.AUG.2019 09:24:17

FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)**Applicable Standard**

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

1. The EUT was worked in channel hopping.
2. Set the RBW to: 1MHz.
3. Set the VBW $\geq 3 \times$ RBW.
4. Set the span to 0Hz.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Recorded the time of single pulses

Test Data**Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	54 %
ATM Pressure:	101.0 kPa


The testing was performed by Leo Huang on 2019-07-03.

EUT operation mode: Transmitting


Test Result: Compliance. Please refer to following table and plots

Mode		Channel	Pulse Width (ms)	Dwell Time (S)	Limit (S)	Result
BDR (GFSK)	DH 1	Low	0.394	0.126	0.4	Pass
		Middle	0.394	0.126	0.4	Pass
		High	0.394	0.126	0.4	Pass
		Note: DH1:Dwell time = Pulse time*(1600/2/79)*31.6S				
	DH 3	Low	1.658	0.265	0.4	Pass
		Middle	1.658	0.265	0.4	Pass
		High	1.658	0.265	0.4	Pass
		Note: DH3:Dwell time = Pulse time*(1600/4/79)*31.6S				
	DH 5	Low	2.910	0.310	0.4	Pass
		Middle	2.910	0.310	0.4	Pass
		High	2.910	0.310	0.4	Pass
		Note: DH5:Dwell time = Pulse time*(1600/6/79)*31.6S				
EDR ($\pi/4$ -DQPSK)	2DH 1	Low	0.397	0.127	0.4	Pass
		Middle	0.397	0.127	0.4	Pass
		High	0.397	0.127	0.4	Pass
		Note: 2DH1:Dwell time = Pulse time*(1600/2/79)*31.6S				
	2DH 3	Low	1.667	0.267	0.4	Pass
		Middle	1.667	0.267	0.4	Pass
		High	1.667	0.267	0.4	Pass
		Note: 2DH3:Dwell time = Pulse time*(1600/4/79)*31.6S				
	2DH 5	Low	2.910	0.310	0.4	Pass
		Middle	2.910	0.310	0.4	Pass
		High	2.910	0.310	0.4	Pass
		Note: 2DH5:Dwell time = Pulse time*(1600/6/79)*31.6S				
EDR (8DPSK)	3DH 1	Low	0.400	0.128	0.4	Pass
		Middle	0.400	0.128	0.4	Pass
		High	0.400	0.128	0.4	Pass
		Note: 3DH1:Dwell time = Pulse time*(1600/2/79)*31.6S				
	3DH 3	Low	1.667	0.267	0.4	Pass
		Middle	1.667	0.267	0.4	Pass
		High	1.667	0.267	0.4	Pass
		Note: 3DH3:Dwell time = Pulse time*(1600/4/79)*31.6S				
	3DH 5		2.910	0.310	0.4	Pass
		Middle	2.910	0.310	0.4	Pass
		High	2.910	0.310	0.4	Pass
		Note: 3DH5:Dwell time = Pulse time*(1600/6/79)*31.6S				

BDR (GFSK): **Pulse time, Low Channel, DH1**

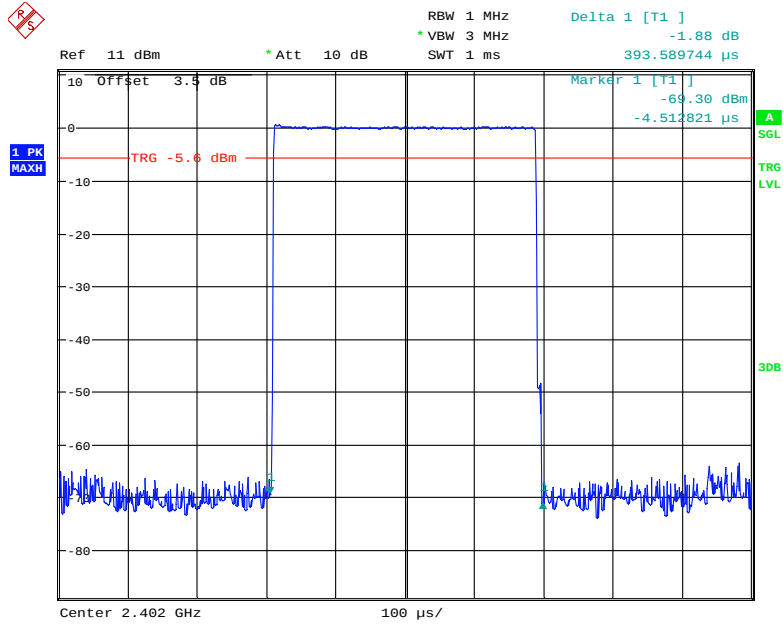


Pulse time, Middle Channel, DH1

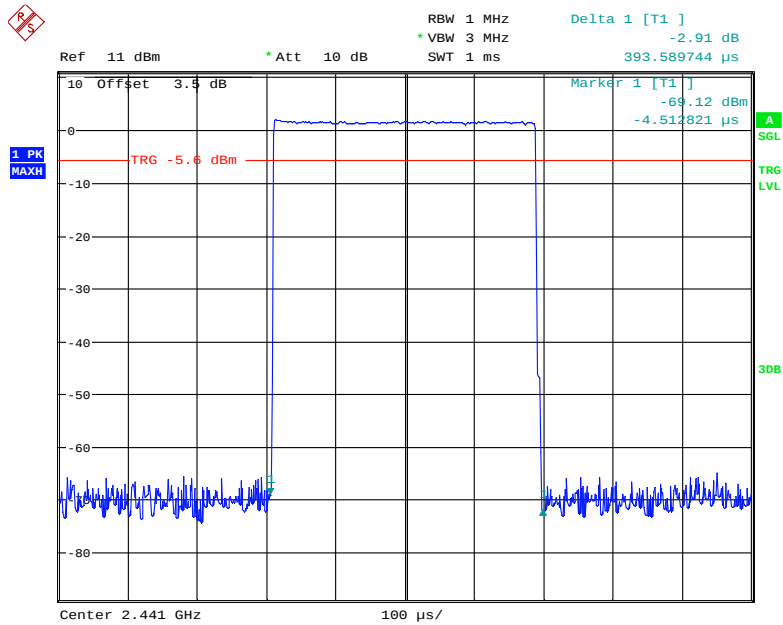


Date: 3.JUL.2019 13:20:23

Pulse time, High Channel, DH1

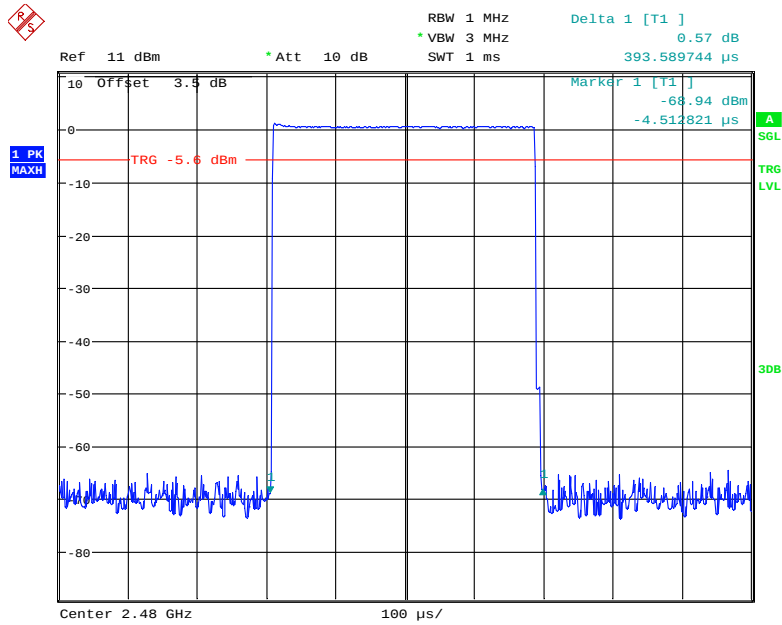


Date: 3.JUL.2019 13:21:05

Pulse time, Low Channel, DH3

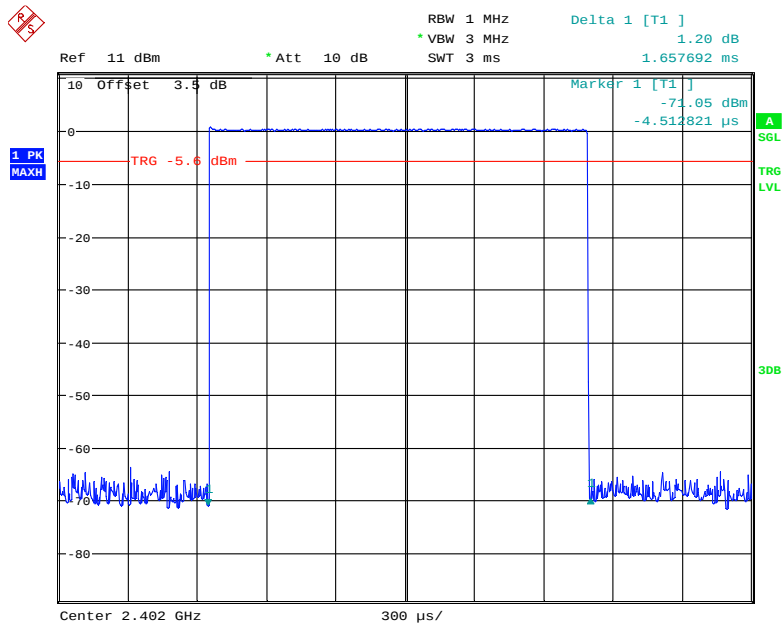


Date: 3.JUL.2019 13:29:23

Pulse time, Middle Channel, DH3

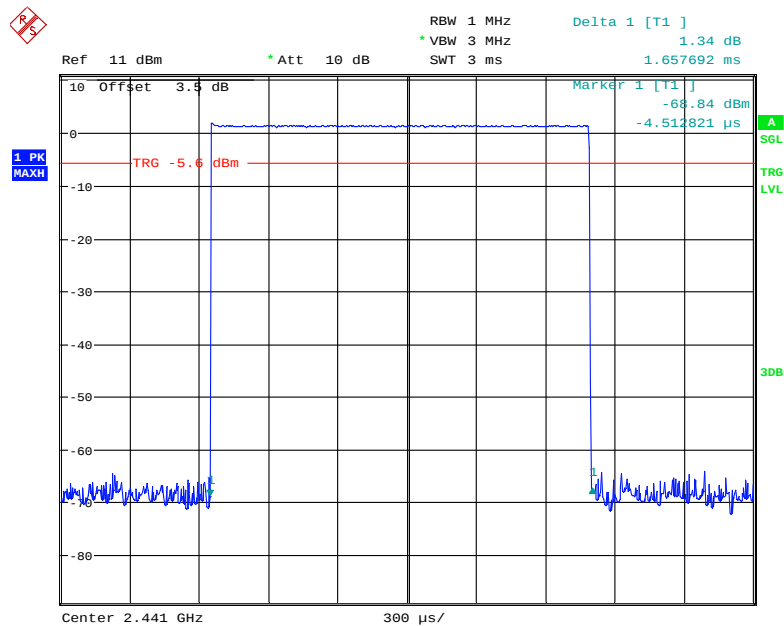


Date: 3.JUL.2019 13:28:44

Pulse time, High Channel, DH3

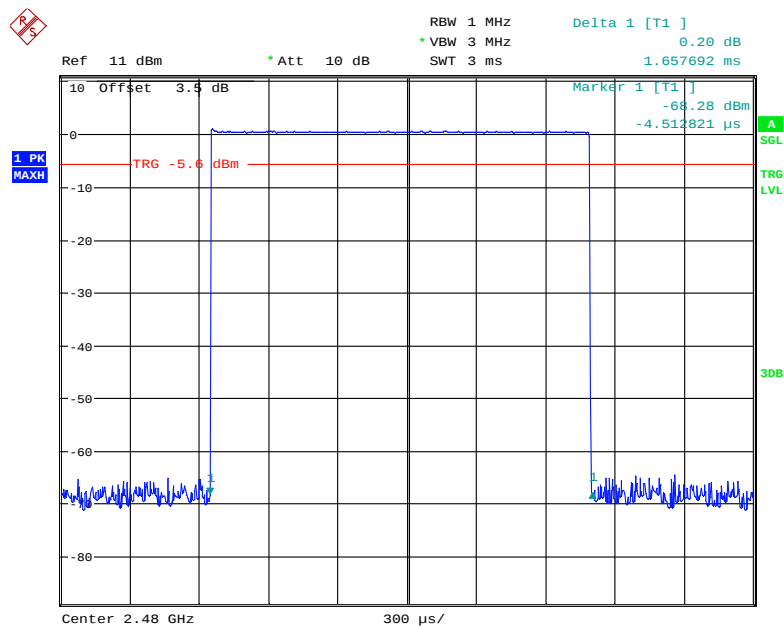


Date: 3.JUL.2019 13:28:15

Pulse time, Low Channel, DH5

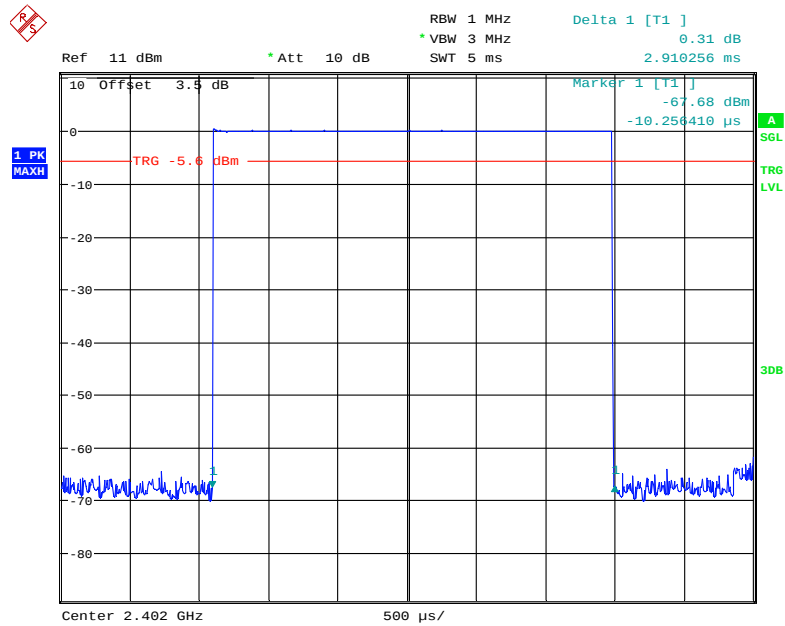


Date: 3.JUL.2019 13:38:13

Pulse time, Middle Channel, DH5

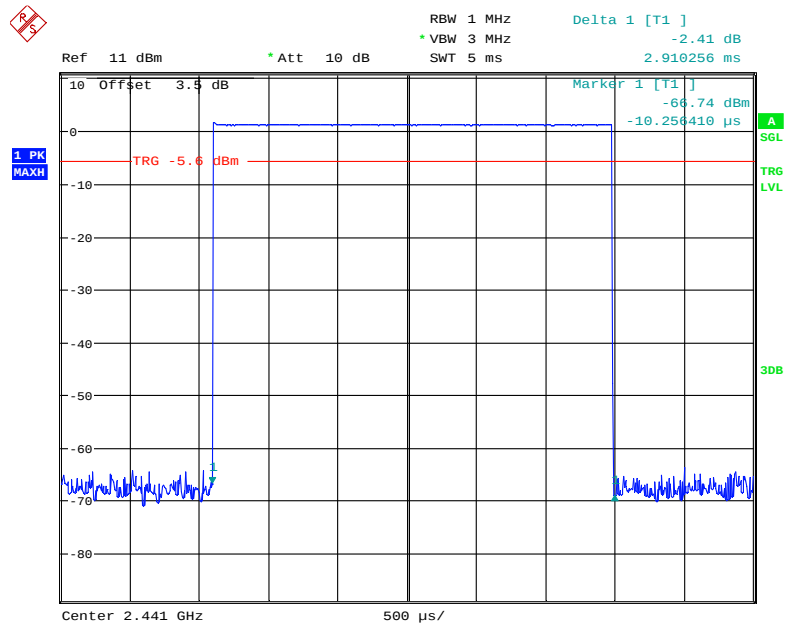

Date: 3.JUL.2019 13:39:23


Pulse time, High Channel, DH5

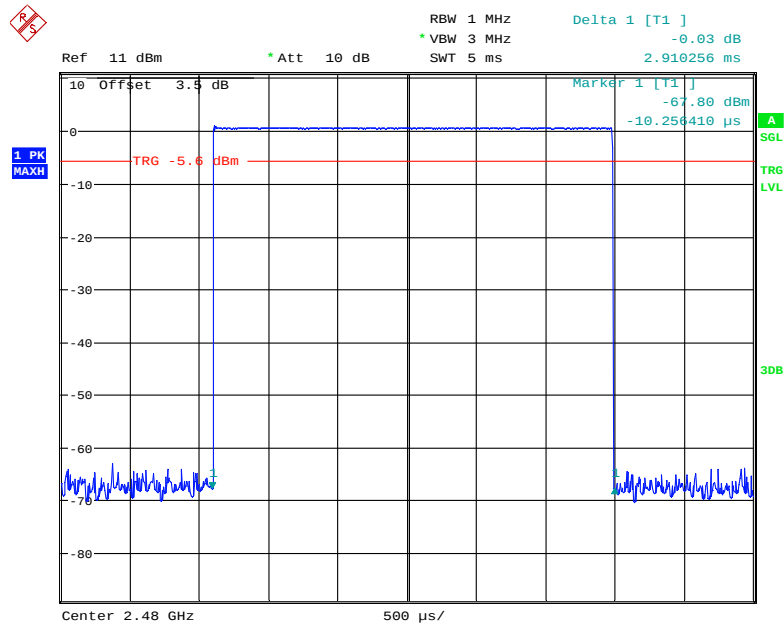

Date: 3.JUL.2019 13:39:52


EDR ($\pi/4$ -DQPSK):

Pulse time, Low Channel, 2DH1

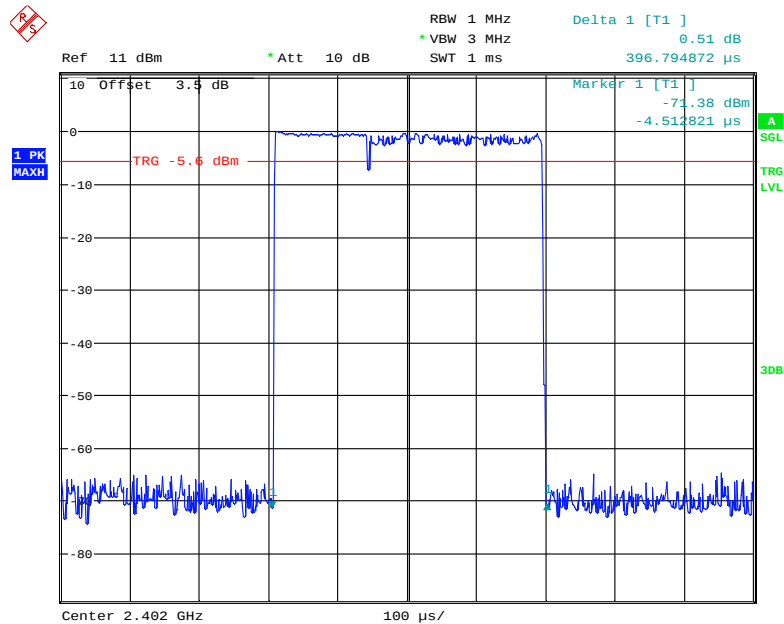


Date: 3.JUL.2019 13:23:26

Pulse time, Middle Channel, 2DH1

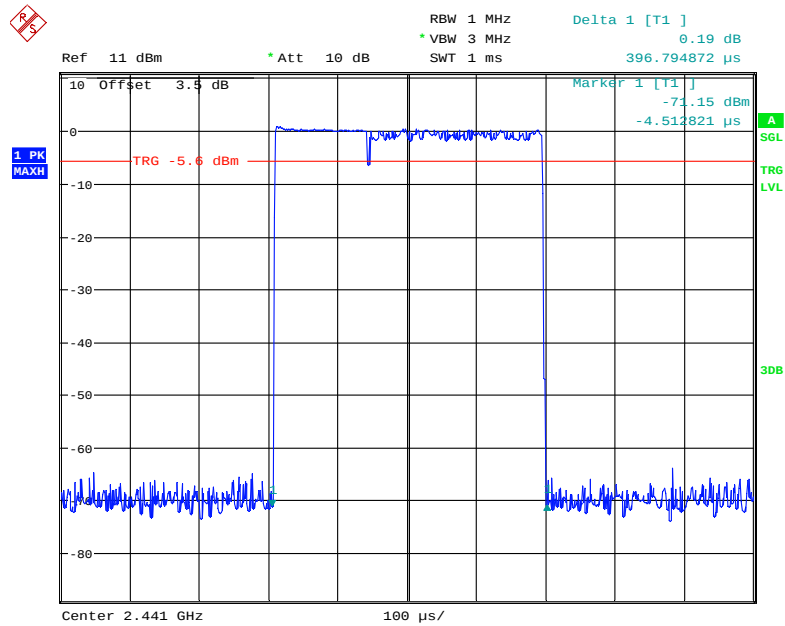


Date: 3.JUL.2019 13:22:56

Pulse time, High Channel, 2DH1

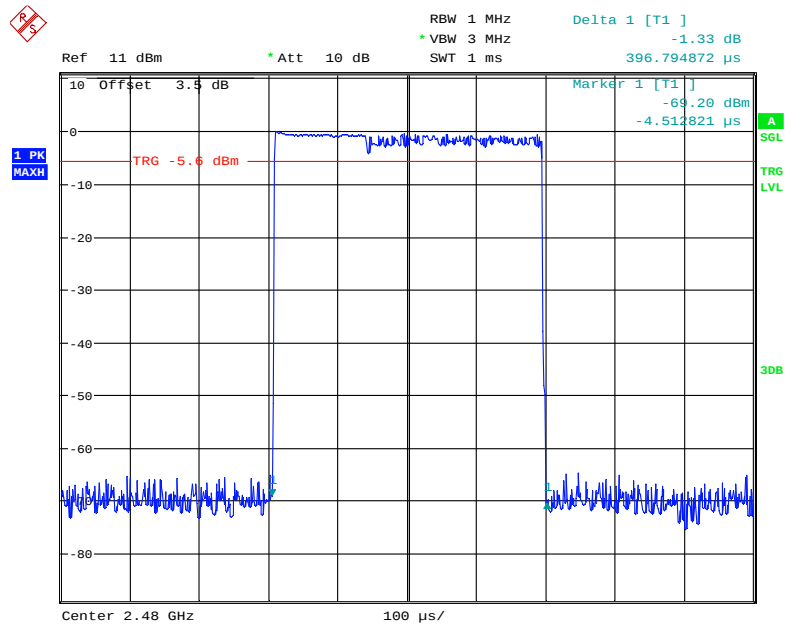


Date: 3.JUL.2019 13:22:04

Pulse time, Low Channel, 2DH3

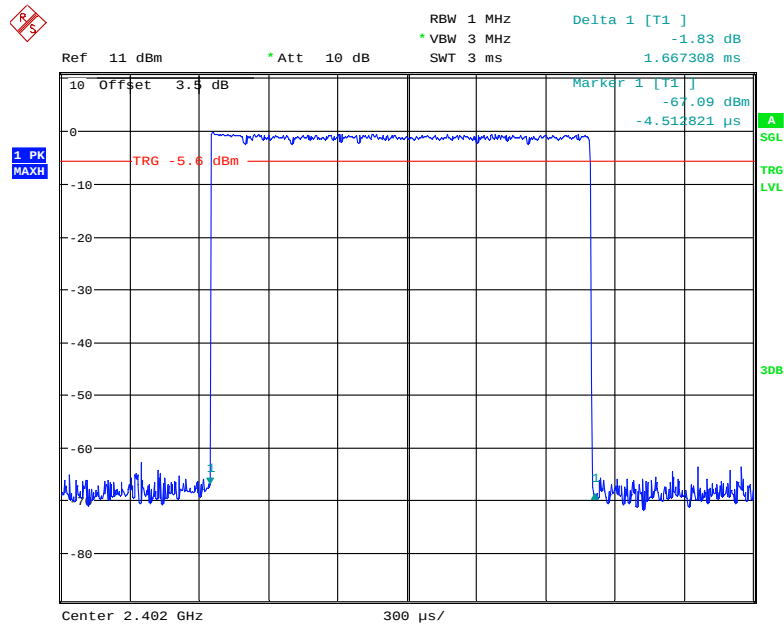


Date: 3.JUL.2019 13:32:08

Pulse time, Middle Channel, 2DH3

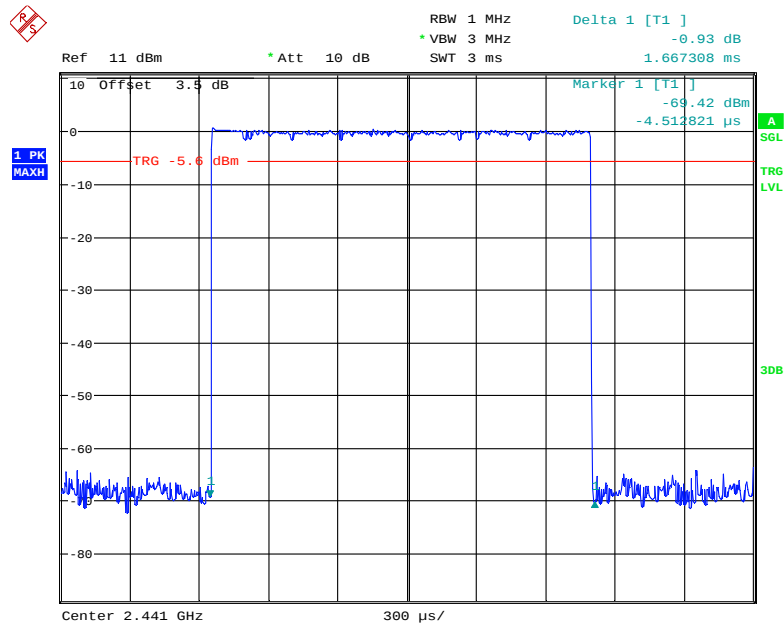


Date: 3.JUL.2019 13:33:20

Pulse time, High Channel, 2DH3

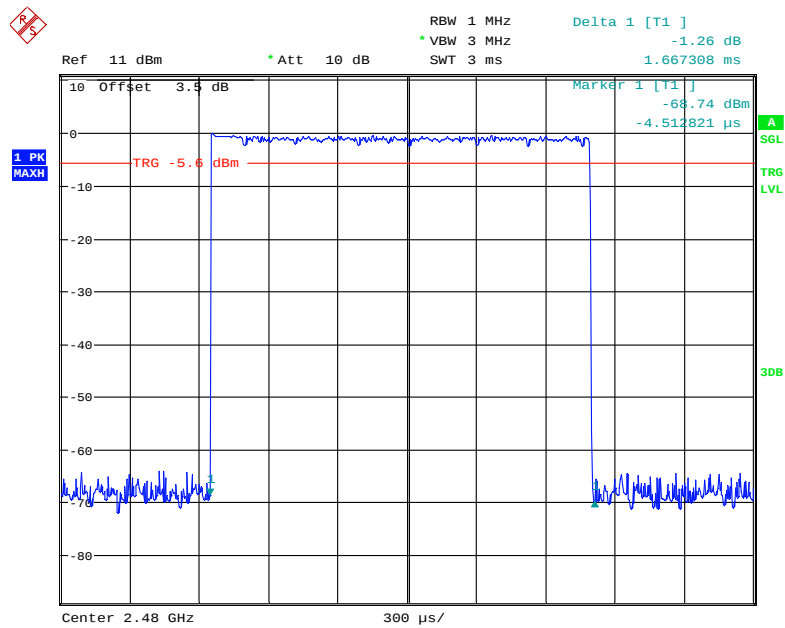


Date: 3.JUL.2019 13:33:46

Pulse time, Low Channel, 2DH5

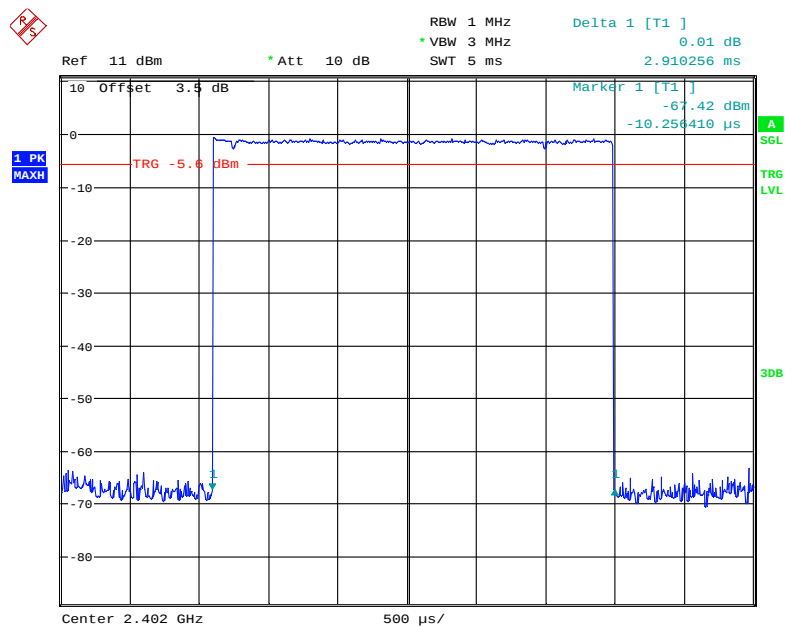


Date: 3.JUL.2019 13:41:42

Pulse time, Middle Channel, 2DH5

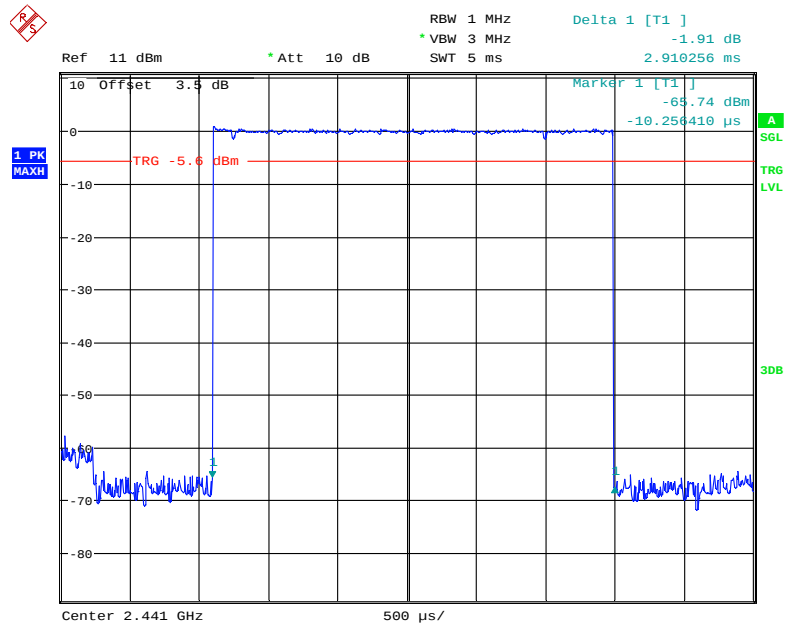


Date: 3.JUL.2019 13:41:23

Pulse time, High Channel, 2DH5

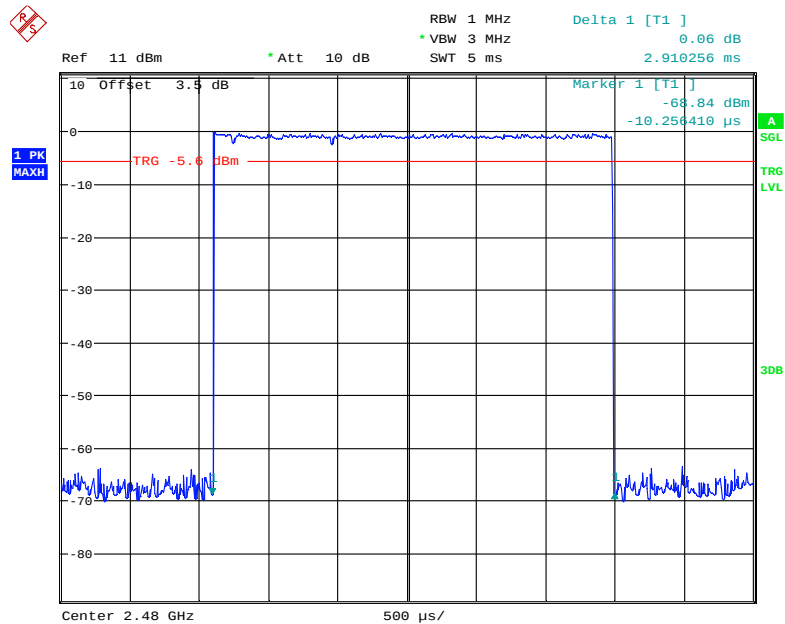


Date: 3.JUL.2019 13:40:55

EDR (8DPSK): Pulse time, Low Channel, 3DH1

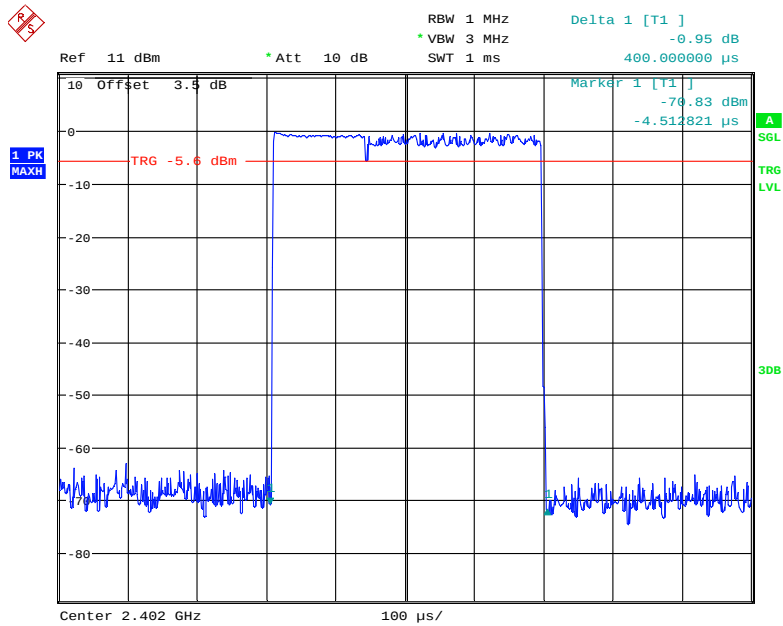


Date: 3.JUL.2019 13:24:40

Pulse time, Middle Channel, 3DH1

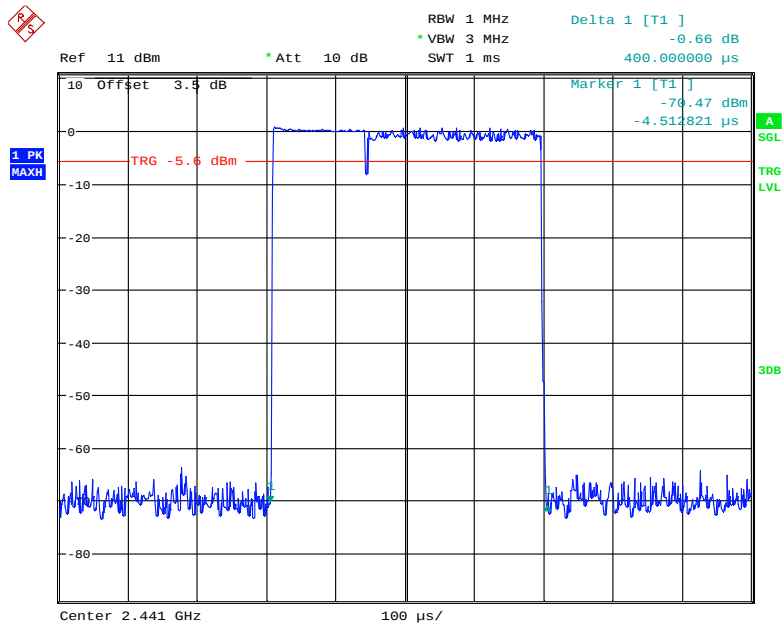


Date: 3.JUL.2019 13:25:17

Pulse time, High Channel, 3DH1

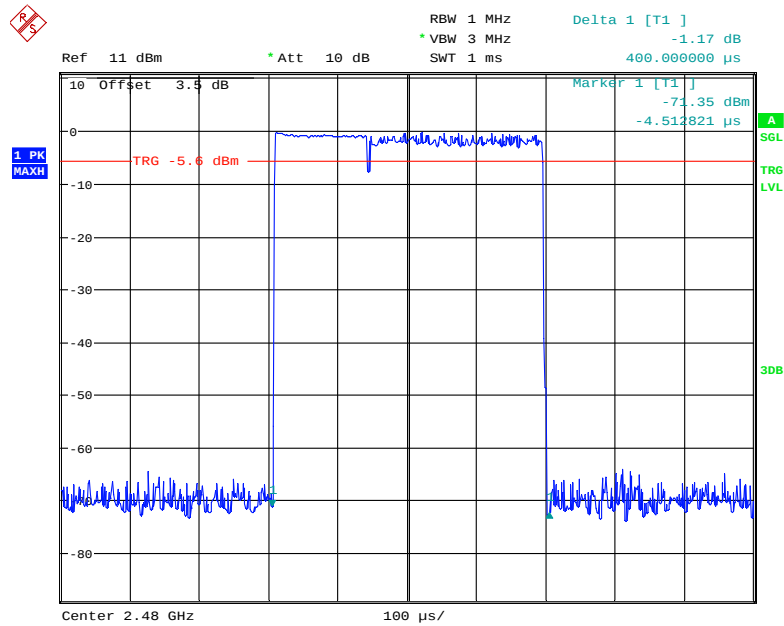


Date: 3.JUL.2019 13:25:45

Pulse time, Low Channel, 3DH3

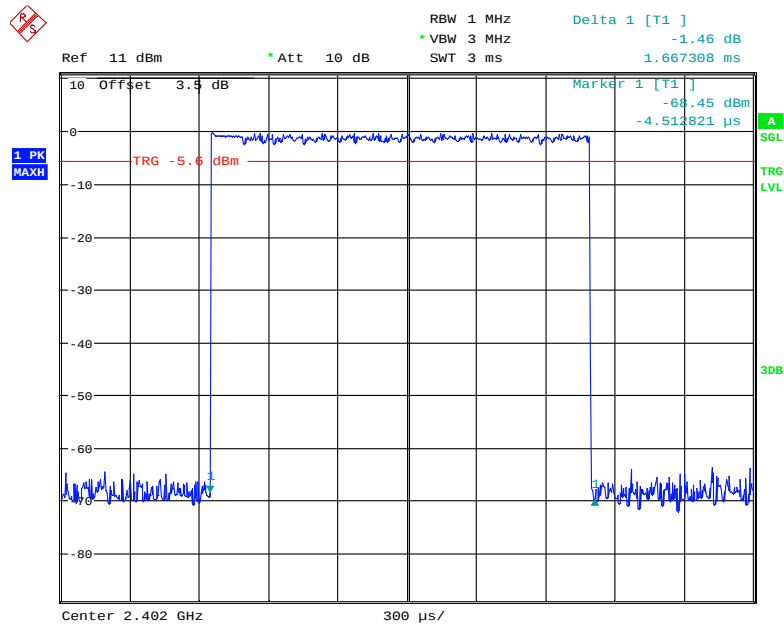


Date: 3.JUL.2019 13:35:56

Pulse time, Middle Channel, 3DH3

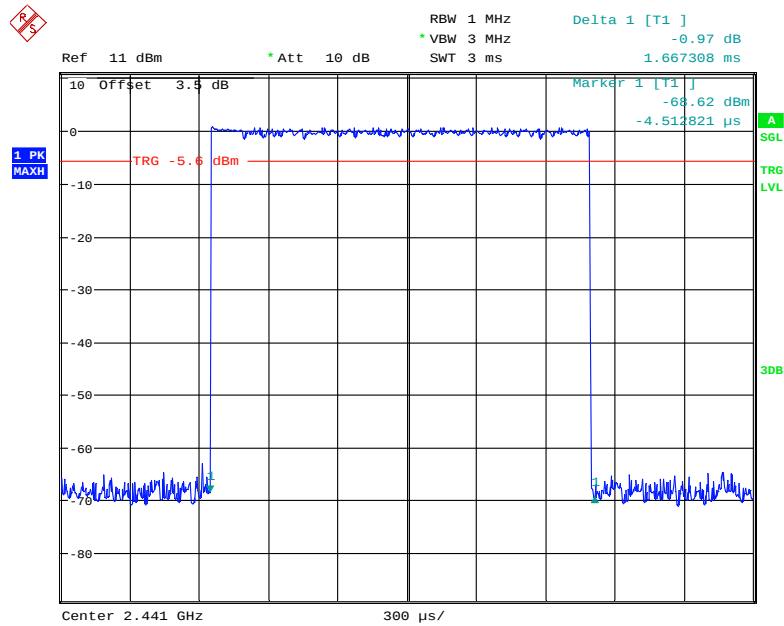


Date: 3.JUL.2019 13:35:30

Pulse time, High Channel, 3DH3

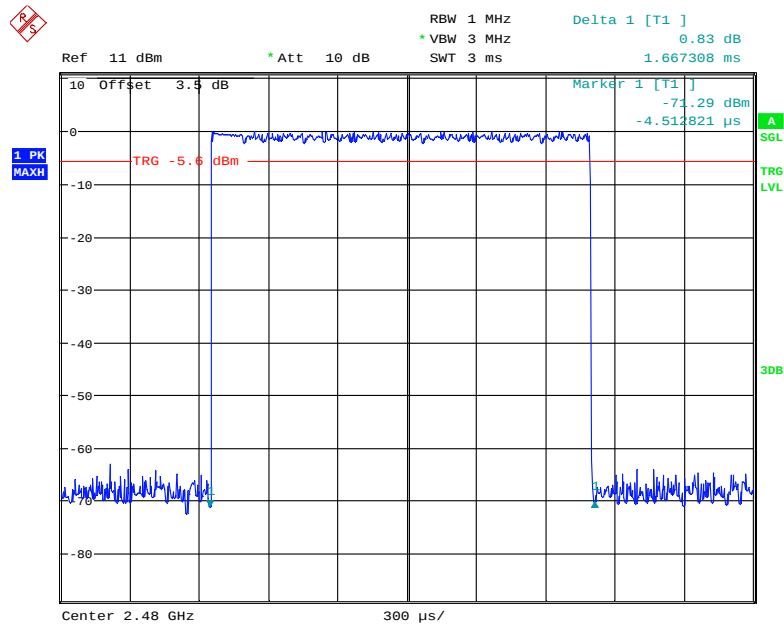


Date: 3.JUL.2019 13:35:00

Pulse time, Low Channel, 3DH5

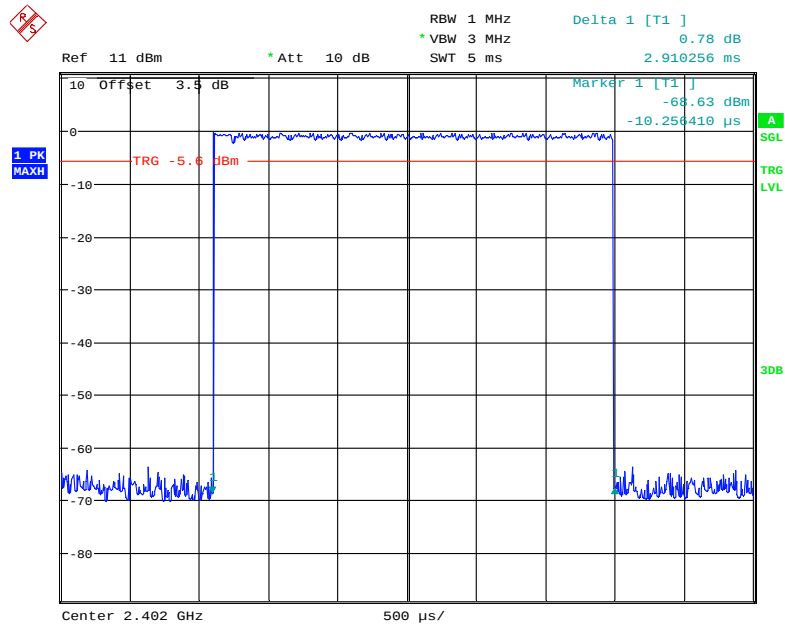


Date: 3.JUL.2019 13:42:15

Pulse time, Middle Channel, 3DH5

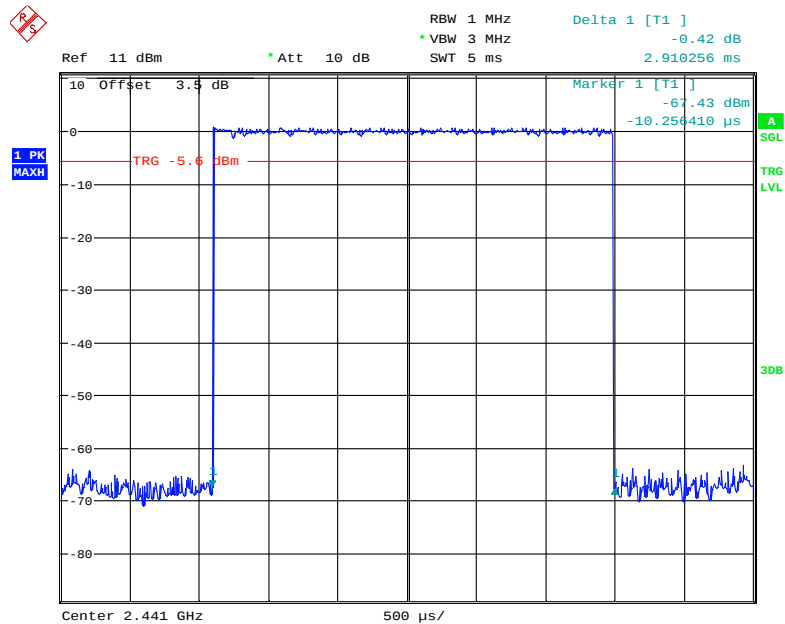

Date: 3.JUL.2019 13:43:28

Pulse time, High Channel, 3DH5

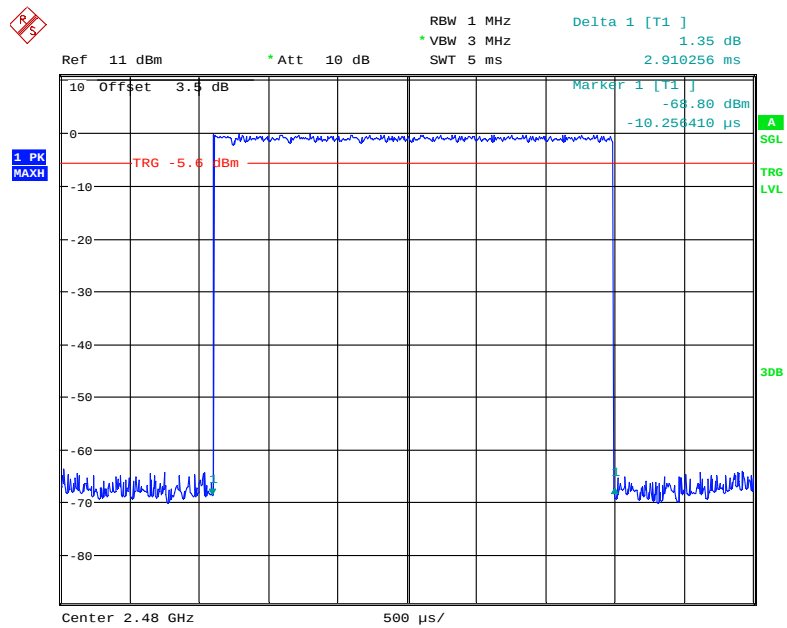

Date: 3.JUL.2019 13:44:08

FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT

Applicable Standard

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. And for all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

Test Procedure

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	54 %
ATM Pressure:	101.0 kPa

The testing was performed by Leo Huang on 2019-07-30.

EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following table.

Mode	Channel	Frequency (MHz)	Peak Conducted Output Power (dBm)	Limit (dBm)
GFSK	Low	2402	6.00	21
	Middle	2441	7.28	21
	High	2480	6.34	21
	Additional	2440	7.31	21
$\pi/4$-DQPSK	Low	2402	4.75	21
	Middle	2441	5.96	21
	High	2480	4.95	21
	Additional	2440	6.01	21
8-DPSK	Low	2402	4.99	21
	Middle	2441	6.21	21
	High	2480	5.22	21

FCC §15.247(d) - BAND EDGES TESTING

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	54 %
ATM Pressure:	101.0 kPa


The testing was performed by Leo Huang on 2019-07-03.

EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following plots.


BDR (GFSK): Band Edge-Left Side

Hopping

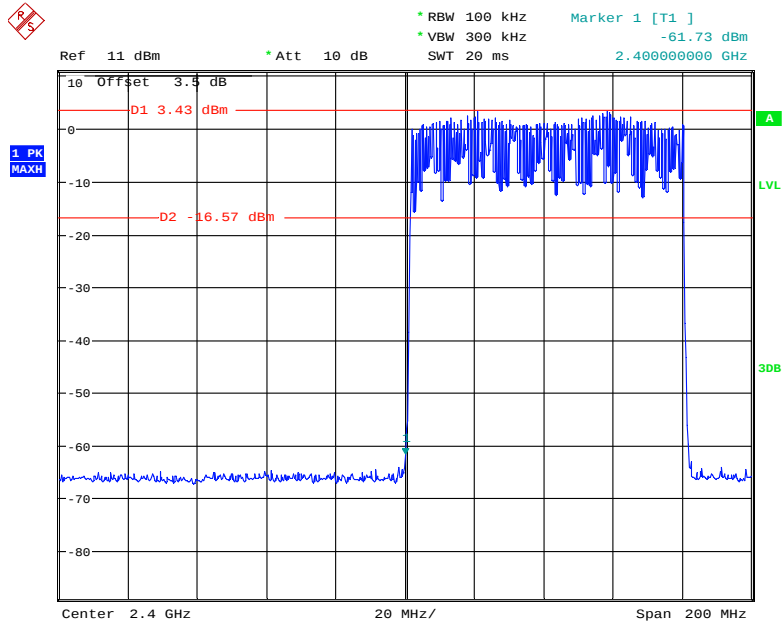

Date: 3.JUL.2019 11:25:10


Single

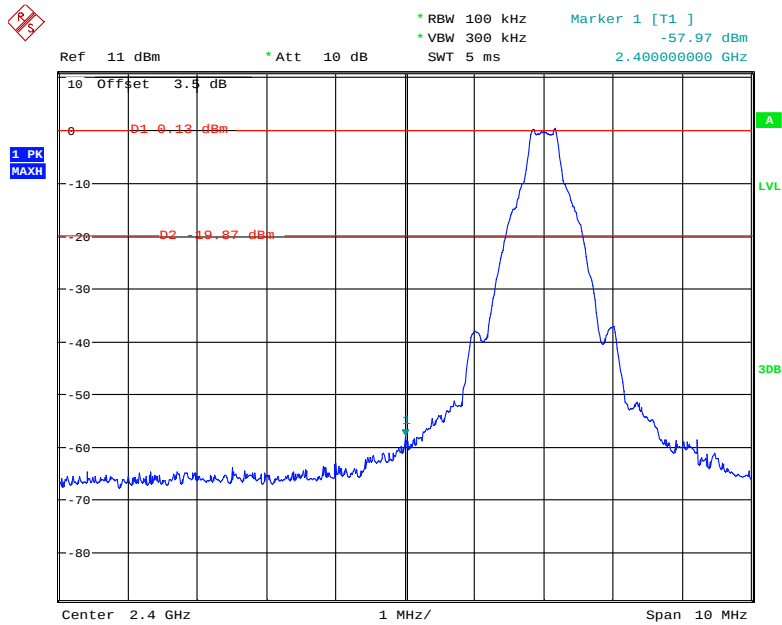

Date: 3.JUL.2019 10:56:48


BDR (GFSK): Band Edge-Right Side

Hopping

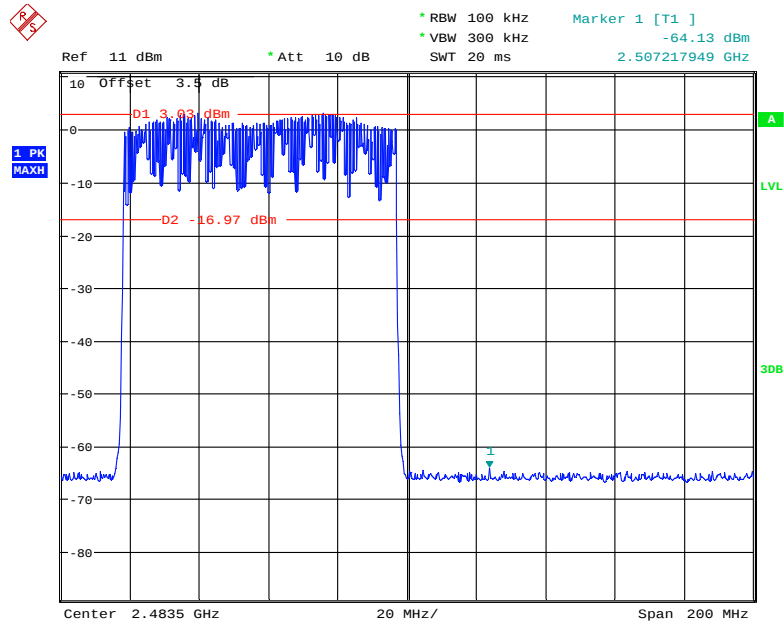


Date: 3.JUL.2019 11:19:07

Single

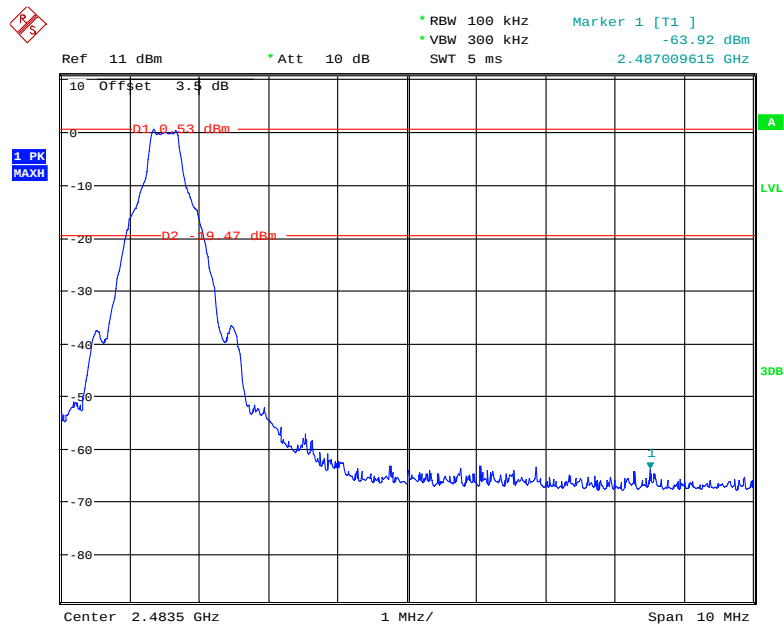


Date: 3.JUL.2019 10:58:35

EDR ($\pi/4$ -DQPSK): Band Edge-Left Side Hopping

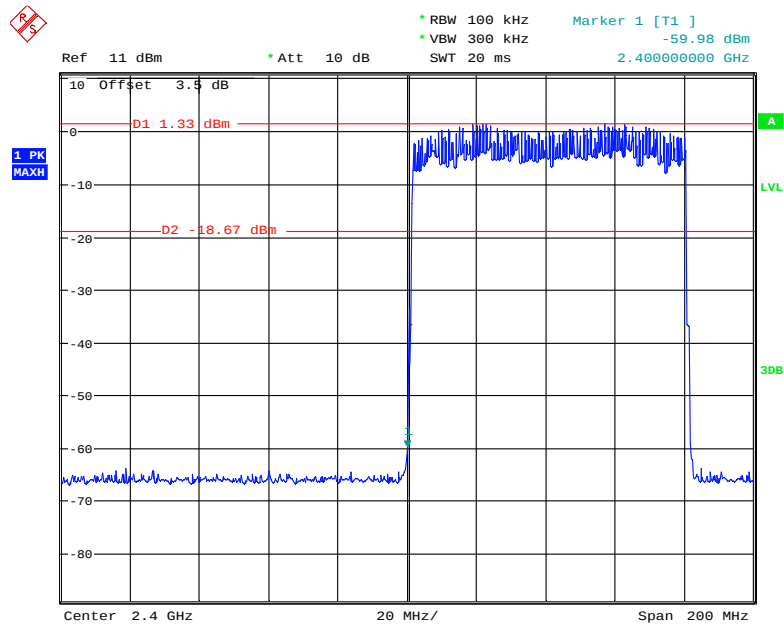


Date: 3.JUL.2019 11:13:57

Single

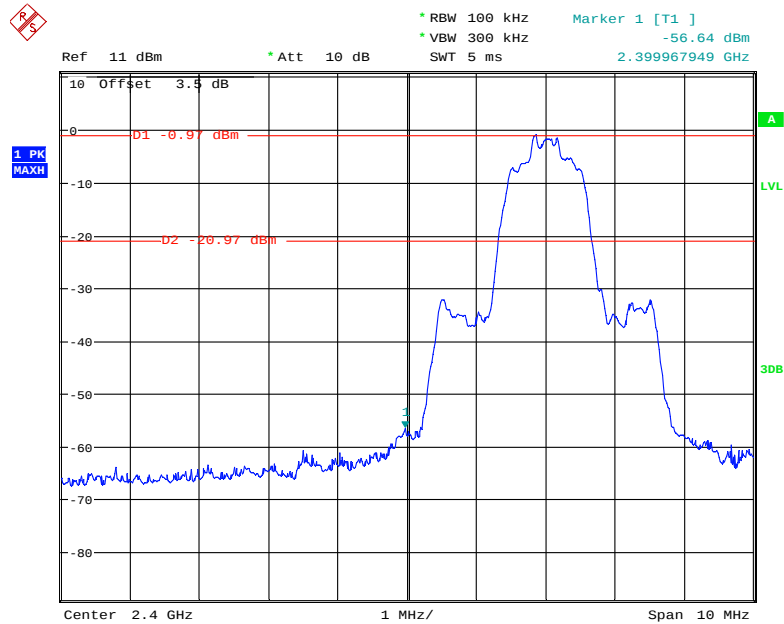


Date: 3.JUL.2019 11:01:18

EDR ($\pi/4$ -DQPSK): Band Edge-Right Side Hopping

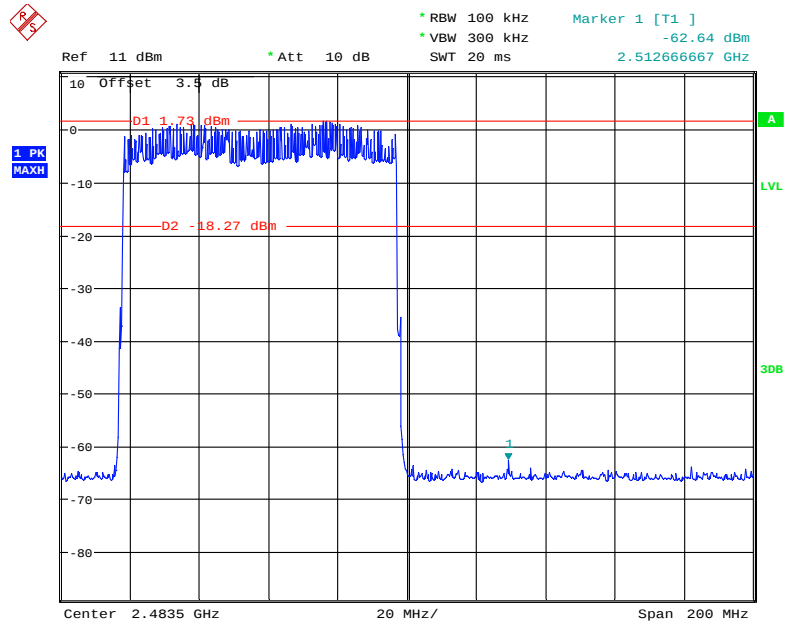


Date: 3.JUL.2019 11:16:30

Single

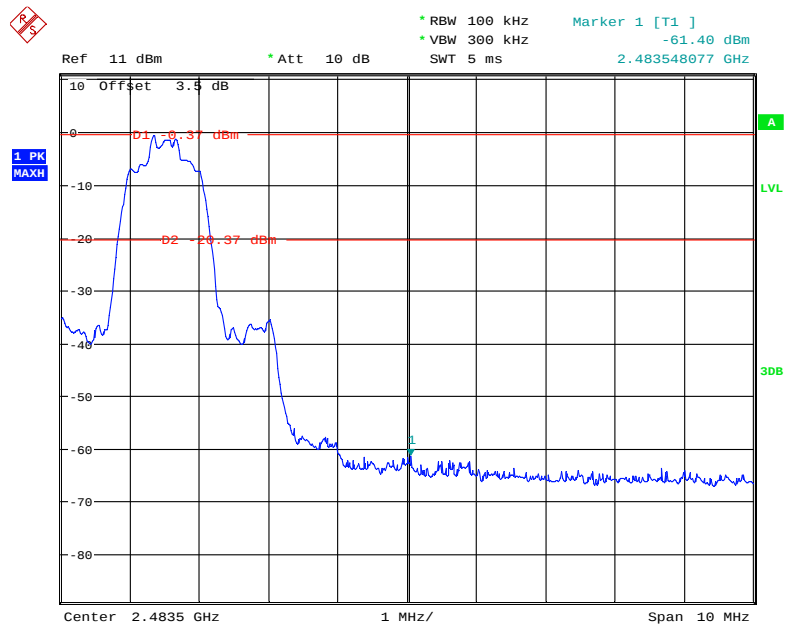


Date: 3.JUL.2019 11:00:38

EDR (8DPSK): Band Edge-Left Side Hopping

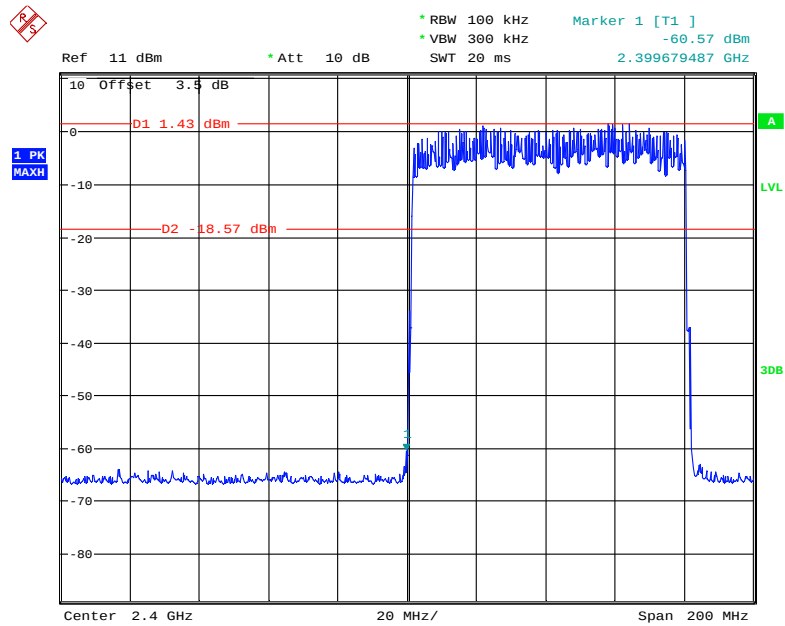

Date: 3.JUL.2019 11:11:40


Single

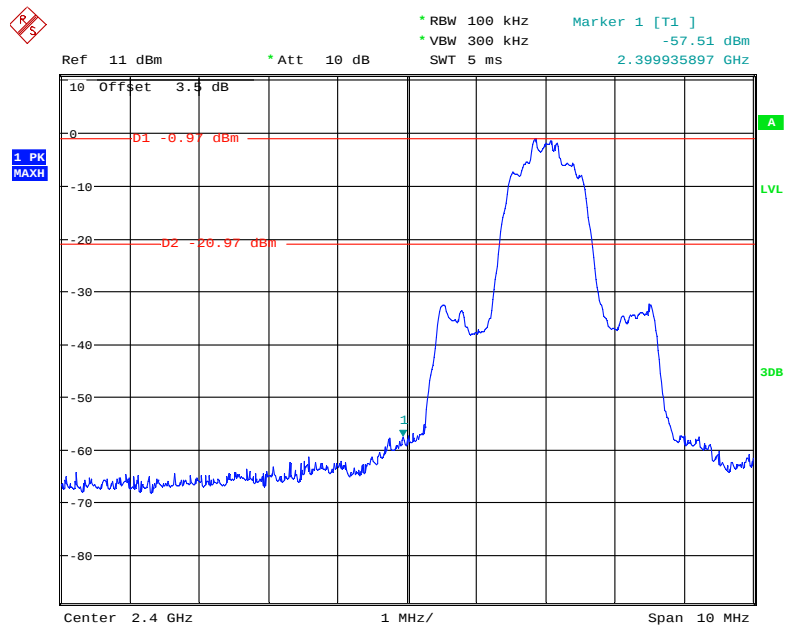

Date: 3.JUL.2019 11:03:38


EDR (8DPSK): Band Edge-Right Side

Hopping

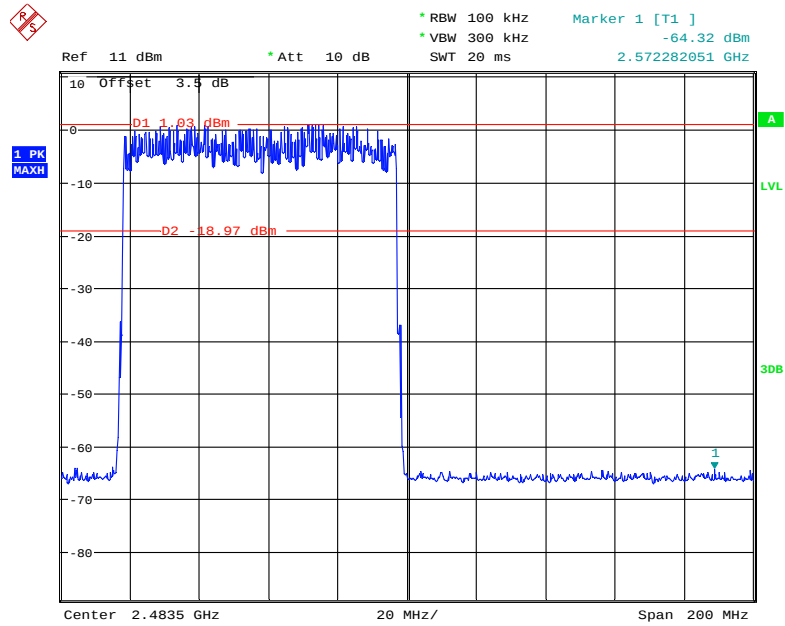

Date: 3.JUL.2019 11:09:46

Single

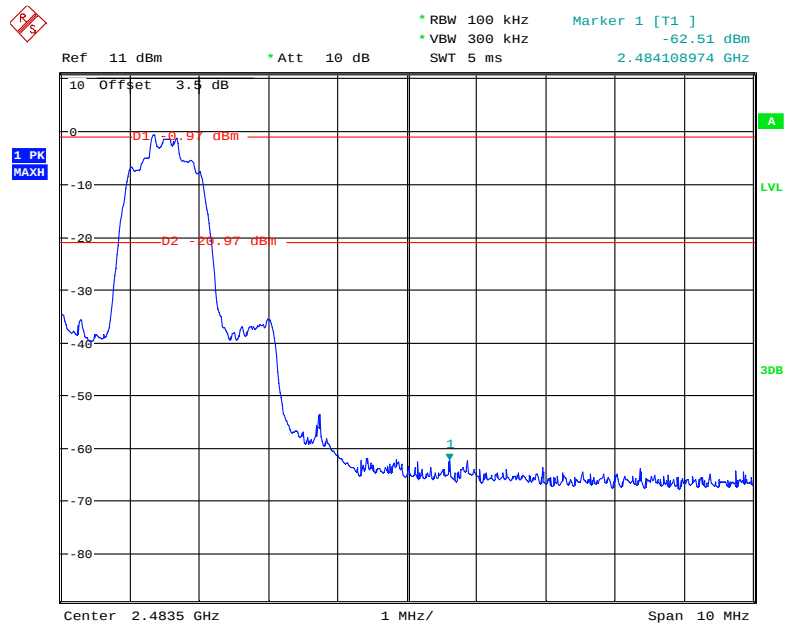

Date: 3.JUL.2019 11:06:54

***** END OF REPORT *****