



REPORT No.: SZ18090036W05

TEST REPORT

APPLICANT : Panasonic India Private Limited

PRODUCT NAME : Smartphone

MODEL NAME : Panasonic ELUGA Ray 600

BRAND NAME : Panasonic

FCC ID : 2APTIS60ER6

STANDARD(S) : 47 CFR Part 15 Subpart C

TEST DATE : 2018-10-19 to 2018-10-21

ISSUE DATE : 2018-10-23

Tested by: Zhou Zi Jiang
Zhou Zijiang (Test Engineer)

Approved by: Peng Huarui
Peng Huarui (Supervisor)

NOTE: This document is issued by MORLAB, the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

MORLAB

SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd.
FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Http://www.morlab.cn

Fax: 86-755-36698525

E-mail: service@morlab.cn





DIRECTORY

1. Technical Information	4
1.1. Applicant and Manufacturer Information	4
1.2. Equipment Under Test (EUT) Description	4
1.3. Test Standards and Results	5
1.4. Environmental Conditions	5
2. 47 CFR Part 15C Requirements	6
2.1. Antenna requirement	6
2.2. Duty Cycle Of Test Signal	6
2.3. Peak Output Power	10
2.4. Bandwidth	13
2.5. Conducted Spurious Emissions and Band Edge	22
2.6. Power spectral density (PSD)	35
2.7. Conducted Emission	44
2.8. Restricted Frequency Bands	48
2.9. Radiated Emission	60
Annex A Test Uncertainty	76
Annex B Testing Laboratory Information	77



REPORT No.: SZ18090036W05

Change History		
Issue	Date	Reason for change
1.0	2018-10-23	First edition



1. Technical Information

Note: Provide by applicant.

1.1. Applicant and Manufacturer Information

Applicant:	Panasonic India Private Limited
Applicant Address:	12th Floor Ambience Tower, Ambience Island, NH-8, Gurgaon-122002, Haryana, India
Manufacturer:	Shenzhen Tinno Mobile Technology Corp.
Manufacturer Address:	4/F.,H-3 Building,OCT Eastern Industrial Park. NO.1 XiangShan East Road.,Nan Shan District,Shenzhen,P.R.China.

1.2. Equipment Under Test (EUT) Description

Product Name:	Smartphone
Serial No:	(N/A, marked #1 by test site)
Hardware Version:	V1.0
Software Version:	EB-90S60ER6v1015
Modulation Type:	DSSS, OFDM
Operating Frequency Range:	802.11b/g/n(HT20): 2.412GHz - 2.462GHz 802.11n(HT40): 2.422GHz - 2.452GHz
Channel Number:	802.11b/g/n(HT20): 11 802.11 n(HT40): 7
Antenna Type:	PIFA Antenna
Antenna Gain:	-1.5 dBi

Note1: According to the certificate holder, they declared that the models: E-DM-1, E-DM-2 and E-DM-3 are the same both in software, hardware and RF module. It's only differences for model. The main measuring model is E-DM-1, only the results for E-DM-1 were recorded in this report.

Note2: For 802.11b/g/n(HT20) (2.4GHz band), the frequencies allocated is $F \text{ (MHz)} = 2412 + 5 \cdot (n-1)$ ($1 \leq n \leq 11$). The lowest, middle, highest channel numbers of the EUT used and tested in this report are separately 1 (2412MHz), 6 (2437MHz) and 11 (2462MHz).

For 802.11 n(HT40), the frequencies allocated is $F \text{ (MHz)} = 2412 + 5 \cdot (n-1)$ ($3 \leq n \leq 9$). The lowest, middle, highest channel numbers of the EUT used and tested in this report are separately 3 (2422MHz), 6 (2437MHz) and 9 (2452MHz).



Note 3: The EUT connected to the serial port of the computer with a serial communication cable, we use the dedicated software to control the EUT continuous transmission.

Note 4: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.

1.3. Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart C for the EUT FCC ID Certification:

No	Identity	Document Title
1	47 CFR Part 15 (10-1-15 Edition)	Radio Frequency Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Test Date	Test Engineer	Result
1	15.203	Antenna Requirement	N/A	N/A	PASS
2	N/A	Duty Cycle Of Test Signal	Oct 19, 2018	Zhou Zijiang	PASS
3	15.247(b)	Peak Output Power	Oct 19, 2018	Zhou Zijiang	PASS
4	15.247(a)	Bandwidth	Oct 19, 2018	Zhou Zijiang	PASS
5	15.247(d)	Conducted Spurious Emission and Band Edge	Oct 19, 2018	Zhou Zijiang	PASS
6	15.247(e)	Power spectral density (PSD)	Oct 19, 2018	Zhou Zijiang	PASS
7	15.207	Conducted Emission	Oct 20, 2018	Peng Xuewei	PASS
8	15.247(d)	Restricted Frequency Bands	Oct 20, 2018	Peng Xuewei	PASS
9	15.209, 15.247(d)	Radiated Emission	Oct 19, 2018	Peng Xuewei	PASS

Note: The tests of Conducted Emission and Radiated Emission were performed according to the method of measurements prescribed in ANSI C63.10 2013 and KDB558074 D01 v05.

1.4. Environmental Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15 - 35
Relative Humidity (%):	30 -60
Atmospheric Pressure (kPa):	86-106



2. 47 CFR Part 15C Requirements

2.1. Antenna requirement

2.1.1. Applicable Standard

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

2.1.2. Result: Compliant

The EUT has a permanently and irreplaceable attached antenna. Please refer to the EUT internal photos.

2.2. Duty Cycle Of Test Signal


2.2.1. Requirement

Preferably, all measurements of maximum conducted (average) output power will be performed with the EUT transmitting continuously (i.e., with a duty cycle of greater than or equal to 98%). When continuous operation cannot be realized, then the use of sweep triggering/signal gating techniques can be used to ensure that measurements are made only during transmissions at the maximum power control level. Such sweep triggering/signal gating techniques will require knowledge of the minimum transmission duration (T) over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation. Sweep triggering/signal gating techniques can then be used if the measurement/sweep time of the analyzer can be set such that it does not exceed T at any time that data are being acquired (i.e., no transmitter OFF-time is to be considered).

When continuous transmission cannot be achieved and sweep triggering/signal gating cannot be implemented, alternative procedures are provided that can be used to measure the average power; however, they will require an additional measurement of the transmitter duty cycle (D). Within this subclause, the duty cycle refers to the fraction of time over which the transmitter is ON and is transmitting at its maximum power control level. The duty cycle is considered to be constant if variations are less than $\pm 2\%$; otherwise, the duty cycle is considered to be nonconstant.

2.2.2. Test Description

A. Test Set:

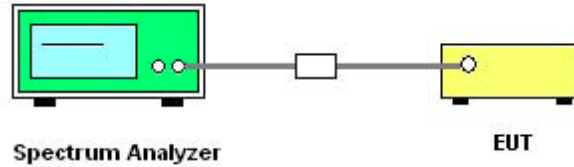

ANSI C63.10 2013 Clause 11.6 was used in order to prove compliance.

B. Equipments List:

Please refer ANNEX B(4).


2.2.3. Test Result

A. Test Verdict:


Test Mode	Duty Cycle (%) (D)	Duty Factor ($10 \cdot \lg[1/D]$)
802.11b	100.00	0.00
802.11g	97.89	0.09
802.11n(HT20)	97.01	0.13
802.11n(HT40)	95.59	0.20




B. Test Plots

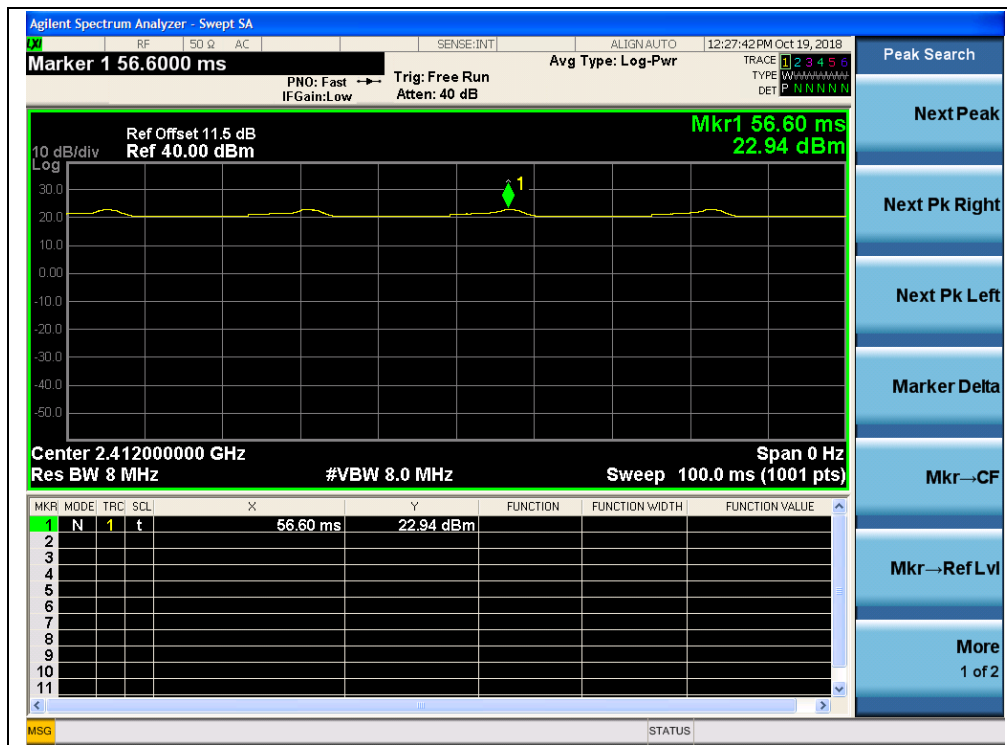


(Channel 1, 2412MHz, 802.11b)

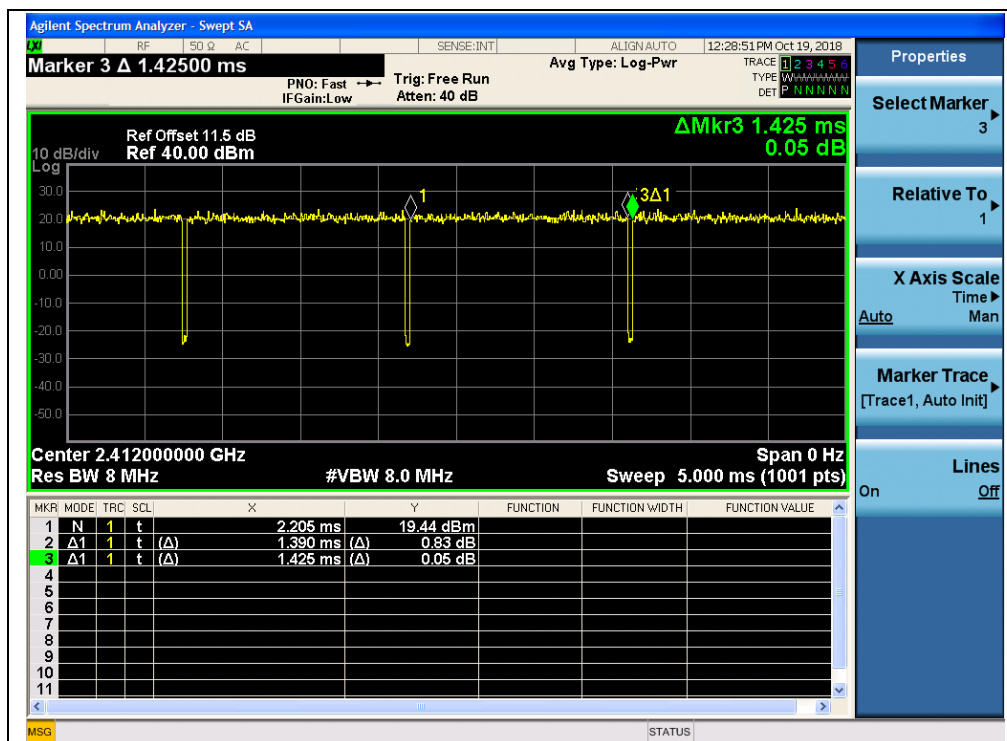

(Channel 1, 2412MHz, 802.11g)

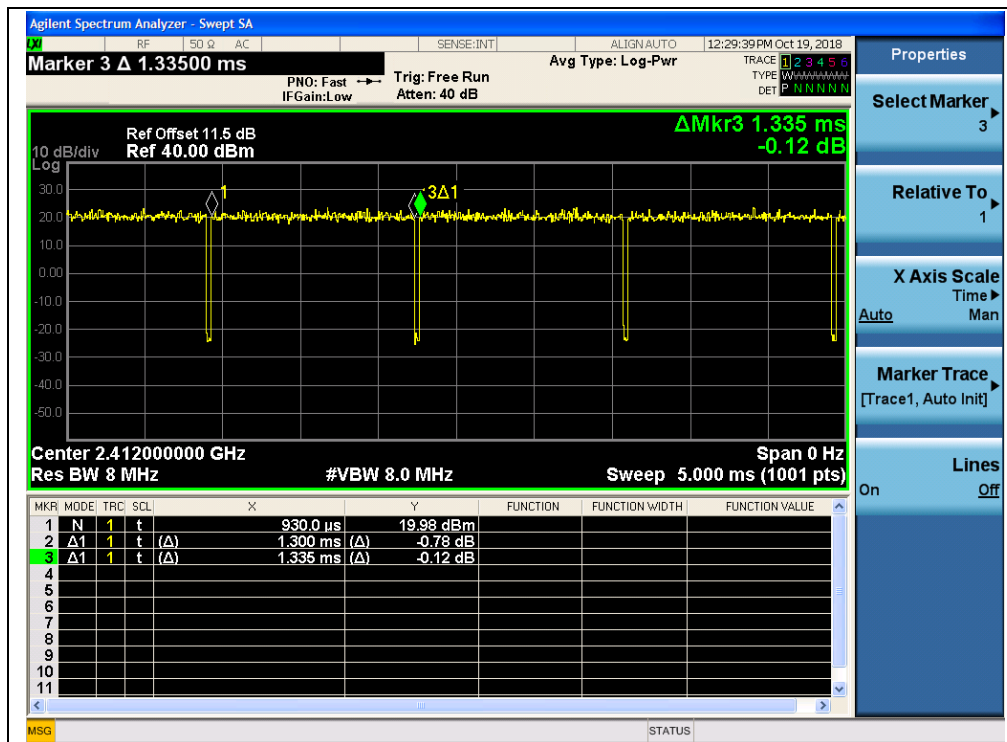

(Channel 1, 2412MHz, 802.11 n(HT20))

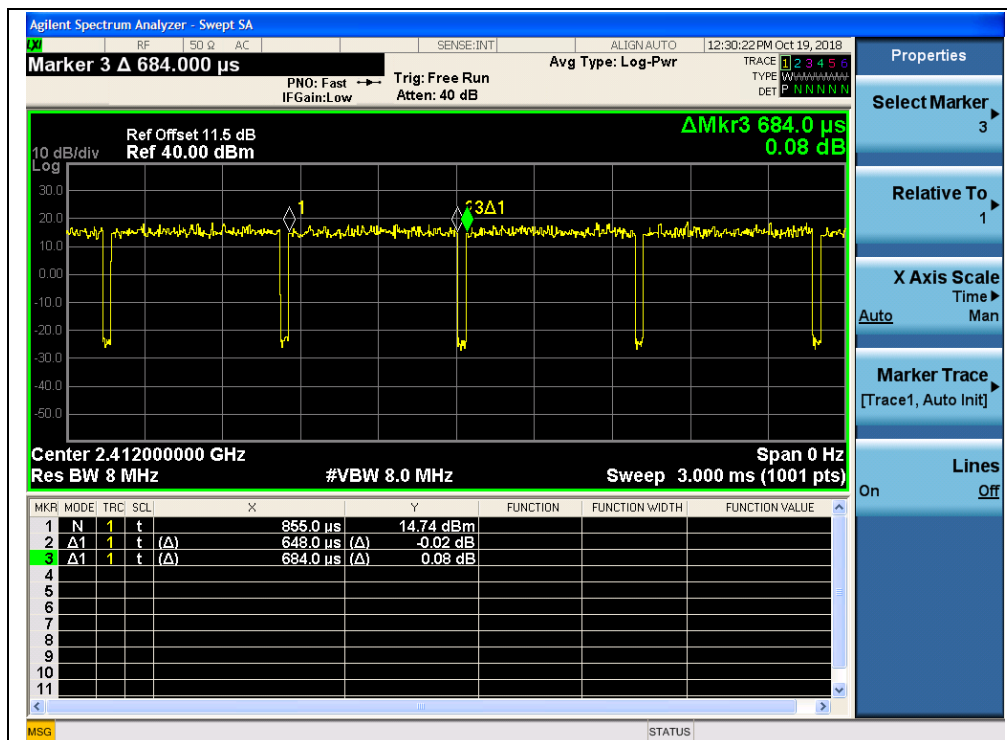

(Channel 3, 2422MHz, 802.11 n(HT40))

2.3. Peak Output Power


2.3.1. Requirement

According to FCC section 15.247(b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: The maximum peak conducted output power of the intentional radiator shall not exceed 1 Watt.

2.3.2. Test Description

The measured output power was calculated by the reading of the USB Wideband Power Sensor and calibration.

A. Test Setup:

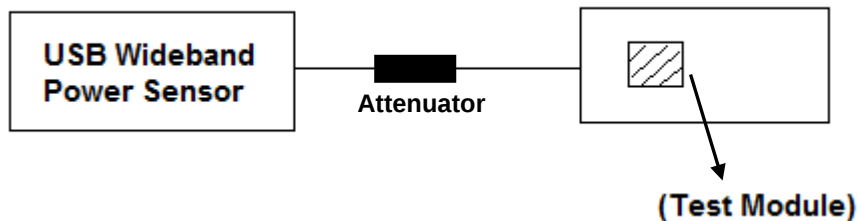

The EUT (Equipment under the test) which is coupled to the USB Wideband Power Sensor; the RF load attached to the EUT antenna terminal is 50 Ohm; the path loss as the factor is calibrated to correct the reading.

B. Equipments List:

Please refer ANNEX B(4).



2.3.3. Test Result

2.3.3.1 802.11b Test Mode

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
1	2412	19.62	0.092	30	1	PASS
6	2437	20.26	0.106			PASS
11	2462	19.97	0.099			PASS

Channel	Frequency (MHz)	Measured Output Average Power		Limit		Verdict
		dBm	W	dBm	W	
1	2412	16.47	0.044	30	1	PASS
6	2437	17.19	0.052			PASS
11	2462	16.89	0.049			PASS

2.3.3.2 802.11g Test mode

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
1	2412	24.72	0.296	30	1	PASS
6	2437	25.05	0.320			PASS
11	2462	24.38	0.274			PASS

Channel	Frequency (MHz)	Measured Output Average Power		Limit		Verdict
		dBm	W	dBm	W	
1	2412	16.60	0.046	30	1	PASS
6	2437	17.13	0.052			PASS
11	2462	16.76	0.047			PASS

**2.3.3.3 802.11n(HT20) Test mode**

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
1	2412	24.62	0.290	30	1	PASS
6	2437	24.89	0.308			PASS
11	2462	24.12	0.258			PASS

Channel	Frequency (MHz)	Measured Output Average Power		Limit		Verdict
		dBm	W	dBm	W	
1	2412	16.55	0.045	30	1	PASS
6	2437	17.24	0.053			PASS
11	2462	16.58	0.045			PASS

2.3.3.4 802.11n(HT40) Test mode

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
3	2422	25.38	0.345	30	1	PASS
6	2437	25.02	0.318			PASS
9	2452	25.22	0.333			PASS

Channel	Frequency (MHz)	Measured Output Average Power		Limit		Verdict
		dBm	W	dBm	W	
3	2422	16.20	0.042	30	1	PASS
6	2437	15.88	0.039			PASS
9	2452	16.31	0.043			PASS


2.4. Bandwidth

2.4.1. Requirement

According to FCC section 15.247(a) (2), Systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

2.4.2. Test Description

A. Test Set:

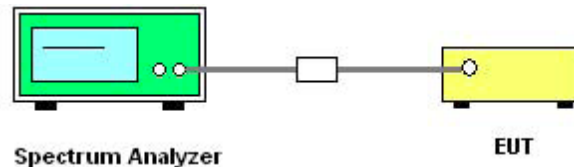

The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

KDB 558074 Section 8.1 Option 1 was used in order to prove compliance.

B. Equipments List:

Please refer ANNEX B(4).



2.4.3.1 802.11b Test mode

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limits(kHz)	Result
1	2412	9.579	≥500	PASS
6	2437	9.569	≥500	PASS
11	2462	10.04	≥500	PASS

Agilent Spectrum Analyzer - Occupied BW

12:18:39 PM Oct 19, 2018

Center Freq 2.41200000 GHz

Trig: Free Run

#Att: 14 dB

Radio Std: None

Avg/Hold: >10/10

Radio Device: BTS

#IFGain: Low

Meas Setup

Avg/Hold Num 10

On Off

Avg Mode Repeat

Exp

OBW Power 99.00 %

Occupied Bandwidth

12.453 MHz

Total Power 23.4 dBm

Transmit Freq Error 29.827 kHz

OBW Power 99.00 %

x dB Bandwidth 9.579 MHz

x dB -6.00 dB

More 1 of 2

(Channel 1, 2412MHz, 802.11b)



(Channel 6, 2437 MHz, 802.11b)



(Channel 11, 2462MHz, 802.11b)




2.4.3.2 802.11g Test mode


A. Test Verdict:

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limits (kHz)	Result
1	2412	16.03	≥500	PASS
6	2437	15.70	≥500	PASS
11	2462	16.31	≥500	PASS


B. Test Plots:

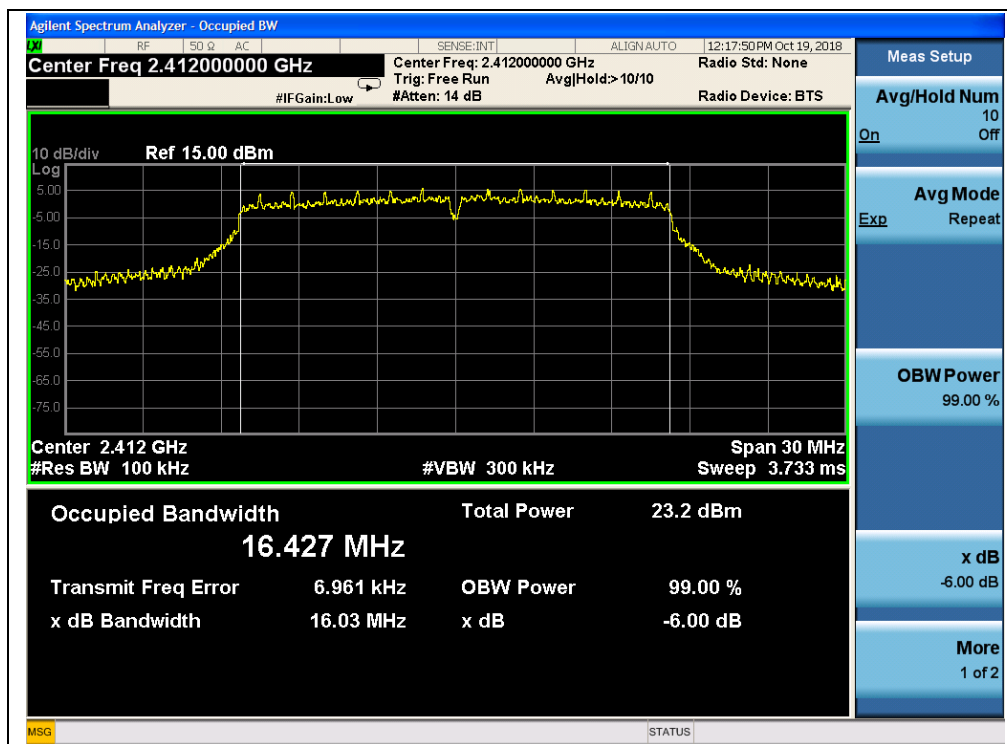

(Channel 1, 2412MHz, 802.11g)

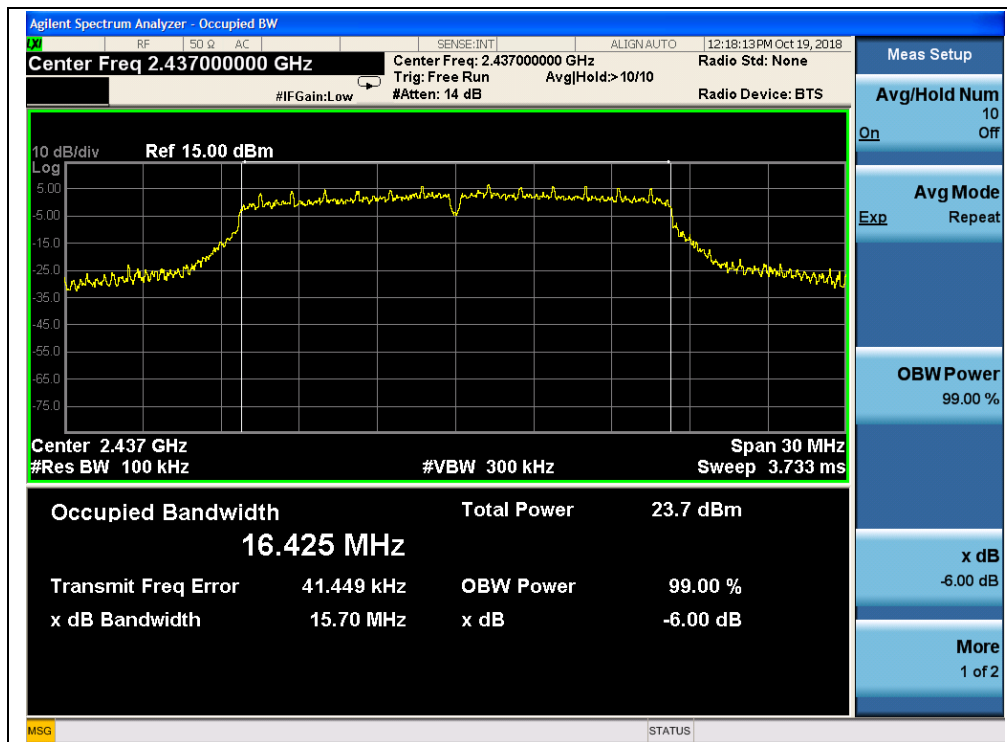

(Channel 6, 2437MHz, 802.11g)

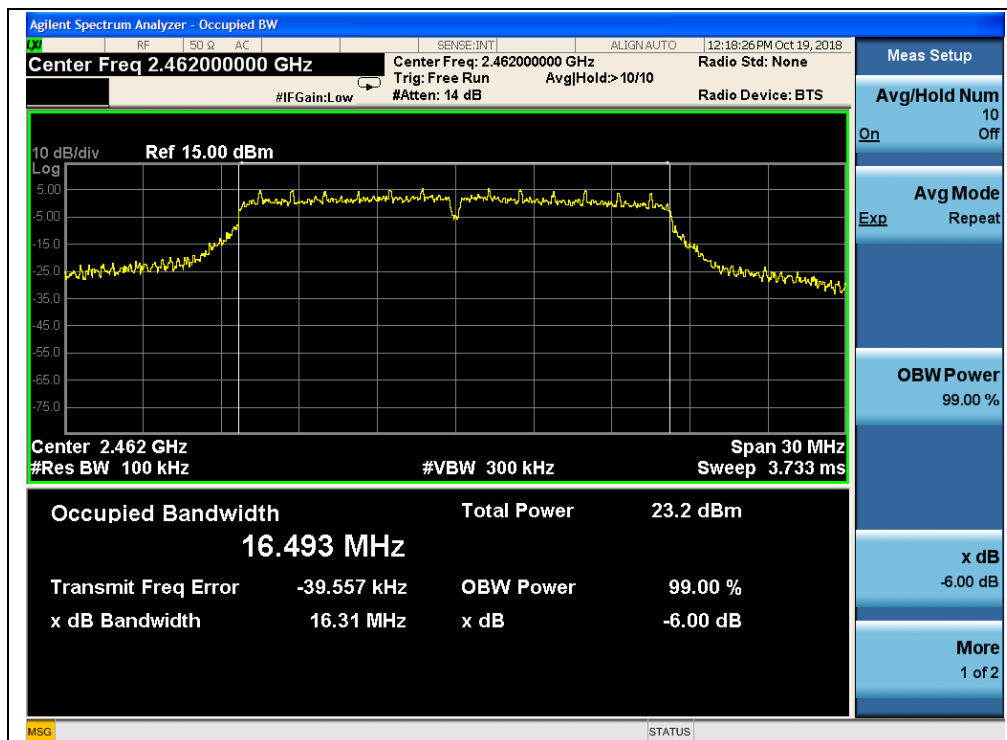

(Channel 11, 2462MHz, 802.11g)




2.4.3.3 802.11n(HT20) Test mode


A. Test Verdict:

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limits (kHz)	Result
1	2412	15.14	≥500	PASS
6	2437	16.08	≥500	PASS
11	2462	16.35	≥500	PASS


B. Test Plots:

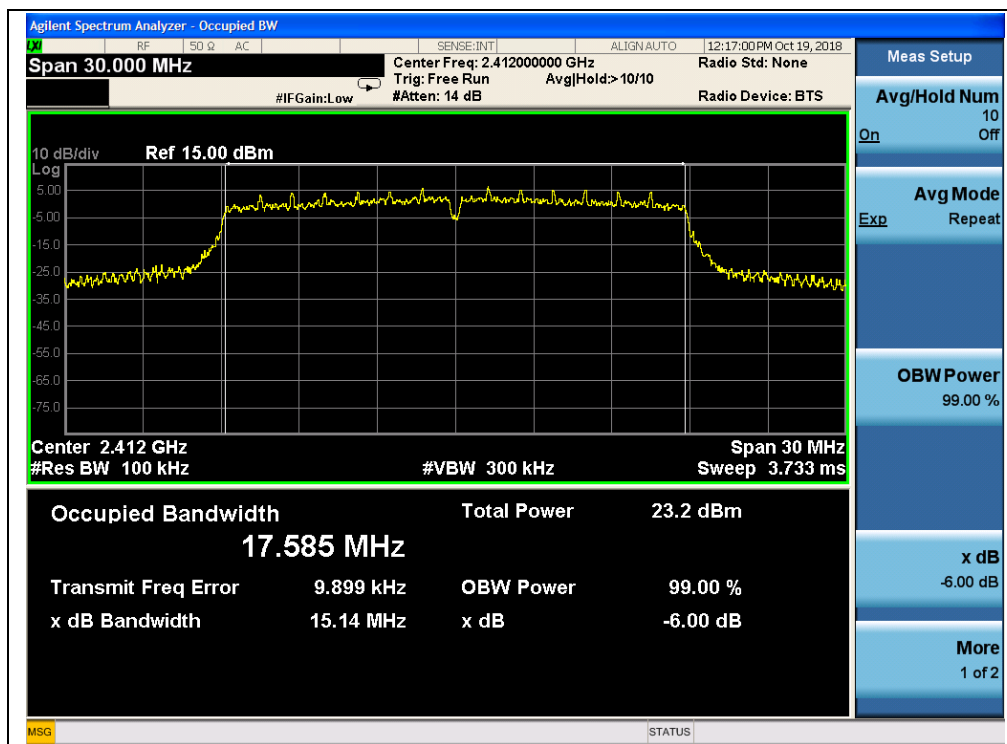

(Channel 1, 2412MHz, 802.11n(HT20))

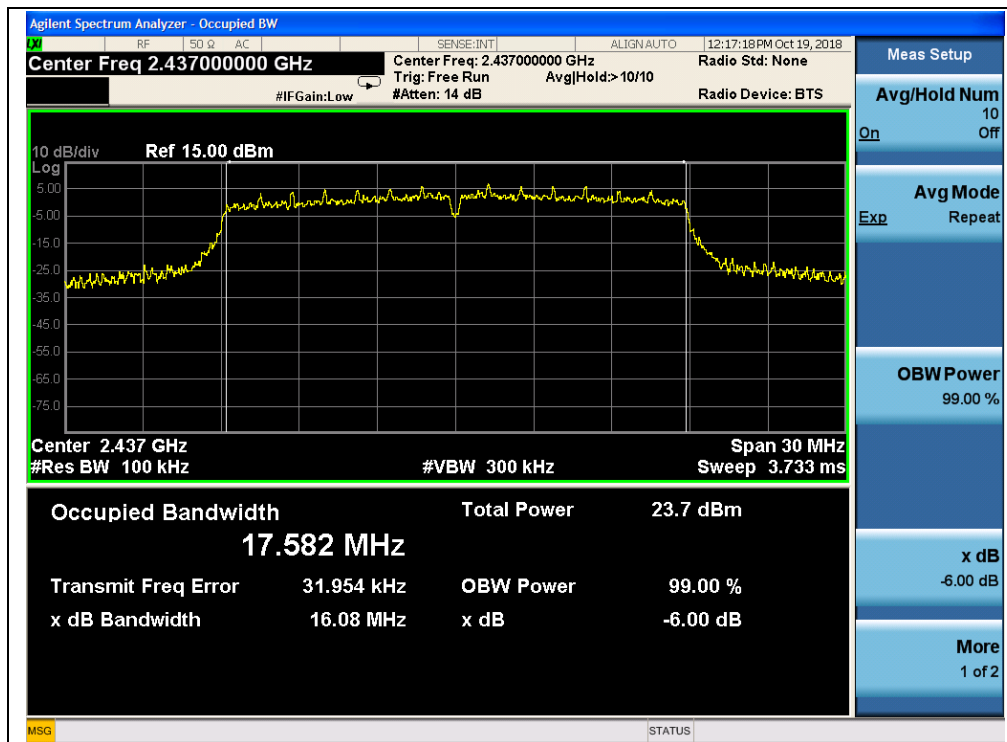

(Channel 6, 2437MHz, 802.11n(HT20))

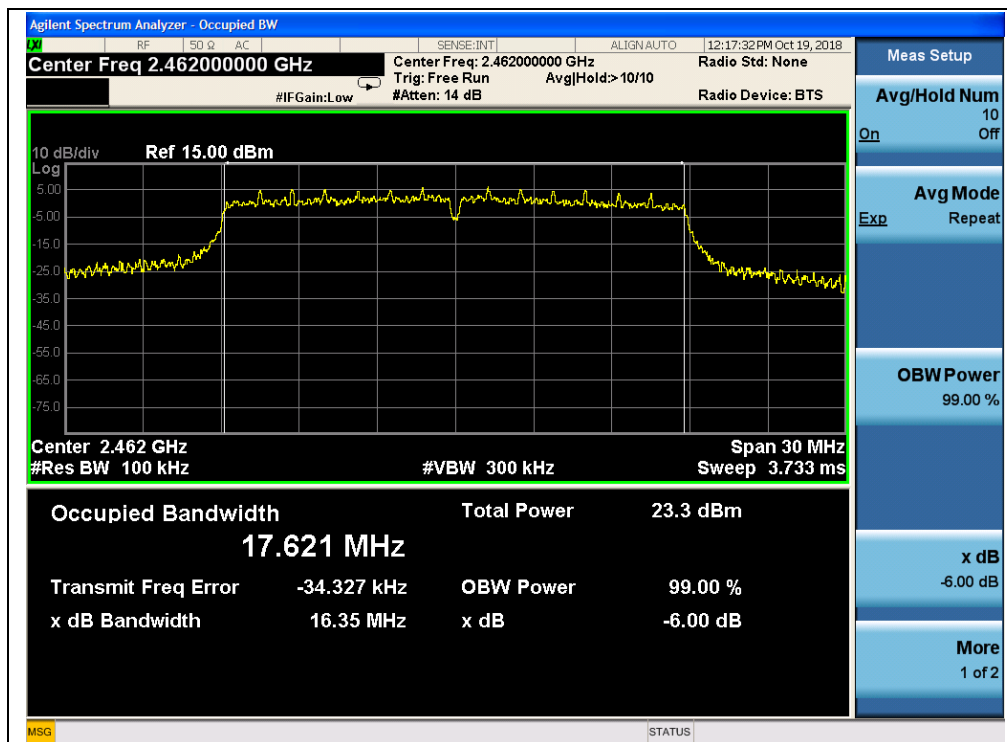

(Channel 11, 2462MHz, 802.11n(HT20))




2.4.3.4 802.11n(HT40) Test mode


A. Test Verdict:

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limits (kHz)	Result
3	2422	35.48	≥500	PASS
6	2437	35.14	≥500	PASS
9	2452	35.11	≥500	PASS


B. Test Plots:

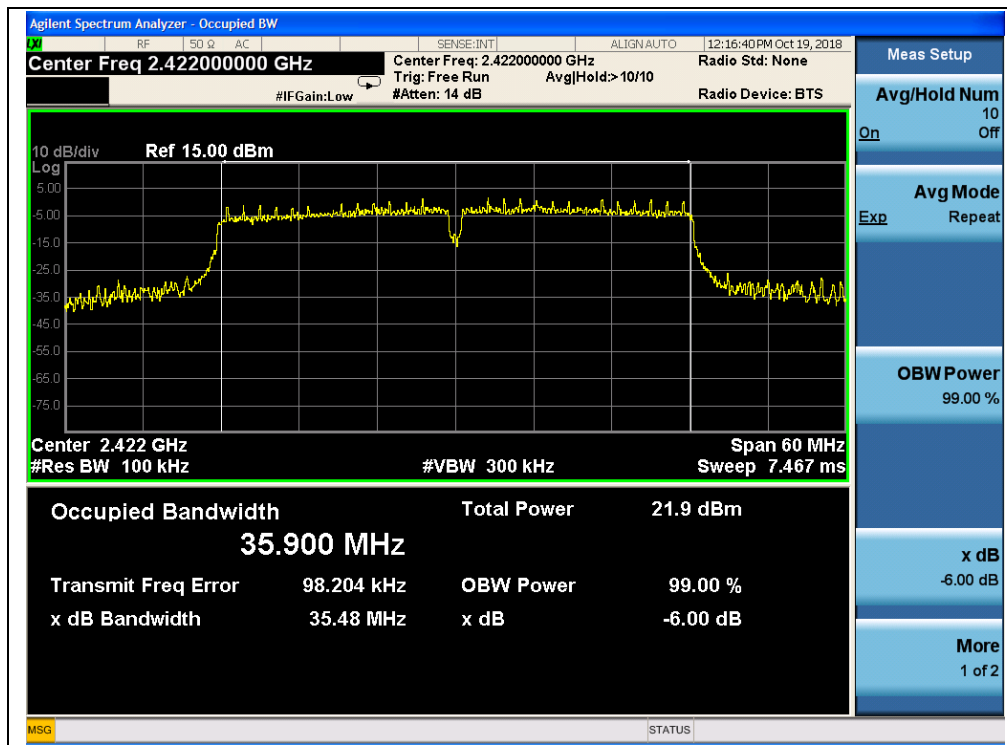

(Channel 3, 2422Mz, 802.11n(HT40))

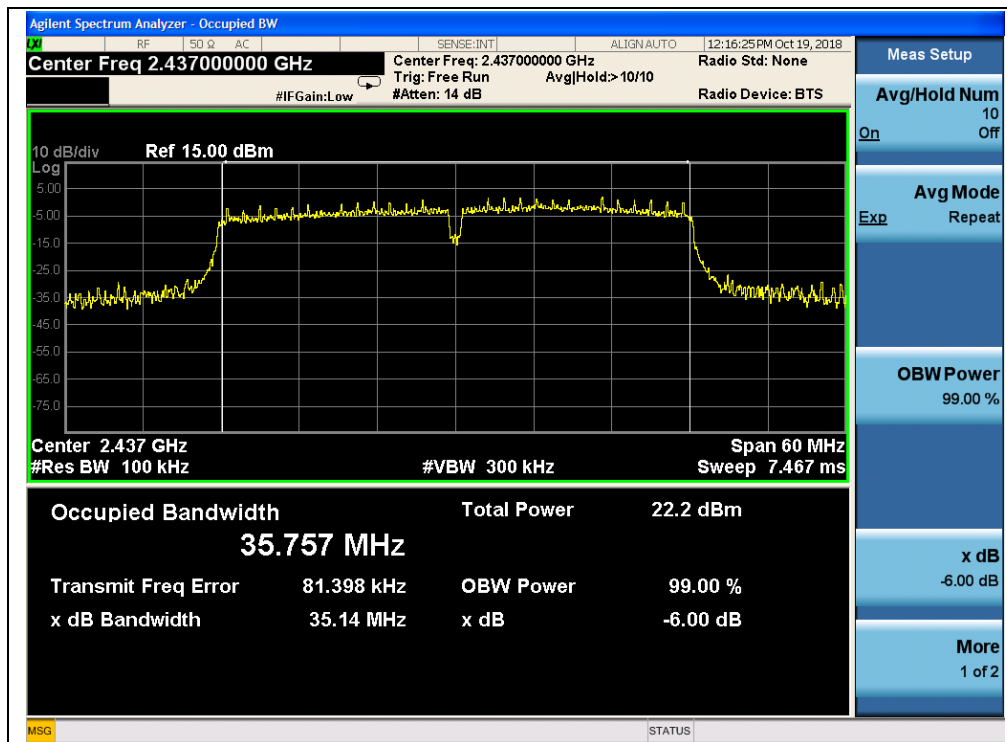

(Channel 6, 2437MHz, 802.11n(HT40))

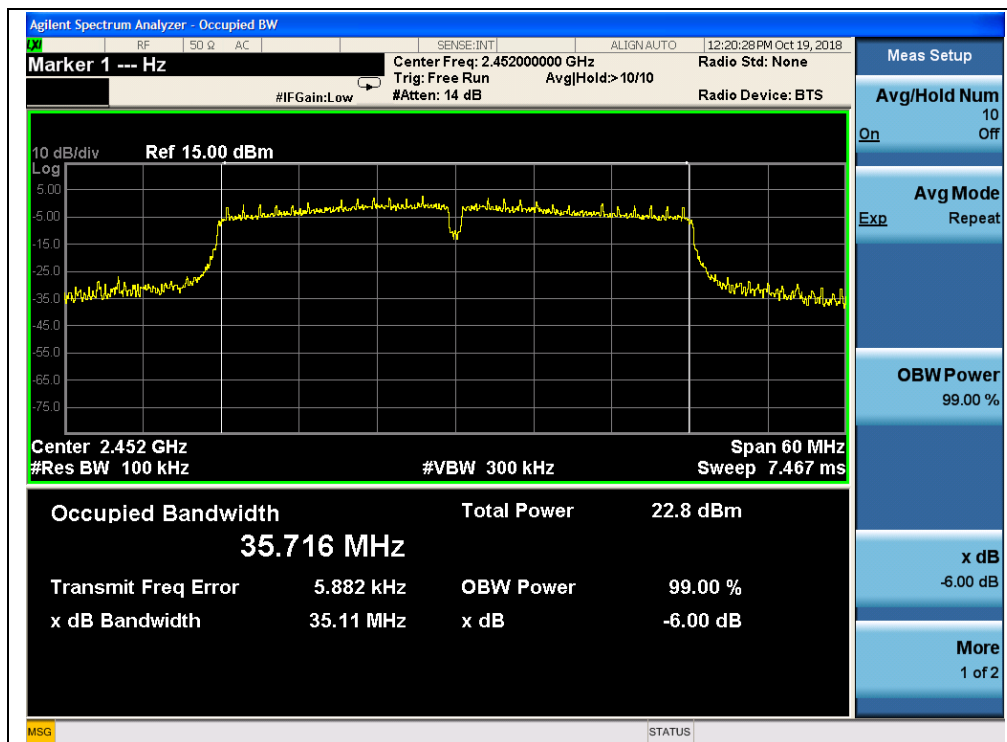

(Channel 9, 2452MHz, 802.11n(HT40))


2.5. Conducted Spurious Emissions and Band Edge

2.5.1. Requirement

According to FCC section 15.247(c), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

2.5.2. Test Description

A. Test Set:

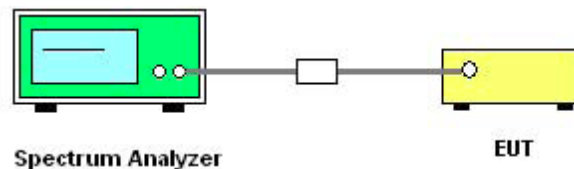

The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

KDB 558074 Section 11.0 was used in order to prove compliance.

B. Equipments List:

Please refer ANNEX B(4).



2.5.3. Test Result


2.5.3.1 802.11b Test mode

A. Test Verdict:


Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
			Carrier Level	Calculated -20dBc Limit	
1	2412	-42.72	6.44	-13.56	PASS
6	2437	-42.35	8.17	-11.83	PASS
11	2462	-42.54	6.55	-13.45	PASS

B. Test Plots:


Note: The power of the Module transmitting frequency should be ignored.

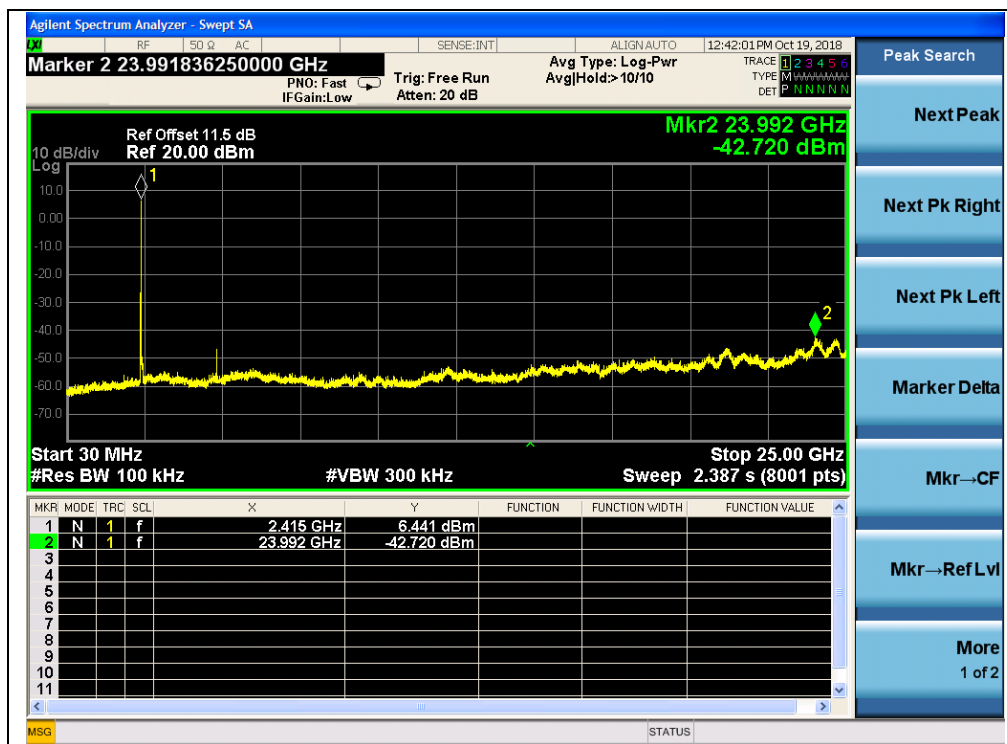


(Channel = 1, 30MHz to 25GHz)

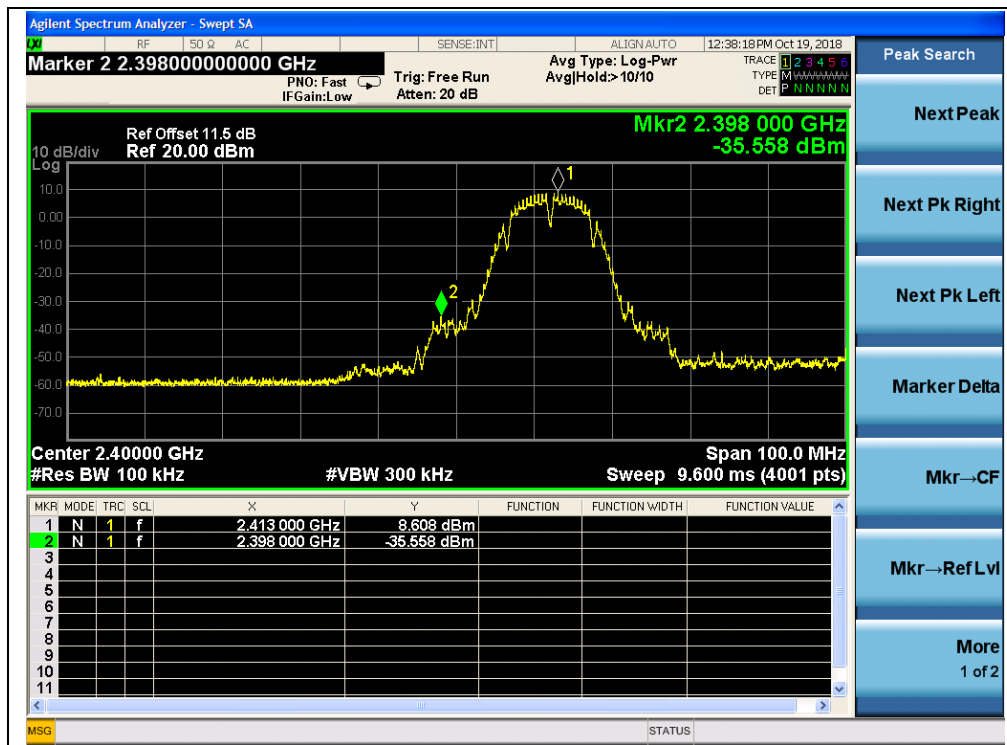


(Band Edge, Channel = 1)

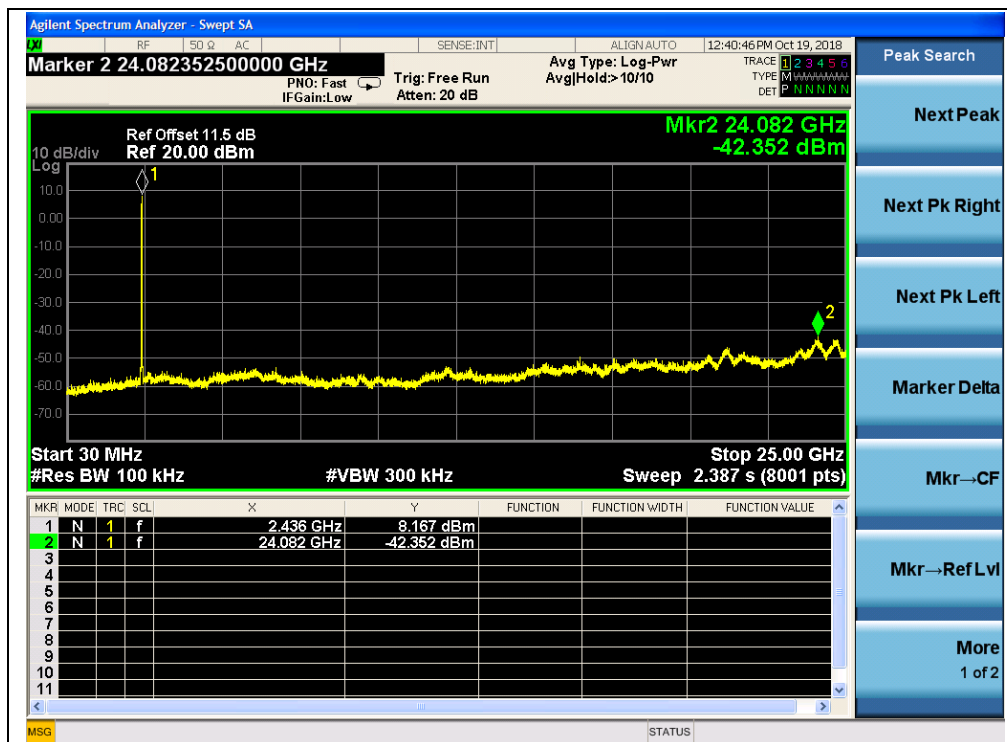

(Channel = 6, 30MHz to 25GHz)

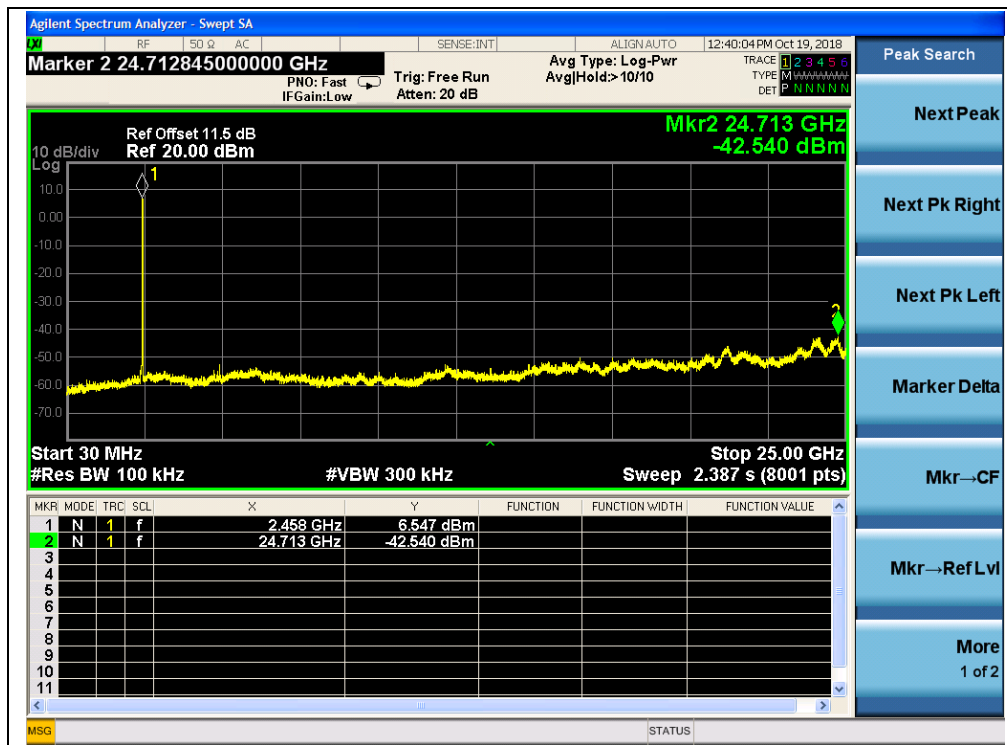

(Channel = 11, 30MHz to 25GHz)

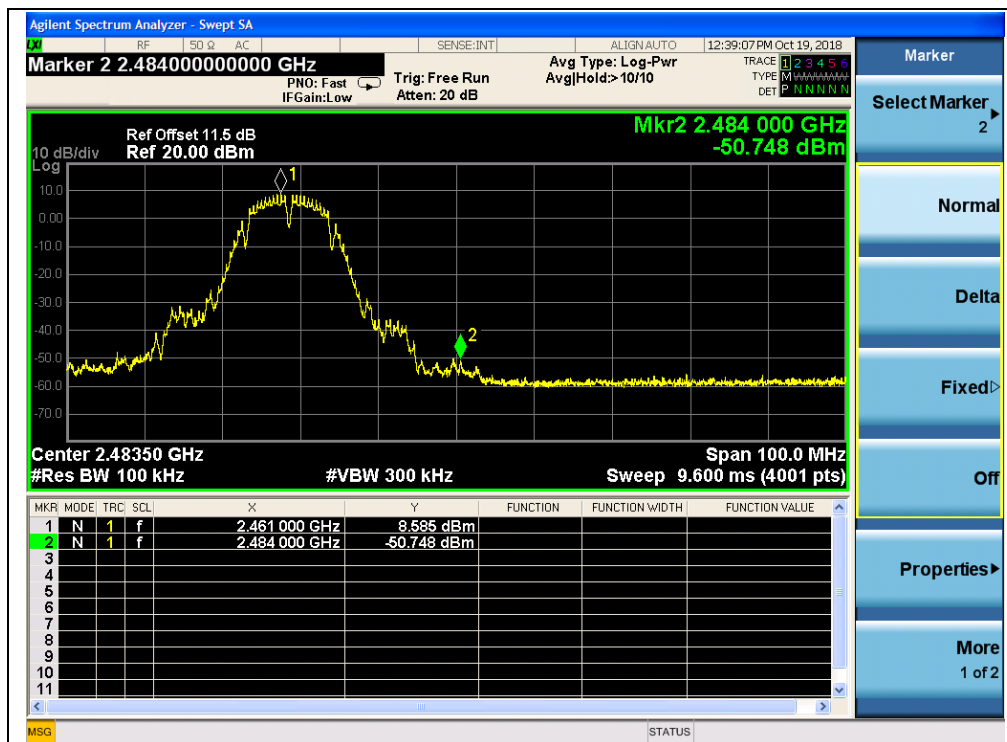

(Band Edge, Channel = 11)



2.5.3.2 802.11g Test mode

A. Test Verdict:


Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
			Carrier Level	Calculated -20dBc Limit	
1	2412	-42.63	4.89	-15.11	PASS
6	2437	-41.98	6.77	-13.23	PASS
11	2462	-42.87	5.66	-14.34	PASS

B. Test Plots:


Note: The power of the Module transmitting frequency should be ignored.




(Channel = 1, 30MHz to 25GHz)

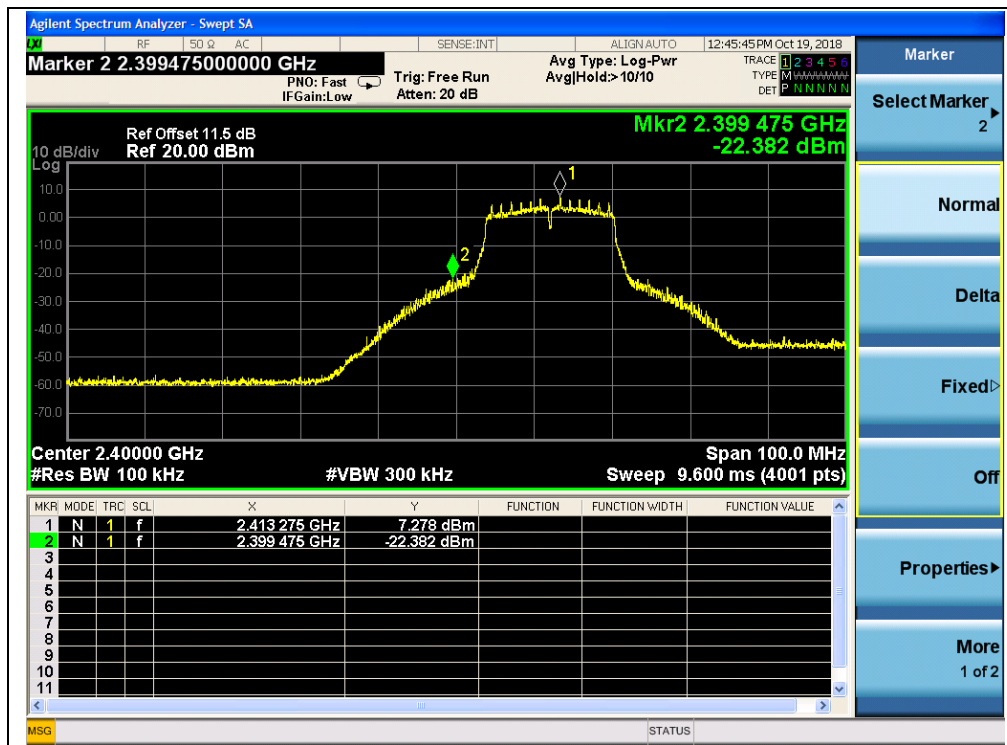

(Band Edge, Channel = 1)

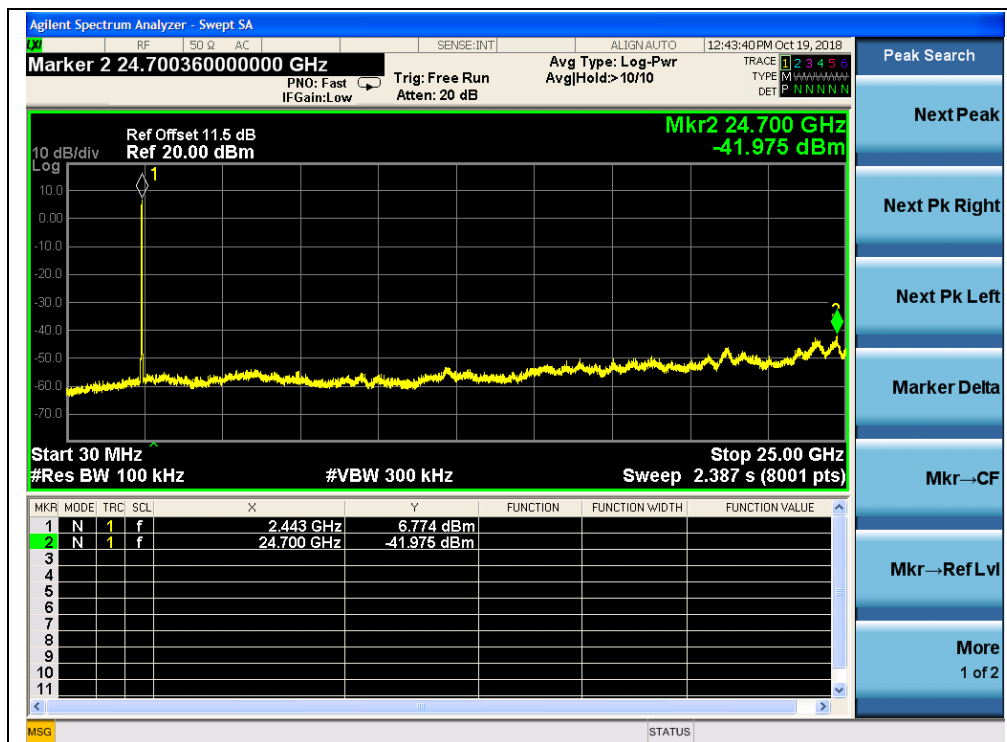

(Channel = 6, 30MHz to 25GHz)

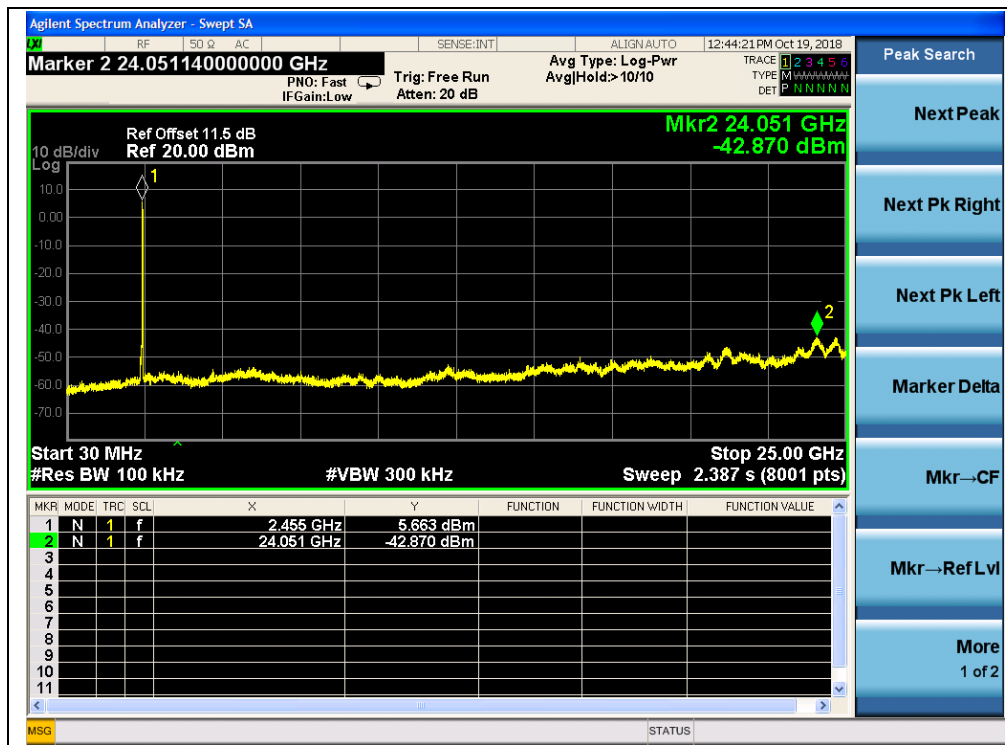

(Channel = 11, 30MHz to 25GHz)



(Band Edge, Channel = 11)




2.5.3.3 802.11n(HT20) Test mode

A. Test Verdict:


Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
			Carrier Level	Calculated -20dBc Limit	
1	2412	-42.31	5.17	-14.83	PASS
6	2437	-43.51	3.27	-16.73	PASS
11	2462	-43.32	3.37	-16.63	PASS

B. Test Plots:

Note: The power of the Module transmitting frequency should be ignored.

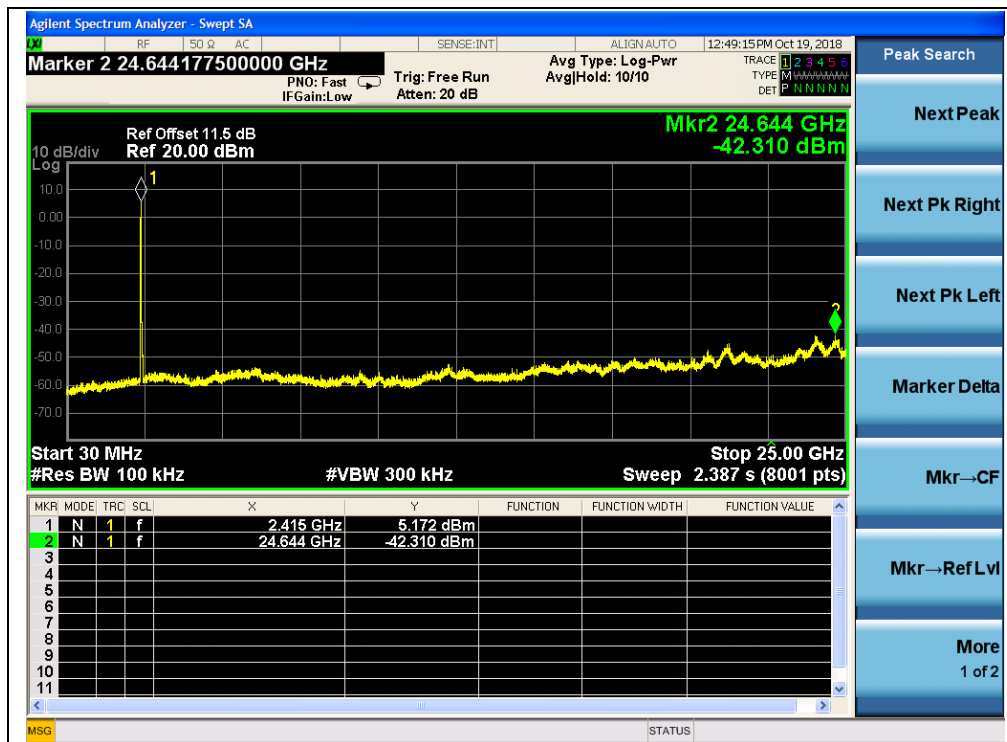


(Channel = 1, 30MHz to 25GHz)

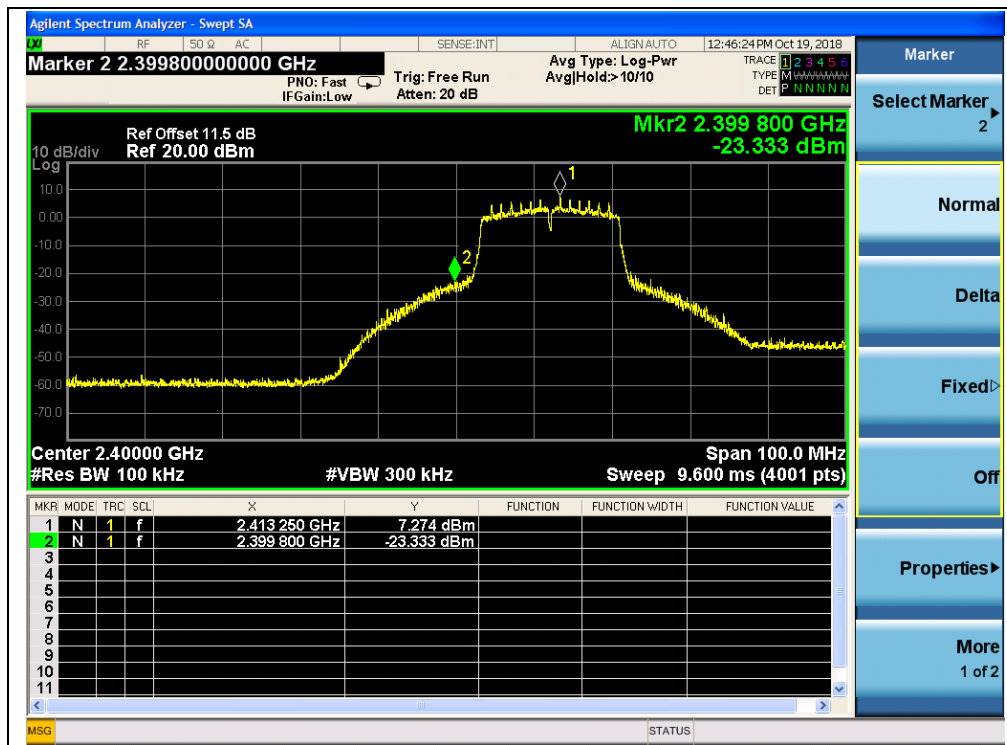


(Band Edge, Channel = 1)



(Channel = 6, 30MHz to 25GHz)

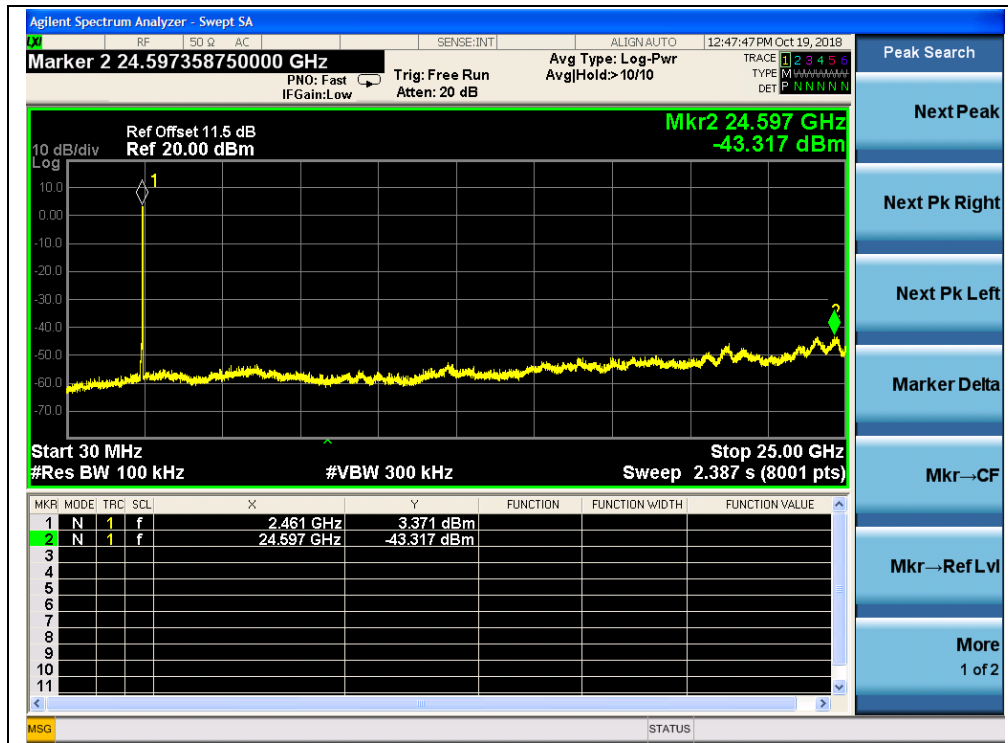

(Channel = 11, 30MHz to 25GHz)

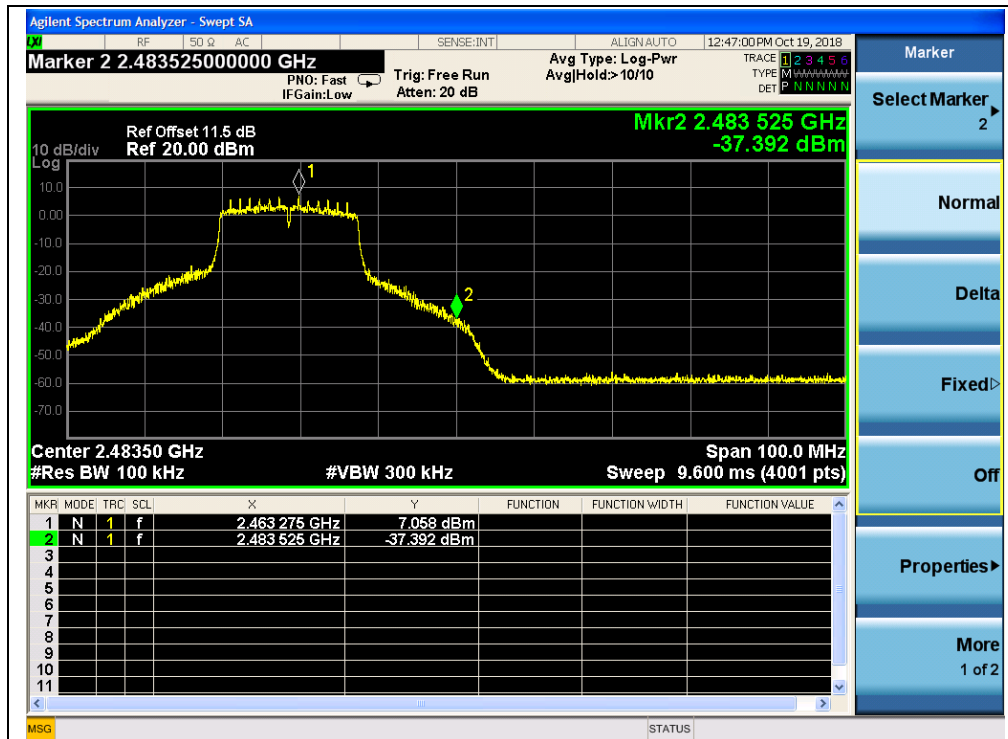

(Band Edge, Channel = 11)




2.5.3.4 802.11n(HT40) Test mode

A. Test Verdict:


Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
			Carrier Level	Calculated -20dBc Limit	
3	2422	-42.78	2.55	-17.45	PASS
6	2437	-42.81	2.83	-17.17	PASS
9	2452	-43.12	1.90	-18.10	PASS

B. Test Plots:


Note: The power of the Module transmitting frequency should be ignored.

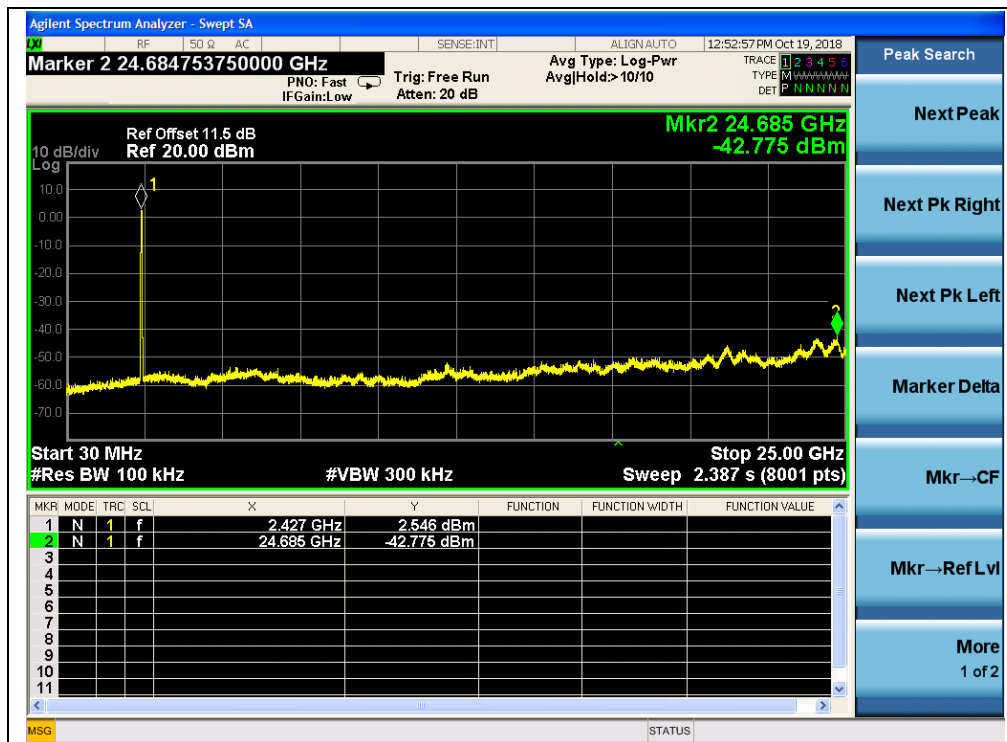


(Channel = 3, 30MHz to 25GHz)

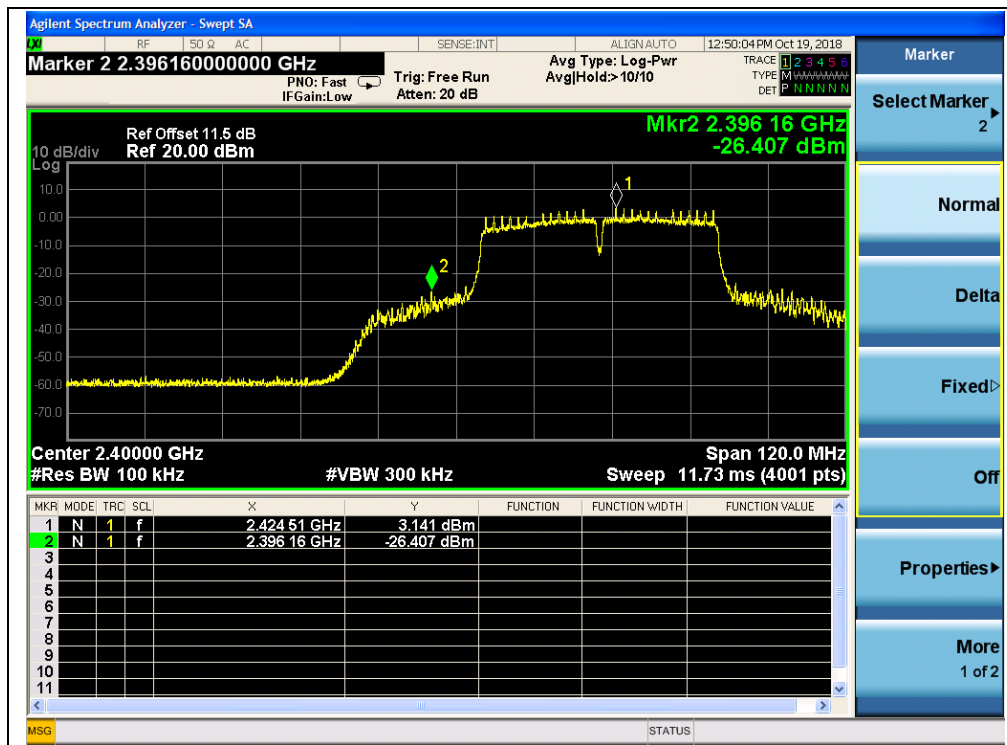

(Band Edge, Channel = 3)

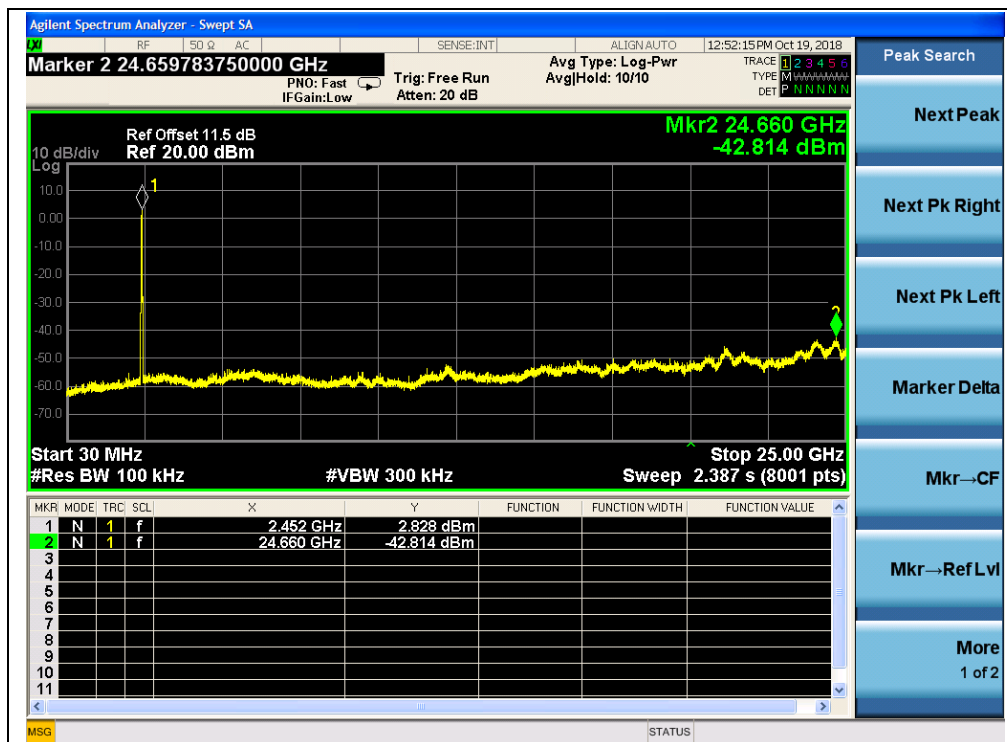

(Channel = 6, 30MHz to 25GHz)

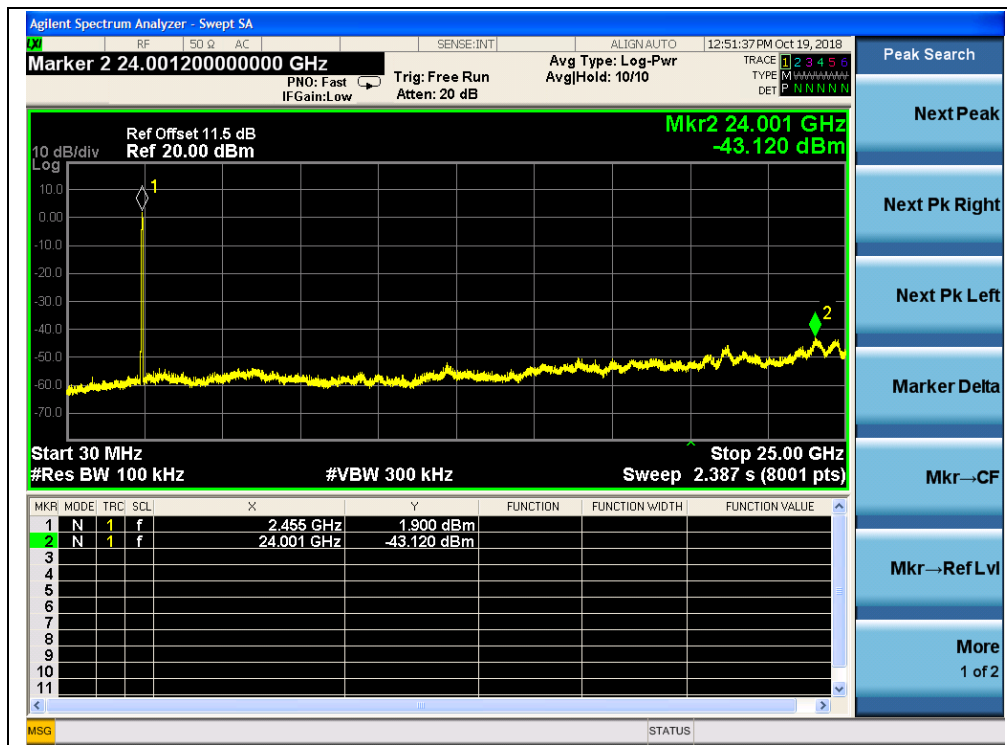

(Channel = 9, 30MHz to 25GHz)



(Band Edge, Channel = 9)

2.6. Power spectral density (PSD)

2.6.1. Requirement

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.


2.6.2. Test Description

A. Test procedure

The measured power spectral density was calculated by the reading of the spectrum analyzer and calibration. Following is the test procedure for PSD test:

- a) Set analyzer center frequency to channel center frequency.
- b) Set the span to 1.5 times DTS
- c) Set the RBW to 3 kHz
- d) Set the VBW to 10 kHz
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.

B. Test Set:

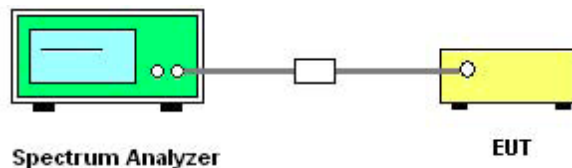

The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

KDB 558074 Section 10.2 was used in order to prove compliance.

C. Equipments List:

Please refer ANNEX B(4).



2.6.3. Test Result

2.6.3.1 802.11b Test mode

A. Test Verdict:

Spectral power density (dBm/3kHz)				
Channel	Frequency (MHz)	Measured PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
1	2412	-1.38	8	PASS
6	2437	-4.01	8	PASS
11	2462	-1.82	8	PASS

B. Test Plots:



(Channel = 1, 802.11b)



(Channel = 6, 802.11b)



(Channel = 11, 802.11b)




2.6.3.2 802.11g Test mode


A. Test Verdict:

Spectral power density (dBm/3kHz)				
Channel	Frequency (MHz)	Measured PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
1	2412	-6.96	8	PASS
6	2437	-6.37	8	PASS
11	2462	-5.69	8	PASS


B. Test Plots:

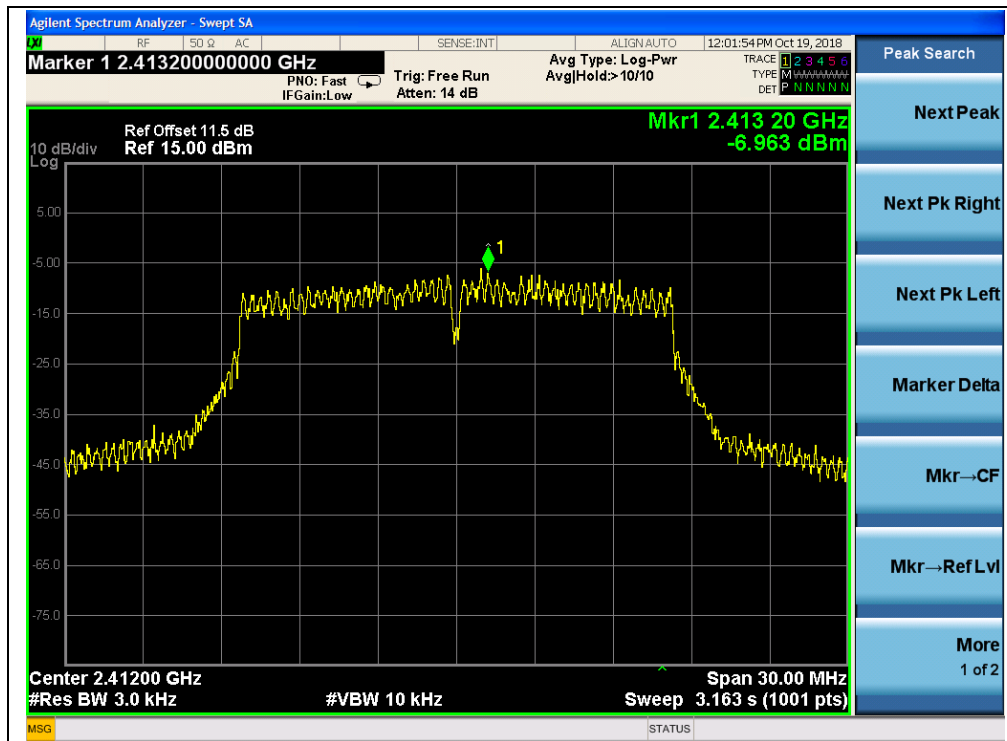

(Channel = 1, 802.11g)

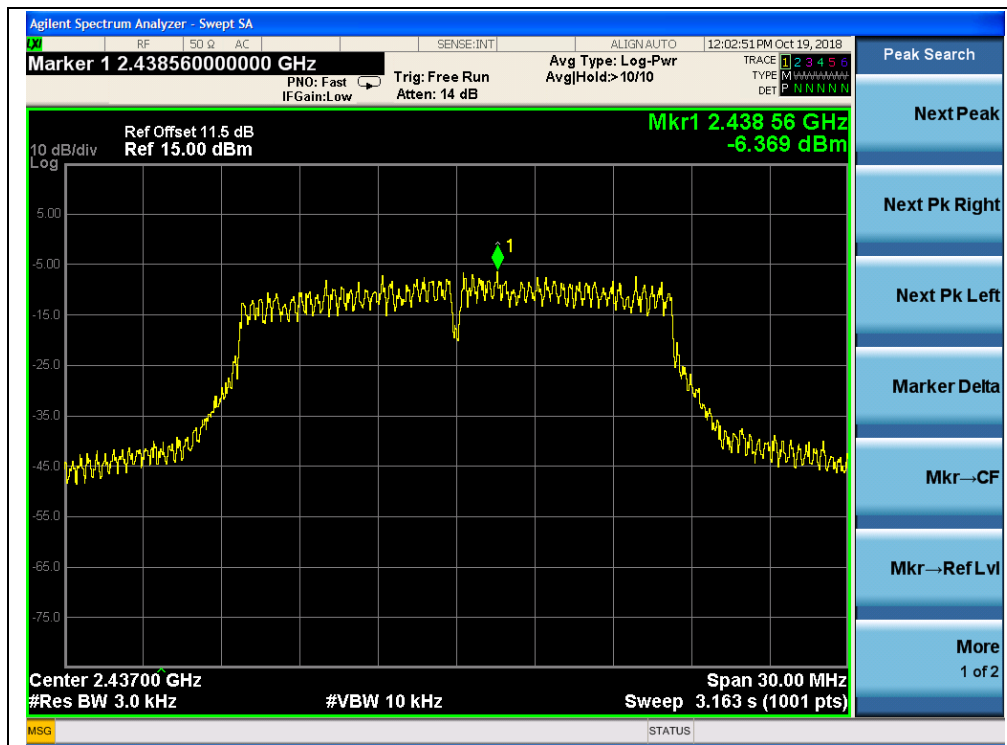

(Channel = 6, 802.11g)

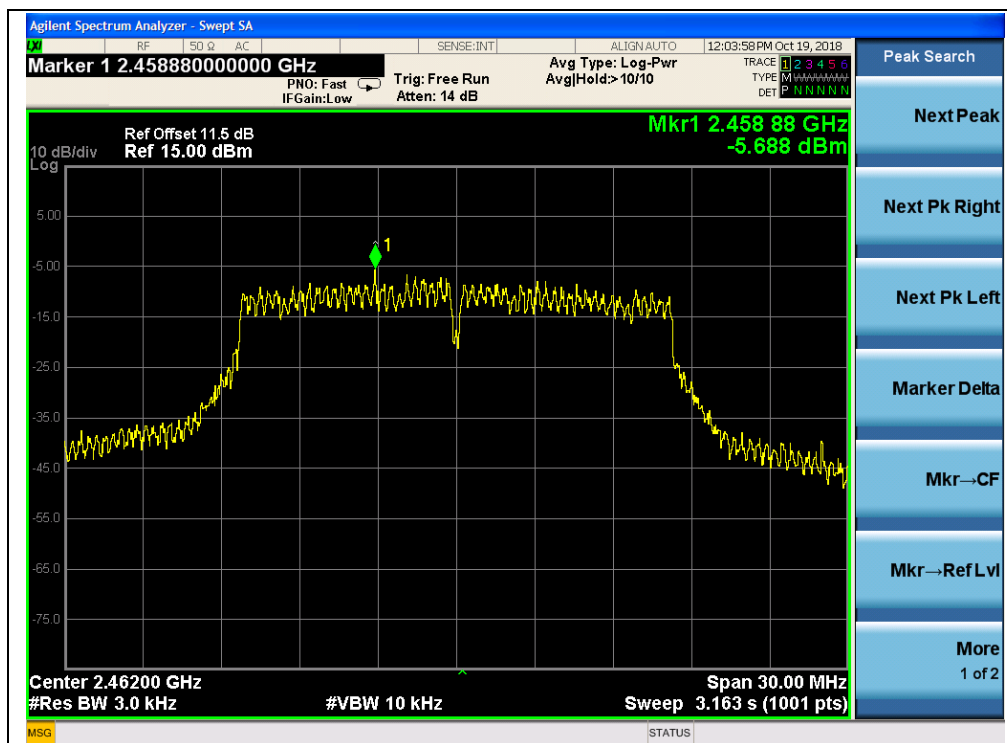

(Channel = 11, 802.11g)




2.6.3.3 802.11n(HT20) Test mode


A. Test Verdict:

Spectral power density (dBm/3kHz)				
Channel	Frequency (MHz)	Measured PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
1	2412	-6.66	8	PASS
6	2437	-6.48	8	PASS
11	2462	-5.61	8	PASS


B. Test Plots:

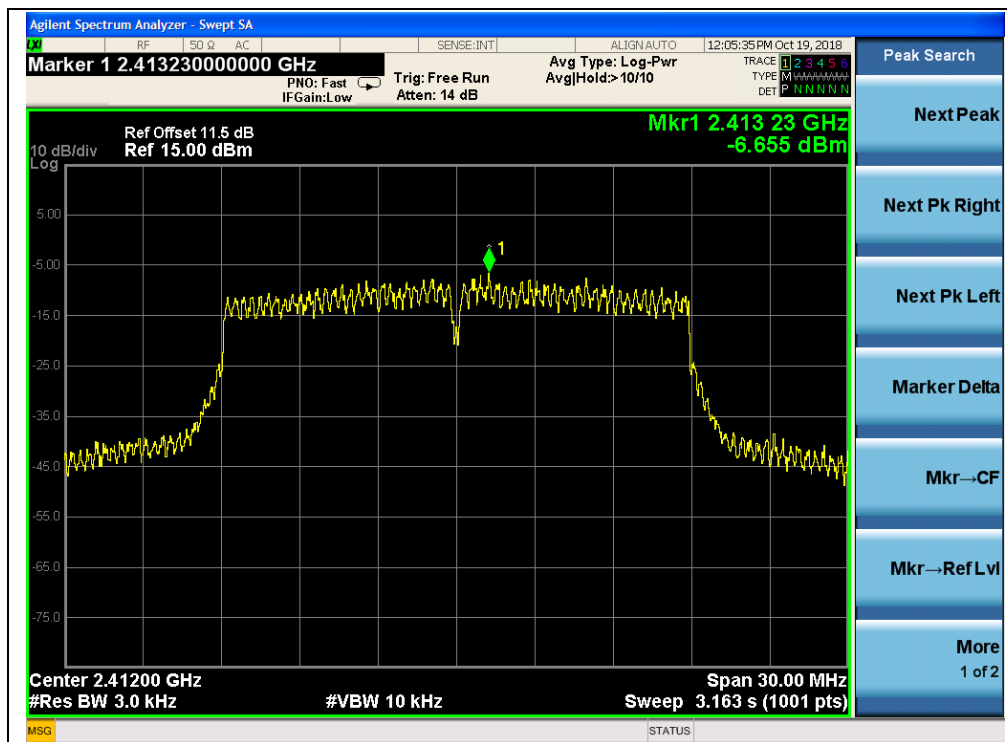

(Channel = 1, 802.11n(HT20))

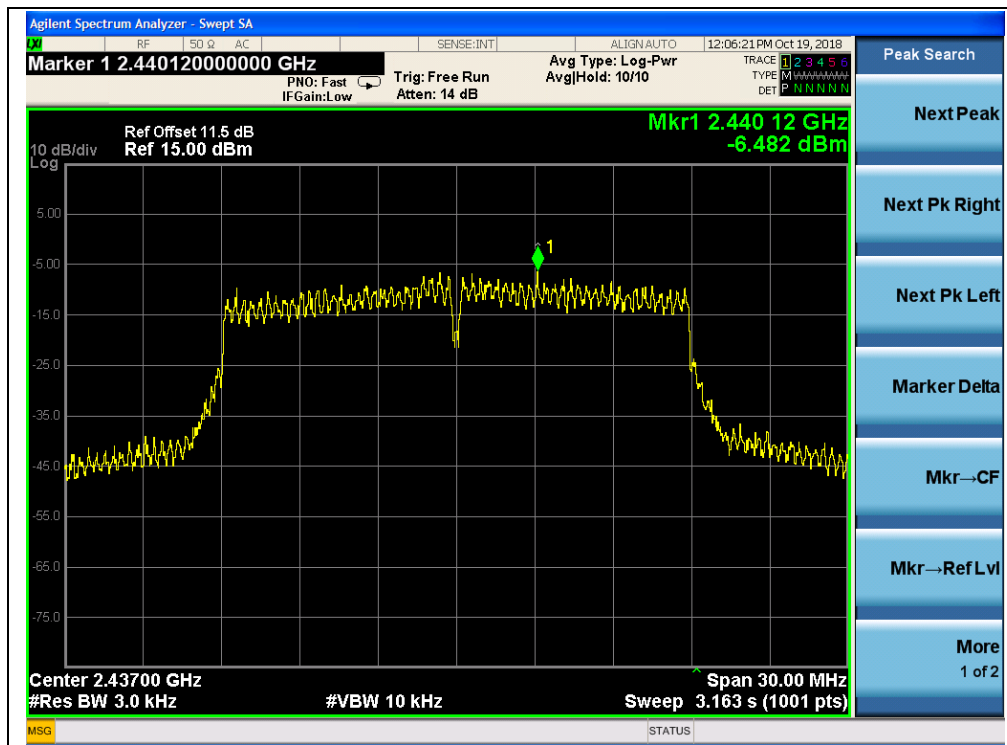

(Channel = 6, 802.11n(HT20))

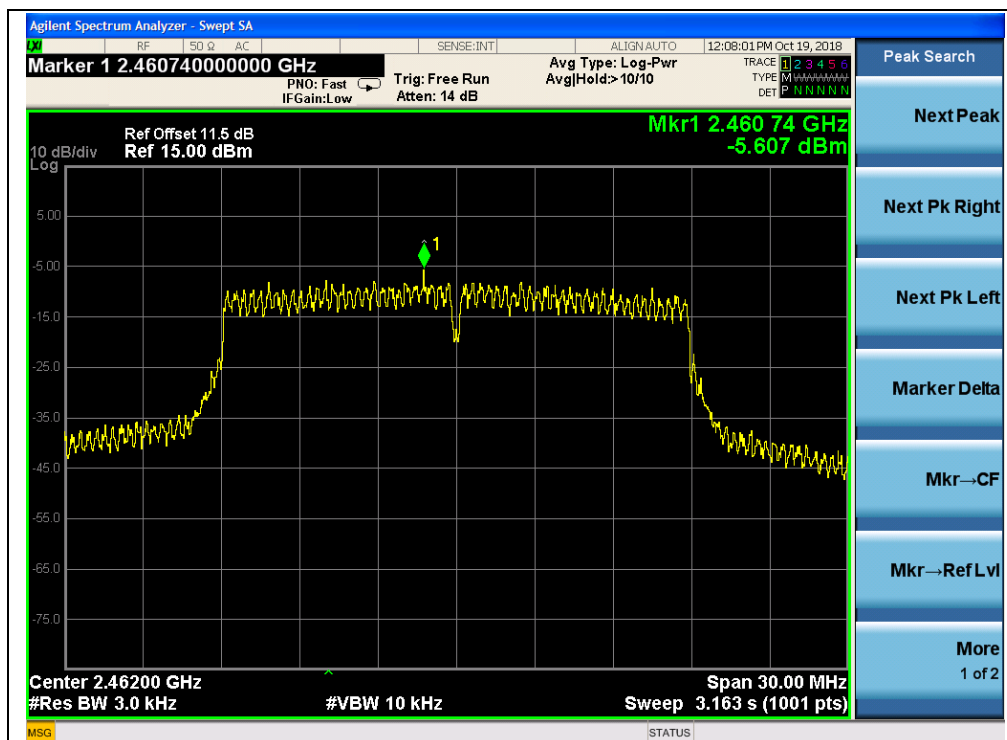


(Channel = 11, 802.11n(HT20))

2.6.3.4 802.11n(HT40) Test mode


A. Test Verdict:

Spectral power density (dBm/3kHz)				
Channel	Frequency (MHz)	Measured PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
3	2422	-11.02	8	PASS
6	2437	-10.05	8	PASS
9	2452	-9.77	8	PASS


B. Test Plots:

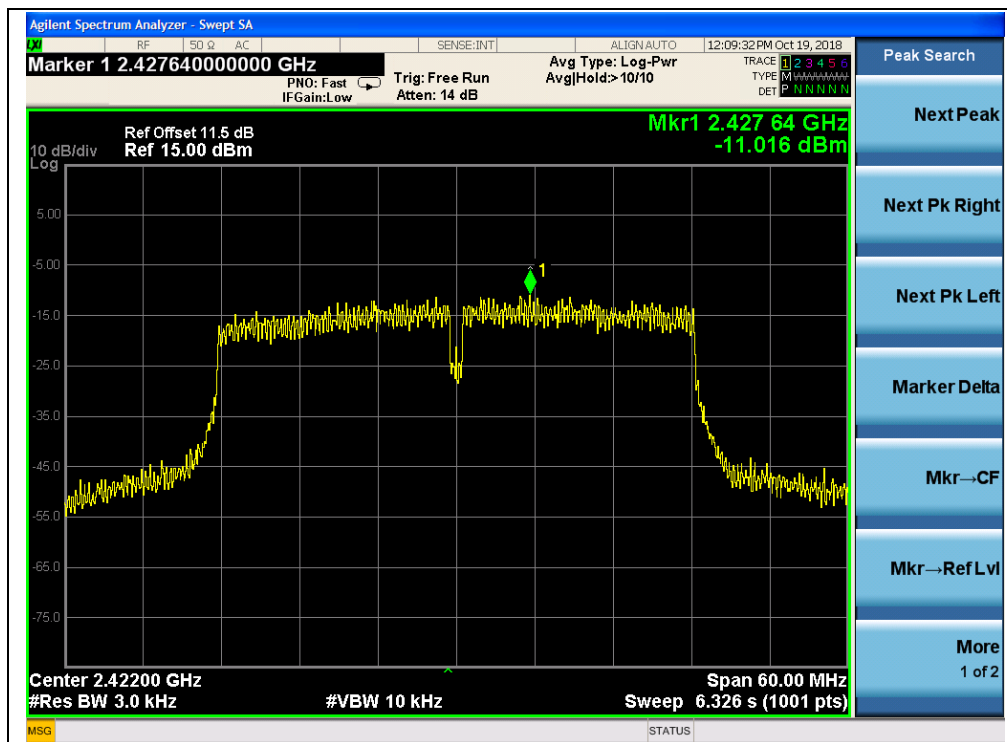

(Channel = 3, 802.11n(HT40))

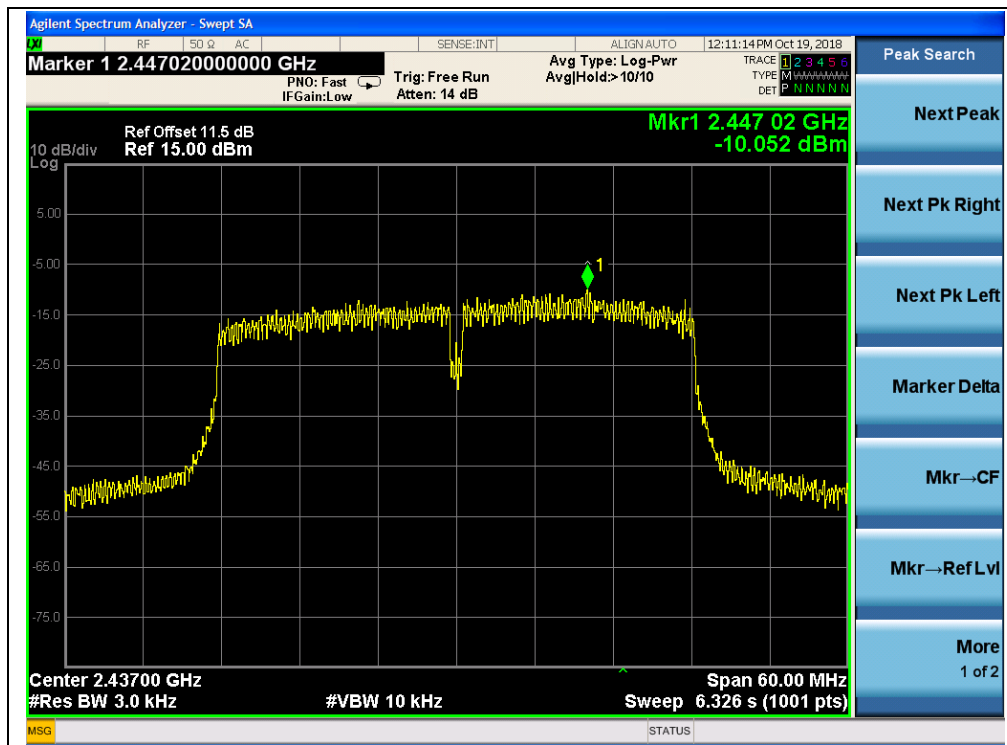

(Channel = 6, 802.11n(HT40))

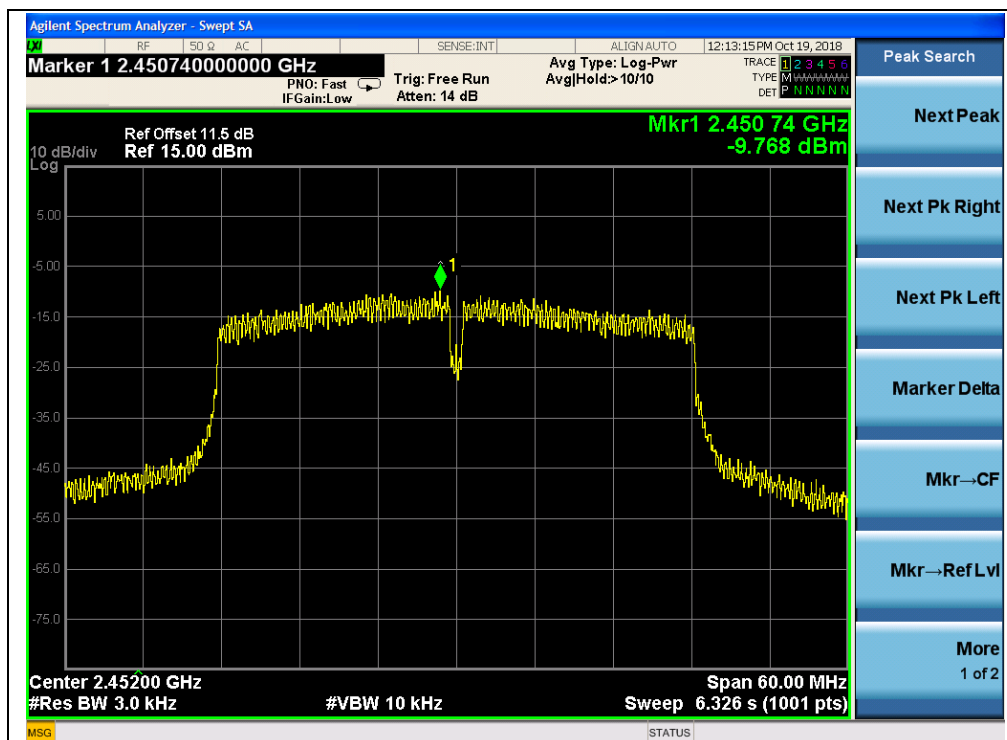

(Channel = 9, 802.11n(HT40))

2.7. Conducted Emission

2.7.1. Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).


Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

NOTE:

- The lower limit shall apply at the band edges.
- The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

2.7.2. Test Description

A. Test Setup:

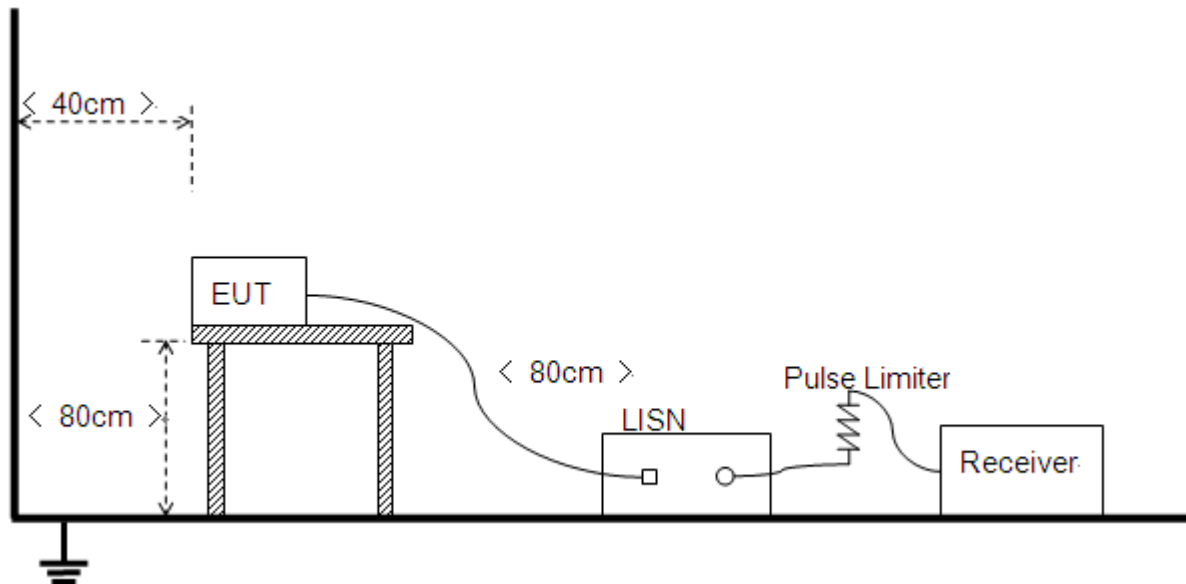

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.10 2013.



B. Equipments List:

Please refer ANNEX B(4).

2.7.3. Test Result

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.


Note: Both of the test voltage AC 120V/60Hz and AC 230V/50Hz were considered and tested respectively, only the results of the worst case AC 120V/60Hz were recorded in this report.

A. Test setup:

The EUT configuration of the emission tests is EUT + Link.


Note: The test voltage is AC 120V/60Hz.

B. Test Plots:

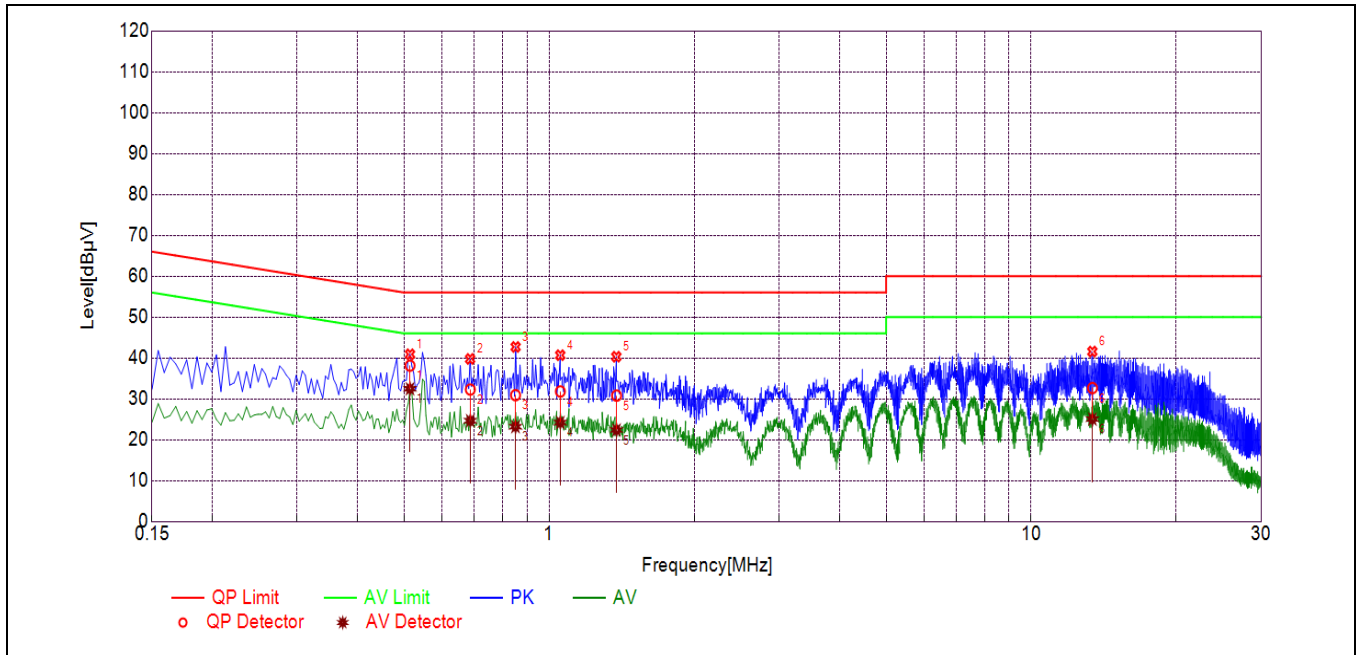

(L Phase)

NO.	Fre. (MHz)	Emission Level (dBμV)		Limit (dBμV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.5144	38.13	32.46	56.00	46.00	Line	PASS
2	0.6861	32.28	24.65	56.00	46.00		PASS
3	0.8514	30.90	23.19	56.00	46.00		PASS
4	1.0546	31.82	24.20	56.00	46.00		PASS
5	1.3796	30.78	22.38	56.00	46.00		PASS
6	13.3993	32.64	25.05	60.00	50.00		PASS

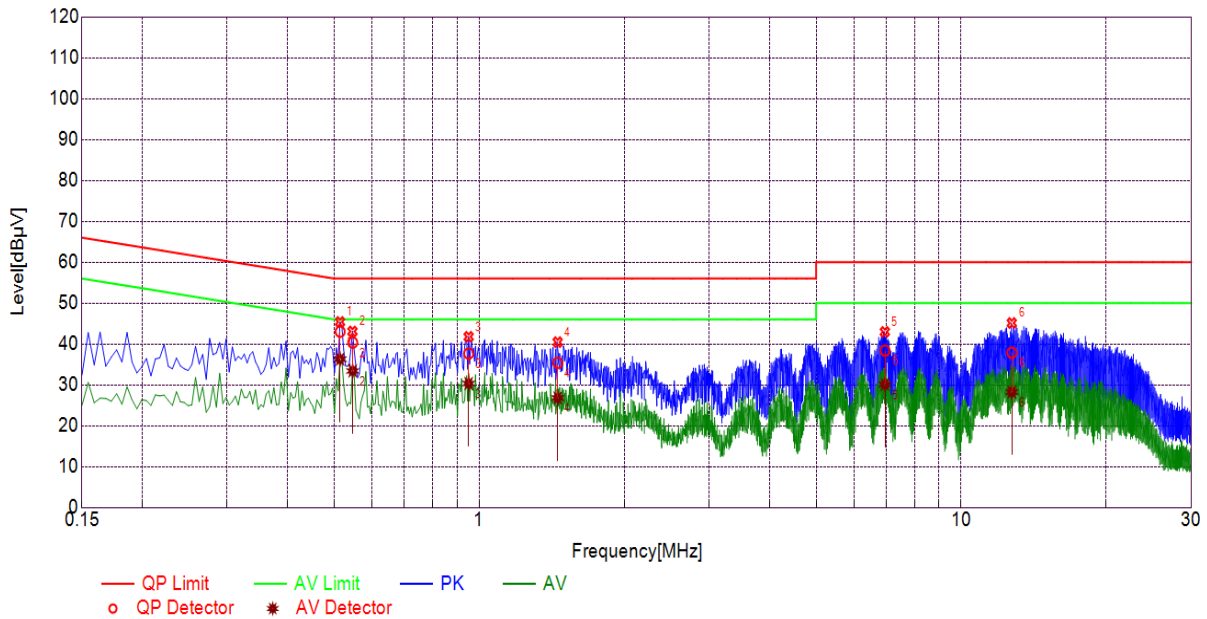

(N Phase)

NO.	Fre. (MHz)	Emission Level (dBμV)		Limit (dBμV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.5146	43.01	36.27	56.00	46.00	Neutral	PASS
2	0.5465	40.33	33.40	56.00	46.00		PASS
3	0.9509	37.66	30.33	56.00	46.00		PASS
4	1.4555	35.38	26.78	56.00	46.00		PASS
5	6.9487	38.39	30.09	60.00	50.00		PASS
6	12.7346	37.87	28.23	60.00	50.00		PASS


2.8. Restricted Frequency Bands

2.8.1. Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

2.8.2. Test Description

A. Test Setup

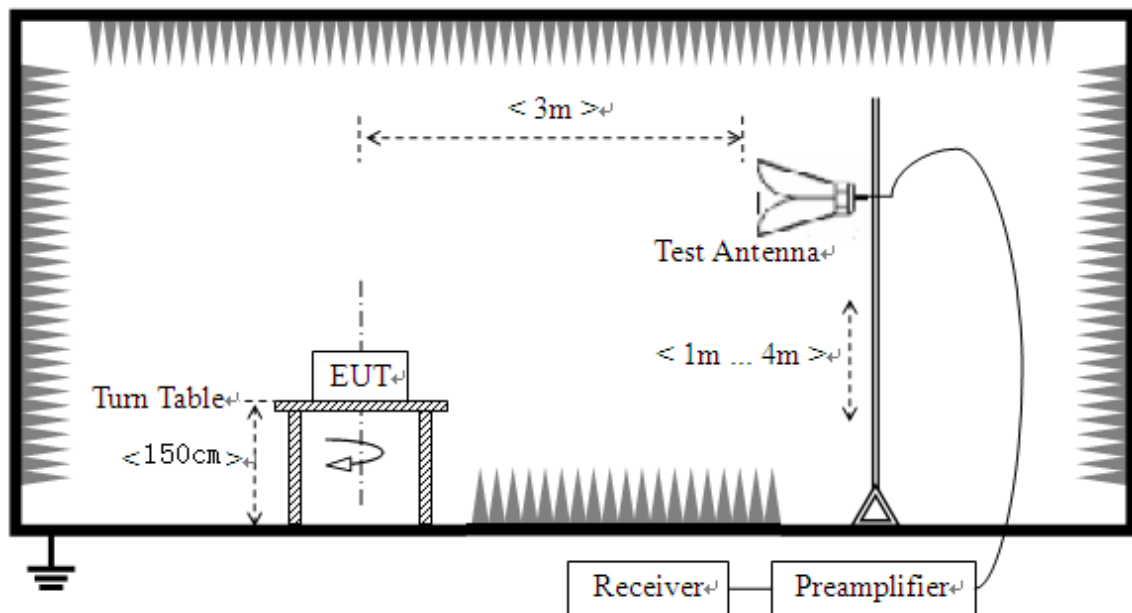

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.

KDB 558074 Section 12.1 was used in order to prove compliance.

**B. Equipments List:**

Please refer ANNEX B(4).

2.8.3. Test Result

The lowest and highest channels are tested to verify Restricted Frequency Bands.

The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V/m]} = U_R + A_T + A_{\text{Factor}} \text{ [dB]}; A_T = L_{\text{Cable loss}} \text{ [dB]} - G_{\text{preamp}} \text{ [dB]}$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading

G_{preamp} : Preamplifier Gain

A_{Factor} : Antenna Factor at 3m


Note: Restricted Frequency Bands were performed when antenna was at vertical and horizontal polarity, and only the worse test condition (vertical) was recorded in this test report.

2.7.3.1 802.11b Test mode**A. Test Verdict:**


Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dBuV)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dB μ V/m)	Limit (dB μ V/m)	Verdict
		PK/ AV						
1	2388.11	PK	49.71	-30.3	22.20	41.61	74	PASS
1	2390.00	AV	38.23	-30.3	22.20	30.13	54	PASS
11	2484.03	PK	48.52	-30.3	22.20	40.42	74	PASS
11	2483.95	AV	36.44	-30.3	22.20	28.34	54	PASS




B. Test Plots:

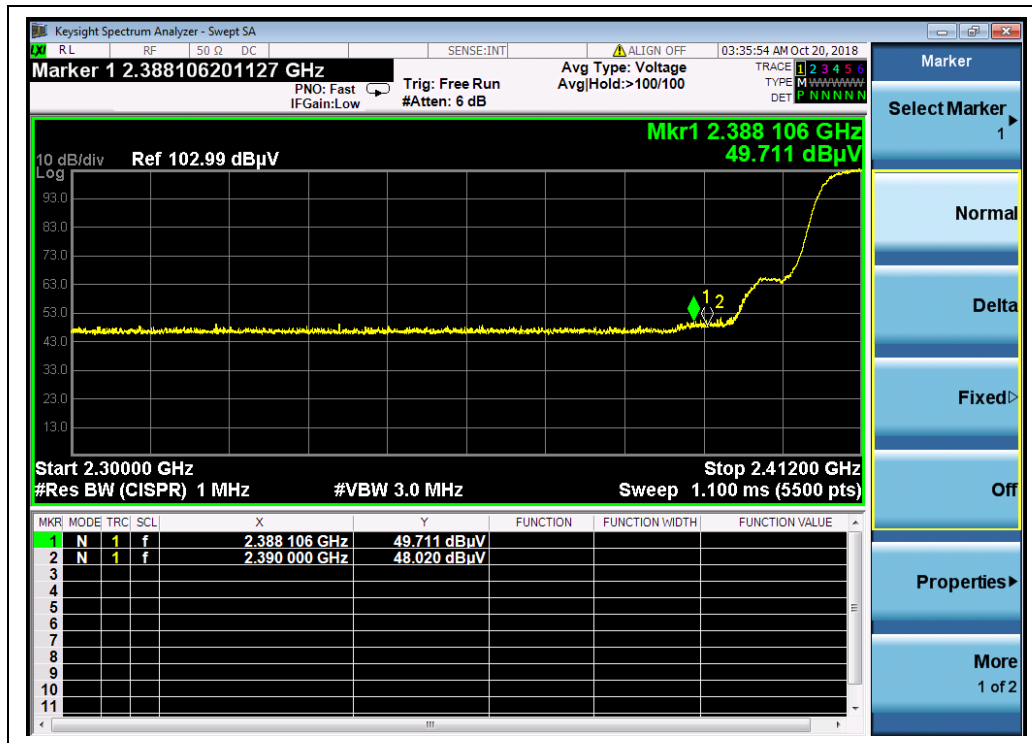


(Channel = 1 PEAK, 802.11b)

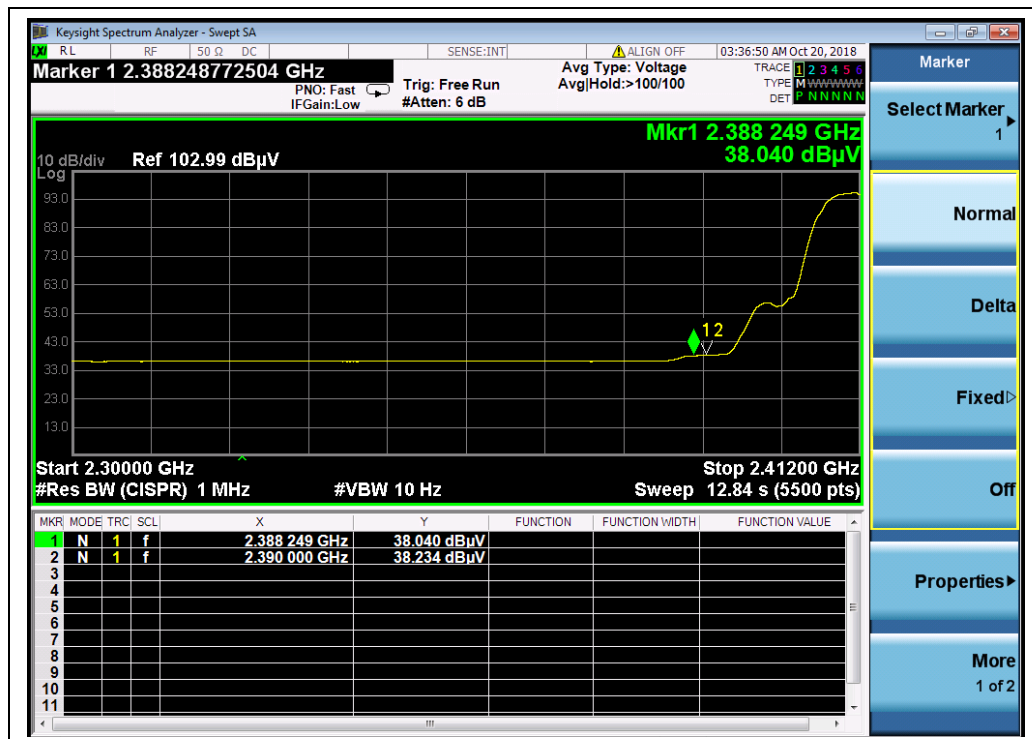

(Channel = 1 AVG, 802.11b)

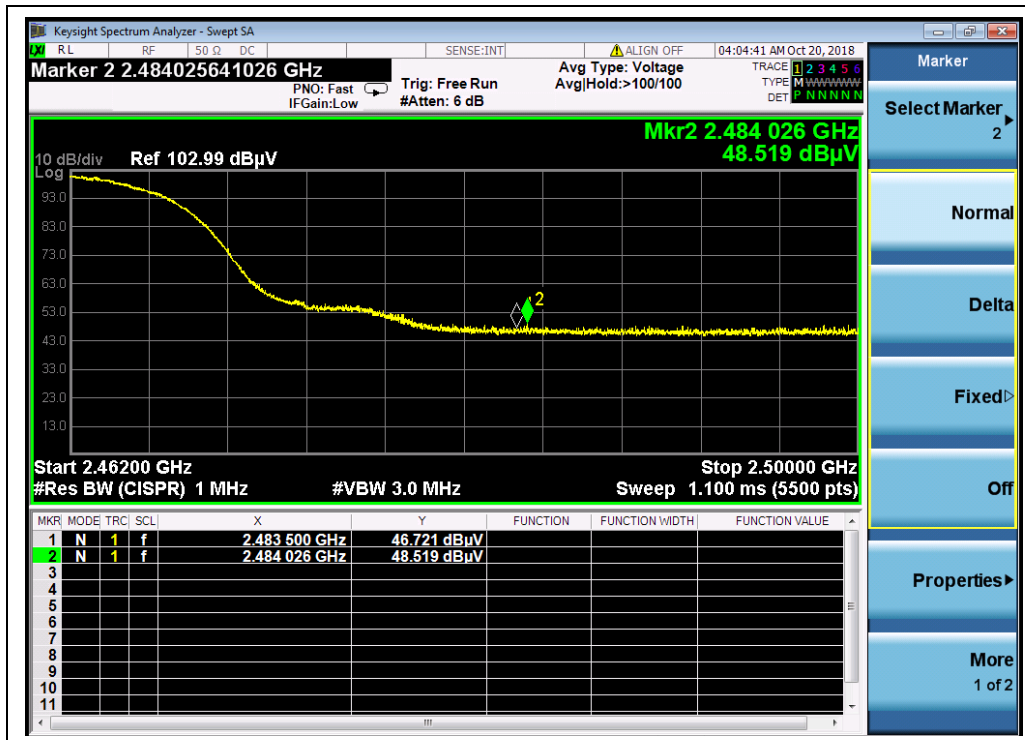

(Channel = 11 PEAK, 802.11b)

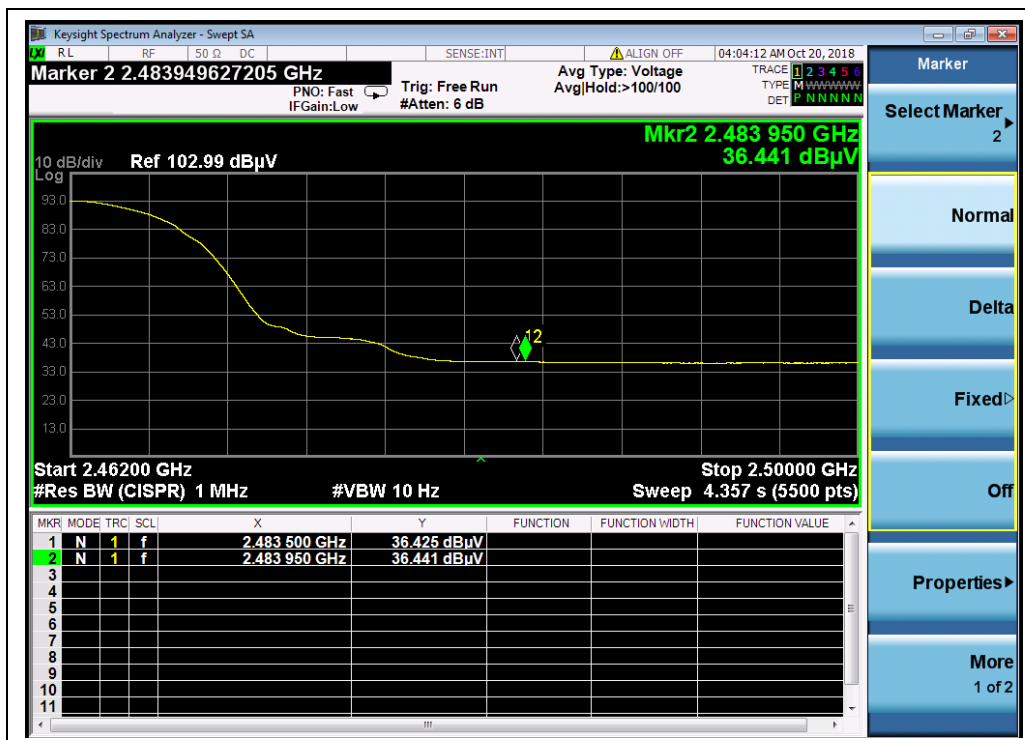

(Channel = 11 AVG, 802.11b)




2.7.3.2 802.11g Test mode


A. Test Verdict:

Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dBuV)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dBuV/m)	Limit (dBuV/m)	Verdict
		PK/ AV						
1	2390.00	PK	55.37	-30.3	22.20	47.27	74	PASS
1	2390.00	AV	40.57	-30.3	22.20	32.47	54	PASS
11	2484.12	PK	62.01	-30.3	22.20	53.91	74	PASS
11	2483.50	AV	44.79	-30.3	22.20	36.69	54	PASS


B. Test Plots:

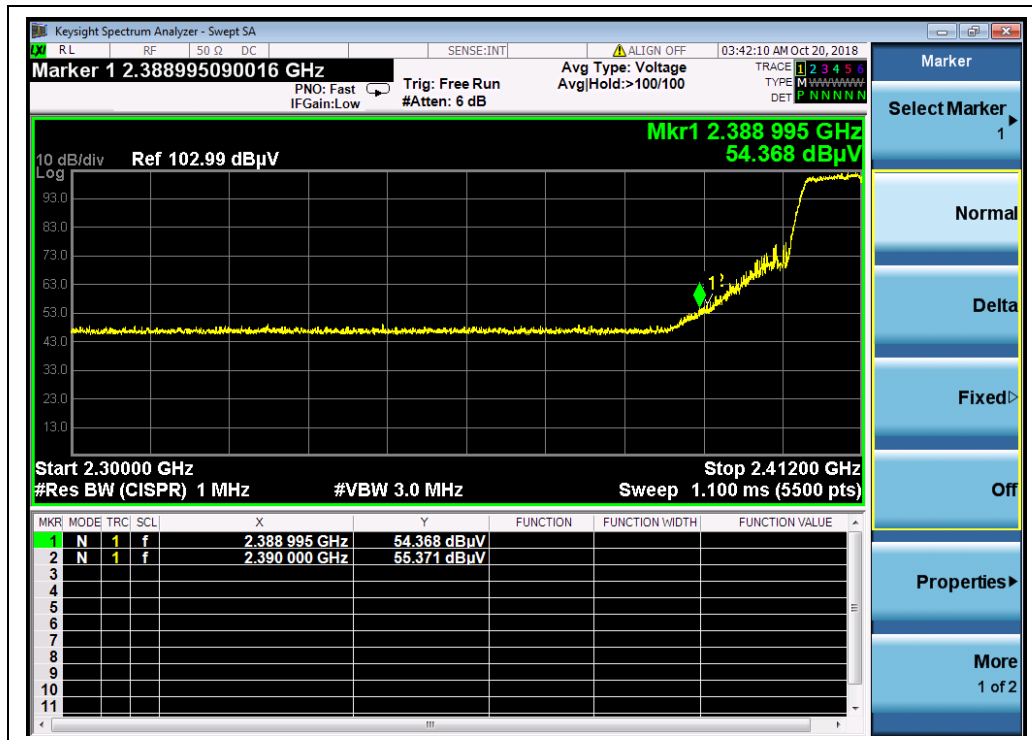


(Channel = 1 PEAK, 802.11g)

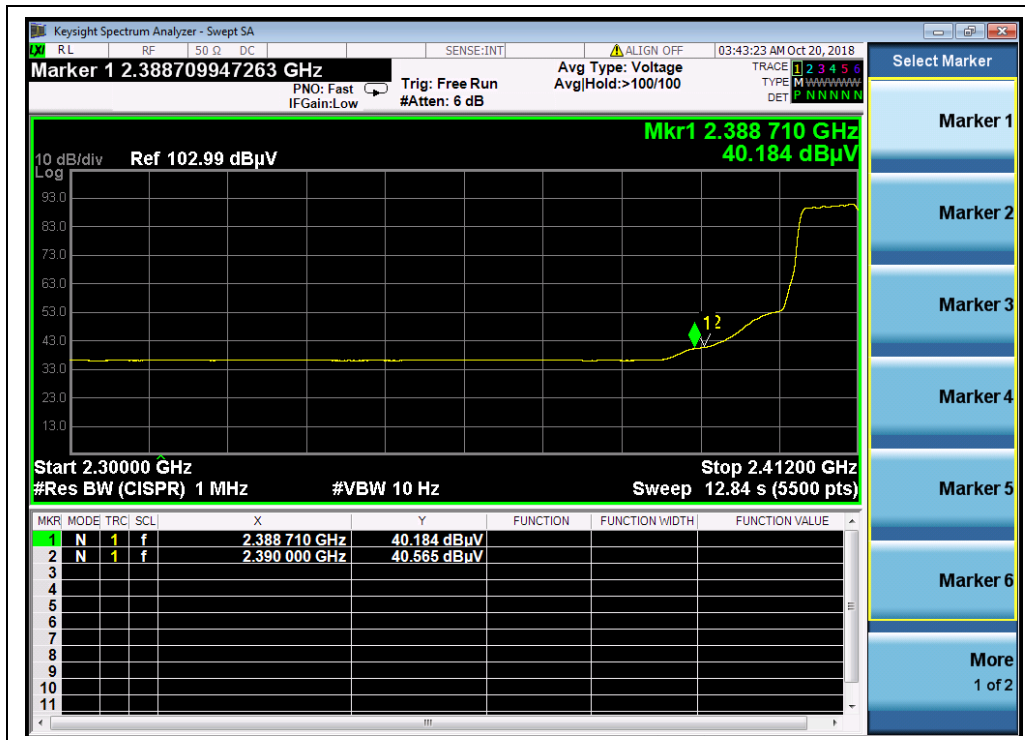

(Channel = 1 AVG, 802.11g)

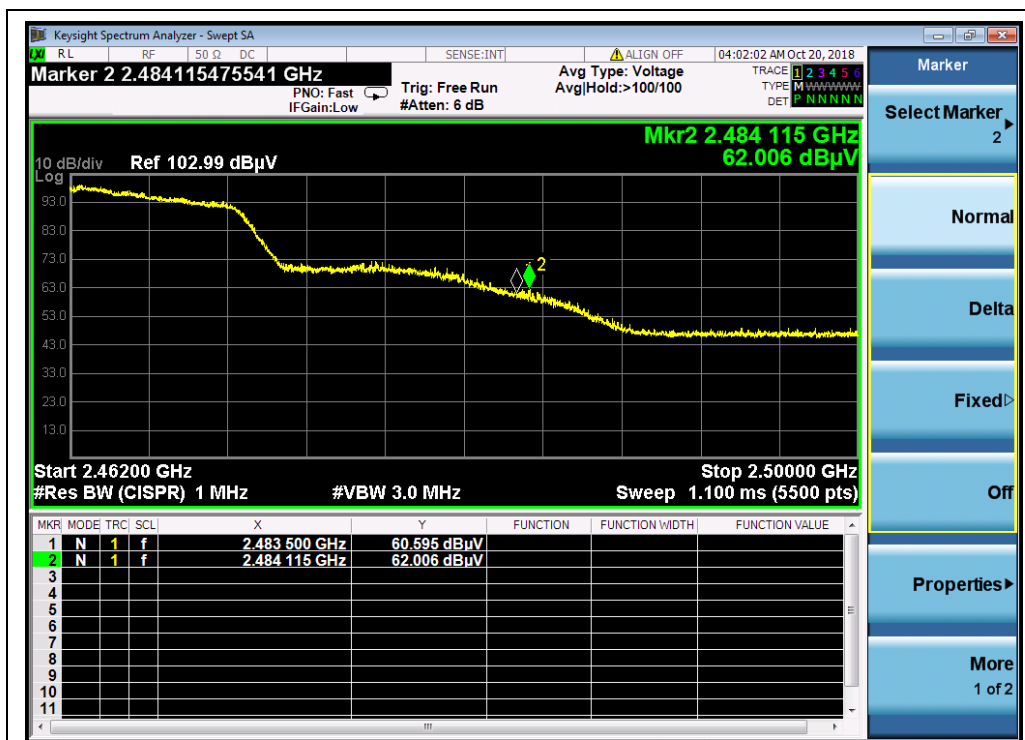

(Channel = 11 PEAK, 802.11g)

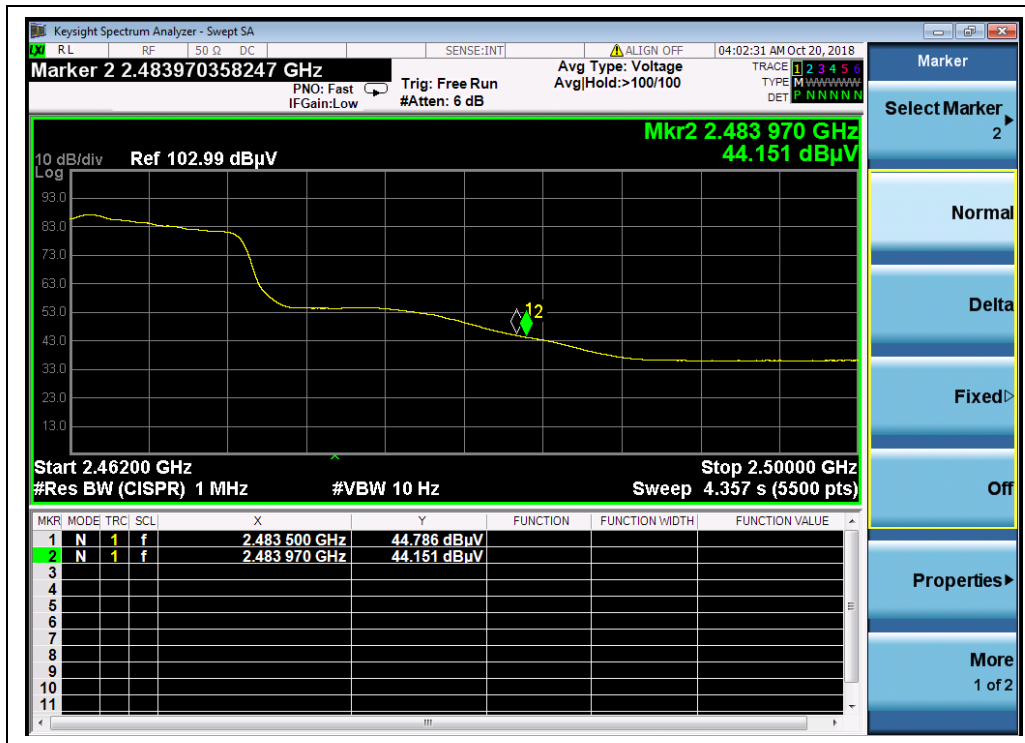

(Channel = 11 AVG, 802.11g)


2.7.3.3 802.11n(HT20) Test mode

A. Test Verdict:


Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dBμV)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dBμV/m)	Limit (dBμV/m)	Verdict
		PK/ AV						
1	2390.00	PK	56.46	-30.3	22.20	48.36	74	PASS
1	2390.00	AV	40.69	-30.3	22.20	32.59	54	PASS
11	2483.87	PK	63.92	-30.3	22.20	55.82	74	PASS
11	2483.50	AV	44.98	-30.3	22.20	36.88	54	PASS




B. Test Plots:

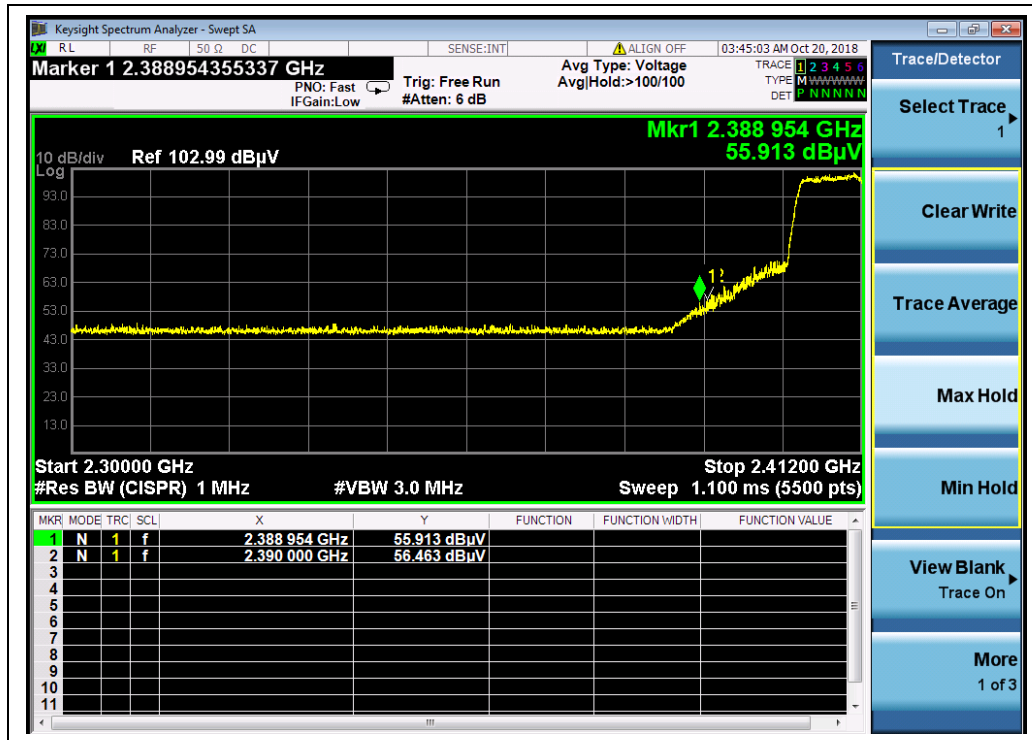


(Channel = 1 PEAK, 802.11n(HT20))

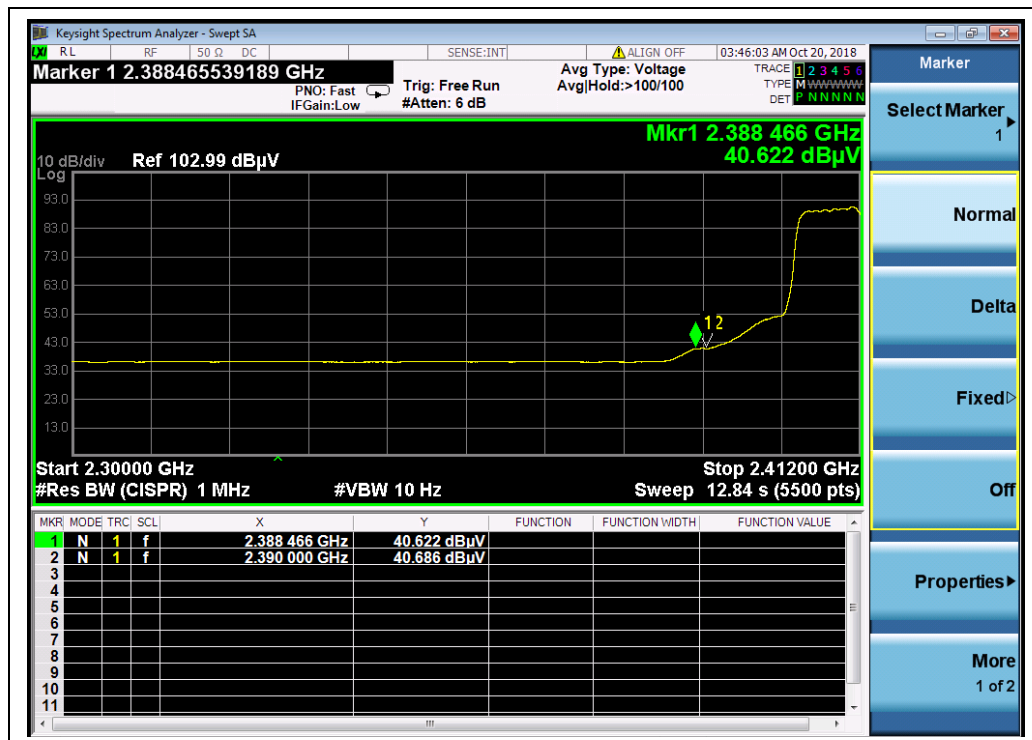

(Channel = 1 AVG, 802.11n(HT20))

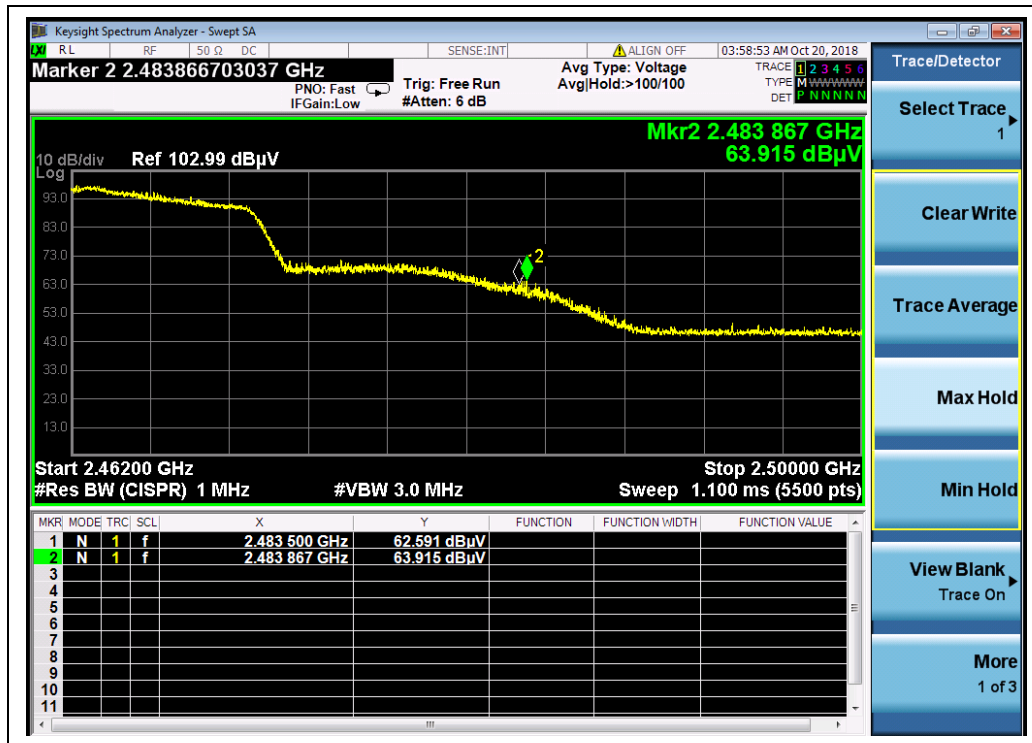

(Channel = 11 PEAK, 802.11n(HT20))

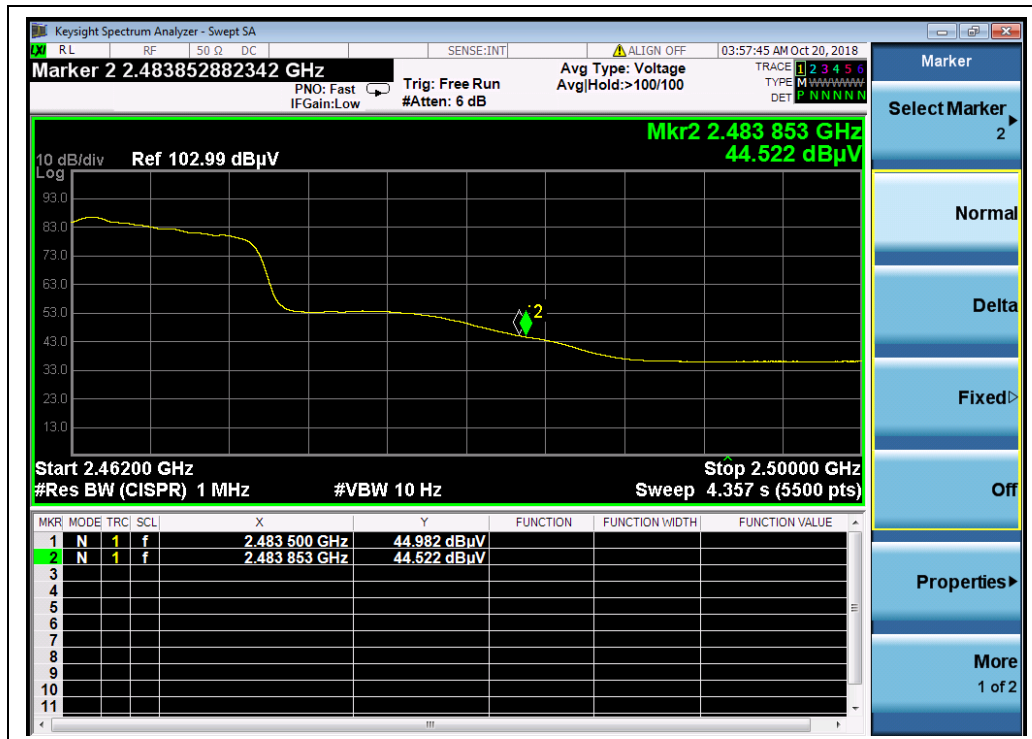

(Channel = 11 AVG, 802.11n(HT20))




2.7.3.4 802.11n(HT40) Test mode


A. Test Verdict:

Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dBuV)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dBuV/m)	Limit (dBuV/m)	Verdict
		PK/ AV						
3	2389.28	PK	59.81	-30.3	22.20	51.71	74	PASS
3	2390.00	AV	40.66	-30.3	22.20	32.56	54	PASS
9	2484.25	PK	54.83	-30.3	22.20	46.73	74	PASS
9	2483.50	AV	41.79	-30.3	22.20	33.69	54	PASS


B. Test Plots:

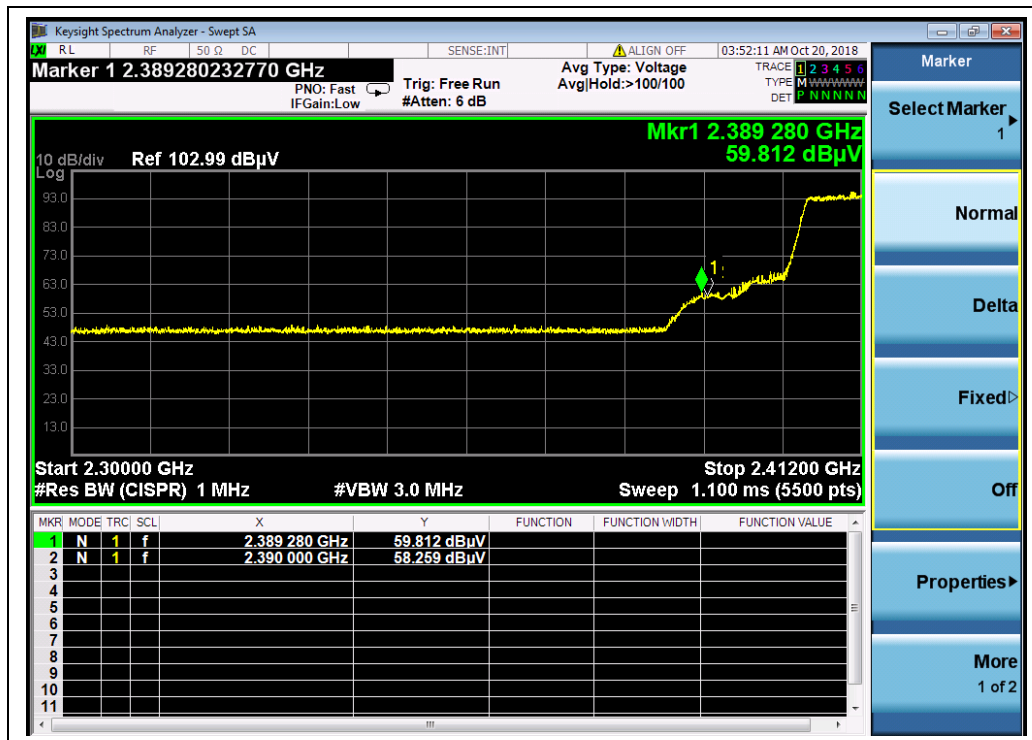


(Channel = 3 PEAK, 802.11n(HT40))

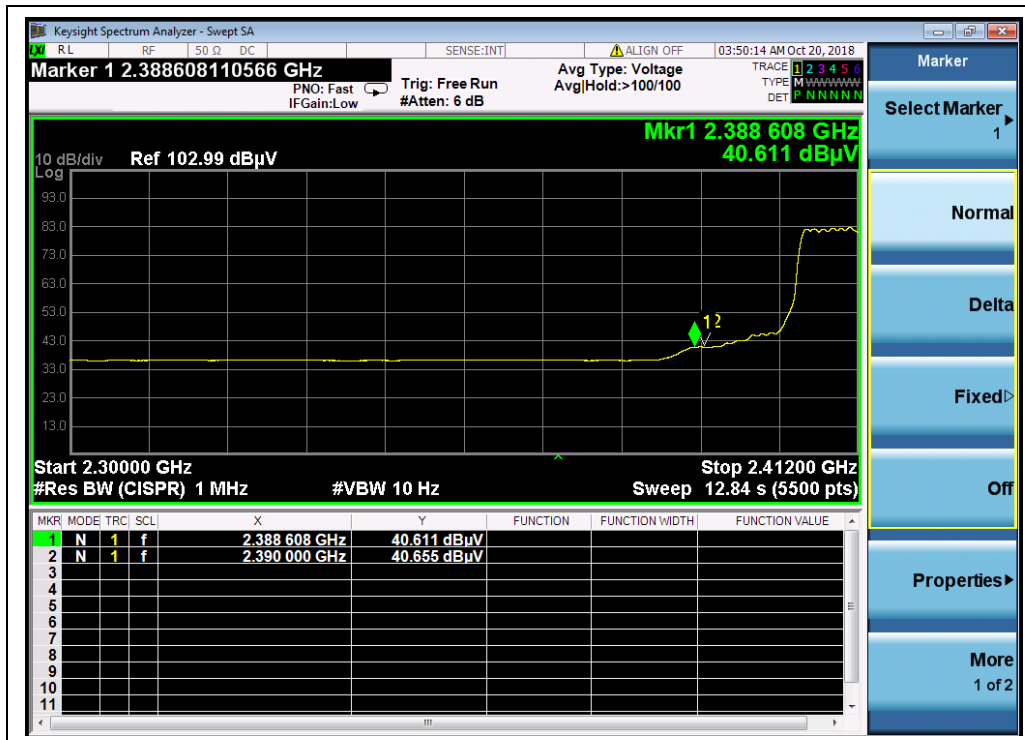

(Channel = 3 AVG, 802.11n(HT40))

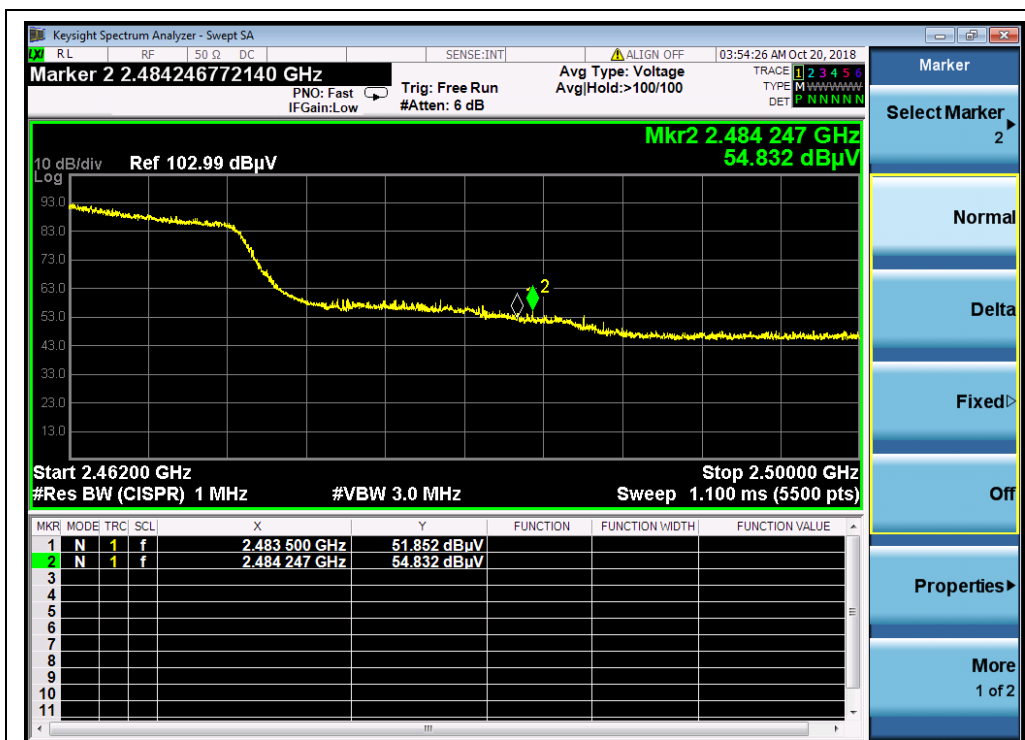

(Channel = 9 PEAK, 802.11n(HT40))

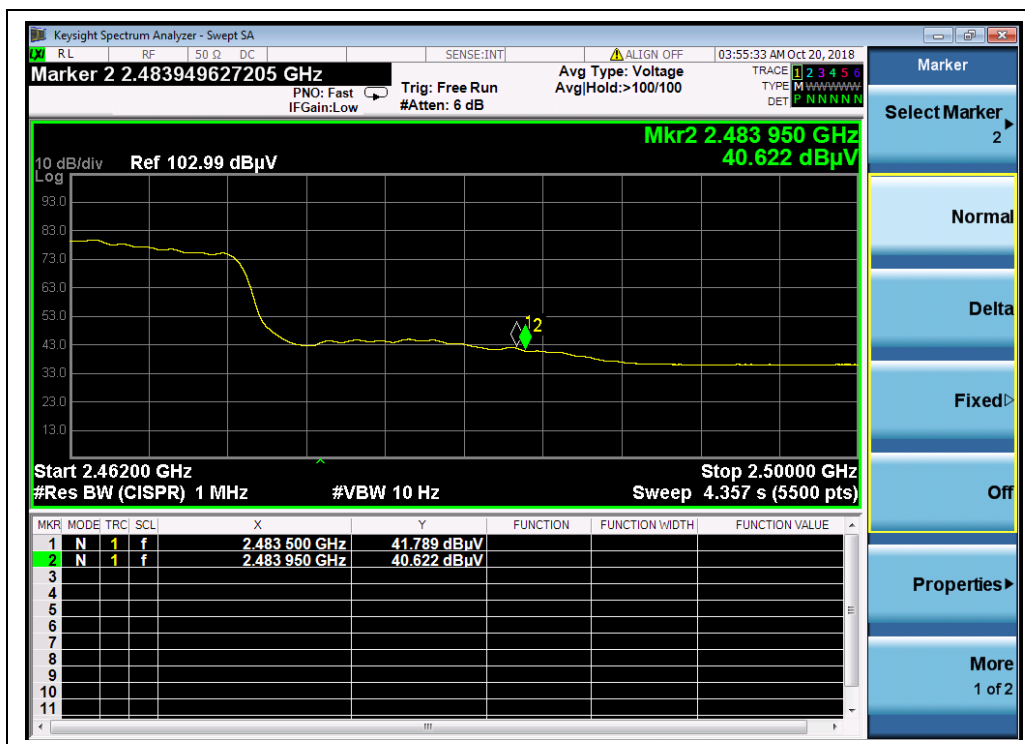

(Channel = 9 AVG, 802.11n(HT40))



2.9. Radiated Emission

2.9.1. Requirement

According to FCC section 15.247(d), radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note:

For Above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.


For above 1000MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK)

In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table)


2.9.2. Test Description

A. Test Setup:


- 1) For radiated emissions from 9kHz to 30MHz

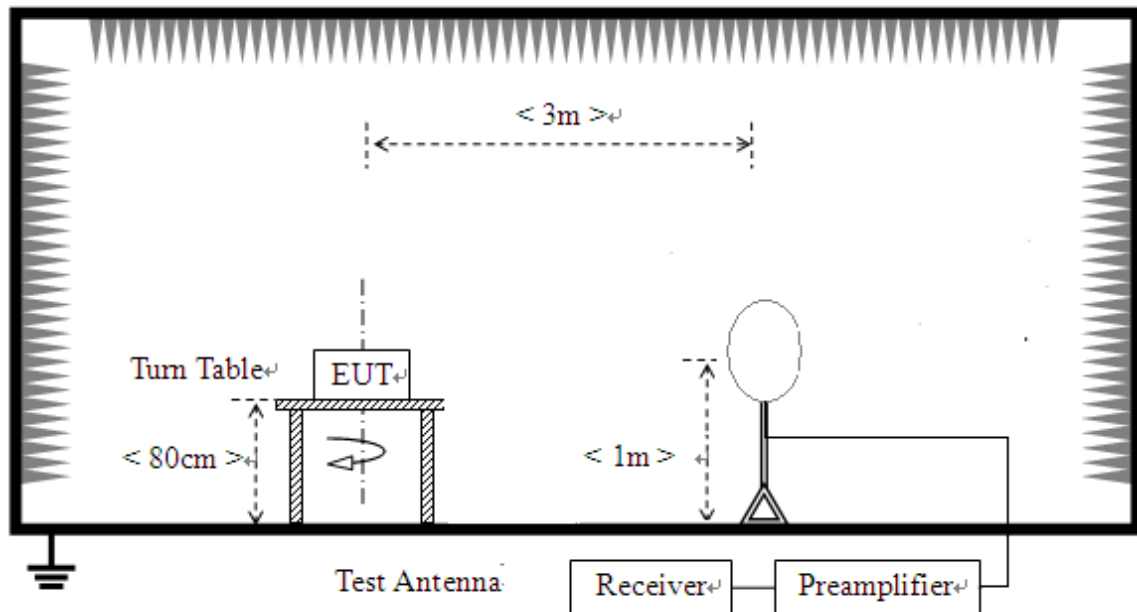

- 2) For radiated emissions from 30MHz to 1GHz

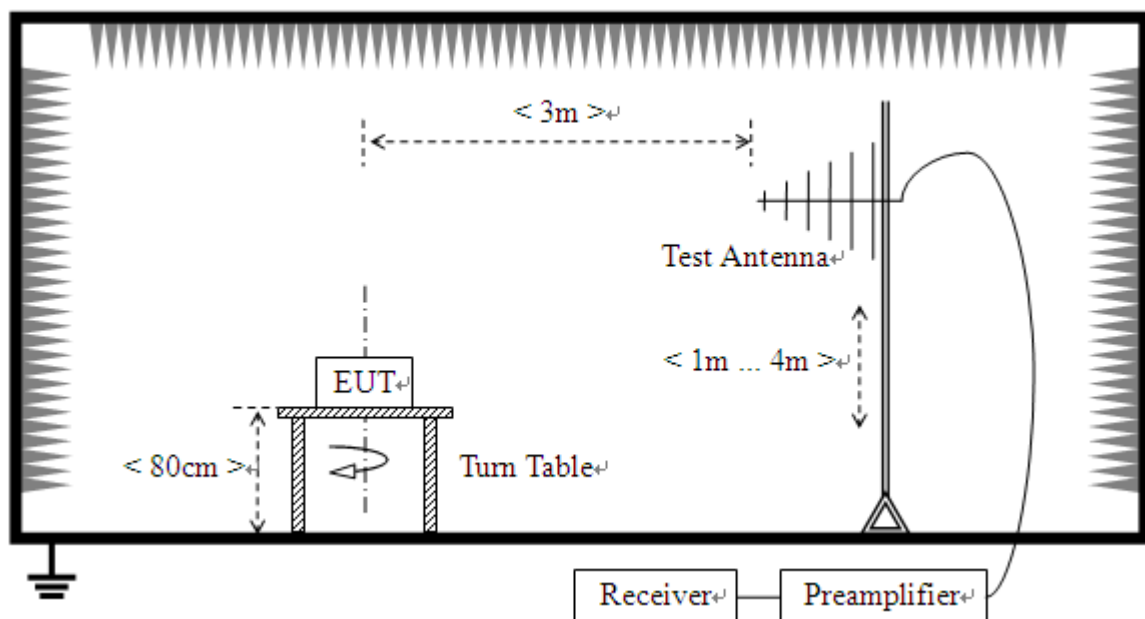

3) For radiated emissions above 1GHz

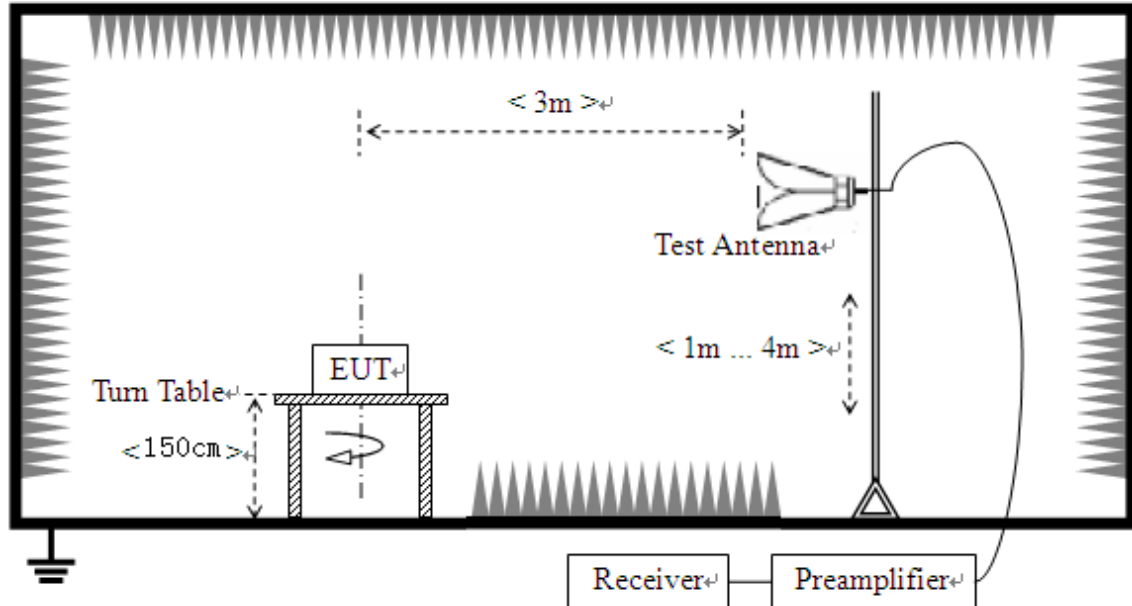

The RF absorbing material used on the reference ground plane and on the turntable have a maximum height (thickness) of 30 cm (12 in) and have a minimum-rated attenuation of 20 dB at all frequencies from 1 GHz to 18 GHz. Test site have a minimum area of the ground plane covered with RF absorbing material as specified in Figure 6 of ANSI C63.4: 2014.

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4dB according to the standards: ANSI C63.10 (2013). For radiated emissions below or equal to 1GHz, The EUT was set-up on insulator 80cm above the Ground Plane, For radiated emissions above 1GHz, The EUT was set-up on insulator 150cm above the Ground Plane. The set-up and test methods were according to ANSI C63.10

For the radiated emission test above 1GHz:

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane. The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading



For the Test Antenna:

(a) In the frequency range of 9kHz to 30MHz, magnetic field is measured with Loop Test Antenna. The Test Antenna is positioned with its plane vertical at 1m distance from the EUT. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.

(b) In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Place the test antenna at 3m away from area of the EUT, while keeping the test antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The test antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final test antenna elevation shall be that which maximizes the emissions. The test antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane. The emission levels at both horizontal and vertical polarizations should be tested.

A. Equipments List:

Please refer ANNEX B(4).

2.9.3. Test Result

According to ANSI C63.10, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak limit, it is unnecessary to perform an quasi-peak measurement.

The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V/m]} = U_R + A_T + A_{\text{Factor}} \text{ [dB]}; A_T = L_{\text{Cable loss}} \text{ [dB]} - G_{\text{preamp}} \text{ [dB]}$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading

G_{preamp} : Preamplifier Gain

A_{Factor} : Antenna Factor at 3m

During the test, the total correction Factor A_T and A_{Factor} were built in test software.


Note1: All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Note2: For the frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.

Note3: For the frequency, which started from 25GHz to 40GHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.


2.9.3.1 802.11b Test mode

Plots for Channel = 1

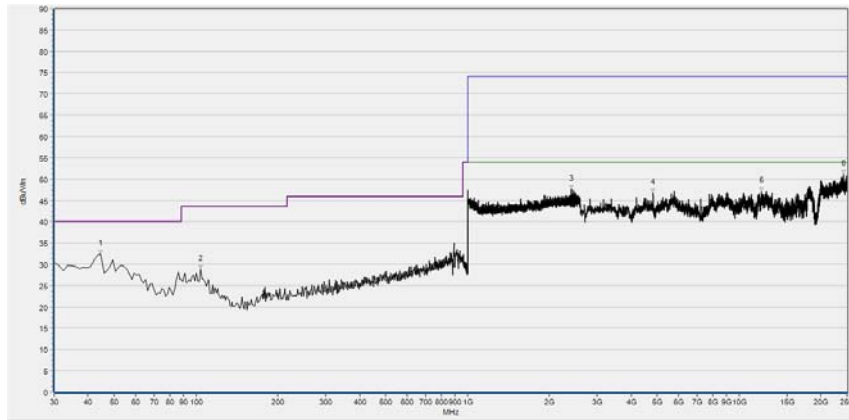


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
44.568	32.31	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
104.055	28.83	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
2406.002	47.52	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4824.113	46.75	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12115.621	47.12	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
24274.923	51.14	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 25GHz)

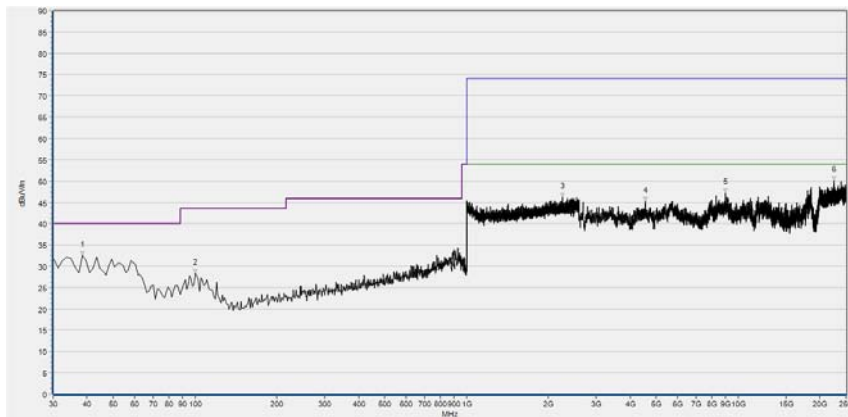


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
38.498	32.56	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
100.413	28.37	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
2254.262	46.27	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4543.044	45.31	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
8970.904	47.24	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
22519.258	50.12	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 25GHz)

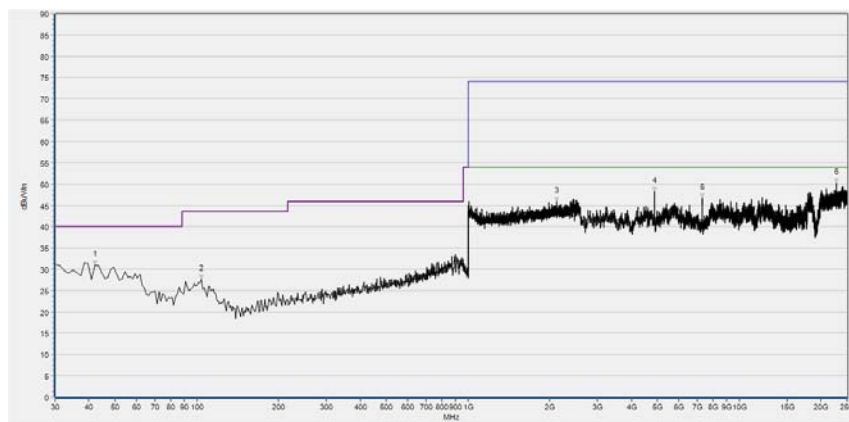Plot for Channel = 6


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
42.140	30.99	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
104.055	27.66	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
2123.009	45.93	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4868.922	48.28	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
7313.002	46.79	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
22779.960	50.30	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 25GHz)

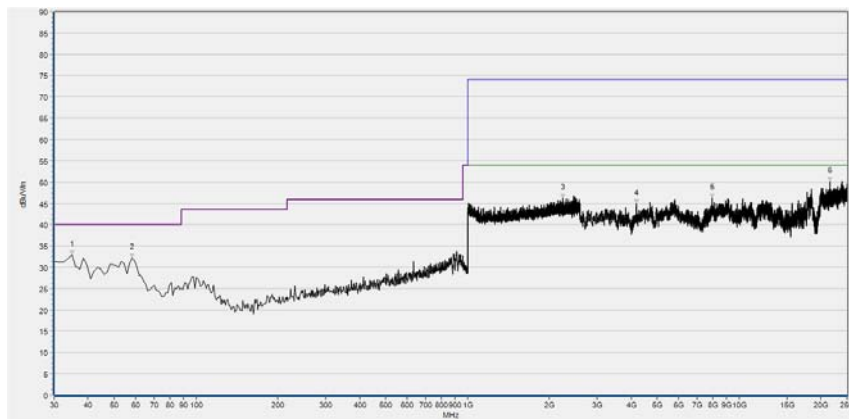


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
34.856	32.87	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
57.922	32.18	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
2245.298	46.21	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4184.579	44.87	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
7964.757	46.22	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
21553.846	50.08	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 25GHz)

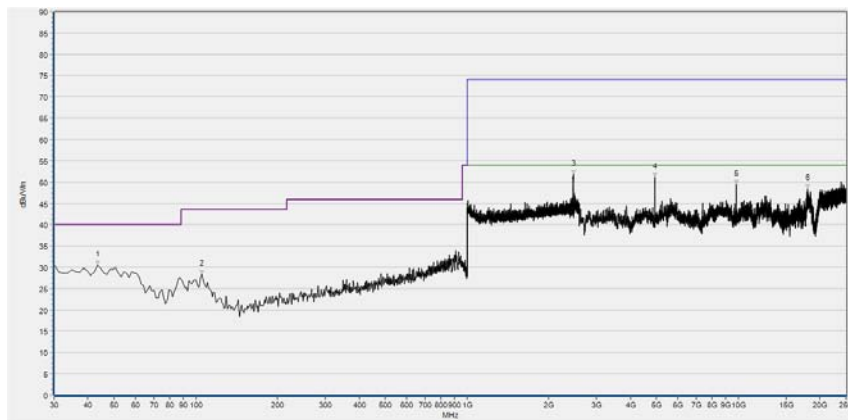Plot for Channel = 11

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
43.354	30.54	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
105.269	28.36	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
2462.985	51.80	N/A	N/A	74.00	N/A	54.00	Horizontal	N/A
4921.877	51.14	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
9846.699	49.49	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
18009.929	48.37	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 25GHz)

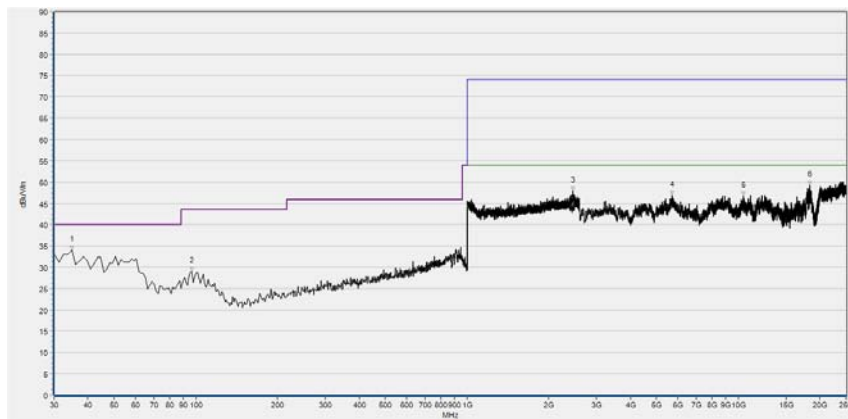


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
34.856	33.96	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
96.771	29.08	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
2453.381	47.96	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5703.983	46.91	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
10416.985	46.72	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
18388.762	49.29	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 25GHz)


**2.9.3.2 802.11g Test mode**

Plots for Channel = 1

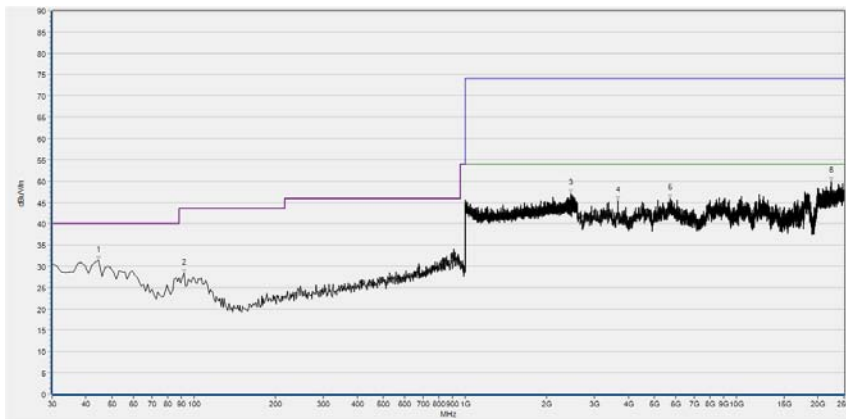

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
44.568	31.38	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
91.915	28.33	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
2454.662	47.13	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
3667.249	45.50	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5695.836	45.94	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
22392.981	50.00	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 25GHz)

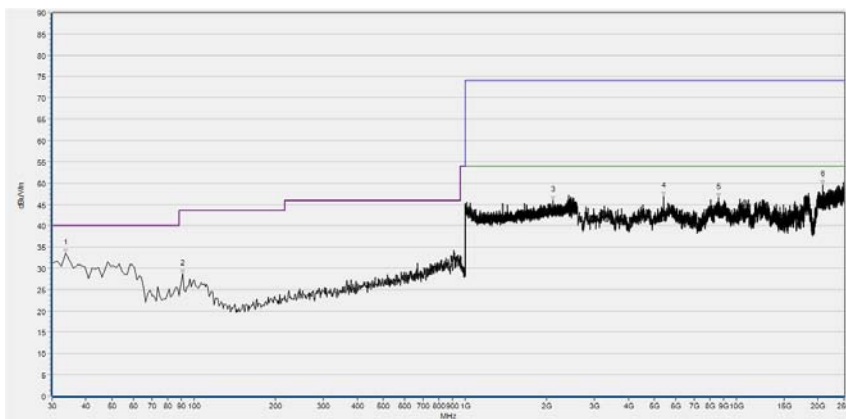

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
33.642	33.50	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
90.701	28.60	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
2107.643	45.85	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5394.399	46.91	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
8583.924	46.64	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
20816.548	49.63	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 30MHz to 25GHz)

Plot for Channel = 6

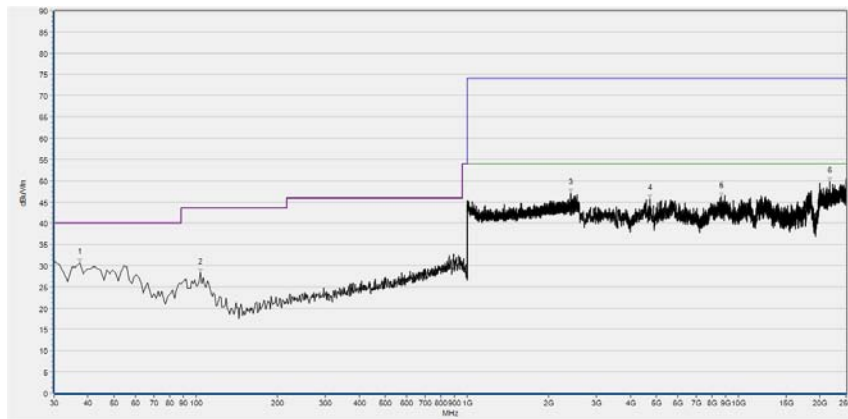

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
37.284	30.70	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
104.055	28.36	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
2409.844	47.05	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4722.277	45.70	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8669.467	46.33	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
21761.593	49.73	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 25GHz)

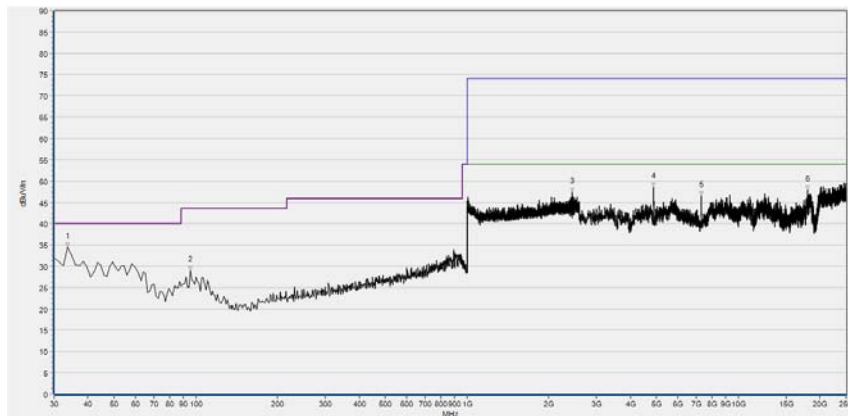

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
33.642	34.47	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
95.557	28.99	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
2445.058	47.45	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4864.848	48.58	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
7308.929	46.59	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
18014.003	47.94	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 30MHz to 25GHz)

Plot for Channel = 11

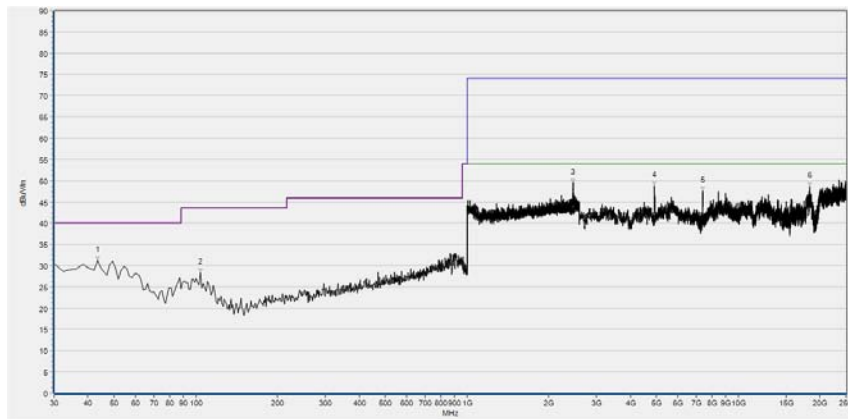


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
43.354	31.10	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
104.055	28.24	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
2462.345	49.47	N/A	N/A	74.00	N/A	54.00	Horizontal	N/A
4913.730	48.73	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
7378.178	47.53	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
18392.835	48.60	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 25GHz)

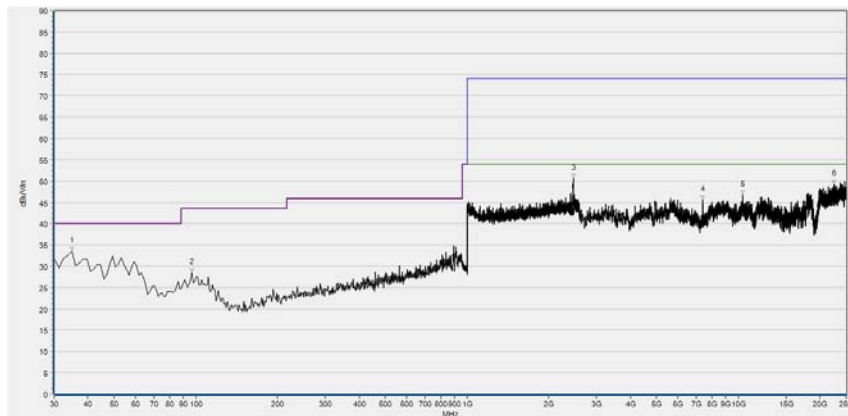


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
34.856	33.45	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
96.771	28.53	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
2463.625	50.56	N/A	N/A	74.00	N/A	54.00	Vertical	N/A
7394.472	45.59	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
10388.471	46.69	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
22527.405	49.35	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 25GHz)

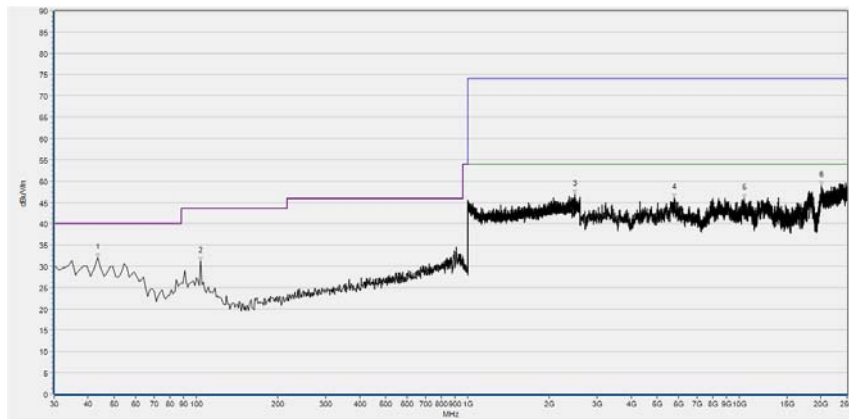**2.9.3.3 802.11n(HT20) Test mode****Plots for Channel = 1**

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
43.354	31.96	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
104.055	31.18	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
2487.955	46.86	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5752.864	46.12	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
10441.426	45.93	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
20103.692	48.87	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 25GHz)

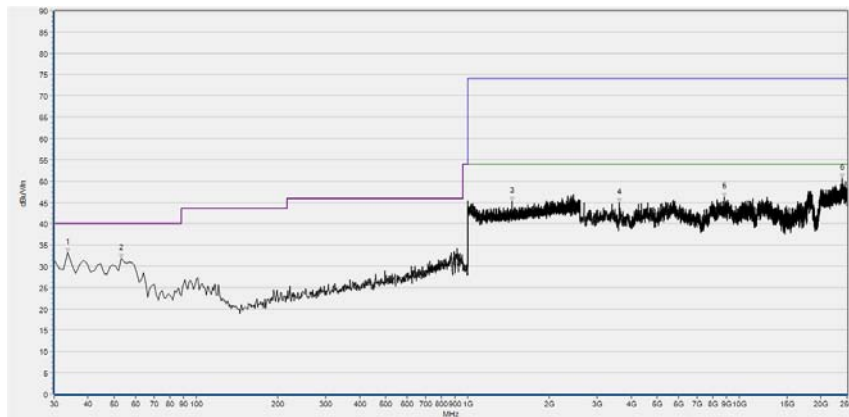

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
33.642	33.21	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
53.066	31.78	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
1455.862	45.21	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
3618.367	44.86	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
8795.745	46.20	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
23896.090	50.62	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 30MHz to 25GHz)

Plot for Channel = 6

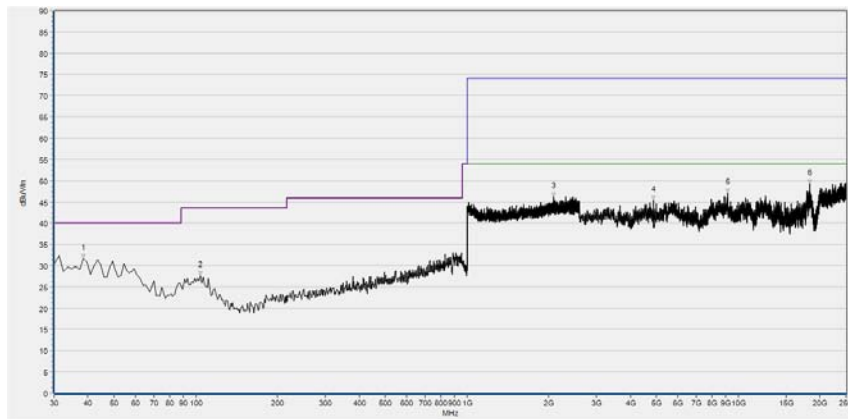

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
38.498	31.67	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
104.055	27.59	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
2083.954	46.23	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4872.995	45.42	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
9162.357	47.14	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
18380.615	49.28	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 25GHz)

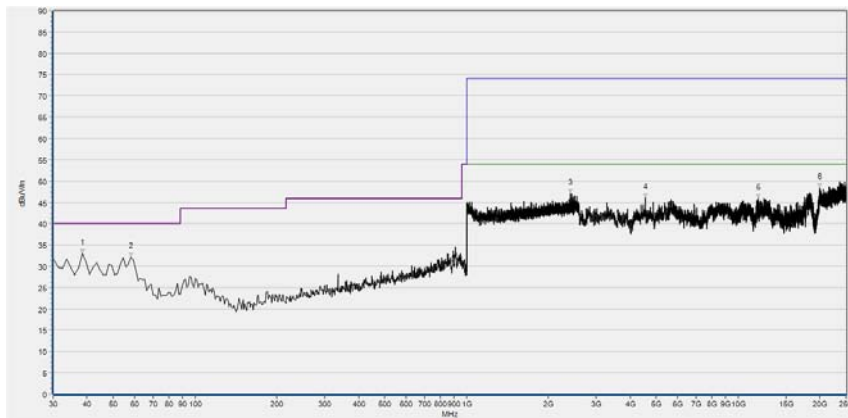

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
38.498	33.06	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
57.922	32.10	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
2414.326	47.05	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4547.118	46.16	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
11867.139	45.94	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
20026.296	48.43	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 30MHz to 25GHz)

Plot for Channel = 11

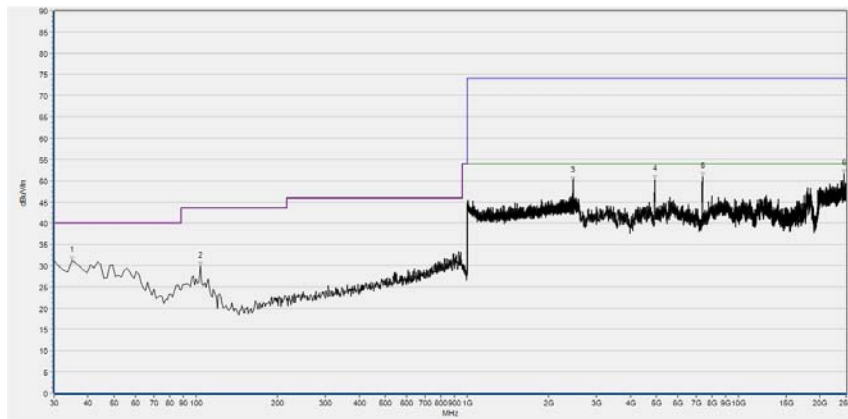

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
34.856	31.15	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
104.055	29.80	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
2462.345	49.92	N/A	N/A	74.00	N/A	54.00	Horizontal	N/A
4930.024	47.25	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
7386.325	50.95	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
24564.139	51.57	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 25GHz)

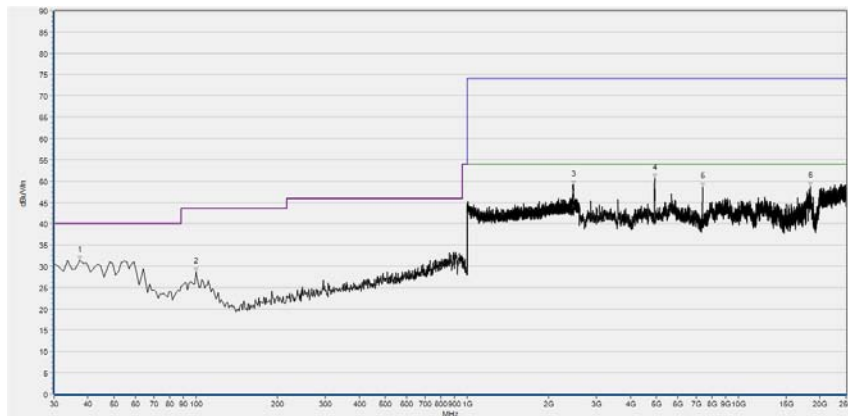


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
37.284	31.29	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
100.413	28.60	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
2462.985	49.17	N/A	N/A	74.00	N/A	54.00	Vertical	N/A
4917.803	50.68	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
7382.251	48.64	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
18429.496	48.82	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 25GHz)


**2.9.3.4 802.11n(HT40) Test mode**

Plots for Channel = 3

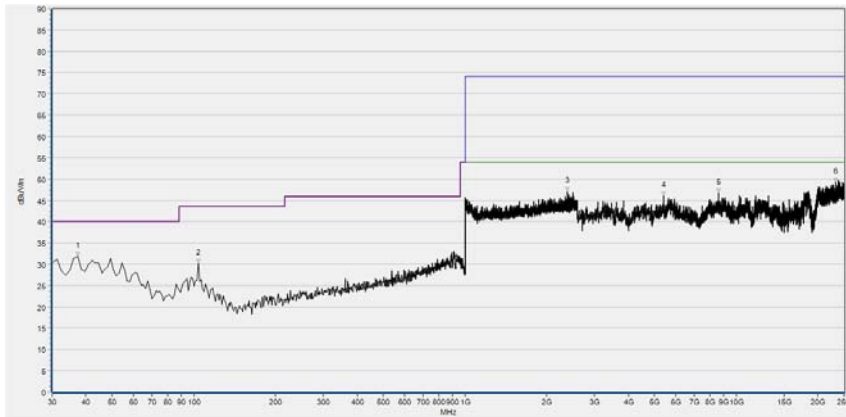

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
37.284	31.89	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
104.055	30.11	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
2388.715	47.03	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5386.252	46.01	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8592.071	46.80	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
23211.748	49.24	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 25GHz)

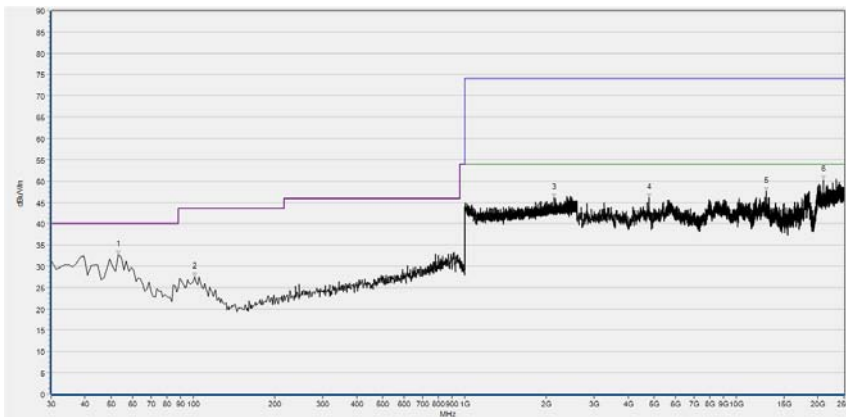


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
53.066	32.69	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
101.627	27.49	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
2134.534	46.02	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4771.158	46.11	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12881.433	47.60	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
20950.973	50.22	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 25GHz)




Plots for Channel = 6

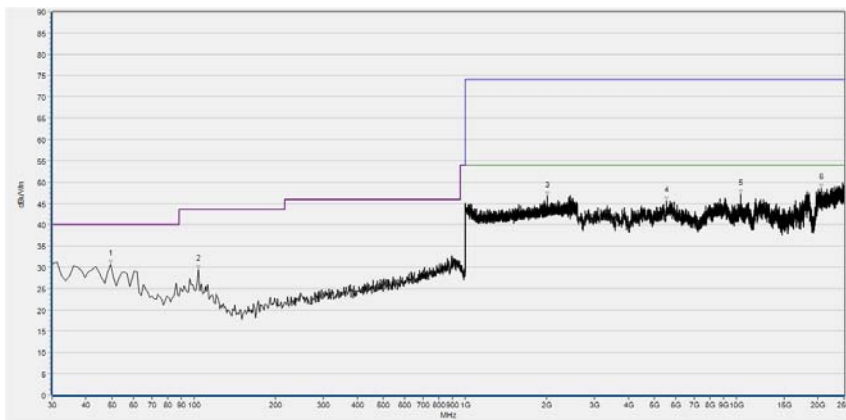

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
49.424	30.67	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
104.055	29.43	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
2008.403	46.75	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5536.970	45.58	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
10364.030	47.21	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
20600.655	48.58	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 25GHz)

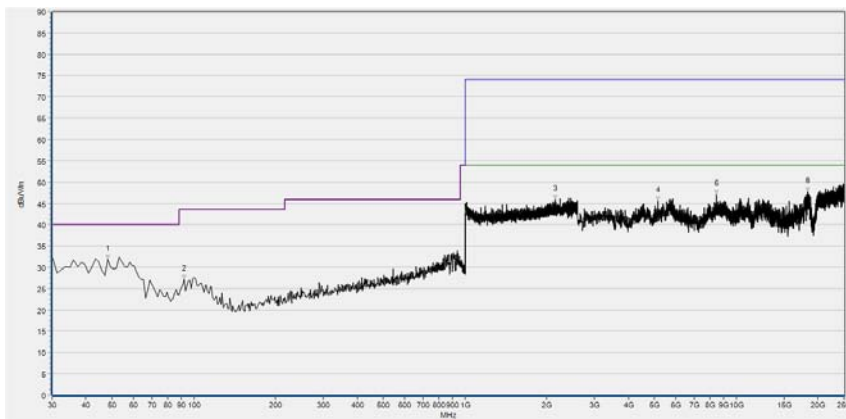

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
48.210	31.84	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
91.915	27.18	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
2151.180	45.86	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5141.844	45.59	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
8445.426	47.11	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
18364.321	47.71	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 30MHz to 25GHz)

Plots for Channel = 9

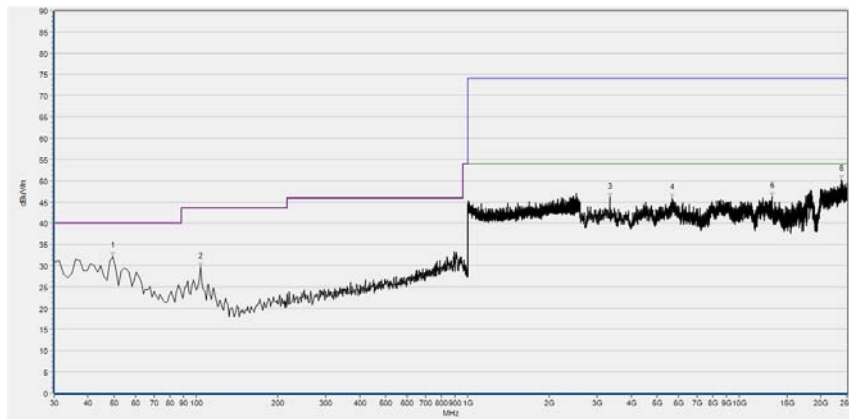

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
49.424	32.10	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
104.055	29.60	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
3337.298	46.02	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5675.468	45.88	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
13235.825	46.28	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
23782.033	50.32	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 25GHz)

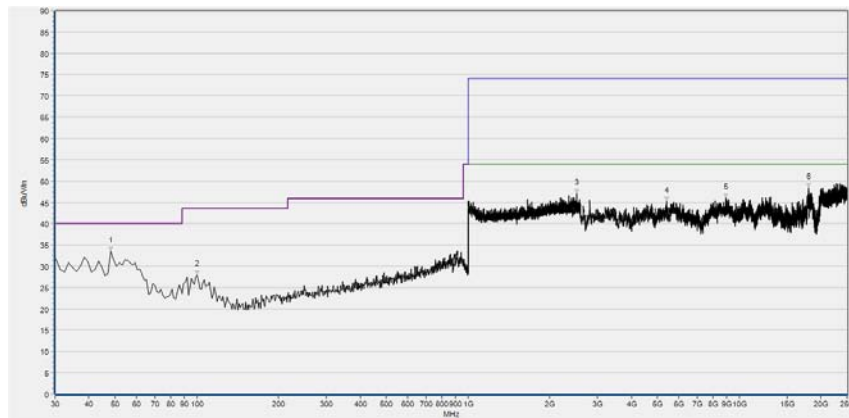

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
48.210	33.54	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
100.413	28.05	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
2509.084	47.12	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5402.546	45.33	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
8913.875	46.14	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
17985.488	48.36	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 25GHz)

Annex A Test Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for test performed on the EUT as specified in CISPR 16-1-2:

Test items	Uncertainty
Peak Output Power	$\pm 2.22\text{dB}$
Power spectral density (PSD)	$\pm 2.22\text{dB}$
Bandwidth	$\pm 5\%$
Conducted Spurious Emission	$\pm 2.77\text{ dB}$
Restricted Frequency Bands	$\pm 5\%$
Radiated Emission	$\pm 2.95\text{dB}$
Conducted Emission	$\pm 2.44\text{dB}$

This uncertainty represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$



Annex B Testing Laboratory Information

1. Identification of the Responsible Testing Laboratory

Company Name:	Shenzhen Morlab Communications Technology Co., Ltd.
Department:	Morlab Laboratory
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, Guangdong Province, P. R. China
Responsible Test Lab Manager:	Mr. Su Feng
Telephone:	+86 755 36698555
Facsimile:	+86 755 36698525

2. Identification of the Responsible Testing Location

Name:	Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, Guangdong Province, P. R. China

3. Facilities and Accreditations

All measurement facilities used to collect the measurement data are located at FL.3, Building A, FeiYang Science Park, Block 67, BaoAn District, Shenzhen, 518101 P. R. China. The test site is constructed in conformance with the requirements of ANSI C63.10-2013 and CISPR Publication 22; the FCC designation number is CN1192, the test firm registration number is 226174.



4. Test Equipments Utilized

4.1 Conducted Test Equipments

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal. Due
Power Splitter	NW521	1506A	Weinschel	2018.04.17	2019.04.16
Attenuator 1	(N/A.)	10dB	Resnet	2018.04.17	2019.04.16
Attenuator 2	(N/A.)	3dB	Resnet	2018.04.17	2019.04.16
EXA Signal Analyzer	MY53470836	N9010A	Agilent	2017.12.03	2018.12.02
USB Wideband Power Sensor	MY54210011	U2021XA	Agilent	2018.04.17	2019.04.16
RF cable (30MHz-26GHz)	CB01	RF01	Morlab	N/A	N/A
Coaxial cable	CB02	RF02	Morlab	N/A	N/A
SMA connector	CN01	RF03	HUBER-SUHNER	N/A	N/A

4.2 Conducted Emission Test Equipments

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal. Due
Receiver	MY56400093	N9038A	KEYSIGHT	2018.05.08	2019.05.07
LISN	812744	NSLK 8127	Schwarzbeck	2018.05.08	2019.05.07
Pulse Limiter (20dB)	9391	VTSD 9561-D	Schwarzbeck	2018.05.08	2019.05.07
Coaxial cable(BNC) (30MHz-26GHz)	CB01	EMC01	Morlab	N/A	N/A

4.3 Auxiliary Test Equipment

Equipment Name	Model No.	Brand Name	Manufacturer	Cal.Date	Cal.Due Date
Computer	T430i	Think Pad	Lenovo	N/A	N/A

4.4 List of Software Used

Description	Manufacturer	Software Version
Test system	Tonscend	V2.6
Power Panel	Agilent	V3.8
MORLAB EMCR V1.2	MORLAB	V 1.0

**4.5 Radiated Test Equipments**

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal. Due
Receiver	MY54130016	N9038A	Agilent	2018.08.04	2019.08.03
Test Antenna - Bi-Log	9163-519	VULB 9163	Schwarzbeck	2018.05.18	2019.05.17
Test Antenna - Loop	1519-022	FMZB1519	Schwarzbeck	2018.03.03	2019.03.02
Test Antenna – Horn	01774	BBHA 9120D	Schwarzbeck	2018.08.06	2019.08.05
Test Antenna – Horn	BBHA9170 #774	BBHA9170	Schwarzbeck	2018.08.02	2019.08.01
Coaxial cable (N male) (9KHz-30MHz)	CB04	EMC04	Morlab	N/A	N/A
Coaxial cable (N male) (30MHz-26GHz)	CB02	EMC02	Morlab	N/A	N/A
Coaxial cable (N male) (30MHz-26GHz)	CB03	EMC03	Morlab	N/A	N/A
1-18GHz pre-Amplifier	MA02	TS-PR18	Rohde& Schwarz	2018.05.08	2019.05.07
18-26.5GHz pre-Amplifier	MA03	TS-PR18	Rohde& Schwarz	2018.05.08	2019.05.07
Anechoic Chamber	N/A	9m*6m*6m	CRT	2017.11.19	2020.11.18

————— END OF REPORT —————