




GUIDE RAPIDE POUR UTILISATEUR

OPEN BOX

1. Locate the following items in your **safe** box:



Please follow this guide to install your **safe**. DO NOT CONNECT ANY WIRES OR PEEL OFF THE STICKER ON THE HARDWARE WITHOUT BEING INSTRUCTED TO.



SAFE BY HUB6



T-clip Cable



Stripped Cable



Ethernet Cable




Quick Installation Guide



Window & Garage
Door Decal

DOWNLOAD HUB6 APP

2. Download HUB6 app through Apple App Store or Google Play Store to your smartphone.
3. Register your user account in the **safe** app.

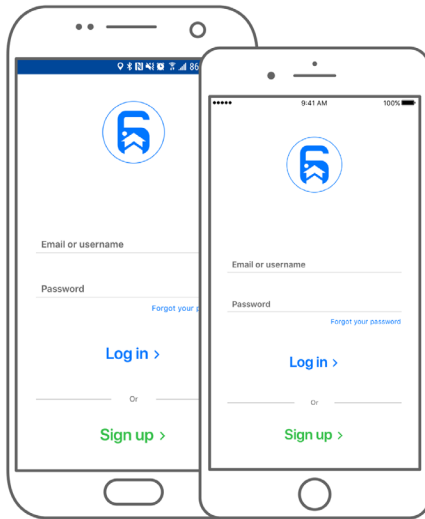


PREPARE FOR INSTALLATION

4. Locate the following locations that can be used for installation:

A. Next to your existing alarm panel (usually located in your basement) **Recommended**

B. Next to one of your existing alarm system's keypads.

OPTION A



OPTION B




CONTINUE ON HUB6 APP

5. Open HUB6 app, click on 'Setup NOW'.
6. Follow on-screen instructions to start your installation.



If you run into any difficulties during the installation process, please feel free to contact HUB6 at 1(833) 666-5166 or through our website <https://www.safebyhub6.com/support/> for more help and support.

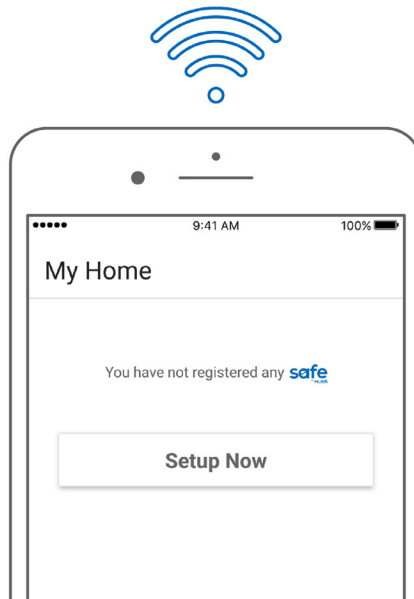

FCC REGULATORY COMPLIANCE

Warning: changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator and your body. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

ISED REGULATORY COMPLIANCE

This device contains licence-exempt transmitter that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions:

1. This device may not cause interference.
2. This device must accept any interference, including interference that may cause undesired operation of the device. This equipment complies with IC RSS-102 radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator and your body.

L'émetteur exempt de licence contenu dans le présent appareil est conforme aux CNR d'Innovation, Sciences et Développement économique Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :

1. L'appareil ne doit pas produire de brouillage;
2. L'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement. Cet équipement est conforme aux limites d'exposition aux radiations IC CNR-102 établies pour un environnement non contrôlé. Cet équipement doit être installé et utilisé avec une distance minimale de 20 cm entre le radiateur et votre corps.


CAN ICES-3 (B)/NMB-3(B)

OUVREZ LA BOITE

1. Repérer les articles suivants dans votre boîte **safe** :



Veuillez suivre ce guide pour installer votre **safe**.
NE PAS BRANCHER DE FILS OU DÉCOLLER L'AUTOCOLLANT SUR
LA QUINCAILLERIE SANS AVOIR REÇU L'INSTRUCTION DE LE FAIRE.




SAFE BY HUB6



Câble "T-Clip"



Câble Denude



Câble Ethernet




Guide Rapide
Pour Utilisateur



Décalcomanie de fenêtre
et décalcomanie de porte de garage

TÉLÉCHARGEZ L'APPLICATION HUB6

2. Téléchargez l'application HUB6 disponible sur Apple App Store ou Google Play Store sur votre téléphone intelligent.
3. Enregistrez votre compte utilisateur dans l'application **safe** Trust.

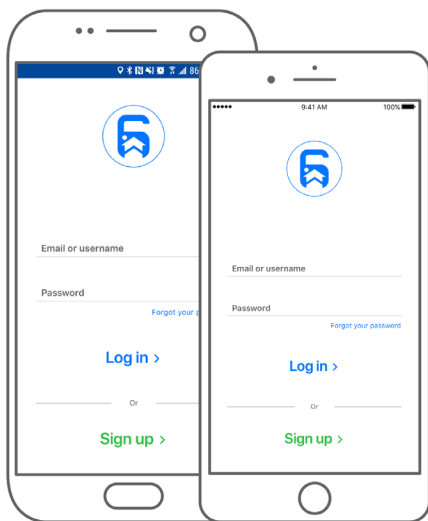

PRÉPAREZ L'INSTALLATION


4. Localisez les emplacements suivants qui peuvent être utilisés pour l'installation:

A – À côté de votre panneau d'alarme existant
(habituellement situé au sous-sol).

Recommandé

B – À côté d'un des claviers de votre système d'alarme existant.

OPTION A



OPTION B



CONTINUER SUR L'APPLICATION HUB6

5. Ouvrir l'application HUB6, cliquer sur 'Setup NOW'.
6. Suivre les instructions à l'écran pour démarrer l'installation.



Si vous rencontrez des difficultés au cours du processus d'installation, n'hésitez pas à nous contacter au 1(833) 666-5166 ou sur notre site <https://www.safebyhub6.com/support/> pour plus d'aide et d'assistance.

