

FCC PART 15C TEST REPORT FOR CERTIFICATION

On Behalf of

Hunan Greatwall Computer System Co., Ltd

8"Android Tablet

Model Number: 100011885

FCC ID: 2APUQW829


Prepared for:	Hunan Greatwall Computer System Co., Ltd
	Hu'nan Greatwall Industrial Park,Xiangyun Middle Rd., Tianyuan Dist.,
	Zhuzhou, Hu'nan
Prepared By:	EST Technology Co., Ltd.
	Chilingxiang, Qishantou, Santun, Houjie, Dongguan, Guangdong, China
	Tel: 86-769-83081888-808

Report Number:	ESTE-R2004078-1
Date of Test:	Aug. 13~Sep. 01, 2020
Date of Report:	Sep. 02, 2020

TABLE OF CONTENTS

Description	Page
TEST REPORT VERIFICATION	3
1. GENERAL INFORMATION.....	4
1.1. Description of Device (EUT)	4
1.2. Difference between Model Numbers.....	4
1.3. Antenna Information	4
2. SUMMARY OF TEST	5
2.1. Summary of test result.....	5
2.2. Test Facilities.....	6
2.3. Measurement uncertainty	7
2.4. Assistant equipment used for test	7
2.5. Block Diagram.....	7
2.6. Test mode	8
2.7. Channel List.....	8
2.8. Power Setting of Test Software	8
2.9. Test Equipmen.....	9
3. RADIATED SPURIOUS EMISSIONS AND BAND EDGE	10
3.1. Limit	10
3.2. Test Setup	11
3.3. Spectrum Analyzer Setting.....	12
3.4. Test Procedure	13
3.5. Test Result	14
4. AC POWER LINE CONDUCTED EMISSIONS	20
4.1. Limit	20
4.2. Test Setup	20
4.3. Spectrum Analyzer Setting.....	20
4.4. Test Procedure	20
4.5. Test Result	21
5. TEST SETUP PHOTO.....	33
6. EUT PHOTO	35

EST Technology Co., Ltd.

Applicant:	Hunan Greatwall Computer System Co., Ltd		
Address:	Hu'nan Greatwall Industrial Park,Xiangyun Middle Rd., Tianyuan Dist., Zhuzhou, Hu'nan		
Manufacturer:	Hunan Greatwall Computer System Co.,Ltd		
Address:	Hu'nan Greatwall Industrial Park,Xiangyun Middle Rd.,Tianyuan Dist.,Zhuzhou, Hu'nan		
E.U.T:	8"Android Tablet		
Model Number:	100011885		
Power Supply:	DC 5V From Adapter Input AC 100-240V~50/60Hz DC 3.8V From Battery		
Trade Name:	onn.	Serial No.:	-----
Date of Receipt:	Aug. 13, 2020	Date of Test:	Aug. 13~Sep. 01, 2020
Test Specification:	FCC Part 15 Subpart C (15.247) ANSI C63.10:2013 FCC KDB 558074 D01 15.247 Meas Guidance v05r02		
Test Result:	The device described above is tested by EST Technology Co., Ltd. The measurement results were contained in this test report and EST Technology Co., Ltd. was assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT to be technically compliance with the FCC Rules and Regulations Part 15 Subpart C requirements. This report applies to above tested sample only and shall not be reproduced in part without written approval of EST Technology Co., Ltd.		
Prepared by:	Reviewed by:	Date: Sep. 02, 2020  Approved by:	
 Ring Yang / Assistant	 Seven Yang / Engineer	 Iceman Hu / Manager	
Other Aspects:			
Because only the replace the power management chip PMU and add supply power, so just re-tested spurious emissions(30-1000MHz) 、 conducted Emissions, other test item needn't re-tested, test data refer to test report " ESTE-R2004078"			
Abbreviations: OK/P=passed fail/F=failed n.a/N=not applicable E.U.T=equipment under tested			
This test report is based on a single evaluation of one sample of above mentioned products ,It is not permitted to be duplicated in extracts without written approval of EST Technology Co., Ltd.			

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

Product Name	:	8"Android Tablet
Model Number	:	100011885
Software Version	:	F732M.Q0.V3.18.CC-V03.8168.64-7420
Hardware Version	:	F732U2.0
Operation frequency	:	2402MHz~2480MHz
Number of channel	:	79
Max Output Power (PEAK)	:	3.23dBm
Modulation Type	:	BT BDR(1Mbps): GFSK BT EDR(2Mbps): $\pi/4$ -DQPSK BT EDR(3Mbps): 8-DPSK
Sample Type	:	Prototype production

Note:

For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

1.2. Difference between Model Numbers

Model Number	main board	DDR	EMMC	MPU
100011885	1	RS512M32LZ4D2ANP_75BT 2G/4die 3733Mbps 10*14.5mm FBGA200 RS	MEMA032G 32GB 1.8V/HS400/EMMC5.1 200MHz 153-FBGA ISOCOM	MEDIATEK MT6357ARU 2010-ANSHDCMJ3JJP
	2	MDXC1016G-M2 2GB(512*32) 3200Mbps 10*14.5mm FBGA200 FORESEE	LTMZ0007HF-DAB1-SM Leahkinn	
	3	RS512M32LM4D2BDS-53BT 2GB(512*32) 3200Mbps 10*14.5mm FBGA200 RS	EMMC32G-TA28 32GB 1.8V 200MHz 153-FBGA Kingston	

Note: Default is A mainboard, reported to the DDR,EMMC and MPU combination for 2 and 3

1.3. Antenna Information

Ant No.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	N/A	N/A	Internal	N/A	2.2

2. SUMMARY OF TEST

2.1. Summary of test result

Report Section	Description of Test Item	FCC Standard Section	Results
3	Maximum Peak Output Power	15.247(a)(1)	N/A
4	20dB Bandwidth	15.247(a)(1)	N/A
5	Carrier Frequency Separation	15.247(a)(1)	N/A
6	Number Of Hopping Channel	15.247(a)(1)(iii)	N/A
7	Dwell Time	15.247(a)(1)(iii)	N/A
8	Conducted Band Edge	15.247(d)	N/A
9	Conducted Spurious Emissions	15.247(d)	N/A
10	Radiated Spurious Emissions and Band Edge	15.205 15.209 15.247(d)	PASS
11	AC Power Line Conducted Emissions	15.207	PASS
12	Antenna Requirement	15.203	N/A

Note:

(1) "N/A" denotes test is not applicable in this test report

2.2. Test Facilities

EMC Lab

: Certified by CNAS, CHINA
Registration No.: L5288
This Certificate is valid until: November 12, 2023

Certificated by FCC, USA
Designation Number: CN1215
This Certificate is valid until: January 31, 2022

Certificated by A2LA, USA
Registration No.: 4366.01
This Certificate is valid until: January 31, 2022

Certificated by Industry Canada
CAB identifier No.: CN0035
This Certificate is valid until: January 31, 2022

Certificated by VCCI, Japan
Registration No.: C-14103; T-20073; R-13663;
R-20103; G-20097
Date of registration: Apr. 20, 2020
This Certificate is valid until: Apr. 19, 2023

Certificated by TUV Rheinland, Germany
Registration No.: UA 50413872 0001
Date of registration: July 31, 2018

Certificated by Intertek
Registration No.: 2011-RTL-L2-64
Date of registration: November 08, 2018

Name of Firm : EST Technology Co., Ltd.

Site Location : Chilingxiang, Qishantou, Santun, Houjie, Dongguan, Guangdong, China

2.3. Measurement uncertainty

Test Item	Uncertainty
Uncertainty for Conduction emission test	$\pm 3.48\text{dB}$
Uncertainty for spurious emissions test (30MHz-1GHz)	$\pm 4.60\text{ dB(Polarize: H)}$
	$\pm 4.68\text{ dB(Polarize: V)}$
Uncertainty for spurious emissions test (1GHz to 25GHz)	$\pm 4.96\text{dB}$
Uncertainty for radio frequency	7×10^{-8}
Uncertainty for conducted RF Power	0.20dB
Uncertainty for Power density test	0.26dB

Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.


2.4. Assistant equipment used for test

Item	Equipment	Brand	Model Name/Type No.	FCC ID	Series No.
A	Adapter	onn	GDA0101H-U0500200	N/A	N/A

Item	Shielded Type	Ferrite Core	Length	Note
1	NO	NO	1m	DC Cable

2.5. Block Diagram

For radiated emissions test: EUT was placed on a turn table, which is 0.8 (or 1.5) meter high above ground. EUT was beset into Bluetooth test mode by software before test.



(EUT: 8"Android Tablet)

2.6. Test mode

Combining all the rates, modulations, and packet types, the Pre-scans had been carried out. The worst case test mode was selected for the final test as listed below.

Test Item	Modulation Type	Operating Mode	Packet Type	Test Channel
Radiated Spurious Emissions(Below 1GHz)	GFSK&8-DPSK	Non Hopping	DH5	Low/Middle/High
AC Power Line Conducted Emissions	GFSK&8-DPSK	Non Hopping	DH5	Low/Middle/High

Note:

1. In radiated measurement,the EUT had been pre-scan on the positioned of each 3 axis(X,Y,Z), the worst case was found when positioned on **X-plane**.

2.7. Channel List

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
0	2402	1	2403	2	2404	3	2405
4	2406	5	2407	6	2408	7	2409
8	2410	9	2411	10	2412	11	2413
12	2414	13	2415	14	2416	15	2417
16	2418	17	2419	18	2420	19	2421
20	2422	21	2423	22	2424	23	2425
24	2426	25	2427	26	2428	27	2429
28	2430	29	2431	30	2432	31	2433
32	2434	33	2435	34	2436	35	2437
36	2438	37	2439	38	2440	39	2441
40	2442	41	2443	42	2444	43	2445
44	2446	45	2447	46	2448	47	2449
48	2450	49	2451	50	2452	51	2453
52	2454	53	2455	54	2456	55	2457
56	2458	57	2459	58	2460	59	2461
60	2462	61	2463	62	2464	63	2465
64	2466	65	2467	66	2468	67	2469
68	2470	69	2471	70	2472	71	2473
72	2474	73	2475	74	2476	75	2477
76	2478	77	2479	78	2480	-	-

2.8. Power Setting of Test Software

Software Name	N/A		
Frequency(MHz)	2402	2441	2480
GFSK(1Mbps) Setting	Default	Default	Default
8-DPSK(3Mbps) Setting	Default	Default	Default

2.9. Test Equipmen

For conducted emission test						
Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESHS30	EST-E001	LISAI	June 13,20	1 Year
Artificial Mains Network	Rohde & Schwarz	ENV216	EST-E002	LISAI	June 13,20	1 Year
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	EST-E078	LISAI	June 13,20	1 Year
Test Software	Audix	e3-6.111221a	N/A	N/A	N/A	N/A

For radiated emissions test (30MHz-1000MHz)						
Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESR7	EST-E047	LISAI	June 13,20	1 Year
Bilog Antenna	Teseq	CBL 6111D	EST-E034	LISAI	June 13,20	1 Year
Test Software	Audix	e3-6.111221a	N/A	N/A	N/A	N/A
30-1000MHz Cable	N/A	EST-002	N/A	N/A	N/A	N/A

For radiated emission test(Above 1000MHz)						
Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
Horn Antenna	SCHWARZBECK	BBHA9120D	EST-E031	LISAI	June 13,20	1 Year
Signal Amplifier	SCHWARZBECK	BBV9718	EST-E032	LISAI	June 13,20	1 Year
Spectrum Analyzer	Rohde & Schwarz	FSV40	EST-E069	LISAI	June 13,20	1 Year
Test Software	Audix	e3-6.111221a	N/A	N/A	N/A	N/A
Above 1GHz Cable	N/A	EST-003	N/A	N/A	N/A	N/A

3. RADIATED SPURIOUS EMISSIONS AND BAND EDGE

3.1. Limit

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)

15.209 Limit


Frequency (MHz)	Field Strength(μ V/m)	Distance(m)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Note:


- (1) Emission level dB μ V = 20 log Emission level μ V/m.
- (2) The smaller limit shall apply at the cross point between two frequency bands.
- (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

3.2. Test Setup


9kHz~30MHz

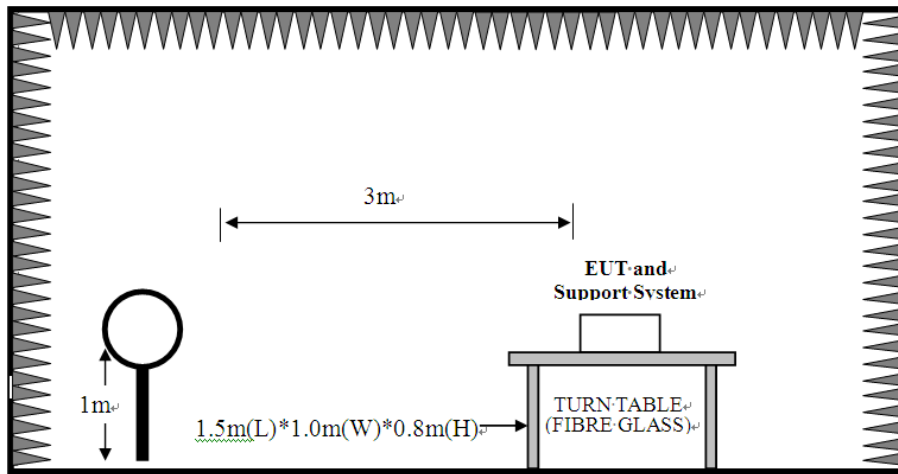

30~1000MHz

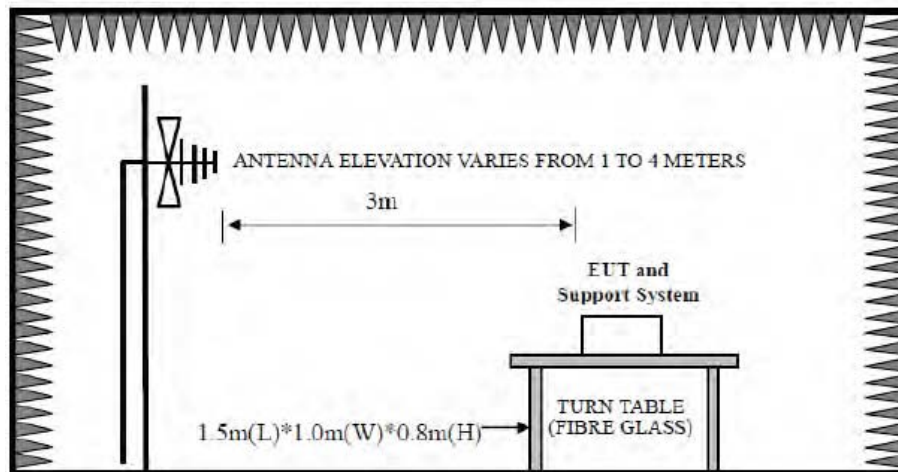

Above 1GHz

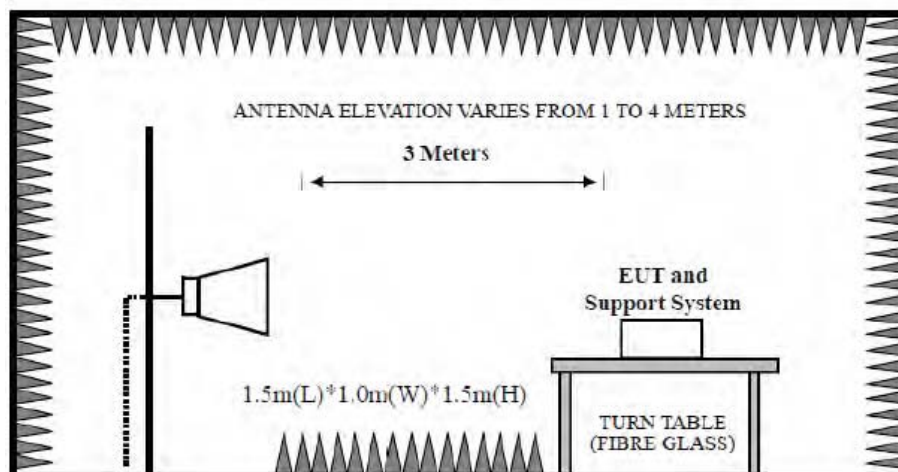

3.3. Spectrum Analyzer Setting

For 9KHz-150KHz

Spectrum Parameters	Setting
RBW	300Hz(for Peak&AVG)/CISPR 200Hz(for QP)
VBW	300Hz(for Peak&AVG)/CISPR 200Hz(for QP)
Start frequency	9KHz
Stop frequency	150KHz
Sweep Time	Auto
Detector	PEAK/QP/AVG
Trace Mode	Max Hold

For 150KHz-30MHz

Spectrum Parameters	Setting
RBW	9KHz
VBW	9KHz
Start frequency	150KHz
Stop frequency	30MHz
Sweep Time	Auto
Detector	QP
Trace Mode	Max Hold

For 30MHz-1GHz

Spectrum Parameters	Setting
RBW	120KHz
VBW	300KHz
Start frequency	30MHz
Stop frequency	1GHz
Sweep Time	Auto
Detector	QP
Trace Mode	Max Hold

For Above 1GHz

Spectrum Parameters	Setting	
RBW	1MHz	
VBW	PEAK Measurement	AVG Measurement
	3MHz	Duty cycle $\geq 98\%$, VBW=10Hz
		Duty cycle $< 98\%$, VBW $\geq 1/T$
Start frequency	1GHz	
Stop frequency	25GHz	
Sweep Time	Auto	
Detector	PEAK	
Trace Mode	Max Hold	

3.4. Test Procedure

- a. EUT was placed on a turn table, which is 0.8 meter high above ground for below 1GHz test, and which is 1.5 meter high above ground for above 1GHz test.
- b. EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower.
- c. Set the EUT transmit continuously with maximum output power.
- d. The turn table can rotate 360 degrees to determine the position of the maximum emission level.
- e. The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Both horizontal and vertical polarization of the antenna are set on test.
- f. Spectrum analyzer setting parameters in accordance with section 10.3.
- g. Repeat above procedures until all channels and test modes were measured.
- h. Record the results in the test report.

Note:


1. For emissions above 1GHz, if peak level comply with average limit, then the average level is deemed to comply with average limit.
2. The frequency 2402MHz ,2441MHz and 2480MHz is fundamental frequency which no limit, the limit on plots is automatically generated by the software, it's not fundamental limit, we can't remove it.

3.5. Test Result

Radiated Emissions Below 1GHz

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

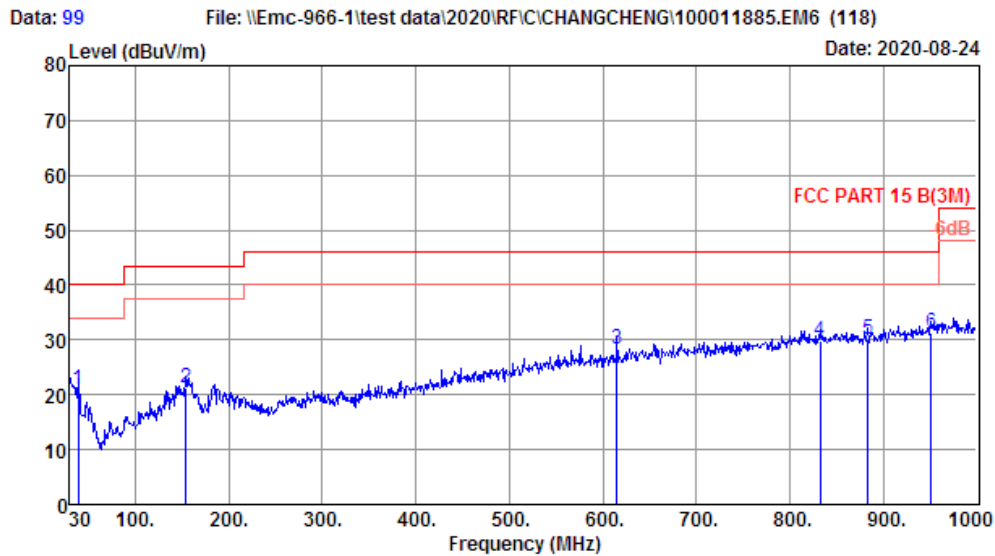

Site no. : 3# 966 Chamber Data no. : 99
 Dis. / Ant. : 3m 37062 Ant. pol. : VERTICAL
 Limit : FCC PART 15 B(3M)
 Env. / Ins. : Temp:25.2'; Humi:56%; Press:101.52kPa
 Engineer : Blank
 EUT : 8"Android Tablet
 Power : DC 5V From Adapter Input AC 120V/60Hz
 M/N : 100011885
 Test Mode : TX Mode
 DDR:RS512M32L24D2ANP_75BT 2G
 EMMC:MEMA032G 32GB 1.8V
 MEDIATEK MT6357ARU 2010-ANSHDCMJ3JJF

	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	38.730	12.50	0.20	8.25	20.95	40.00	19.05	QP
2	154.160	11.36	1.11	8.75	21.22	43.50	22.28	QP
3	614.910	20.70	3.04	4.64	28.38	46.00	17.62	QP
4	832.190	23.42	3.71	2.63	29.76	46.00	16.24	QP
5	883.600	23.84	3.87	2.36	30.07	46.00	15.93	QP
6	951.500	24.62	4.54	2.20	31.36	46.00	14.64	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 100

File: \\Emc-966-1\test data\2020\RFIC\CHANGCHENG\100011885.EM6 (118)

Date: 2020-08-24

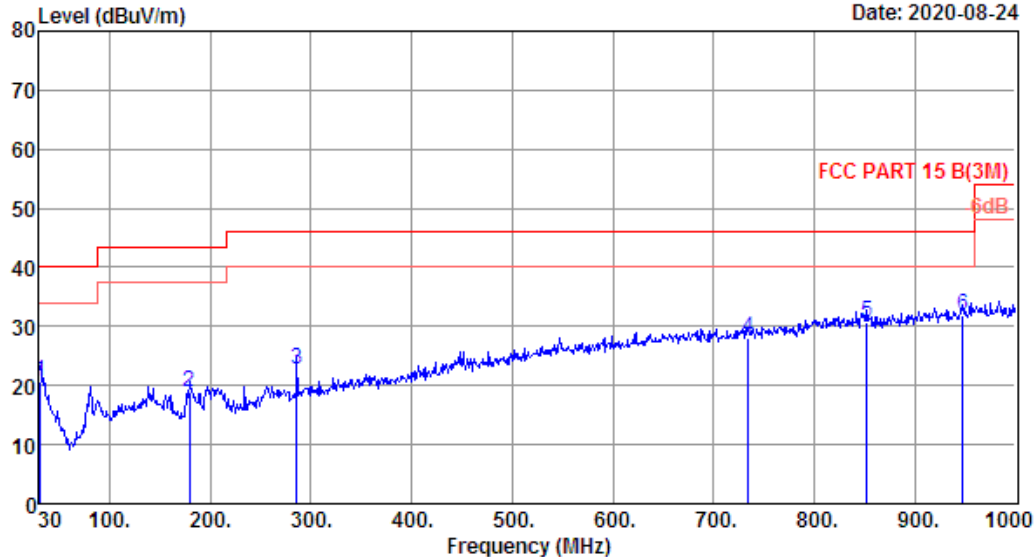

Site no. : 3# 966 Chamber Data no. : 100
 Dis. / Ant. : 3m 37062 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 B(3M)
 Env. / Ins. : Temp:25.2'; Humi:56%; Press:101.52kPa
 Engineer : Blank
 EUT : 8"Android Tablet
 Power : DC 5V From Adapter Input AC 120V/60Hz
 M/N : 100011885
 Test Mode : TX Mode
 DDR:RS512M32LZ4D2ANP_75BT 2G
 EMMC:MEMA032G 32GB 1.8V
 MEDIATEK MT6357ARU 2010-ANSHDCMJ3JJJP

	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	30.970	17.60	0.14	2.97	20.71	40.00	19.29	QP
2	179.380	9.55	1.21	8.00	18.76	43.50	24.74	QP
3	286.080	13.20	1.81	7.77	22.78	46.00	23.22	QP
4	734.220	21.74	3.55	2.65	27.94	46.00	18.06	QP
5	852.560	23.35	3.72	3.59	30.66	46.00	15.34	QP
6	947.620	24.56	4.49	2.69	31.74	46.00	14.26	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 107

File: \\Emc-966-1\\test data\\2020\\RFIC\\CHANGCHENG\\100011885.EM6 (118)

Date: 2020-08-24

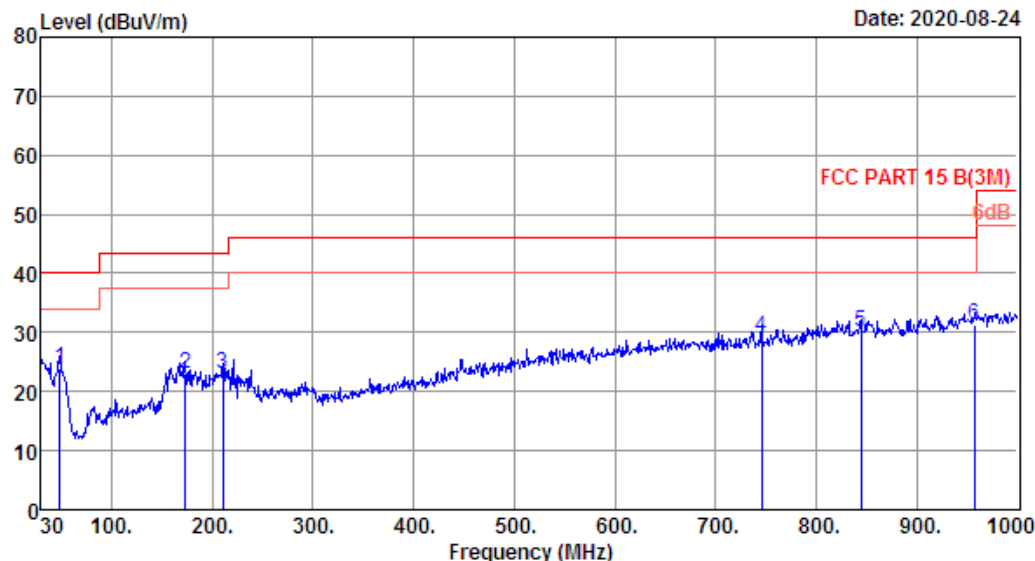

Site no. : 3# 966 Chamber Data no. : 107
 Dis. / Ant. : 3m 37062 Ant. pol. : VERTICAL
 Limit : FCC PART 15 B(3M)
 Env. / Ins. : Temp:25.2'; Humi:56%; Press:101.52kPa
 Engineer : Blank
 EUT : 8"Android Tablet
 Power : DC 5V From Adapter Input AC 120V/60Hz
 M/N : 100011885
 Test Mode : TX Mode
 DDR:MDXC1016G-M2 2GB
 EMMC:LTM20007HF-DAB1-SM
 MEDIATEK MT6357ARU 2010-ANSHDCMJ3JJP

	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	48.430	9.50	0.28	14.26	24.04	40.00	15.96	QP
2	173.560	9.78	1.19	12.04	23.01	43.50	20.49	QP
3	210.420	8.70	1.36	12.88	22.94	43.50	20.56	QP
4	745.860	21.80	3.66	3.84	29.30	46.00	16.70	QP
5	844.800	23.30	3.69	3.24	30.23	46.00	15.77	QP
6	957.320	24.67	4.59	2.06	31.32	46.00	14.68	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 108

File: \\Emc-966-1\test data\2020\RFIC\CHANGCHENG\100011885.EM6 (118)

Date: 2020-08-24

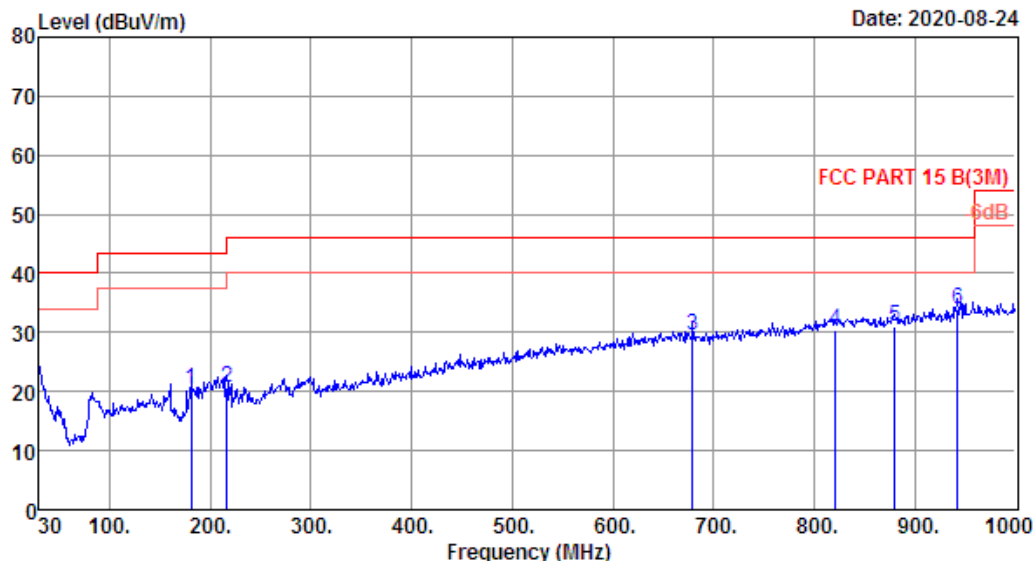

Site no. : 3# 966 Chamber Data no. : 108
 Dis. / Ant. : 3m 37062 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 B(3M)
 Env. / Ins. : Temp:25.2'; Humi:56%; Press:101.52kPa
 Engineer : Blank
 EUT : 8"Android Tablet
 Power : DC 5V From Adapter Input AC 120V/60Hz
 M/N : 100011885
 Test Mode : TX Mode
 DDR:MDXC1016G-M2 2GB
 EMMC:LTM20007HF-DAB1-SM
 MEDIATEK MT6357ARU 2010-ANSHDCMJ3JJJP

	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	181.320	9.44	1.22	9.78	20.44	43.50	23.06	QP
2	216.240	9.44	1.43	9.75	20.62	46.00	25.38	QP
3	678.930	21.70	3.22	4.65	29.57	46.00	16.43	QP
4	821.520	23.32	3.71	3.25	30.28	46.00	15.72	QP
5	879.720	23.80	3.89	3.36	31.05	46.00	14.95	QP
6	942.770	24.46	4.42	4.96	33.84	46.00	12.16	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 115

File: \\Emc-966-1\\test data\\2020\\RF\\C\\CHANGCHENG\\100011885.EM6 (118)

Date: 2020-08-25

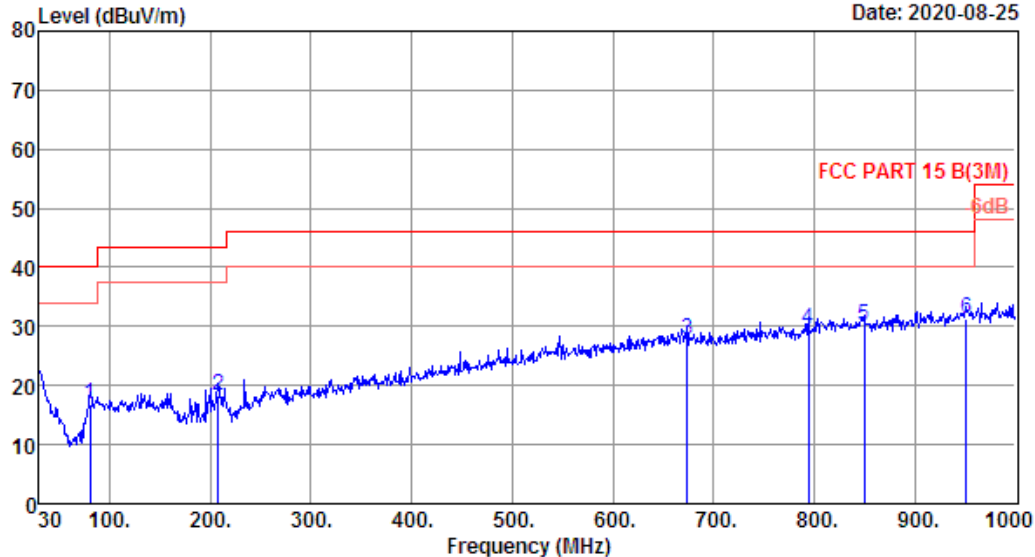


Site no. : 3# 966 Chamber Data no. : 115
 Dis. / Ant. : 3m 37062 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 B(3M)
 Env. / Ins. : Temp:25.2'; Humi:56%; Press:101.52kPa
 Engineer : Blank
 EUT : 8"Android Tablet
 Power : DC 5V From Adapter Input AC 120V/60Hz
 M/N : 100011885
 Test Mode : TX Mode
 DDR:RS512M32LM4D2BDS-53BT 2GB
 EMMC:EMMC32G-TA28 32GB
 MEDIATEK MT6357ARU 2010-ANSHDCMJ3JJJP

	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	80.440	7.60	0.68	8.57	16.85	40.00	23.15	QP
2	207.510	8.65	1.33	8.30	18.28	43.50	25.22	QP
3	674.080	21.70	3.22	2.93	27.85	46.00	18.15	QP
4	794.360	22.78	3.54	3.16	29.48	46.00	16.52	QP
5	849.650	23.10	3.72	3.18	30.00	46.00	16.00	QP
6	951.500	24.62	4.54	2.10	31.26	46.00	14.74	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

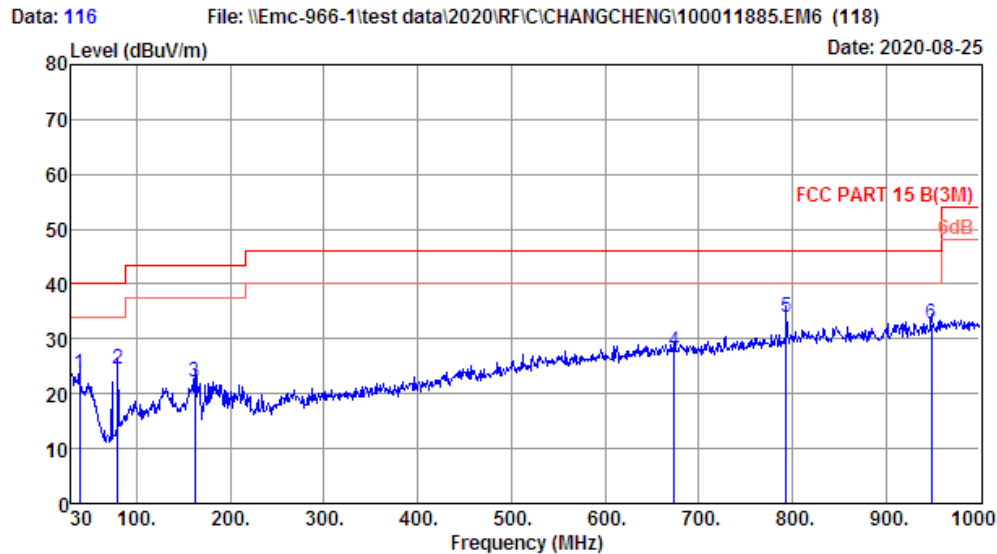

Site no. : 3# 966 Chamber Data no. : 116
Dis. / Ant. : 3m 37062 Ant. pol. : VERTICAL
Limit : FCC PART 15 B(3M)
Env. / Ins. : Temp:25.2'; Humi:56%; Press:101.52kPa
Engineer : Blank
EUT : 8"Android Tablet
Power : DC 5V From Adapter Input AC 120V/60Hz
M/N : 100011885
Test Mode : TX Mode
DDR:RS512M32LM4D2BDS-53BT 2GB
EMMC:EMMC32G-TA28 32GB
MEDIATEK MT6357ARU 2010-ANSHDCMJ3JJJP

	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	38.730	12.50	0.20	10.98	23.68	40.00	16.32	QP
2	79.470	7.45	0.67	16.29	24.41	40.00	15.59	QP
3	161.920	10.98	1.15	10.15	22.28	43.50	21.22	QP
4	674.080	21.70	3.22	2.74	27.66	46.00	18.34	QP
5	793.390	22.76	3.55	7.73	34.04	46.00	11.96	QP
6	948.590	24.58	4.51	3.54	32.63	46.00	13.37	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.

Note:

1. The amplitude of 9KHz to 30MHz spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.
2. All test mode had been pre-test, only the worst case was reported.

4. AC POWER LINE CONDUCTED EMISSIONS


4.1. Limit

Frequency			Maximum RF Line Voltage	
			Quasi-Peak Level dB(μ V)	Average Level dB(μ V)
150kHz	~	500kHz	66 ~ 56*	56 ~ 46*
500kHz	~	5MHz	56	46
5MHz	~	30MHz	60	50

Note:

1. * Decreasing linearly with logarithm of frequency.
2. The lower limit shall apply at the transition frequencies.

4.2. Test Setup

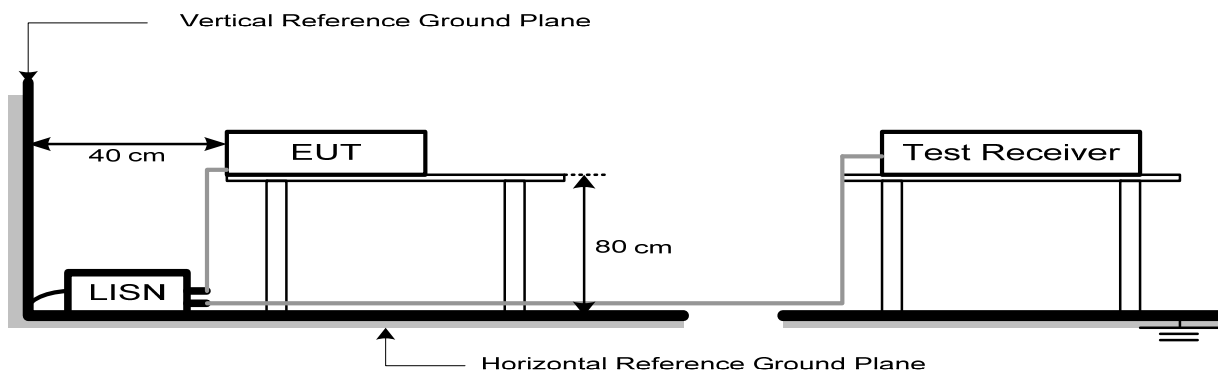

4.3. Spectrum Analyzer Setting

Spectrum Parameters	Setting
RBW	9KHz
VBW	9KHz
Start frequency	150KHz
Stop frequency	30MHz
Sweep Time	Auto
Detector	QP/AVG
Trace Mode	Max Hold

4.4. Test Procedure

- a. The EUT was placed on a non-metallic table, 80cm above the ground plane.
- b. The EUT Power connected to the power mains through a line impedance stabilization network.
- c. Provides a 50 ohm coupling impedance for the EUT (Please refer the block diagram of the test setup and photographs).
- d. Set the EUT transmit continuously with maximum output power.
- e. Spectrum analyzer setting parameters in accordance with section 11.3.
- f. The AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.10: 2013 on Conducted Emission Test.
- g. Record the results in the test report.

4.5. Test Result


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 178

File: \\Emc-ce-1\Test data\2020\RFIC\CHANGCHENG.EM6 (256)

Date: 2020-08-27

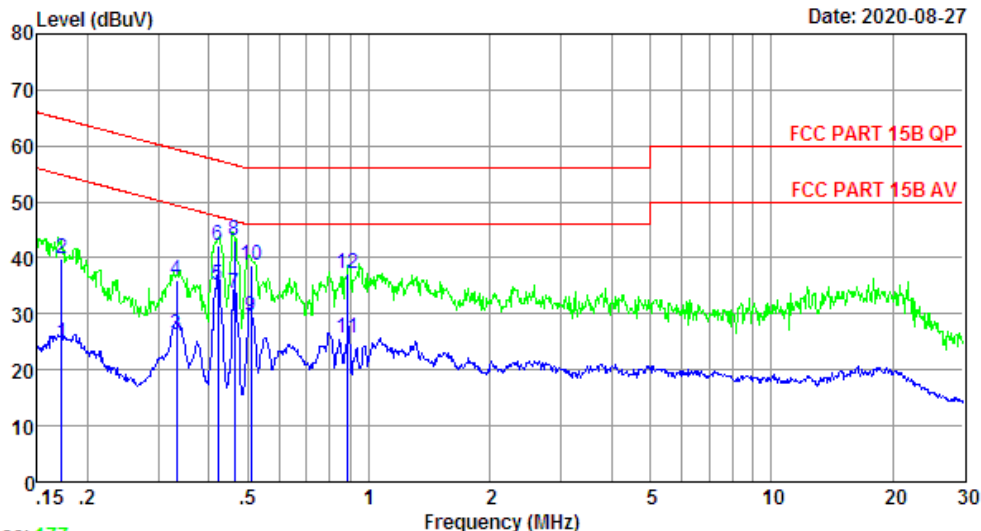

Trace: 177

Site no : 844 Shield Room Data no. : 178
 Env. / Ins. : Temp:23.5°C Humi:58% Press:101.50kPa LINE Phase : NEUTRAL
 Limit : FCC PART 15B QP
 Engineer : ZSX
 EUT : 8"Android Tablet
 Power : DC 5V From Adapter Input AC 120V/60Hz
 M/N : 100011885
 Test Mode : TX Mode
 DDR:RS512M32L24D2ANP_75BT 2G
 EMMC:MEMA032G 32GB 1.8V
 MEDIATEK MT6357ARU 2010-ANSHDCMJ3JJP

	Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.1722	9.61	9.69	5.48	24.78	54.86	30.08	Average
2	0.1722	9.61	9.69	20.59	39.89	64.86	24.97	QP
3	0.3321	9.63	9.92	6.86	26.41	49.40	22.99	Average
4	0.3321	9.63	9.92	16.38	35.93	59.40	23.47	QP
5	0.4215	9.64	9.92	15.70	35.26	47.42	12.16	Average
6	0.4215	9.64	9.92	22.74	42.30	57.42	15.12	QP
7	0.4637	9.65	9.92	14.05	33.62	46.63	13.01	Average
8	0.4637	9.65	9.92	23.56	43.13	56.63	13.50	QP
9	0.5101	9.65	9.92	9.81	29.38	46.00	16.62	Average
10	0.5101	9.65	9.92	18.96	38.53	56.00	17.47	QP
11	0.8850	9.72	9.93	6.13	25.78	46.00	20.22	Average
12	0.8850	9.72	9.93	17.59	37.24	56.00	18.76	QP

Remarks: 1. Emission Level= LISN Factor + Cable Loss + Reading.
 2. Margin=Limit - Emission Level.
 3. If the average limit is met when using a quasi-peak detector,
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 180

File: \\Emc-ce-1\Test data\2020\RF\C\CHANGCHENG.EM6 (256)

Date: 2020-08-27

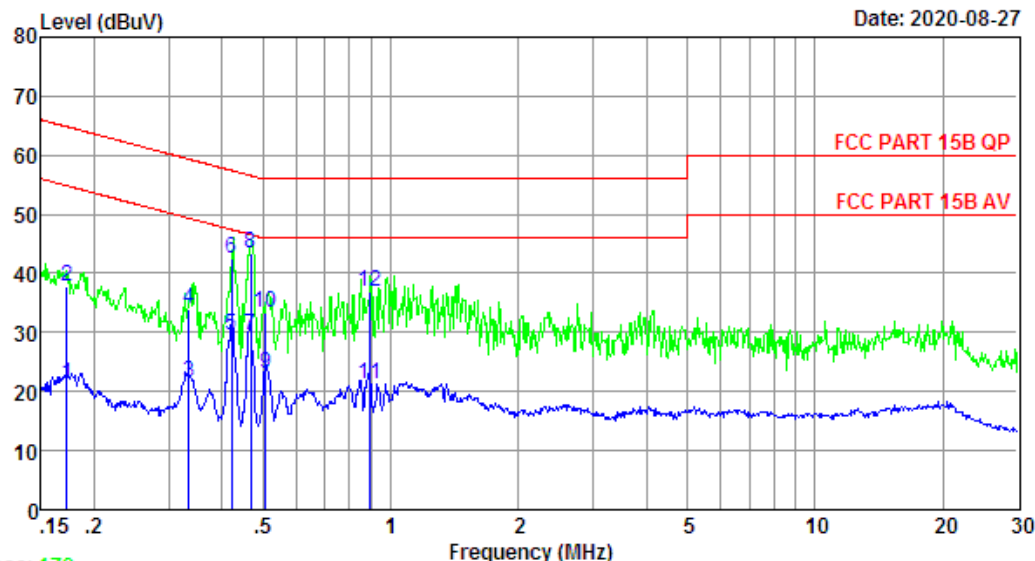

Trace: 179

Site no : 844 Shield Room Data no. : 180
 Env. / Ins. : Temp:23.5°C Humi:58% Press:101.50kPa LINE Phase : LINE
 Limit : FCC PART 15B QP
 Engineer : ZSX
 EUT : 8"Android Tablet
 Power : DC 5V From Adapter Input AC 120V/60Hz
 M/N : 100011885
 Test Mode : TX Mode
 DDR:RS512M32LZ4D2ANP_75BT 2G
 EMMC:MEMA032G 32GB 1.8V
 MEDIATEK MT6357ARU 2010-ANSHDCMJ3JJP

	Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.1722	9.73	9.69	1.82	21.24	54.86	33.62	Average
2	0.1722	9.73	9.69	18.45	37.87	64.86	26.99	QP
3	0.3338	9.72	9.92	1.94	21.58	49.35	27.77	Average
4	0.3338	9.72	9.92	14.44	34.08	59.35	25.27	QP
5	0.4215	9.72	9.92	9.82	29.46	47.42	17.96	Average
6	0.4215	9.72	9.92	22.93	42.57	57.42	14.85	QP
7	0.4686	9.72	9.92	9.91	29.55	46.54	16.99	Average
8	0.4686	9.72	9.92	23.83	43.47	56.54	13.07	QP
9	0.5074	9.72	9.92	3.52	23.16	46.00	22.84	Average
10	0.5074	9.72	9.92	13.65	33.29	56.00	22.71	QP
11	0.8944	9.72	9.94	1.46	21.12	46.00	24.88	Average
12	0.8944	9.72	9.94	17.38	37.04	56.00	18.96	QP

Remarks: 1. Emission Level= LISN Factor + Cable Loss + Reading.
 2. Margin=Limit - Emission Level.
 3. If the average limit is met when using a quasi-peak detector,
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 182

File: \\Emc-ce-1\Test data\2020\RF\CHANGCHENG.EM6 (256)

Date: 2020-08-27

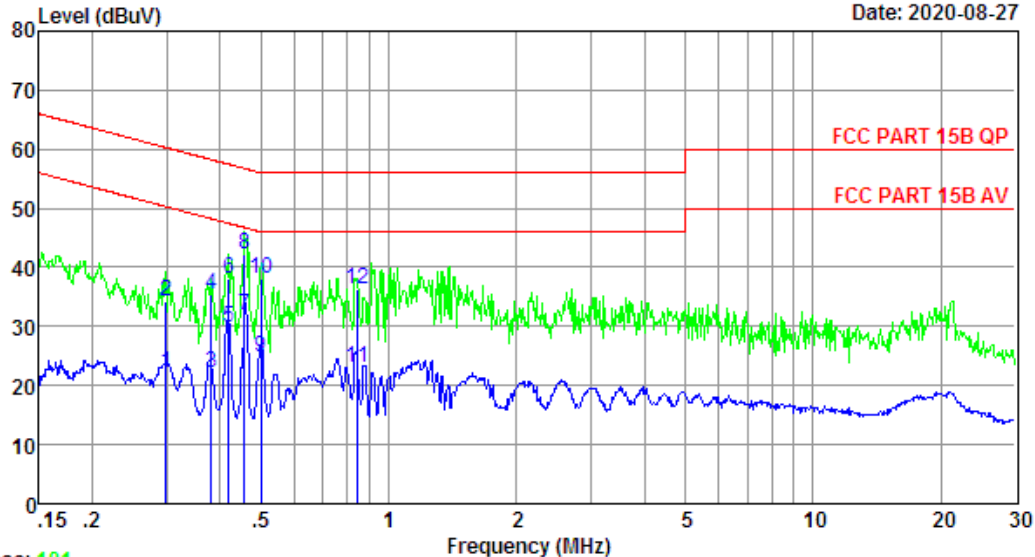

Trace: 181

Site no : 844 Shield Room Data no. : 182
 Env. / Ins. : Temp:23.5°C Humi:58% Press:101.50kPa LINE Phase : LINE
 Limit : FCC PART 15B QP
 Engineer : ZSX
 EUT : 8"Android Tablet
 Power : DC 5V From Adapter Input AC 240V/60Hz
 M/N : 100011885
 Test Mode : TX Mode
 DDR:RS512M32LZ4D2ANP_75BT 2G
 EMMC:MEMA032G 32GB 1.8V
 MEDIATEK MT6357ARU 2010-ANSHDCMJ3JJP

	Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.2987	9.72	9.92	2.54	22.18	50.28	28.10	Average
2	0.2987	9.72	9.92	14.74	34.38	60.28	25.90	QP
3	0.3811	9.72	9.92	2.61	22.25	48.25	26.00	Average
4	0.3811	9.72	9.92	15.78	35.42	58.25	22.83	QP
5	0.4193	9.72	9.92	10.18	29.82	47.46	17.64	Average
6	0.4193	9.72	9.92	18.35	37.99	57.46	19.47	QP
7	0.4564	9.72	9.92	12.31	31.95	46.76	14.81	Average
8	0.4564	9.72	9.92	22.58	42.22	56.76	14.54	QP
9	0.4994	9.72	9.92	5.23	24.87	46.01	21.14	Average
10	0.4994	9.72	9.92	18.53	38.17	56.01	17.84	QP
11	0.8393	9.72	9.93	3.45	23.10	46.00	22.90	Average
12	0.8393	9.72	9.93	16.70	36.35	56.00	19.65	QP

Remarks: 1. Emission Level= LISN Factor + Cable Loss + Reading.
 2. Margin=Limit - Emission Level.
 3. If the average limit is met when using a quasi-peak detector,
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 184

File: \\Emc-ce-1\Test data\2020\RF\C\CHANGCHENG.EM6 (256)

Date: 2020-08-27

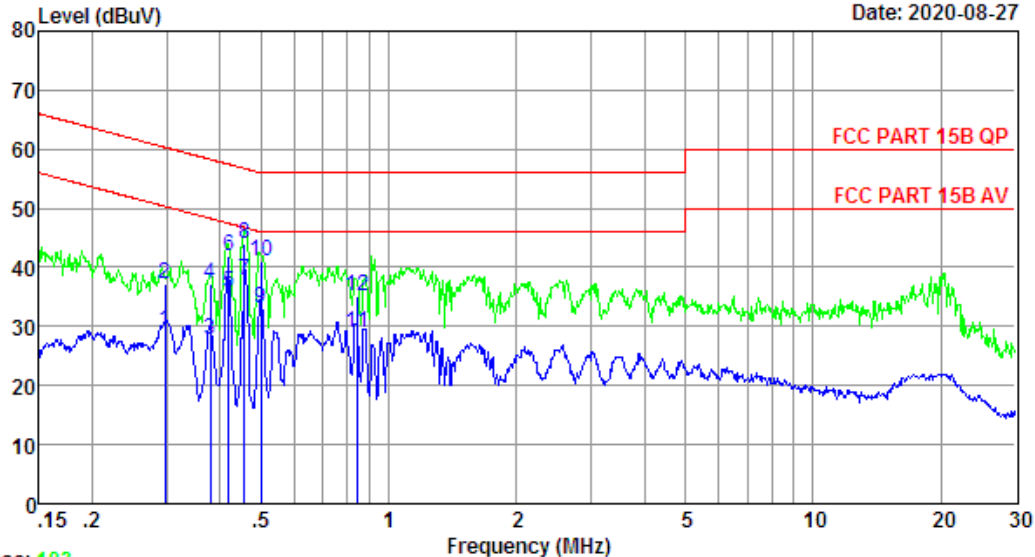

Trace: 183

Site no : 844 Shield Room Data no. : 184
 Env. / Ins. : Temp:23.5°C Humi:58% Press:101.50kPa LINE Phase : NEUTRAL
 Limit : FCC PART 15B QP
 Engineer : ZSX
 EUT : 8"Android Tablet
 Power : DC 5V From Adapter Input AC 240V/60Hz
 M/N : 100011885
 Test Mode : TX Mode
 DDR:RS512M32LZ4D2ANP_75BT 2G
 EMMC:MEMA032G 32GB 1.8V
 MEDIATEK MT6357ARU 2010-ANSHDCMJ3JJP

	Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.2971	9.62	9.92	9.54	29.08	50.32	21.24	Average
2	0.2971	9.62	9.92	17.77	37.31	60.32	23.01	QP
3	0.3791	9.64	9.92	8.32	27.88	48.30	20.42	Average
4	0.3791	9.64	9.92	17.63	37.19	58.30	21.11	QP
5	0.4193	9.64	9.92	16.29	35.85	47.46	11.61	Average
6	0.4193	9.64	9.92	22.37	41.93	57.46	15.53	QP
7	0.4564	9.65	9.92	18.13	37.70	46.76	9.06	Average
8	0.4564	9.65	9.92	24.45	44.02	56.76	12.74	QP
9	0.4994	9.65	9.92	13.40	32.97	46.01	13.04	Average
10	0.4994	9.65	9.92	21.48	41.05	56.01	14.96	QP
11	0.8393	9.70	9.93	9.16	28.79	46.00	17.21	Average
12	0.8393	9.70	9.93	15.46	35.09	56.00	20.91	QP

Remarks: 1. Emission Level= LISN Factor + Cable Loss + Reading.
 2. Margin=Limit - Emission Level.
 3. If the average limit is met when using a quasi-peak detector,
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 210

File: \\Emc-ce-1\Test data\2020\RF\C\CHANGCHENG.EM6 (256)

Date: 2020-08-27

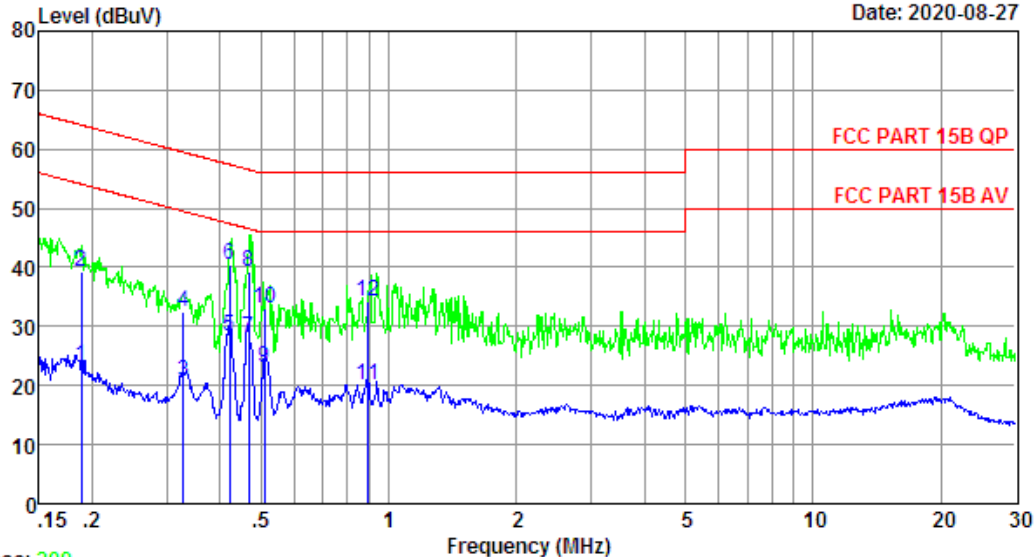

Trace: 209

Site no : 844 Shield Room Data no. : 210
 Env. / Ins. : Temp:23.5'C Humi:58% Press:101.50kPa LINE Phase : LINE
 Limit : FCC PART 15B QP
 Engineer : ZSX
 EUT : 8"Android Tablet
 Power : DC 5V From Adapter Input AC 120V/60Hz
 M/N : 100011885
 Test Mode : TX Mode
 DDR:MDXC1016G-M2 2GB
 EMMC:LTM20007HF-DAB1-SM
 MEDIATEK MT6357ARU 2010-ANSHDCMJ3JJP

	Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.1884	9.73	9.77	3.79	23.29	54.11	30.82	Average
2	0.1884	9.73	9.77	19.86	39.36	64.11	24.75	QP
3	0.3286	9.72	9.92	0.92	20.56	49.49	28.93	Average
4	0.3286	9.72	9.92	12.76	32.40	59.49	27.09	QP
5	0.4215	9.72	9.92	8.56	28.20	47.42	19.22	Average
6	0.4215	9.72	9.92	20.68	40.32	57.42	17.10	QP
7	0.4686	9.72	9.92	8.30	27.94	46.54	18.60	Average
8	0.4686	9.72	9.92	19.48	39.12	56.54	17.42	QP
9	0.5101	9.72	9.92	3.28	22.92	46.00	23.08	Average
10	0.5101	9.72	9.92	13.47	33.11	56.00	22.89	QP
11	0.8944	9.72	9.94	0.43	20.09	46.00	25.91	Average
12	0.8944	9.72	9.94	14.58	34.24	56.00	21.76	QP

Remarks: 1. Emission Level= LISN Factor + Cable Loss + Reading.
 2. Margin=Limit - Emission Level.
 3. If the average limit is met when using a quasi-peak detector,
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 212

File: \\Emc-ce-1\Test data\2020\RF\C\CHANGCHENG.EM6 (256)

Date: 2020-08-27

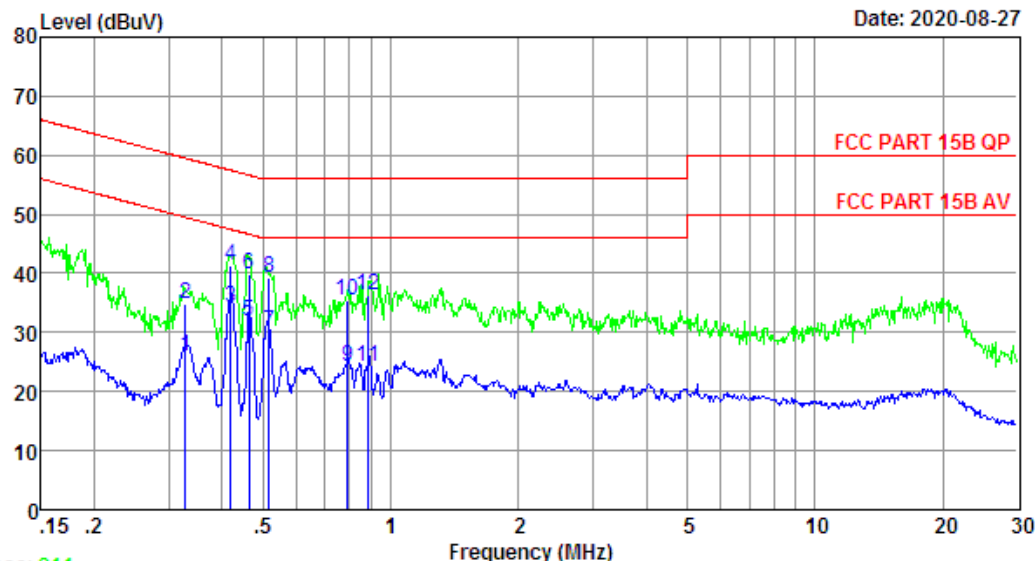

Trace: 211

Site no : 844 Shield Room Data no. : 212
 Env. / Ins. : Temp:23.5'C Humi:58% Press:101.50kPa LINE Phase : NEUTRAL
 Limit : FCC PART 15B QP
 Engineer : ZSX
 EUT : 8"Android Tablet
 Power : DC 5V From Adapter Input AC 120V/60Hz
 M/N : 100011885
 Test Mode : TX Mode
 DDR:MDXC1016G-M2 2GB
 EMMC:LTM20007HF-DAB1-SM
 MEDIATEK MT6357ARU 2010-ANSHDCMJ3JJP

	Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.3286	9.63	9.92	6.41	25.96	49.49	23.53	Average
2	0.3286	9.63	9.92	15.35	34.90	59.49	24.59	QP
3	0.4193	9.64	9.92	14.71	34.27	47.46	13.19	Average
4	0.4193	9.64	9.92	21.84	41.40	57.46	16.06	QP
5	0.4637	9.65	9.92	12.26	31.83	46.63	14.80	Average
6	0.4637	9.65	9.92	20.34	39.91	56.63	16.72	QP
7	0.5155	9.65	9.92	10.53	30.10	46.00	15.90	Average
8	0.5155	9.65	9.92	19.68	39.25	56.00	16.75	QP
9	0.7918	9.70	9.93	4.57	24.20	46.00	21.80	Average
10	0.7918	9.70	9.93	15.75	35.38	56.00	20.62	QP
11	0.8850	9.72	9.93	4.42	24.07	46.00	21.93	Average
12	0.8850	9.72	9.93	16.75	36.40	56.00	19.60	QP

Remarks: 1. Emission Level= LISN Factor + Cable Loss + Reading.
 2. Margin=Limit - Emission Level.
 3. If the average limit is met when using a quasi-peak detector,
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 214

File: \\Emc-ce-1\Test data\2020\RF\C\CHANGCHENG.EM6 (256)

Date: 2020-08-27

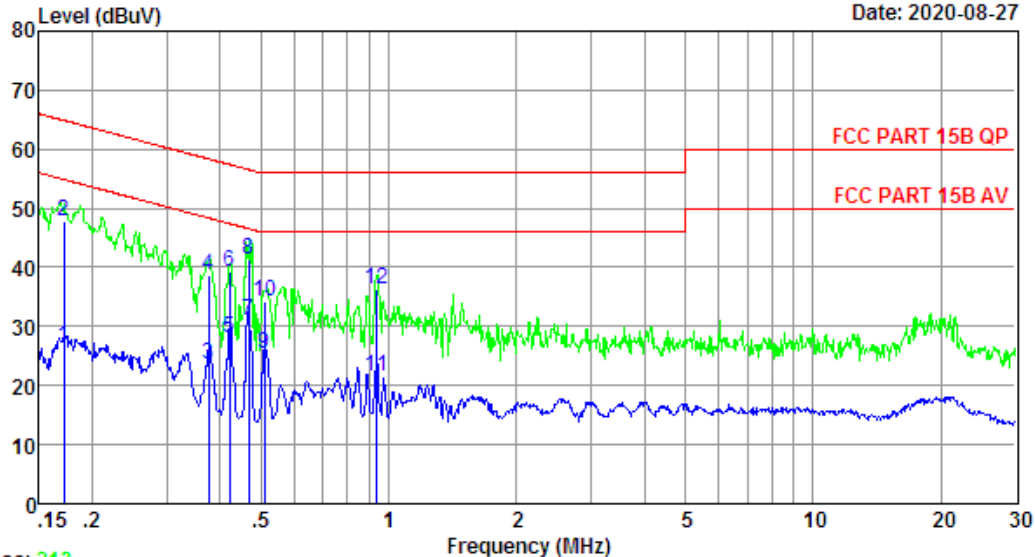

Trace: 213

Site no : 844 Shield Room Data no. : 214
 Env. / Ins. : Temp:23.5°C Humi:58% Press:101.50kPa LINE Phase : LINE
 Limit : FCC PART 15B QP
 Engineer : ZSX
 EUT : 8"Android Tablet
 Power : DC 5V From Adapter Input AC 240V/60Hz
 M/N : 100011885
 Test Mode : TX Mode
 DDR:MDXC1016G-M2 2GB
 EMMC:LTM20007HF-DAB1-SM
 MEDIATEK MT6357ARU 2010-ANSHDCMJ3JJP

	Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.1712	9.73	9.69	7.21	26.63	54.90	28.27	Average
2	0.1712	9.73	9.69	28.46	47.88	64.90	17.02	QP
3	0.3771	9.72	9.92	3.87	23.51	48.34	24.83	Average
4	0.3771	9.72	9.92	18.94	38.58	58.34	19.76	QP
5	0.4215	9.72	9.92	8.50	28.14	47.42	19.28	Average
6	0.4215	9.72	9.92	19.77	39.41	57.42	18.01	QP
7	0.4686	9.72	9.92	11.41	31.05	46.54	15.49	Average
8	0.4686	9.72	9.92	21.54	41.18	56.54	15.36	QP
9	0.5101	9.72	9.92	5.61	25.25	46.00	20.75	Average
10	0.5101	9.72	9.92	14.58	34.22	56.00	21.78	QP
11	0.9381	9.72	9.94	1.90	21.56	46.00	24.44	Average
12	0.9381	9.72	9.94	16.79	36.45	56.00	19.55	QP

Remarks: 1. Emission Level= LISN Factor + Cable Loss + Reading.
 2. Margin=Limit - Emission Level.
 3. If the average limit is met when using a quasi-peak detector,
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 216

File: \\Emc-ce-1\Test data\2020\RF\C\CHANGCHENG.EM6 (256)

Date: 2020-08-27

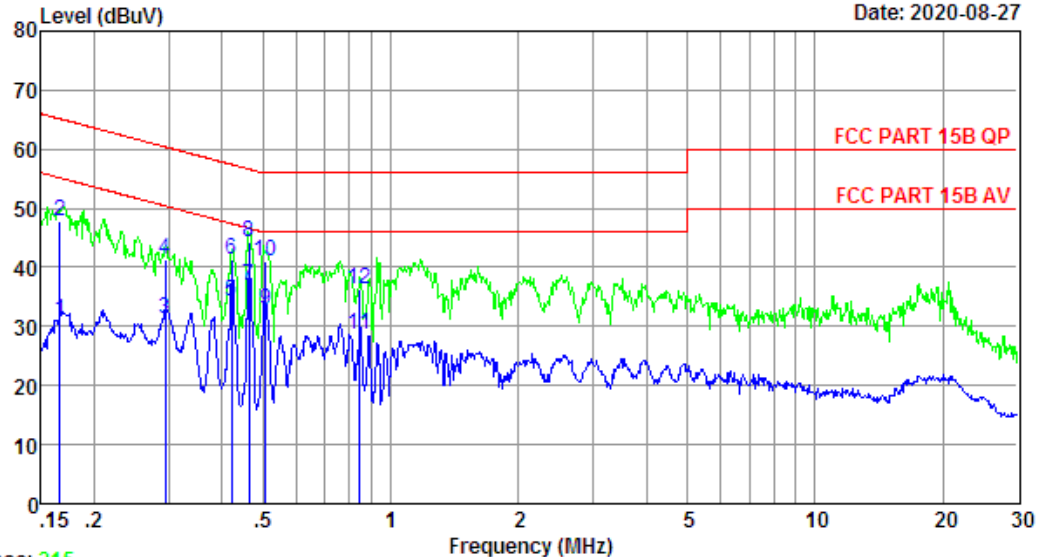

Trace: 215

Site no : 844 Shield Room Data no. : 216
 Env. / Ins. : Temp:23.5'C Humi:58% Press:101.50kPa LINE Phase : NEUTRAL
 Limit : FCC PART 15B QP
 Engineer : ZSX
 EUT : 8"Android Tablet
 Power : DC 5V From Adapter Input AC 240V/60Hz
 M/N : 100011885
 Test Mode : TX Mode
 DDR:MDXC1016G-M2 2GB
 EMMC:LTMZ0007HF-DAB1-SM
 MEDIATEK MT6357ARU 2010-ANSHDCMJ3JJP

	Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.1659	9.61	9.69	11.82	31.12	55.16	24.04	Average
2	0.1659	9.61	9.69	28.58	47.88	65.16	17.28	QP
3	0.2940	9.62	9.92	11.83	31.37	50.41	19.04	Average
4	0.2940	9.62	9.92	21.74	41.28	60.41	19.13	QP
5	0.4215	9.64	9.92	14.67	34.23	47.42	13.19	Average
6	0.4215	9.64	9.92	21.76	41.32	57.42	16.10	QP
7	0.4637	9.65	9.92	17.35	36.92	46.63	9.71	Average
8	0.4637	9.65	9.92	24.75	44.32	56.63	12.31	QP
9	0.5074	9.65	9.92	13.29	32.86	46.00	13.14	Average
10	0.5074	9.65	9.92	21.37	40.94	56.00	15.06	QP
11	0.8438	9.71	9.93	8.86	28.50	46.00	17.50	Average
12	0.8438	9.71	9.93	16.75	36.39	56.00	19.61	QP

Remarks: 1. Emission Level= LISN Factor + Cable Loss + Reading.
 2. Margin=Limit - Emission Level.
 3. If the average limit is met when using a quasi-peak detector,
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 242

File: \\Emc-ce-1\Test data\2020\RF\C\CHANGCHENG.EM6 (256)

Date: 2020-08-27

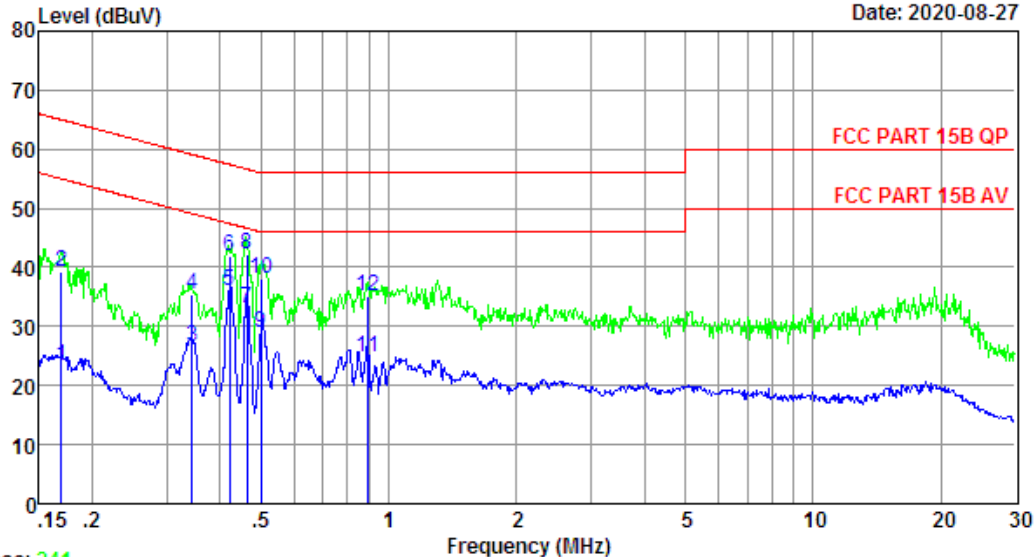

Trace: 241

Site no : 844 Shield Room Data no. : 242
 Env. / Ins. : Temp:23.5°C Humi:58% Press:101.50kPa LINE Phase : NEUTRAL
 Limit : FCC PART 15B QP
 Engineer : ZSX
 EUT : 8"Android Tablet
 Power : DC 5V From Adapter Input AC 120V/60Hz
 M/N : 100011885
 Test Mode : TX Mode
 DDR:RS512M32LM4D2BDS-53BT 2GB
 EMMC:EMMC32G-TA28 32GB
 MEDIATEK MT6357ARU 2010-ANSHDCMJ3JJP

	Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.1694	9.61	9.69	3.90	23.20	54.99	31.79	Average
2	0.1694	9.61	9.69	19.84	39.14	64.99	25.85	QP
3	0.3446	9.63	9.92	6.95	26.50	49.09	22.59	Average
4	0.3446	9.63	9.92	15.73	35.28	59.09	23.81	QP
5	0.4215	9.64	9.92	16.35	35.91	47.42	11.51	Average
6	0.4215	9.64	9.92	22.47	42.03	57.42	15.39	QP
7	0.4637	9.65	9.92	13.56	33.13	46.63	13.50	Average
8	0.4637	9.65	9.92	22.63	42.20	56.63	14.43	QP
9	0.4994	9.65	9.92	9.44	29.01	46.01	17.00	Average
10	0.4994	9.65	9.92	18.63	38.20	56.01	17.81	QP
11	0.8944	9.72	9.94	5.14	24.80	46.00	21.20	Average
12	0.8944	9.72	9.94	15.46	35.12	56.00	20.88	QP

Remarks: 1. Emission Level= LISN Factor + Cable Loss + Reading.
 2. Margin=Limit - Emission Level.
 3. If the average limit is met when using a quasi-peak detector,
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 244

File: \\Emc-ce-1\Test data\2020\RF\C\CHANGCHENG.EM6 (256)

Date: 2020-08-27

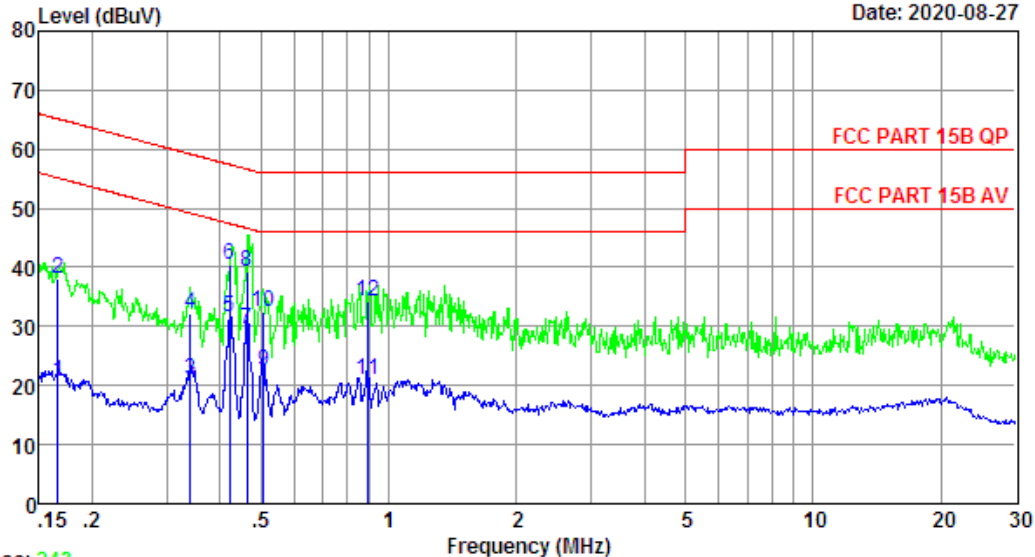

Trace: 243

Site no : 844 Shield Room Data no. : 244
 Env. / Ins. : Temp:23.5°C Humi:58% Press:101.50kPa LINE Phase : LINE
 Limit : FCC PART 15B QP
 Engineer : ZSX
 EUT : 8"Android Tablet
 Power : DC 5V From Adapter Input AC 120V/60Hz
 M/N : 100011885
 Test Mode : TX Mode
 DDR:RS512M32LM4D2BDS-53BT 2GB
 EMMC:EMMC32G-TA28 32GB
 MEDIATEK MT6357ARU 2010-ANSHDCMJ3JJP

	Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.1659	9.73	9.69	1.33	20.75	55.16	34.41	Average
2	0.1659	9.73	9.69	18.58	38.00	65.16	27.16	QP
3	0.3410	9.72	9.92	1.44	21.08	49.18	28.10	Average
4	0.3410	9.72	9.92	12.63	32.27	59.18	26.91	QP
5	0.4215	9.72	9.92	11.93	31.57	47.42	15.85	Average
6	0.4215	9.72	9.92	20.83	40.47	57.42	16.95	QP
7	0.4637	9.72	9.92	9.74	29.38	46.63	17.25	Average
8	0.4637	9.72	9.92	19.63	39.27	56.63	17.36	QP
9	0.5074	9.72	9.92	2.90	22.54	46.00	23.46	Average
10	0.5074	9.72	9.92	12.84	32.48	56.00	23.52	QP
11	0.8944	9.72	9.94	1.36	21.02	46.00	24.98	Average
12	0.8944	9.72	9.94	14.46	34.12	56.00	21.88	QP

Remarks: 1. Emission Level= LISN Factor + Cable Loss + Reading.
 2. Margin=Limit - Emission Level.
 3. If the average limit is met when using a quasi-peak detector,
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 246

File: \\Emc-ce-1\Test data\2020\RF\C\CHANGCHENG.EM6 (256)

Date: 2020-08-27

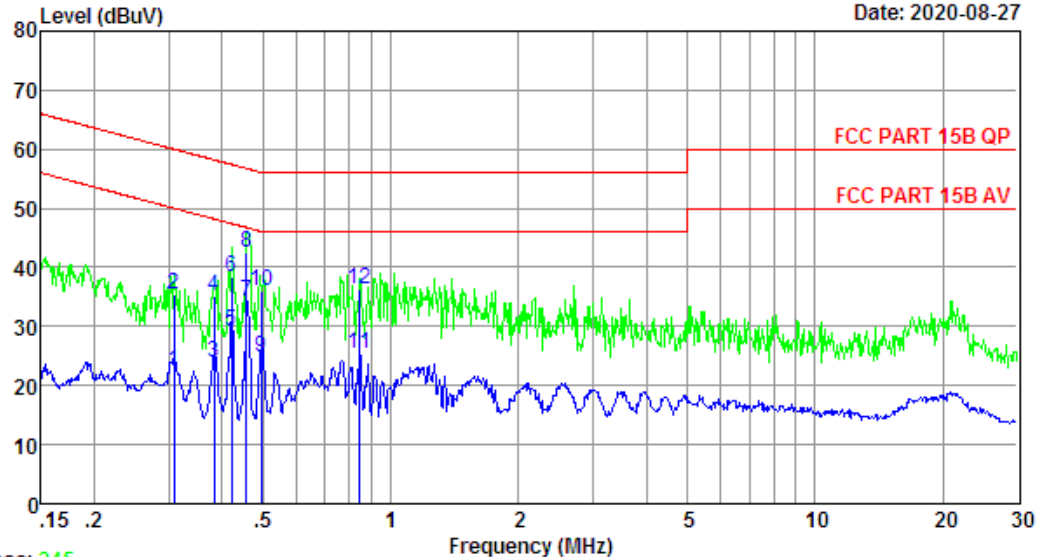

Trace: 245

Site no : 844 Shield Room Data no. : 246
 Env. / Ins. : Temp:23.5°C Humi:58% Press:101.50kPa LINE Phase : LINE
 Limit : FCC PART 15B QP
 Engineer : ZSX
 EUT : 8"Android Tablet
 Power : DC 5V From Adapter Input AC 240V/60Hz
 M/N : 100011885
 Test Mode : TX Mode
 DDR:RS512M32LM4D2BDS-53BT 2GB
 EMMC:EMMC32G-TA28 32GB
 MEDIATEK MT6357ARU 2010-ANSHDCMJ3JJP

	Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.3083	9.72	9.92	2.81	22.45	50.02	27.57	Average
2	0.3083	9.72	9.92	15.75	35.39	60.02	24.63	QP
3	0.3832	9.72	9.92	4.34	23.98	48.21	24.23	Average
4	0.3832	9.72	9.92	15.51	35.15	58.21	23.06	QP
5	0.4215	9.72	9.92	9.52	29.16	47.42	18.26	Average
6	0.4215	9.72	9.92	18.69	38.33	57.42	19.09	QP
7	0.4564	9.72	9.92	14.61	34.25	46.76	12.51	Average
8	0.4564	9.72	9.92	22.73	42.37	56.76	14.39	QP
9	0.4941	9.72	9.92	5.09	24.73	46.10	21.37	Average
10	0.4941	9.72	9.92	16.36	36.00	56.10	20.10	QP
11	0.8438	9.72	9.93	5.60	25.25	46.00	20.75	Average
12	0.8438	9.72	9.93	16.74	36.39	56.00	19.61	QP

Remarks: 1. Emission Level= LISN Factor + Cable Loss + Reading.
 2. Margin=Limit - Emission Level.
 3. If the average limit is met when using a quasi-peak detector,
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 248

File: \\Emc-ce-1\Test data\2020\RF\C\CHANGCHENG.EM6 (256)

Date: 2020-08-27

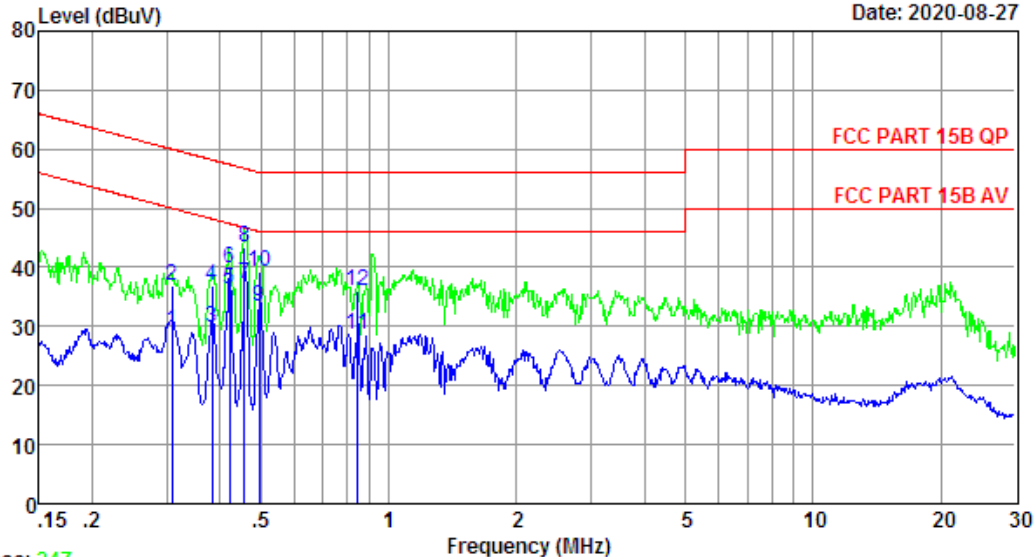

Trace: 247



Site no : 844 Shield Room Data no. : 248
 Env. / Ins. : Temp:23.5°C Humi:58% Press:101.50kPa LINE Phase : NEUTRAL
 Limit : FCC PART 15B QP
 Engineer : ZSX
 EUT : 8"Android Tablet
 Power : DC 5V From Adapter Input AC 240V/60Hz
 M/N : 100011885
 Test Mode : TX Mode
 DDR:RS512M32LM4D2BDS-53BT 2GB
 EMMC:EMMC32G-TA28 32GB
 MEDIATEK MT6357ARU 2010-ANSHDCMJ3JJP

	Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.3083	9.63	9.92	9.61	29.16	50.02	20.86	Average
2	0.3083	9.63	9.92	17.46	37.01	60.02	23.01	QP
3	0.3832	9.64	9.92	10.14	29.70	48.21	18.51	Average
4	0.3832	9.64	9.92	17.34	36.90	58.21	21.31	QP
5	0.4215	9.64	9.92	16.80	36.36	47.42	11.06	Average
6	0.4215	9.64	9.92	20.38	39.94	57.42	17.48	QP
7	0.4564	9.65	9.92	17.77	37.34	46.76	9.42	Average
8	0.4564	9.65	9.92	23.84	43.41	56.76	13.35	QP
9	0.4941	9.65	9.92	13.72	33.29	46.10	12.81	Average
10	0.4941	9.65	9.92	19.83	39.40	56.10	16.70	QP
11	0.8438	9.71	9.93	9.04	28.68	46.00	17.32	Average
12	0.8438	9.71	9.93	16.45	36.09	56.00	19.91	QP


Remarks: 1. Emission Level= LISN Factor + Cable Loss + Reading.
 2. Margin=Limit - Emission Level.
 3. If the average limit is met when using a quasi-peak detector,
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.

5. TEST SETUP PHOTO

Conducted Test

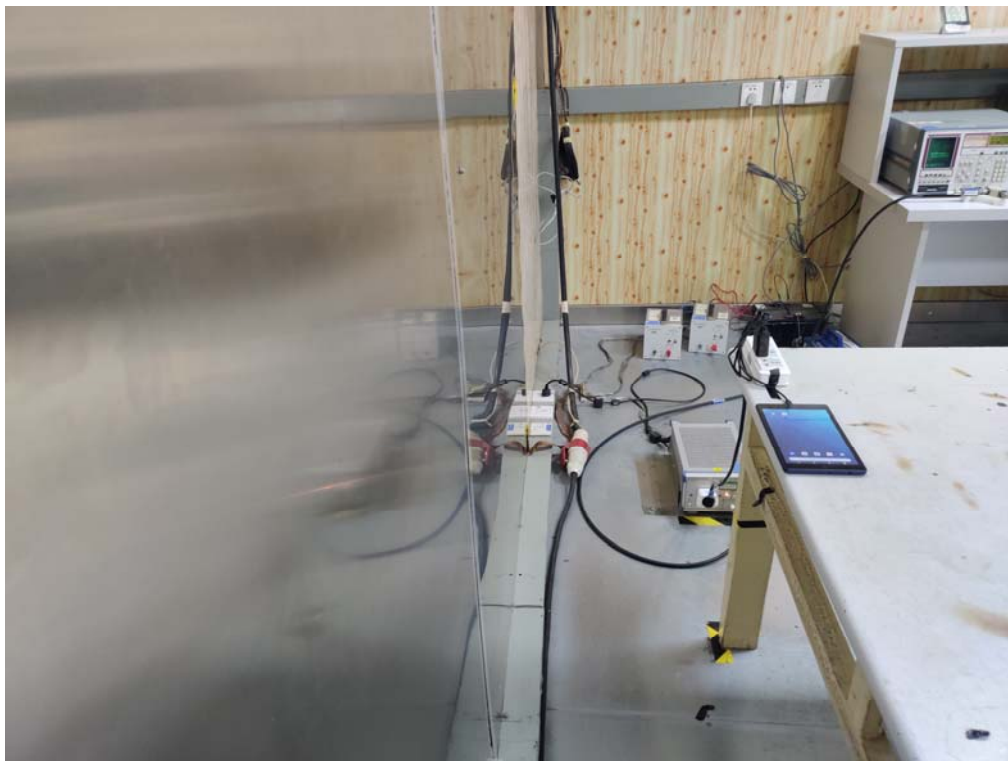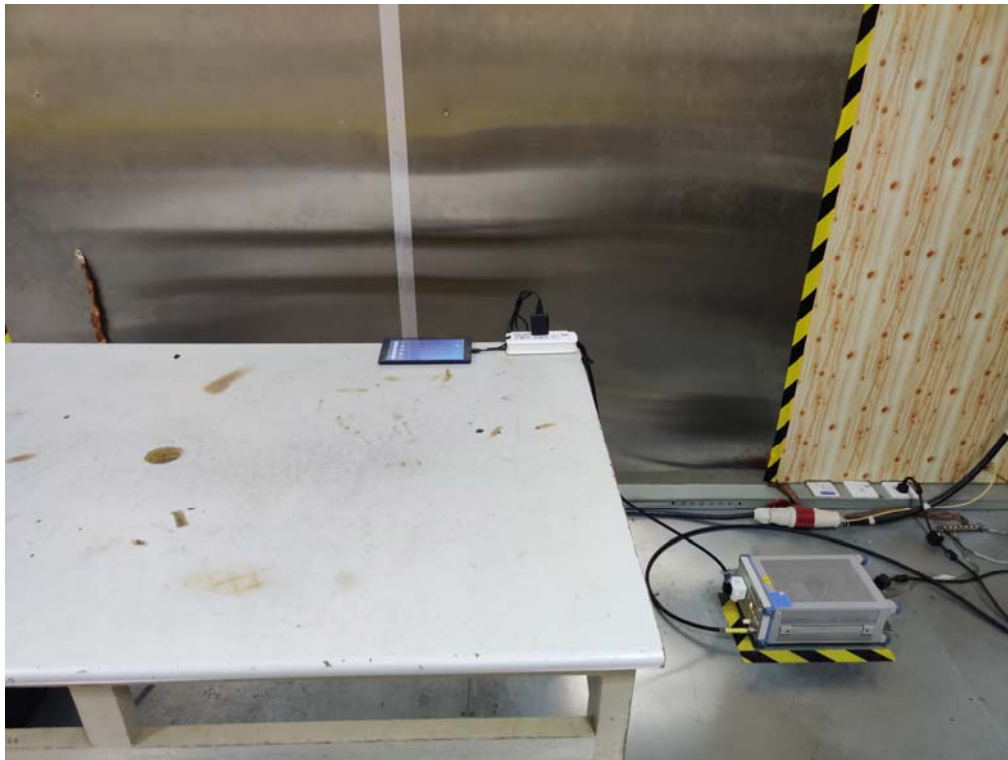

Radiated Test (Below 1GHz)

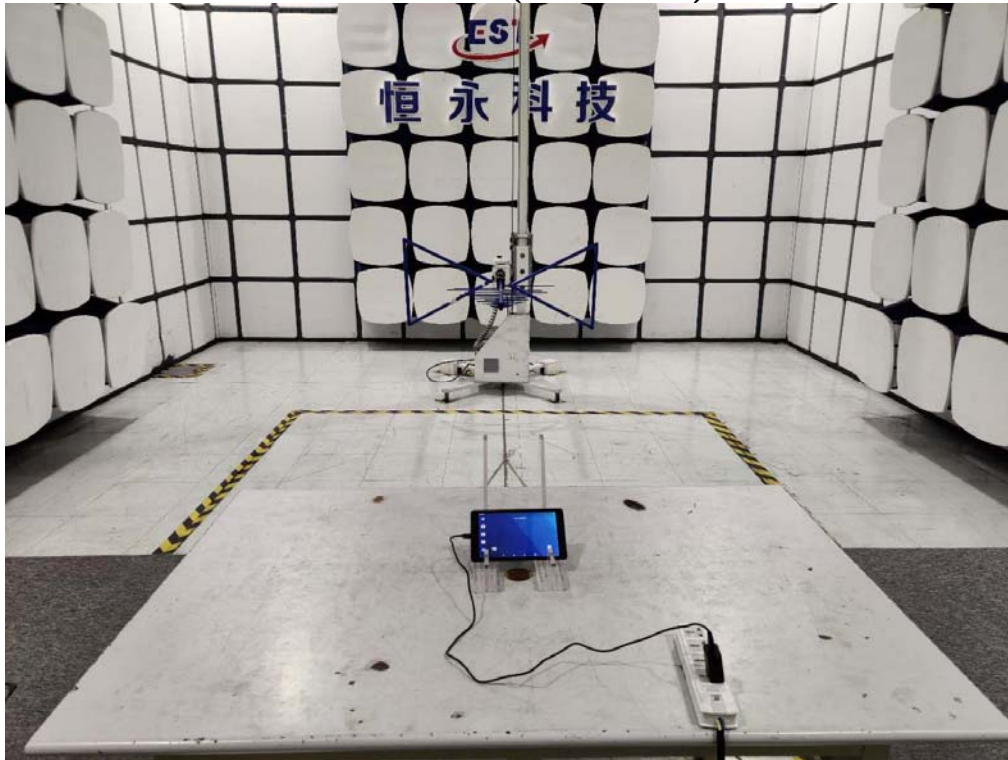


6. EUT PHOTO

External Photos



M/N: 100011885



External Photos
M/N: 100011885

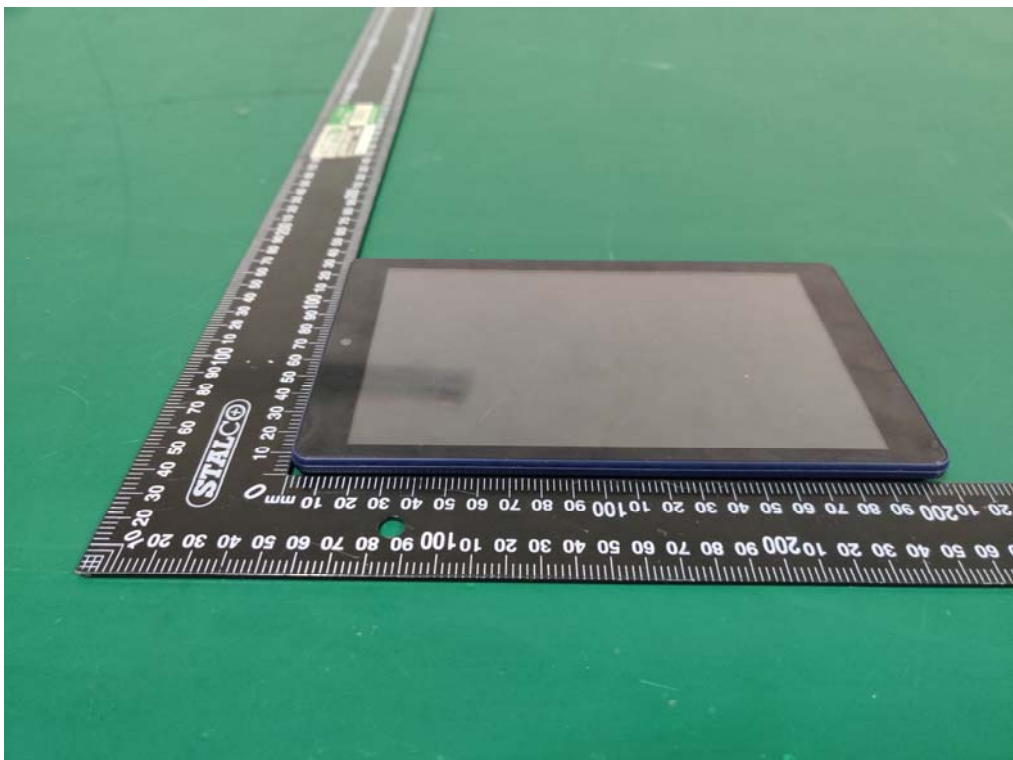

External Photos
M/N: 100011885

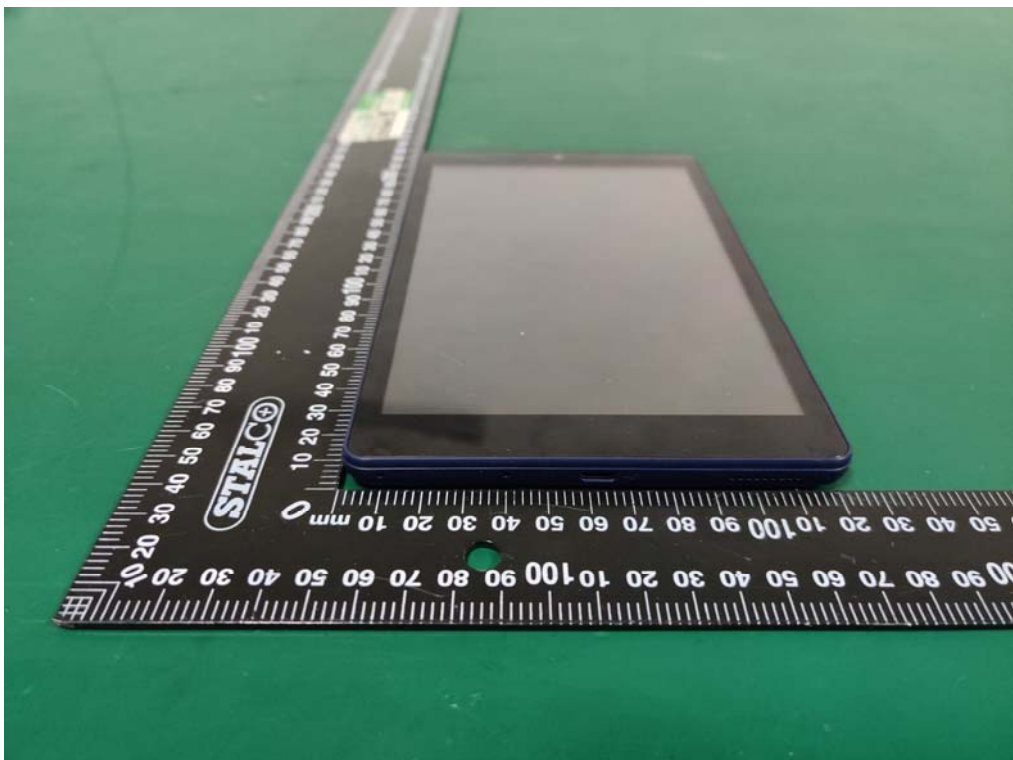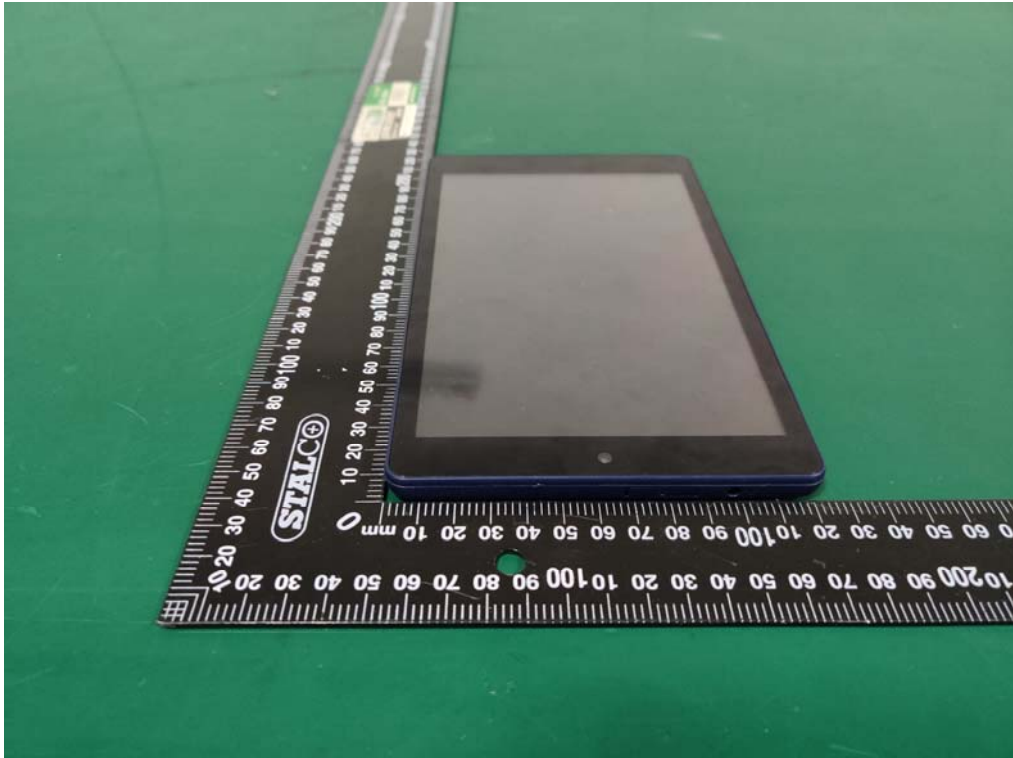

Power Supply



Power Supply



Mainboard Model No.: RS512M32LZ4D2ANP_75BT 2G & MEMA032G 32GB 1.8V


Internal Photos
M/N: 100011885



Internal Photos
M/N: 100011885




Internal Photos
M/N: 100011885

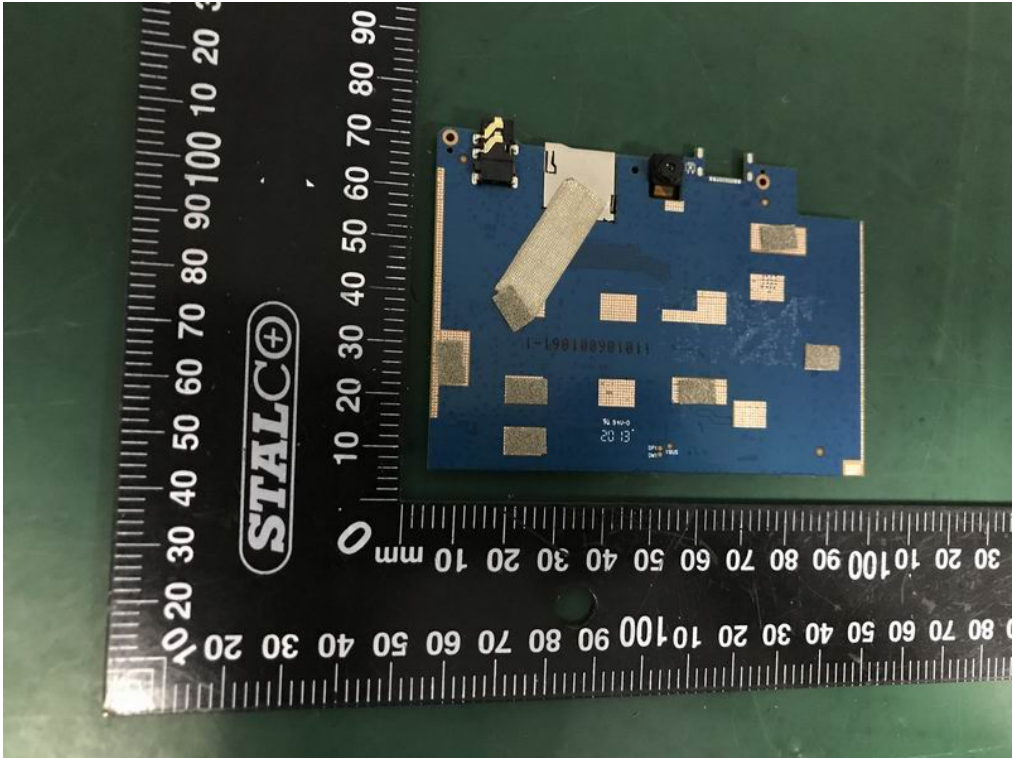


Mainboard Model No.: MDXC1016G-M2 2GB & LTMZ0007HF-DAB1-SM

Internal Photos

M/N: 100011885

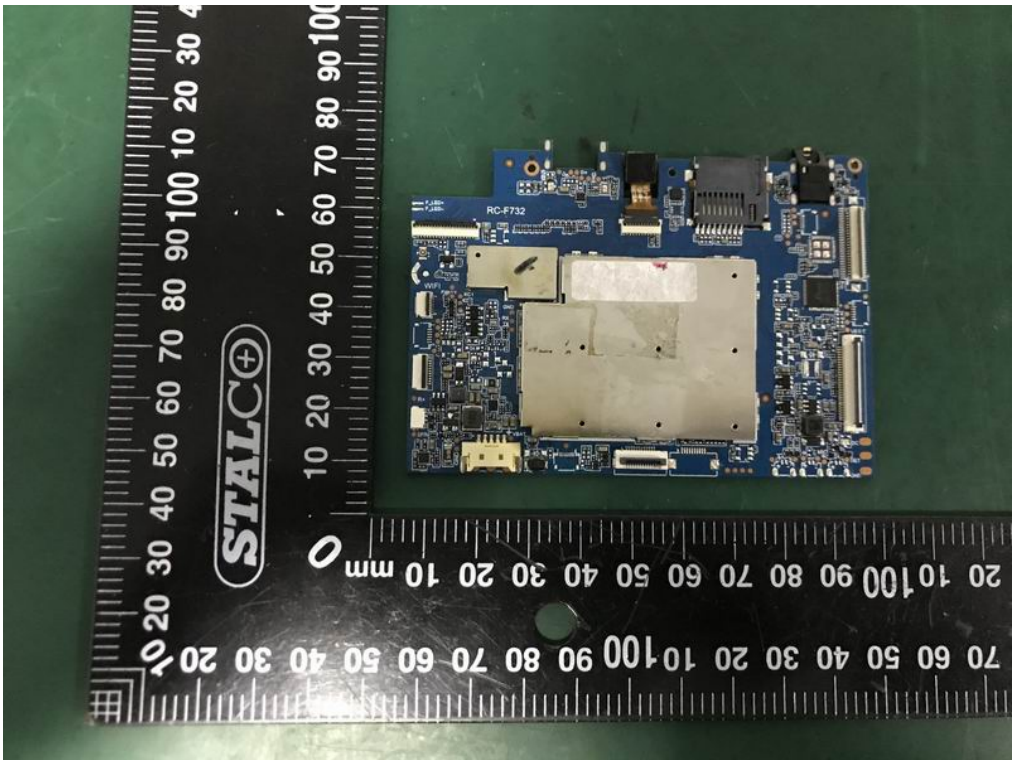



Internal Photos
M/N: 100011885

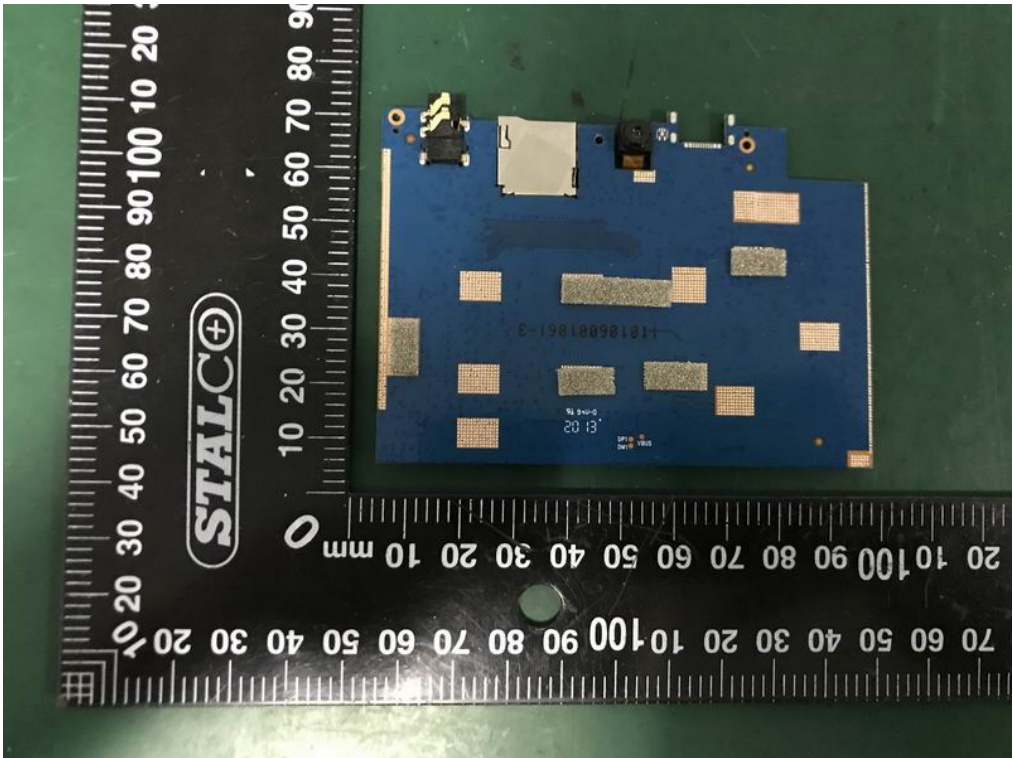



Mainboard Model No.: RS512M32LM4D2BDS-53BT 2GB & EMMC32G-TA28 32GB

Internal Photos

M/N: 100011885

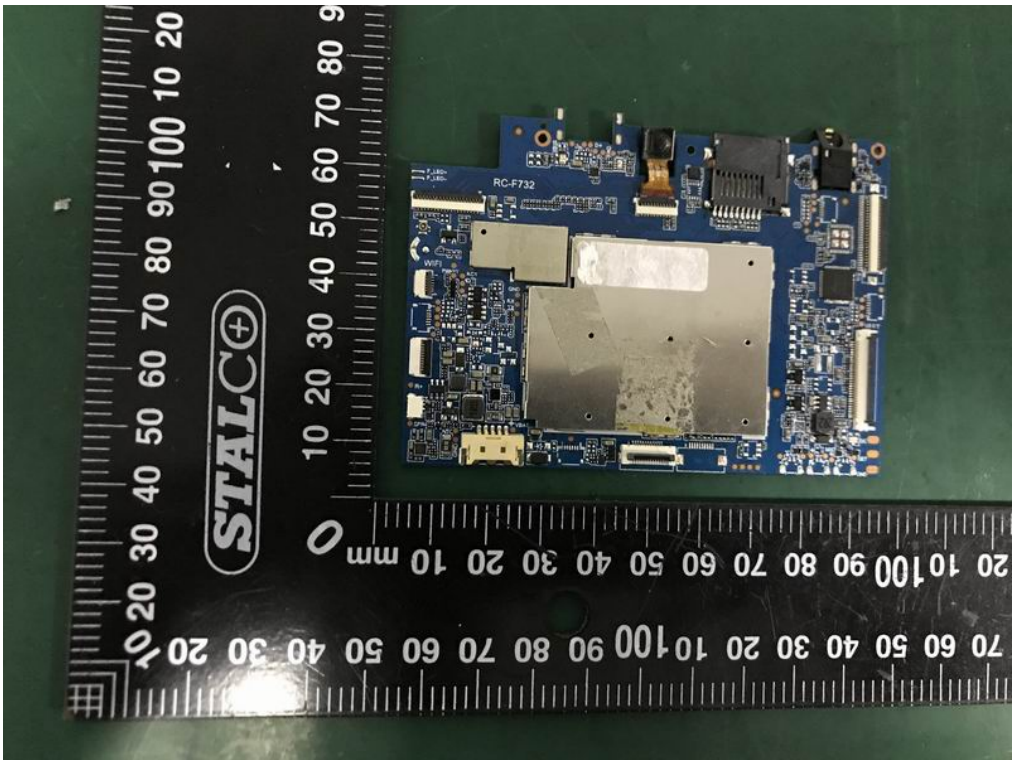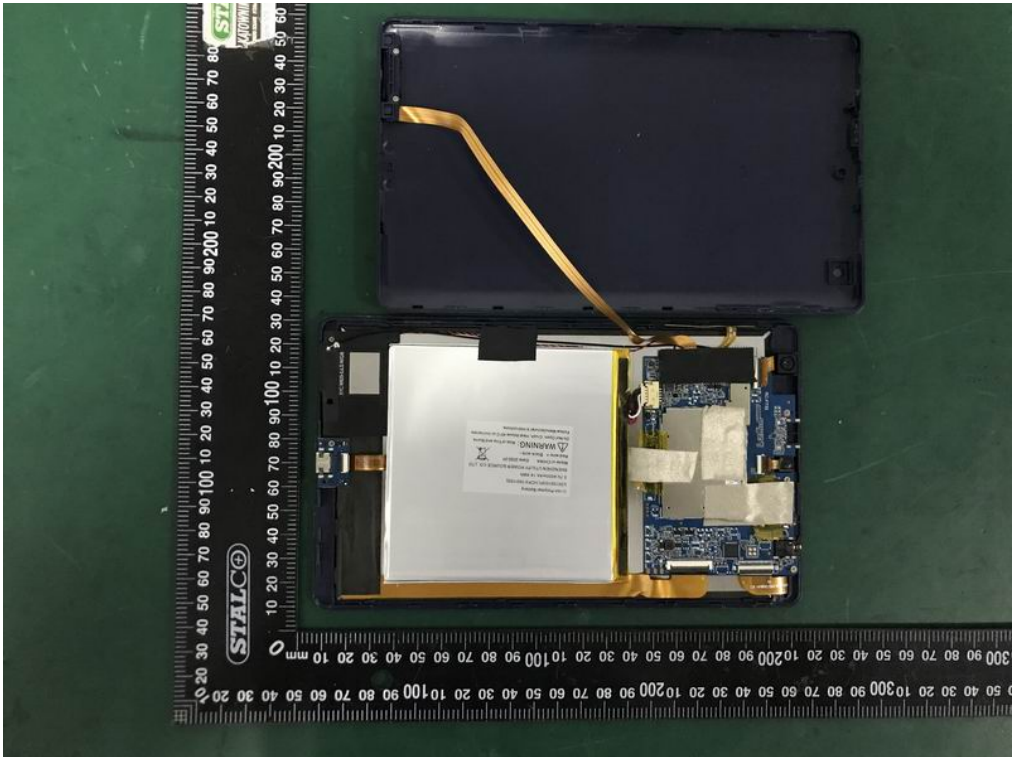

Internal Photos
M/N: 100011885

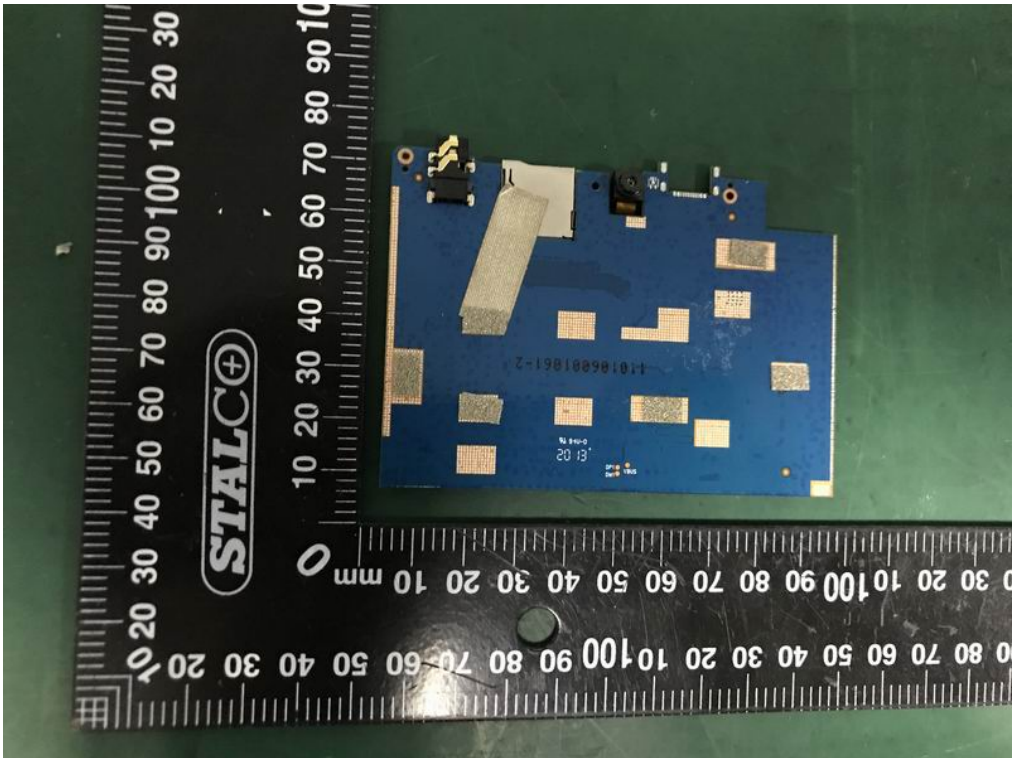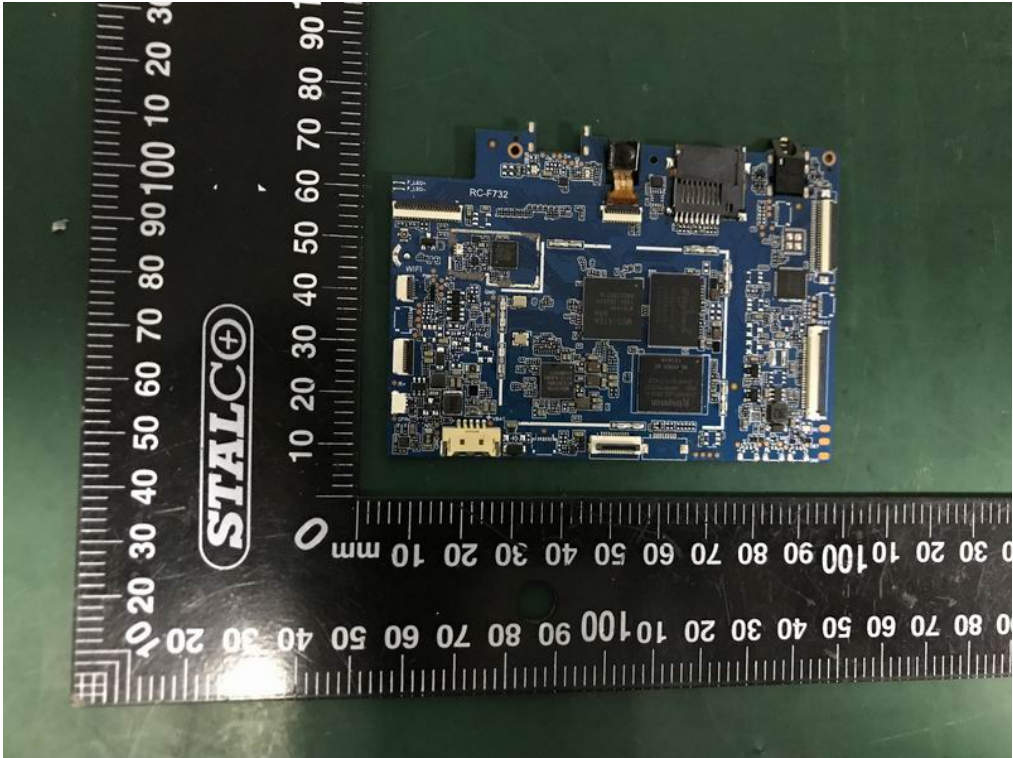

End of Test Report