

FCC REPORT

Applicant: Riello S.p.A

Address of Applicant: Via Ing. Pilade Riello, Legnago 37045 Italy

Manufacturer/Factory: Shenzhen Allied Control System Co.,LTD

Address of Manufacturer/Factory: Topband Industrial Park, Liyuan Industrial Zone, Shiyan Town, Bao An District, Shenzhen City, Guangdong Province, P.R..China

Equipment Under Test (EUT)

Product Name: RiCLOUD NA WiFi Thermostat

Model No.: 20142445

Trade Mark: **RIELLO**

FCC ID: 2APVA-20142445

Applicable standards: FCC CFR Title 47 Part 15 Subpart C Section 15.249

Date of sample receipt: March 12, 2018

Date of Test: March 12, 2018 - April 10, 2018

Date of report issued: April 10, 2018

Test Result : PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Robinson Lo

Laboratory Manager

This results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

2 Version

Version No.	Date	Description
00	April 10, 2018	Original

Prepared By:




Date:

April 10, 2018

Project Engineer

Check By:



Date:

April 10, 2018

Reviewer

3 Contents

	Page
1 COVER PAGE.....	1
2 VERSION	2
3 CONTENTS	3
4 TEST SUMMARY	4
4.1 MEASUREMENT UNCERTAINTY	4
5 GENERAL INFORMATION	5
5.1 GENERAL DESCRIPTION OF EUT	5
5.2 TEST MODE	7
5.3 DESCRIPTION OF SUPPORT UNITS	7
5.4 TEST FACILITY	7
5.5 TEST LOCATION	7
5.6 ADDITIONAL INSTRUCTIONS	8
6 TEST INSTRUMENTS LIST	9
7 TEST RESULTS AND MEASUREMENT DATA.....	10
7.1 ANTENNA REQUIREMENT	10
7.2 CONDUCTED EMISSIONS	11
7.3 RADIATED EMISSION METHOD	15
7.3.1 Field Strength of The Fundamental Signal	17
7.3.2 Spurious emissions.....	18
7.3.3 Bandedge emissions.....	21
7.4 20dB OCCUPY BANDWIDTH	22
8 TEST SETUP PHOTO	24
9 EUT CONSTRUCTIONAL DETAILS	26

4 Test Summary

Test Item	Section in CFR 47	Result
Antenna requirement	15.203	Pass
AC Power Line Conducted Emission	15.207	Pass
Field strength of the fundamental signal	15.249 (a)	Pass
Spurious emissions	15.249 (a) (d)/15.209	Pass
Band edge	15.249 (d)/15.205	Pass
20dB Occupied Bandwidth	15.215 (c)	Pass

Pass: The EUT complies with the essential requirements in the standard.

Remark: Test according to ANSI C63.10: 2013 and ANSI C63.4: 2014.

4.1 Measurement Uncertainty

Test Item	Frequency Range	Measurement Uncertainty	Notes
Radiated Emission	9kHz ~ 30MHz	$\pm 4.34\text{dB}$	(1)
Radiated Emission	30MHz ~ 1000MHz	$\pm 4.24\text{dB}$	(1)
Radiated Emission	1GHz ~ 26.5GHz	$\pm 4.68\text{dB}$	(1)
AC Power Line Conducted Emission	0.15MHz ~ 30MHz	$\pm 3.45\text{dB}$	(1)

Note (1): The measurement uncertainty is for coverage factor of $k=2$ and a level of confidence of 95%.

5 General Information

5.1 General Description of EUT

Product Name:	RiCLOUD NA WiFi Thermostat
Model No.:	20142445
Test Model No:	20142445
<i>Remark: All above models are identical in the same PCB layout, interior structure and electrical circuits. The differences are color and model name for commercial purpose.</i>	
Quantity of tested samples	1
Serial No.:	N/A
Test sample(s) ID:	N/A
Sample(s) Status	Engineer sample
Hardware:	N/A
Software:	N/A
Operation Frequency:	915MHz
Channel numbers:	1
Channel separation:	/
Modulation type:	FSK
Antenna Type:	PCB antenna
Antenna gain:	0 dBi(declare by Applicant)
Power supply:	DC 5V From USB With Adapter

Operation Frequency each of channel	
Channel	Frequency
1	915MHz

5.2 Test mode

Transmitting mode	Keep the EUT in continuously transmitting mode.
<i>Remark: During the test, the dutycycle >98%, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.</i>	

Per-test mode.

We have verified the construction and function in typical operation, The EUT was placed on three different polar directions; i.e. X axis, Y axis, Z axis. X axis is worse case and reported:

Axis	X	Y	Z
Field Strength(dBuV/m)	92.76	86.25	85.77

5.3 Description of Support Units

None

5.4 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC —Registration No.: 381383**

Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 381383, January 08, 2018.

- **Industry Canada (IC) —Registration No.: 9079A-2**

The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A-2, August 15, 2016

5.5 Test Location

All tests were performed at:
Global United Technology Services Co., Ltd. Address: No. 301-309, 3/F., Jinyuan Business Building, No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, Guangdong, China 518102 Tel: 0755-27798480 Fax: 0755-27798960

5.6 Additional instructions

Software (Used for test) from client

Mode	/
------	---

Channel	Power level
1	Default

6 Test Instruments list

Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	July 03 2015	July 02 2020
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	Spectrum Analyzer	Agilent	E4440A	GTS533	June 28 2017	June 27 2018
4	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	June 28 2017	June 27 2018
5	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	GTS214	June 28 2017	June 27 2018
6	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	9120D-829	GTS208	June 28 2017	June 27 2018
7	Horn Antenna	ETS-LINDGREN	3160	GTS217	June 28 2017	June 27 2018
8	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
9	Coaxial Cable	GTS	N/A	GTS213	June 28 2017	June 27 2018
10	Coaxial Cable	GTS	N/A	GTS211	June 28 2017	June 27 2018
11	Coaxial cable	GTS	N/A	GTS210	June 28 2017	June 27 2018
12	Coaxial Cable	GTS	N/A	GTS212	June 28 2017	June 27 2018
13	Amplifier(100kHz-3GHz)	HP	8347A	GTS204	June 28 2017	June 27 2018
14	Amplifier(2GHz-20GHz)	HP	8349B	GTS206	June 28 2017	June 27 2018
15	Amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	June 28 2017	June 27 2018
16	Band filter	Amindeon	82346	GTS219	June 28 2017	June 27 2018
17	Power Meter	Anritsu	ML2495A	GTS540	June 28 2017	June 27 2018
18	Power Sensor	Anritsu	MA2411B	GTS541	June 28 2017	June 27 2018

Conducted Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Shielding Room	ZhongYu Electron	7.3(L)x3.1(W)x2.9(H)	GTS252	May.16 2014	May.15 2019
2	EMI Test Receiver	R&S	ESCI 7	GTS552	June 28 2017	June 27 2018
3	Coaxial Switch	ANRITSU CORP	MP59B	GTS225	June 28 2017	June 27 2018
4	Artificial Mains Network	SCHWARZBECK MESS	NSLK8127	GTS226	June 28 2017	June 27 2018
5	Coaxial Cable	GTS	N/A	GTS227	N/A	N/A
6	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
7	Thermo meter	KTJ	TA328	GTS233	June 28 2017	June 27 2018

General used equipment:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Barometer	ChangChun	DYM3	GTS257	June 28 2017	June 27 2018

7 Test results and Measurement Data

7.1 Antenna requirement

Standard requirement:	FCC Part15 C Section 15.203
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
EUT Antenna: <i>The antenna is PCB antenna, the best case gain of the antenna is 0dBi</i> 	

7.2 Conducted Emissions

Test Requirement:	FCC Part15 C Section 15.207			
Test Method:	ANSI C63.10:2013			
Test Frequency Range:	150KHz to 30MHz			
Class / Severity:	Class B			
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto			
Limit:	Frequency range (MHz)	Limit (dBuV)		
		Quasi-peak	Average	
		0.15-0.5	66 to 56*	56 to 46*
		0.5-5	56	46
		5-30	60	50
* Decreases with the logarithm of the frequency.				
Test setup:	Reference Plane LISN AUX Equipment E.U.T 40cm 80cm LISN Filter AC power EMI Receiver Test table/Insulation plane Remark: E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m			
Test procedure:	1. The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement.			
Test Instruments:	Refer to section 6.0 for details			
Test mode:	Refer to section 5.2 for details			
Test results:	Pass			

Measurement data

Line:


Conducted Emission Measurement

File :controlsystem

Data :#3

Date: 2018-3-15

Time: 16:55:24

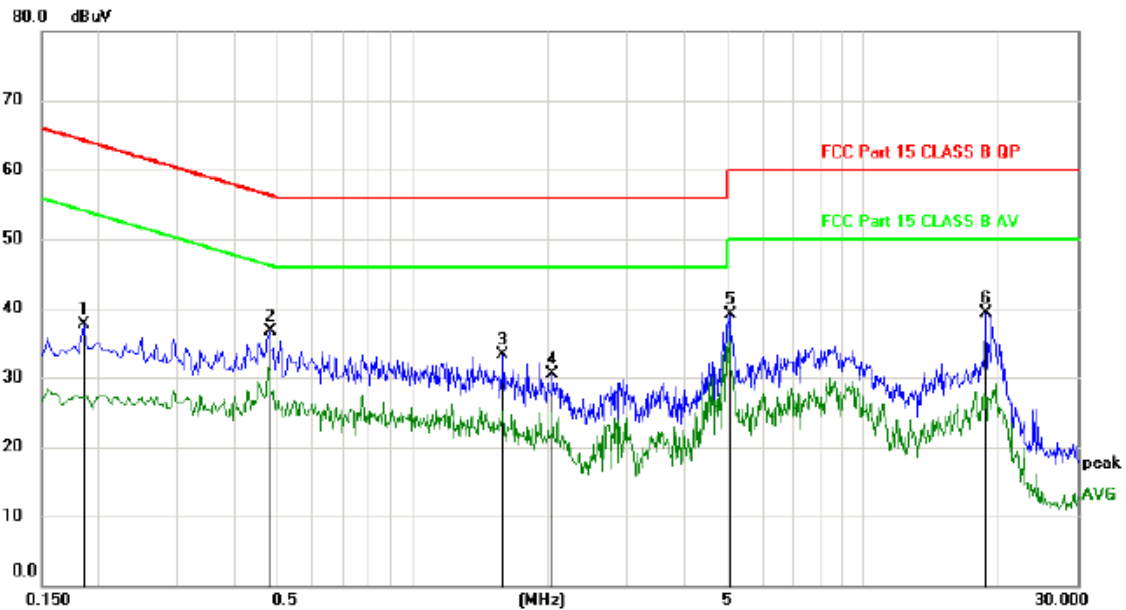

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1860	27.95	9.67	37.62	64.21	-26.59	peak	
2	*	0.4820	26.92	9.71	36.63	56.30	-19.67	peak	
3		1.5859	23.43	9.83	33.26	56.00	-22.74	peak	
4		2.0500	20.64	9.88	30.52	56.00	-25.48	peak	
5		5.0780	28.94	10.16	39.10	60.00	-20.90	peak	
6		18.8060	28.94	10.44	39.38	60.00	-20.62	peak	

*:Maximum data x:Over limit !:over margin

Note: Measurement=Reading Level+Correc Factor. Factor=(LISN or ISN or PLC or Current Probe)Factor+Cable

Neutral:

Site LAB

Phase: **N**

Temperature: 24.9

Limit: FCC Part 15 CLASS B QP

Power: AC 120V/60Hz

Humidity: 47 %

EUT: RiCLOUD NA WiFi Thermostat(Wifi Box)

M/N: 201402245

Mode: 915MHz

Note:

Engineer Signature:


Conducted Emission Measurement

File :controlsystem

Data :#4

Date: 2018-3-15

Time: 16:56:46

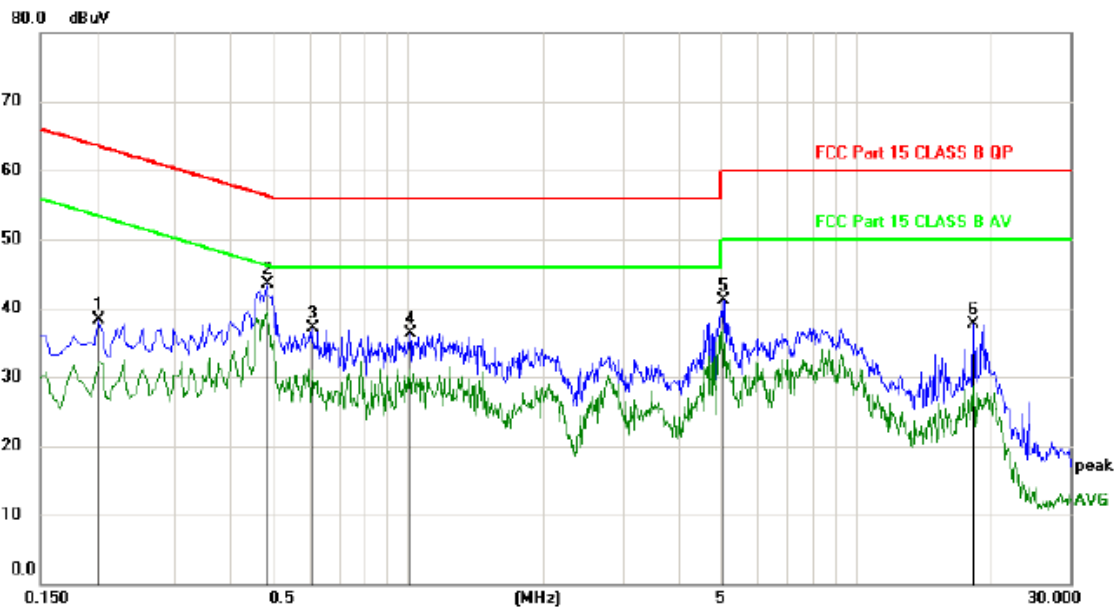

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.2020	28.69	9.67	38.36	63.53	-25.17	peak	
2	*	0.4820	33.80	9.71	43.51	56.30	-12.79	peak	
3		0.6100	27.39	9.72	37.11	56.00	-18.89	peak	
4		1.0060	26.63	9.77	36.40	56.00	-19.60	peak	
5		5.0340	30.97	10.16	41.13	60.00	-18.87	peak	
6		18.2500	27.26	10.43	37.69	60.00	-22.31	peak	


*:Maximum data x:Over limit !:over margin


Note: Measurement=Reading Level+Correc Factor. Factor=(LISN or ISN or PLC or Current Probe)Factor+Cable

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Cable Loss
4. *If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits and measurement with the average detector receiver is unnecessary.*

7.3 Radiated Emission Method

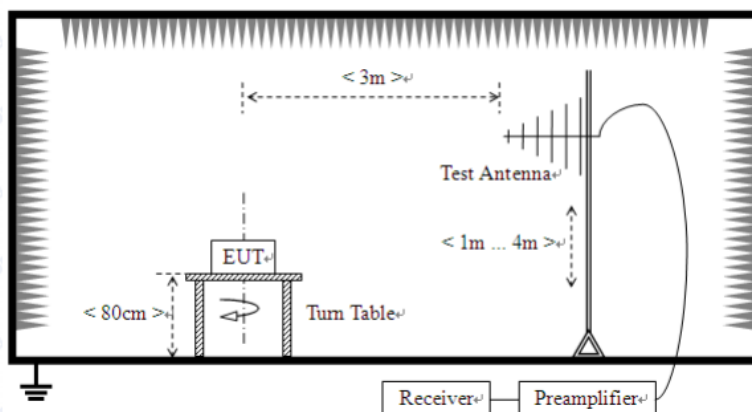Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	30MHz to 18GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Remark
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
		Peak	1MHz	10Hz	Average Value
Limit: (Field strength of the fundamental signal)	Frequency		Limit (dBuV/m @3m)		Remark
	Carrier frequency		94.00		QP Value
Limit: (Spurious Emissions)	Frequency		Limit (dBuV/m @3m)		Remark
	30MHz-88MHz		40.00		Quasi-peak Value
	88MHz-216MHz		43.50		Quasi-peak Value
	216MHz-960MHz		46.00		Quasi-peak Value
	960MHz-1GHz		54.00		Quasi-peak Value
	Above 1GHz		54.00		Average Value
			74.00		Peak Value
Limit: (band edge)	Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.				
Test setup:	Below 1GHz				
					
	Above 1GHz				

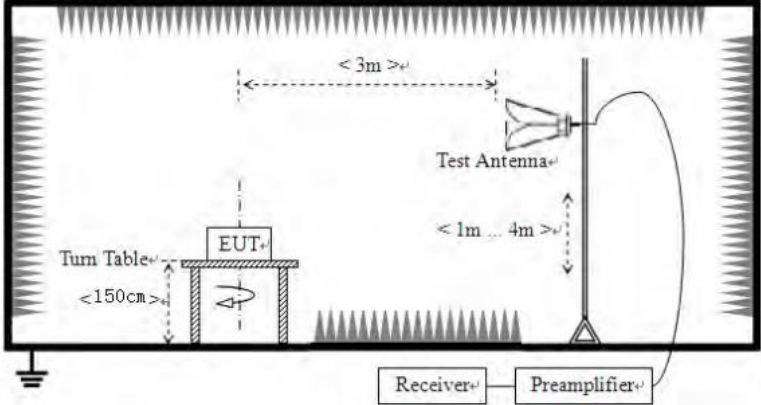	
Test Procedure:	1. The EUT was placed on the top of a rotating table (0.8m for below 1GHz and 1.5 meters for above 1GHz) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement data:

7.3.1 Field Strength of The Fundamental Signal

Peak value:


Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
915.00	56.73	24.32	5.23	86.28	94	-7.72	Vertical
915.00	63.21	24.32	5.23	92.76	94	-1.24	Horizontal

1. *Final Level = Receiver Read level + Antenna Factor + Cable Loss*

7.3.2 Spurious emissions

■ Below 1GHz

Horizontal:

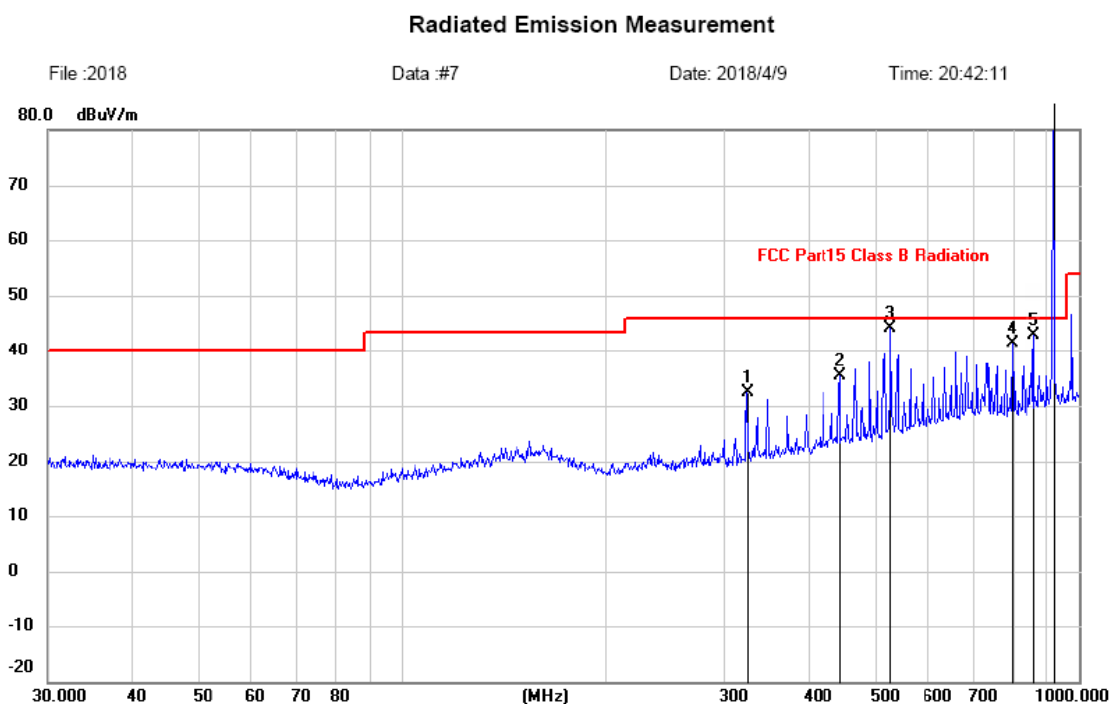


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		324.4561	18.23	14.05	32.28	46.00	-13.72	peak		
2		443.2943	18.76	16.73	35.49	46.00	-10.51	peak		
3		526.3967	26.11	18.06	44.17	46.00	-1.83	QP		
4		796.1830	19.13	22.18	41.31	46.00	-4.69	peak		
5		860.0352	21.63	22.46	44.09	46.00	-1.91	QP		
6	*	915.0021	68.17	23.59	92.76			peak		

Note:1. *:Maximum data; x:Over limit; !:over margin.

2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

Vertical:

Radiated Emission Measurement

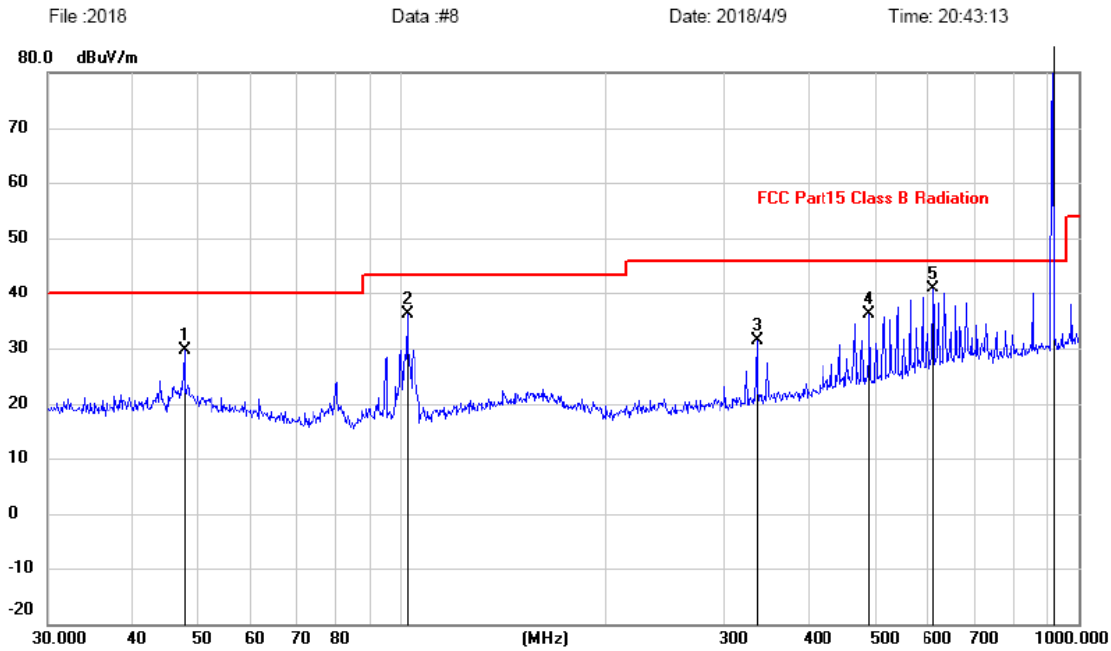

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		47.6586	16.06	13.69	29.75	40.00	-10.25	peak		
2		101.6443	25.28	10.76	36.04	43.50	-7.46	peak		
3		336.0352	17.10	14.37	31.47	46.00	-14.53	peak		
4		490.7447	18.80	17.39	36.19	46.00	-9.81	peak		
5		609.9217	21.12	19.77	40.89	46.00	-5.11	peak		
6	*	915.0005	62.69	23.59	86.28			peak		

Note:1. *:Maximum data; x:Over limit; !:over margin.

2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

■ Above 1GHz

Test channel:	Channel 1
---------------	-----------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
1830.00	40.15	26.47	6.78	31.89	41.51	74.00	-32.49	Vertical
2745.00	35.50	32.58	8.65	32.07	44.66	74.00	-29.34	Vertical
3660.00	35.81	34.35	11.14	31.92	49.38	74.00	-24.62	Vertical
4575.00	*					74.00		Vertical
9150.00	*					74.00		Vertical
1830.00	43.81	26.47	6.78	31.89	45.17	74.00	-28.83	Horizontal
2745.00	36.47	32.58	8.65	32.07	45.63	74.00	-28.37	Horizontal
3660.00	34.64	34.35	11.14	31.92	48.21	74.00	-25.79	Horizontal
4575.00	*					74.00		Horizontal
9150.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
1830.00	29.05	26.47	6.78	31.89	30.41	54.00	-23.59	Vertical
2745.00	24.30	32.58	8.65	32.07	33.46	54.00	-20.54	Vertical
3660.00	23.67	34.35	11.14	31.92	37.24	54.00	-16.76	Vertical
4575.00	*					54.00		Vertical
9150.00	*					54.00		Vertical
1830.00	33.82	26.47	6.78	31.89	35.18	54.00	-18.82	Horizontal
2745.00	27.25	32.58	8.65	32.07	36.41	54.00	-17.59	Horizontal
3660.00	22.94	34.35	11.14	31.92	36.51	54.00	-17.49	Horizontal
4575.00	*					54.00		Horizontal
9150.00	*					54.00		Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “*”, means this data is the too weak instrument of signal is unable to test.
3. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.3.3 Bandedge emissions

Test channel:	channel 1
---------------	-----------


QP value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
600.00	3.20	21.35	3.97	28.52	46.00	-17.48	Horizontal
902.00	3.74	24.28	5.21	33.23	46.00	-12.77	Horizontal
928.00	4.63	24.35	5.27	34.25	46.00	-11.75	Horizontal
960.00	5.46	24.96	5.83	36.25	46.00	-9.75	Horizontal
600.00	3.77	21.35	3.97	29.09	46.00	-16.91	Vertical
902.00	3.48	24.28	5.21	32.97	46.00	-13.03	Vertical
928.00	4.44	24.35	5.27	34.06	46.00	-11.94	Vertical
960.00	5.80	24.96	5.83	36.59	46.00	-9.41	Vertical

Remark:

1. *Final Level = Receiver Read level + Antenna Factor + Cable Loss*


7.4 20dB Occupy Bandwidth

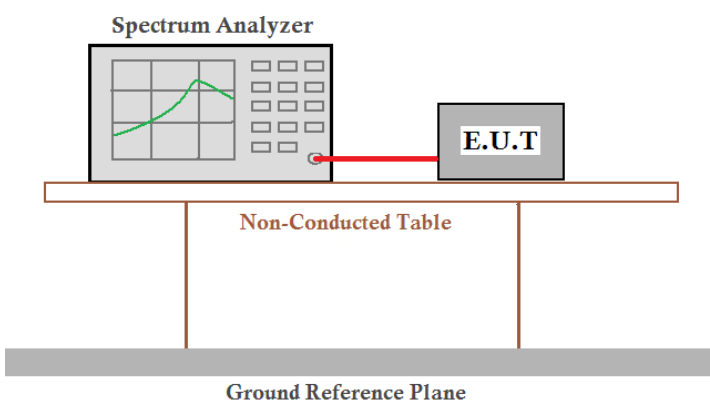Test Requirement:	FCC Part15 C Section 15.249/15.215
Test Method:	ANSI C63.10:2013
Limit:	Operation Frequency range 902MHz~928MHz
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T are placed on a Non-Conducted Table. Below the table is a Ground Reference Plane.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement Data


Test channel	20dB bandwidth(MHz)	Result
1	0.1218	Pass

Test plot as follows:

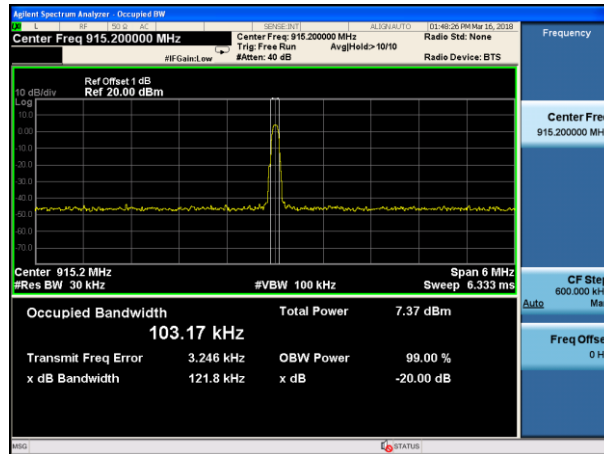


8 Test Setup Photo

Radiated Emission

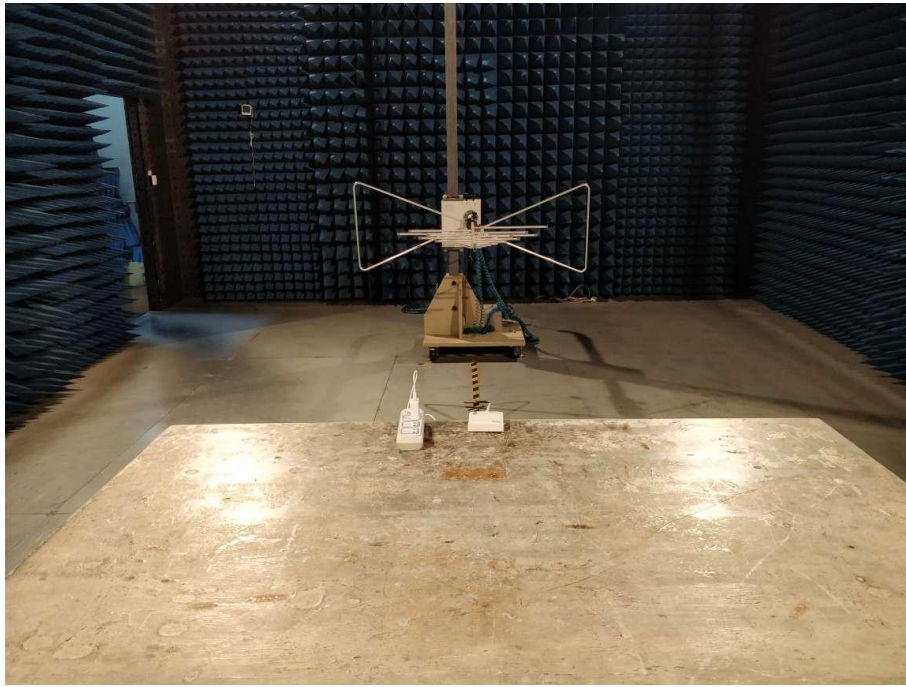

Conducted Emission

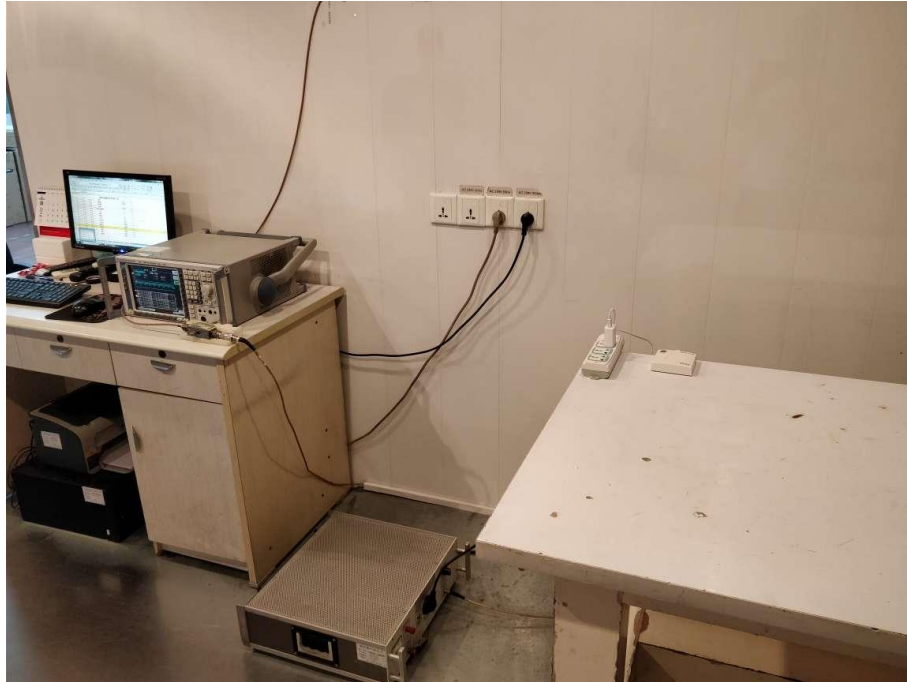


9 EUT Constructional Details




EUT View




EUT View

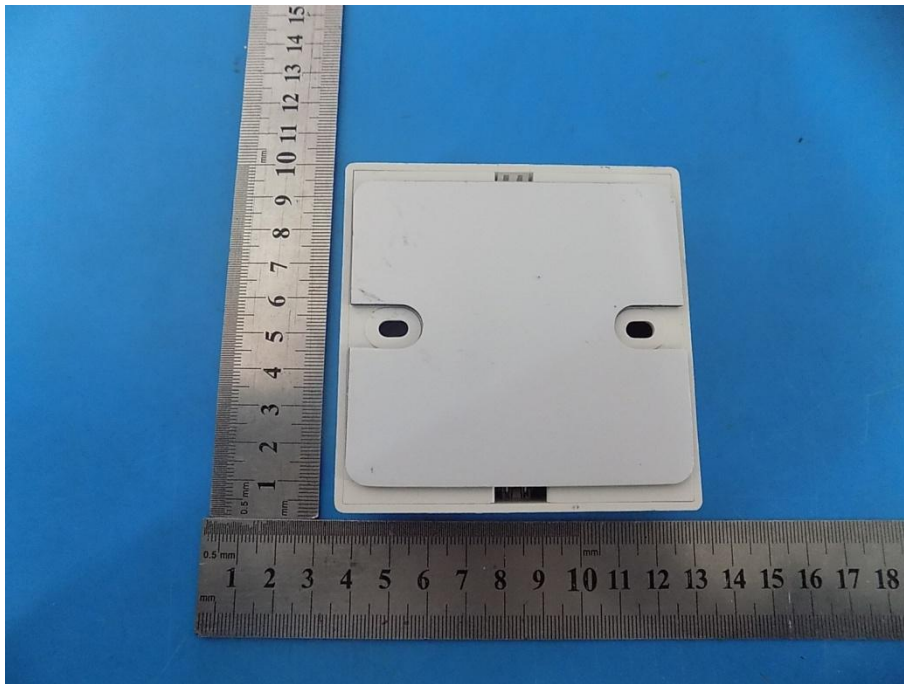

EUT View

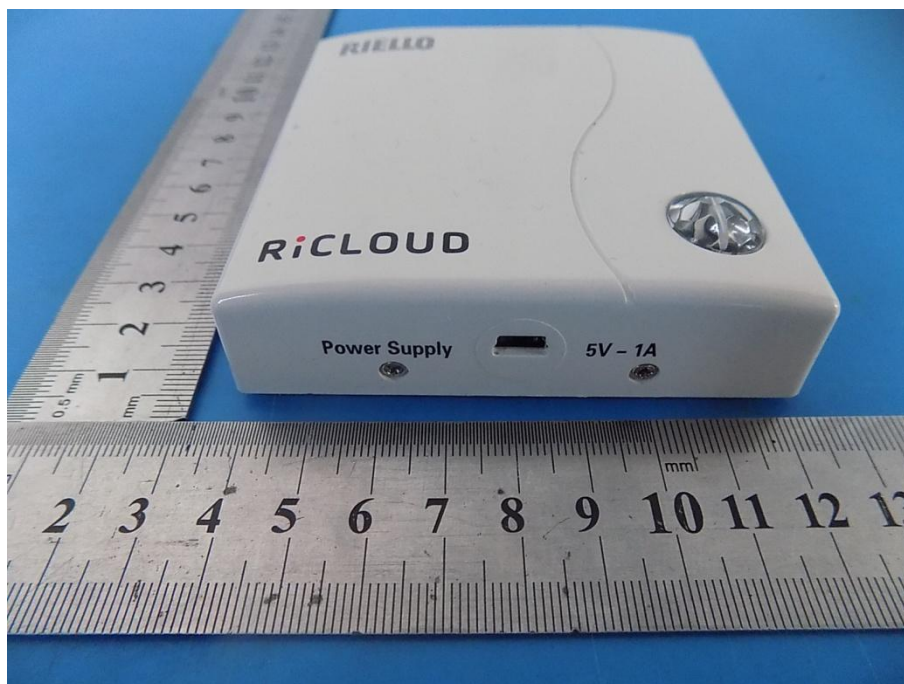

EUT View

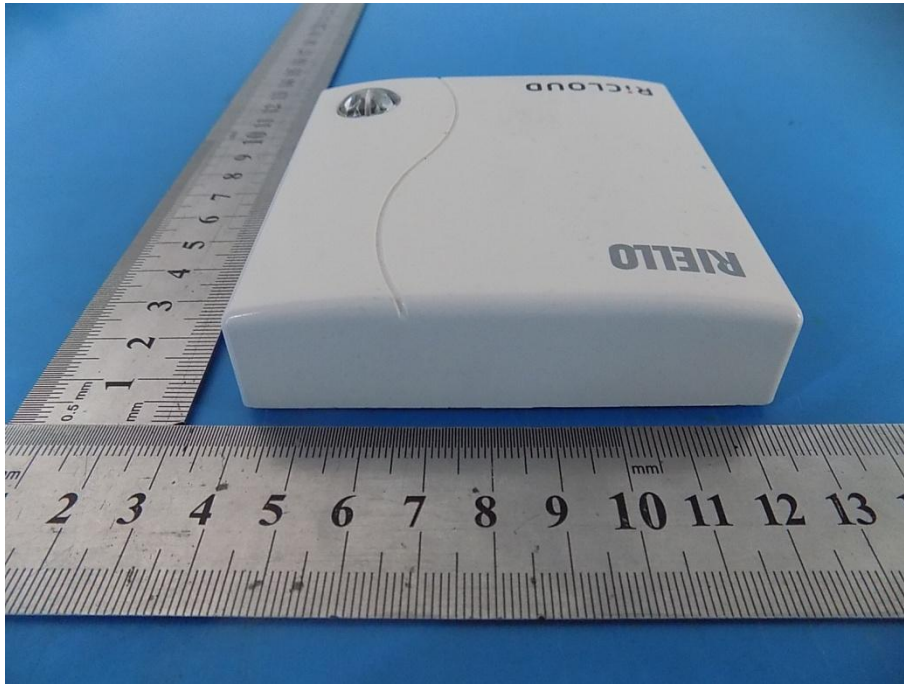


EUT View




EUT View




EUT View

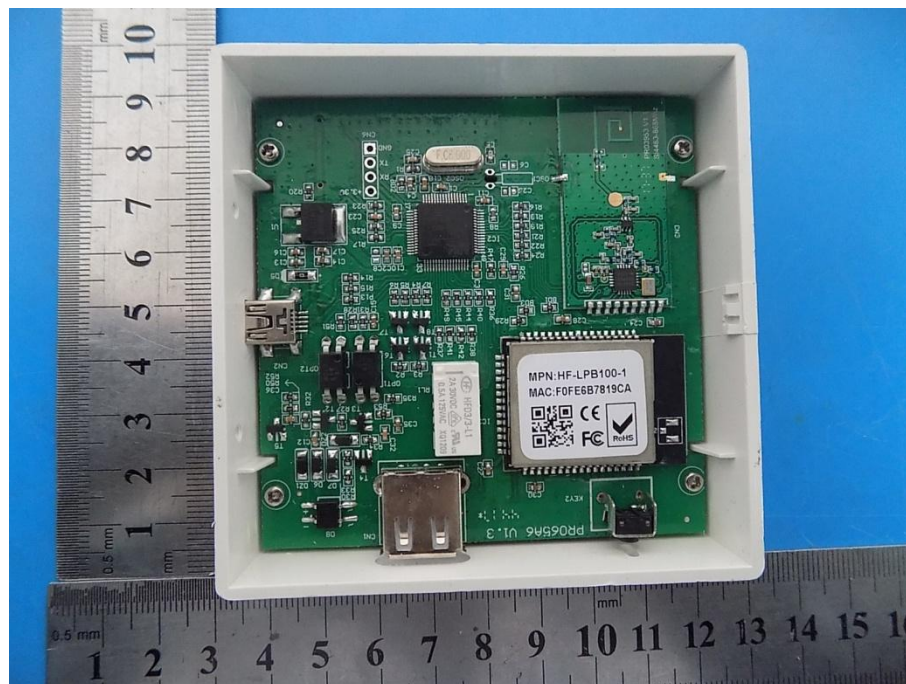


EUT View

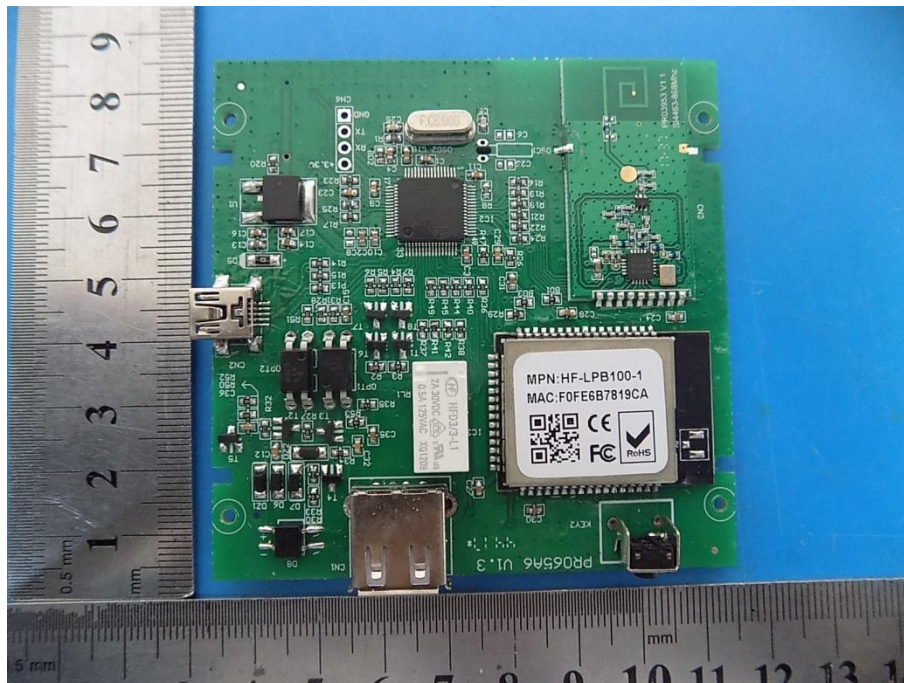

EUT View

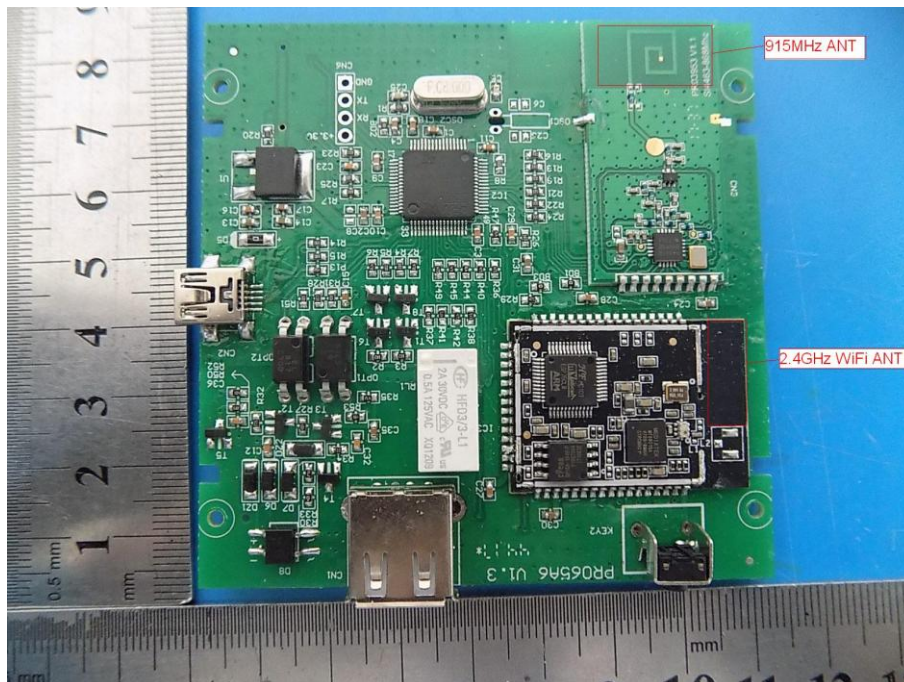

EUT View

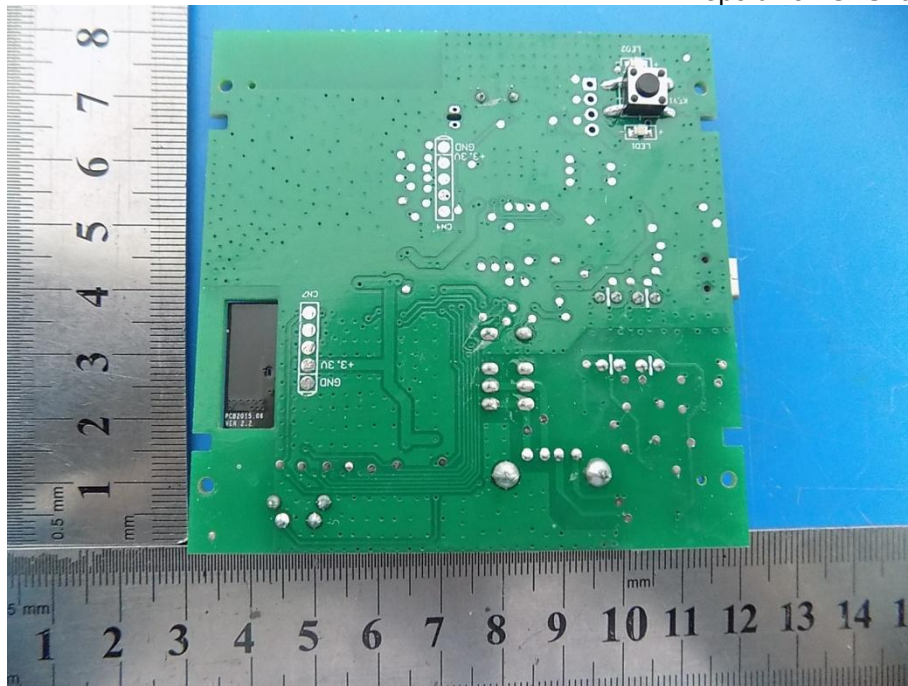

EUT View

-----End-----