

Appendix A:SAR System performance Check Plots
Table of contents
System Performance Check-D2450
System Performance Check-D5250
System Performance Check-D5750

Test Laboratory: CTI SAR Lab

Systemcheck 2450-Head

DUT: D2450V2 - SN959; Type: D2450V2; Serial: SN959


Communication System: UID 0, CW (0); Communication System Band: D2450 (2450.0 MHz); Frequency: 2450 MHz; Communication System PAR: 0 dB; PMF: 1
Medium parameters used: $f = 2450 \text{ MHz}$; $\sigma = 1.822 \text{ S/m}$; $\epsilon_r = 39.855$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN7328; ConvF(7.69, 7.69, 7.69) @ 2450 MHz; Calibrated: 4/18/2024
 - Modulation Compensation:
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn777; Calibrated: 1/6/2025
- Phantom: ELI v6.0; Type: QDOVA003AA; Serial: 2024
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Configuration/d=10mm,Pin=100mW/Area Scan (10x10x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$
Maximum value of SAR (measured) = 7.22 W/kg

Configuration/d=10mm,Pin=100mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
Reference Value = 72.43 V/m; Power Drift = -0.02 dB
Peak SAR (extrapolated) = 11.8 W/kg
SAR(1 g) = 5.35 W/kg; SAR(10 g) = 2.45 W/kg
Smallest distance from peaks to all points 3 dB below = 10 mm
Ratio of SAR at M2 to SAR at M1 = 45%
Maximum value of SAR (measured) = 9.21 W/kg

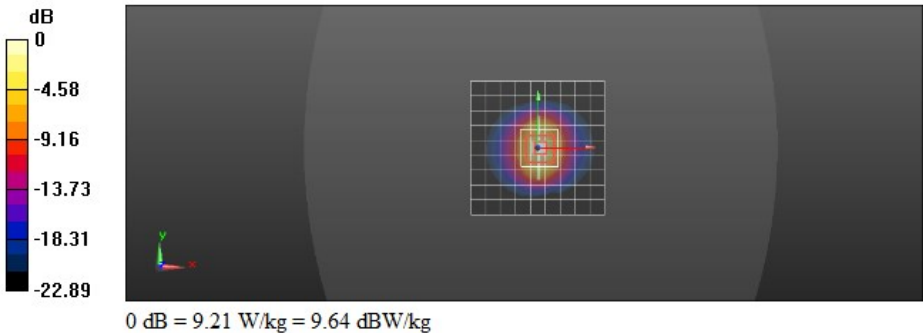

Test Laboratory: CTI SAR Lab

Systemcheck 5250-Head

DUT: D5GHzV2 - SN1208; Type: D5GHzV2; Serial: SN1208

Communication System: UID 0, CW (0); Communication System Band: D5GHz (5000.0 - 6000.0 MHz); Frequency: 5250 MHz;Communication System PAR: 0 dB; PMF: 1

Medium parameters used: f = 5250 MHz; σ = 4.672 S/m; ϵ_r = 34.979; ρ = 1000 kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN7328; ConvF(5.4, 5.4, 5.4) @ 5250 MHz; Calibrated: 4/18/2024
 - Modulation Compensation:
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), z = 1.0, 23.0
- Electronics: DAE4 Sn777; Calibrated: 1/6/2025
- Phantom: ELI v6.0; Type: QDOVA003AA; Serial: 2024
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Configuration/d=10mm,Pin=100mW/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 15.6 W/kg

Configuration/d=10mm,Pin=100mW/Zoom Scan (9x9x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 41.31 V/m; Power Drift = -0.12 dB


Peak SAR (extrapolated) = 31.5 W/kg

SAR(1 g) = 7.33 W/kg; SAR(10 g) = 2.2 W/kg

Smallest distance from peaks to all points 3 dB below = 7.6 mm

Ratio of SAR at M2 to SAR at M1 = 50.4%

Maximum value of SAR (measured) = 18.8 W/kg

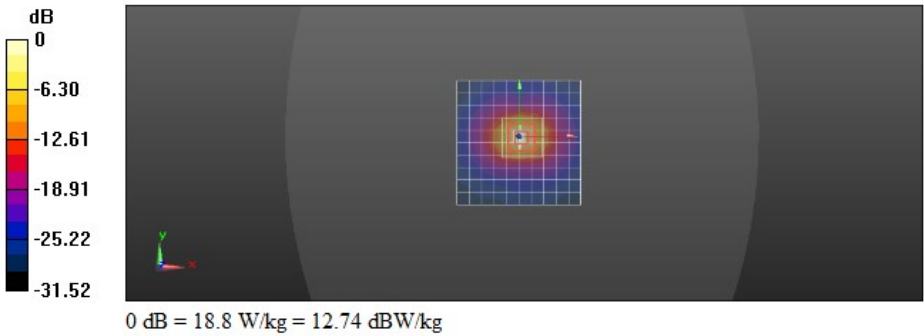

Test Laboratory: CTI SAR Lab

Systemcheck 5750-Head

DUT: D5GHzV2 - SN1208; Type: D5GHzV2; Serial: SN1208

Communication System: UID 0, CW (0); Communication System Band: D5GHz (5000.0 - 6000.0 MHz); Frequency: 5750 MHz;Communication System PAR: 0 dB; PMF: 1

Medium parameters used: f = 5750 MHz; $\sigma = 5.082$ S/m; $\epsilon_r = 34.129$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN7328; ConvF(4.95, 4.95, 4.95) @ 5750 MHz; Calibrated: 4/18/2024
 - Modulation Compensation:
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), z = 1.0, 31.0
- Electronics: DAE4 Sn777; Calibrated: 1/6/2025
- Phantom: ELI v6.0; Type: QDOVA003AA; Serial: 2024
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Configuration/d=10mm,Pin=100mW/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 16.0 W/kg

Configuration/d=10mm,Pin=100mW/Zoom Scan (8x8x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 35.71 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 35.2 W/kg

SAR(1 g) = 7.41 W/kg; SAR(10 g) = 2.19 W/kg

Smallest distance from peaks to all points 3 dB below = 7.9 mm

Ratio of SAR at M2 to SAR at M1 = 47.7%

Maximum value of SAR (measured) = 19.4 W/kg

