

APPLICATION CERTIFICATION FCC Part 15C&IC

On Behalf of

ASAP Technology(Jiangxi) Co., Ltd.

5W Wireless Charging Pad - White

5W Wireless Charging Pad - Black

Model No.: B07Q1DJ71X, B07PWYBT27

FCC ID: 2APXNLACA093

IC: 24654-LACA093

Prepared for : ASAP Technology(Jiangxi) Co., Ltd.
Address : No.5, Shuguang Rd, West Zone, Ji'an County Industrial Park,
Ji'an, Jiangxi Ji'an, 343100, P.R.China

Prepared by : Shenzhen Accurate Technology Co., Ltd.
Address : 1/F., Building A, Changyuan New Material Port, Science &
Industry Park, Nanshan District, Shenzhen, Guangdong, P.R.
China

Tel: +86-755-26503290

Fax: +86-755-26503396

Report No. : ATE20190545
Date of Test : April 19-May 28, 2019
Date of Report : May 28, 2019

TABLE OF CONTENTS

Description	Page
Test Report Declaration	
1. TEST RESULTS SUMMARY	4
2. GENERAL INFORMATION	5
2.1. Description of Device (EUT).....	5
2.2. Test Mode	5
2.3. Special Accessory and Auxiliary Equipment	5
2.4. Description of Test Facility	6
2.5. Measurement Uncertainty.....	6
3. MEASURING DEVICE AND TEST EQUIPMENT	7
3.1. The Equipment Used to Measure Conducted Emission	7
3.2. The Equipment Used to Measure Radiated Emission.....	7
4. AC POWER LINE CONDUCTED EMISSION TEST	8
4.1. Block Diagram of Test Setup.....	8
4.2. AC Power Line Conducted Emission Test Limits	8
4.3. Configuration of EUT on Test.....	8
4.4. Operating Condition of EUT	8
4.5. Test Procedure	9
4.6. Data Sample.....	9
4.7. Test Results.....	9
5. RADIATED EMISSION TEST	12
5.1. Block Diagram of Test.....	12
5.2. Radiated Emission Test Limit.....	13
5.3. EUT Configuration on Test	13
5.4. Operating Condition of EUT	13
5.5. Test Procedure	14
5.6. Data Sample.....	15
5.7. Test Result	15
6. OCCUPIED BANDWIDTH TEST	21
6.1. The Requirement For Section 15.215(c).....	21
6.2. The Requirement For RSS-Gen Issue 5, section 6.7	21
6.3. Test Procedure	21
6.4. Test Result	22
7. ANTENNA REQUIREMENT.....	23
7.1. The Requirement	23
7.2. Antenna Construction	23

Test Report Declaration

Applicant : ASAP Technology(Jiangxi) Co., Ltd.

Address : No.5, Shuguang Rd, West Zone, Ji'an County Industrial Park, Ji'an, Jiangxi
Ji'an, 343100, P.R.China

Product : 5W Wireless Charging Pad - White
5W Wireless Charging Pad - Black

Model No. : B07Q1DJ71X, B07PWYBT27
(Note: It's just different colors, B07Q1DJ71X for white, B07PWYBT27 for black. So we only tested the B07PWYBT27 model)

Measurement Procedure Used:

FCC CFR47 Part 15 Subpart C Section 15.207 and 15.209

ANSI C63.10: 2013


RSS-216 issue 2 January 2016

RSS-Gen Issue 5 April 2018

The device described above is tested by Shenzhen Accurate Technology Co., Ltd. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C and RSS-216 limits both radiated and conducted emissions. The measurement results are contained in this test report and Shenzhen Accurate Technology Co., Ltd. is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC&IC requirements.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of Shenzhen Accurate Technology Co., Ltd.

Date of Test : April 19-May 28, 2019
Date of Report : May 28, 2019

Prepared by : 
(Star Yang, Engineer)

Approved & Authorized Signer : 
(Sean Liu, Manager)

1. TEST RESULTS SUMMARY

Test Items	Test Standard	Test Results
AC Power Line Conducted Emission	FCC Part 15.207 RSS-216 Issue 2, section 6.2.2.1 RSS-Gen Issue 5, section 8.8	Pass
Radiated Emission	FCC Part 15.209 RSS-216 Issue 2, section 6.2.2.2&6.3.2 RSS-Gen Issue 5, section 8.9	Pass
Occupied Bandwidth	FCC Part 15.215(c) RSS-Gen Issue 5, section 6.7	N/A
Antenna Requirement	FCC Part 15.203 RSS-Gen Issue 5 section 6.8	Pass

2. GENERAL INFORMATION

2.1. Description of Device (EUT)

5W Wireless Charging Pad - Black		
Operating Frequency	:	110-205KHz
Type of Modulation	:	FSK
Type of Antenna	:	Induction coil
Operating Voltage	:	Input: DC 5V/2A Output: DC 5V/1A (5W Max)
Trade Mark	:	

2.2. Test Mode

Test Item	EMI Test Modes
Conducted Emission	Max. Power Output
Radiated Emission	Max. Power Output

2.3. Special Accessory and Auxiliary Equipment

Description	Manufacturer	Model	S/N
Fast charging supply adapter	UGREEN	CD122	N/A
Iphone8S PLUS	Apple	MQ8G2ZP/A	C39V9DEPJCLM

2.4. Description of Test Facility

EMC Lab	:	Recognition of accreditation by Federal Communications Commission (FCC) The Designation Number is CN1189 The Registration Number is 708358
		Listed by Innovation, Science and Economic Development Canada (ISED) The Registration Number is 5077A-2
		Accredited by China National Accreditation Service for Conformity Assessment (CNAS) The Registration Number is CNAS L3193
		Accredited by American Association for Laboratory Accreditation (A2LA) The Certificate Number is 4297.01
Name of Firm	:	Shenzhen Accurate Technology Co., Ltd
Site Location	:	1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China

2.5. Measurement Uncertainty

Conducted emission expanded uncertainty	:	U=2.23dB, k=2
Radiated emission expanded uncertainty (9kHz-30MHz)	:	U=3.08dB, k=2
Radiated emission expanded uncertainty (30MHz-1000MHz)	:	U=4.42dB, k=2
Radiated emission expanded uncertainty (Above 1GHz)	:	U=4.06dB, k=2

3. MEASURING DEVICE AND TEST EQUIPMENT

3.1. The Equipment Used to Measure Conducted Emission


Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Test Receiver	Rohde & Schwarz	ESCS30	100307	Jan.05, 2019	1 Year
2.	L.I.S.N.	Schwarzbeck	NLSK8126	8126431	Jan.05, 2019	1 Year
3.	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100305	Jan.05, 2019	1 Year
4.	50Ω Coaxial Switch	Anritsu Corp	MP59B	6200283936	Jan.05, 2019	1 Year
5.	RF Coaxial Cable	SUHNER	N-2m	No.2	Jan.05, 2019	1 Year
6.	Measurement Software: ES-K1 V1.71					

3.2. The Equipment Used to Measure Radiated Emission

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum Analyzer	Rohde&Schwarz	FSV40	101495	Jan.05, 2019	1 Year
2.	Test Receiver	Rohde& Schwarz	ESR	101817	Jan.05, 2019	1 Year
3.	Bilog Antenna	Schwarzbeck	VULB9163	9163-323	Jan.05, 2019	1 Year
4.	Loop Antenna	Schwarzbeck	FMZB1516	1516131	Jan.05, 2019	1 Year
5.	Pre-Amplifier	Agilent	8447D	294A10619	Jan.05, 2019	1 Year
6.	50 Coaxial Switch	Anritsu Corp	MP59B	6200506474	Jan.05, 2019	1 Year
7.	RF Coaxial Cable	RESENBERGER	N-12m	No.11	Jan.05, 2019	1 Year
8.	RF Coaxial Cable	RESENBERGER	N-0.5m	No.12	Jan.05, 2019	1 Year
9.	RF Coaxial Cable	SUHNER	N-2m	No.13	Jan.05, 2019	1 Year
10.	RF Coaxial Cable	SUHNER	N-0.5m	No.15	Jan.05, 2019	1 Year
11.	RF Coaxial Cable	SUHNER	N-2m	No.16	Jan.05, 2019	1 Year
12.	RF Coaxial Cable	RESENBERGER	N-6m	No.17	Jan.05, 2019	1 Year
13.	Measurement Software: EZ EMC V1.1.4.2					

4. AC POWER LINE CONDUCTED EMISSION TEST

4.1. Block Diagram of Test Setup

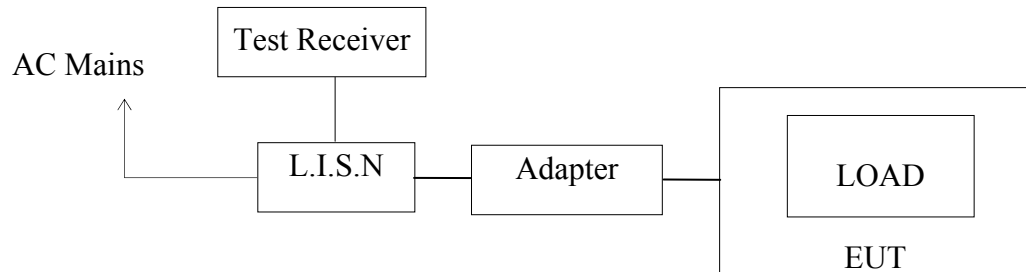

4.2. AC Power Line Conducted Emission Test Limits

Frequency (MHz)	Limit dB(μV)	
	Quasi-peak Level	Average Level
0.15 - 0.50	66.0 – 56.0 *	56.0 – 46.0 *
0.50 - 5.00	56.0	46.0
5.00 - 30.00	60.0	50.0

NOTE1: The lower limit shall apply at the transition frequencies.
 NOTE2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.50MHz.

4.3. Configuration of EUT on Test

The equipments are installed on Power Line Conducted Emission Measurement to meet the commission requirement and operating regulations in a manner, which tends to maximize its emission characteristics in a normal application.

4.4. Operating Condition of EUT

- 4.4.1. Setup the EUT and simulator as shown as Section 4.1.
- 4.4.2. Turn on the power of all equipment.
- 4.4.3. Let the EUT work in test mode and measure it.

4.5. Test Procedure

The EUT is put on the plane 0.8 m high above the ground by insulating support and is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC lines are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.10: 2013 on Conducted Emission Measurement.

The bandwidth of test receiver (R & S ESCS30) is set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.

4.6. Data Sample

Frequency (MHz)	Transducer value (dB)	QuasiPeak Level (dBμV)	Average Level (dBμV)	QuasiPeak Limit (dBμV)	Average Limit (dBμV)	QuasiPeak Margin (dB)	Average Margin (dB)	Remark (Pass/Fail)
X.XX	10.6	25.3	17.0	59.0	49.0	33.7	32.0	Pass

Transducer value = Insertion loss of LISN + Cable Loss
Result = Quasi-peak Level/Average Level + Transducer value
Limit = Limit stated in standard

Calculation Formula:

Margin = Limit – Reading level value – Transducer value

4.7. Test Results

Pass.

The frequency range from 150kHz to 30MHz is checked.

Emissions attenuated more than 20 dB below the permissible value are not reported.

The spectral diagrams are attached as below.


ACCURATE TECHNOLOGY CO., LTD

CONDUCTED EMISSION STANDARD FCC PART 15 C

EUT: 5W Wireless Charging Pad - Black M/N:B07PWYBT27
 Manufacturer: ASAP Technology(Jiangxi) Co., Ltd.
 Operating Condition: Max. Power Output
 Test Site: 1#Shielding Room
 Operator: WADE
 Test Specification: L 120V/60Hz
 Comment:
 Start of Test: 4/19/2019 /

SCAN TABLE: "V 9K-30MHz fin"

Short Description: _SUB_STD_VTERM2 1.70
 Start Stop Step Detector Meas. IF Transducer
 Frequency Frequency Width Time Bandw.
 9.0 kHz 150.0 kHz 100.0 Hz QuasiPeak 1.0 s 200 Hz NSLK8126 2008
 Average
 150.0 kHz 30.0 MHz 5.0 kHz QuasiPeak 1.0 s 9 kHz NSLK8126 2008
 Average

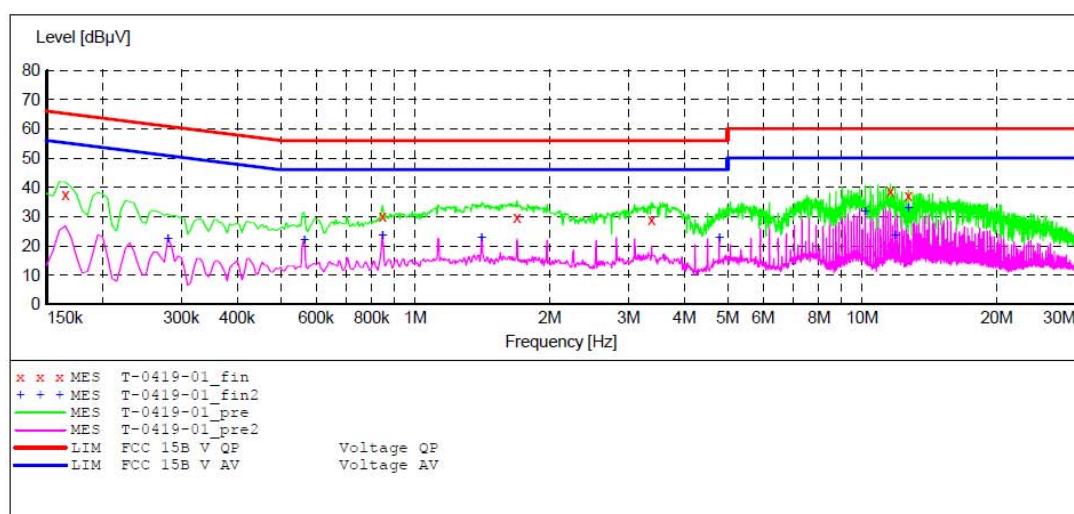

MEASUREMENT RESULT: "T-0419-01_fin"

4/19/2019

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.165000	37.40	10.5	65	27.8	QP	L1	GND
0.845000	30.30	10.8	56	25.7	QP	L1	GND
1.690000	29.80	10.9	56	26.2	QP	L1	GND
3.380000	29.10	11.1	56	26.9	QP	L1	GND
11.560000	38.50	11.3	60	21.5	QP	L1	GND
12.685000	37.10	11.3	60	22.9	QP	L1	GND

MEASUREMENT RESULT: "T-0419-01_fin2"

4/19/2019

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.280000	22.20	10.6	51	28.6	AV	L1	GND
0.565000	21.90	10.7	46	24.1	AV	L1	GND
0.845000	23.50	10.8	46	22.5	AV	L1	GND
1.410000	22.80	10.9	46	23.2	AV	L1	GND
4.790000	22.80	11.1	46	23.2	AV	L1	GND
10.150000	31.70	11.3	50	18.3	AV	L1	GND


ACCURATE TECHNOLOGY CO., LTD

CONDUCTED EMISSION STANDARD FCC PART 15 C

EUT: 5W Wireless Charging Pad - Black M/N:B07PWYBT27
 Manufacturer: ASAP Technology(Jiangxi) Co., Ltd.
 Operating Condition: Max. Power Output
 Test Site: 1#Shielding Room
 Operator: WADE
 Test Specification: N 120V/60Hz
 Comment:
 Start of Test: 4/19/2019 /

SCAN TABLE: "V 9K-30MHz fin"

Short Description: _SUB_STD_VTERM2 1.70
 Start Stop Step Detector Meas. IF Transducer
 Frequency Frequency Width Time Bandw.
 9.0 kHz 150.0 kHz 100.0 Hz QuasiPeak 1.0 s 200 Hz NSLK8126 2008
 Average
 150.0 kHz 30.0 MHz 5.0 kHz QuasiPeak 1.0 s 9 kHz NSLK8126 2008
 Average

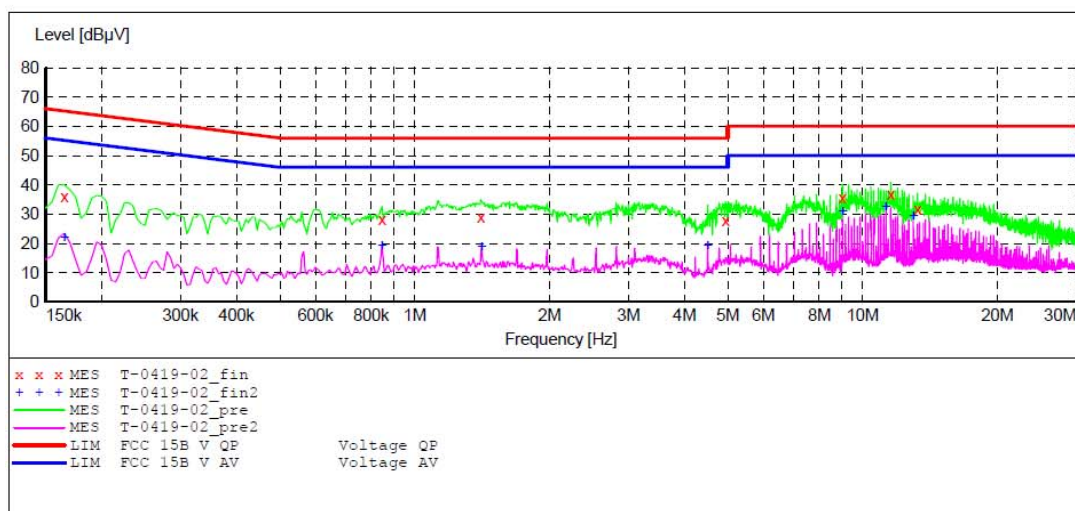

MEASUREMENT RESULT: "T-0419-02_fin"

4/19/2019

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.165000	35.90	10.5	65	29.3	QP	N	GND
0.845000	28.20	10.8	56	27.8	QP	N	GND
1.405000	28.80	10.9	56	27.2	QP	N	GND
4.940000	27.80	11.2	56	28.2	QP	N	GND
9.020000	35.40	11.3	60	24.6	QP	N	GND
11.560000	36.80	11.3	60	23.2	QP	N	GND
13.255000	31.60	11.3	60	28.4	QP	N	GND

MEASUREMENT RESULT: "T-0419-02_fin2"


4/19/2019

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.165000	21.90	10.5	55	33.3	AV	N	GND
0.845000	19.10	10.8	46	26.9	AV	N	GND
1.410000	18.80	10.9	46	27.2	AV	N	GND
4.510000	19.00	11.1	46	27.0	AV	N	GND
9.020000	30.80	11.3	50	19.2	AV	N	GND

5. RADIATED EMISSION TEST


5.1. Block Diagram of Test

5.1.1. Block diagram of connection between the EUT and simulators

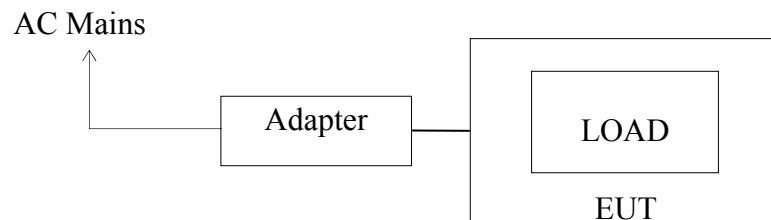


5.1.2. Block diagram of test setup (In chamber)

(A) Radiated Emission Test Set-Up, Frequency below 30MHz

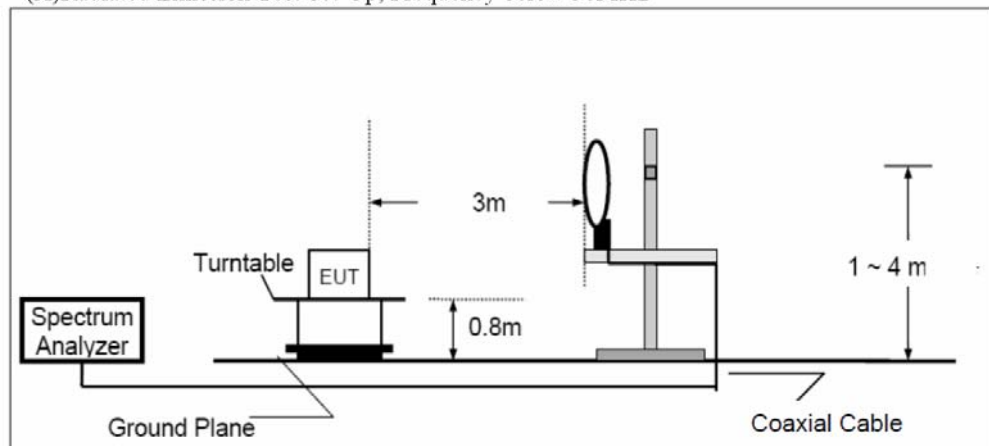

(B) Radiated Emission Test Set-Up, Frequency 30-1000MHz

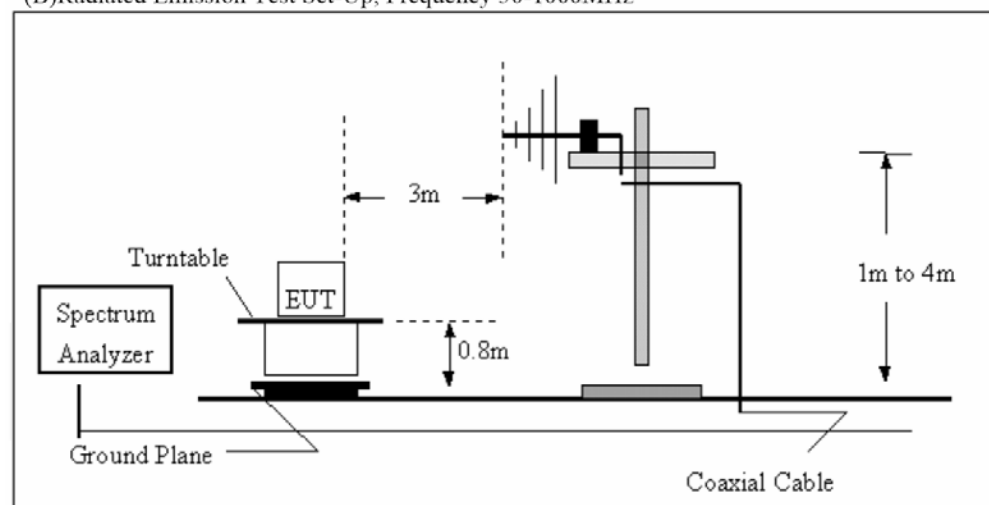

5.2. Radiated Emission Test Limit

Frequency (MHz)	Field Strength Limitation		Field Strength Limitation at 3m Measurement Dist	
	(uV/m)	Dist	(uV/m)	(dBuV/m)
0.009 – 0.490	2400 / F(KHz)	300m	10000 * 2400/F(KHz)	20log 2400/F(KHz) + 80
0.490 – 1.705	24000 / F(KHz)	30m	100 * 24000/F(KHz)	20log 24000/F(KHz) + 40
1.705 – 30.00	30	30m	100* 30	20log 30 + 40
30.0 – 88.0	100	3m	100	20log 100
88.0 – 216.0	150	3m	150	20log 150
216.0 – 960.0	200	3m	200	20log 200
Above 960.0	500	3m	500	20log 500

Limit: [2400/125=19.2uV/m@300m](#)

Distance Correction Factor=40log(test distance/specific distance)

5.3. EUT Configuration on Test

The equipments are installed on Radiated Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

5.4. Operating Condition of EUT

- 5.4.1. Setup the EUT and simulator as shown as Section 5.1.
- 5.4.2. Turn on the power of all equipment.
- 5.4.3. Let the EUT work in test mode and measure it.

5.5. Test Procedure

The EUT and its simulators are placed on a turntable, which is 0.8 meter high above ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna. Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.10: 2013 on radiated emission measurement.

From 9kHz to 30MHz at distance 3m The EUT was rotated a full revolution in order to obtain the maximum value of the electric field intensity.

From 30MHz to 1000MHz at distance 3m The measuring antenna height varied between 1 and 4m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field intensity. The measurements were performed for both vertical and horizontal antenna polarization.

The final measurement will be performed with an EMI Receiver set to Quasi Peak detector for the frequency bands 9kHz to 90kHz and 110 to 490 kHz where an average detector will be used according to Section 15.209(d)(2).

The final level, expressed in dBuV/m, is arrived at by taking the reading from the EMI receiver(Level dBuV) and adding the antenna correction factor and cable loss factor(Factor dB) to it. This result then has to be compared with the relevant FCC limit. The resolution bandwidth during the measurement is as follows:

9kHz – 150kHz: ResBW: 200Hz

150kHz – 30MHz: ResBW: 9kHz

The bandwidth of the EMI test receiver is set at 120kHz from 30MHz to 1000MHz.

5.6.Data Sample

Frequency(MHz)	Reading (dB μ v)	Factor (dB/m)	Result (dB μ v/m)	Limit (dB μ v/m)	Margin (dB)	Remark
X.XX	49.83	-22.03	27.80	43.50	-15.70	QP

Frequency(MHz) = Emission frequency in MHz

Reading(dB μ v) = Uncorrected Analyzer/Receiver reading

Factor (dB/m)= Antenna factor + Cable Loss – Amplifier gain

Result(dB μ v/m) = Reading + Factor

Limit (dB μ v/m)= Limit stated in standard

Calculation Formula:

Margin(dB) = Result (dB μ v/m)–Limit(dB μ v/m)

Result(dB μ v/m)= Reading(dB μ v)+ Factor(dB/m)

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the limit.

5.7.Test Result

Pass.

Emissions attenuated more than 20 dB below the permissible value are not reported.

The spectrum analyzer plots are attached as below.

From 9kHz to 30MHz:


ACCURATE TECHNOLOGY CO., LTD

RADIATED EMISSION STANDARD FCC PART 15 C

EUT: 5W Wireless Charging Pad - Black M/N:B07PWYBT27
 Manufacturer: ASAP Technology(Jiangxi) Co., Ltd.
 Operating Condition: Max. Power Output
 Test Site: 2#Chamber
 Operator: WADE
 Test Specification: DC 5V
 Comment: Y
 Start of Test: 2019-4-19 /

SCAN TABLE: "LFRE(E) Fin"

Start	Stop	Step	_SUB STD	VTERM2	1.70	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516E			
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516E			

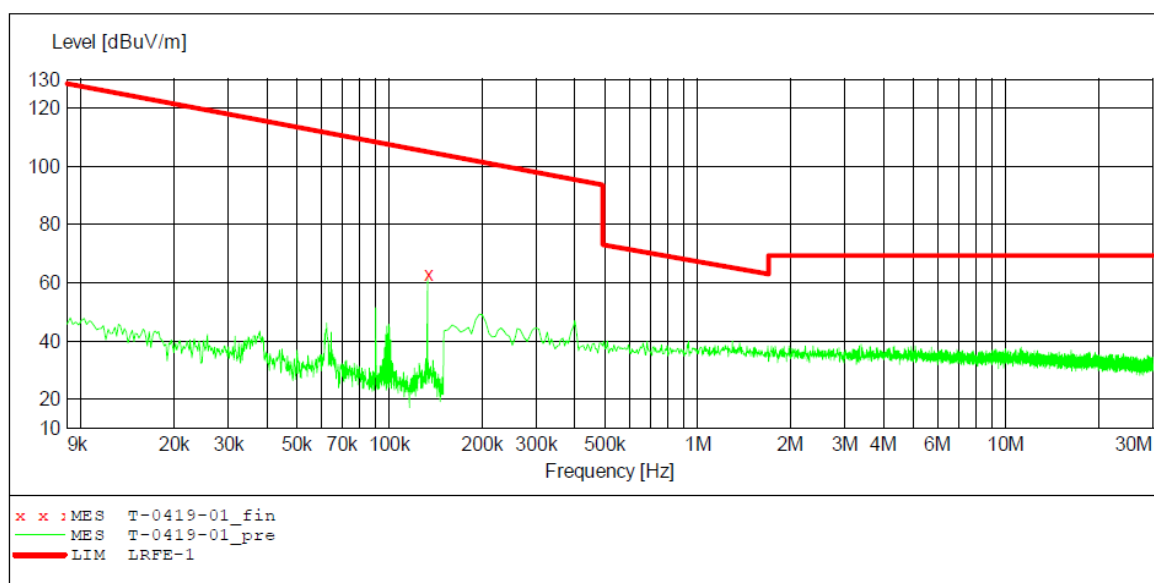

MEASUREMENT RESULT: "T-0419-01_fin"

2019-4-19

Frequency MHz	Level dBuV/m	Transd dB	Limit dBuV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
0.132800	63.07	/	/	/	PK	/	/	Y


ACCURATE TECHNOLOGY CO.,LTD

RADIATED EMISSION STANDARD FCC PART 15 C

EUT: 5W Wireless Charging Pad - Black M/N:B07PWYBT27
 Manufacturer: ASAP Technology(Jiangxi) Co., Ltd.
 Operating Condition: Max. Power Output
 Test Site: 2#Chamber
 Operator: WADE
 Test Specification: DC 5V
 Comment: X
 Start of Test: 2019-4-19 /

SCAN TABLE: "LFE(E) Fin"

Short Description:			_SUB_STD_VTERM2 1.70				
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer	
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516E	
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516E	

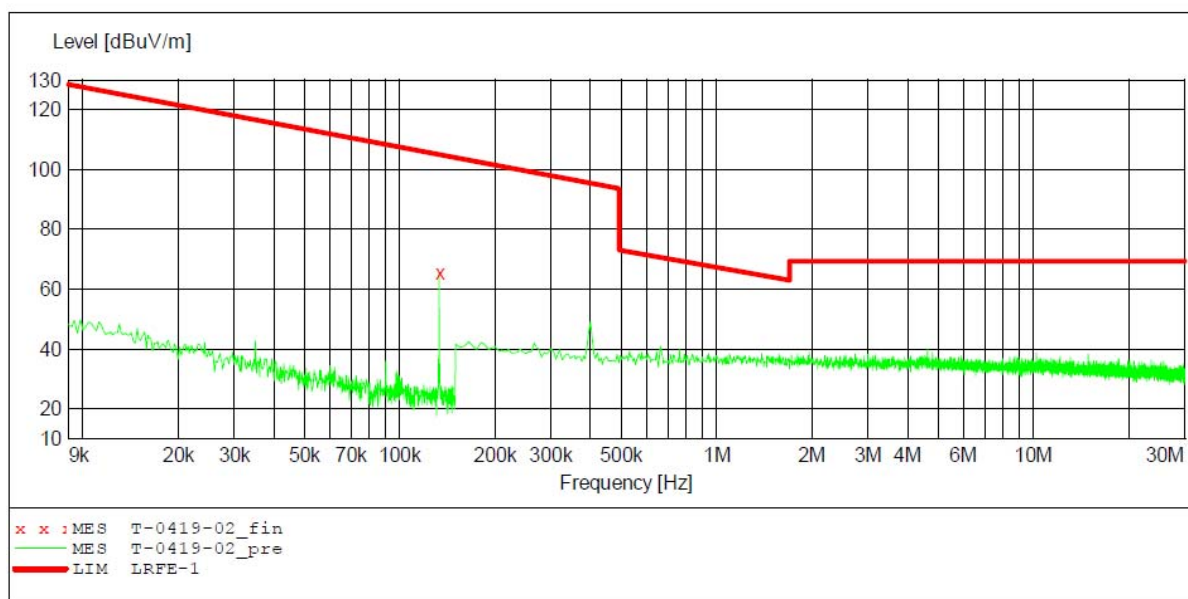

MEASUREMENT RESULT: "T-0419-02_fin"

2019-4-19

Frequency MHz	Level dBuV/m	Transd dB	Limit dBuV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
0.133000	65.28	/	/	/	PK	/	/	X


ACCURATE TECHNOLOGY CO., LTD

RADIATED EMISSION STANDARD FCC PART 15 C

EUT: 5W Wireless Charging Pad - Black M/N:B07PWYBT27
 Manufacturer: ASAP Technology(Jiangxi) Co., Ltd.
 Operating Condition: Max. Power Output
 Test Site: 2#Chamber
 Operator: WADE
 Test Specification: DC 5V
 Comment: Z
 Start of Test: 2019-4-19 /

SCAN TABLE: "LFRE(E) Fin"

Short Description:			_SUB_STD_VTERM2 1.70			
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516E
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516E

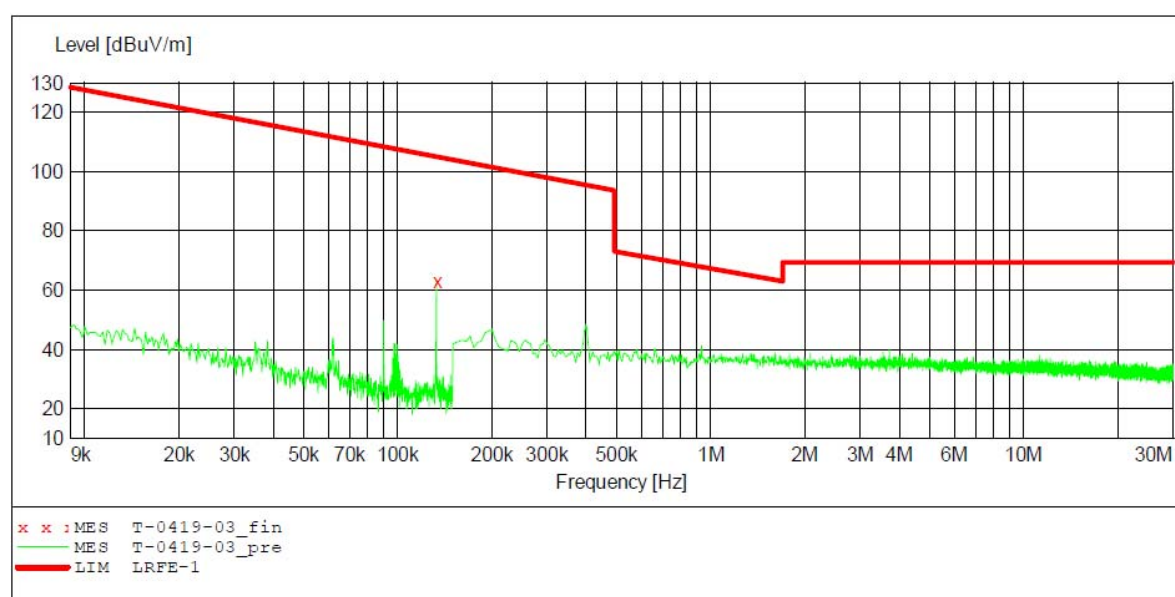

MEASUREMENT RESULT: "T-0419-03_fin"

2019-4-19

Frequency MHz	Level dBuV/m	Transd dB	Limit dBuV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
0.132800	62.80	/	/	/	PK	/	/	Z

Job No.: tuv2018 #2237

Standard: FCC Part 15C 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: 5W Wireless Charging Pad - Black

Mode: Max. Power Output

Model: B07PWYBT27

Manufacturer: ASAP Technology(Jiangxi) Co., Ltd.

Polarization: Horizontal

Power Source: DC 5V


Date: 19/04/19/

Time:

Engineer Signature: WADE

Distance: 3m

Note:

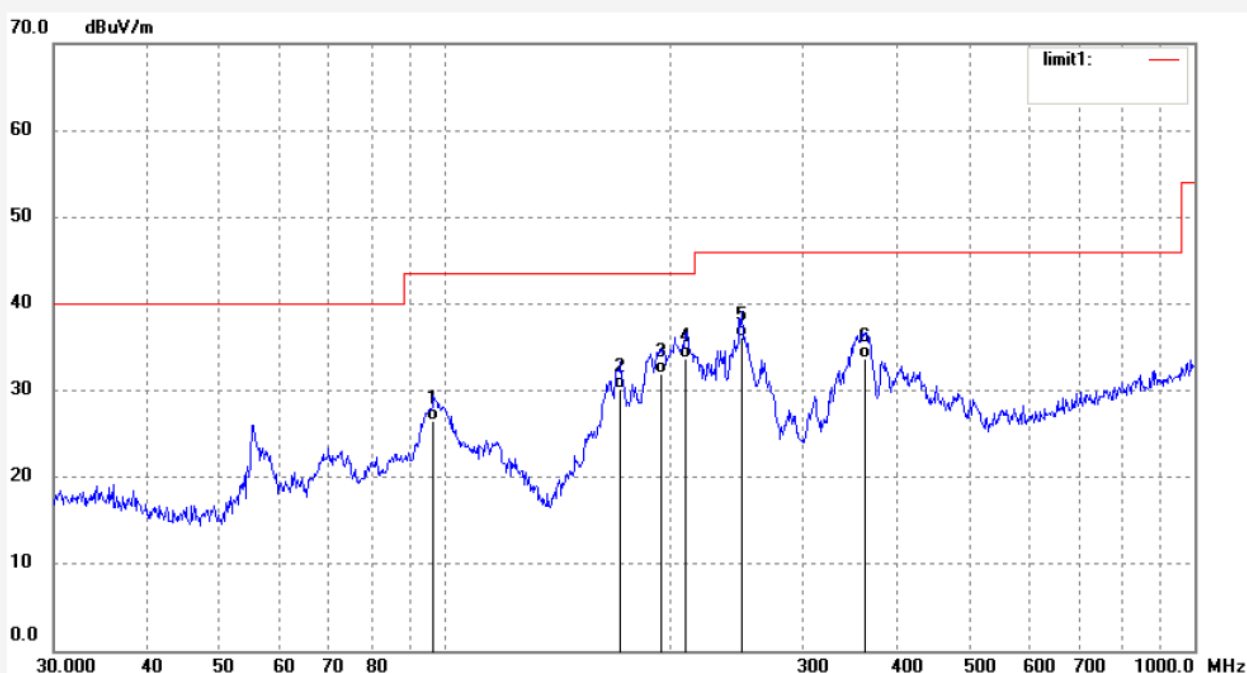

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	96.4362	40.74	-14.25	26.49	43.50	-17.01	QP			
2	171.3926	43.78	-13.52	30.26	43.50	-13.24	QP			
3	193.7728	44.24	-12.34	31.90	43.50	-11.60	QP			
4	209.3129	45.73	-12.02	33.71	43.50	-9.79	QP			
5	248.5519	46.66	-10.55	36.11	46.00	-9.89	QP			
6	362.9844	40.98	-7.24	33.74	46.00	-12.26	QP			

Job No.: tuv2018 #2238

Standard: FCC Part 15C 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: 5W Wireless Charging Pad - Black

Mode: Max. Power Output

Model: B07PWYBT27

Manufacturer: ASAP Technology(Jiangxi) Co., Ltd.

Polarization: Vertical

Power Source: DC 5V


Date: 19/04/19/

Time:

Engineer Signature: WADE

Distance: 3m

Note:

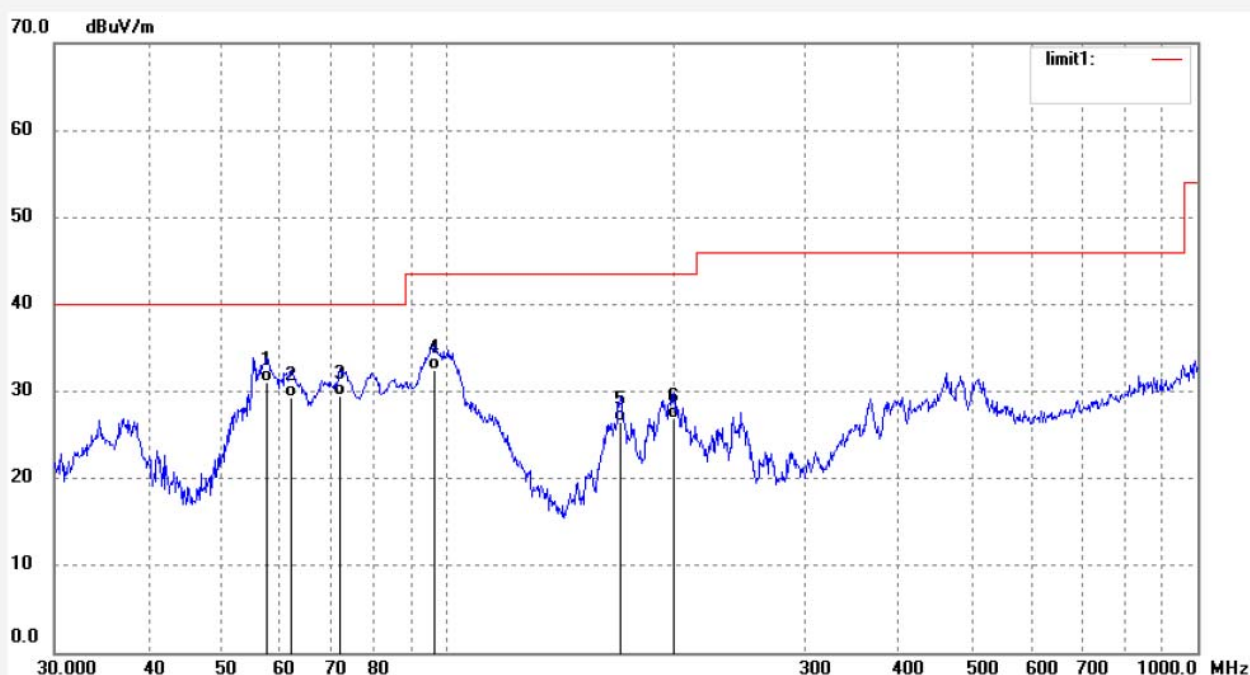

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	57.5939	44.47	-13.45	31.02	40.00	-8.98	QP			
2	61.9951	44.00	-14.62	29.38	40.00	-10.62	QP			
3	72.0843	45.91	-16.34	29.57	40.00	-10.43	QP			
4	96.0986	46.81	-14.37	32.44	43.50	-11.06	QP			
5	170.1948	40.04	-13.54	26.50	43.50	-17.00	QP			
6	200.6881	39.08	-12.25	26.83	43.50	-16.67	QP			

6. OCCUPIED BANDWIDTH TEST

6.1.The Requirement For Section 15.215(c)

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§15.217 through 15.257 and in subpart E of this part, must be designed to ensure that 20dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment compliance with the 20dB attenuation specification may be based on measurement at the intentional radiator's antenna output terminal unless the intentional radiator uses a permanently attached antenna, in which case compliance shall be demonstrated by measuring the radiated emissions.

6.2.The Requirement For RSS-Gen Issue 5, section 6.7

The occupied bandwidth or the "99% emission bandwidth" is defined as the frequency range between two points, one above and the other below the carrier frequency, within which 99% of the total transmitted power of the fundamental transmitted emission is contained. The occupied bandwidth shall be reported for all equipment in addition to the specified bandwidth required in the applicable RSSs.

In some cases, the "x dB bandwidth" is required, which is defined as the frequency range between two points, one at the lowest frequency below and one at the highest frequency above the carrier frequency, at which the maximum power level of the transmitted emission is attenuated x dB below the maximum in-band power level of the modulated signal, where the two points are on the outskirts of the in-band emission.

6.3.Test Procedure


Use the following spectrum analyzer settings:

- a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency
- b) Span = approximately 2 to 5 times the OBW
- c) RBW = 1% to 5% of the OBW
- d) VBW $\geq 3 \times$ RBW
- e) Sweep = auto;
- f) Detector function = peak
- g) Trace = max hold
- h) All the trace to stabilize, use the marker-to-peak function to set the marker to the peak of the emission, use the marker-delta function to measure and record the 20dB down bandwidth of the emission.

6.4. Test Result


Frequency (KHz)	99% Occupied Bandwidth (KHz)	20dB Bandwidth (KHz)
126.026	0.092	0.108

99% Occupied Bandwidth

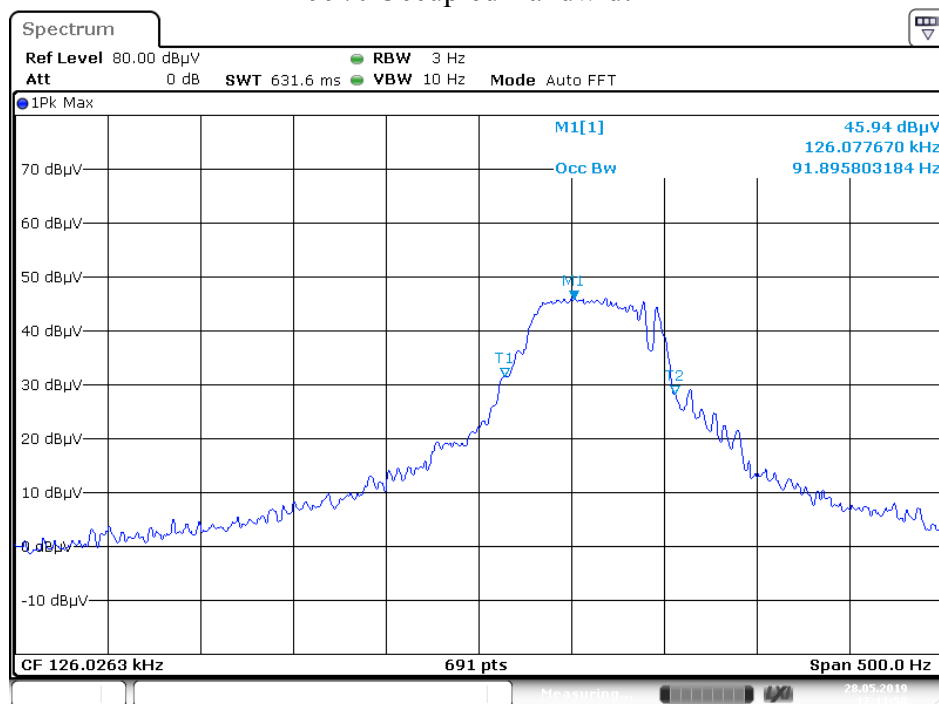

Date: 28.MAY.2019 17:11:50

20dB Bandwidth

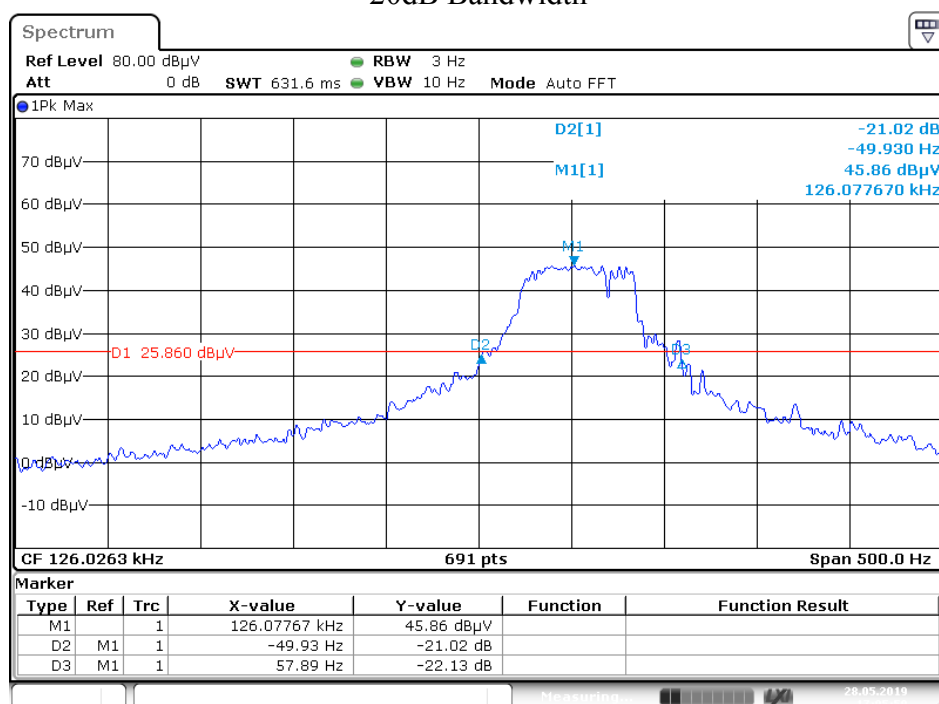

Date: 28.MAY.2019 17:05:50

7. ANTENNA REQUIREMENT

7.1.The Requirement

According to Section 15.203 and RSS-Gen Section 6.8, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

7.2.Antenna Construction

Device is equipped with permanent attached antenna, which isn't displaced by other antenna. Therefore, the equipment complies with the antenna requirement of Section 15.203 and RSS-Gen Section 6.8.

******* End of Test Report *******