

## APPLICATION CERTIFICATION FCC Part 15C&amp;IC

On Behalf of

ASAP Technology(Jiangxi) Co., Ltd.

10W Fast Wireless Charging Pad - White

10W Fast Wireless Charging Pad - Black

Model No.: B07PZ8GHXY, B07Q1DBDCV

FCC ID: 2APXNLACA096

IC: 24654-LACA096

Prepared for : ASAP Technology(Jiangxi) Co., Ltd.  
Address : No.5, Shuguang Rd, West Zone, Ji'an County Industrial Park,  
Ji'an, Jiangxi Ji'an, 343100, P.R.China

Prepared by : Shenzhen Accurate Technology Co., Ltd.  
Address : 1/F., Building A, Changyuan New Material Port, Science &  
Industry Park, Nanshan District, Shenzhen, Guangdong, P.R.  
China

Tel: +86-755-26503290

Fax: +86-755-26503396

Report No. : ATE20190544  
Date of Test : March 28-May 28, 2019  
Date of Report : May 28, 2019

## TABLE OF CONTENTS

| Description                                                 | Page      |
|-------------------------------------------------------------|-----------|
| Test Report Declaration                                     |           |
| <b>1. TEST RESULTS SUMMARY .....</b>                        | <b>4</b>  |
| <b>2. GENERAL INFORMATION .....</b>                         | <b>5</b>  |
| 2.1. Description of Device (EUT).....                       | 5         |
| 2.2. Test Mode .....                                        | 5         |
| 2.3. Special Accessory and Auxiliary Equipment .....        | 5         |
| 2.4. Description of Test Facility .....                     | 6         |
| 2.5. Measurement Uncertainty.....                           | 6         |
| <b>3. MEASURING DEVICE AND TEST EQUIPMENT .....</b>         | <b>7</b>  |
| 3.1. The Equipment Used to Measure Conducted Emission ..... | 7         |
| 3.2. The Equipment Used to Measure Radiated Emission.....   | 7         |
| <b>4. AC POWER LINE CONDUCTED EMISSION TEST .....</b>       | <b>8</b>  |
| 4.1. Block Diagram of Test Setup.....                       | 8         |
| 4.2. AC Power Line Conducted Emission Test Limits .....     | 8         |
| 4.3. Configuration of EUT on Test.....                      | 8         |
| 4.4. Operating Condition of EUT .....                       | 8         |
| 4.5. Test Procedure .....                                   | 9         |
| 4.6. Data Sample.....                                       | 9         |
| 4.7. Test Results.....                                      | 9         |
| <b>5. RADIATED EMISSION TEST .....</b>                      | <b>12</b> |
| 5.1. Block Diagram of Test.....                             | 12        |
| 5.2. Radiated Emission Test Limit.....                      | 13        |
| 5.3. EUT Configuration on Test .....                        | 13        |
| 5.4. Operating Condition of EUT .....                       | 13        |
| 5.5. Test Procedure .....                                   | 14        |
| 5.6. Data Sample.....                                       | 15        |
| 5.7. Test Result .....                                      | 15        |
| <b>6. OCCUPIED BANDWIDTH TEST .....</b>                     | <b>21</b> |
| 6.1. The Requirement For Section 15.215(c).....             | 21        |
| 6.2. The Requirement For RSS-Gen Issue 5, section 6.7 ..... | 21        |
| 6.3. Test Procedure .....                                   | 21        |
| 6.4. Test Result .....                                      | 22        |
| <b>7. ANTENNA REQUIREMENT.....</b>                          | <b>23</b> |
| 7.1. The Requirement .....                                  | 23        |
| 7.2. Antenna Construction .....                             | 23        |

## Test Report Declaration

Applicant : ASAP Technology(Jiangxi) Co., Ltd.

Address : No.5, Shuguang Rd, West Zone, Ji'an County Industrial Park, Ji'an, Jiangxi  
Ji'an, 343100, P.R.China

Product : 10W Fast Wireless Charging Pad – White  
10W Fast Wireless Charging Pad – Black

Model No. : B07PZ8GHXY, B07Q1DBDCV  
(Note: It's just different colors, B07PZ8GHXY for white, B07Q1DBDCV for black.  
So we only tested the B07Q1DBDCV model)

Measurement Procedure Used:

**FCC CFR47 Part 15 Subpart C Section 15.207 and 15.209**

**ANSI C63.10: 2013**

**RSS-216 issue 2 January 2016**

**RSS-Gen Issue 5 April 2018**

The device described above is tested by Shenzhen Accurate Technology Co., Ltd. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C and RSS-216 limits both radiated and conducted emissions. The measurement results are contained in this test report and Shenzhen Accurate Technology Co., Ltd. is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC&IC requirements.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of Shenzhen Accurate Technology Co., Ltd.

Date of Test : March 28-May 28, 2019

Date of Report : May 28, 2019

Prepared by :

Star Yang  
(Star Yang, Engineer)

Approved & Authorized Signer :

Sean Liu  
(Sean Liu, Manager)

## 1. TEST RESULTS SUMMARY

| Test Items                       | Test Standard                                                                             | Test Results |
|----------------------------------|-------------------------------------------------------------------------------------------|--------------|
| AC Power Line Conducted Emission | FCC Part 15.207<br>RSS-216 Issue 2, section 6.2.2.1<br>RSS-Gen Issue 5, section 8.8       | Pass         |
| Radiated Emission                | FCC Part 15.209<br>RSS-216 Issue 2, section 6.2.2.2&6.3.2<br>RSS-Gen Issue 5, section 8.9 | Pass         |
| Occupied Bandwidth               | FCC Part 15.215(c)<br>RSS-Gen Issue 5, section 6.7                                        | N/A          |
| Antenna Requirement              | FCC Part 15.203<br>RSS-Gen Issue 5 section 6.8                                            | Pass         |

## 2. GENERAL INFORMATION

### 2.1. Description of Device (EUT)

| 10W Fast Wireless Charging Pad - Black |   |                                                                                    |
|----------------------------------------|---|------------------------------------------------------------------------------------|
| Operating Frequency                    | : | 110-205KHz                                                                         |
| Type of Modulation                     | : | FSK                                                                                |
| Type of Antenna                        | : | Induction coil                                                                     |
| Operating Voltage                      | : | Input: DC 5V/2A 9V/1.67A<br>Output: DC 5V/1A 9V/1.1A (10W Max)                     |
| Trade Mark                             | : |  |

### 2.2. Test Mode

| Test Item          | EMI Test Modes    |
|--------------------|-------------------|
| Conducted Emission | Max. Power Output |
| Radiated Emission  | Max. Power Output |

### 2.3. Special Accessory and Auxiliary Equipment

| Description                  | Manufacturer | Model     | S/N          |
|------------------------------|--------------|-----------|--------------|
| Fast charging supply adapter | UGREEN       | CD122     | N/A          |
| Iphone8S PLUS                | Apple        | MQ8G2ZP/A | C39V9DEPJCLM |

## 2.4. Description of Test Facility

|               |   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|---------------|---|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| EMC Lab       | : | Recognition of accreditation by Federal Communications Commission (FCC)<br>The Designation Number is CN1189<br>The Registration Number is 708358<br><br>Listed by Innovation, Science and Economic Development Canada (ISED)<br>The Registration Number is 5077A-2<br><br>Accredited by China National Accreditation Service for Conformity Assessment (CNAS)<br>The Registration Number is CNAS L3193<br><br>Accredited by American Association for Laboratory Accreditation (A2LA)<br>The Certificate Number is 4297.01 |
| Name of Firm  | : | Shenzhen Accurate Technology Co., Ltd                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Site Location | : | 1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China                                                                                                                                                                                                                                                                                                                                                                                                 |

## 2.5. Measurement Uncertainty

|                                                        |   |               |
|--------------------------------------------------------|---|---------------|
| Conducted emission expanded uncertainty                | : | U=2.23dB, k=2 |
| Radiated emission expanded uncertainty (9kHz-30MHz)    | : | U=3.08dB, k=2 |
| Radiated emission expanded uncertainty (30MHz-1000MHz) | : | U=4.42dB, k=2 |
| Radiated emission expanded uncertainty (Above 1GHz)    | : | U=4.06dB, k=2 |

### 3. MEASURING DEVICE AND TEST EQUIPMENT

#### 3.1. The Equipment Used to Measure Conducted Emission


| Item | Equipment                         | Manufacturer    | Model No. | Serial No. | Last Cal.    | Cal. Interval |
|------|-----------------------------------|-----------------|-----------|------------|--------------|---------------|
| 1.   | Test Receiver                     | Rohde & Schwarz | ESCS30    | 100307     | Jan.05, 2019 | 1 Year        |
| 2.   | L.I.S.N.                          | Schwarzbeck     | NLSK8126  | 8126431    | Jan.05, 2019 | 1 Year        |
| 3.   | Pulse Limiter                     | Rohde & Schwarz | ESH3-Z2   | 100305     | Jan.05, 2019 | 1 Year        |
| 4.   | 50Ω Coaxial Switch                | Anritsu Corp    | MP59B     | 6200283936 | Jan.05, 2019 | 1 Year        |
| 5.   | RF Coaxial Cable                  | SUHNER          | N-2m      | No.2       | Jan.05, 2019 | 1 Year        |
| 6.   | Measurement Software: ES-K1 V1.71 |                 |           |            |              |               |

#### 3.2. The Equipment Used to Measure Radiated Emission

| Item | Equipment                             | Manufacturer   | Model No. | Serial No. | Last Cal.    | Cal. Interval |
|------|---------------------------------------|----------------|-----------|------------|--------------|---------------|
| 1.   | Spectrum Analyzer                     | Rohde&Schwarz  | FSV40     | 101495     | Jan.05, 2019 | 1 Year        |
| 2.   | Test Receiver                         | Rohde& Schwarz | ESR       | 101817     | Jan.05, 2019 | 1 Year        |
| 3.   | Bilog Antenna                         | Schwarzbeck    | VULB9163  | 9163-323   | Jan.05, 2019 | 1 Year        |
| 4.   | Loop Antenna                          | Schwarzbeck    | FMZB1516  | 1516131    | Jan.05, 2019 | 1 Year        |
| 5.   | Pre-Amplifier                         | Agilent        | 8447D     | 294A10619  | Jan.05, 2019 | 1 Year        |
| 6.   | 50 Coaxial Switch                     | Anritsu Corp   | MP59B     | 6200506474 | Jan.05, 2019 | 1 Year        |
| 7.   | RF Coaxial Cable                      | RESENBERGER    | N-12m     | No.11      | Jan.05, 2019 | 1 Year        |
| 8.   | RF Coaxial Cable                      | RESENBERGER    | N-0.5m    | No.12      | Jan.05, 2019 | 1 Year        |
| 9.   | RF Coaxial Cable                      | SUHNER         | N-2m      | No.13      | Jan.05, 2019 | 1 Year        |
| 10.  | RF Coaxial Cable                      | SUHNER         | N-0.5m    | No.15      | Jan.05, 2019 | 1 Year        |
| 11.  | RF Coaxial Cable                      | SUHNER         | N-2m      | No.16      | Jan.05, 2019 | 1 Year        |
| 12.  | RF Coaxial Cable                      | RESENBERGER    | N-6m      | No.17      | Jan.05, 2019 | 1 Year        |
| 13.  | Measurement Software: EZ EMC V1.1.4.2 |                |           |            |              |               |

## 4. AC POWER LINE CONDUCTED EMISSION TEST

### 4.1. Block Diagram of Test Setup

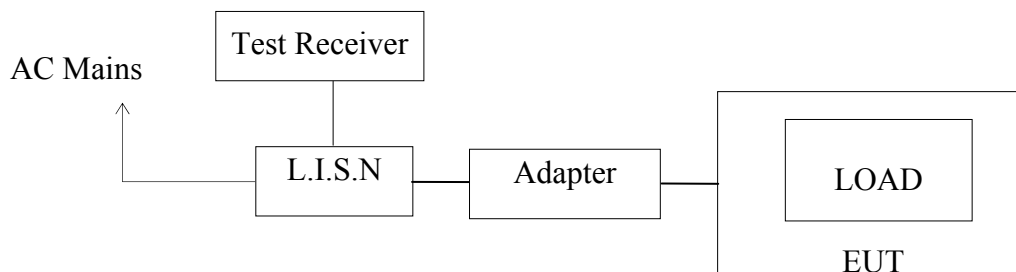

### 4.2. AC Power Line Conducted Emission Test Limits

| Frequency<br>(MHz) | Limit dB(μV)     |               |
|--------------------|------------------|---------------|
|                    | Quasi-peak Level | Average Level |
| 0.15 - 0.50        | 66.0 – 56.0 *    | 56.0 – 46.0 * |
| 0.50 - 5.00        | 56.0             | 46.0          |
| 5.00 - 30.00       | 60.0             | 50.0          |

NOTE1: The lower limit shall apply at the transition frequencies.  
 NOTE2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.50MHz.

### 4.3. Configuration of EUT on Test

The equipments are installed on Power Line Conducted Emission Measurement to meet the commission requirement and operating regulations in a manner, which tends to maximize its emission characteristics in a normal application.

### 4.4. Operating Condition of EUT

- 4.4.1. Setup the EUT and simulator as shown as Section 4.1.
- 4.4.2. Turn on the power of all equipment.
- 4.4.3. Let the EUT work in test mode and measure it.

#### 4.5. Test Procedure

The EUT is put on the plane 0.8 m high above the ground by insulating support and is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC lines are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.10: 2013 on Conducted Emission Measurement.

The bandwidth of test receiver (R & S ESCS30) is set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.

#### 4.6. Data Sample

| Frequency (MHz) | Transducer value (dB) | QuasiPeak Level (dBμV) | Average Level (dBμV) | QuasiPeak Limit (dBμV) | Average Limit (dBμV) | QuasiPeak Margin (dB) | Average Margin (dB) | Remark (Pass/Fail) |
|-----------------|-----------------------|------------------------|----------------------|------------------------|----------------------|-----------------------|---------------------|--------------------|
| X.XX            | 10.6                  | 25.3                   | 17.0                 | 59.0                   | 49.0                 | 33.7                  | 32.0                | Pass               |

Transducer value = Insertion loss of LISN + Cable Loss  
Result = Quasi-peak Level/Average Level + Transducer value  
Limit = Limit stated in standard

Calculation Formula:

Margin = Limit – Reading level value – Transducer value

#### 4.7. Test Results

**Pass.**

The frequency range from 150kHz to 30MHz is checked.

Emissions attenuated more than 20 dB below the permissible value are not reported.

The spectral diagrams are attached as below.


## ACCURATE TECHNOLOGY CO., LTD

### CONDUCTED EMISSION STANDARD FCC PART 15 C

EUT: 10W Fast Wireless Charging Pad - Black M/N:B07Q1DBDCV  
 Manufacturer: ASAP Technology(Jiangxi) Co., Ltd.  
 Operating Condition: Max. Power Output  
 Test Site: 1#Shielding Room  
 Operator: WADE  
 Test Specification: L 120V/60Hz  
 Comment:  
 Start of Test: 3/28/2019 /

### SCAN TABLE: "V 9K-30MHz fin"

Short Description: \_SUB\_STD\_VTERM2 1.70  
 Start Stop Step Detector Meas. IF Transducer  
 Frequency Frequency Width Time Bandw.  
 9.0 kHz 150.0 kHz 100.0 Hz QuasiPeak 1.0 s 200 Hz NSLK8126 2008  
 Average  
 150.0 kHz 30.0 MHz 5.0 kHz QuasiPeak 1.0 s 9 kHz NSLK8126 2008  
 Average

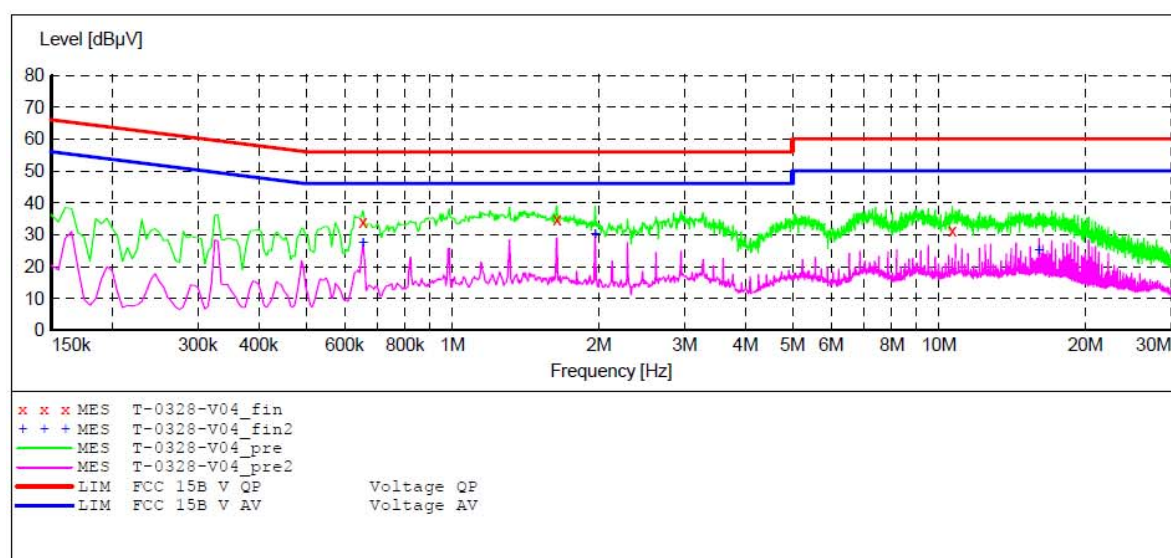

### MEASUREMENT RESULT: "T-0328-V04\_fin"

3/28/2019

| Frequency<br>MHz | Level<br>dBμV | Transd<br>dB | Limit<br>dBμV | Margin<br>dB | Detector | Line | PE  |
|------------------|---------------|--------------|---------------|--------------|----------|------|-----|
| 0.655000         | 34.00         | 10.8         | 56            | 22.0         | QP       | L1   | GND |
| 1.640000         | 34.60         | 10.9         | 56            | 21.4         | QP       | L1   | GND |
| 10.645000        | 31.40         | 11.3         | 60            | 28.6         | QP       | L1   | GND |

### MEASUREMENT RESULT: "T-0328-V04\_fin2"

3/28/2019

| Frequency<br>MHz | Level<br>dBμV | Transd<br>dB | Limit<br>dBμV | Margin<br>dB | Detector | Line | PE  |
|------------------|---------------|--------------|---------------|--------------|----------|------|-----|
| 0.655000         | 27.30         | 10.8         | 46            | 18.7         | AV       | L1   | GND |
| 1.965000         | 29.90         | 11.0         | 46            | 16.1         | AV       | L1   | GND |
| 16.045000        | 24.90         | 11.4         | 50            | 25.1         | AV       | L1   | GND |


## ACCURATE TECHNOLOGY CO.,LTD

### CONDUCTED EMISSION STANDARD FCC PART 15 C

EUT: 10W Fast Wireless Charging Pad - Black M/N:B07Q1DBDCV  
 Manufacturer: ASAP Technology(Jiangxi) Co., Ltd.  
 Operating Condition: Max. Power Output  
 Test Site: 1#Shielding Room  
 Operator: WADE  
 Test Specification: N 120V/60Hz  
 Comment:  
 Start of Test: 3/28/2019 /

### SCAN TABLE: "V 9K-30MHz fin"

Short Description: \_SUB\_STD\_VTERM2 1.70  
 Start Stop Step Detector Meas. IF Transducer  
 Frequency Frequency Width Time Bandw.  
 9.0 kHz 150.0 kHz 100.0 Hz QuasiPeak 1.0 s 200 Hz NSLK8126 2008  
 Average  
 150.0 kHz 30.0 MHz 5.0 kHz QuasiPeak 1.0 s 9 kHz NSLK8126 2008  
 Average

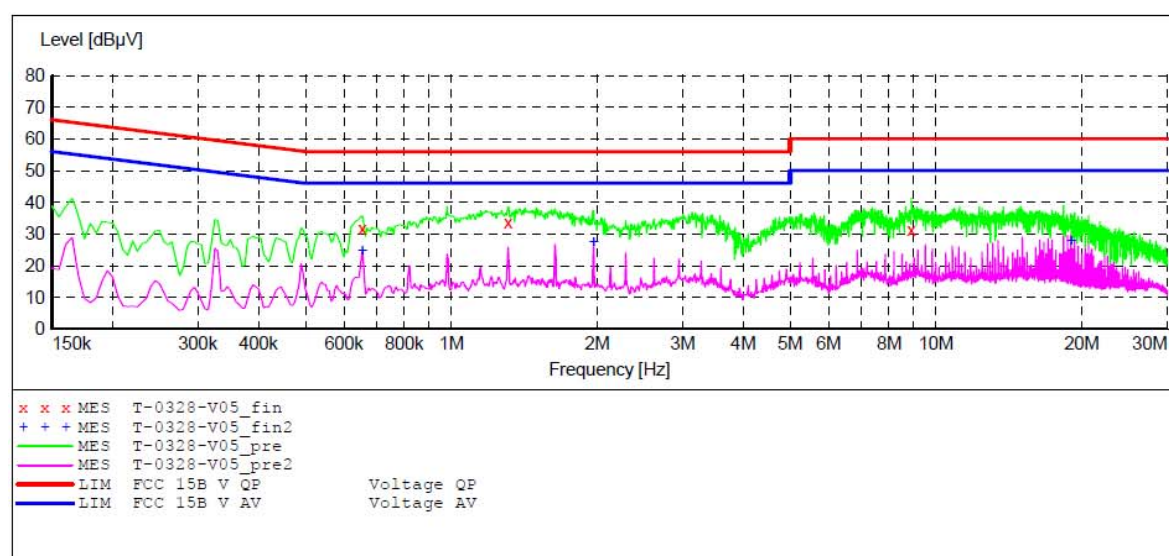

### MEASUREMENT RESULT: "T-0328-V05\_fin"

3/28/2019

| Frequency<br>MHz | Level<br>dBμV | Transd<br>dB | Limit<br>dBμV | Margin<br>dB | Detector | Line | PE  |
|------------------|---------------|--------------|---------------|--------------|----------|------|-----|
| 0.655000         | 31.80         | 10.8         | 56            | 24.2         | QP       | N    | GND |
| 1.310000         | 33.50         | 10.9         | 56            | 22.5         | QP       | N    | GND |
| 8.900000         | 31.30         | 11.3         | 60            | 28.7         | QP       | N    | GND |

### MEASUREMENT RESULT: "T-0328-V05\_fin2"


3/28/2019

| Frequency<br>MHz | Level<br>dBμV | Transd<br>dB | Limit<br>dBμV | Margin<br>dB | Detector | Line | PE  |
|------------------|---------------|--------------|---------------|--------------|----------|------|-----|
| 0.655000         | 24.50         | 10.8         | 46            | 21.5         | AV       | N    | GND |
| 1.965000         | 27.20         | 11.0         | 46            | 18.8         | AV       | N    | GND |
| 19.000000        | 27.60         | 11.4         | 50            | 22.4         | AV       | N    | GND |

## 5. RADIATED EMISSION TEST


### 5.1. Block Diagram of Test

#### 5.1.1. Block diagram of connection between the EUT and simulators

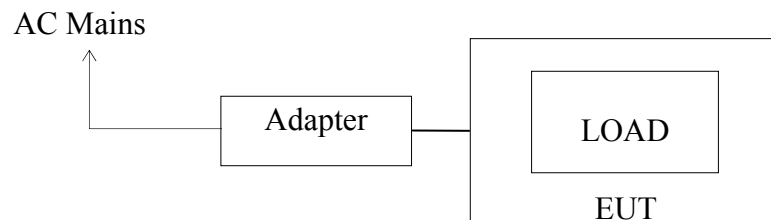


#### 5.1.2. Block diagram of test setup (In chamber)

(A) Radiated Emission Test Set-Up, Frequency below 30MHz

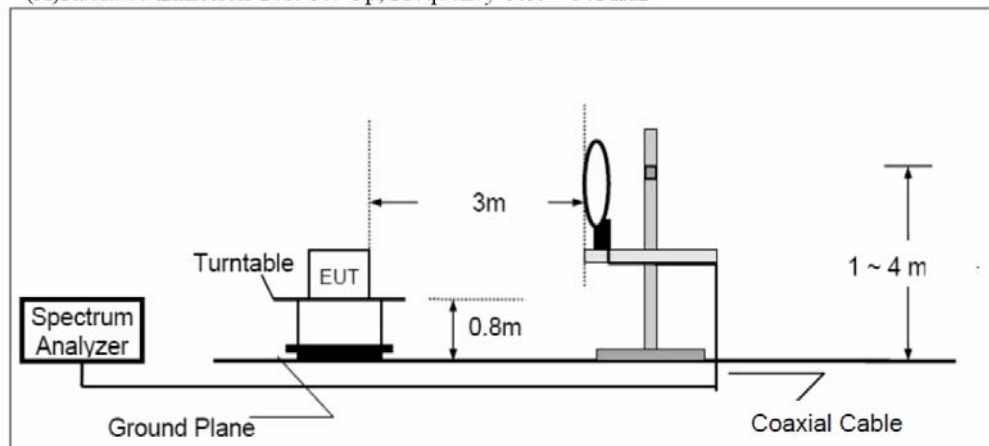

(B) Radiated Emission Test Set-Up, Frequency 30-1000MHz

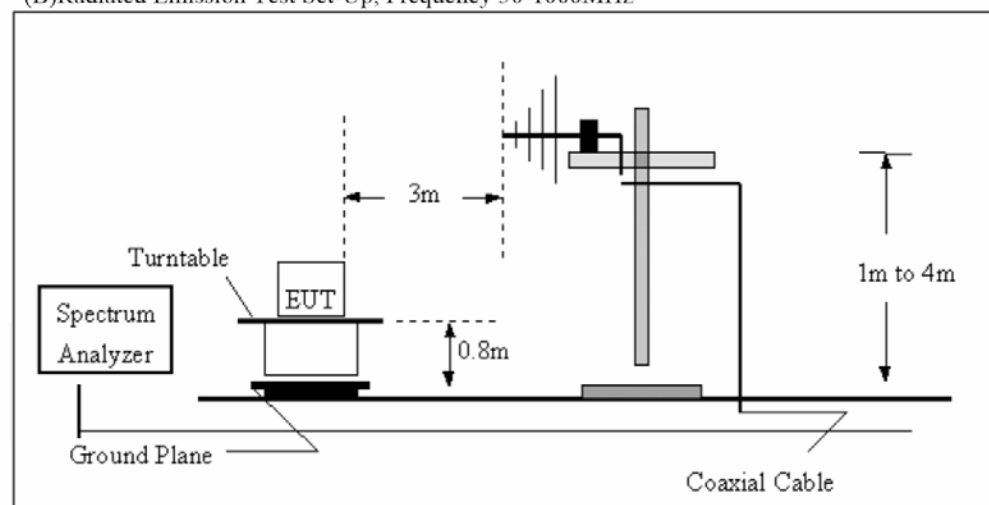

## 5.2.Radiated Emission Test Limit

| Frequency<br>(MHz) | Field Strength<br>Limitation |      | Field Strength Limitation at 3m Measurement Dist |                         |
|--------------------|------------------------------|------|--------------------------------------------------|-------------------------|
|                    | (uV/m)                       | Dist | (uV/m)                                           | (dBuV/m)                |
| 0.009 – 0.490      | 2400 / F(KHz)                | 300m | 10000 * 2400/F(KHz)                              | 20log 2400/F(KHz) + 80  |
| 0.490 – 1.705      | 24000 / F(KHz)               | 30m  | 100 * 24000/F(KHz)                               | 20log 24000/F(KHz) + 40 |
| 1.705 – 30.00      | 30                           | 30m  | 100* 30                                          | 20log 30 + 40           |
| 30.0 – 88.0        | 100                          | 3m   | 100                                              | 20log 100               |
| 88.0 – 216.0       | 150                          | 3m   | 150                                              | 20log 150               |
| 216.0 – 960.0      | 200                          | 3m   | 200                                              | 20log 200               |
| Above 960.0        | 500                          | 3m   | 500                                              | 20log 500               |

Limit: [2400/125=19.2uV/m@300m](#)

Distance Correction Factor=40log(test distance/specific distance)

## 5.3.EUT Configuration on Test

The equipments are installed on Radiated Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

## 5.4.Operating Condition of EUT

- 5.4.1. Setup the EUT and simulator as shown as Section 5.1.
- 5.4.2. Turn on the power of all equipment.
- 5.4.3. Let the EUT work in test mode and measure it.

### 5.5. Test Procedure

The EUT and its simulators are placed on a turntable, which is 0.8 meter high above ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna. Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.10: 2013 on radiated emission measurement.

From 9kHz to 30MHz at distance 3m The EUT was rotated a full revolution in order to obtain the maximum value of the electric field intensity.

From 30MHz to 1000MHz at distance 3m The measuring antenna height varied between 1 and 4m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field intensity. The measurements were performed for both vertical and horizontal antenna polarization.

The final measurement will be performed with an EMI Receiver set to Quasi Peak detector for the frequency bands 9kHz to 90kHz and 110 to 490 kHz where an average detector will be used according to Section 15.209(d)(2).

The final level, expressed in dBuV/m, is arrived at by taking the reading from the EMI receiver(Level dBuV) and adding the antenna correction factor and cable loss factor(Factor dB) to it. This result then has to be compared with the relevant FCC limit. The resolution bandwidth during the measurement is as follows:

9kHz – 150kHz: ResBW: 200Hz

150kHz – 30MHz: ResBW: 9kHz

The bandwidth of the EMI test receiver is set at 120kHz from 30MHz to 1000MHz.

### 5.6.Data Sample

| Frequency(MHz) | Reading (dB $\mu$ v) | Factor (dB/m) | Result (dB $\mu$ v/m) | Limit (dB $\mu$ v/m) | Margin (dB) | Remark |
|----------------|----------------------|---------------|-----------------------|----------------------|-------------|--------|
| X.XX           | 49.83                | -22.03        | 27.80                 | 43.50                | -15.70      | QP     |

Frequency(MHz) = Emission frequency in MHz

Reading(dB $\mu$ v) = Uncorrected Analyzer/Receiver reading

Factor (dB/m)= Antenna factor + Cable Loss – Amplifier gain

Result(dB $\mu$ v/m) = Reading + Factor

Limit (dB $\mu$ v/m)= Limit stated in standard

Calculation Formula:

Margin(dB) = Result (dB $\mu$ v/m)–Limit(dB $\mu$ v/m)

Result(dB $\mu$ v/m)= Reading(dB $\mu$ v)+ Factor(dB/m)

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the limit.

### 5.7.Test Result

**Pass.**

Emissions attenuated more than 20 dB below the permissible value are not reported.

The spectrum analyzer plots are attached as below.

From 9kHz to 30MHz:


ACCURATE TECHNOLOGY CO.,LTD

## RADIATED EMISSION STANDARD FCC PART 15 C

EUT: 10W Fast Wireless Charging Pad - Black M/N:B07Q1DBDCV  
 Manufacturer: ASAP Technology(Jiangxi) Co., Ltd.  
 Operating Condition: Max. Power Output  
 Test Site: 2#Chamber  
 Operator: WADE  
 Test Specification: DC 5V  
 Comment: X  
 Start of Test: 2019-4-17 /

## SCAN TABLE: "LFRE(E) Fin"

| Start     | Stop      | Step     | Detector  | Meas. Time | IF Bandw. | Transducer |
|-----------|-----------|----------|-----------|------------|-----------|------------|
| 9.0 kHz   | 150.0 kHz | 100.0 Hz | QuasiPeak | 1.0 s      | 200 Hz    | 1516E      |
| 150.0 kHz | 30.0 MHz  | 5.0 kHz  | QuasiPeak | 1.0 s      | 9 kHz     | 1516E      |

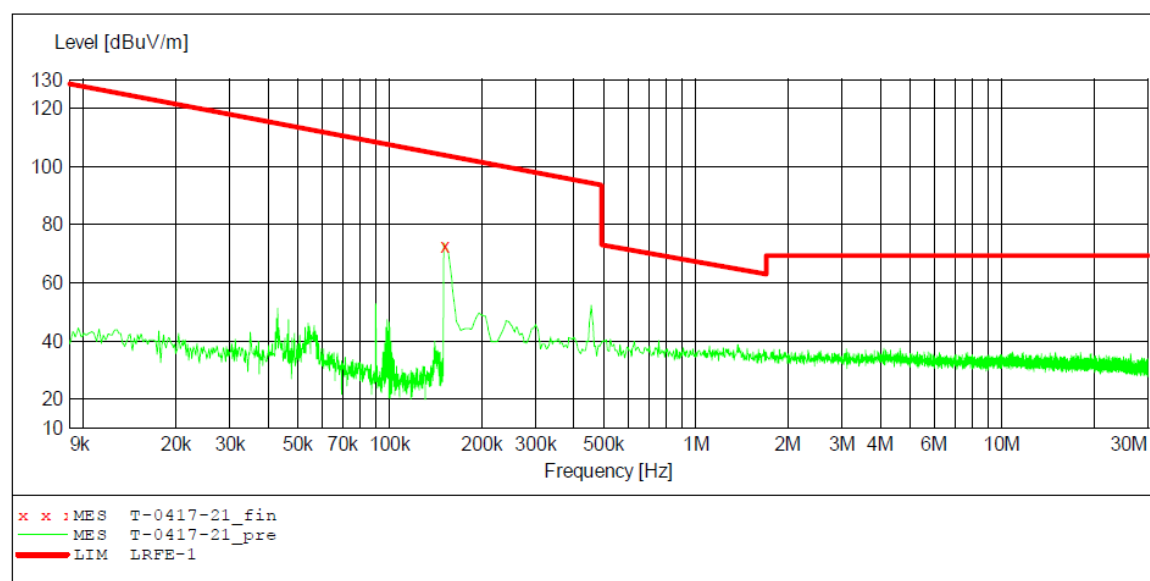

## MEASUREMENT RESULT: "T-0417-21\_fin"

2019-4-17

| Frequency MHz | Level dBuV/m | Transd dB | Limit dBuV/m | Margin dB | Det. | Height cm | Azimuth deg | Polarization |
|---------------|--------------|-----------|--------------|-----------|------|-----------|-------------|--------------|
| 0.150000      | 72.50        | /         | /            | /         | PK   | /         | /           | X            |


## ACCURATE TECHNOLOGY CO., LTD

### RADIATED EMISSION STANDARD FCC PART 15 C

EUT: 10W Fast Wireless Charging Pad - Black M/N:B07Q1DBDCV  
 Manufacturer: ASAP Technology(Jiangxi) Co., Ltd.  
 Operating Condition: Max. Power Output  
 Test Site: 2#Chamber  
 Operator: WADE  
 Test Specification: DC 5V  
 Comment: Y  
 Start of Test: 2019-4-17 /

### SCAN TABLE: "LFRE(E) Fin"

| Short Description: |           |          | _SUB_STD_VTERM2 1.70 |            |           |            |
|--------------------|-----------|----------|----------------------|------------|-----------|------------|
| Start              | Stop      | Step     | Detector             | Meas. Time | IF Bandw. | Transducer |
| 9.0 kHz            | 150.0 kHz | 100.0 Hz | QuasiPeak            | 1.0 s      | 200 Hz    | 1516E      |
| 150.0 kHz          | 30.0 MHz  | 5.0 kHz  | QuasiPeak            | 1.0 s      | 9 kHz     | 1516E      |

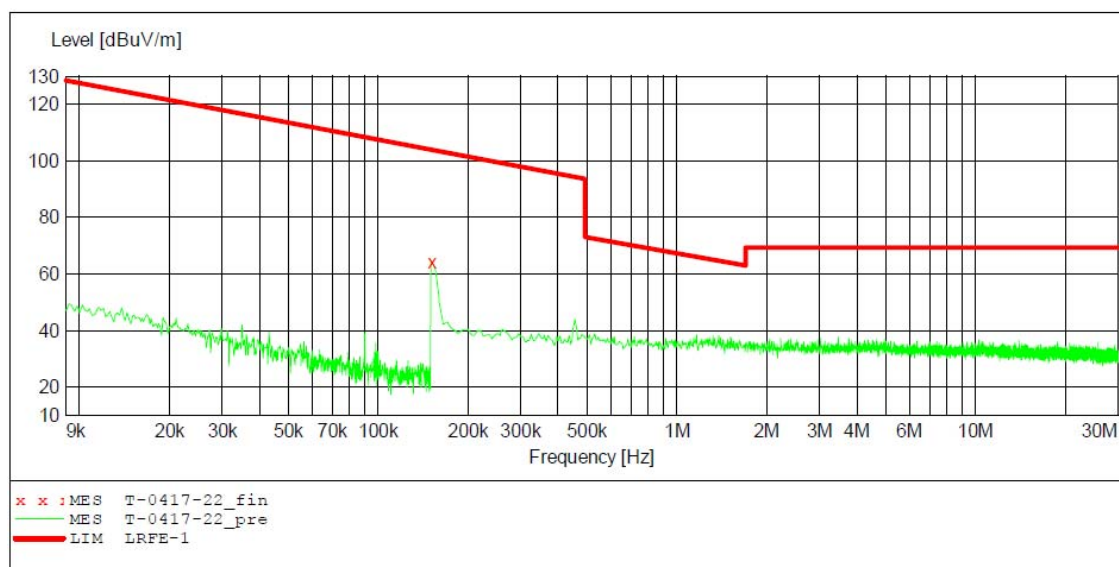

### MEASUREMENT RESULT: "T-0417-22\_fin"

2019-4-17

| Frequency MHz | Level dBuV/m | Transd dB | Limit dBuV/m | Margin dB | Det. | Height cm | Azimuth deg | Polarization |
|---------------|--------------|-----------|--------------|-----------|------|-----------|-------------|--------------|
| 0.150000      | 64.20        | /         | /            | /         | PK   | /         | /           | Y            |


ACCURATE TECHNOLOGY CO., LTD

## RADIATED EMISSION STANDARD FCC PART 15 C

EUT: 10W Fast Wireless Charging Pad - Black M/N:B07Q1DBDCV  
 Manufacturer: ASAP Technology(Jiangxi) Co., Ltd.  
 Operating Condition: Max. Power Output  
 Test Site: 2#Chamber  
 Operator: WADE  
 Test Specification: DC 5V  
 Comment: Z  
 Start of Test: 2019-4-17 /

### SCAN TABLE: "LFRE(E) Fin"

| Short Description: |           |          | _SUB_STD_VTERM2 1.70 |            |           |            |  |
|--------------------|-----------|----------|----------------------|------------|-----------|------------|--|
| Start              | Stop      | Step     | Detector             | Meas. Time | IF Bandw. | Transducer |  |
| 9.0 kHz            | 150.0 kHz | 100.0 Hz | QuasiPeak            | 1.0 s      | 200 Hz    | 1516E      |  |
| 150.0 kHz          | 30.0 MHz  | 5.0 kHz  | QuasiPeak            | 1.0 s      | 9 kHz     | 1516E      |  |

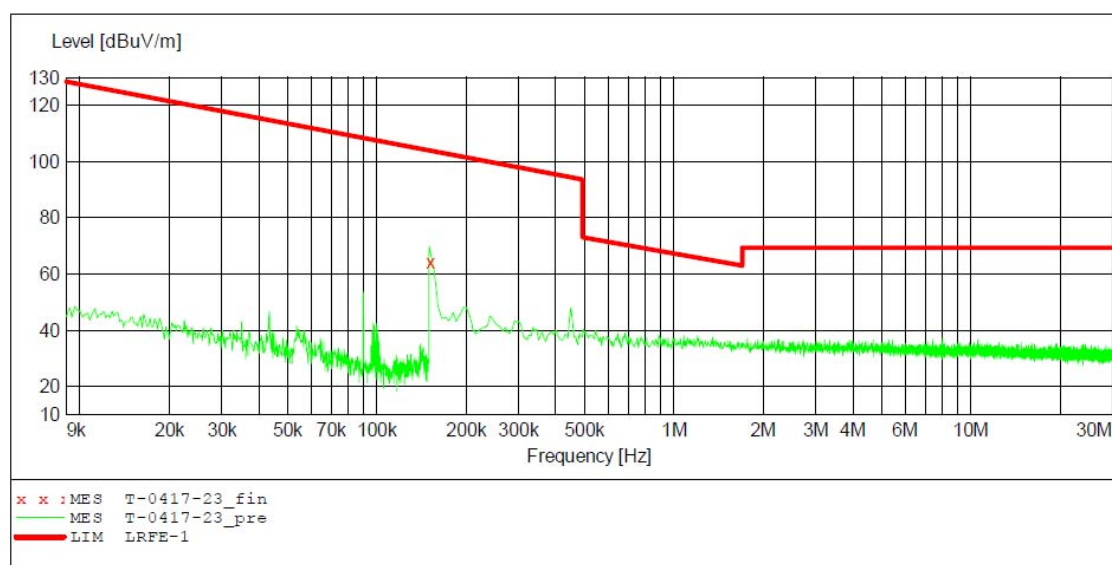

### MEASUREMENT RESULT: "T-0417-23\_fin"

2019-4-17

| Frequency<br>MHz | Level<br>dBuV/m | Transd<br>dB | Limit<br>dBuV/m | Margin<br>dB | Det. | Height<br>cm | Azimuth<br>deg | Polarization |
|------------------|-----------------|--------------|-----------------|--------------|------|--------------|----------------|--------------|
| 0.150000         | 64.68           | /            | /               | /            | PK   | /            | /              | Z            |

Job No.: tuv2018 #1965

Standard: FCC Part 15C 3M Radiated

Test item: Radiation Test

Temp.( C)/Hum.(%) 23 C / 48 %

EUT: 10W Fast Wireless Charging Pad - Black

Mode: Max. Power Output

Model: B07Q1DBDCV

Manufacturer: ASAP Technology(Jiangxi) Co., Ltd.

Polarization: Horizontal

Power Source: DC 5V


Date: 19/03/29/

Time:

Engineer Signature: WADE

Distance: 3m

Note:

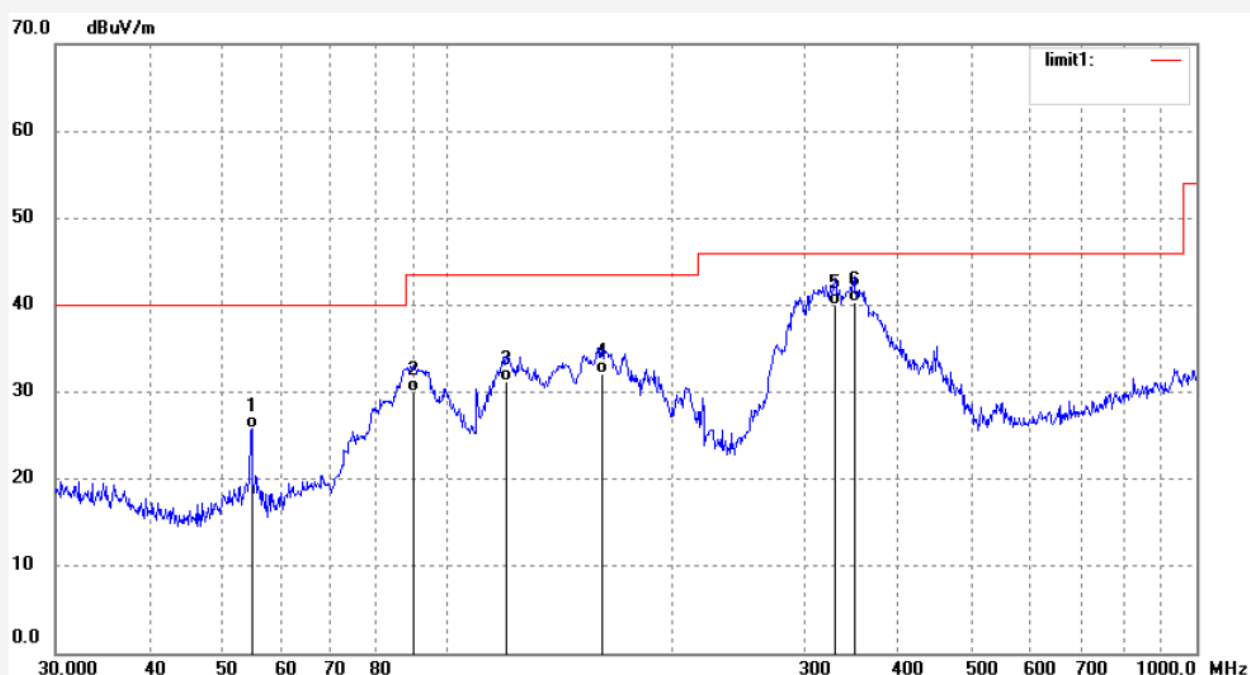

| No. | Freq.<br>(MHz) | Reading<br>(dBuV/m) | Factor<br>(dB) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Degree<br>(deg.) | Remark |
|-----|----------------|---------------------|----------------|--------------------|-------------------|----------------|----------|----------------|------------------|--------|
| 1   | 54.8348        | 38.70               | -12.94         | 25.76              | 40.00             | -14.24         | QP       |                |                  |        |
| 2   | 90.2205        | 44.93               | -15.00         | 29.93              | 43.50             | -13.57         | QP       |                |                  |        |
| 3   | 119.8556       | 44.31               | -13.06         | 31.25              | 43.50             | -12.25         | QP       |                |                  |        |
| 4   | 160.9089       | 46.56               | -14.40         | 32.16              | 43.50             | -11.34         | QP       |                |                  |        |
| 5   | 329.0390       | 48.12               | -8.07          | 40.05              | 46.00             | -5.95          | QP       |                |                  |        |
| 6   | 349.2500       | 47.76               | -7.44          | 40.32              | 46.00             | -5.68          | QP       |                |                  |        |

Job No.: tuv2018 #1964

Standard: FCC Part 15C 3M Radiated

Test item: Radiation Test

Temp.( C)/Hum.(%) 23 C / 48 %

EUT: 10W Fast Wireless Charging Pad - Black

Mode: Max. Power Output

Model: B07Q1DBDCV

Manufacturer: ASAP Technology(Jiangxi) Co., Ltd.

Polarization: Vertical

Power Source: DC 5V


Date: 19/03/29/

Time:

Engineer Signature: WADE

Distance: 3m

Note:

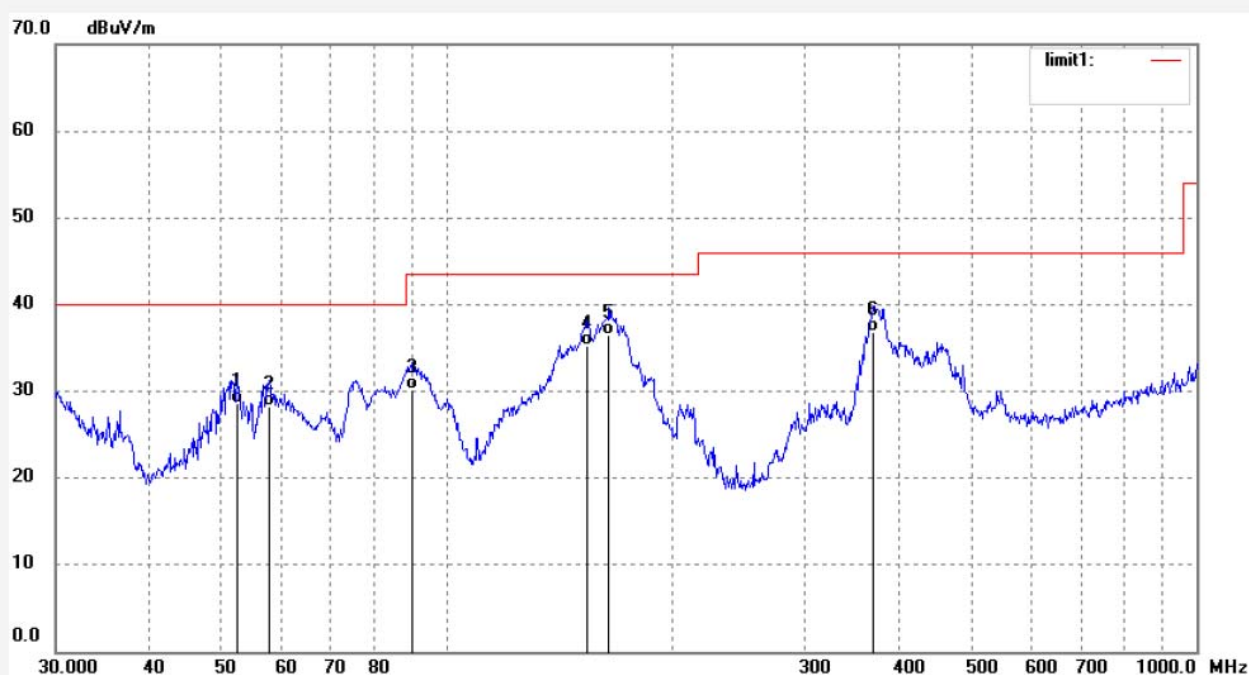

| No. | Freq.<br>(MHz) | Reading<br>(dBuV/m) | Factor<br>(dB) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Degree<br>(deg.) | Remark |
|-----|----------------|---------------------|----------------|--------------------|-------------------|----------------|----------|----------------|------------------|--------|
| 1   | 52.3912        | 41.35               | -12.76         | 28.59              | 40.00             | -11.41         | QP       |                |                  |        |
| 2   | 57.7961        | 41.69               | -13.49         | 28.20              | 40.00             | -11.80         | QP       |                |                  |        |
| 3   | 89.5899        | 45.30               | -15.04         | 30.26              | 43.50             | -13.24         | QP       |                |                  |        |
| 4   | 153.7384       | 50.23               | -14.98         | 35.25              | 43.50             | -8.25          | QP       |                |                  |        |
| 5   | 164.3301       | 50.89               | -14.34         | 36.55              | 43.50             | -6.95          | QP       |                |                  |        |
| 6   | 369.4045       | 44.03               | -7.16          | 36.87              | 46.00             | -9.13          | QP       |                |                  |        |

## 6. OCCUPIED BANDWIDTH TEST

### 6.1. The Requirement For Section 15.215(c)

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§15.217 through 15.257 and in subpart E of this part, must be designed to ensure that 20dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment compliance with the 20dB attenuation specification may be based on measurement at the intentional radiator's antenna output terminal unless the intentional radiator uses a permanently attached antenna, in which case compliance shall be demonstrated by measuring the radiated emissions.

### 6.2. The Requirement For RSS-Gen Issue 5, section 6.7

The occupied bandwidth or the "99% emission bandwidth" is defined as the frequency range between two points, one above and the other below the carrier frequency, within which 99% of the total transmitted power of the fundamental transmitted emission is contained. The occupied bandwidth shall be reported for all equipment in addition to the specified bandwidth required in the applicable RSSs.

In some cases, the "x dB bandwidth" is required, which is defined as the frequency range between two points, one at the lowest frequency below and one at the highest frequency above the carrier frequency, at which the maximum power level of the transmitted emission is attenuated x dB below the maximum in-band power level of the modulated signal, where the two points are on the outskirts of the in-band emission.

### 6.3. Test Procedure


Use the following spectrum analyzer settings:

- a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency
- b) Span = approximately 2 to 5 times the OBW
- c) RBW = 1% to 5% of the OBW
- d) VBW  $\geq 3 \times$  RBW
- e) Sweep = auto;
- f) Detector function = peak
- g) Trace = max hold
- h) All the trace to stabilize, use the marker-to-peak function to set the marker to the peak of the emission, use the marker-delta function to measure and record the 20dB down bandwidth of the emission.

## 6.4. Test Result


| Frequency (KHz) | 99% Occupied Bandwidth (KHz) | 20dB Bandwidth (KHz) |
|-----------------|------------------------------|----------------------|
| 127.176         | 0.150                        | 0.151                |

### 99% Occupied Bandwidth

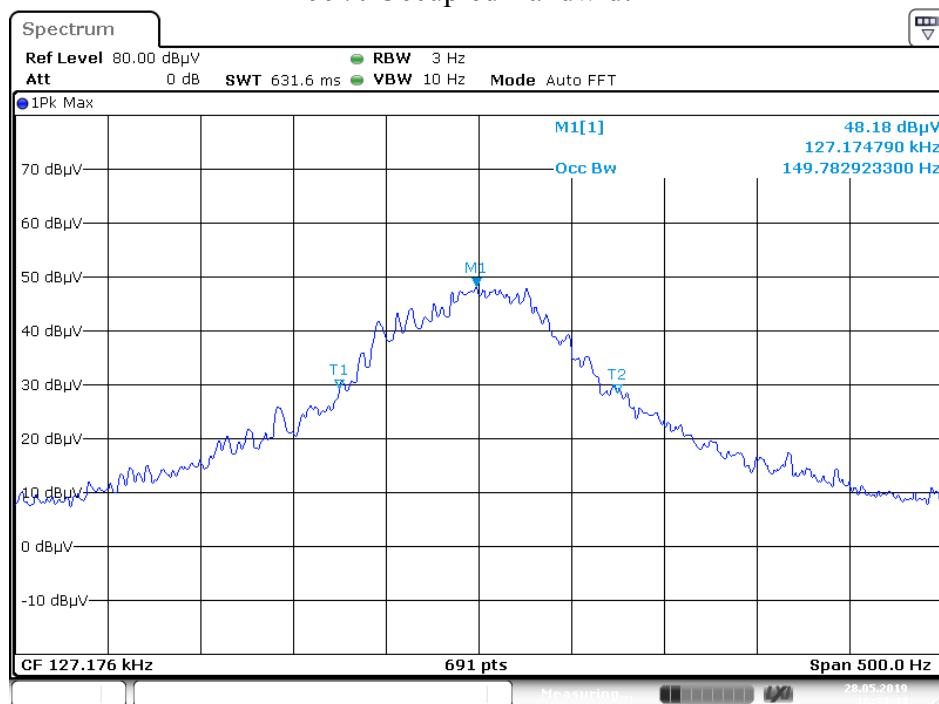

Date: 28.MAY.2019 16:34:44

### 20dB Bandwidth

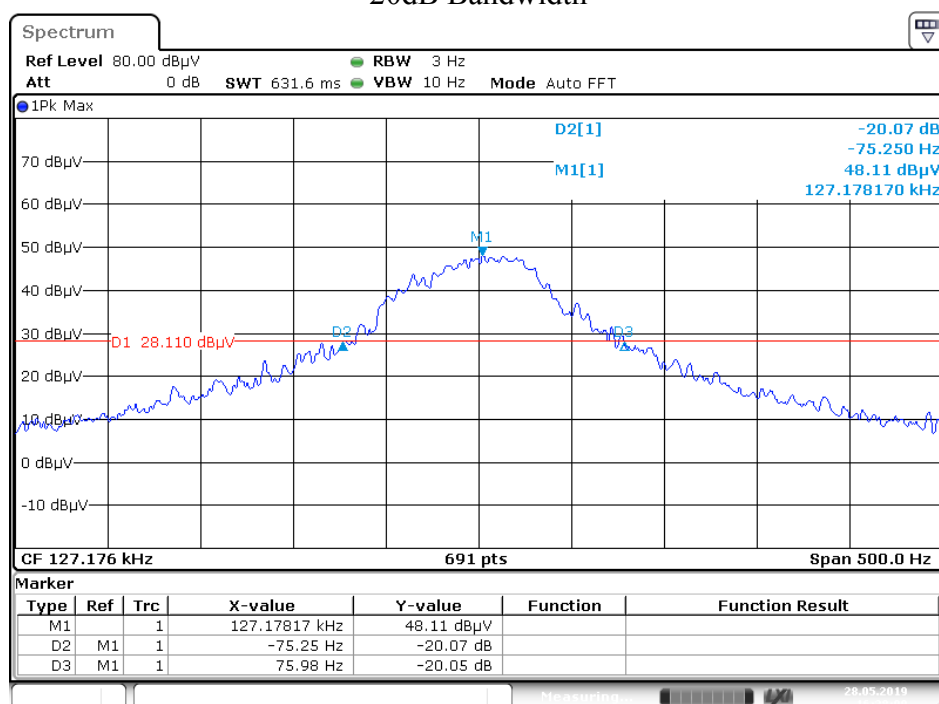

Date: 28.MAY.2019 16:38:00

## 7. ANTENNA REQUIREMENT

### 7.1.The Requirement

According to Section 15.203 and RSS-Gen Section 6.8, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

### 7.2.Antenna Construction

Device is equipped with permanent attached antenna, which isn't displaced by other antenna. Therefore, the equipment complies with the antenna requirement of Section 15.203 and RSS-Gen Section 6.8.

**\*\*\*\*\* End of Test Report \*\*\*\*\***