

ASAP Technology (Jiangxi) Co., Ltd.

TEST REPORT.

SCOPE OF WORK

SAR Assessment– LACA116, WIAWHT100012443

REPORT NUMBER

191204035SZN-002

ISSUE DATE

18 February 2020

[REVISED DATE]

[-----]

PAGES

12

DOCUMENT CONTROL NUMBER

RF Exposure

© 2017 INTERTEK



Test Report

Applicant : ASAP Technology (Jiangxi) Co., Ltd.
Ji'an Industrial Park Ji'an Jiangxi China

Sample Description

Product : Wireless Charger

Model No. : LACA116, WIAWHT100012443

Brand Name : onn.

Electrical Rating : Input: DC9V 1.67A;
Output: Each 5W Max. (Total: 10W Max.)

Date Received : 4 December 2019

Date Test Conducted : 4 December 2019 to 10 February 2020

Test Requested : Test for compliance with CFR 47 part 1

Test Method : Environmental evaluation and exposure limit according
to FCC CFR 47 part 1, 1.1307(c) and (d), 1.1310

Test Result : Pass

Conclusion : When determining of test conclusion, measurement
uncertainty of tests have been considered.

***** End of Page *****

Prepared and Checked By:

Approved By:

Jeff Liang
Engineer

Kidd Yang
Technical Supervisor
Date: 18 February 2020

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

Intertek Testing Services Shenzhen Ltd. Longhua Branch


101, 201, Building B, No. 308 Wuhe Avenue, Zhangkengjing Community, GuanHu Subdistrict, LongHua District, ShenZhen.

Tel: (86 755) 8601 6288

Fax: (86 755) 8601 6751

Test Report

Test Setup Configuration

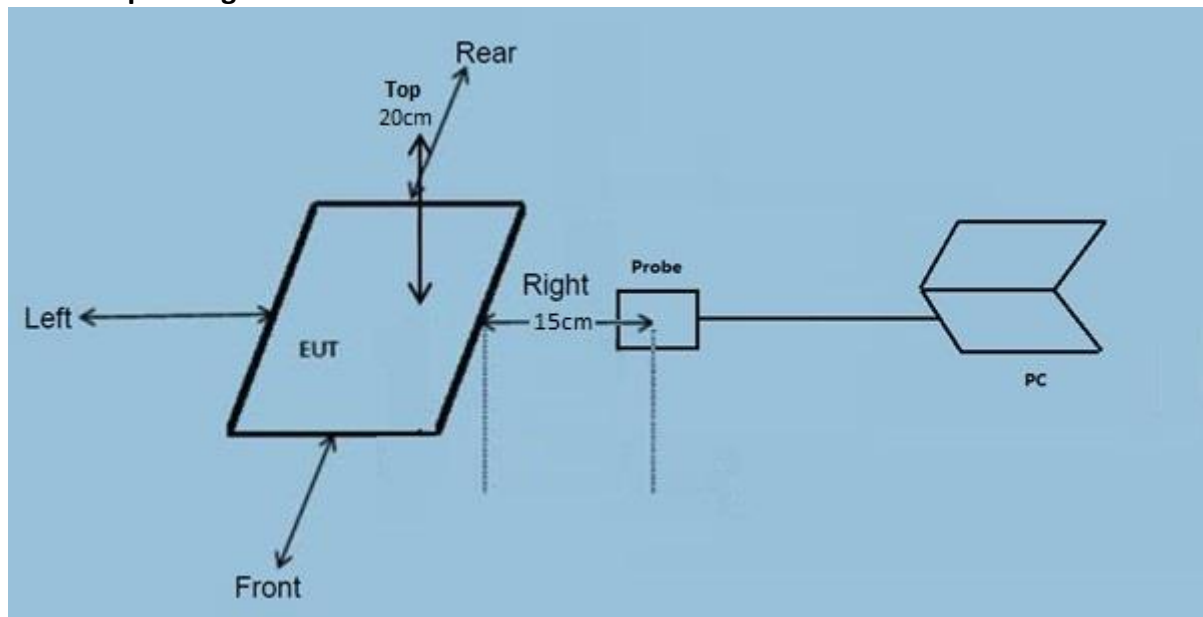

Note

- The RF exposure test is performed in the shield room.
- The test distance is between the edge of the charger and the geometric centre of probe.
- The model: WIAWHT100012443 is the same as the model LACA116 in hardware and electrical aspect.

Test Equipment List

Name of instrument	Model	Manufacturer	Cal. Date	Due Date
Electric and Magnetic Field Analyzer	EHP-50F	Narda	2019-06-27	2020-06-27

Reference Limit:

Environmental evaluation and exposure limit according to FCC CFR 47 part 1, 1.1307(c) and (d), 1.1310

According to FCC 1.1310: The criteria listed in the following table shall be used to evaluate the environment impact of human exposure to radio frequency (RF) radiation.

LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency Range (MHz)	Electric Field strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Average Time (minutes)
(A) Limits for Occupational/Controlled Exposure				
0.3 – 3.0	614	1.63	(100) *	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3 – 1.34	614	1.63	(100) *	30

Note: * = Plane wave equivalent power density

Test Result (Both sides are charging and Stand-by):
H-Field Strength at 15 cm surrounding the EUT and 20cm above the top surface of the EUT

Frequency Range (MHz)	EUT Operation mode	Probe Position Front (A/m)	Probe Position Rear (A/m)	Probe Position Left (A/m)	Probe Position Right (A/m)	Probe Position Top (A/m)	Limits (A/m)
0.110-0.205	1% Battery Level	0.0582	0.0498	0.0326	0.1196	0.0409	1.63
0.110-0.205	50% Battery Level	0.0575	0.0488	0.0321	0.1188	0.0405	1.63
0.110-0.205	99% Battery Level	0.0571	0.0495	0.0313	0.1190	0.0401	1.63
0.110-0.205	Stand-by	0.0025	0.0023	0.0025	0.0024	0.0024	1.63

E-Field Strength at 15 cm surrounding the EUT and 20cm above the top surface of the EUT

Frequency Range (MHz)	EUT Operation mode	Probe Position Front (V/m)	Probe Position Rear (V/m)	Probe Position Left (V/m)	Probe Position Right (V/m)	Probe Position Top (V/m)	Limits (V/m)
0.110-0.205	1% Battery Level	1.0853	0.7306	0.9632	0.9937	1.0136	614
0.110-0.205	50% Battery Level	1.0844	0.7298	0.9628	0.9931	1.0131	614
0.110-0.205	99% Battery Level	1.0845	0.7301	0.9626	0.9925	0.0132	614
0.110-0.205	Stand-by	0.0674	0.0682	0.0701	0.0691	0.0678	614

Test Result (Only the left side is charging):
H-Field Strength at 15 cm surrounding the EUT and 20cm above the top surface of the EUT

Frequency Range (MHz)	EUT Operation mode	Probe Position Front (A/m)	Probe Position Rear (A/m)	Probe Position Left (A/m)	Probe Position Right (A/m)	Probe Position Top (A/m)	Limits (A/m)
0.110-0.205	1% Battery Level	0.0571	0.0705	0.0684	0.0533	0.0568	1.63
0.110-0.205	50% Battery Level	0.0567	0.0702	0.0683	0.0532	0.0565	1.63
0.110-0.205	99% Battery Level	0.0569	0.0698	0.0683	0.0529	0.0567	1.63

E-Field Strength at 15 cm surrounding the EUT and 20cm above the top surface of the EUT

Frequency Range (MHz)	EUT Operation mode	Probe Position Front (V/m)	Probe Position Rear (V/m)	Probe Position Left (V/m)	Probe Position Right (V/m)	Probe Position Top (V/m)	Limits (V/m)
0.110-0.205	1% Battery Level	0.4027	0.4096	0.3832	0.4449	0.3884	614
0.110-0.205	50% Battery Level	0.4003	0.4089	0.3832	0.4442	0.3880	614
0.110-0.205	99% Battery Level	0.4025	0.4092	0.3826	0.4437	0.3878	614

Test Result (Only the right side is charging):
H-Field Strength at 15 cm surrounding the EUT and 20cm above the top surface of the EUT


Frequency Range (MHz)	EUT Operation mode	Probe Position Front (A/m)	Probe Position Rear (A/m)	Probe Position Left (A/m)	Probe Position Right (A/m)	Probe Position Top (A/m)	Limits (A/m)
0.110-0.205	1% Battery Level	0.1460	0.1432	0.4831	0.0765	0.0681	1.63
0.110-0.205	50% Battery Level	0.1455	0.1428	0.4827	0.0760	0.0678	1.63
0.110-0.205	99% Battery Level	0.1458	0.1423	0.4829	0.0762	0.0680	1.63

E-Field Strength at 15 cm surrounding the EUT and 20cm above the top surface of the EUT


Frequency Range (MHz)	EUT Operation mode	Probe Position Front (V/m)	Probe Position Rear (V/m)	Probe Position Left (V/m)	Probe Position Right (V/m)	Probe Position Top (V/m)	Limits (V/m)
0.110-0.205	1% Battery Level	1.7959	0.6824	0.0694	0.9496	0.4638	614
0.110-0.205	50% Battery Level	1.7955	0.6821	0.0690	0.9489	0.4633	614
0.110-0.205	99% Battery Level	1.7951	0.6818	0.0685	0.9492	0.4629	614

Configuration photo of the test:


H-Field &E-Field Strength test photos (Both sides are charging)

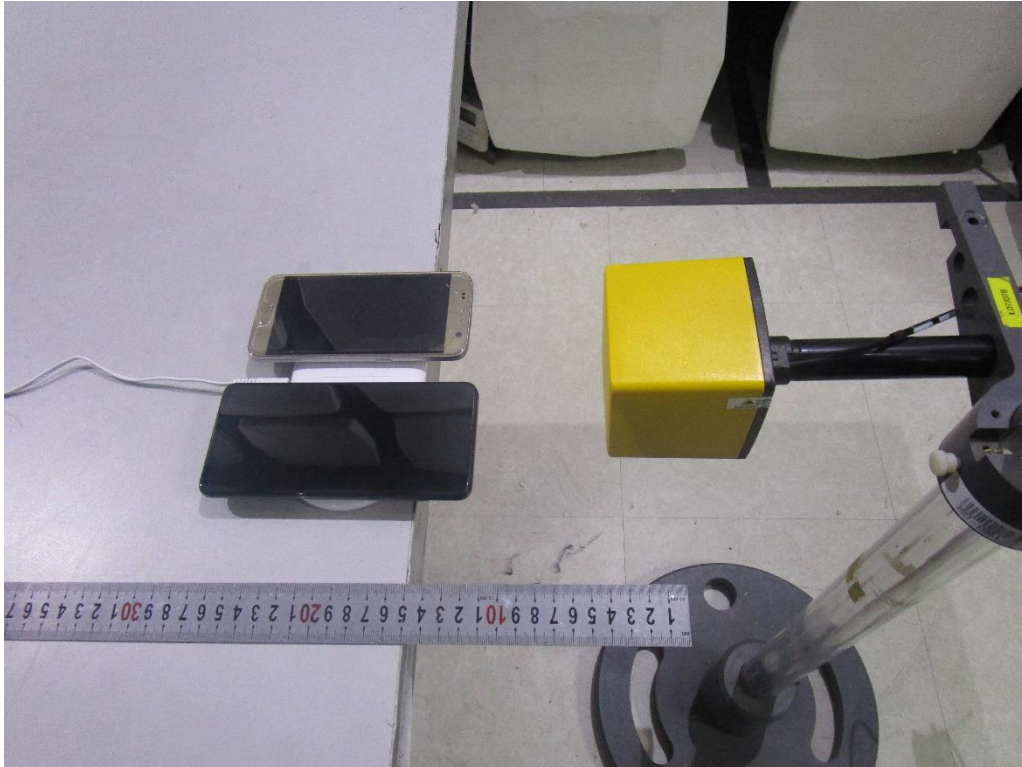


Front

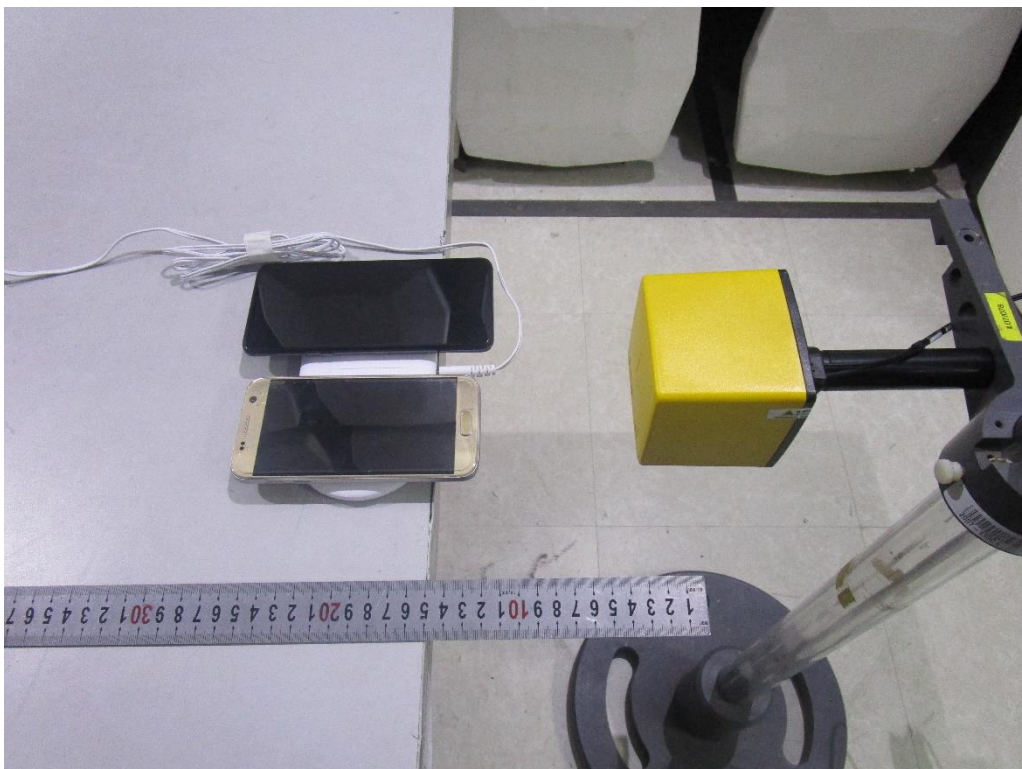


Rear

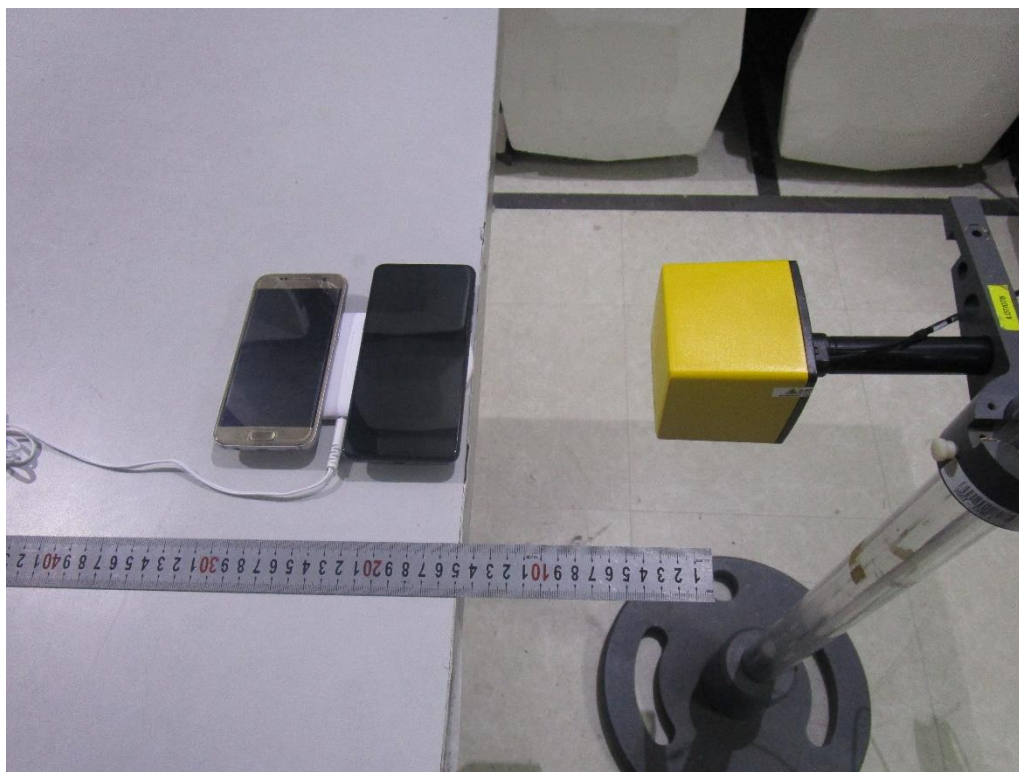

Left

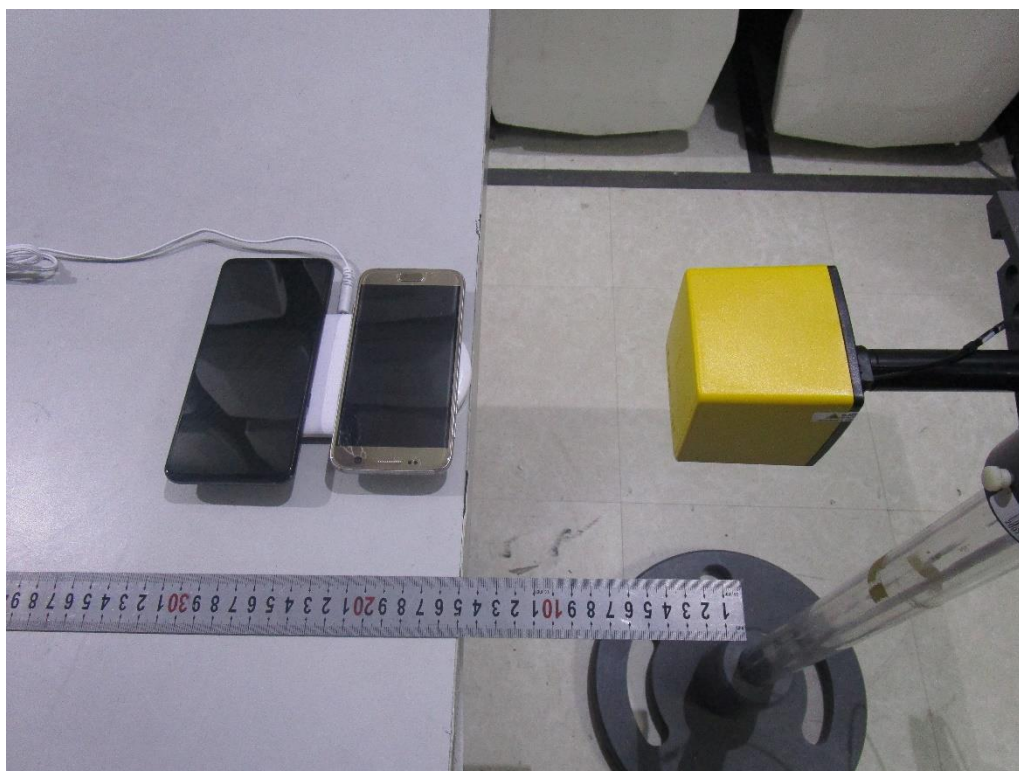


Right

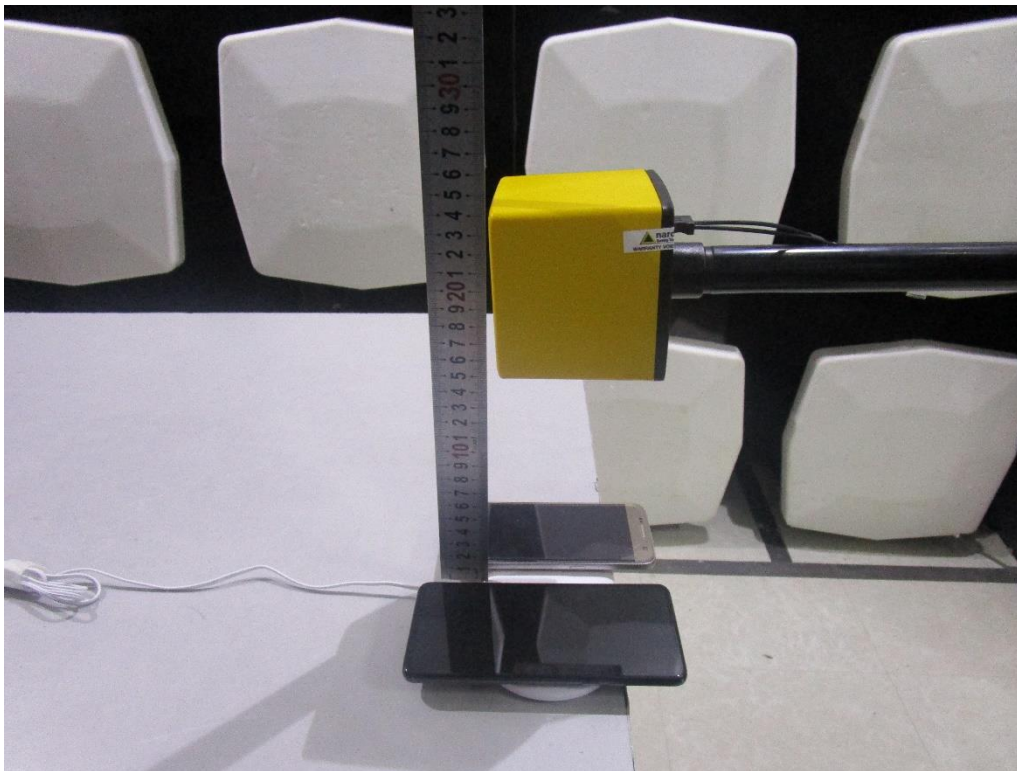

Top


H-Field &E-Field Strength test photos (Only the left side is charging)

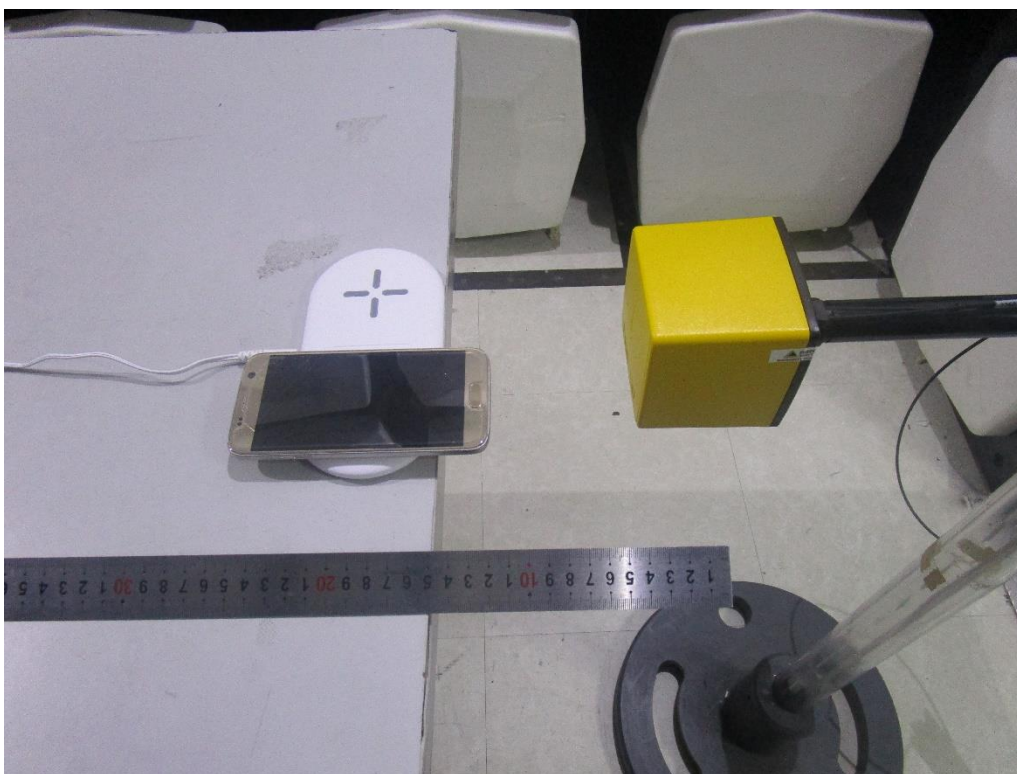


Front




Rear

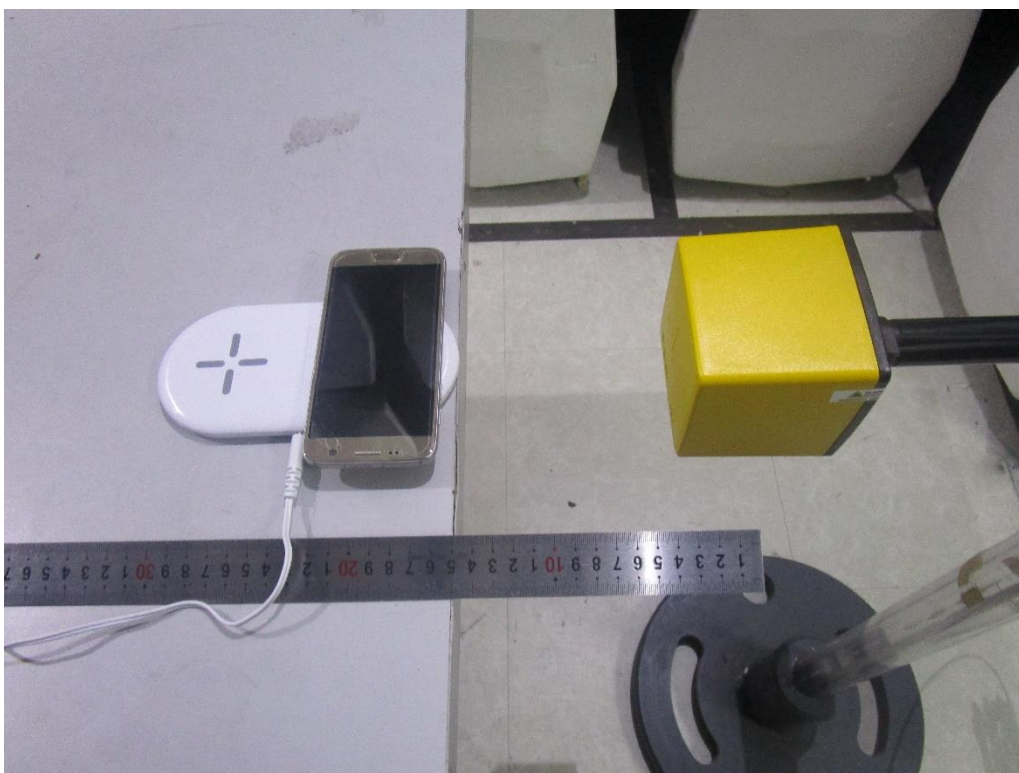


Left

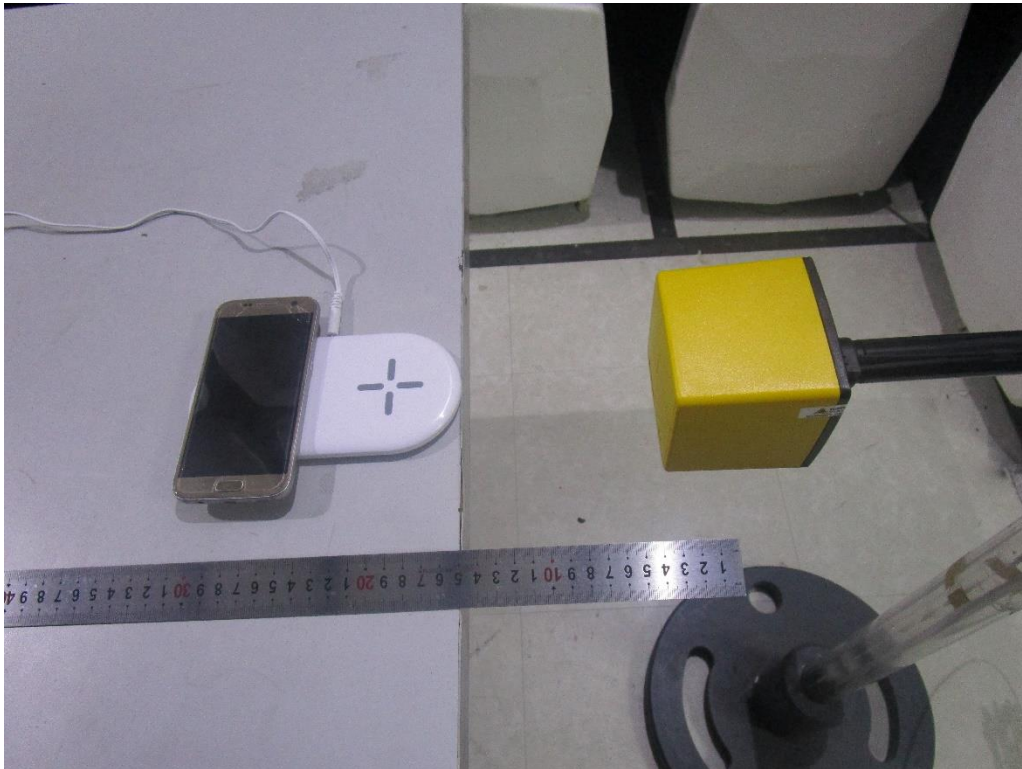

Right

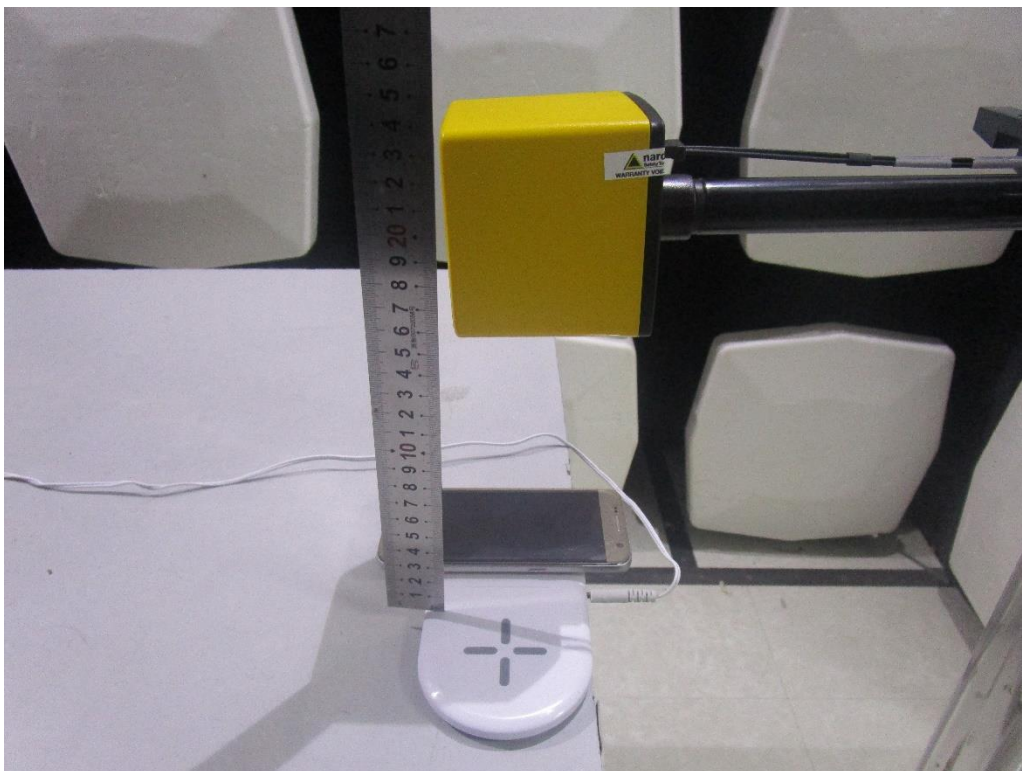


Top

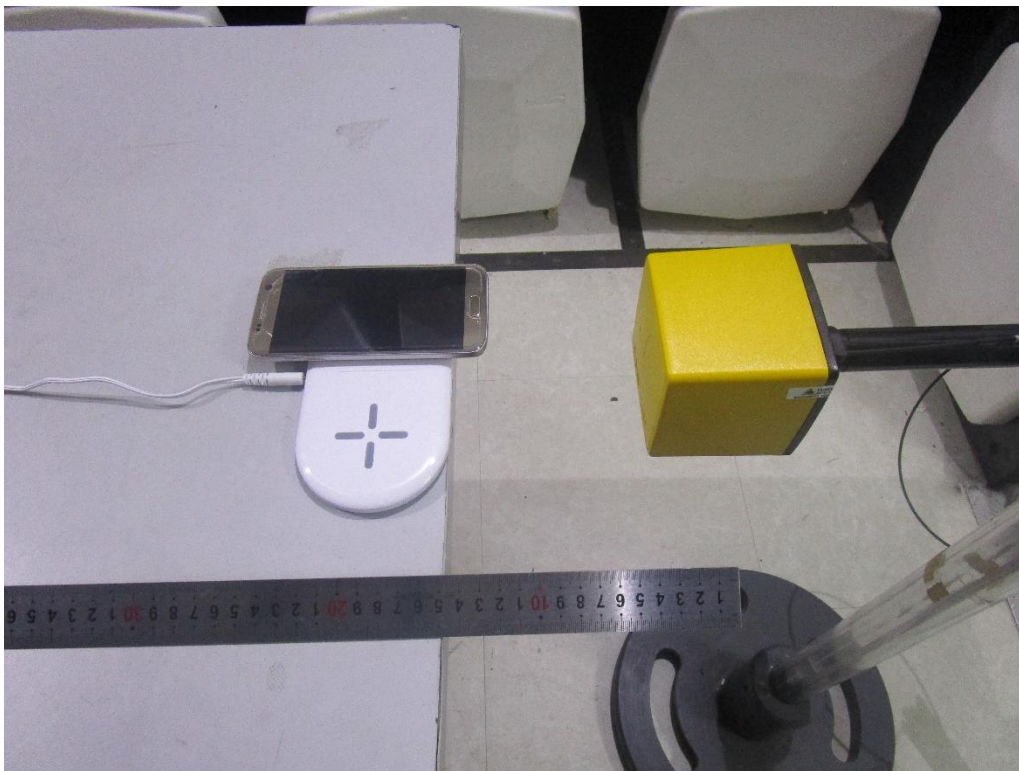H-Field &E-Field Strength test photos (Only the right side is charging)


Front




Rear

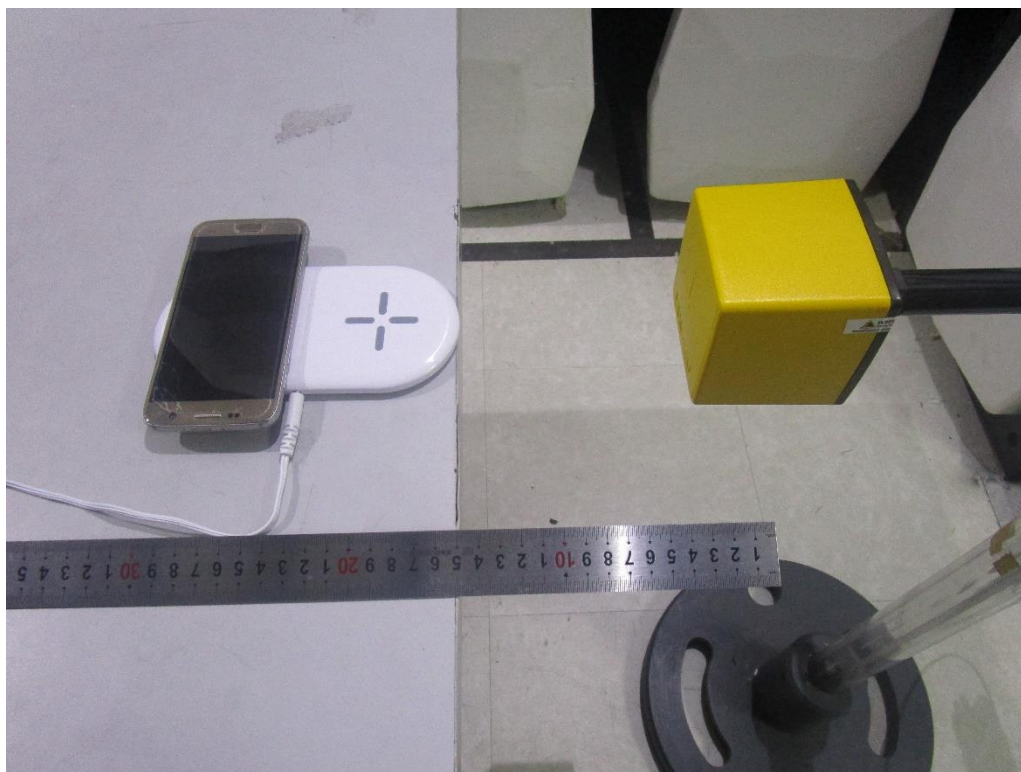

Left

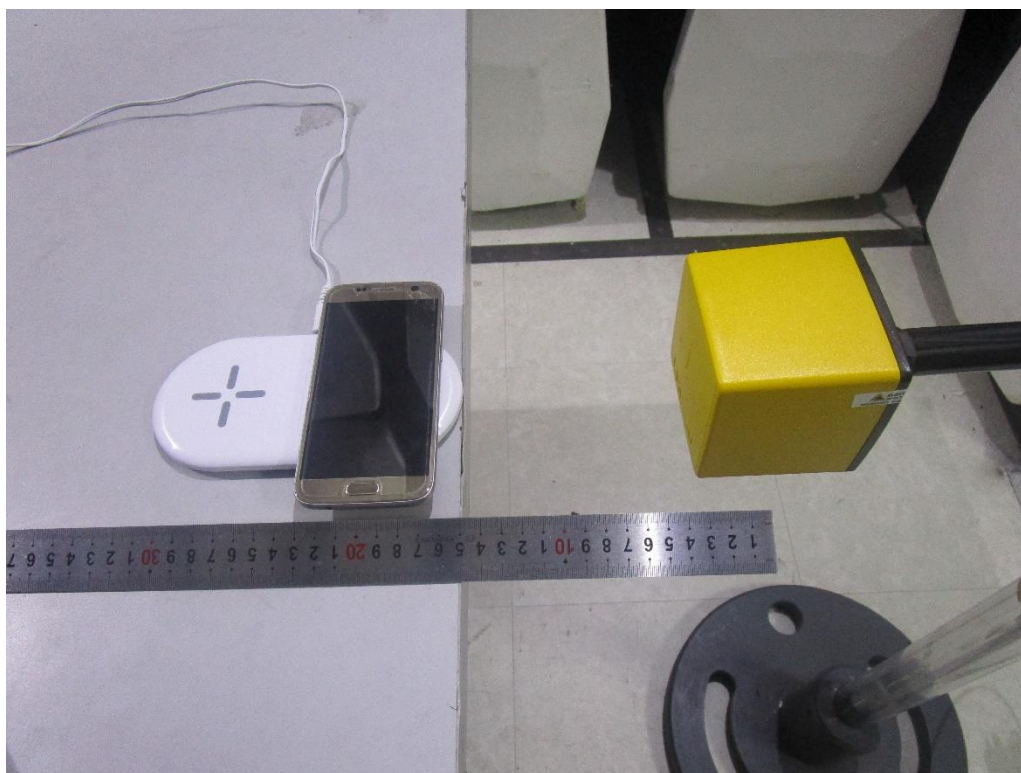

Right

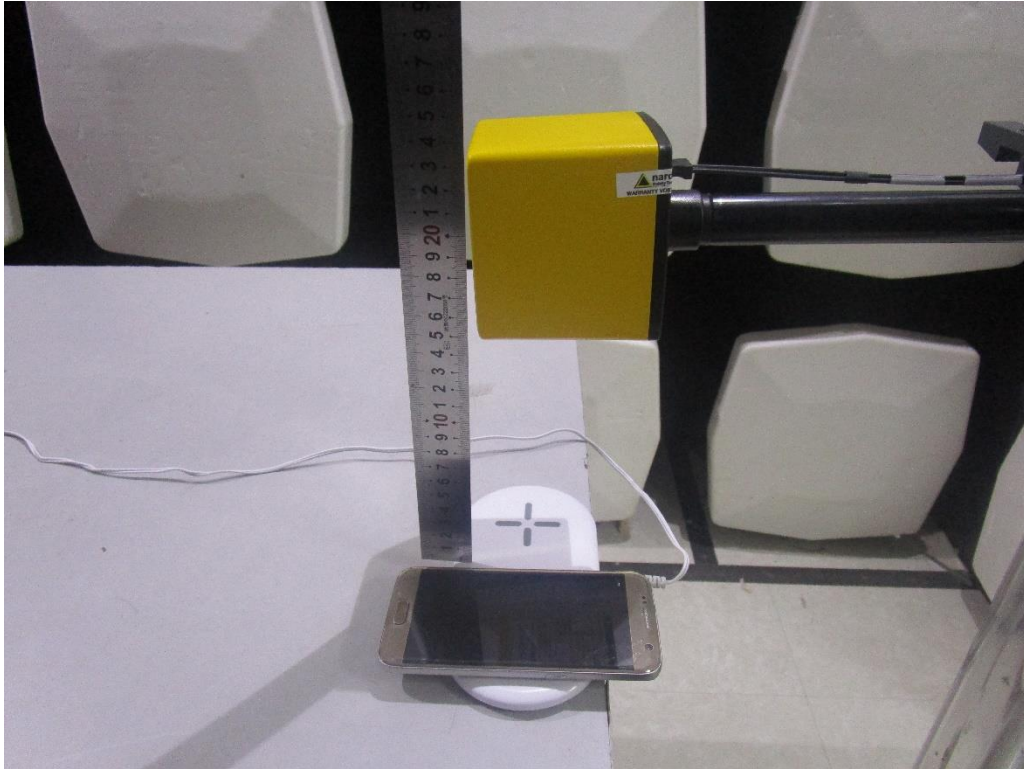

Top

***** End of Report*****