

# Test Report

**Report No. : MTi241225011-08E2**

**Date of Issue : 2025-02-20**

**Applicant : ASAP Technology(Jiangxi) Co.,Ltd.**

**Product : Wireless Charger**

**Model(s) : WIAWHT36012808**

**FCC ID : 2APXNLACC162**

**Shenzhen Microtest Co., Ltd.**

**Table of contents**

|          |                                                 |           |
|----------|-------------------------------------------------|-----------|
| <b>1</b> | <b>General Description .....</b>                | <b>4</b>  |
| 1.1      | Description of the EUT .....                    | 4         |
| 1.2      | Description of test modes .....                 | 5         |
| 1.3      | Description of support units .....              | 6         |
| <b>2</b> | <b>Measurement uncertainty .....</b>            | <b>6</b>  |
| <b>3</b> | <b>Test facilities and accreditations .....</b> | <b>7</b>  |
| 3.1      | Test laboratory .....                           | 7         |
| <b>4</b> | <b>List of test equipment .....</b>             | <b>8</b>  |
| <b>5</b> | <b>Test result .....</b>                        | <b>9</b>  |
| 5.2      | Test setup .....                                | 10        |
| 5.3      | Test Procedures .....                           | 10        |
| 5.4      | Information of test equipment .....             | 11        |
| 5.5      | Test results .....                              | 12        |
|          | <b>Photographs of the Test Setup .....</b>      | <b>15</b> |
|          | <b>Photographs of the EUT .....</b>             | <b>15</b> |

|                                  |                                                    |                   |
|----------------------------------|----------------------------------------------------|-------------------|
| <b>Test Result Certification</b> |                                                    |                   |
| Applicant                        | ASAP Technology(Jiangxi) Co.,Ltd.                  |                   |
| Applicant Address                | Ji'an Industrial Park, Ji'an, Jiangxi 343100 China |                   |
| Manufacturer                     | ASAP Technology(Jiangxi) Co.,Ltd.                  |                   |
| Manufacturer Address             | Ji'an Industrial Park, Ji'an, Jiangxi 343100 China |                   |
| <b>Product description</b>       |                                                    |                   |
| Product name                     | Wireless Charger                                   |                   |
| Trademark                        | onn                                                |                   |
| Model name                       | WIAWHT36012808                                     |                   |
| Series Model(s)                  | N/A                                                |                   |
| Standards                        | 47 CFR Part 1, § 1.1310<br>47 CFR Part 2.1091      |                   |
| Test method                      | KDB 680106 D01 Wireless Power Transfer v04         |                   |
| <b>Testing Information</b>       |                                                    |                   |
| Date of test                     | 2025-02-08 to 2025-02-14                           |                   |
| Test Result                      | Pass                                               |                   |
| Prepared by                      | Yanice.Xie                                         | <i>Yanice Xie</i> |
| Reviewed by                      | David Lee                                          | <i>David. Lee</i> |
| Approved by                      | Leon Chen                                          | <i>Leon chen</i>  |

# TEST REPORT

Report No.: MTi241225011-08E2

## 1 General Description

### 1.1 Description of the EUT

|                          |                                                                                                                                                                               |
|--------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product name:            | Wireless Charger                                                                                                                                                              |
| Model name:              | WIAWHT36012808                                                                                                                                                                |
| Series Model(s):         | N/A                                                                                                                                                                           |
| Model difference:        | N/A                                                                                                                                                                           |
| Electrical rating:       | Input:5V 3A, 9V 3A, 12V 2.5A, 15V 2A<br>Output Phone:15W Max<br>Output TWS:5W Max<br>Output Apple Watch:5W Max                                                                |
| Accessories:             | N/A                                                                                                                                                                           |
| Hardware version:        | A                                                                                                                                                                             |
| Software version:        | 0X89DC                                                                                                                                                                        |
| Test sample(s) number:   | MTi241225011-08-R001                                                                                                                                                          |
| <b>RF specification:</b> |                                                                                                                                                                               |
| Operation frequency:     | Coil 1 (Phone-5W~7.5W): 115 kHz – 205 kHz<br>Coil 1 (Phone-15W): 360 kHz<br>Coil 2 (TWS-5W): 115 kHz – 205 kHz<br>Coil 3 (Watch-3W): 326.5 kHz<br>Coil 3 (Watch-5W):1.778 MHz |
| Modulation type:         | ASK                                                                                                                                                                           |
| Antenna type:            | Coil                                                                                                                                                                          |

# TEST REPORT

Report No.: MTI241225011-08E2

## 1.2 Description of test modes

All the test modes were carried out with the EUT in normal operation, the final test mode of the EUT was the worst test mode for emission test, which was shown in this report and defined as:

| No.    | Emission test modes                               |
|--------|---------------------------------------------------|
| Mode1  | Wireless Output(Phone:5W)                         |
| Mode2  | Wireless Output(Phone:7.5W)                       |
| Mode3  | Wireless Output(Phone:15W)                        |
| Mode4  | Wireless Output(Apple watch:3W)                   |
| Mode5  | Wireless Output(Apple watch:5W)                   |
| Mode6  | Wireless Output(TWS:5W)                           |
| Mode7  | Wireless Output(Phone:5W+TWS:5W)                  |
| Mode8  | Wireless Output(Phone:7.5W+TWS:5W)                |
| Mode9  | Wireless Output(Phone:15W+TWS:5W)                 |
| Mode10 | Wireless Output(Phone:5W+Apple watch:3W)          |
| Mode11 | Wireless Output(Phone:7.5W+Apple watch:3W)        |
| Mode12 | Wireless Output(Phone:15W+Apple watch:3W)         |
| Mode13 | Wireless Output(Phone:5W+Apple watch:5W)          |
| Mode14 | Wireless Output(Phone:7.5W+Apple watch:5W)        |
| Mode15 | Wireless Output(Phone:15W+Apple watch:5W)         |
| Mode16 | Wireless Output(Apple watch:3W+TWS:5W)            |
| Mode17 | Wireless Output(Apple watch:5W+TWS:5W)            |
| Mode18 | Wireless Output(Phone:5W+Apple watch:3W+TWS:5W)   |
| Mode19 | Wireless Output(Phone:7.5W+Apple watch:3W+TWS:5W) |
| Mode20 | Wireless Output(Phone:15W+Apple watch:3W+TWS:5W)  |
| Mode21 | Wireless Output(Phone:5W+Apple watch:5W+TWS:5W)   |
| Mode22 | Wireless Output(Phone:7.5W+Apple watch:5W+TWS:5W) |
| Mode23 | Wireless Output(Phone:15W+Apple watch:5W+TWS:5W)  |
| Mode24 | Stand by                                          |

# TEST REPORT

Report No.: MTI241225011-08E2

## 1.3 Description of support units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

| Support equipment list   |                |                |              |
|--------------------------|----------------|----------------|--------------|
| Description              | Model          | Serial No.     | Manufacturer |
| Apple Watch              | Apple Watch S7 | M0JVGQG1VP     | OPPO         |
| Apple Watch              | Apple Watch SE | FH7PP6BAG91J6  | Apple        |
| TWS                      | AirPods 2      | MJHFCQP1QM     | Apple        |
| Mobile phone             | iPhone 11      | DNPZX2H1N747   | Apple        |
| Mobile phone             | iPhone 15      | KXPWNQFK90     | Apple        |
| HUAWEI QUICK CHARGE(65W) | HW-200200ZP1   | JN67LSN7N03451 | HUAWEI       |
| Support cable list       |                |                |              |
| Description              | Length (m)     | From           | To           |
| /                        | /              | /              | /            |

## 2 Measurement uncertainty

| Parameter                               | Expanded Uncertainty |
|-----------------------------------------|----------------------|
| Magnetic field measurements(3kHz~10MHz) | $\pm 14.8\%$         |
| Electric field measurements(3kHz~10MHz) | $\pm 17.5\%$         |

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

# TEST REPORT

Report No.: MTI241225011-08E2

## 3 Test facilities and accreditations

### 3.1 Test laboratory

|                        |                                                                                                                                       |
|------------------------|---------------------------------------------------------------------------------------------------------------------------------------|
| Test laboratory:       | Shenzhen Microtest Co., Ltd.                                                                                                          |
| Test site location:    | 101, No. 7, Zone 2, Xinxing Industrial Park, Fuhai Avenue, Xinhe Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China |
| Telephone:             | (86-755)88850135                                                                                                                      |
| Fax:                   | (86-755)88850136                                                                                                                      |
| CNAS Registration No.: | CNAS L5868                                                                                                                            |
| FCC Registration No.:  | 448573                                                                                                                                |

# TEST REPORT

Report No.: MTI241225011-08E2

## 4 List of test equipment

| No.      | Equipment                                            | Manufacturer | Model           | Serial No. | Cal. date | Cal. Due  |
|----------|------------------------------------------------------|--------------|-----------------|------------|-----------|-----------|
| MTI-E143 | Near-field Electric and Magnetic Field Sensor System | SPEAG        | MAGPy-8H3 D+ED3 | 3101       | 2024/3/12 | 2027/3/11 |

| No.       | Equipment         | Manufacturer | Model     | Software version: | Cal. date | Cal. Due |
|-----------|-------------------|--------------|-----------|-------------------|-----------|----------|
| MTI-E016S | MPE test software | SPEAG        | MAGPY 2.6 | 2.6               | /         | /        |

# TEST REPORT

Report No.: MTI241225011-08E2

## 5 Test result

### 5.1.1 Requirement

§1.1310: The criteria listed in the following table shall be used to evaluate the environment impact of human exposure to radio frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of FCC part 2.1093 of this chapter.

**Table 1 to §1.1310(e)(1) - Limits for Maximum Permissible Exposure (MPE)**

| Frequency range (MHz)                                           | Electric field strength (V/m) | Magnetic field strength (A/m) | Power density (mW/cm <sup>2</sup> ) | Averaging time (minutes) |
|-----------------------------------------------------------------|-------------------------------|-------------------------------|-------------------------------------|--------------------------|
| <b>(i) Limits for Occupational/Controlled Exposure</b>          |                               |                               |                                     |                          |
| 0.3-3.0                                                         | 614                           | 1.63                          | *(100)                              | ≤6                       |
| 3.0-30                                                          | 1842/f                        | 4.89/f                        | *(900/f <sup>2</sup> )              | <6                       |
| 30-300                                                          | 61.4                          | 0.163                         | 1.0                                 | <6                       |
| 300-1500                                                        |                               |                               | f/300                               | <6                       |
| 1500-100000                                                     |                               |                               | 5                                   | <6                       |
| <b>(ii) Limits for General Population/Uncontrolled Exposure</b> |                               |                               |                                     |                          |
| 0.3-1.34                                                        | 614                           | 1.63                          | *(100)                              | <30                      |
| 1.34-30                                                         | 824/f                         | 2.19/f                        | *(180/f <sup>2</sup> )              | <30                      |
| 30-300                                                          | 27.5                          | 0.073                         | 0.2                                 | <30                      |
| 300-1500                                                        |                               |                               | f/1500                              | <30                      |
| 1500-100000                                                     |                               |                               | 1.0                                 | <30                      |

f = frequency in MHz

\* = Plane-wave equivalent power density


**Note 1:** Occupational/controlled exposure limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure.

**Note 2:** General population/uncontrolled exposure limits apply in situations in which the general public may be exposed, or in which persons who are exposed as a consequence of their employment may not be fully aware of the potential for exposure or cannot exercise control over their exposure.

# TEST REPORT

Report No.: MTI241225011-08E2

## 5.2 Test setup

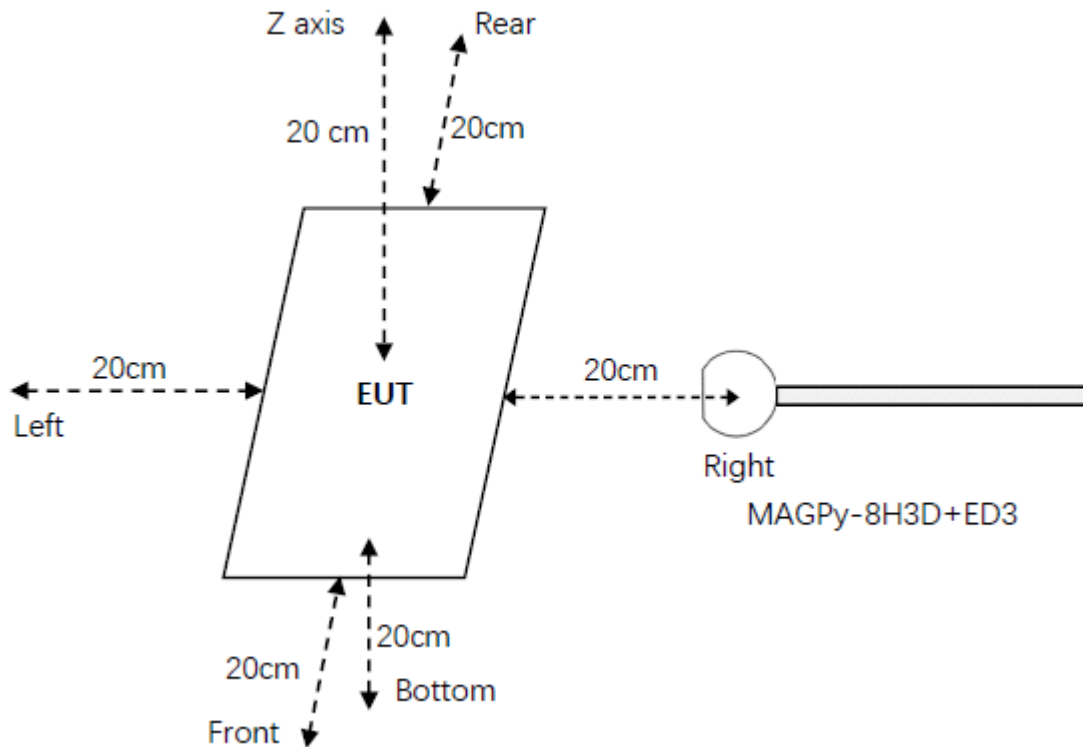

## 5.3 Test Procedures

- The RF exposure test was performed in anechoic chamber.
- E and H-field measurements should be made with these devices considered to meet the § 2.1091-Mobile conditions ("generally be used in such a way that a separation distance of at least 20 centimeters is normally maintained between the RF source's radiating structure(s) and [the nearest person]").
- The highest emission level was recorded and compared with limit.
- The EUT was measured according to the dictates of KDB 680106 D01 Wireless Power Transfer v04.

# TEST REPORT

Report No.: MTi241225011-08E2

## 5.4 Information of test equipment

|                                                                                     |                                                                                           |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------|
| Test equipment: MAGPy-8H3D+ED3                                                      |                                                                                           |
| Diameter                                                                            | 60mm                                                                                      |
| 8 isotropic H-field sensors                                                         | Concentric loops of 1cm <sup>2</sup> arranged at the corner of a cube of 22mm side length |
| 1 isotropic E-field sensor                                                          | Orthogonal dipole/monopole (arm length: 50mm)                                             |
| Measurement center                                                                  | 18.5mm from the probe tip                                                                 |
| Dimensions                                                                          | 110*635*35mm<br>(MAGPy-8H3D+E3D V2 & MAGPy-DAS V2)                                        |
|  |                                                                                           |
| Test probe, without the casing                                                      |                                                                                           |

# TEST REPORT

Report No.: MTI241225011-08E2

## 5.5 Test results

**Test condition 1: Mode 19 operating mode with client device (1 % battery status of client device)**

| Probe Position | E -field (V/m) |       |                | H-field (A/m) |       |                |
|----------------|----------------|-------|----------------|---------------|-------|----------------|
|                | Measurement    | Limit | Percentage (%) | Measurement   | Limit | Percentage (%) |
| Z axis         | 1.23           | 614   | 0.20%          | 0.07          | 1.63  | 4.29%          |
| Left           | 0.86           |       |                | 0.01          |       |                |
| Right          | 1.15           |       |                | 0.04          |       |                |
| Front          | 0.74           |       |                | 0.06          |       |                |
| Rear           | 0.89           |       |                | 0.02          |       |                |
| Bottom         | 0.96           |       |                | 0.05          |       |                |

**Test condition 2: Mode 19 operating mode with client device (50 % battery status of client device)**

| Probe Position | E -field (V/m) |       |                     | H-field (A/m) |       |                     |
|----------------|----------------|-------|---------------------|---------------|-------|---------------------|
|                | Measurement    | Limit | Max. Percentage (%) | Measurement   | Limit | Max. Percentage (%) |
| Z axis         | 0.98           | 614   | 0.16%               | 0.06          | 1.63  | 3.44%               |
| Left           | 0.69           |       |                     | 0.01          |       |                     |
| Right          | 0.92           |       |                     | 0.03          |       |                     |
| Front          | 0.59           |       |                     | 0.05          |       |                     |
| Rear           | 0.71           |       |                     | 0.02          |       |                     |
| Bottom         | 0.77           |       |                     | 0.04          |       |                     |

# TEST REPORT

Report No.: MTI241225011-08E2

**Test condition 3: Mode 19 operating mode with client device (99 % battery status of client device)**

| Probe Position | E -field (V/m) |       |                | H-field (A/m) |       |                |
|----------------|----------------|-------|----------------|---------------|-------|----------------|
|                | Measurement    | Limit | Percentage (%) | Measurement   | Limit | Percentage (%) |
| Z axis         | 0.80           | 614   | 0.13%          | 0.05          | 1.63  | 2.79%          |
| Left           | 0.56           |       |                | 0.01          |       |                |
| Right          | 0.75           |       |                | 0.03          |       |                |
| Front          | 0.48           |       |                | 0.04          |       |                |
| Rear           | 0.58           |       |                | 0.01          |       |                |
| Bottom         | 0.62           |       |                | 0.03          |       |                |

**Test condition 1: Mode 23 operating mode with client device (1 % battery status of client device)**

| Probe Position | E -field (V/m) |       |                | H-field (A/m) |       |                |
|----------------|----------------|-------|----------------|---------------|-------|----------------|
|                | Measurement    | Limit | Percentage (%) | Measurement   | Limit | Percentage (%) |
| Z axis         | 1.67           | 614   | 0.27%          | 0.05          | 1.63  | 1.84%          |
| Left           | 0.98           |       |                | 0.008         |       |                |
| Right          | 1.43           |       |                | 0.02          |       |                |
| Front          | 1.12           |       |                | 0.02          |       |                |
| Rear           | 0.86           |       |                | 0.01          |       |                |
| Bottom         | 1.13           |       |                | 0.007         |       |                |

# TEST REPORT

Report No.: MTI241225011-08E2

**Test condition 2: Mode 23 operating mode with client device (50 % battery status of client device)**

| Probe Position | E –field (V/m) |       |                     | H–field (A/m) |       |                     |
|----------------|----------------|-------|---------------------|---------------|-------|---------------------|
|                | Measurement    | Limit | Max. Percentage (%) | Measurement   | Limit | Max. Percentage (%) |
| Z axis         | 1.34           | 614   | 0.22%               | 0.02          | 1.63  | 1.47%               |
| Left           | 0.78           |       |                     | 0.007         |       |                     |
| Right          | 1.14           |       |                     | 0.01          |       |                     |
| Front          | 0.90           |       |                     | 0.02          |       |                     |
| Rear           | 0.69           |       |                     | 0.008         |       |                     |
| Bottom         | 0.90           |       |                     | 0.006         |       |                     |

**Test condition 3: Mode 23 operating mode with client device (99 % battery status of client device)**

| Probe Position | E –field (V/m) |       |                | H–field (A/m) |       |                |
|----------------|----------------|-------|----------------|---------------|-------|----------------|
|                | Measurement    | Limit | Percentage (%) | Measurement   | Limit | Percentage (%) |
| Z axis         | 1.09           | 614   | 0.18%          | 0.01          | 1.63  | 0.80%          |
| Left           | 0.64           |       |                | 0.006         |       |                |
| Right          | 0.93           |       |                | 0.009         |       |                |
| Front          | 0.73           |       |                | 0.01          |       |                |
| Rear           | 0.56           |       |                | 0.007         |       |                |
| Bottom         | 0.73           |       |                | 0.005         |       |                |

# TEST REPORT

Report No.: MTI241225011-08E2

## Photographs of the Test Setup

See the Appendix - Test Setup Photos.

## Photographs of the EUT

See the Appendix - EUT Photos.

# TEST REPORT

Report No.: MTI241225011-08E2

## Statement

1. This report is invalid without the seal and signature of the laboratory.
2. The test results of this report are only responsible for the samples submitted. Client shall be responsible for representativeness of the sample and authenticity of the material.
3. The report shall not be partially reproduced without the written consent of the Laboratory.
4. This report is invalid if transferred, altered or tampered with in any form without authorization.
5. The observations or tests with special mark fall outside the scope of accreditation, and are only used for purpose of commission, research, training, internal quality control etc.
6. Any objection to this report shall be submitted to the laboratory within 15 days from the date of receipt of the report.

\*\*\*\*\* END OF REPORT \*\*\*\*\*