

Test Report

Report No. : MTi241225011-04E2

Date of Issue : 2025-02-12

Applicant : ASAP Technology(Jiangxi) Co.,Ltd.

Product : Wireless Charger

Model(s) : WIAWHT100162735

FCC ID : 2APXNLACC163

Shenzhen Microtest Co., Ltd.

Table of contents

1	General Description	4
1.1	Description of the EUT	4
1.2	Description of test modes	5
1.3	Description of support units	6
2	Measurement uncertainty	6
3	Test facilities and accreditations	7
3.1	Test laboratory	7
4	List of test equipment	8
5	Test result	9
5.2	Test setup	10
5.3	Test Procedures	10
5.4	Information of test equipment	11
5.5	Test results	12
	Photographs of the Test Setup	16
	Photographs of the EUT	16

Test Result Certification		
Applicant	ASAP Technology(Jiangxi) Co.,Ltd.	
Applicant Address	Ji'an Industrial Park, Ji'an, Jiangxi 343100 China	
Manufacturer	ASAP Technology(Jiangxi) Co.,Ltd.	
Manufacturer Address	Ji'an Industrial Park, Ji'an, Jiangxi 343100 China	
Product description		
Product name	Wireless Charger	
Trademark	onn	
Model name	WIAWHT100162735	
Series Model(s)	N/A	
Standards	47 CFR Part 1, § 1.1310 47 CFR Part 2.1091	
Test method	KDB 680106 D01 Wireless Power Transfer v04	
Testing Information		
Date of test	2025-01-21 to 2025-02-10	
Test Result	Pass	
Prepared by	Yanice.Xie	<i>Yanice Xie</i>
Reviewed by	David Lee	<i>David. Lee</i>
Approved by	Leon Chen	<i>Leon chen</i>

TEST REPORT

Report No.: MTi241225011-04E2

1 General Description

1.1 Description of the EUT

Product name:	Wireless Charger
Model name:	WIAWHT100162735
Series Model(s):	N/A
Model difference:	N/A
Electrical rating:	Input:5V 3A,9V 3A,12V 2.5A ,15V 2A Output Phone:15W Max Output TWS:5W Max Output Apple Watch:5W Max
Accessories:	Adaptor: Model: WIAWHT100162735 Input:100-240V~50/60Hz 0.8A Output:DC 5V/3A,9V/3A,12V/2.5A,15V/2A, 20V/1.5A Cable: Type-C to type-C 1.5m
Hardware version:	V1.0
Software version:	V1.0
Test sample(s) number:	MTi241225011-04S1001
RF specification:	
Operation frequency:	Coil 1 (Phone-5W~7.5W): 115 kHz – 205 kHz Coil 1 (Phone-15W): 360 kHz Coil 2 (TWS-5W): 115 kHz – 205 kHz Coil 3 (Watch-3W): 326.5 kHz Coil 3 (Watch-5W):1.778 MHz
Modulation type:	ASK
Antenna type:	Coil

TEST REPORT

Report No.: MTI241225011-04E2

1.2 Description of test modes

All the test modes were carried out with the EUT in normal operation, the final test mode of the EUT was the worst test mode for emission test, which was shown in this report and defined as:

No.	Emission test modes
Mode1	Wireless output Phone(5W)+TWS(5W)+Apple Watch(3W)
Mode2	Wireless output Phone(7.5W)+TWS(5W)+Apple Watch(3W)
Mode3	Wireless output Phone(10W)+TWS(5W)+Apple Watch(3W)
Mode4	Wireless output Phone(15W)+TWS(5W)+Apple Watch(3W)
Mode5	Wireless output Phone(5W)+TWS(5W)+Apple Watch(5W)
Mode6	Wireless output Phone(7.5W)+TWS(5W)+Apple Watch(5W)
Mode7	Wireless output Phone(10W)+TWS(5W)+Apple Watch(5W)
Mode8	Wireless output Phone(15W)+TWS(5W)+Apple Watch(5W)
Mode9	Wireless output Phone(5W)+TWS(5W)
Mode10	Wireless output Phone(7.5W)+TWS(5W)
Mode11	Wireless output Phone(10W)+TWS(5W)
Mode12	Wireless output Phone(15W)+TWS(5W)
Mode13	Wireless output Phone(5W)+Apple Watch(3W)
Mode14	Wireless output Phone(7.5W)+Apple Watch(3W)
Mode15	Wireless output Phone(10W)+Apple Watch(3W)
Mode16	Wireless output Phone(15W)+Apple Watch(3W)
Mode17	Wireless output Phone(5W)+Apple Watch(5W)
Mode18	Wireless output Phone(7.5W)+Apple Watch(5W)
Mode19	Wireless output Phone(10W)+Apple Watch(5W)
Mode20	Wireless output Phone(15W)+Apple Watch(5W)
Mode21	Wireless output TWS(5W)+Apple Watch(3W)
Mode22	Wireless output TWS(5W)+Apple Watch(5W)
Mode23	Wireless output Phone(5W)
Mode24	Wireless output Phone(7.5W)
Mode25	Wireless output Phone(10W)
Mode26	Wireless output Phone(15W)
Mode27	Wireless output Apple Watch(3W)
Mode28	Wireless output Apple Watch(5W)
Mode29	Wireless output TWS(5W)
Mode30	Standby

TEST REPORT

Report No.: MTI241225011-04E2

1.3 Description of support units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Support equipment list			
Description	Model	Serial No.	Manufacturer
Apple Watch	Apple Watch S7	M0JVGQG1VP	Apple
Apple Watch	Apple Watch SE	FH7PP6BAG91J6	Apple
TWS Case	AirPods 2	MJHFCQP1QM	Apple
Mobile phone	iPhone 11	DNPZX2H1N747	Apple
Mobile phone	iPhone 15	KXPWNQFK90	Apple
Support cable list			
Description	Length (m)	From	To
/	/	/	/

2 Measurement uncertainty

Parameter	Expanded Uncertainty
Magnetic field measurements(3kHz~10MHz)	$\pm 14.8\%$
Electric field measurements(3kHz~10MHz)	$\pm 17.5\%$

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

TEST REPORT

Report No.: MTI241225011-04E2

3 Test facilities and accreditations

3.1 Test laboratory

Test laboratory:	Shenzhen Microtest Co., Ltd.
Test site location:	101, No. 7, Zone 2, Xinxing Industrial Park, Fuhai Avenue, Xinhe Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China
Telephone:	(86-755)88850135
Fax:	(86-755)88850136
CNAS Registration No.:	CNAS L5868
FCC Registration No.:	448573

TEST REPORT

Report No.: MTI241225011-04E2

4 List of test equipment

No.	Equipment	Manufacturer	Model	Serial No.	Cal. date	Cal. Due
MTI-E143	Near-field Electric and Magnetic Field Sensor System	SPEAG	MAGPy-8H3 D+ED3	3101	2024/3/12	2027/3/11

No.	Equipment	Manufacturer	Model	Software version:	Cal. date	Cal. Due
MTI-E016S	MPE test software	SPEAG	MAGPY 2.6	2.6	/	/

TEST REPORT

Report No.: MTI241225011-04E2

5 Test result

5.1.1 Requirement

§1.1310: The criteria listed in the following table shall be used to evaluate the environment impact of human exposure to radio frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of FCC part 2.1093 of this chapter.

Table 1 to §1.1310(e)(1) - Limits for Maximum Permissible Exposure (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(i) Limits for Occupational/Controlled Exposure				
0.3-3.0	614	1.63	*(100)	≤6
3.0-30	1842/f	4.89/f	*(900/f ²)	<6
30-300	61.4	0.163	1.0	<6
300-1500			f/300	<6
1500-100000			5	<6
(ii) Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*(100)	<30
1.34-30	824/f	2.19/f	*(180/f ²)	<30
30-300	27.5	0.073	0.2	<30
300-1500			f/1500	<30
1500-100000			1.0	<30

f = frequency in MHz

* = Plane-wave equivalent power density


Note 1: Occupational/controlled exposure limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure.

Note 2: General population/uncontrolled exposure limits apply in situations in which the general public may be exposed, or in which persons who are exposed as a consequence of their employment may not be fully aware of the potential for exposure or cannot exercise control over their exposure.

TEST REPORT

Report No.: MTI241225011-04E2

5.2 Test setup

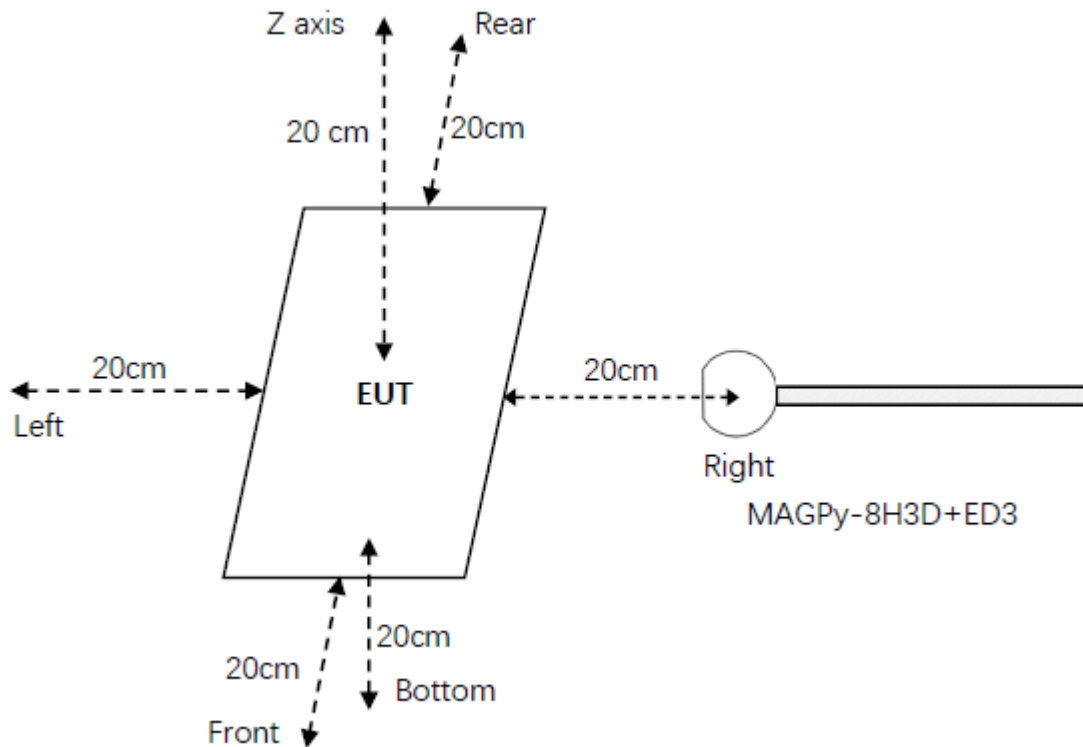

5.3 Test Procedures

- The RF exposure test was performed in anechoic chamber.
- E and H-field measurements should be made with these devices considered to meet the § 2.1091-Mobile conditions ("generally be used in such a way that a separation distance of at least 20 centimeters is normally maintained between the RF source's radiating structure(s) and [the nearest person]").
- The highest emission level was recorded and compared with limit.
- The EUT was measured according to the dictates of KDB 680106 D01 Wireless Power Transfer v04.

TEST REPORT

Report No.: MTi241225011-04E2

5.4 Information of test equipment

Test equipment: MAGPy-8H3D+ED3	
Diameter	60mm
8 isotropic H-field sensors	Concentric loops of 1cm ² arranged at the corner of a cube of 22mm side length
1 isotropic E-field sensor	Orthogonal dipole/monopole (arm length: 50mm)
Measurement center	18.5mm from the probe tip
Dimensions	110*635*35mm (MAGPy-8H3D+E3D V2 & MAGPy-DAS V2)
	
Test probe, without the casing	

TEST REPORT

Report No.: MTI241225011-04E2

5.5 Test results

Test condition 1: Mode 8 operating mode with client device (1 % battery status of client device)

Probe Position	E –field (V/m)			H–field (A/m)		
	Measurement	Limit	Percentage (%)	Measurement	Limit	Percentage (%)
Z axis	1.52	614	0.25%	0.03	1.63	1.84%
Left	0.87			0.01		
Right	1.11			0.02		
Front	1.08			0.01		
Rear	1.34			0.01		
Bottom	1.15			0.008		

Test condition 2: Mode 8 operating mode with client device (50 % battery status of client device)

Probe Position	E –field (V/m)			H–field (A/m)		
	Measurement	Limit	Max. Percentage (%)	Measurement	Limit	Max. Percentage (%)
Z axis	1.22	614	0.20%	0.02	1.63	1.47%
Left	0.70			0.008		
Right	0.89			0.02		
Front	0.86			0.008		
Rear	1.07			0.008		
Bottom	0.92			0.006		

TEST REPORT

Report No.: MTI241225011-04E2

Test condition 3: Mode 8 operating mode with client device (99 % battery status of client device)

Probe Position	E -field (V/m)			H-field (A/m)		
	Measurement	Limit	Percentage (%)	Measurement	Limit	Percentage (%)
Z axis	0.99	614	0.16%	0.02	1.63	1.20%
Left	0.57			0.007		
Right	0.72			0.01		
Front	0.70			0.007		
Rear	0.87			0.007		
Bottom	0.75			0.005		

TEST REPORT

Report No.: MTI241225011-04E2

Test condition 1: Mode 2 operating mode with client device (1 % battery status of client device)

Probe Position	E –field (V/m)			H–field (A/m)		
	Measurement	Limit	Percentage (%)	Measurement	Limit	Percentage (%)
Z axis	1.54	614	0.25%	0.07	1.63	4.29%
Left	1.13			0.02		
Right	1.14			0.04		
Front	0.98			0.03		
Rear	1.15			0.05		
Bottom	0.89			0.01		

Test condition 2: Mode 2 operating mode with client device (50 % battery status of client device)

Probe Position	E –field (V/m)			H–field (A/m)		
	Measurement	Limit	Max. Percentage (%)	Measurement	Limit	Max. Percentage (%)
Z axis	1.23	614	0.20%	0.06	1.63	3.44%
Left	0.90			0.02		
Right	0.91			0.03		
Front	0.78			0.02		
Rear	0.92			0.04		
Bottom	0.71			0.01		

TEST REPORT

Report No.: MTI241225011-04E2

Test condition 3: Mode 2 operating mode with client device (99 % battery status of client device)

Probe Position	E –field (V/m)			H–field (A/m)		
	Measurement	Limit	Percentage (%)	Measurement	Limit	Percentage (%)
Z axis	1.00	614	0.16%	0.05	1.63	2.79%
Left	0.73			0.01		
Right	0.74			0.03		
Front	0.64			0.02		
Rear	0.75			0.03		
Bottom	0.58			0.01		

TEST REPORT

Report No.: MTI241225011-04E2

Photographs of the Test Setup

See the Appendix - Test Setup Photos.

Photographs of the EUT

See the Appendix - EUT Photos.

TEST REPORT

Report No.: MTI241225011-04E2

Statement

1. This report is invalid without the seal and signature of the laboratory.
2. The test results of this report are only responsible for the samples submitted. Client shall be responsible for representativeness of the sample and authenticity of the material.
3. The report shall not be partially reproduced without the written consent of the Laboratory.
4. This report is invalid if transferred, altered or tampered with in any form without authorization.
5. The observations or tests with special mark fall outside the scope of accreditation, and are only used for purpose of commission, research, training, internal quality control etc.
6. Any objection to this report shall be submitted to the laboratory within 15 days from the date of receipt of the report.

***** END OF REPORT *****