


# FCC TEST REPORT

**Report No**..... NTC-ER2408062  
**Applicant's name**..... Shenzhen Bright Lighting Technology Co.,Ltd  
**Address**..... Building#28, Shancheng Industrial Park, Shiyan Street,  
Bao'an District,Shenzhen City, Guangdong Province,  
China.

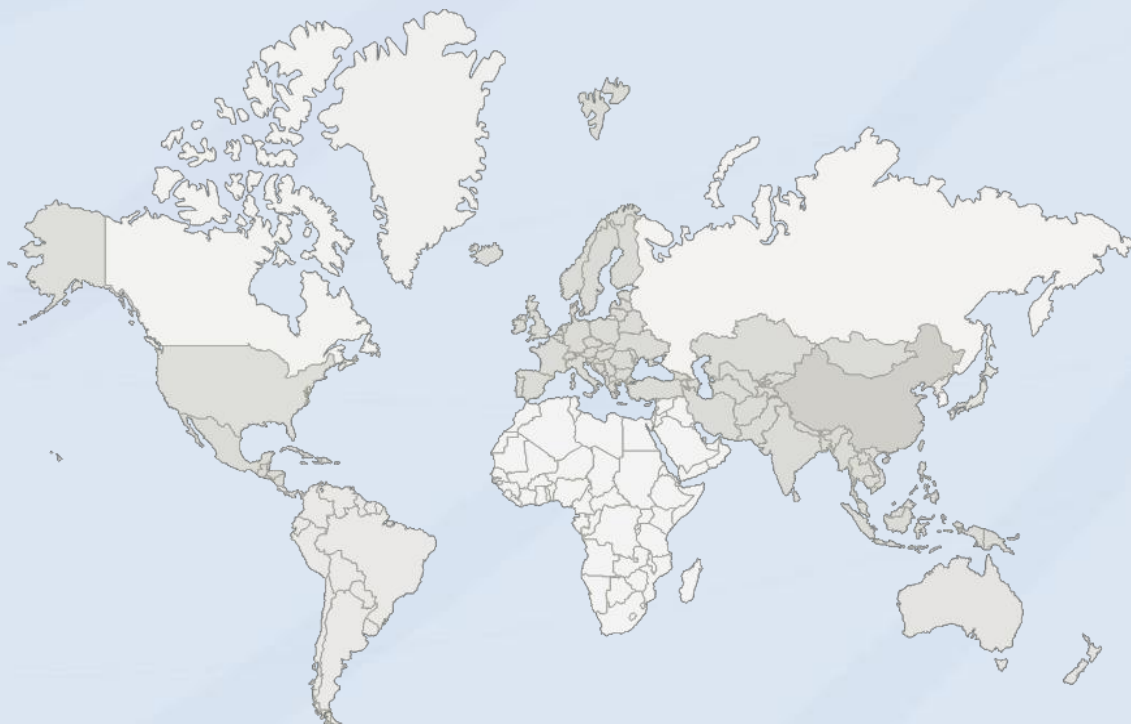

## **DONGGUAN NEW TESTING CENTRE CO., LTD**

Ⓞ Address: 31F & 3F, No. 1 the 1st North Industry Road Songshan Lake Science & Technology Park Dongguan, People's

Republic of China 523808

☎ Tel: +86-769-22212079

cert.com

🌐 Web: <http://www.ntc-cert.com>

✉ E-mail: dave@ntc-

**TABLE OF CONTENTS**

<b>1. SUMMARY OF TEST RESULTS.....</b>	<b>4</b>
<b>2. GENERAL TEST INFORMATION .....</b>	<b>4</b>
2.1. DETAIL MODELS .....	5
2.2. TEST PERIPHERAL LIST.....	5
2.3. BLOCK DIAGRAM EUT CONFIGURATION FOR TEST .....	6
2.4. TEST ENVIRONMENT CONDITIONS.....	6
2.5. MEASUREMENT UNCERTAINTY .....	6
<b>3. POWER LINE CONDUCTED EMISSION TEST.....</b>	<b>7</b>
3.1. TEST EQUIPMENT .....	7
3.2. BLOCK DIAGRAM OF TEST SETUP .....	7
3.3. POWER LINE CONDUCTED EMISSION LIMITS (CLASS B) .....	7
3.4. TEST PROCEDURE.....	8
3.5. TEST RESULT .....	8
<b>4. RADIATED EMISSION TEST .....</b>	<b>10</b>
4.1. TEST EQUIPMENT .....	10
4.2. BLOCK DIAGRAM OF TEST SETUP.....	11
4.3. LIMIT.....	13
4.4. TEST PROCEDURE.....	14
4.5. TEST RESULT.....	14
<b>5. OUTPUT POWER .....</b>	<b>20</b>
5.1. TEST EQUIPMENT .....	20
5.2. BLOCK DIAGRAM OF TEST SETUP .....	20
5.3. LIMIT.....	20
5.4. TEST PROCEDURE.....	20
5.5. TEST RESULT.....	21
<b>6. -6DB BANDWIDTH .....</b>	<b>27</b>
6.1. TEST EQUIPMENT .....	27
6.2. BLOCK DIAGRAM OF TEST SETUP .....	27
6.3. LIMIT.....	27
6.4. TEST PROCEDURE.....	27
6.5. TEST RESULT.....	28
<b>7. BAND EDGES MEASUREMENT.....</b>	<b>34</b>
7.1. TEST EQUIPMENT .....	34
7.2. BLOCK DIAGRAM OF TEST SETUP .....	34
7.3. LIMIT.....	34
7.4. TEST PROCEDURE.....	34
7.5. TEST RESULT.....	35

**8.**

**CONDUCTED SPURIOUS EMISSION .....42**

8.1. TEST EQUIPMENT ..... 42

8.2. BLOCK DIAGRAM OF TEST SETUP ..... 42

8.3. LIMIT..... 42

8.4. TEST PROCEDURE..... 42

8.5. TEST RESULT..... 43

**9. CONDUCTED OUTPUT POWER SPECTRAL DENSITY.....53**

9.1. TEST EQUIPMENT ..... 53

9.2. BLOCK DIAGRAM OF TEST SETUP..... 53

9.3. LIMIT..... 53

9.4. TEST PROCEDURE..... 53

9.5. TEST RESULT..... 54

**10. ANTENNA REQUIREMENT .....60**

10.1. STANDARD REQUIREMENT..... 60

10.2. EUT ANTENNA..... 60

**11. TEST SETUP PHOTOGRAPH.....61**

11.1. PHOTOS OF RADIATED EMISSION TEST..... 61

**12. PHOTO OF THE EUT .....62**

--END OF REPORT-- ..... 66

## TEST REPORT DECLARE

<b>FCC ID</b>	.	2AQ22-BRTRGB30
<b>Equipment under Test</b>	.	LED Strip
<b>Model /Type</b>	.	BRT-SFN-RGB30-5010
<b>Listed Models</b>	:	BRT-SFN-RGB30-5010
<b>Trade Mark</b>	:	N/A
<b>Applicant</b>	.	Shenzhen Bright Lighting Technology Co.,Ltd
<b>Address</b>	:	Building#28, Shancheng Industrial Park, Shiyan Street, Bao'an District,Shenzhen City, Guangdong Province, China.
<b>Manufacturer</b>	:	Shenzhen Bright Lighting Technology Co.,Ltd
<b>Address</b>	:	Building#28, Shancheng Industrial Park, Shiyan Street, Bao'an District,Shenzhen City, Guangdong Province, China.
<b>Test Laboratory</b>	.	Dongguan New Testing Centre Co., Ltd
<b>Address</b>	:	1F & 3F, No. 1 the 1st North Industry Road Songshan Lake Science & Technology Park Dongguan, People' s Republic of China 523808

**Test Standard Used:**

FCC Rules and Regulations Part 15 Subpart C: 15.247, ANSI C63.10:2020.

**We Declare:**

The equipment described above is tested by Dongguan New Testing Centre Co., Ltd and in the configuration tested the equipment complied with the standards specified above. The test results are contained in this test report and Dongguan New Testing Centre Co., Ltd is assumed of full responsibility for the accuracy and completeness of these tests.

**After test and evaluation, our opinion is that the equipment provided for test compliance with the requirement of the above FCC standards.**

<b>Report No:</b>	Ntc-ER2408062		
<b>Date of Test:</b>	Aug.10,2024 to Sept.20,2024	<b>Date of Report:</b>	Oct.17,2024

**Prepared By:**

*Taylor Chen*

**Taylor Chen/Engineer**

**Approved By:**



**Dave Gao/LAB Manager**

Note: This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Dongguan New Testing Centre Co., Ltd

## 1. Summary of test results

Description of Test Item	Standard	Results
Antenna Requirement	Section 15.247(c)	PASS
Conduction Emissions	Section 15.207(a)	N/A
Radiated Emissions	Section 15.247(d)	PASS
Carrier Frequencies Separated	Section 15.247(a)(1)	PASS
Dwell Time	Section 15.247(a)(1) (iii)	PASS
Maximum Peak Output Power	Section 15.247(b)	PASS
Band edge	Section 15.247(d)	PASS
Conducted Spurious Emissions	Section 15.247(d)	PASS

## 2. General test information

Description of EUT

EUT* Name	: LED Strip
Test model	: BRT-SFN-RGB30-5010
EUT function description	: Please reference user manual of this device
Power supply	: DC 12V
Supported type:	: 802.11b/802.11g/802.11n(H20)
Modulation Technology:	: 802.11b: DSSS 802.11g/n: OFDM
Transmit Data Rate:	: 802.11b :1/2/5.5/11 Mbps 802.11g :6/9/12/18/24/36/48/54 Mbps 802.11n(HT20): 7.2/14.4/21.7/28.9/43.3/57.8/65/72.2 Mbps
Channel Separation:	: 5 MHz
Antenna Type	: PCB Antenna
Gain:	: Max 1.31dBi
Hardware Version:	: V1.0
Software Version:	: V1.0

Note:1. EUT is the ab. of equipment under test.

Frequency list:

1. Test frequencies are lowest channel: 2412 MHz, middle channel: 2437 MHz and highest channel: 2462 MHz for 802.11b/g/n(HT20)

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437		

**Description of test modes**

No.	TEST Mode DESCRIPTION
1	Low channel TX
2	Middle channel TX
3	High channel TX
4	Keeping TX mode
Note: Transmit by 802.11b with Data rate (1/2/5.5/11) Transmit by 802.11g with Data rate (6/9/12/18/24/36/48/54) Transmit by 802.11n (20MHz) with Data rate (6.5/13/19.5/26/39/52/58.5/65)	

Note:

1. The EUT has been set to operate continuously on the lowest, middle and highest operation frequency Individually, and the EUT is operating at its maximum duty cycle>or equal 98%

2. All modes under which configure applicable have been tested and the worst mode test data recording in the test report, if no other mode data.

For Radiated Emission, 3 axis were chosen for testing for each applicable mode.

**2.1. Detail models**


Model	Rating	Note
BRT-SFN-RGB30-5010	DC 12V	N/A

**2.2. Test Peripheral List**

No.	Equipment	Manufacturer	Model No.	Serial No.	Note
1	Notebook	Lenovo	ThinkPadE450	PF-0LRXDH	--

**2.3. Block diagram EUT configuration for test**

For EUT Tx mode:



**2.4. Test environment conditions**

During the measurement the environment conditions were within the listed ranges:

Temperature range:	21-24°C
Humidity range:	40-75%
Pressure range:	86-106kPa

**2.5. Measurement uncertainty**

Test Item	Uncertainty
Uncertainty for Conduction emission test	3.20 dB
Uncertainty for Radiation Emission test (30MHz – 1GHz)	4.60 dB (Polarize: V)
	4.60 dB (Polarize: H)
Uncertainty for Radiation Emission test (1GHz – 18GHz)	4.82 dB (Polarize: V)
	4.52 dB (Polarize: H)
Bandwidth	±1.2%
Stop Transmitting Time Test	±0.5%
Uncertainty for frequency error	5.8 x 10 <sup>-8</sup>


Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

### 3. Power Line Conducted Emission Test

#### 3.1. Test equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	Test Receiver	R&S	ESPI	100146	2024-05-14	1 Year
2	LISN	R&S	ENV216	3650.6550.06	2024-05-14	1 Year
3	LISN	R&S	ENV4200	1107.2387.04	2024-05-14	1 Year
4	RF Cable	HUBER	SUCOFLEX100	30722/4E	2023-05-22	2 Year
5	MEASUREMENT SOFTWARE	FARAD	EZ-EMC(VER:1.1.4.2)	N/A	N/A	N/A

#### 3.2. BLOCK DIAGRAM OF TEST SETUP

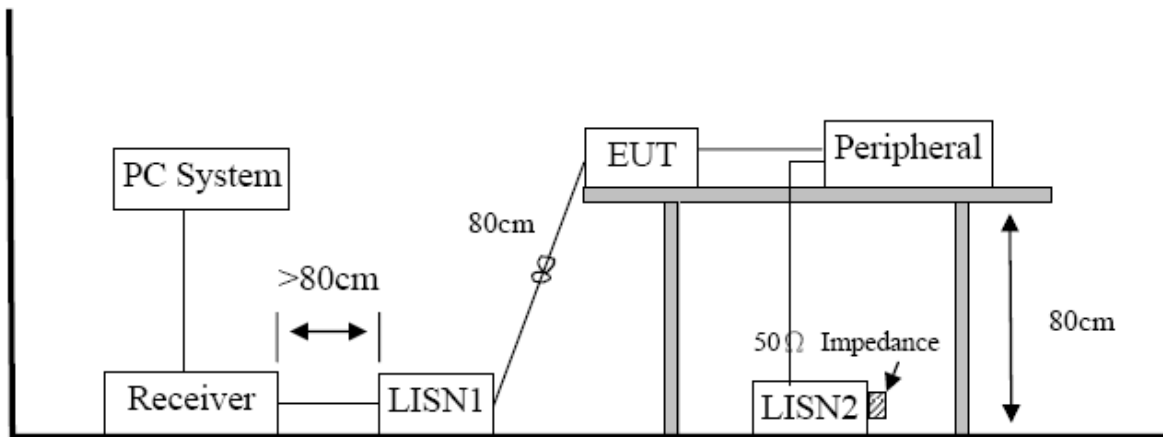

#### 3.3. Power Line Conducted Emission Limits (Class B)

Frequency	Quasi-Peak Level dB(μV)	Average Level dB(μV)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Note 1: \* Decreasing linearly with logarithm of frequency.

Note 2: The lower limit shall apply at the transition frequencies.



### 3.4. Test Procedure

The EUT and Support equipment, if needed, were put placed on a non-metallic table, 80cm above the ground plane.

Configuration EUT to simulate typical usage as described in clause 2.3 and test equipment as described in clause 3.2 of this report.

All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10. All support equipment power received from a second LISN.

Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.

The Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.

During the above scans, the emissions were maximized by cable manipulation.

The test mode(s) described in clause 2.3 were scanned during the preliminary test. After the preliminary scan, we found the test mode producing the highest emission level.

The EUT configuration and worse cable configuration of the above highest emission levels were recorded for reference of the final test.

EUT and support equipment were set up on the test bench as per the configuration with highest emission level in the preliminary test.

A scan was taken on both power lines, Neutral and Line, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit.

The test data of the worst-case condition(s) was recorded. The

bandwidth of test receiver is set at 9 KHz.

### 3.5. Test Result

**PASS. ( See below detailed test result )**

Note1: All emissions not reported below are too low against the prescribed limits.

Note2: “-----” means Peak detection; “-----” means Average detection

Note3: Measurement = Reading Level + Factor, Margin= Measurement-Limit

## Conducted Emission Test Result

N/A


## 4. Radiated emission test

### 4.1. Test equipment


Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	EMI Test Receiver	R&S	ESR	7250-30406 7528	2024-05-14	1 Year
2	Trilog Broadband Antenna	Schwarzbeck	VULB9168	00969	2023-05-22	2 Year
3	Pre-amplifier	R&S	8449B	3113A04553	2024-05-14	1 Year
4	Active Loop antenna	Schwarzbeck	FMZB-1519	1519-038	2024-05-14	1 Year
5	Horn antenna	Schwarzbeck	BBHA9120D	453	2023-05-19	2 Year
6	Double Ridged Horn Antenna	A.H. System	SAS-574	584	2024-05-14	1 Year
7	Pre-amplifier	R&S	SCU18	105326	2024-05-14	1 Year
8	RF Cable	GORE	OSQ01Q010 78.7	SN1545847 3	2024-05-14	1 Year
9	RF Cable	GORE	OSQ01Q010 78.7	SN1545847 4	2024-05-14	1 Year
10	RF Cable	ESCO	ETS-LINGR EN	RFC-SMS-1 00-SMS-340 -IN	2024-05-14	1 Year
11	Measurement software	Farad	EZ-EMC(VE R:1.1.4.2)	N/A	N/A	N/A

**4.2. Block diagram of test setup**


In 3m Anechoic Chamber Test Setup Diagram for 9KHz to 30MHz:

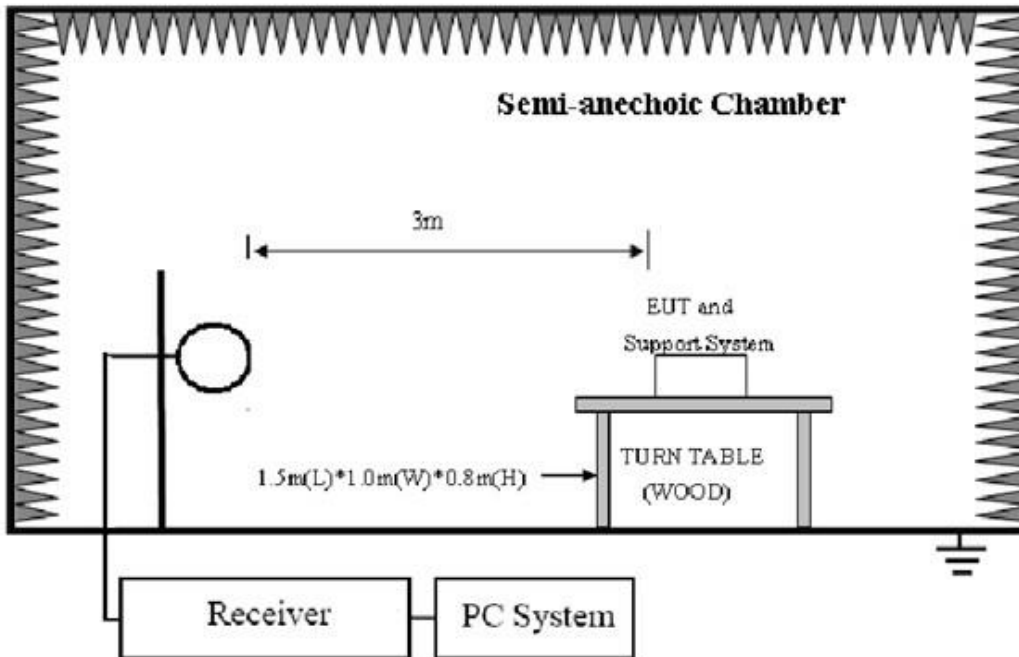

In 3m Anechoic Chamber Test Setup Diagram for 30MHz to 1GHz:

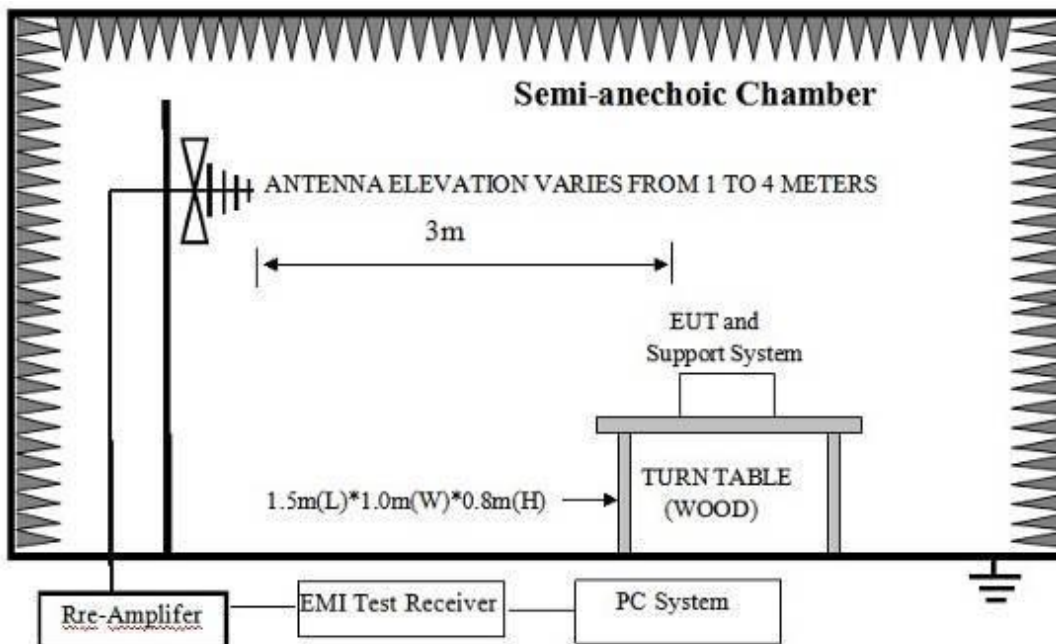

In 3m Anechoic Chamber Test Setup Diagram for frequency above 1GHz:

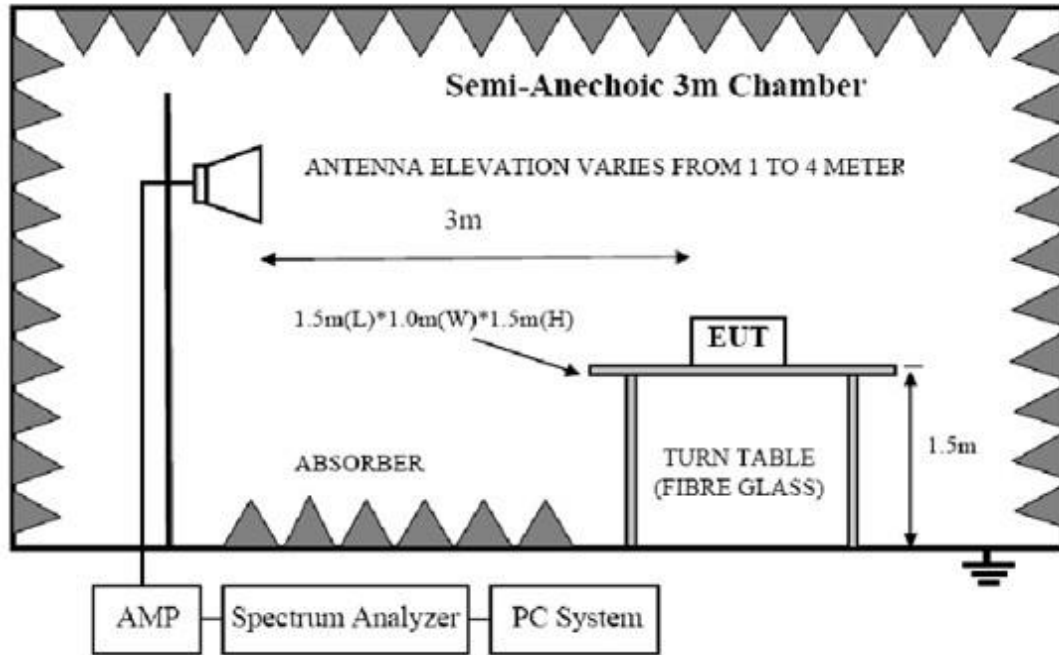

### 4.3. Limit

FCC 15.205 Restricted frequency band:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	( <sup>2</sup> )

### FCC 15.109 Limit

Frequency (MHz)	Distance (Meters)	Field Strengths Limits dB(μV)/m
30--88	3	40.0
88--216	3	43.5
216--960	3	46.0
960--1000	3	54.0
Above 1GHz	3	Peak: 74.0
	3	Average:54.0

Note: (1) The smaller limit shall apply at the cross point between two frequency bands.

(2) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

(3) The emission limits shown in the above table are based on measurements employing a CISPR QP detector except for the frequency bands 9-90KHz, 110-490KHz and above 1000MHz. Radiated

emissions limits in these three bands are based on measurements employing an average detector.

(4) At frequencies below 30MHz, measurement may be performed at a distance closer than that specified, and the limit at closer measurement distance can be extrapolated by below formula:  $\text{Limit } 3\text{m}(\text{dB}\mu\text{V}/\text{m}) = \text{Limit } 30\text{m}(\text{dB}\mu\text{V}/\text{m}) + 40\text{Log}(30\text{m}/3\text{m})$

(5) All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.109, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.109 limits.

#### 4.4. Test Procedure

##### Procedure of Preliminary Test

Configuration EUT to simulate typical usage as described in clause 2.3 and test equipment as described in clause 4.2 of this report.

Mains cables, telephone lines or other connections to auxiliary equipment located outside the test are shall drape to the floor, be fitted with ferrite clamps or ferrite tubes placed on the floor at the point where the cable reaches the floor and then routed to the place where they leave the turntable. No extension cords shall be used to mains receptacle.

EUT height should be 0.8m for below 1GHz and 1.5m for above 1GHz at ground with absorbers.

The antenna was placed at 3 meter away from the EUT as stated in ANSI C63.10. The antenna connected to the Spectrum Analyzer via a cable and at times a pre-amplifier would be used.

The Analyzer / Receiver quickly scanned from 30MHz to 18GHz. The EUT test program was started. Emissions were scanned and measured rotating the EUT to 360 degrees and positioning the antenna 1 to 4 meters above the ground plane, in both the vertical and the horizontal polarization, to maximize the emission reading level.

The X, Y, Z three axial are tested and the report only the worst case.

The emissions from 9KHz to 1GHz, QP or average values were measured with EMI receiver with below RBW:

Frequency band	RBW
9KHz-150KHz	200Hz
150KHz-30MHz	9KHz
30MHz-1GHz	120KHz

For emissions above 1GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1MHz, VBW is set at 3MHz for Peak measure; RMS detector RBW 1MHz VBW 3MHz for Average measure.


#### 4.5. Test result

##### PASS.(See below detailed test result)

Radiated Emissions Test Data Below 30MHz:

No emission found between lowest internal used/generated frequencies to 30MHz.


## Radiated Emission Test Result

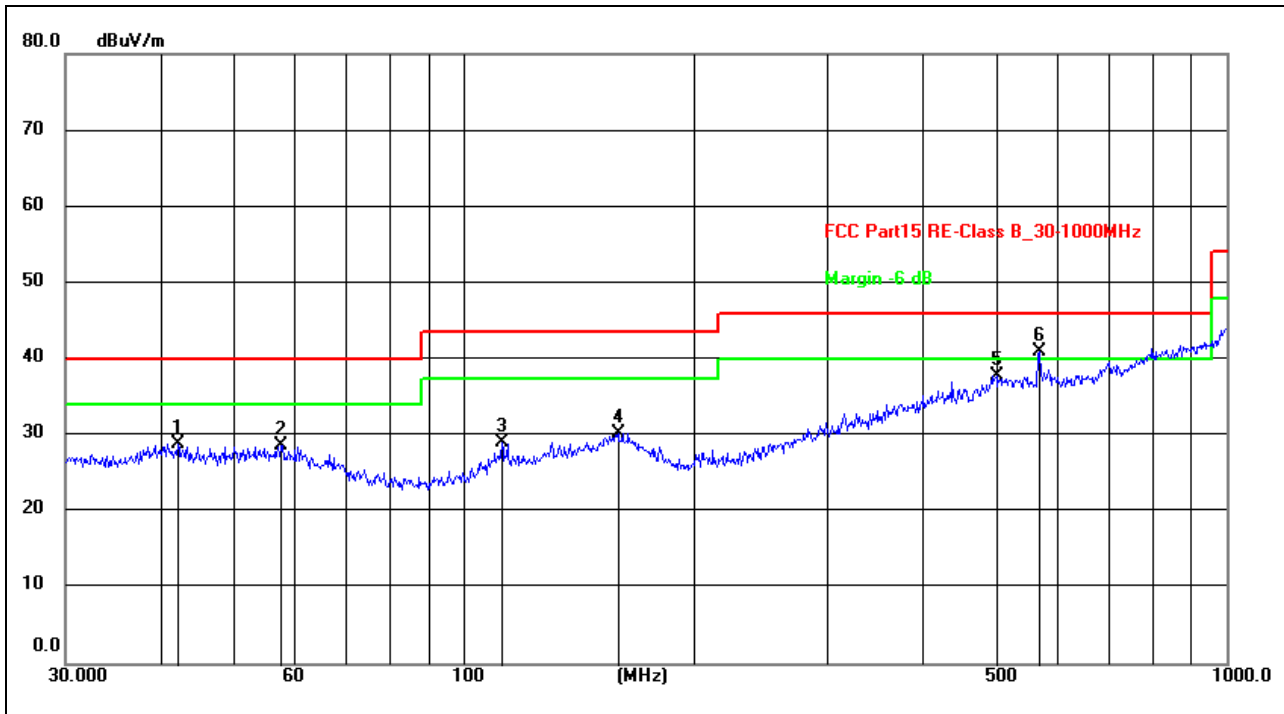

<b>Site:</b>	966LAB	<b>Antenna::</b>	Horizontal	<b>Temperature(C):</b>	24(C)
<b>Limit:</b>	FCC Part15 RE-Class B_30-1000MHz			<b>Humidity(%):</b>	60%
<b>EUT:</b>	LED Strip	<b>Test Time:</b>	2024/8/30 15:16:47		
<b>M/N.:</b>	BRT-SFN-RGB30-5010	<b>Power Rating:</b>	DC 12V		
<b>Mode:</b>	Lighting	<b>Test Engineer:</b>			
<b>Note:</b>					

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)	Remark
1	42.1541	14.89	14.07	28.96	40.00	-11.04	peak	200	311	
2	57.5939	15.32	13.41	28.73	40.00	-11.27	peak	200	158	
3	112.1304	15.81	13.27	29.08	43.50	-14.42	peak	100	304	
4	159.2251	14.96	15.41	30.37	43.50	-13.13	peak	100	195	
5	499.4246	18.31	19.56	37.87	46.00	-8.13	peak	200	161	
6 *	568.6126	19.85	21.20	41.05	46.00	-4.95	peak	200	73	



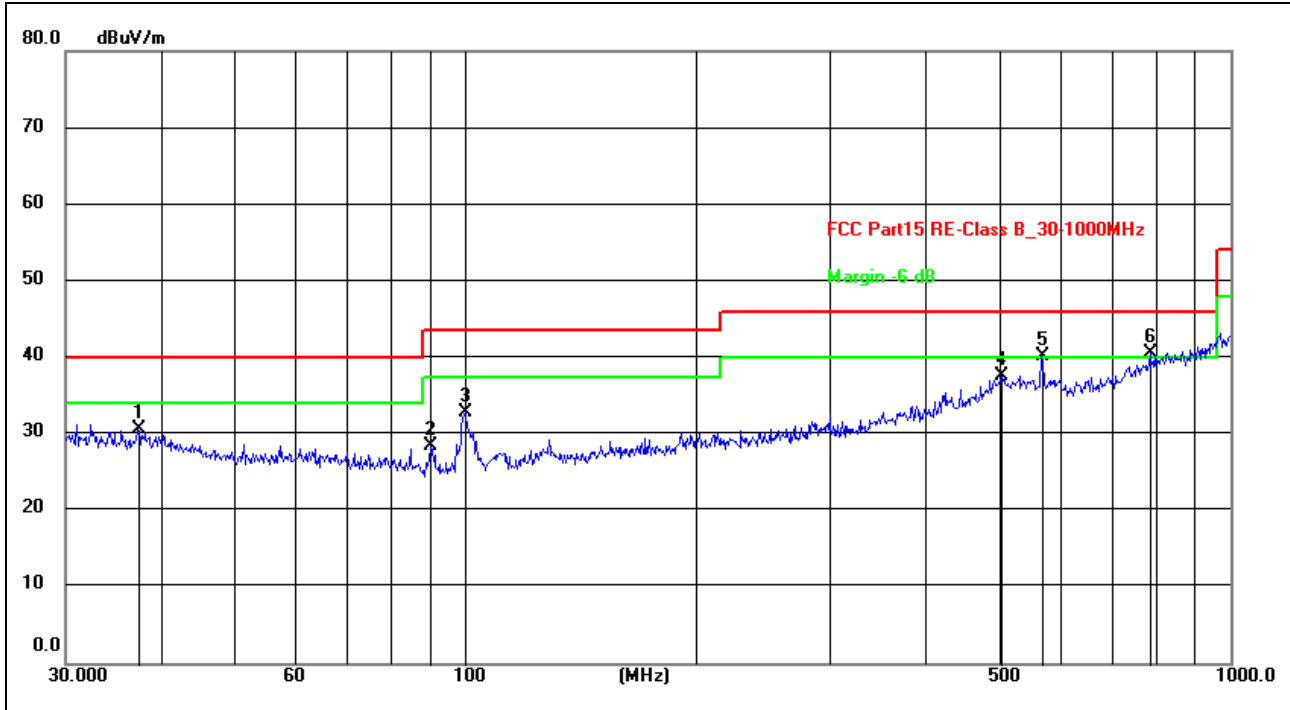

Site:	966LAB	Antenna::	Vertical	Temperature(C):	24(C)
Limit:	FCC Part15 RE-Class B_30-1000MHz			Humidity(%):	60%
EUT:	LED Strip	Test Time:	2024/8/30 15:19:24		
M/N.:	BRT-SFN-RGB30-5010	Power Rating:	DC 12V		
Mode:	Lighting	Test Engineer:			
Note:					

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)	Remark
1	37.2855	15.22	15.37	30.59	40.00	-9.41	peak	200	84	
2	89.9047	17.31	11.22	28.53	43.50	-14.97	peak	100	355	
3	99.8777	20.76	12.09	32.85	43.50	-10.65	peak	100	116	
4	502.9395	17.84	19.71	37.55	46.00	-8.45	peak	100	279	
5 !	566.6223	19.82	20.42	40.24	46.00	-5.76	peak	100	335	
6 *	785.0935	16.35	24.23	40.58	46.00	-5.42	peak	100	355	

**For 1GHz to 25GHz**

Note:802.11b/802.11g/802.11n(H20) Mode all have been tested, only worse case 802.11b mode is reported

**802.11b Mode (above 1GHz)**

Note: 802.11b/802.11g/802.11n (H20) all have been tested, only worse case 802.11b is reported

Frequency(MHz):			2412		Polarity:			HORIZONTAL	
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4824.00	57.16	PK	74.00	-16.84	54.93	33.52	5.12	40.87	-2.23
4824.00	50.44	AV	54.00	-3.56	48.21	33.52	5.12	40.87	-2.23
7236.00	52.38	PK	74.00	-21.62	51.86	35.59	6.53	42.64	-0.52
7236.00	43.78	AV	54.00	-10.22	43.26	35.59	6.53	42.64	-0.52

Frequency(MHz):			2412		Polarity:			VERTICAL	
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4824.00	58.75	PK	74.00	-15.25	56.52	33.52	5.12	40.87	-2.23
4824.00	46.42	AV	54.00	-7.58	44.19	33.52	5.12	40.87	-2.23
7236.00	57.74	PK	74.00	-16.26	57.22	35.59	6.53	42.64	-0.52
7236.00	42.13	AV	54.00	-11.87	41.61	35.59	6.53	42.64	-0.52

Frequency(MHz):			2437		Polarity:			VERTICAL	
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4824.00	57.73	PK	74.00	-16.27	54.78	33.54	5.34	41.83	-2.95
4824.00	46.95	AV	54.00	-7.05	44	33.54	5.34	41.83	-2.95
7236.00	50.64	PK	74.00	-23.36	50.29	36.59	6.81	43.75	-0.35
7236.00	44.04	AV	54.00	-9.96	43.69	36.59	6.81	43.75	-0.35

Frequency(MHz):			2437		Polarity:			VERTICAL	
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4824.00	59.27	PK	74.00	-14.73	56.32	33.54	5.34	41.83	-2.95
4824.00	44.03	AV	54.00	-9.97	41.08	33.54	5.34	41.83	-2.95
7236.00	52.37	PK	74.00	-21.63	52.02	36.59	6.81	43.75	-0.35
7236.00	43.63	AV	54.00	-10.37	43.28	36.59	6.81	43.75	-0.35

Frequency(MHz):			2462		Polarity:			VERTICAL	
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4824.00	59.35	PK	74.00	-14.65	55.77	32.63	5.64	41.85	-3.58
4824.00	45.26	AV	54.00	-8.74	41.68	32.63	5.64	41.85	-3.58
7236.00	51.96	PK	74.00	-22.04	53.03	37.53	7.23	43.69	1.07
7236.00	42.36	AV	54.00	-11.64	43.43	37.53	7.23	43.69	1.07

Frequency(MHz):			2462		Polarity:			VERTICAL	
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4824.00	58.44	PK	74.00	-15.56	54.86	32.63	5.64	41.85	-3.58
4824.00	41.36	AV	54.00	-12.64	37.78	32.63	5.64	41.85	-3.58
7236.00	50.13	PK	74.00	-23.87	51.2	37.53	7.23	43.69	1.07
7236.00	40.34	AV	54.00	-13.66	41.41	37.53	7.23	43.69	1.07

REMARKS:

1. Emission level (dBuV/m) =Raw Value (dBuV)+Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
3. Margin value = Limit value- Emission level.
4. -- Mean the PK detector measured value is below average limit.
5. RBW1MHz VBW3MHz Peak detector is for PK value; RBW 1MHz VBW10Hz Peak detector is for AV value.
6. Other emissions are attenuated 20dB below the limits from 9 kHz to 30MHz, so it does not recorded in report.

**Results of Band Edges Test (Radiated)**

Note: 802.11b/802.11g/802.11n (H20)/ 802.11n (H40) all have been tested, only worse case 802.11b is reported

Frequency(MHz):			2412		Polarity:			HORIZONTAL	
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2390.00	56.4	PK	74	-17.6	70.25	27.55	4.33	42.25	-10.37
2390.00	48.67	AV	54	-5.33	52.33	27.55	4.33	42.25	-10.37

Frequency(MHz):			2412		Polarity:			HORIZONTAL	
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2390.00	58.75	PK	74	-15.25	69.12	27.55	4.33	42.25	-10.37
2390.00	43.52	AV	54	-10.48	51.77	27.55	4.33	42.25	-10.37

Frequency(MHz):			2462		Polarity:			HORIZONTAL	
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2485.00	57.35	PK	74	-16.65	70.85	27.63	4.48	43.26	-11.15
2485.00	42.33	AV	54	-11.67	52.14	27.63	4.48	43.26	-11.15

Frequency(MHz):			2462		Polarity:			HORIZONTAL	
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2485.00	58.23	PK	74	-15.77	69.24	27.63	4.48	43.26	-11.15
2485.00	41.35	AV	54	-12.65	50.8	27.63	4.48	43.26	-11.15

**REMARKS:**


1. Emission level (dBuV/m) =Raw Value (dBuV)+Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
3. Margin value = Limit value- Emission level.
- 4.-- Mean the PK detector measured value is below average limit.
5. RBW1MHz VBW3MHz Peak detector is for PK value; RBW 1MHz VBW10Hz Peak detector is for AV value.
6. For fundamental frequency, RBW 3MHz VBW 3MHz Peak detector is for PK Value; RMS detector is for AV value.
7. Other emissions are attenuated 20dB below the limits from 9kHz to 30MHz, so it does not recorded in report.

## 5. Output Power

### 5.1. Test equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	MXA Signal Analyzer	KEYSIGHT	N9020A	MY54510476	2024/5/14	1 Year

### 5.2. BLOCK DIAGRAM OF TEST SETUP

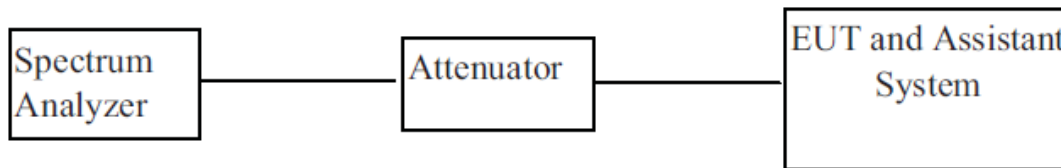

### 5.3. Limit

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt (30dBm).

### 5.4. Test Procedure

For output power test:


1. Connect EUT RF output port to power sensor through an RF attenuator.
2. Connect the power sensor to the PC.
3. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
4. Record the maximum power from the software.

Note: The EUT was tested according to KDB 558074v03r04 for compliance to FCC 47CFR 15.247 requirements.


**5.5. Test result**

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	802.11b 1Mbps	2412	Ant 1	7.853	0	7.853	30	Pass
NVNT	802.11b 1Mbps	2437	Ant 1	9.09	0	9.09	30	Pass
NVNT	802.11b 1Mbps	2462	Ant 1	10.161	0	10.161	30	Pass


Power NVNT 802.11b 1Mbps 2412MHz Ant1

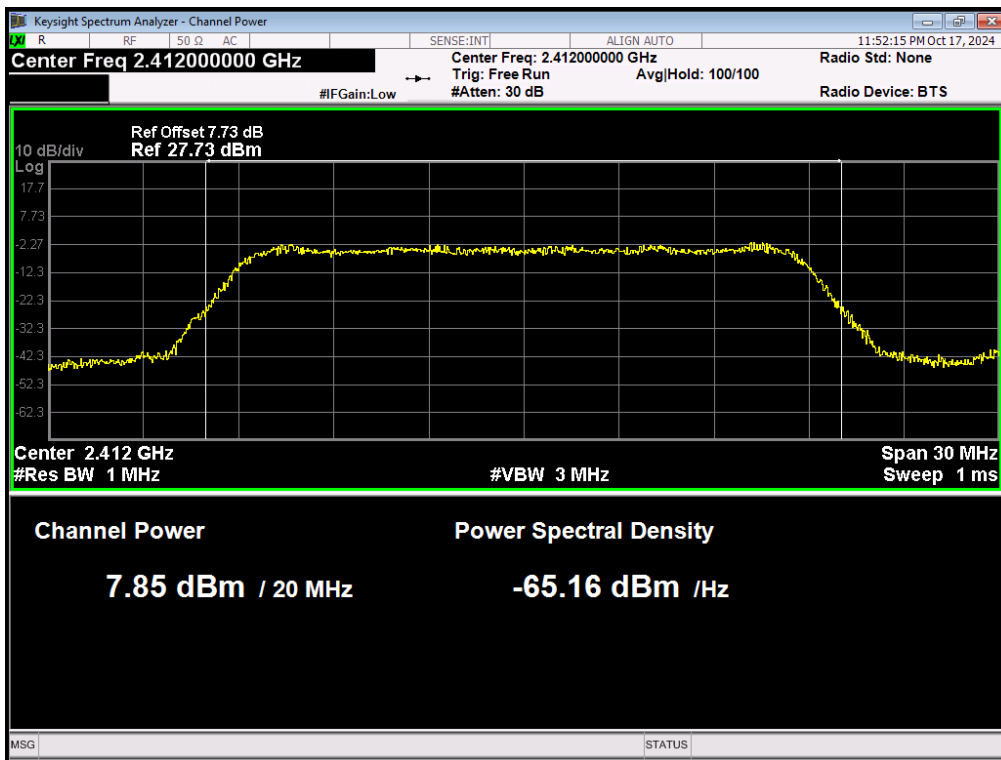

Power NVNT 802.11b 1Mbps 2437MHz Ant1

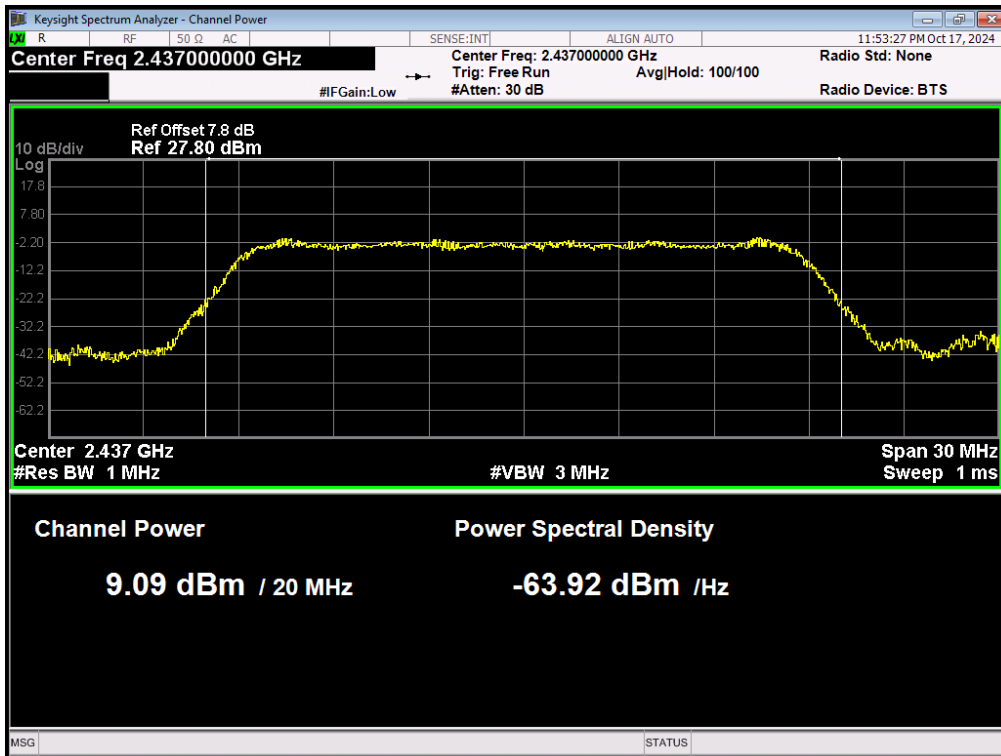


Power NVNT 802.11b 1Mbps 2462MHz Ant1

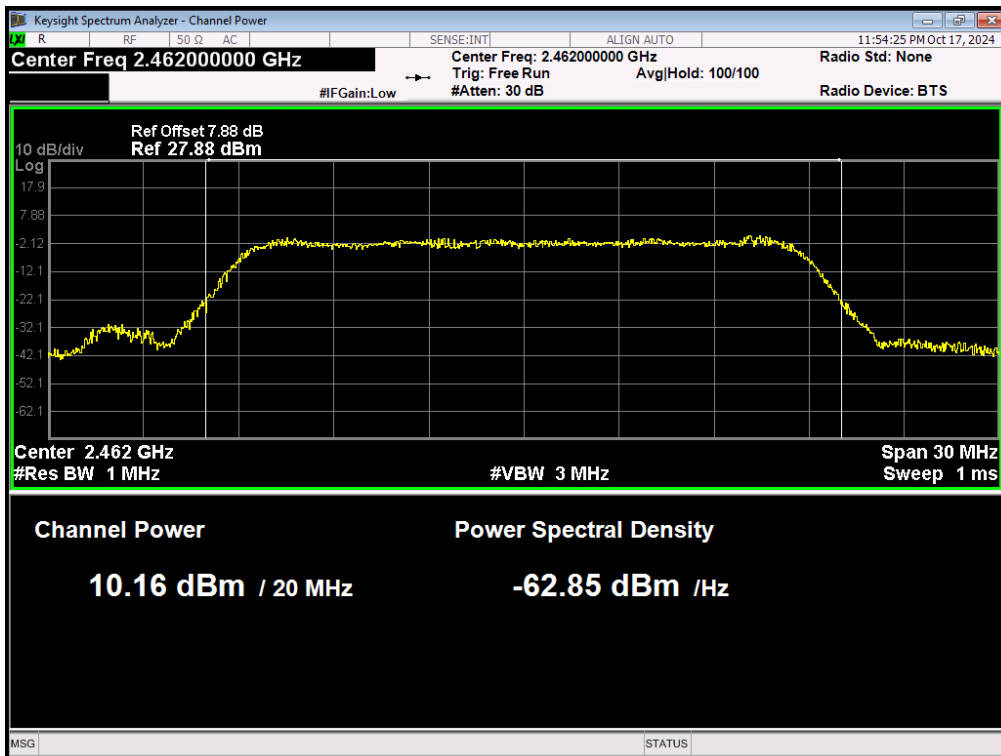


Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	802.11g 6Mbps	2412	Ant 1	8.094	0	8.094	30	Pass
NVNT	802.11g 6Mbps	2437	Ant 1	9.215	0	9.215	30	Pass
NVNT	802.11g 6Mbps	2462	Ant 1	10.115	0	10.115	30	Pass

Power NVNT 802.11g 6Mbps 2412MHz Ant1

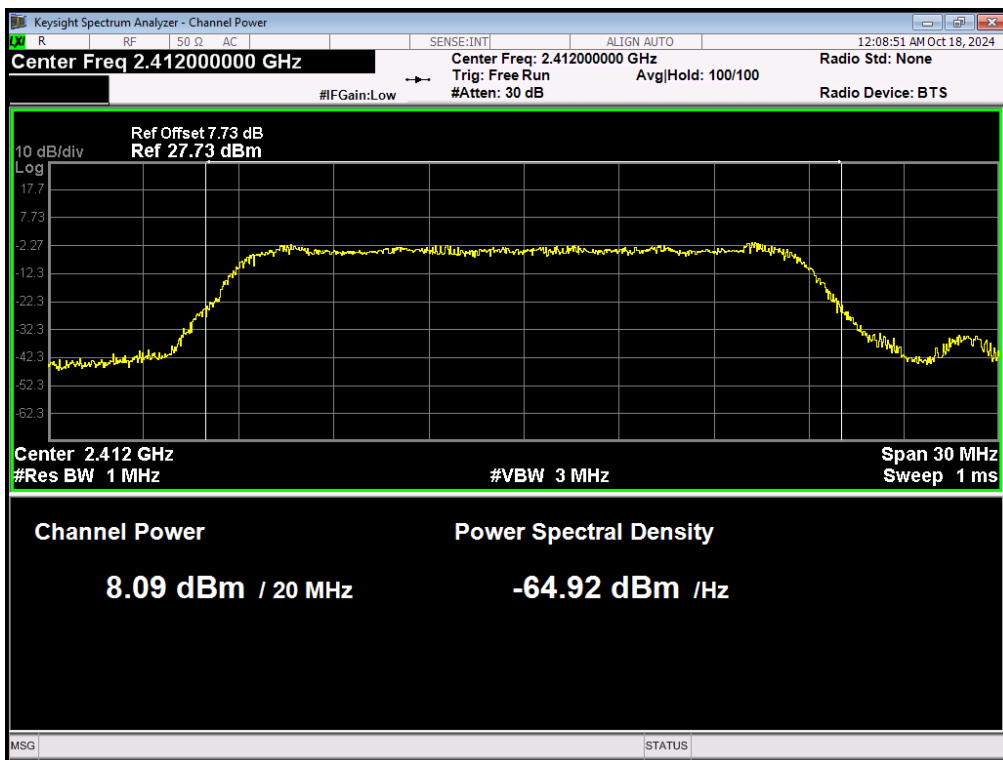


Power NVNT 802.11g 6Mbps 2437MHz Ant1



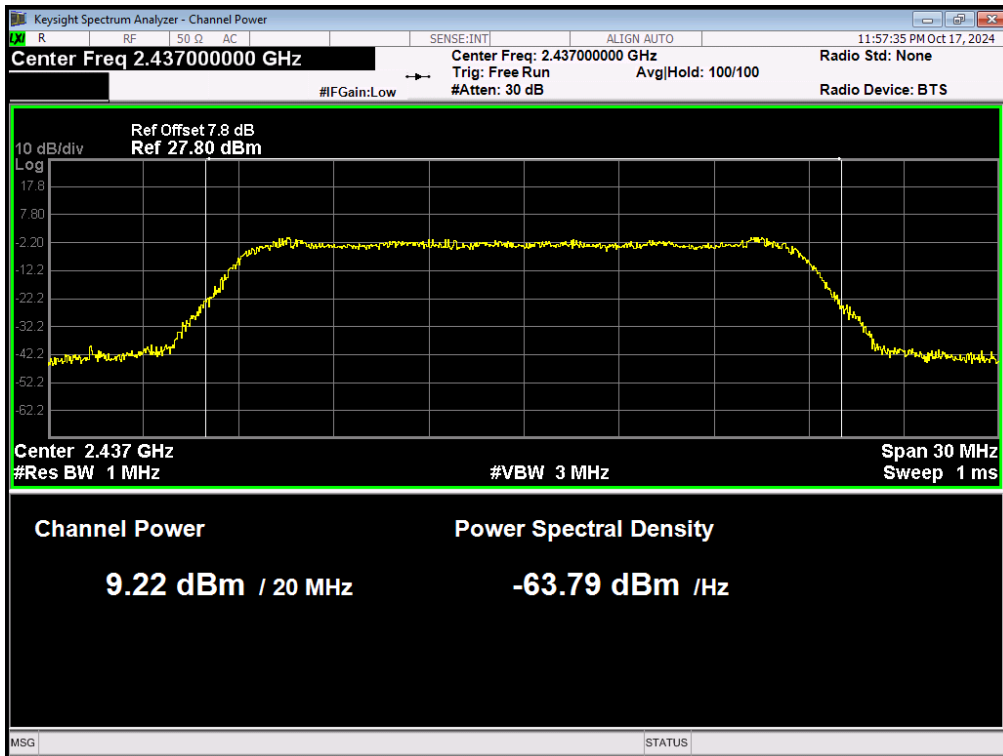


Power NVNT 802.11g 6Mbps 2462MHz Ant1

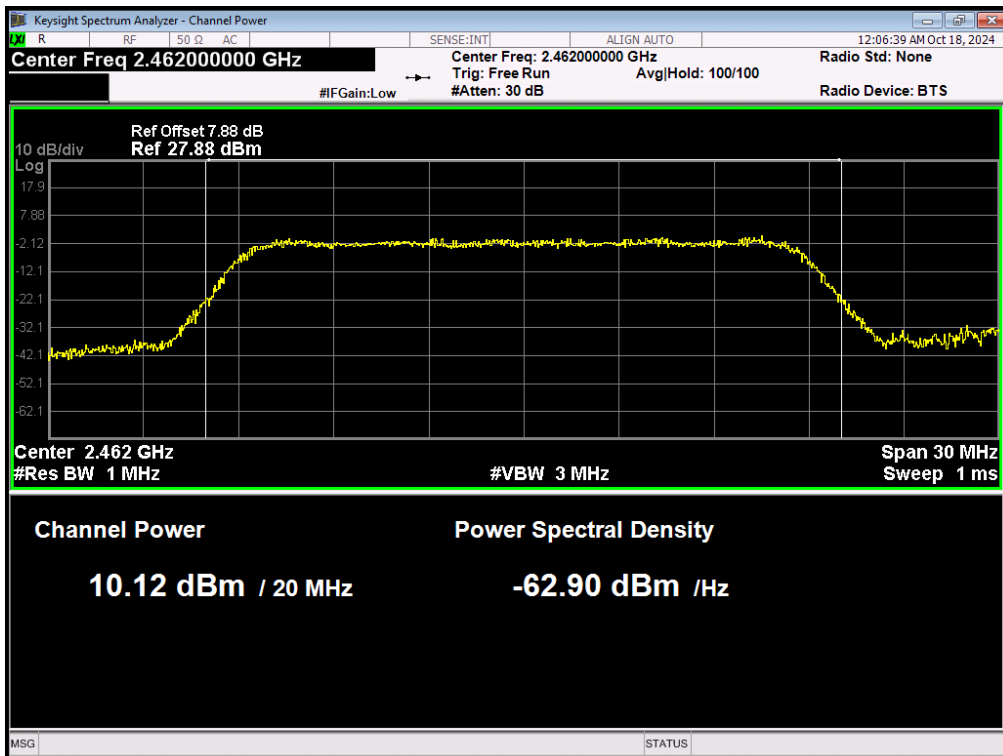


Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	802.11n(HT20)	2412	Ant 1	8.064	0	8.064	30	Pass

NVNT	802.11n(HT20)	2437	Ant 1	9.129	0	9.129	30	Pass
NVNT	802.11n(HT20)	2462	Ant 1	10.172	0	10.172	30	Pass


Power NVNT 802.11n(HT20) 2412MHz Ant1

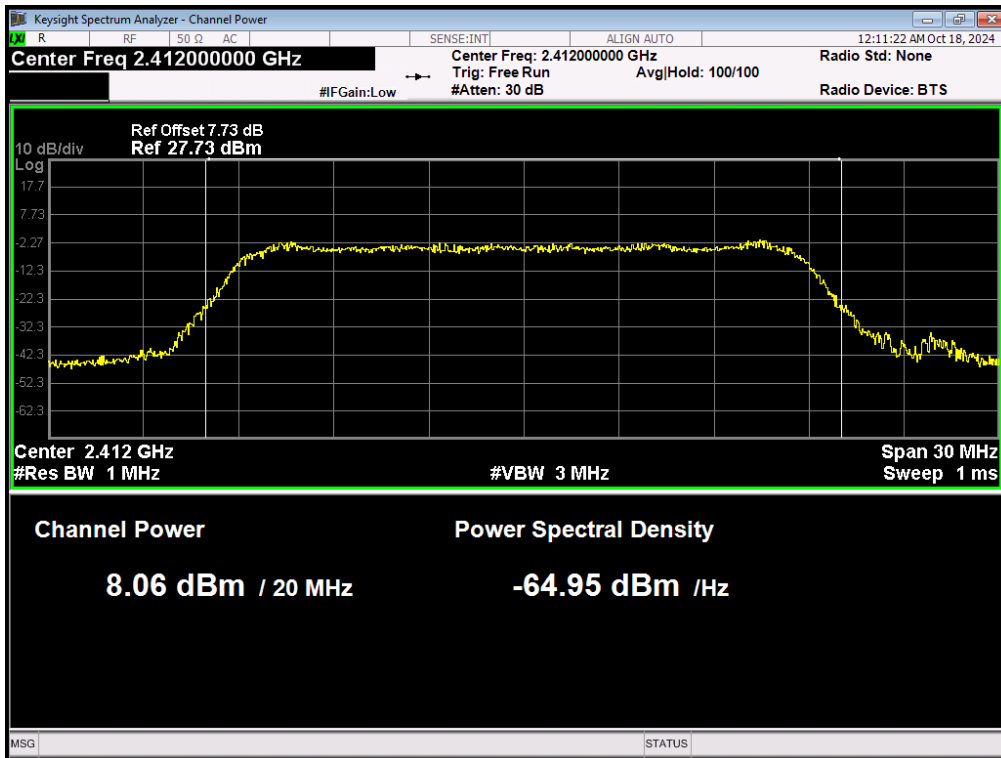

Power NVNT 802.11n(HT20) 2437MHz Ant1

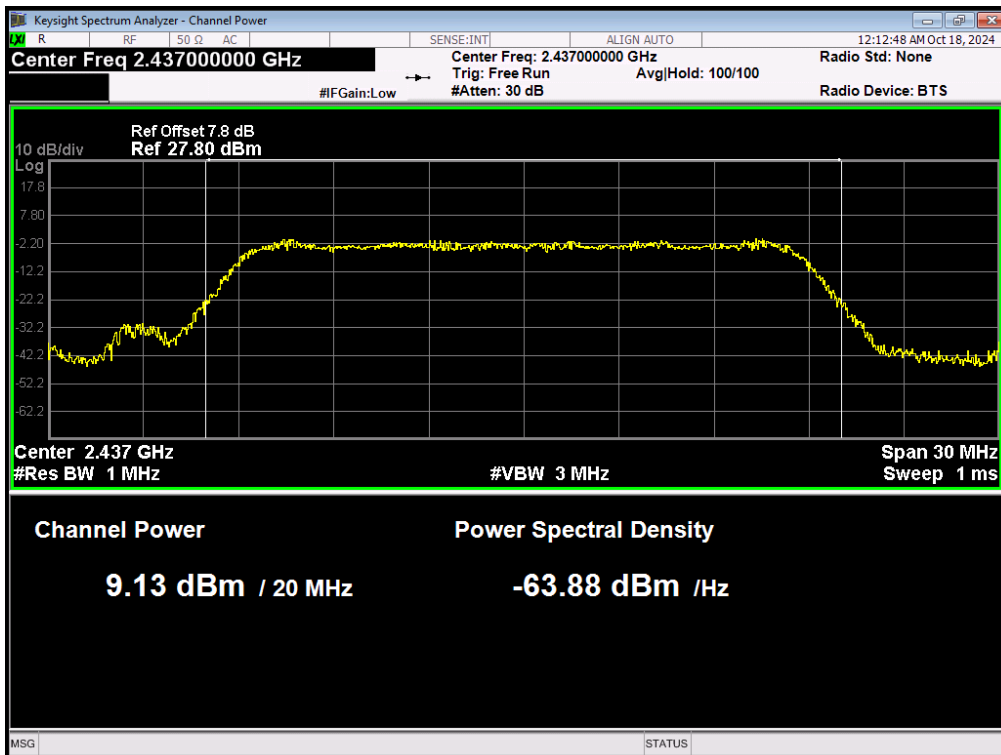

Power NVNT 802.11n(HT20) 2462MHz Ant1

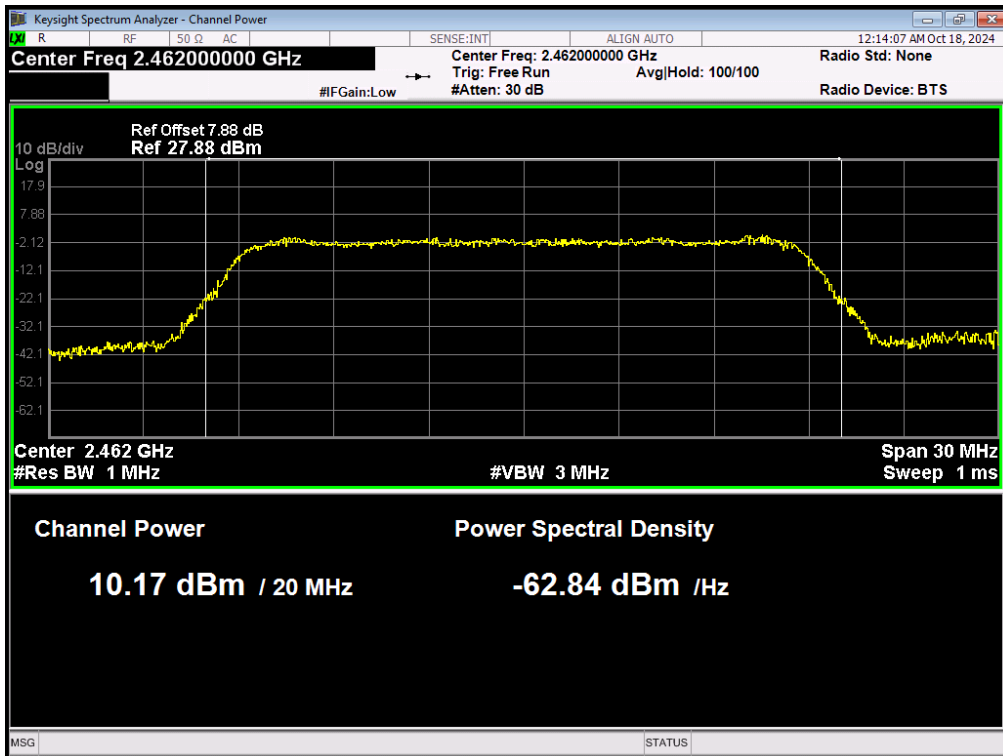


## 6. -6dB Bandwidth

### 6.1. Test equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	MXA Signal Analyzer	KEYSIGHT	N9020A	MY54510476	2024/05/14	1 Year

### 6.2. BLOCK DIAGRAM OF TEST SETUP

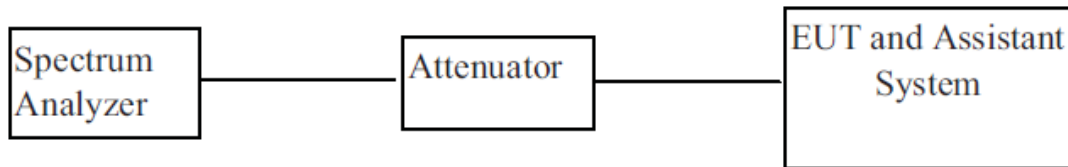

### 6.3. Limit

Systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

### 6.4. Test Procedure


1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
2. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
3. Set SPA Centre Frequency = Operation Frequency, RBW= 100 KHz, VBW $\geq$ 3 $\times$ RBW.
4. Set SPA Trace 1 Max hold, then View.

Note: The EUT was tested according to KDB 558074 for compliance to FCC 47CFR 15.247 requirements.


### 6.5. Test result

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	802.11b 1Mbps	2412	Ant 1	17.1945	16.1864	0.5	Pass
NVNT	802.11b 1Mbps	2437	Ant 1	17.1829	16.2928	0.5	Pass
NVNT	802.11b 1Mbps	2462	Ant 1	17.1587	16.4275	0.5	Pass


OBW NVNT 802.11b 1Mbps 2412MHz Ant1

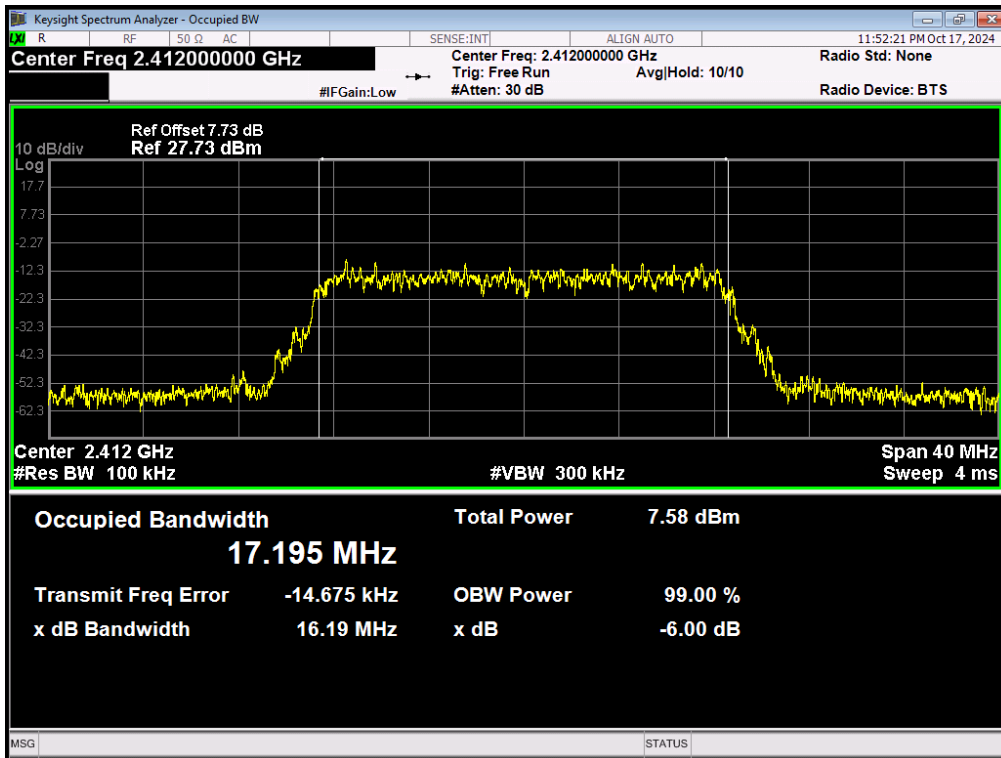

OBW NVNT 802.11b 1Mbps 2437MHz Ant1

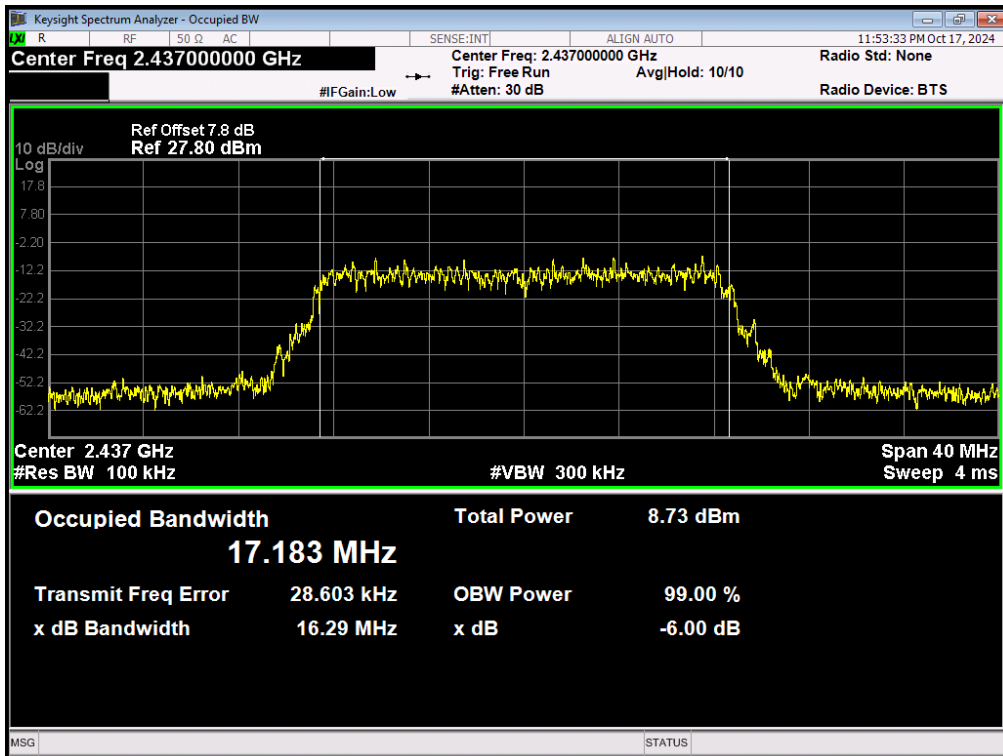


OBW NVNT 802.11b 1Mbps 2462MHz Ant1

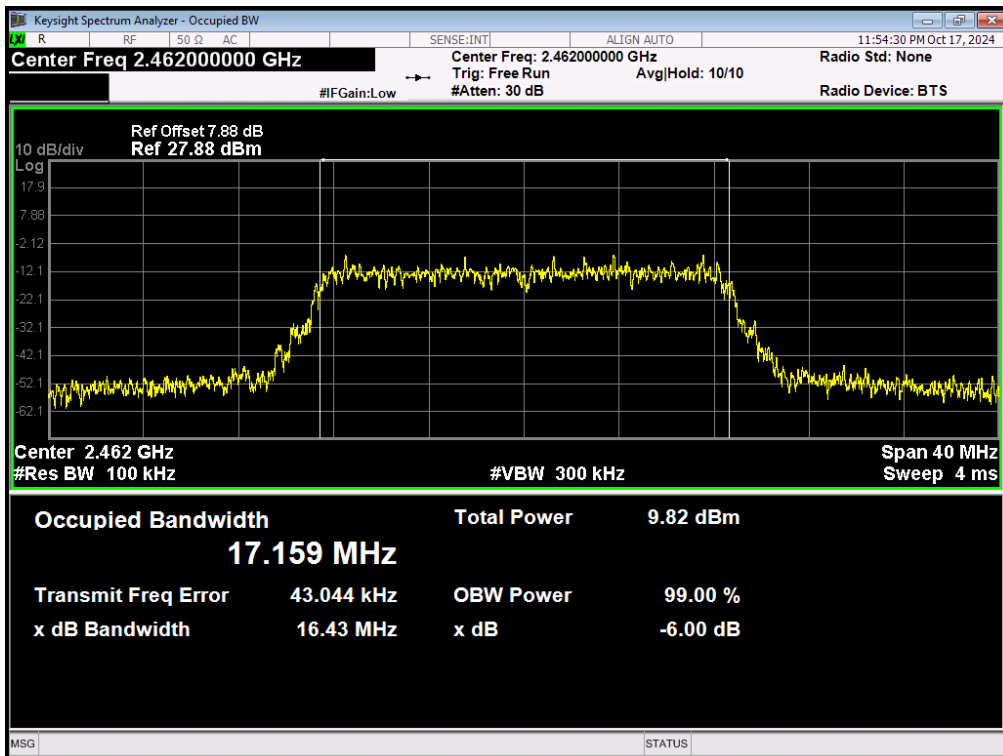


Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	802.11g 6Mbps	2412	Ant 1	17.1364	16.3128	0.5	Pass
NVNT	802.11g 6Mbps	2437	Ant 1	17.1611	16.5425	0.5	Pass
NVNT	802.11g 6Mbps	2462	Ant 1	17.1786	16.4112	0.5	Pass


OBW NVNT 802.11g 6Mbps 2412MHz Ant1

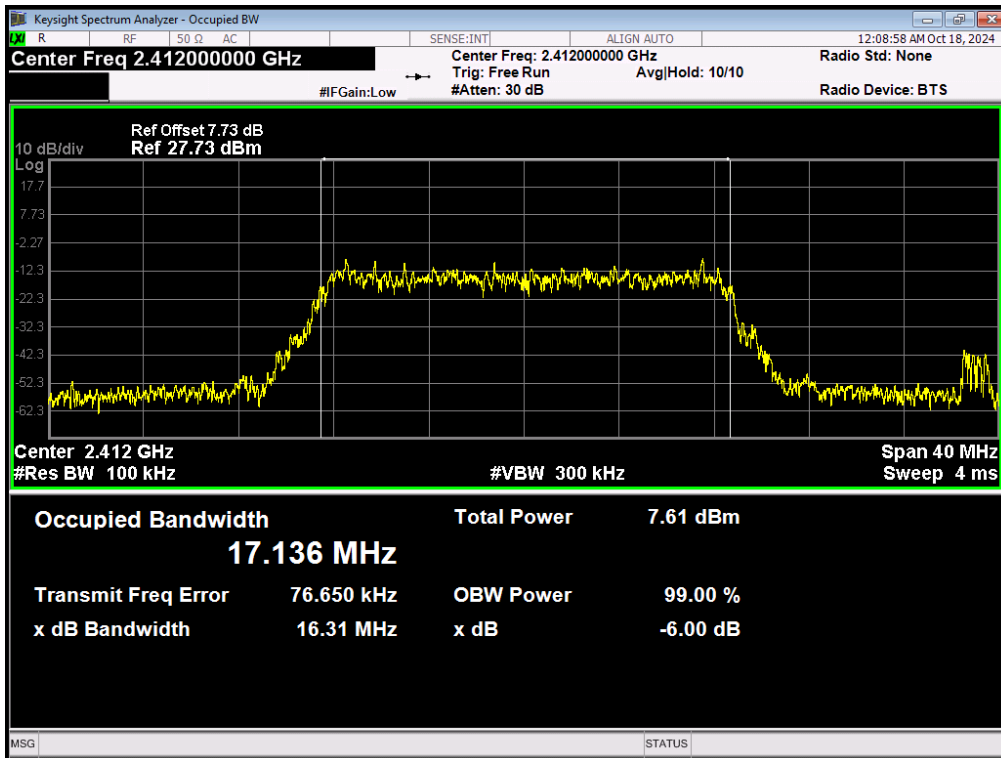

OBW NVNT 802.11g 6Mbps 2437MHz Ant1

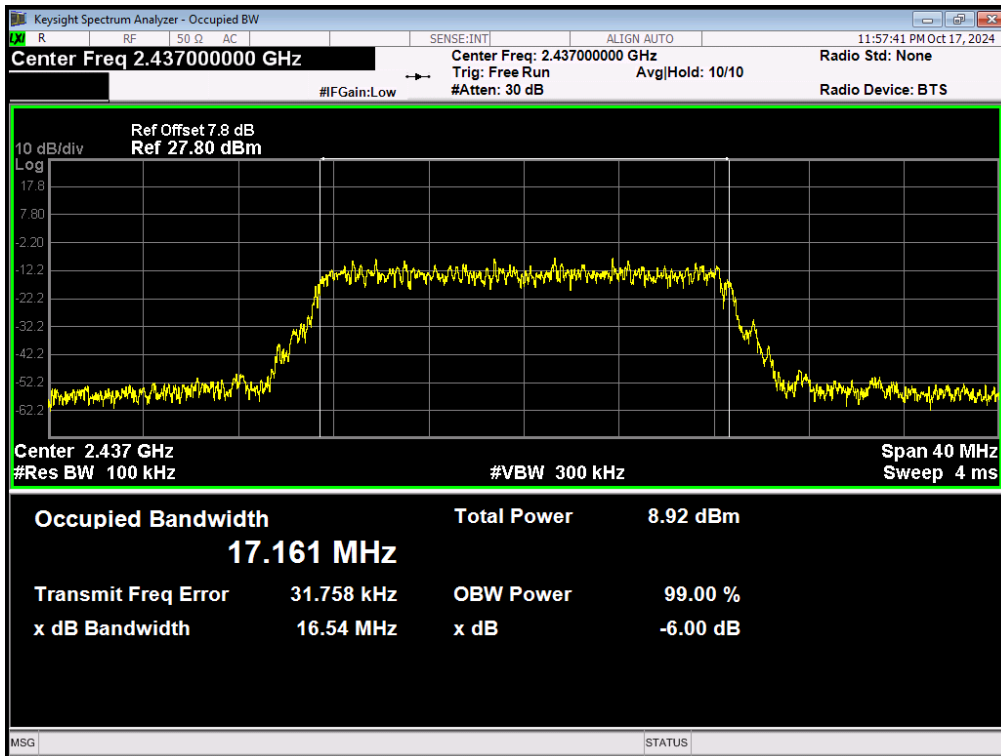

OBW NVNT 802.11g 6Mbps 2462MHz Ant1

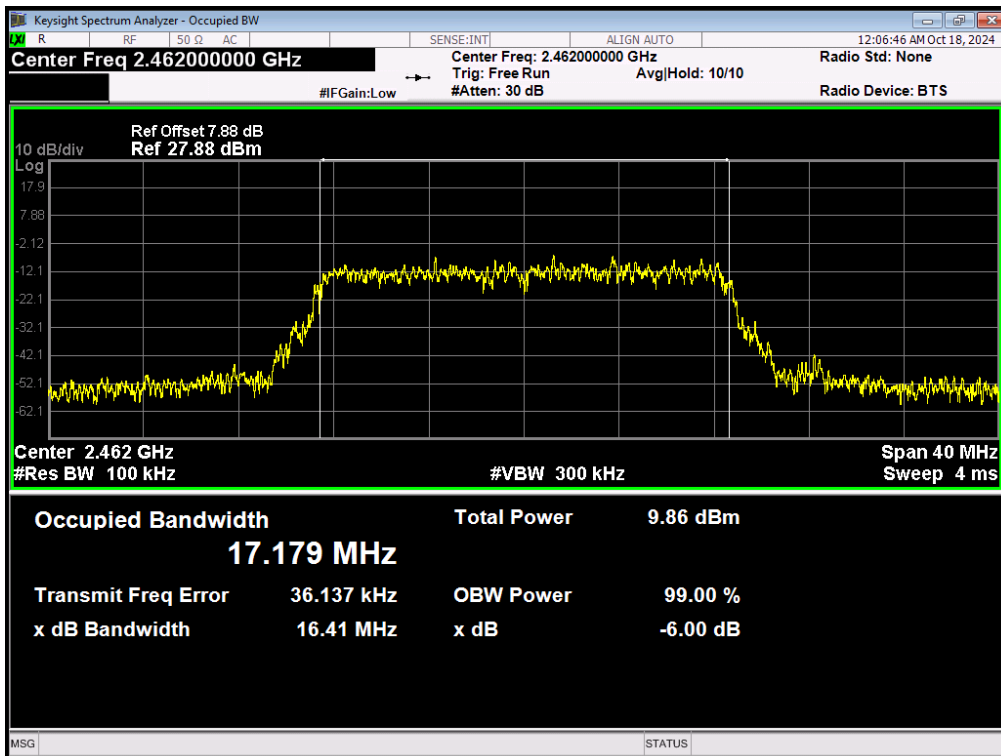


Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict




NVNT	802.11n(HT20)	2412	Ant 1	17.221	16.4512	0.5	Pass
NVNT	802.11n(HT20)	2437	Ant 1	17.1329	16.5286	0.5	Pass
NVNT	802.11n(HT20)	2462	Ant 1	17.1654	16.3157	0.5	Pass


OBW NVNT 802.11n(HT20) 2412MHz Ant1

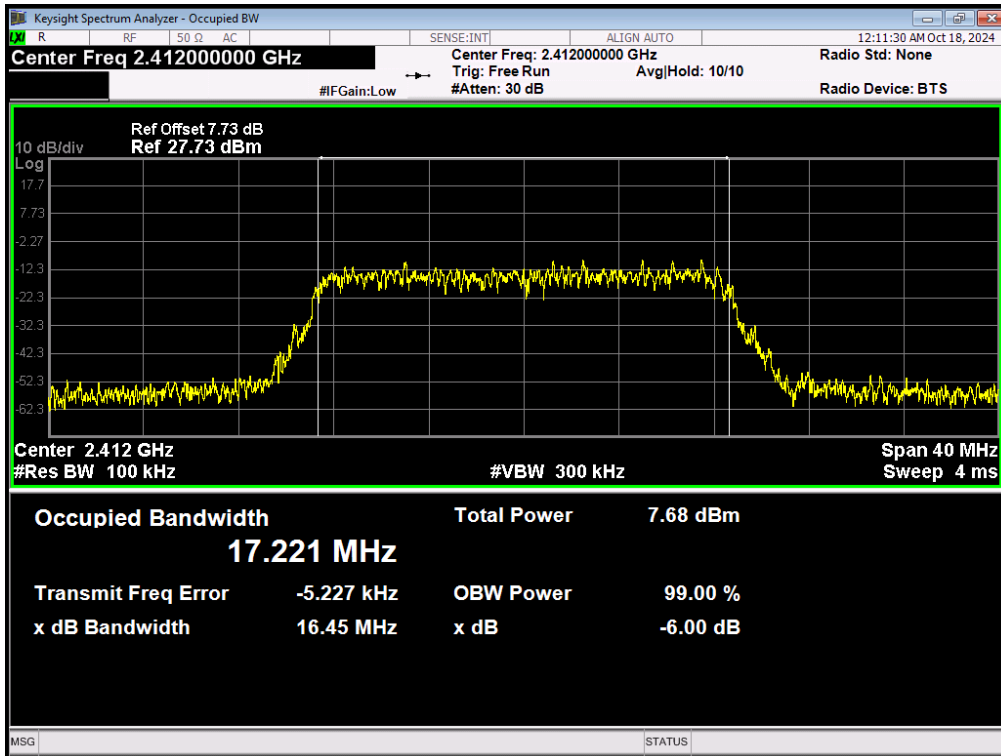

OBW NVNT 802.11n(HT20) 2437MHz Ant1

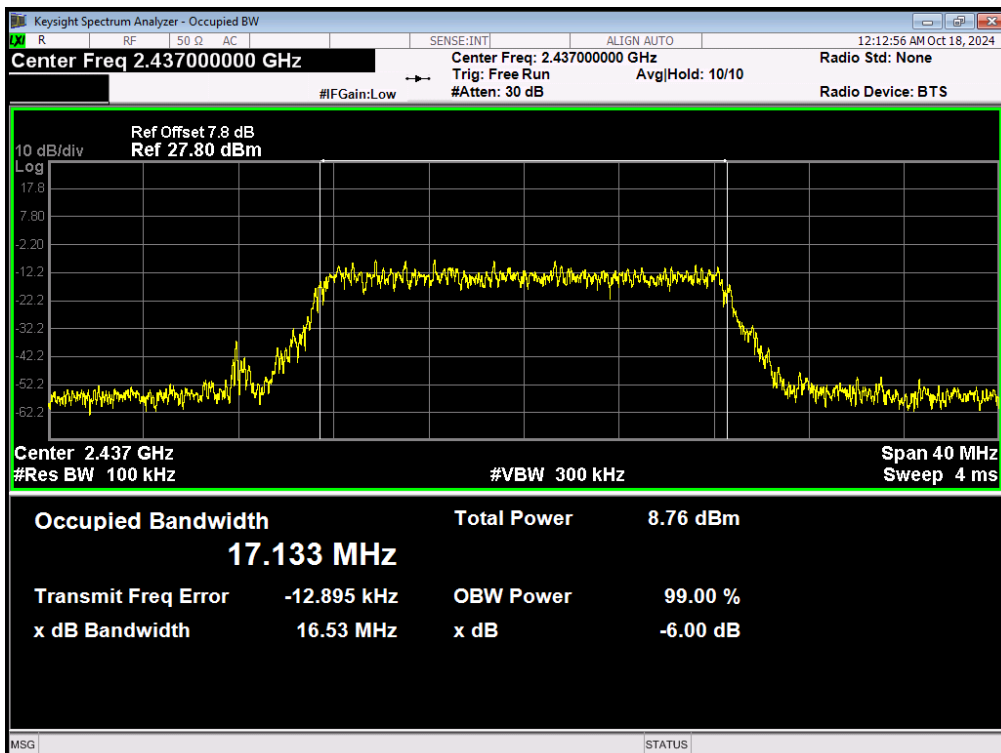

OBW NVNT 802.11n(HT20) 2462MHz Ant1

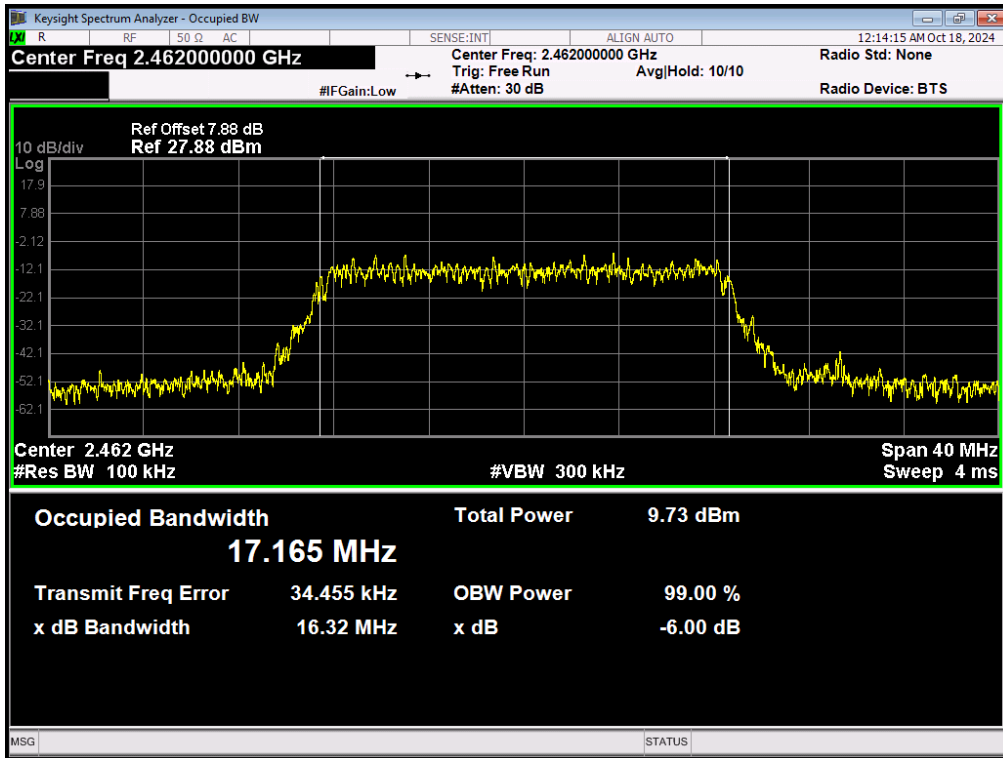


## 7. Band Edges Measurement

### 7.1. Test equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	MXA Signal Analyzer	KEYSIGHT	N9020A	MY54510476	2024/05/14	1 Year

### 7.2. BLOCK DIAGRAM OF TEST SETUP

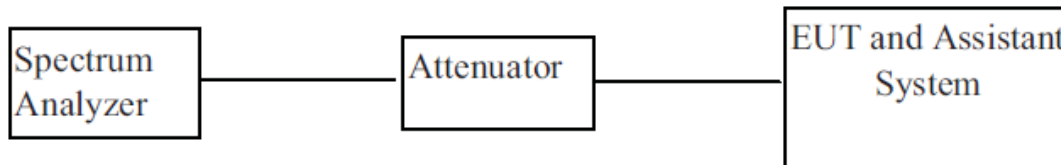

### 7.3. Limit

Below  $-30\text{dB}$  of the highest emission level of operating band (In 100 kHz Resolution Bandwidth)

### 7.4. Test Procedure

The transmitter output was connected to the spectrum analyzer via a low lose cable.

Set RBW of spectrum analyzer to 100 KHz and VBW of spectrum analyzer to 300 KHz with convenient frequency span including 100 KHz bandwidth from band edge.


Peak conducted output power measured within any 100 KHz outside the authorized frequency band shall be attenuated by at least 30dB relative to the maximum measured in-band peak PSD level.

The band edges was measured and recorded.


### 7.5. Test result

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	802.11b 1Mbps	2412	Ant 1	-48.904	-30	Pass
NVNT	802.11b 1Mbps	2462	Ant 1	-47.397	-30	Pass


Band Edge NVNT 802.11b 1Mbps 2412MHz Ant1 Ref

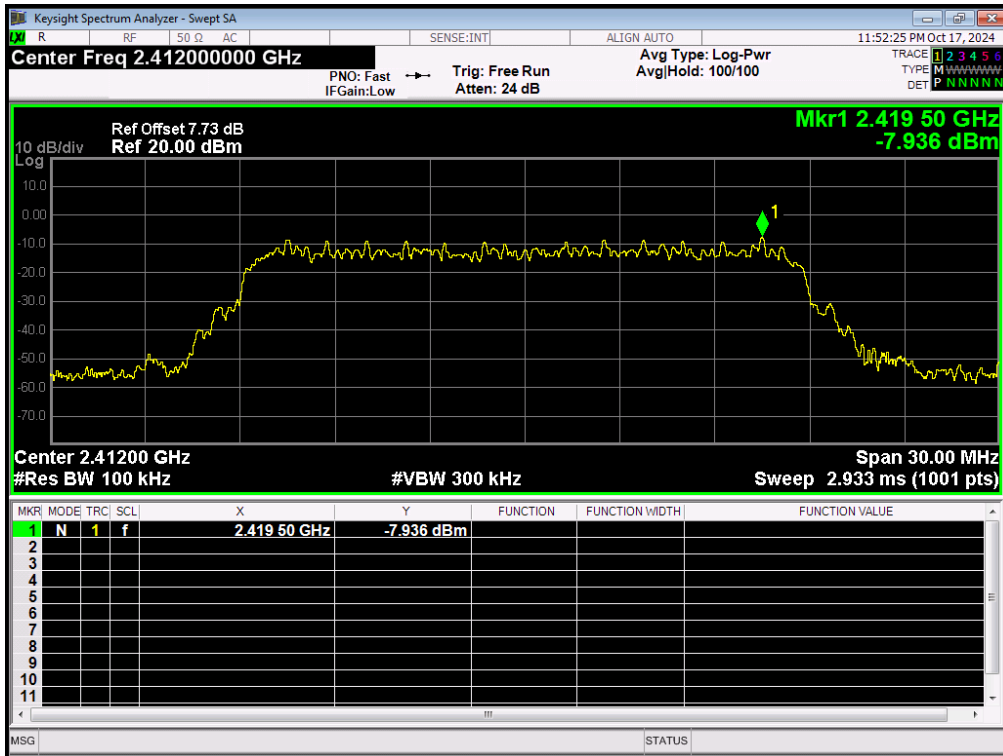


Band Edge NVNT 802.11b 1Mbps 2412MHz Ant1 Emission

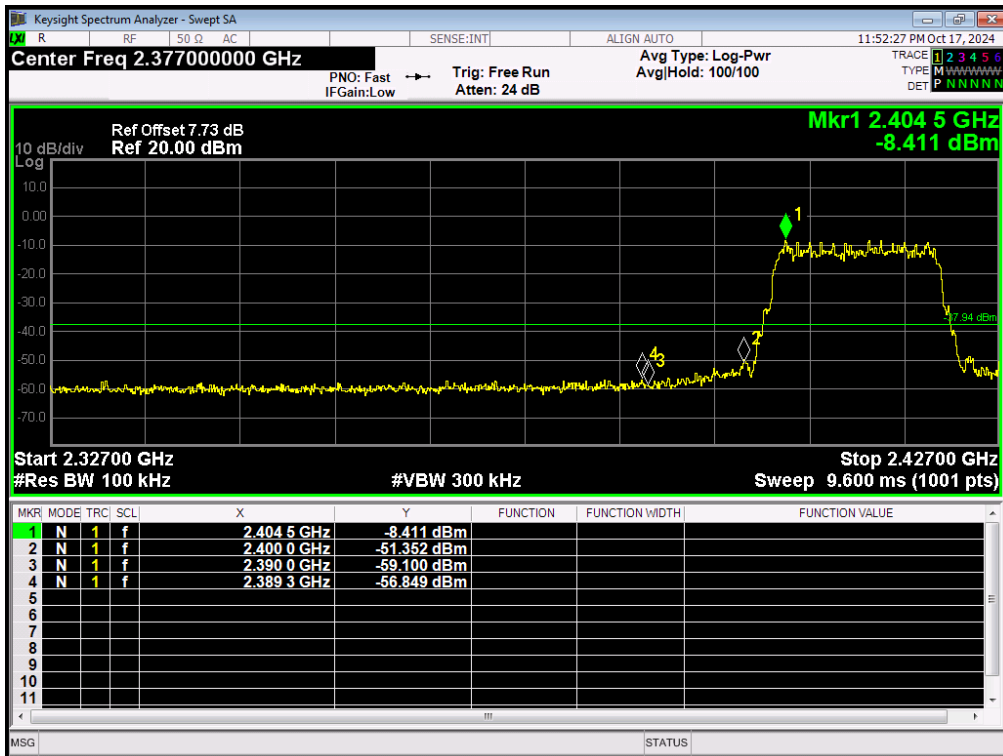

Band Edge NVNT 802.11b 1Mbps 2462MHz Ant1 Ref

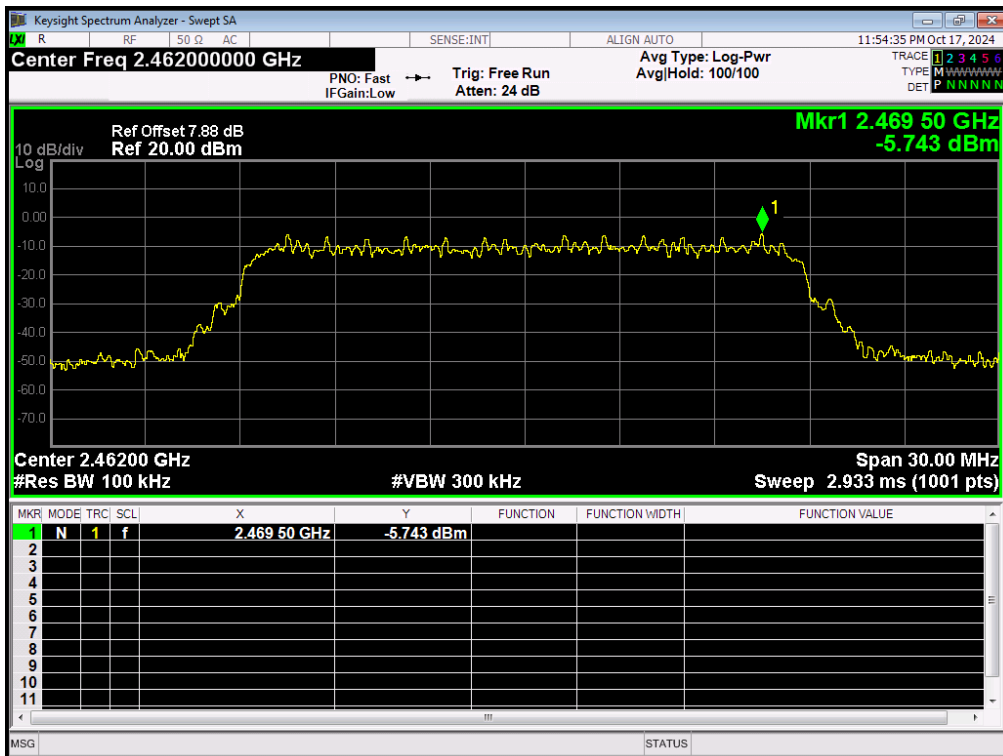


Band Edge NVNT 802.11b 1Mbps 2462MHz Ant1 Emission

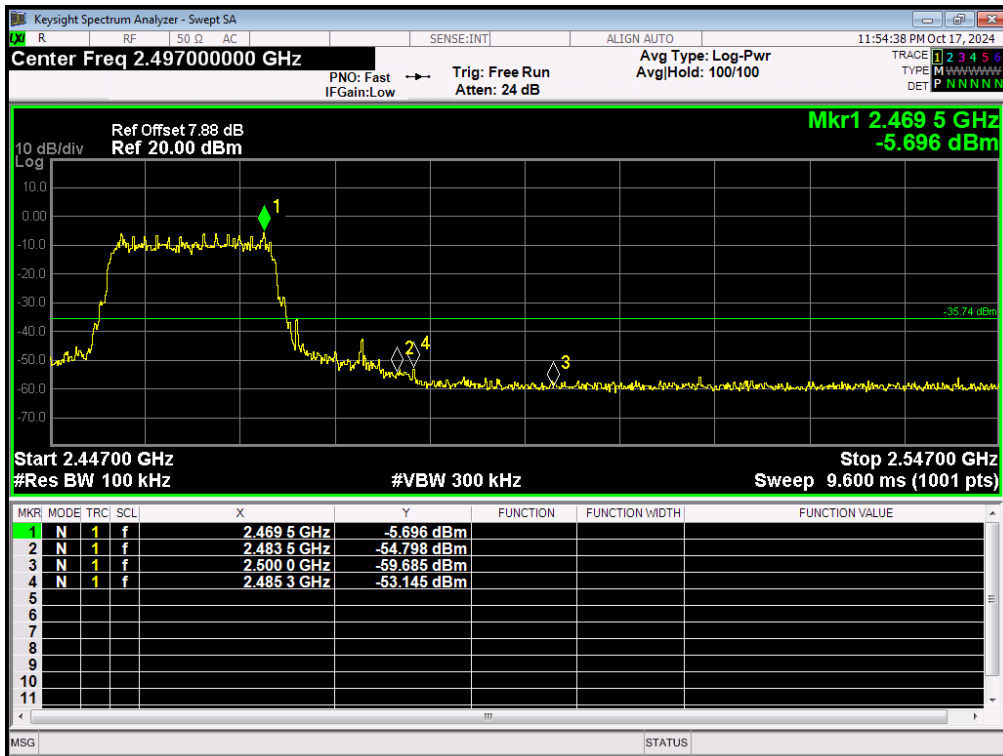


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	802.11g 6Mbps	2412	Ant 1	-47.212	-30	Pass
NVNT	802.11g 6Mbps	2462	Ant 1	-46.698	-30	Pass


Band Edge NVNT 802.11g 6Mbps 2412MHz Ant1 Ref

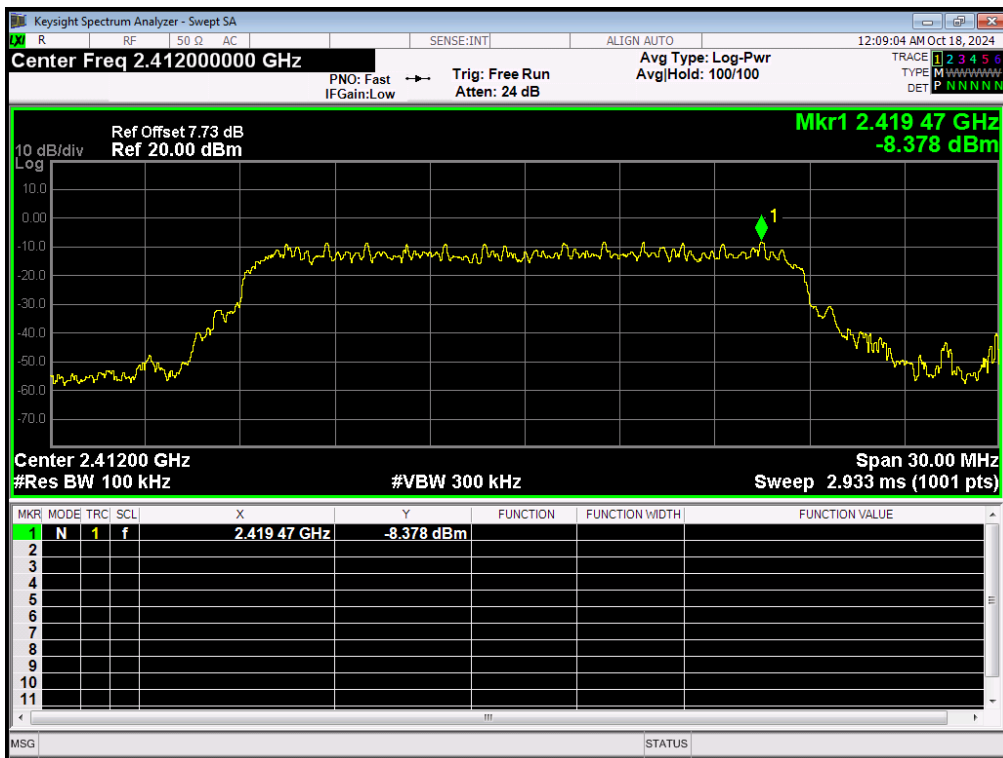


Band Edge NVNT 802.11g 6Mbps 2412MHz Ant1 Emission

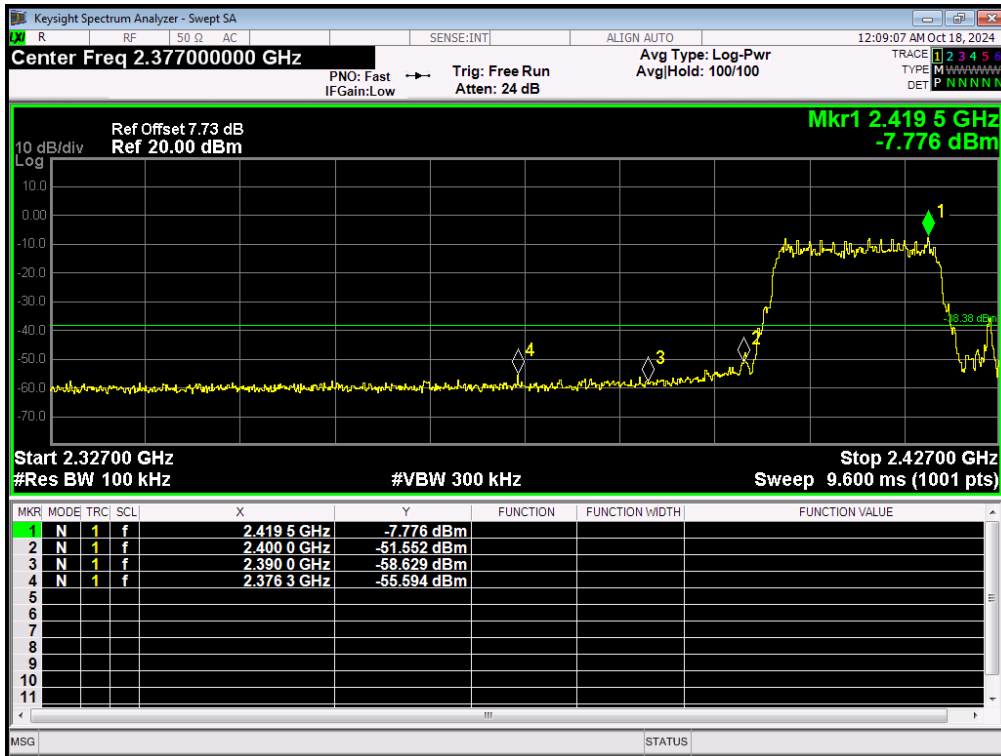

Band Edge NVNT 802.11g 6Mbps 2462MHz Ant1 Ref

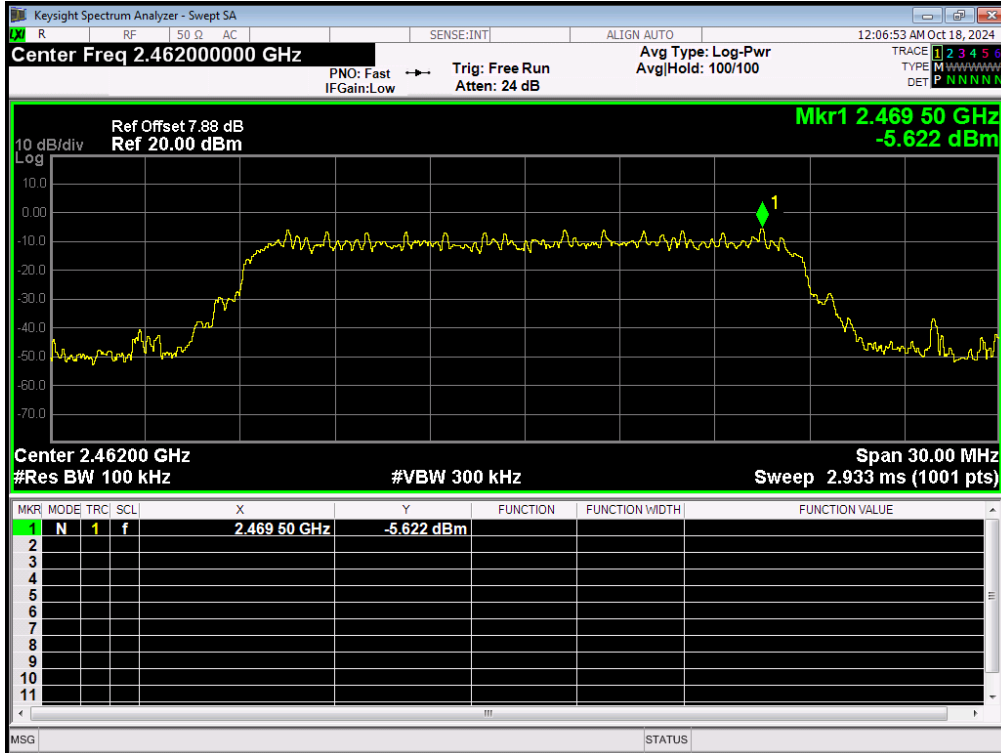


Band Edge NVNT 802.11g 6Mbps 2462MHz Ant1 Emission

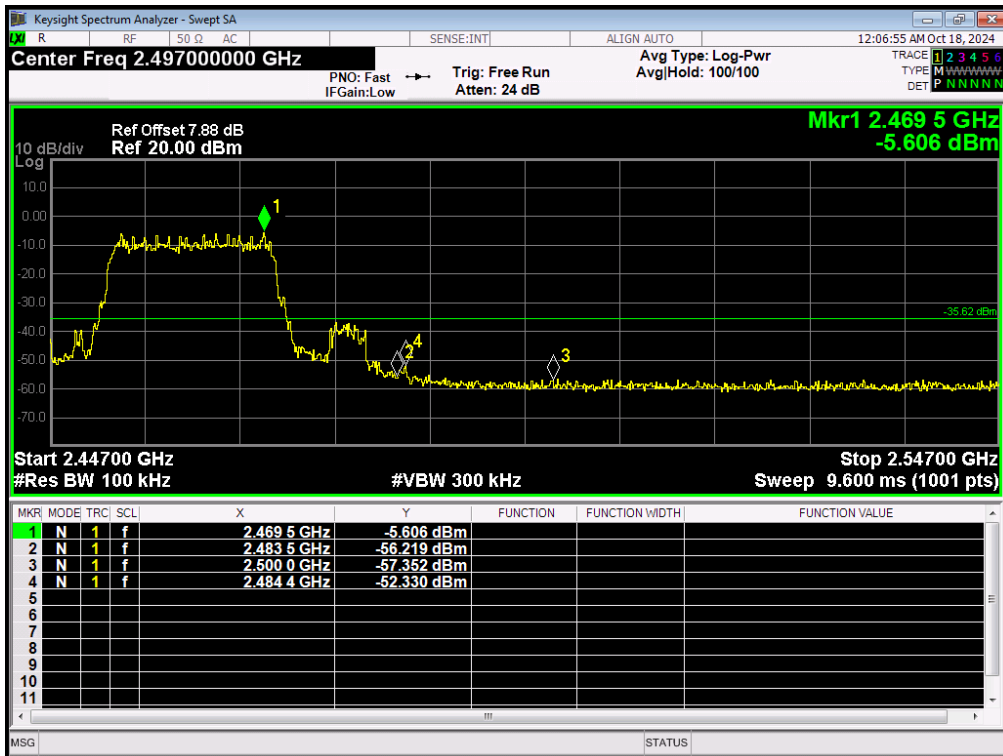


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	802.11n(HT20)	2412	Ant 1	-49.264	-30	Pass
NVNT	802.11n(HT20)	2462	Ant 1	-46.978	-30	Pass

Band Edge NVNT 802.11n(HT20) 2412MHz Ant1 Ref

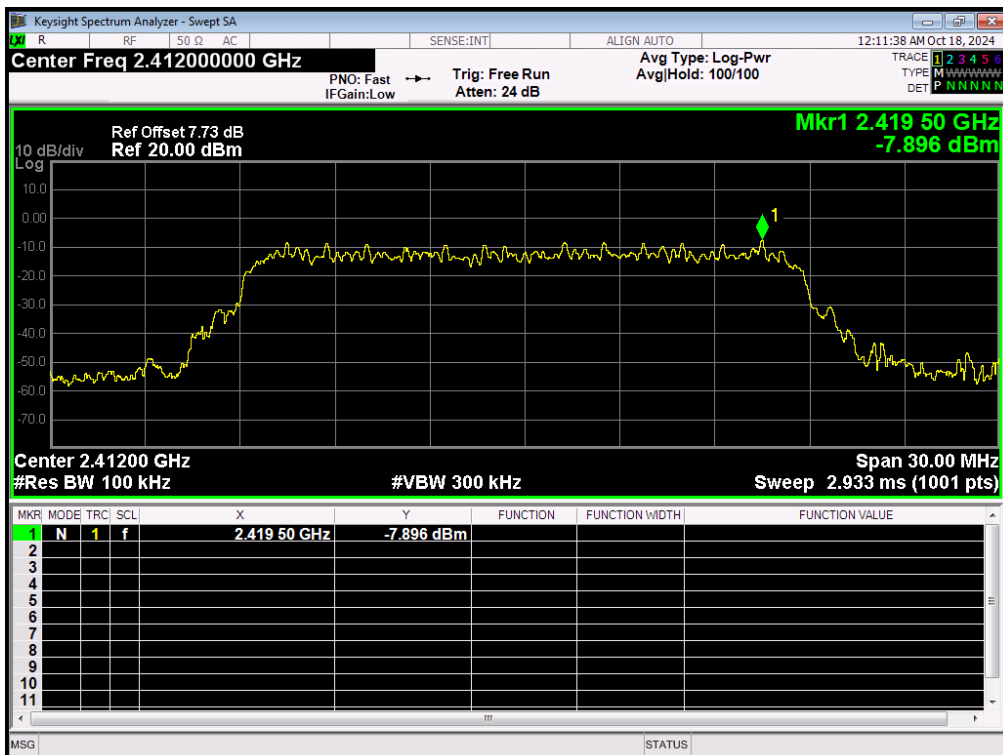





Band Edge NVNT 802.11n(HT20) 2412MHz Ant1 Emission

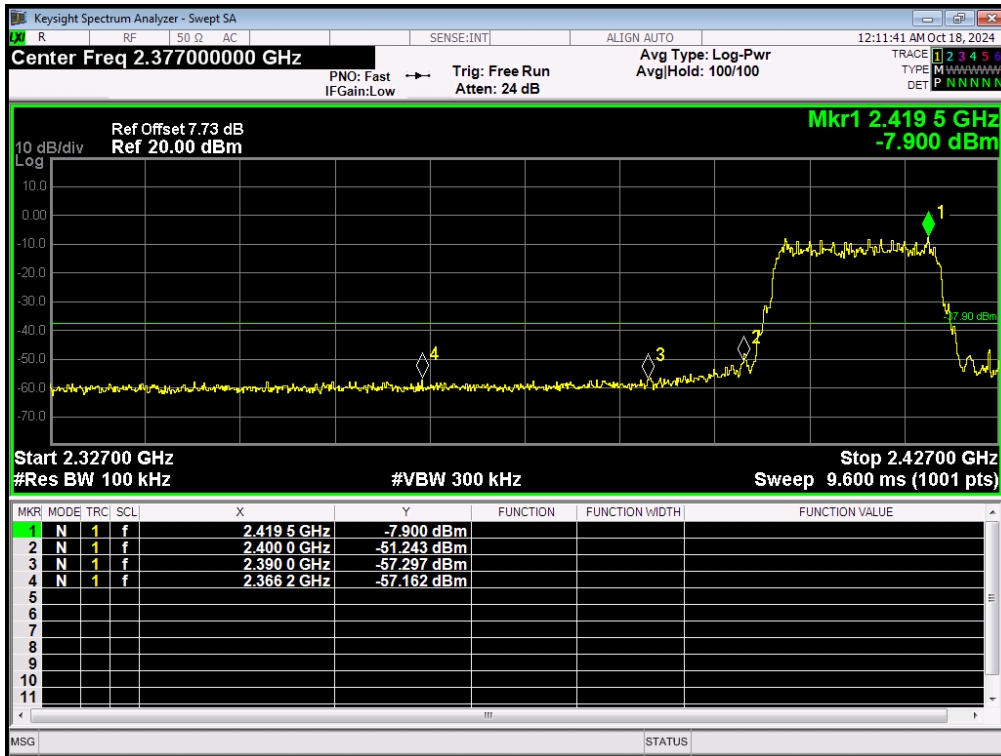

Band Edge NVNT 802.11n(HT20) 2462MHz Ant1 Ref

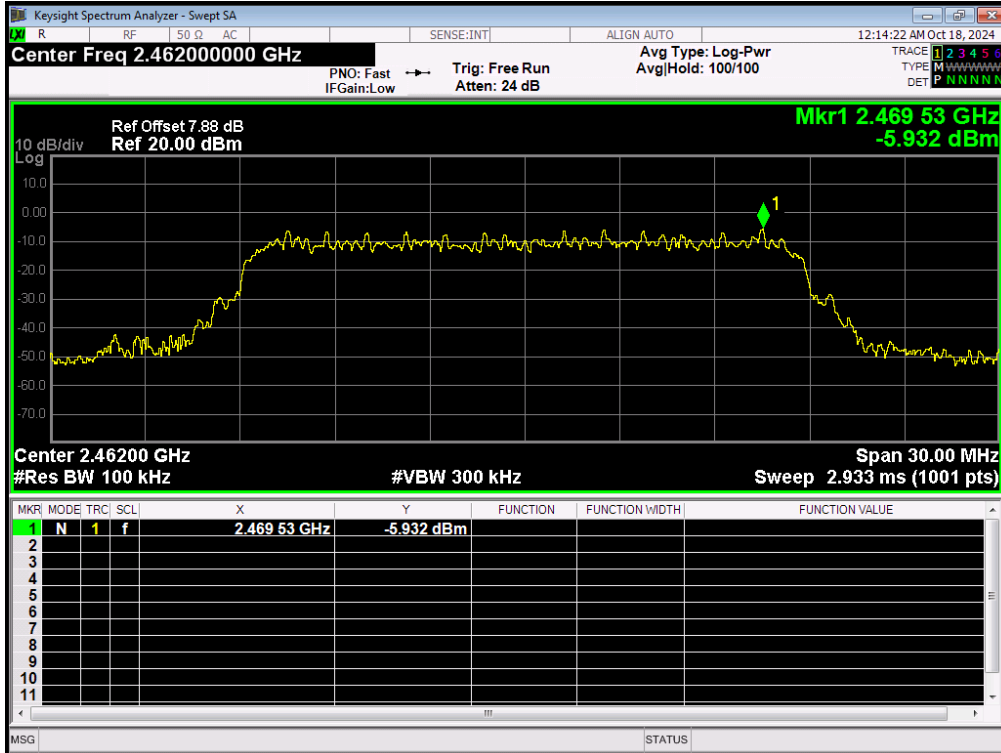

Band Edge NVNT 802.11n(HT20) 2462MHz Ant1 Emission

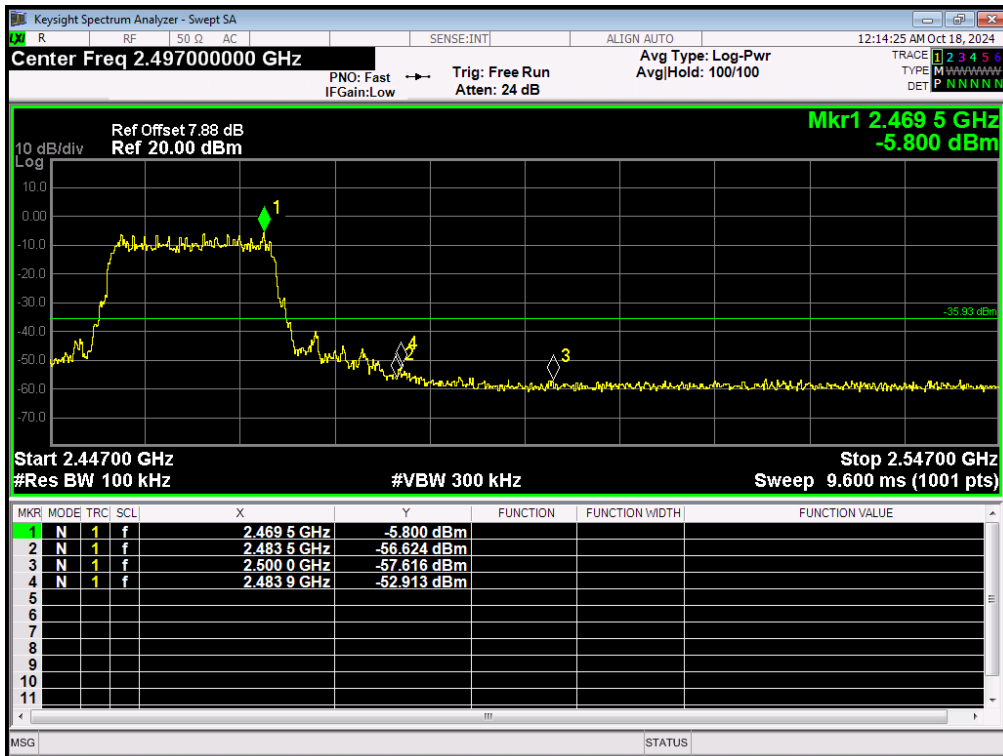


## 8. Conducted Spurious Emission

### 8.1. Test equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	MXA Signal Analyzer	KEYSIGHT	N9020A	MY54510476	2024/05/14	1 Year

### 8.2. BLOCK DIAGRAM OF TEST SETUP

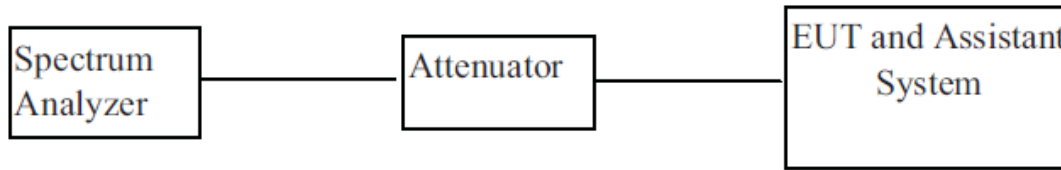

### 8.3. Limit

In any 100 KHz Bandwidth Outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produce by the intentional radiator shall be at least 20 dB below that in 100KHz bandwidth within the band that contains the highest level of the desired power.

In addition, radiation emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in§15.209(a)

### 8.4. Test Procedure


1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2, Set the EUT Work on the top, the middle and the bottom operation frequency individually.
3. Set SPA Trace 1 Max hold, then View.

Note: The EUT was tested according to KDB 558074 for compliance to FCC 47CFR 15.247 requirements. Owing to satisfy the requirements of the number of measurement points, we set the RBW=1MHz, VBW > RBW, scan up through 10th harmonic, and consider the tested results as the worst case, if the tested results conform to the requirement, we can deem that the real tested results(set the RBW=100KHz, VBW > RBW) are conform to the requirement.


### 8.5. Test result

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	802.11b 1Mbps	2412	Ant 1	-29.861	-20	Pass
NVNT	802.11b 1Mbps	2437	Ant 1	-30.583	-20	Pass
NVNT	802.11b 1Mbps	2462	Ant 1	-31.801	-20	Pass


Tx. Spurious NVNT 802.11b 1Mbps 2412MHz Ant1 Ref

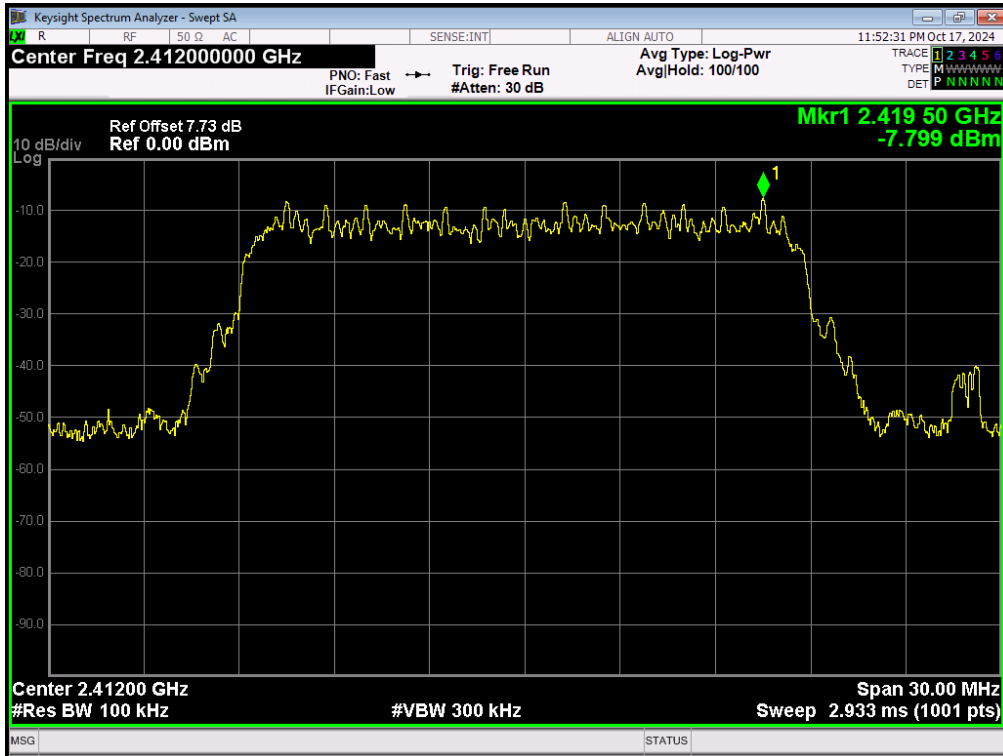


Tx. Spurious NVNT 802.11b 1Mbps 2412MHz Ant1 Emission

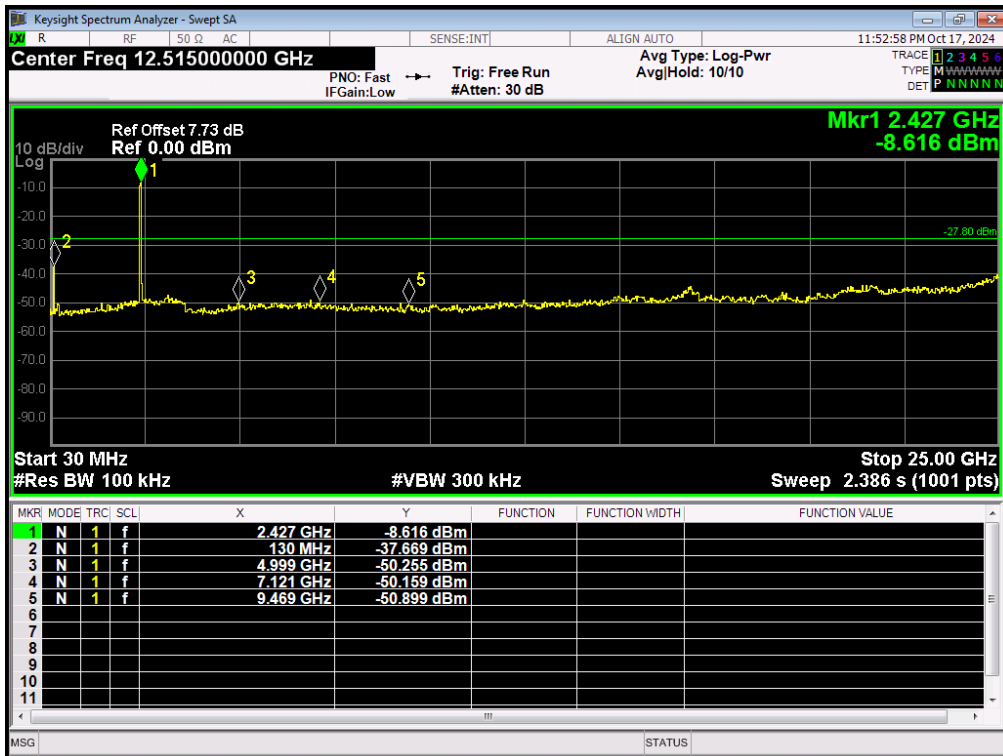


Tx. Spurious NVNT 802.11b 1Mbps 2437MHz Ant1 Ref

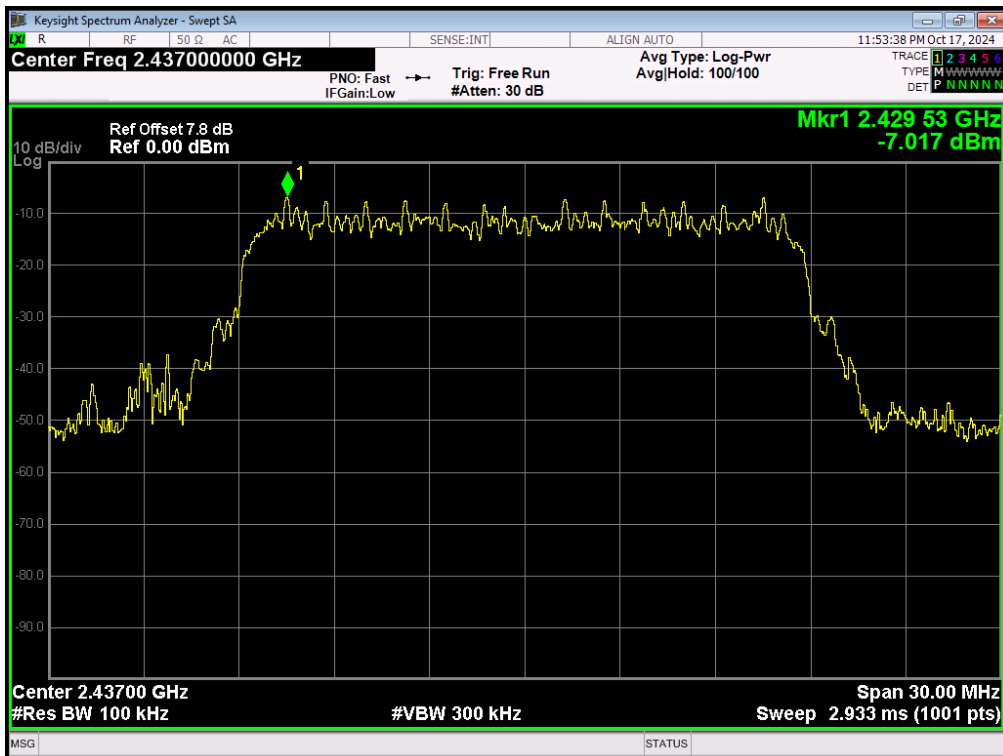


Tx. Spurious NVNT 802.11b 1Mbps 2437MHz Ant1 Emission

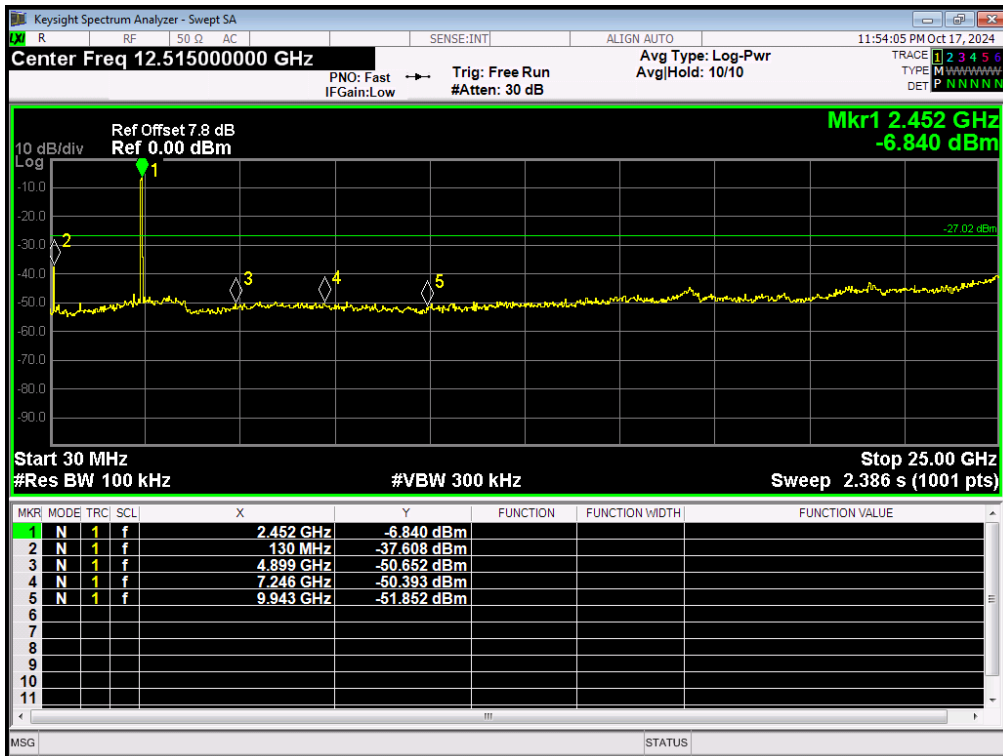

Tx. Spurious NVNT 802.11b 1Mbps 2462MHz Ant1 Ref

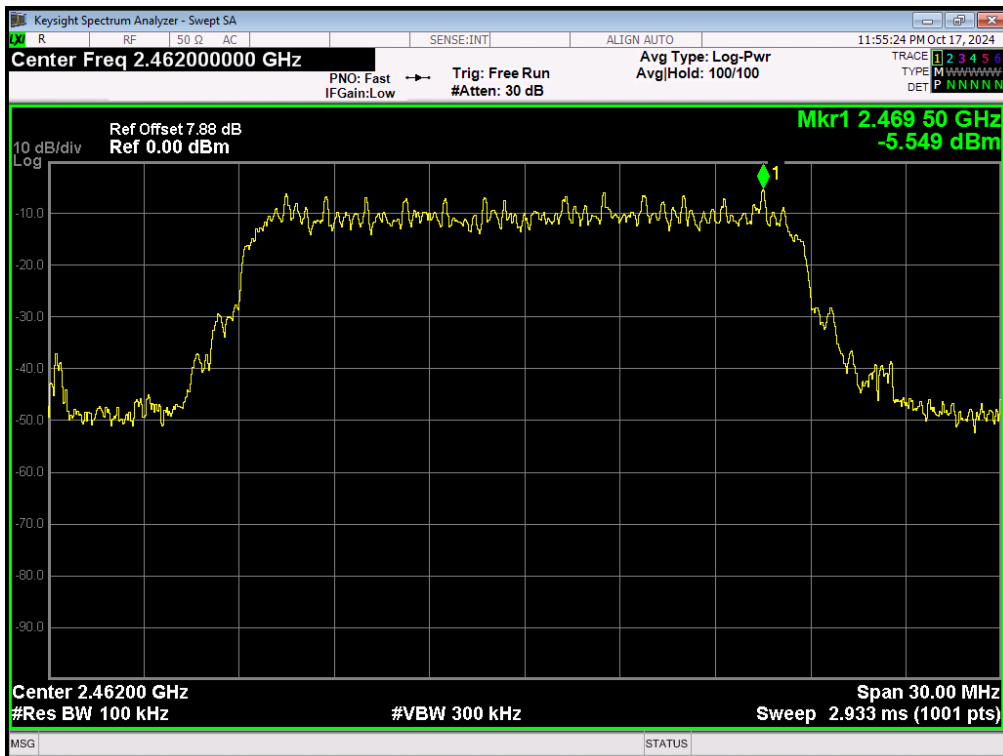


Tx. Spurious NVNT 802.11b 1Mbps 2462MHz Ant1 Emission

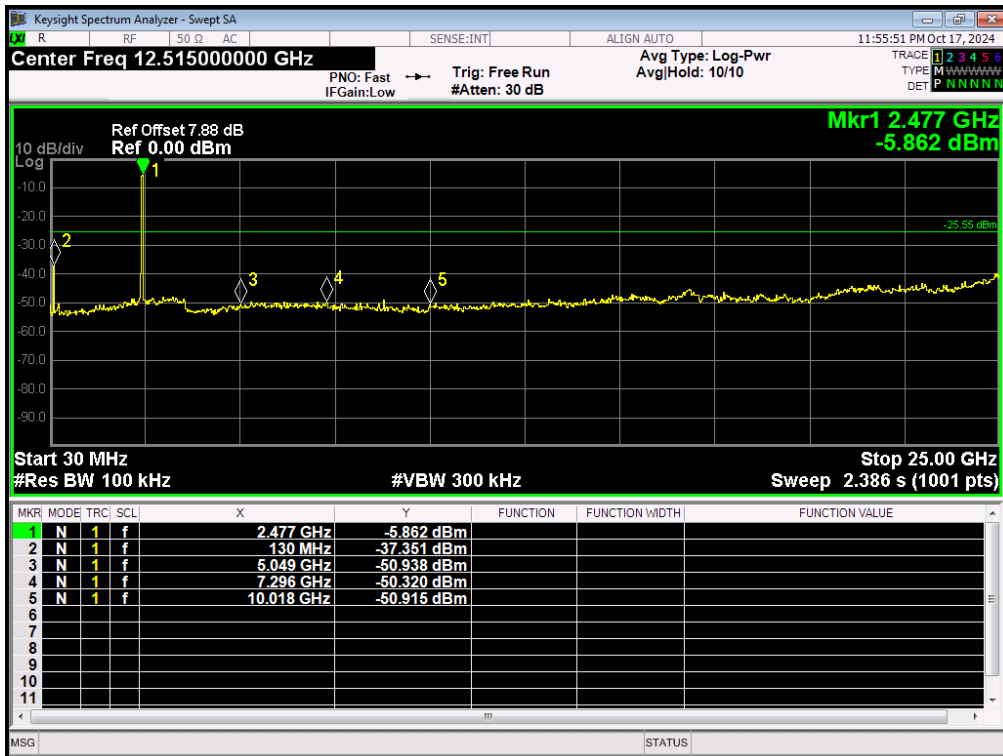


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	802.11g 6Mbps	2412	Ant 1	-29.962	-20	Pass
NVNT	802.11g 6Mbps	2437	Ant 1	-30.431	-20	Pass
NVNT	802.11g 6Mbps	2462	Ant 1	-31.386	-20	Pass


Tx. Spurious NVNT 802.11g 6Mbps 2412MHz Ant1 Ref

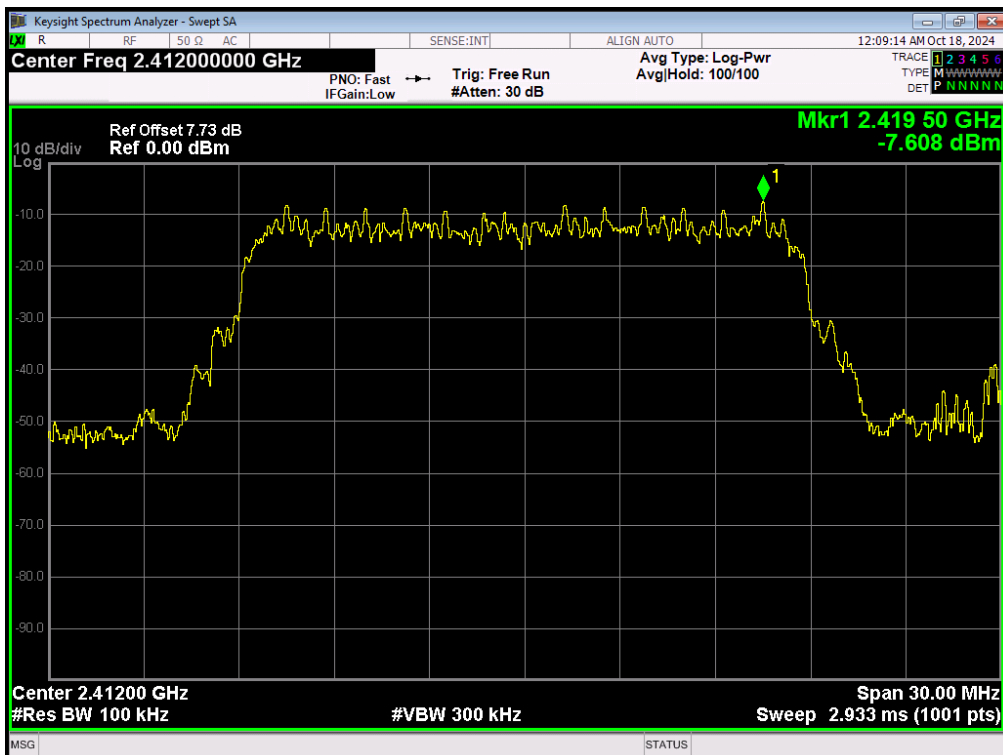

Tx. Spurious NVNT 802.11g 6Mbps 2412MHz Ant1 Emission

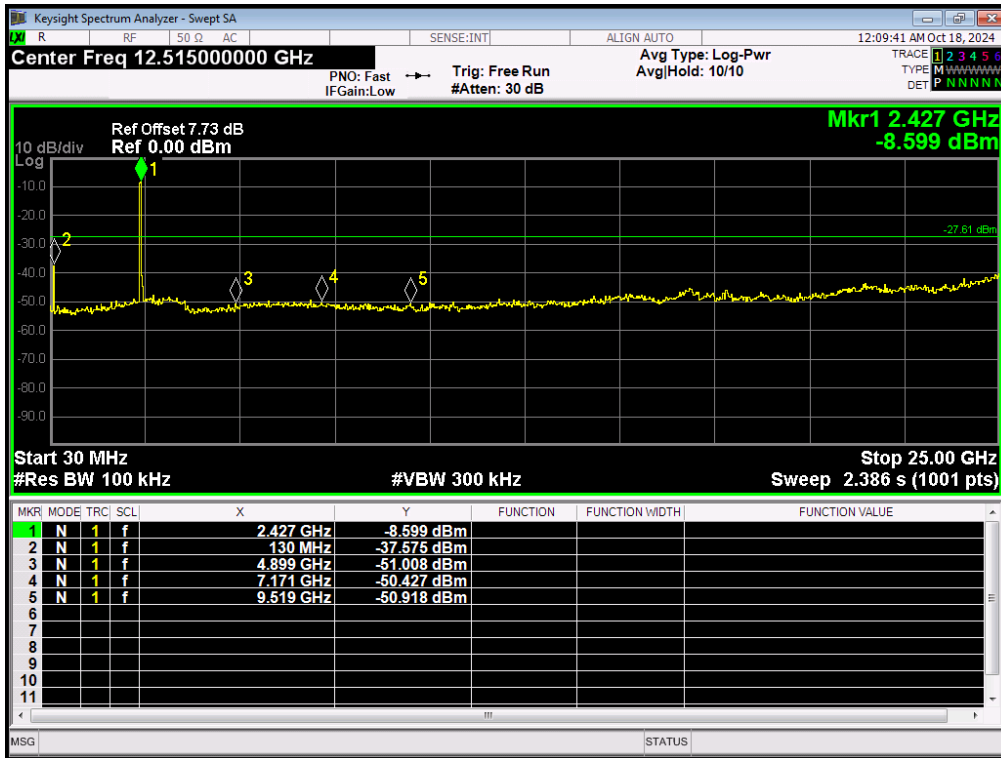


Tx. Spurious NVNT 802.11g 6Mbps 2437MHz Ant1 Ref

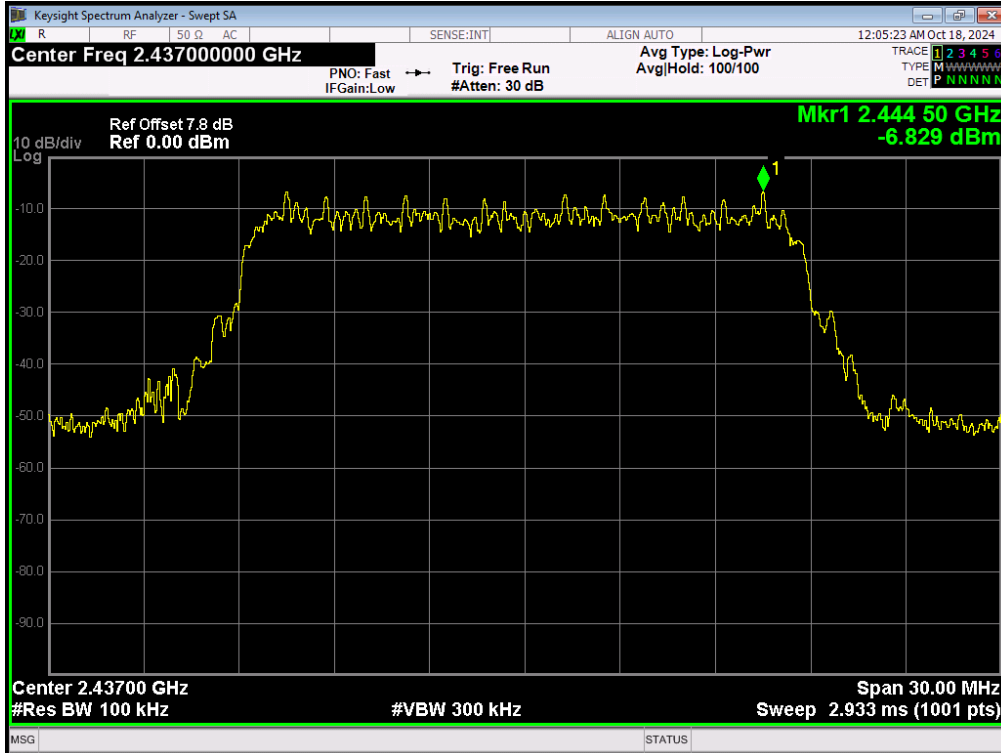


Tx. Spurious NVNT 802.11g 6Mbps 2437MHz Ant1 Emission




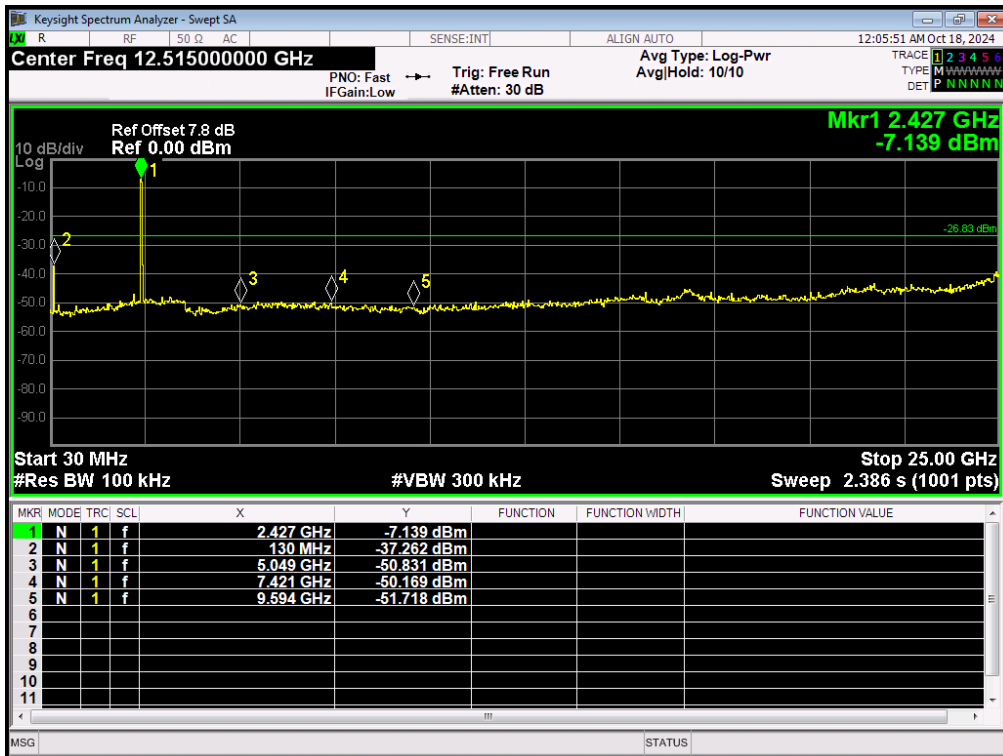

Tx. Spurious NVNT 802.11g 6Mbps 2462MHz Ant1 Ref

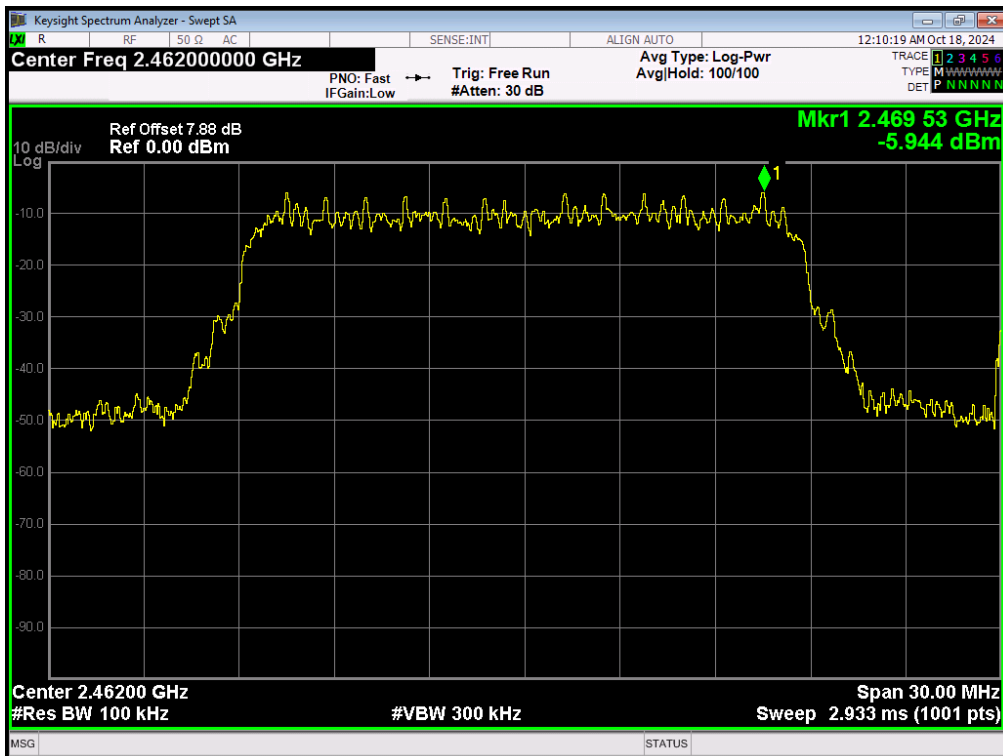


Tx. Spurious NVNT 802.11g 6Mbps 2462MHz Ant1 Emission

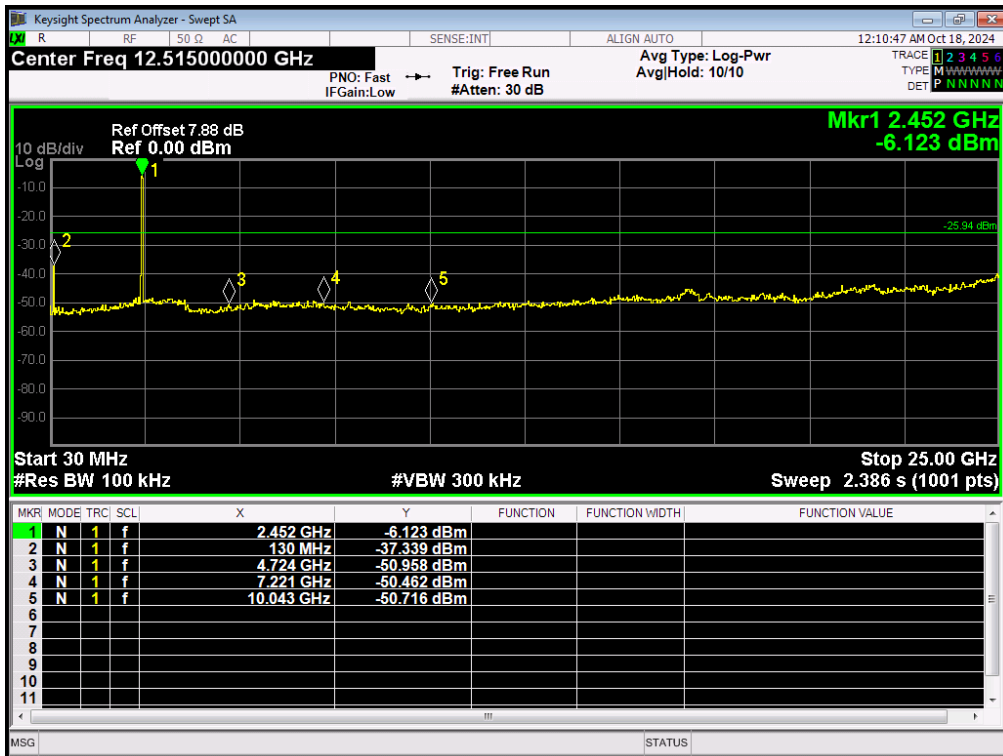


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	802.11n(HT20)	2412	Ant 1	-29.886	-20	Pass
NVNT	802.11n(HT20)	2437	Ant 1	-20.655	-20	Pass
NVNT	802.11n(HT20)	2462	Ant 1	-32.208	-20	Pass


Tx. Spurious NVNT 802.11n(HT20) 2412MHz Ant1 Ref

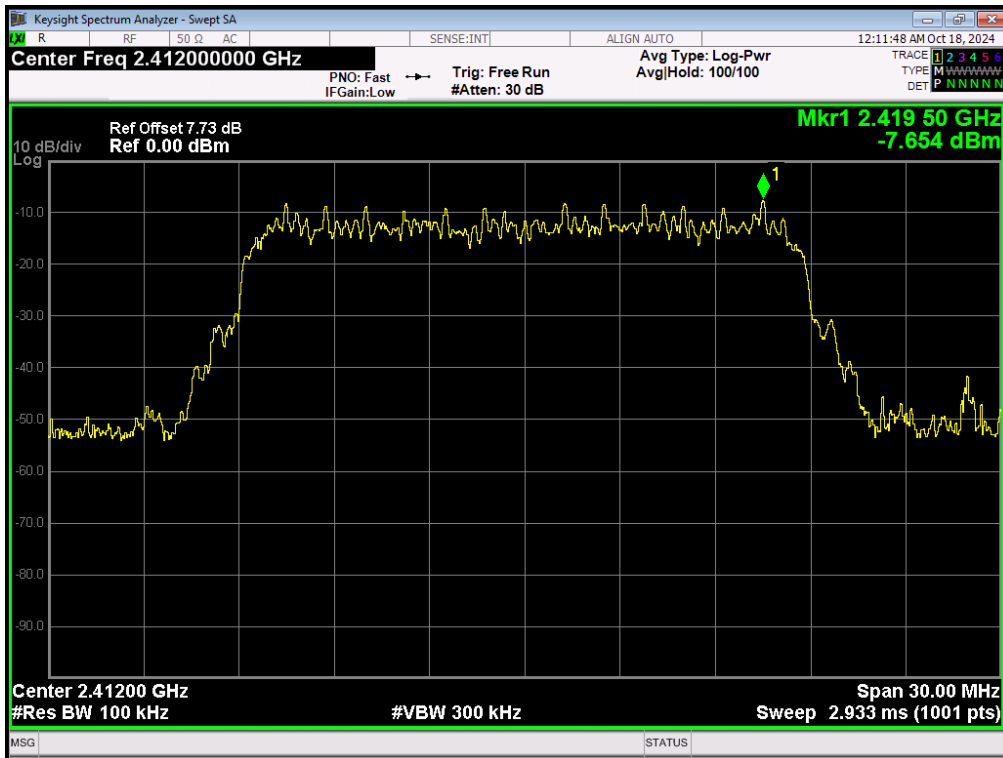


Tx. Spurious NVNT 802.11n(HT20) 2412MHz Ant1 Emission

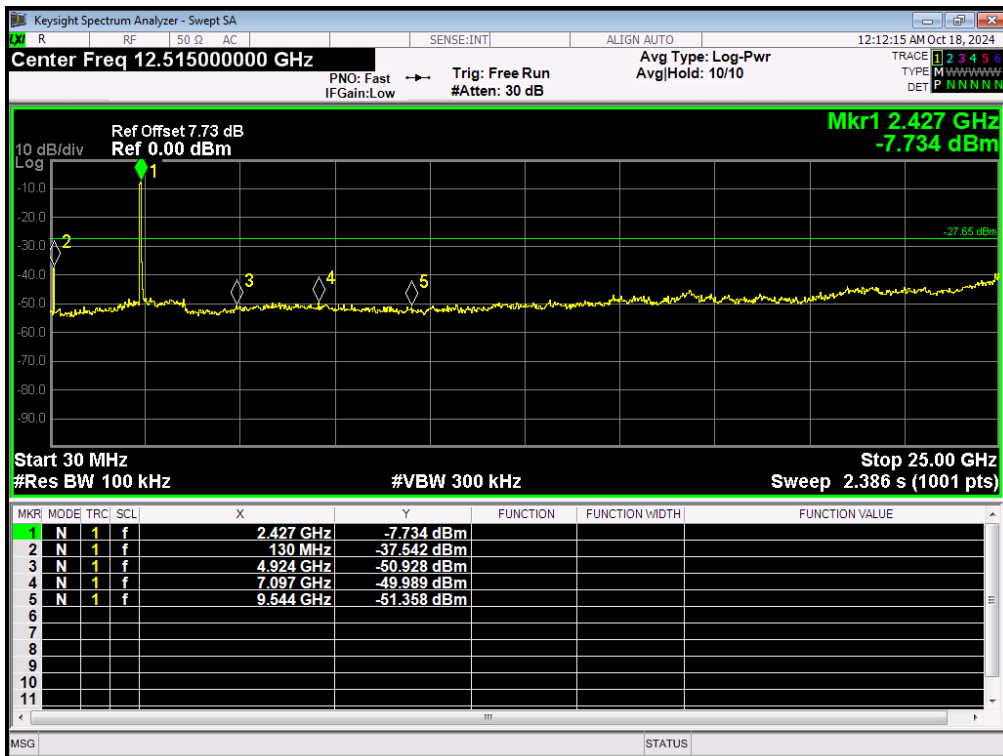


Tx. Spurious NVNT 802.11n(HT20) 2437MHz Ant1 Ref

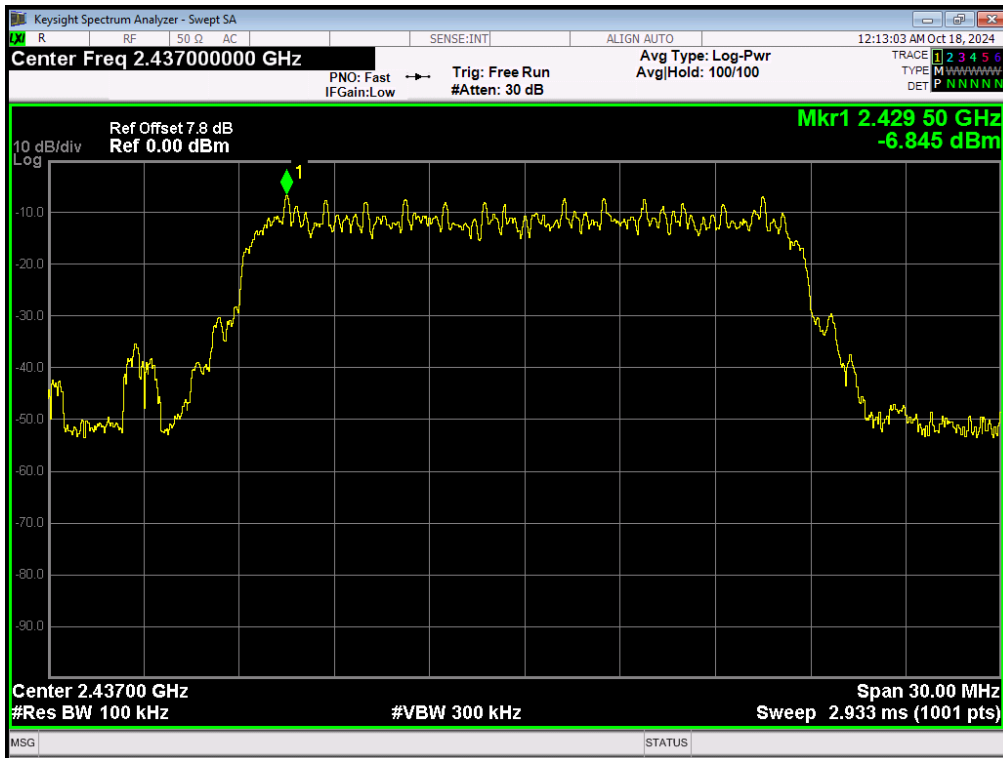


Tx. Spurious NVNT 802.11n(HT20) 2437MHz Ant1 Emission

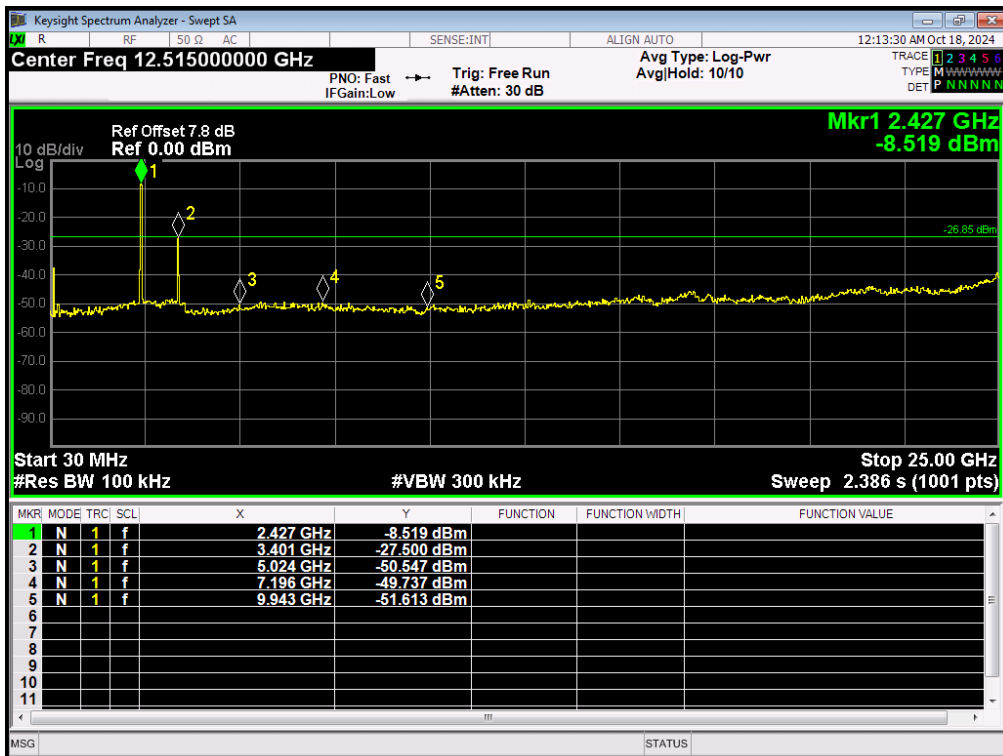

Tx. Spurious NVNT 802.11n(HT20) 2462MHz Ant1 Ref

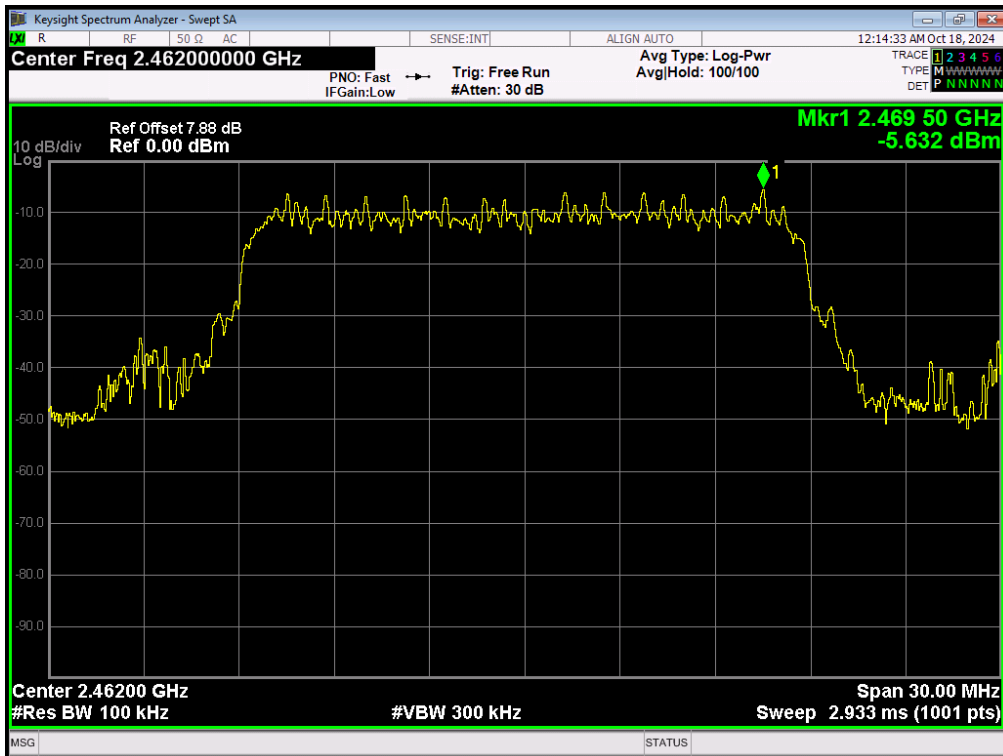

Tx. Spurious NVNT 802.11n(HT20) 2462MHz Ant1 Emission

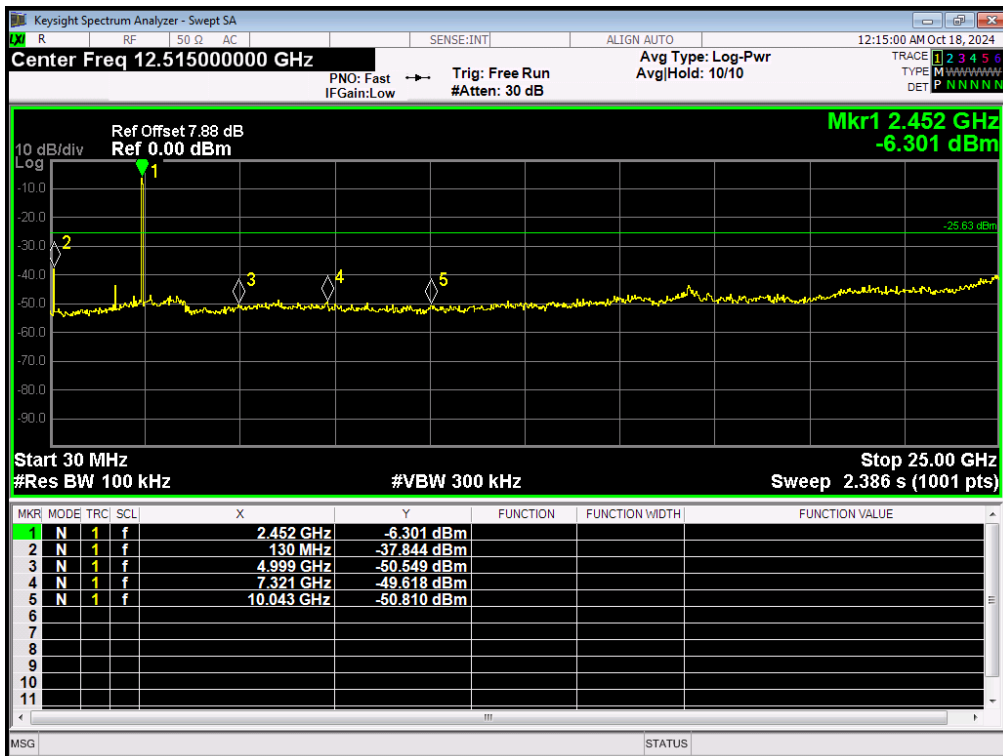


## 9. Conducted Output Power Spectral Density

### 9.1. Test equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	MXA Signal Analyzer	KEYSIGHT	N9020A	MY54510476	2024/05/14	1 Year

### 9.2. Block diagram of test setup

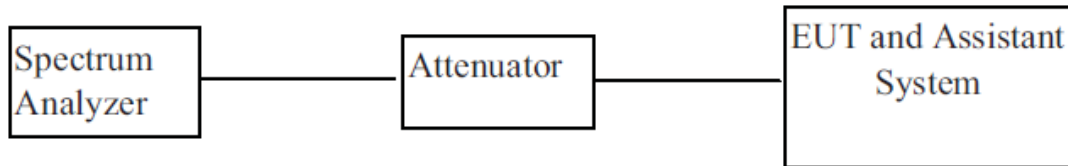

### 9.3. Limit

For digitally modulated systems, the power spectral density conducted from the intentional Radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.


### 9.4. Test Procedure

- (1) Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- (2) Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- (3) Set SPA Trace 1 Max hold, then View.


**9.5. Test result**

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
NVNT	802.11b 1Mbps	2412	Ant 1	-36.547	8	Pass
NVNT	802.11b 1Mbps	2437	Ant 1	-37.396	8	Pass
NVNT	802.11b 1Mbps	2462	Ant 1	-37.589	8	Pass


PSD NVNT 802.11b 1Mbps 2412MHz Ant1

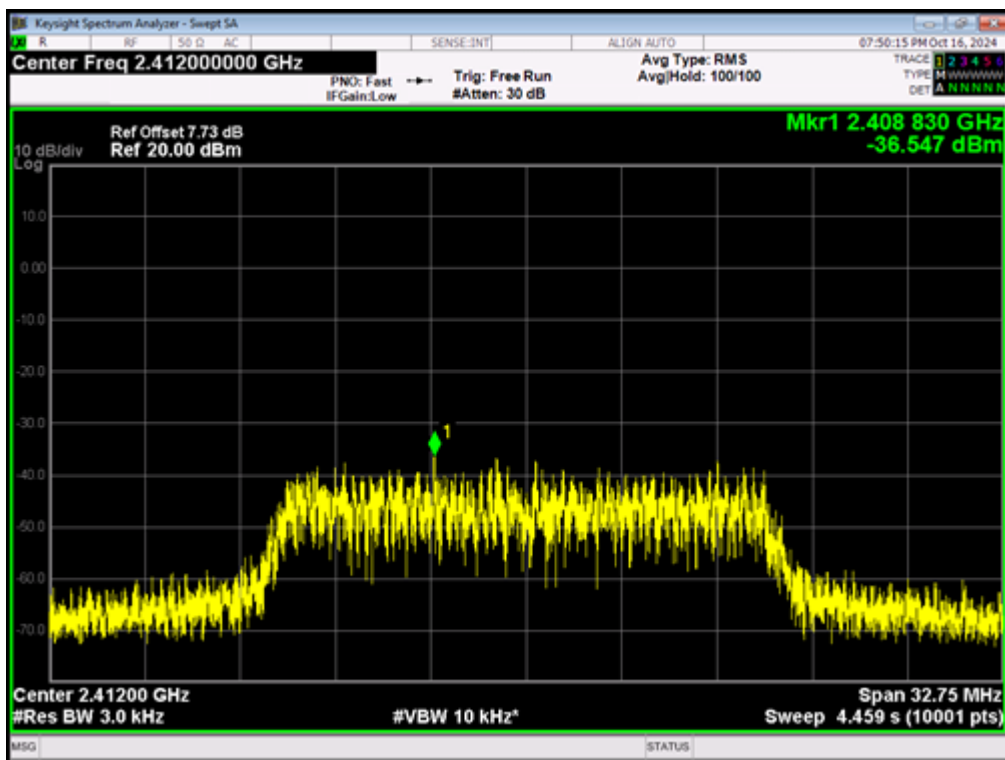

PSD NVNT 802.11b 1Mbps 2437MHz Ant1

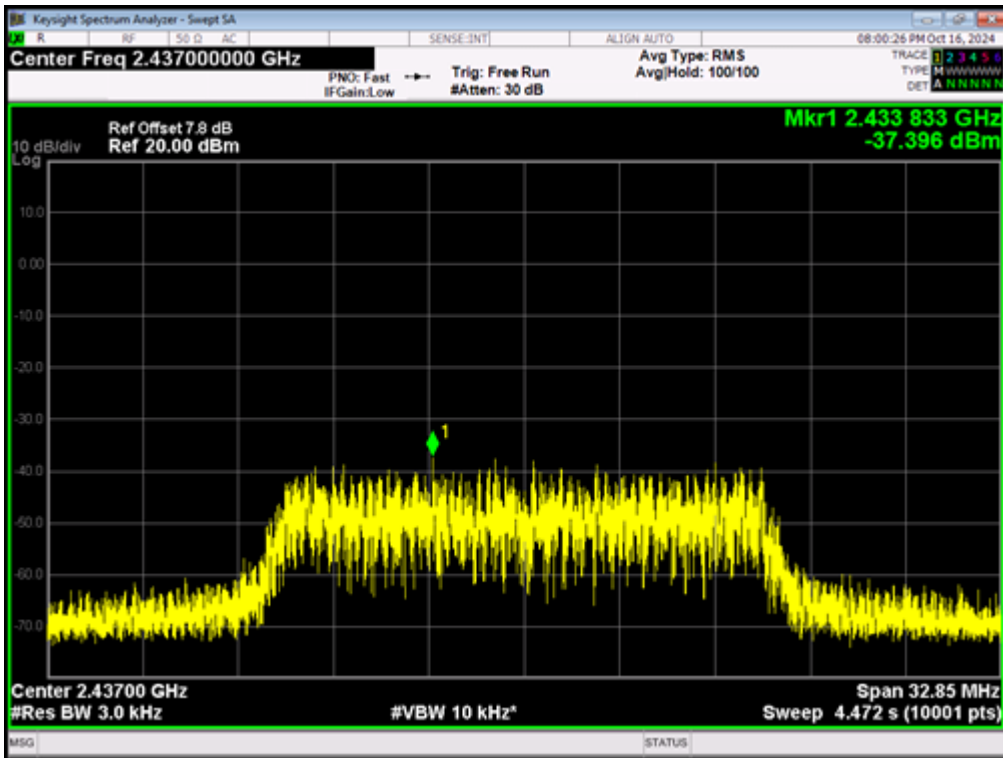

PSD NVNT 802.11b 1Mbps 2462MHz Ant1

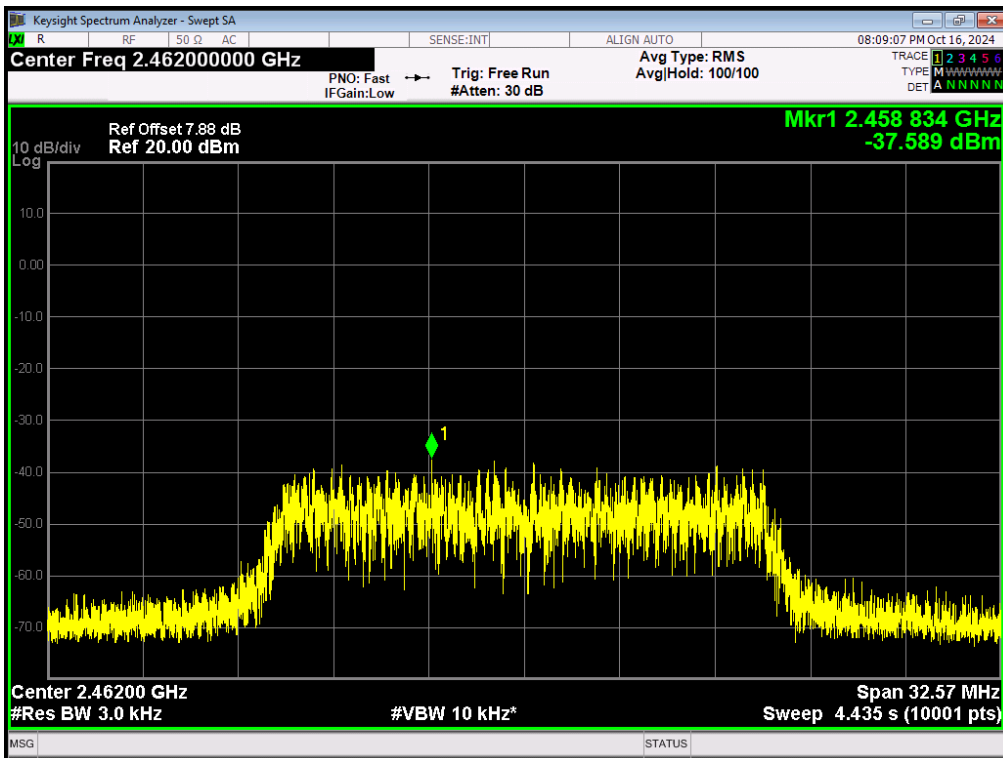


Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
NVNT	802.11g 6Mbps	2412	Ant 1	-36.599	8	Pass




NVNT	802.11g 6Mbps	2437	Ant 1	-37.34	8	Pass
NVNT	802.11g 6Mbps	2462	Ant 1	-37.888	8	Pass


PSD NVNT 802.11g 6Mbps 2412MHz Ant1

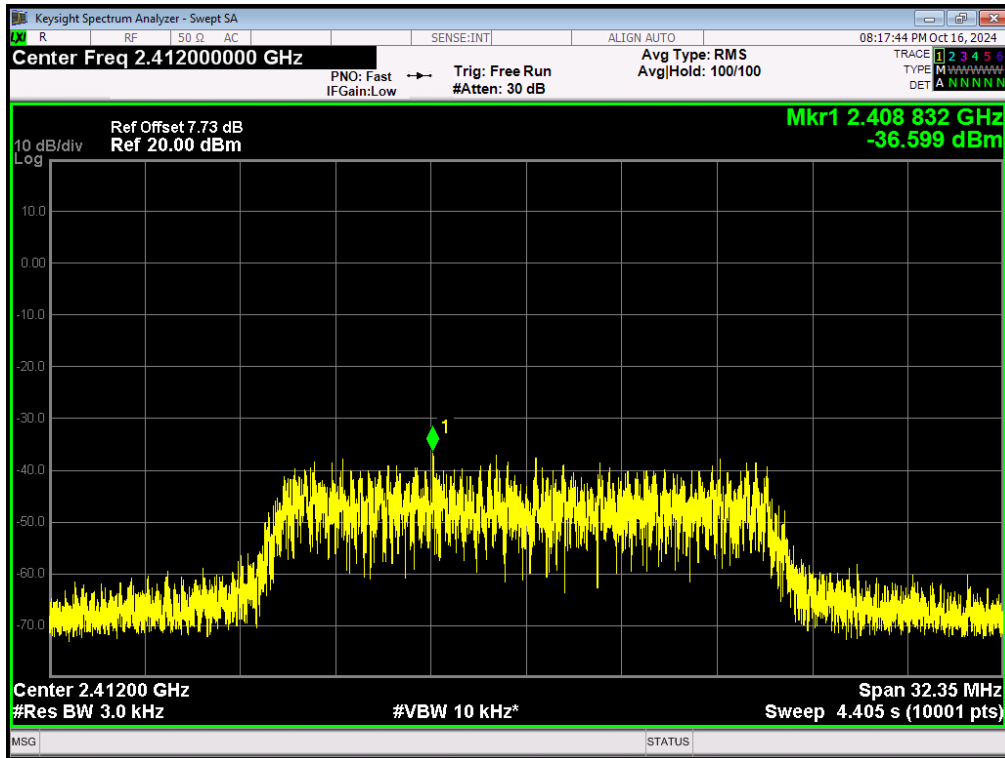

PSD NVNT 802.11g 6Mbps 2437MHz Ant1

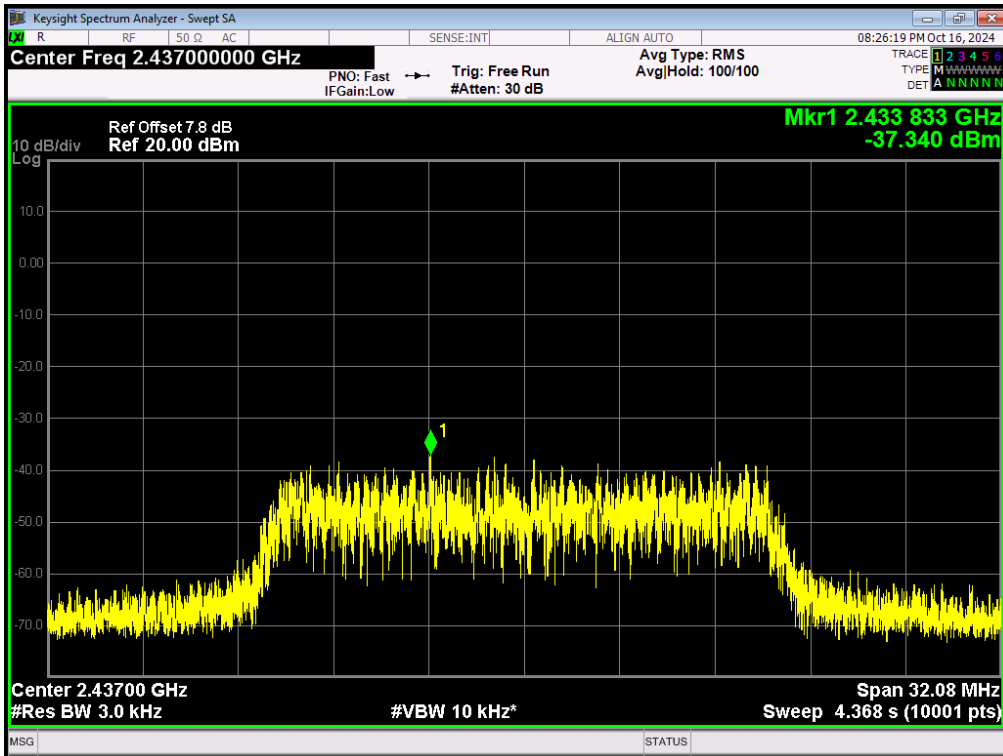


PSD NVNT 802.11g 6Mbps 2462MHz Ant1

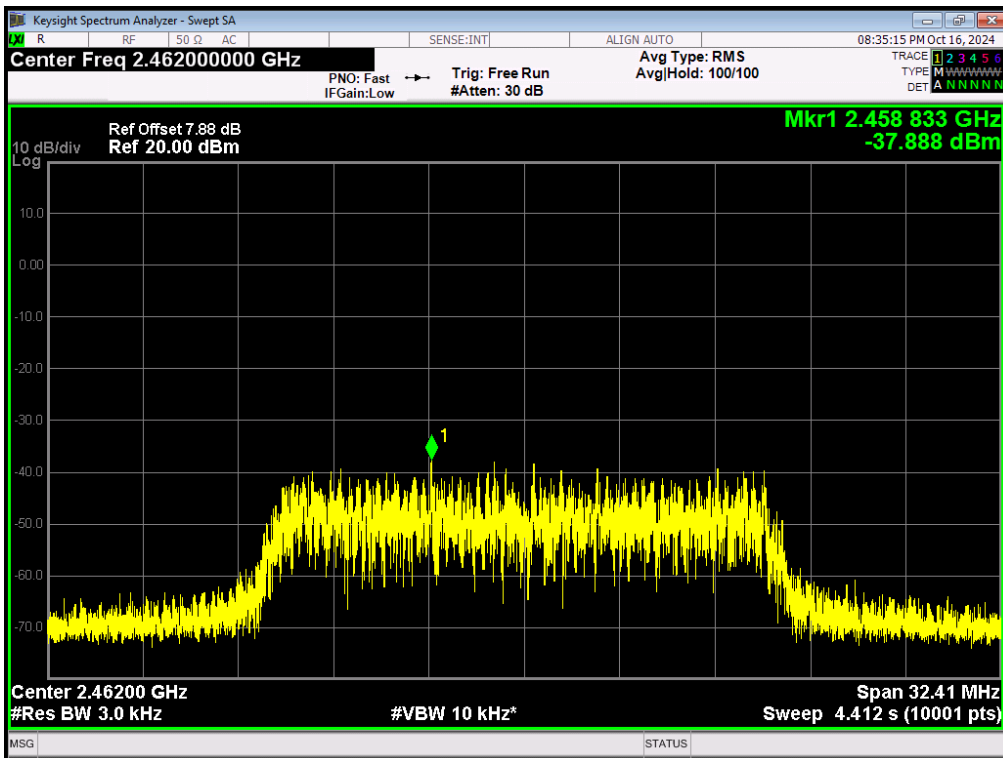


Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
NVNT	802.11n(HT20)	2412	Ant 1	-36.895	8	Pass
NVNT	802.11n(HT20)	2437	Ant 1	-37.428	8	Pass

NVNT	802.11n(HT20)	2462	Ant 1	-37.567	8	Pass
------	---------------	------	-------	---------	---	------


PSD NVNT 802.11n(HT20) 2412MHz Ant1

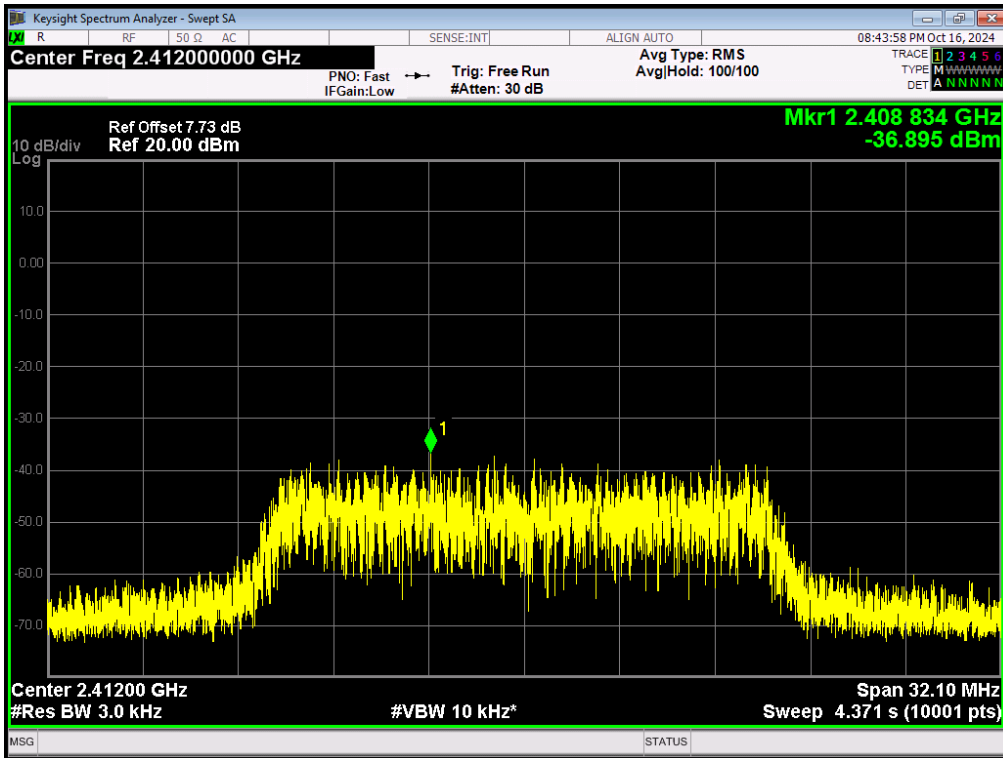

PSD NVNT 802.11n(HT20) 2437MHz Ant1

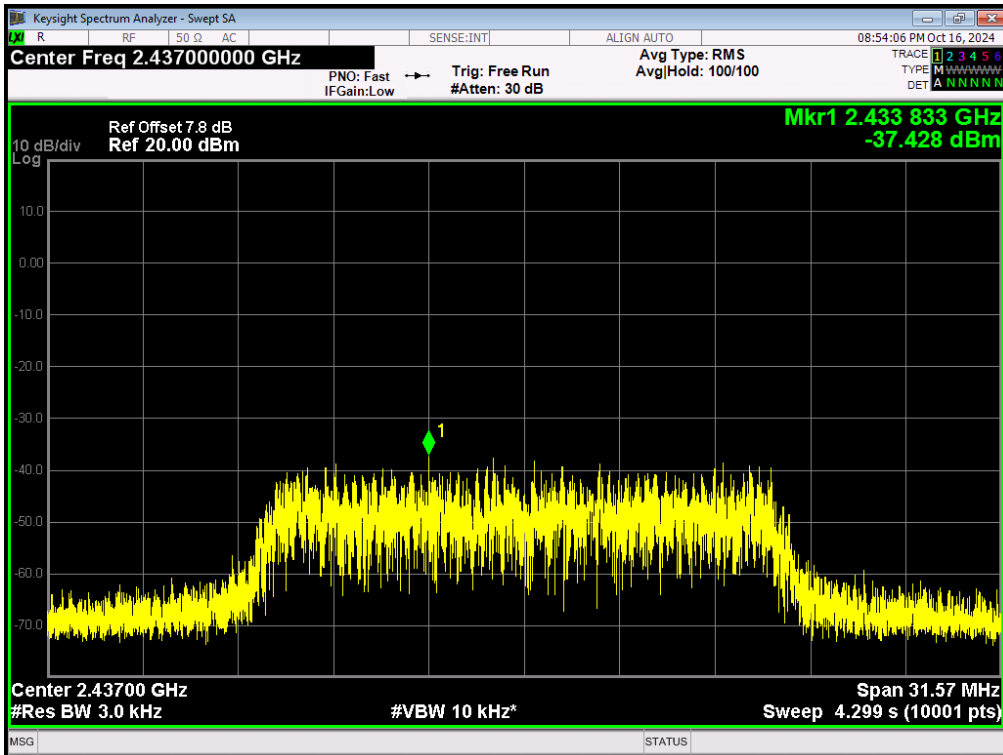

PSD NVNT 802.11n(HT20) 2462MHz Ant1

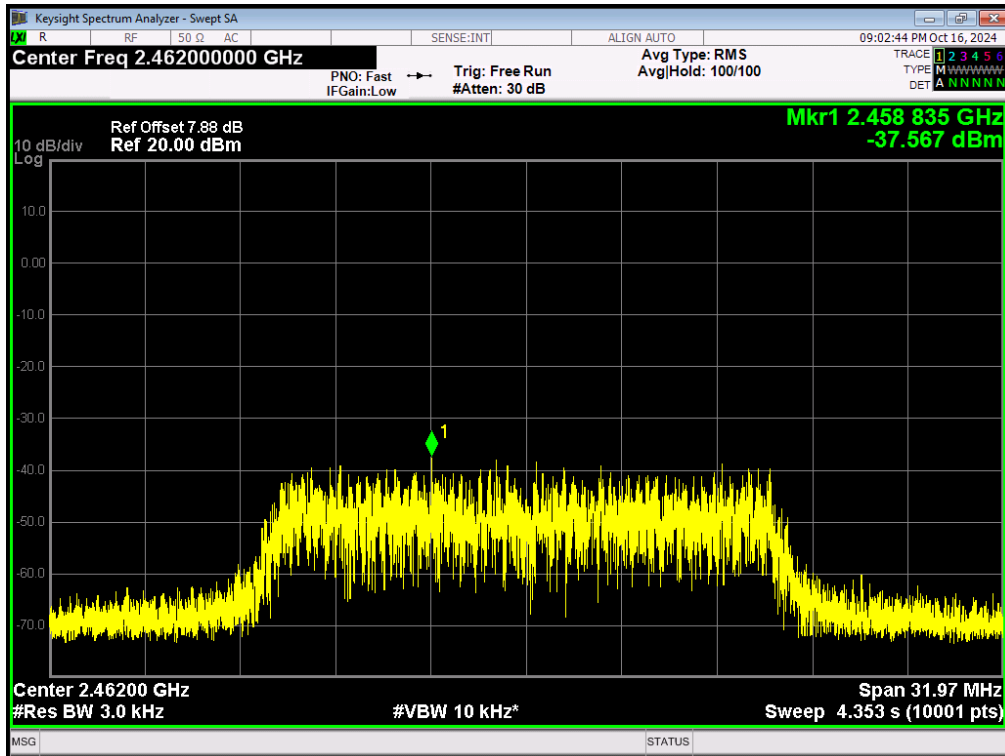

## 10. Antenna Requirement

### 10.1. Standard requirement

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

15.247(c) (1)(i) requirement: (i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

### 10.2. EUT Antenna

The antenna is Integral Antenna and no consideration of replacement. Antenna gain is Maximum 1.31dBi from 2.4GHz to 2.5GHz.

## 11. Test setup photograph

### 11.1. Photos of radiated emission test


30MHz – 1GHz





Above 1GHz







## 12. Photo of the EUT


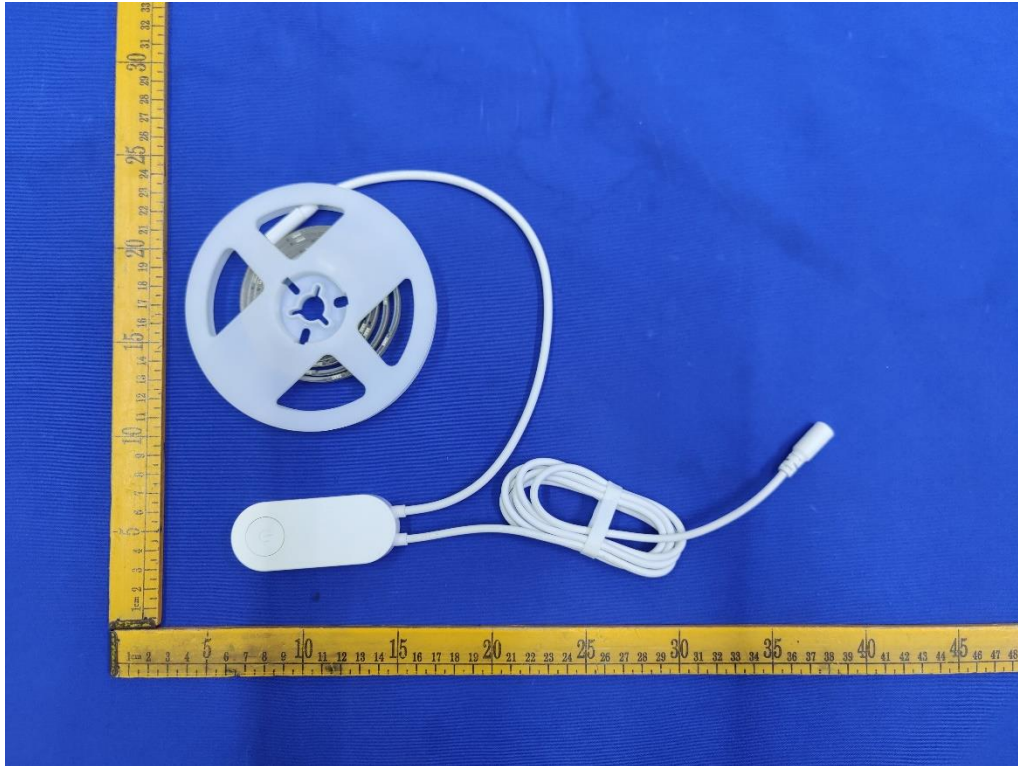


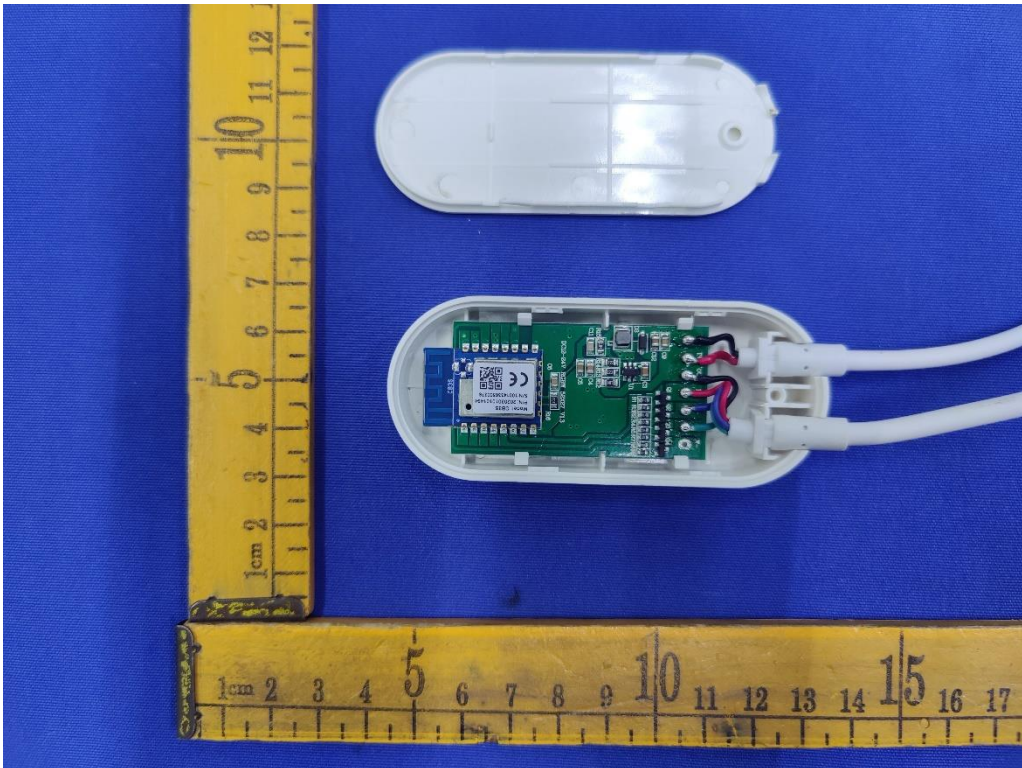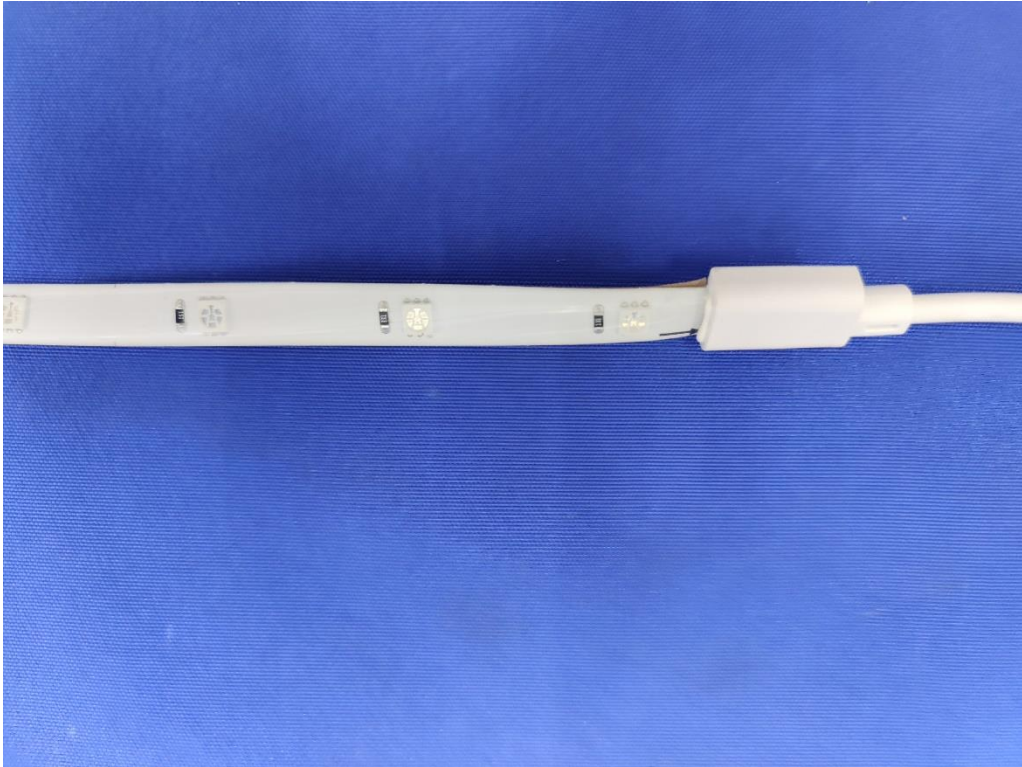



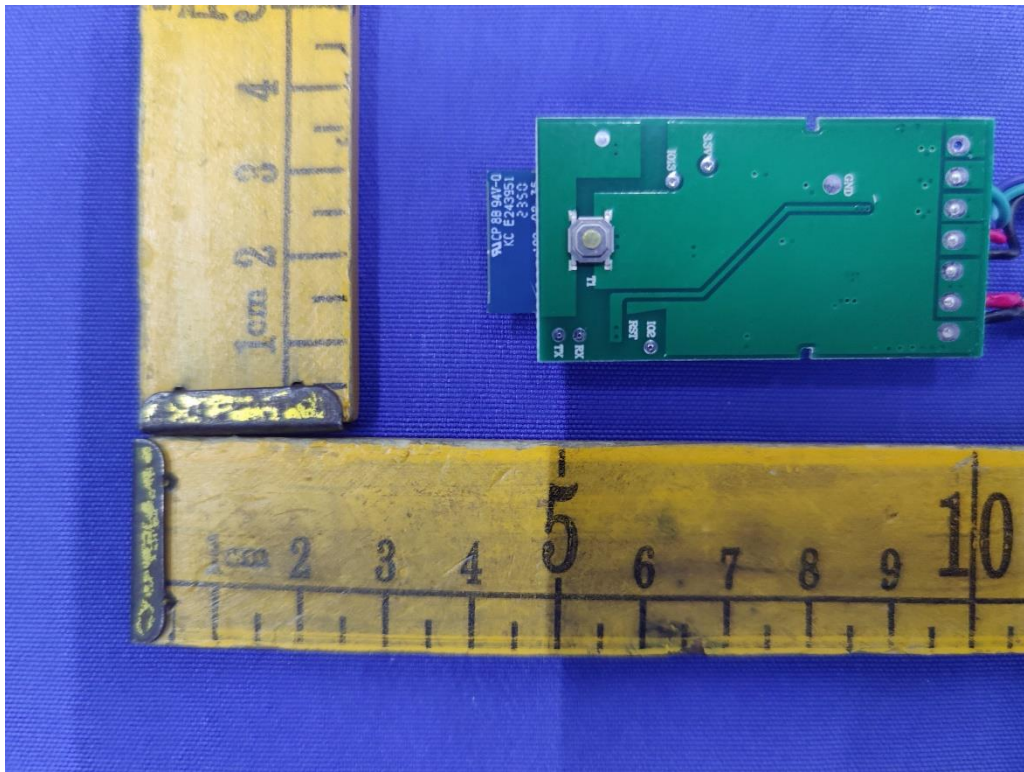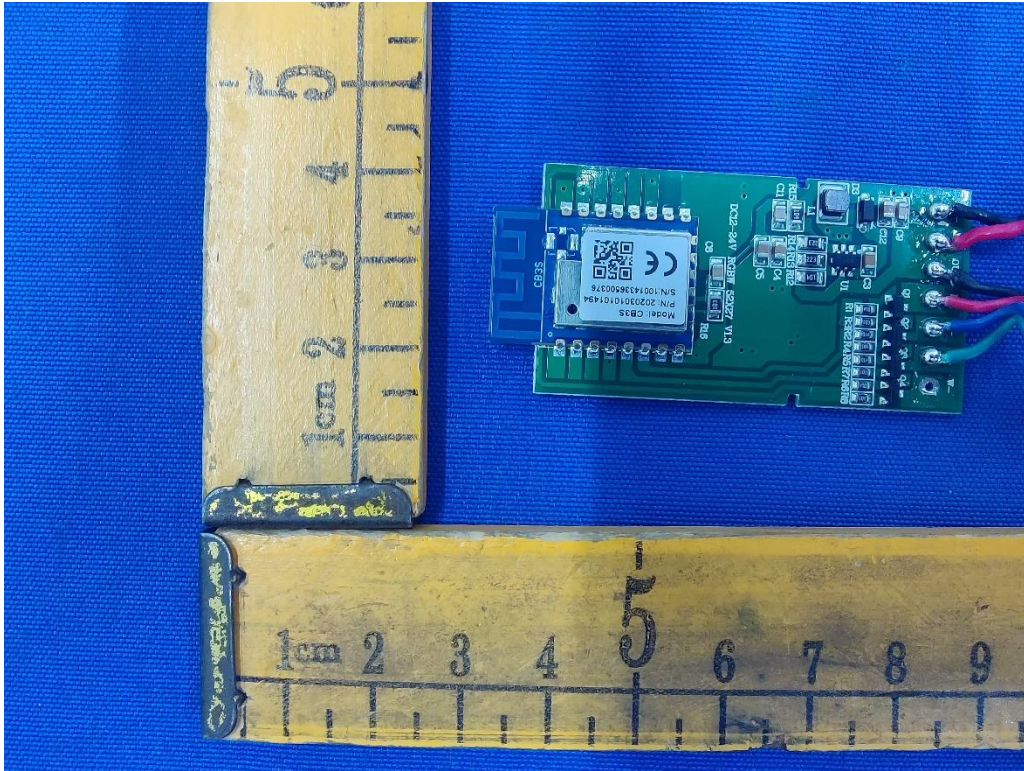

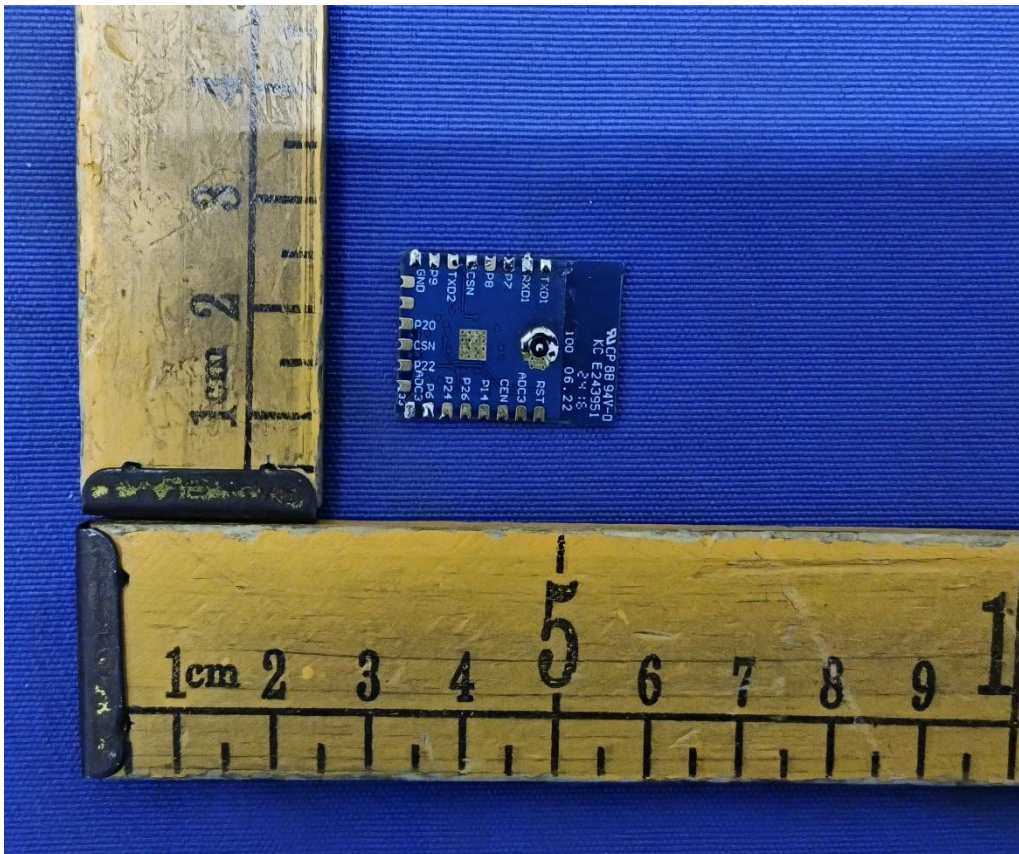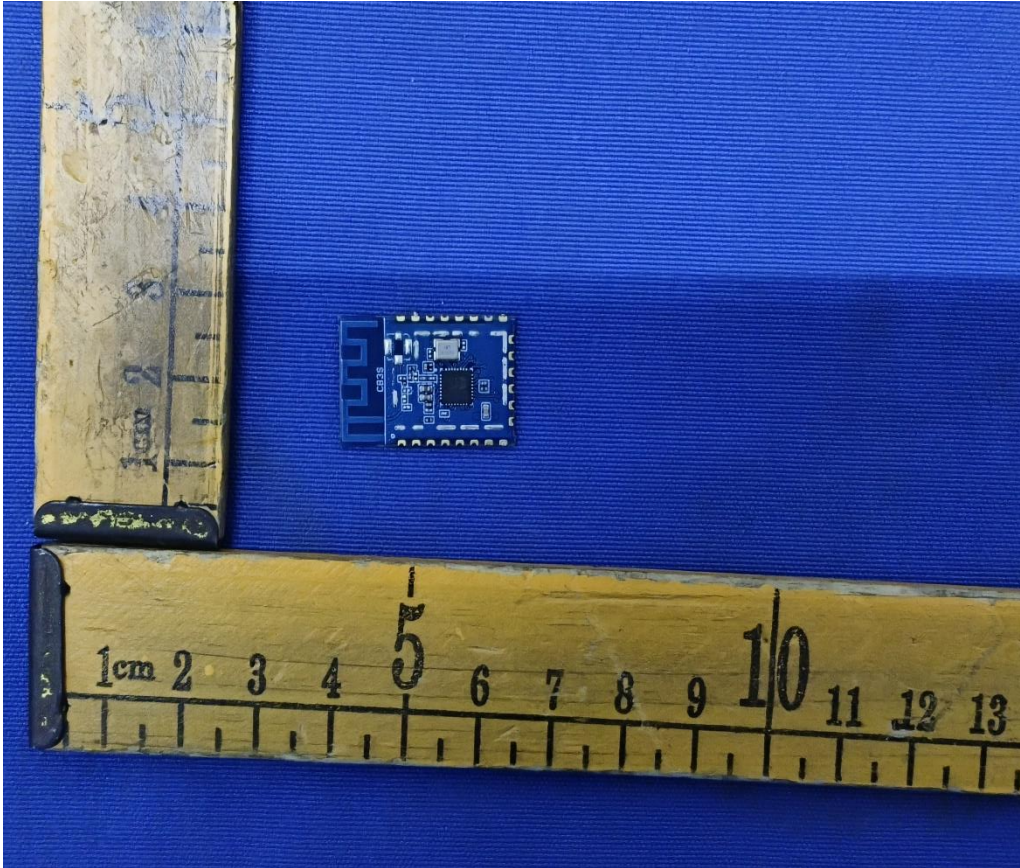

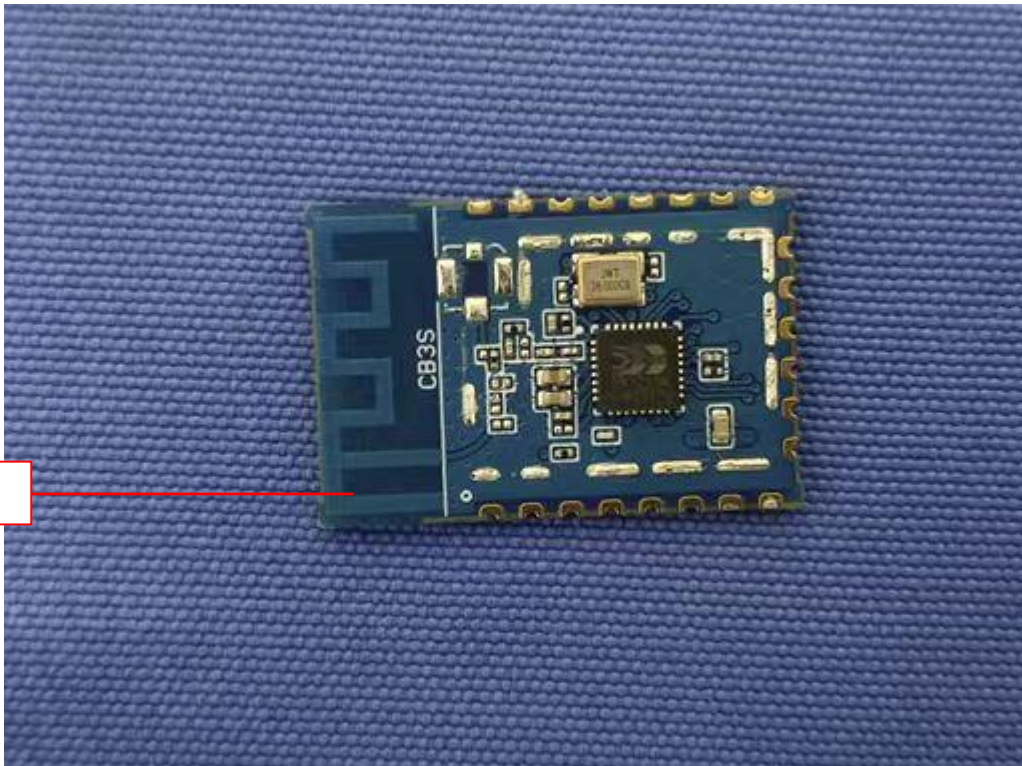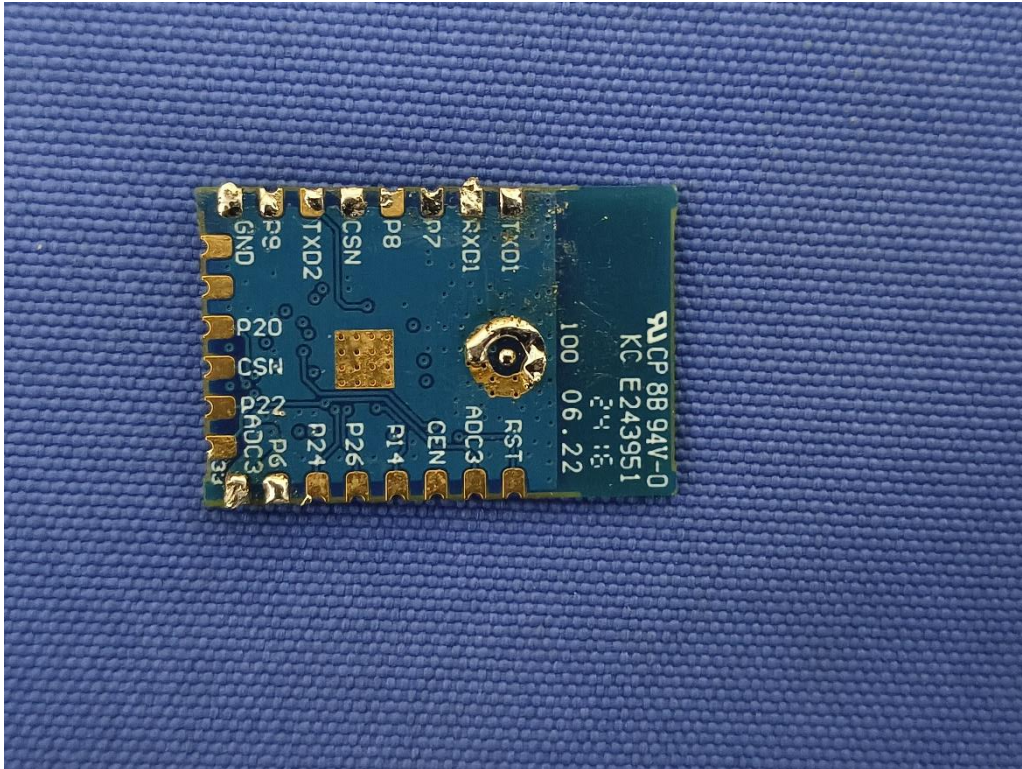

Antenna

**--END OF REPORT--**