



RF Exposure Report

Test report
On Behalf of
DONGGUAN COHESION LEATHER GOODS CO., LTD
For
A5 conference folder with 4.000 mah powerbank
Model No.: SIEM-0000-2933
FCC ID: 2AQ2TSIEM-0000-2933

Prepared for : **DONGGUAN COHESION LEATHER GOODS CO., LTD**
TAOYUAN ROAD, NANSHE DISTRICT, CHASHAN TOWN, DONGGUAN,
GUANGDONG, CHINA

Prepared By : **Shenzhen HUAKE Testing Technology Co., Ltd.**
1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping
Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

Date of Test: **Jan. 16, 2019 to Jan. 22, 2019**

Date of Report: **Jan. 22, 2019**

Report Number: **HK1901230218E**



TEST RESULT CERTIFICATION

Applicant's name: DONGGUAN COHESION LEATHER GOODS CO., LTD
Address: TAOYUAN ROAD, NANSHE DISTRICT, CHASHAN TOWN,
DONGGUAN, GUANGDONG, CHINA

Manufacture's Name: DONGGUAN COHESION LEATHER GOODS CO., LTD
Address: TAOYUAN ROAD, NANSHE DISTRICT, CHASHAN TOWN,
DONGGUAN, GUANGDONG, CHINA

Factory's Name: DONGGUAN COHESION LEATHER GOODS CO., LTD
Address: TAOYUAN ROAD, NANSHE DISTRICT, CHASHAN TOWN,
DONGGUAN, GUANGDONG, CHINA

Product description

Trade Mark: N/A
Product name: A5 conference folder with 4.000 mah powerbank
Model and/or type reference: SIEM-0000-2933

Standards: KDB 680106 D01 RF Exposure Wireless Charging Base App v03

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen HUAK Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen HUAK Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Date of Test:

Date (s) of performance of tests: Jan. 16, 2019 to Jan. 22, 2019

Date of Issue: Jan. 22, 2019

Test Result: **Pass**

Testing Engineer : 

(Gary Qian)

Technical Manager : 

(Eden Hu)

Authorized Signatory : 

(Jason Zhou)



Table of Contents	Page
1 . TEST SUMMARY	4
2. GENERAL INFORMATION	5
2.1. PRODUCT DESCRIPTION	5
2.2 OPERATION OF EUT DURING TESTING	6
2.3 DESCRIPTION OF TEST SETUP	6
5. TEST EQUIPMENT LIST	7
6. RADIO FREQUENCY (RF) EXPOSURE TEST	8
6.1. LIMITS	8
6.2. TEST SETUP	8
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	12



1. TEST SUMMARY

1.1 TEST PROCEDURES AND RESULTS

DESCRIPTION OF TEST	RESULT
E and H field strength measurements	Compliant

1.2 TEST FACILITY

Test Firm : Shenzhen HUAK Testing Technology Co., Ltd.

Address : 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

IC Registration No.: 21210

FCC Registration No.: CN1229

Test Firm Registration Number : 616276

1.3 MEASUREMENT UNCERTAINTY

Measurement Uncertainty

Conducted Emission Expanded Uncertainty	= 2.23dB, k=2
Radiated emission expanded uncertainty(9kHz-30MHz)	= 3.08dB, k=2
Radiated emission expanded uncertainty(30MHz-1000MHz)	= 4.42dB, k=2
Radiated emission expanded uncertainty(Above 1GHz)	= 4.06dB, k=2



2. GENERAL INFORMATION

2.1. PRODUCT DESCRIPTION

A major technical description of EUT is described as following

Operation Frequency	137.6kHz
Maximum field strength	54.25dBuV/m(Peak)@3m
Number of channels	1
Antenna Designation	Integrated Antenna (Met 15.203 Antenna requirement)
Hardware Version	V1.0
Software Version	V1.0
Power Supply	DC 3.7V by battery or DC 5V by adapter



2.2 OPERATION OF EUT DURING TESTING


NO.	TEST MODE DESCRIPTION
1	Wireless charging Mode(Full load)
2	Wireless charging Mode(half load)
3	Wireless charging Mode(Null load)

Note:

1. The mode 1 was the worst case and only the data of the worst case record in this report.

2.3 DESCRIPTION OF TEST SETUP

Configure :

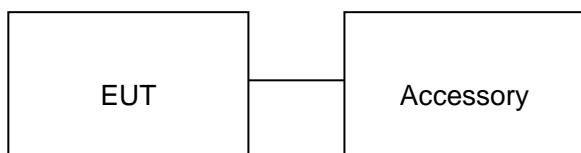

Item	Equipment	Model No.	ID or Specification	Remark
1	Adapter	RP-PC007	DC 5V3A or DC 9V/2A	Accessory
2	Wireless Load	N/A	5W	Support



3. TEST EQUIPMENT LIST

Description	Manufacturer	Model	S/N	Cal. Date	Cal. Due
Broadband Field Meter	Narda Safety Test Solutions GmbH	NBM-550	J-0004	June 12, 2018	June 11, 2019
Probe FHP	Narda Safety Test Solutions GmbH	EHP-50F	J-0015	June 12, 2018	June 11, 2019


4. RADIO FREQUENCY (RF) EXPOSURE TEST

4.1. LIMITS

For devices designed for typical desktop applications, such a wireless charging pads, RF exposure evaluation should be conducted assuming a user separation distance of 15 cm. E and H field strength measurements or numerical modeling may be used to demonstrate compliance. Measurements should be made from all sides and the top of the primary/client pair, with the 15 cm measured from the center of the probe(s) to the edge of the device. Emissions between 100 kHz to 300 kHz should be assessed versus the limits at 300 kHz in Table 1 of Section 1.1310: 614 V/m and 1.63 A/m.

4.2. TEST SETUP

Position A: Front of EUT; Position B: Left of EUT; Position C: back of EUT; Position D: Right of EUT;
Position E: Top of EUT(20 cm measure distance);

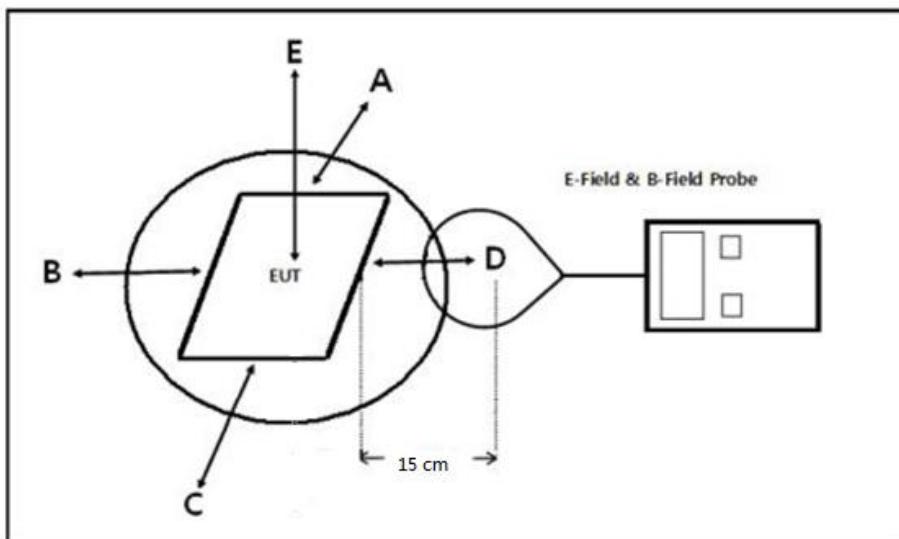



4.3. TEST PROCEDURE

The EUT was placed on a non-conductive table top and the ancillary equipment (e.g. mobile phone) was placed on the EUT for charging.

Maximum E-field and H-field measurements were tested 15cm from each side of the EUT. For top side the measure distance is 15cm.

Along the side of the EUT to center of E-field probe and H-field probe were positioned at the location to search maximum field strength.



4.4. TEST RESULT

Test condition: Mode 1

E-field strength test result:

Frequency Range	Probe Position A (V/m)	Probe Position B (V/m)	Probe Position C (V/m)	Probe Position D (V/m)	Probe Position E (V/m)	FCC Limit (V/m)
136.7kHz	0.16	0.16	0.16	0.16	2.44	614

H-field strength test result:

Frequency Range	Probe Position A (A/m)	Probe Position B (A/m)	Probe Position C (A/m)	Probe Position D (A/m)	Probe Position E (A/m)	FCC Limit (A/m)
136.7kHz	0.18	0.18	0.18	0.18	0.51	1.63

Test condition: Mode 2

E-field strength test result:

Frequency Range	Probe Position A (V/m)	Probe Position B (V/m)	Probe Position C (V/m)	Probe Position D (V/m)	Probe Position E (V/m)	FCC Limit (V/m)
145.4kHz	0.14	0.14	0.14	0.14	1.77	614

H-field strength test result:

Frequency Range	Probe Position A (A/m)	Probe Position B (A/m)	Probe Position C (A/m)	Probe Position D (A/m)	Probe Position E (A/m)	FCC Limit (A/m)
145.4kHz	0.12	0.12	0.12	0.12	0.31	1.63



Test condition: Mode 3

E-field strength test result:

Frequency Range	Probe Position A (V/m)	Probe Position B (V/m)	Probe Position C (V/m)	Probe Position D (V/m)	Probe Position E (V/m)	FCC Limit (V/m)
138.6kHz	0.16	0.16	0.16	0.16	1.40	614

H-field strength test result:

Frequency Range	Probe Position A (A/m)	Probe Position B (A/m)	Probe Position C (A/m)	Probe Position D (A/m)	Probe Position E (A/m)	FCC Limit (A/m)
138.6kHz	0.13	0.13	0.13	0.13	0.31	1.63




APPENDIX A: PHOTOGRAPHS OF TEST SETUP

Position E



Position A

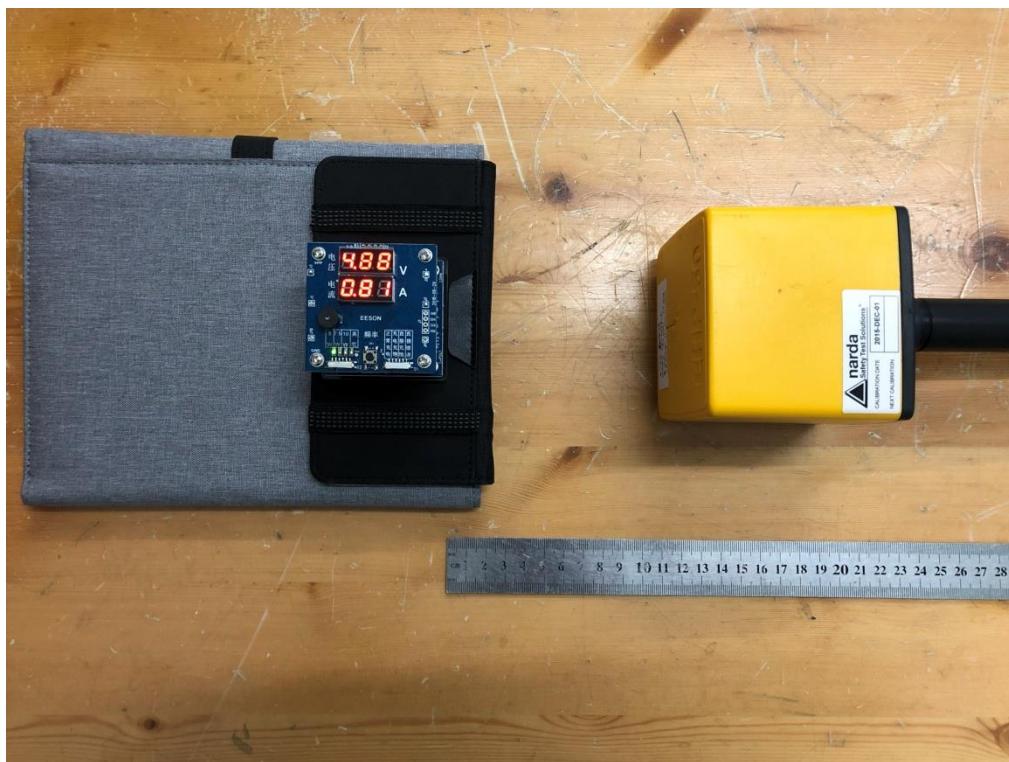

----END OF REPORT----