

# T-COIL TEST REPORT

**Report No. :** SET2020-04504

**Product :** Mobile Phone

**Model No. :** BS5314G, MM5114G, SS5214G

**FCC ID :** 2AQ4G-BS5314G

**Brand Name :** Black Smart, Mint Mist, Soho Style

**Applicant :** Shenzhen Link Win Technology Co., Ltd.

**Address :** 9F, Zhengqilong Industrial Building, 1st Rd Gushu, Xixiang, Bao'an, Shenzhen, China

**Test date :** 05/11/2020

**Issued Date :** 05/11/2020

**Issued by :** CCIC Southern Testing Co., Ltd.

**Lab Location :** Electronic Testing Building, No. 43 Shahe Road, Xili Street, Nanshan District, Shenzhen, Guangdong, China.

**Tel :** 86 755 26627338      **Fax:** 86 755 26627238

**Mail :** manager@ccic-set.com      **Website:** <http://www.ccic-set.com>



This test report consists of **30** pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CCIC-SET. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to CCIC-SET within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit.

## Test Report

**Product. :** Mobile Phone

**Model No. ....:** BS5314G, MM5114G, SS5214G

**Brand Name.....:** Black Smart, Mint Mist, Soho Style

**Applicant.....:** Shenzhen Link Win Technology Co., Ltd.

**Applicant Address.....:** 9F, Zhengqilong Industrial Building, 1st Rd Gushu, Xixiang, Bao'an, Shenzhen, China

**Test Standards.....:** ANSI C63.19-2011 American National Standard Methods of Measurement of Compatibility between Wireless Communications Devices and Hearing Aids  
FCC 47CFR§20.19 American National Standard Methods of Measurement of Compatibility between Wireless Communications Devices and Hearing Aids

**Rating.....:** T-Coil : T3

**Test Result.....:** Pass

**Tested by .....** Mei chun  
Mei chun , Test Engineer

**Reviewed by.....:** Chris You  
Chris You, Senior Engineer

**Approved by.....:** Shuangwen Zhang  
Shuangwen Zhang , Manager

## Contents

<b>Test Report.....</b>	<b>2</b>
1. Administrative Data .....	4
2. Equipment Under Test (EUT) .....	5
3. SUMMARY OF TEST RESULTS .....	6
4. Hearing Aid Compatibility (HAC) .....	7
5. OPERATIONAL CONDITIONS DURING TEST .....	9
6. CHARACTERISTICS OF THE TEST .....	15
7. TEST RESULTS.....	17
8. Measurement Uncertainty.....	18
9. MAIN TEST INSTRUMENTS.....	20
10. ANNEX A SYSTEM SETUP .....	21
11. ANNEX D TEST PLOTS.....	22
12. ANNEX E CALIBRATION REPORT.....	24

## 1. Administrative Data

### 1.1 Testing Laboratory

**Test Site:** CCIC Southern Testing Co., Ltd.

**Address:** Electronic Testing Building, No. 43 Shahe Road, Xili Street, Nanshan District, Shenzhen, Guangdong, China.

**NVLAP Lab Code:** CCIC-SET is a third party testing organization accredited by NVLAP according to ISO/IEC 17025. The accreditation certificate number is 201008-0.

**FCC Registration:** CCIC-SET Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Designation Number: CN5031, valid time is until December 31, 2020.

**ISED Registration:** CCIC-SET Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 11185A, CAB Identifier: CN0064, valid time is until December 31, 2020

**Test Environment** Temperature (°C): 21°C

**Condition:** Relative Humidity (%): 60%

Atmospheric Pressure (kPa): 86KPa-106KPa

## 2. Equipment Under Test (EUT)

### Identification of the Equipment under Test

<b>Sample Name:</b>	Mobile Phone	
<b>Model Name:</b>	BS5314G, MM5114G, SS5214G	
<b>Brand Name:</b>	Black Smart, Mint Mist, Soho Style	
<b>General description:</b>	Support Band	GSM850/1900, WCDMA B2/4/5 LTE B2/4/5/12/17/66 2.4G WIFI, BT
	Test Band	GSM850MHz/1900MHz WCDMA Band 2/4/5
	Development Stage	Identical Prototype
	Accessories	Power Supply
	Antenna type	PIFA Antenna
	Operation mode	GSM Voice WCDMA Voice
	Modulation mode	GSM: GMSK, 8PSK WCDMA: QPSK LTE: QPSK, 16QAM 2.4GHz WIFI: DSSS, OFDM BT: GFSK/ $\pi$ /4-DQPSK/8-DPSK

### NOTE:

Model: BS5314G, MM5114G, SS5214G only the model name is deferent, we select model BS5314G L to test

### 3. SUMMARY OF TEST RESULTS

#### 3.1 Test Standards

No.	Identity	Document Title
1	FCC 47 CFR Part 20.19	Hearing aid-compatible mobile handsets.
2	ANCI C63.19:2011	American National Standard Methods of Measurement of Compatibility between Wireless Communications Devices and Hearing Aids
3	KDB 285076 D01 HAC Guidance v05	Provides equipment authorization guidance for mobile handsets subject to the requirements of Section 20.19 for hearing aid compatibility

#### 3.2. Summary Of HAC Rating

##### Summary of T-Rating

Band	T-Rating	Frequency response
GSM850	T3	PASS
GSM1900	T3	PASS
WCDMA850	T4	PASS
WCDMA1700	T3	PASS
WCDMA1900	T3	PASS

## 4. Hearing Aid Compatibility (HAC)

### 4.1 Introduction

The purpose of the Hearing Aid Compatibility extension is to enable measurements of the near electric and magnetic fields generated by wireless communication devices in the region controlled for use by a hearing aid in accordance with ANSI-C63.19-2011 FCC has granted a request for waiver of the HAC rules in section 20.19 for dual band GSM handsets. The waiver has specific conditions, as stated in the order (FCC 05-166) and expires 1 August 2007.

The purpose of this standard is to establish categories for hearing aids and for WD (wireless communications devices) that can indicate to health care practitioners and hearing aid users which hearing aids are compatible with which WD, and to provide tests that can be used to assess the electromagnetic characteristics of hearing aids and WD and assign them to these categories. The various parameters required, in order to demonstrate compatibility and accessibility are measured. The design of the standard is such that when a hearing aid and WD achieve one of the categories specified, as measured by the methodology of this standard, the indicated performance is realized.

In order to provide for the usability of a hearing aid with a WD, several factors must be coordinated:

- a) Radio frequency (RF) measurements of the near-field electric and magnetic fields emitted by a WD to categorize these emissions for correlation with the RF immunity of a hearing aid.
- b) Magnetic field measurements of a WD emitted via the audio transducer associated with the T-coil mode of the hearing aid, for assessment of hearing aid performance.
- c) Measurements with the hearing aid and a simulation of the categorized WD T-coil emissions to assess the hearing aid RF immunity in the T-coil mode.

The WD radio frequency (RF) and audio band emissions are measured.

Hence, the following are measurements made for the WD:

- a) RF E-Field emissions
- c) T-coil mode, magnetic signal strength in the audio band
- d) T-coil mode, magnetic signal and noise articulation index
- e) T-coil mode, magnetic signal frequency response through the audio band

Corresponding to the WD measurements, the hearing aid is measured for:

- a) RF immunity in microphone mode
- b) RF immunity in T-coil mode

## 4.2 Description of Test System

### 4.2.1 COMOHAC T-COIL PROBE



Serial Number:	SN 24/13 TCP28
Frequency range:	200 Hz -5000 Hz
Dimensions:	6.55mm length*2.29mm diameter
DC resistance:	860.6 Ω
Wire size:	51 AWG
Inductance:	132.1 mH at 1kHz
Sensitivity:	-60.20 dB (V/A/m) at 1kHz

### 4.2.4 System Hardware

The HAC positioning ruler is used to position the phone properly with the regard to the position of the probe during a measurement. The positioning system is made of a dedicated frame that can be fixed on the table. The tip of the probe is positioned on a reference point located on the top of the positioning ruler. The distance between this reference point and the cross located on the ruler being known, the speaker of the phone is positioned on this cross in order to make sure both probe and phone are positioned properly.

During the measurement, the HAC ruler has to be removed so that it does not interfere with the measurement.



Position device

## 5. OPERATIONAL CONDITIONS DURING TEST

### 5.1 Schematic Test Configuration

During SAR test, EUT was operating in Traffic Mode (Channel Allocated) at Normal Voltage Condition. A communication link is set up with a System Simulator (SS) by air link, and a call is established.

The EUT should use its internal transmitter. The antenna(s), battery and accessories shall be those specified by the manufacturer. The EUT battery must be fully charged and checked periodically during the test to ascertain uniform power output. If a wireless link was used, the antenna connected to the output of the base station simulator shall be placed at least 50 cm away from the handset.

Air-interface	Band (MHz)	Type	C63.19-2011 Tested	Simultaneous Transmissions Scenarios invoice (Not to be tested)	Reduced power	VOIP
GSM	850	Voice	Yes	Yes: WIFI or BT	N/A	N/A
	1900	Voice	Yes	Yes: WIFI or BT	N/A	N/A
	GRPS	Data	N/A	N/A	N/A	N/A
WCDMA	850	Voice	Yes	Yes: WIFI or BT	N/A	N/A
	1700	Voice	Yes	Yes: WIFI or BT	N/A	N/A
	1900	Voice	Yes	Yes: WIFI or BT	N/A	N/A
	HSPA	Data	N/A	N/A	N/A	N/A
LTE	Band 2	Data	N/A	Yes: WIFI or BT	N/A	N/A
	Band 4	Data	N/A	Yes: WIFI or BT	N/A	N/A
	Band 5	Data	N/A	Yes: WIFI or BT	N/A	N/A
	Band 12	Data	N/A	Yes: WIFI or BT	N/A	N/A
	Band 17	Data	N/A	Yes: WIFI or BT	N/A	N/A
	Band 66	Data	N/A	Yes: WIFI or BT	N/A	N/A
WIFI	2.4GHz	Data	N/A	Yes GSM or WCDMA	N/A	N/A
BT	2.4GHz	Data	N/A	Yes GSM or WCDMA	N/A	N/A

Note: N/A=Not support

The volume is at the maximum value, and the backlight of the phone is turned off. The Manufacturer doesn't design HAC mode software on the EUT

## 5.2 HAC Measurement System

The HAC measurement system being used is the COMO HAC system, the system is controlled remotely from a PC, which contains the software to control the robot and data acquisition equipment. The software also displays the data obtained from test scans.

In operation, the system first does an 2D scan at a fixed depth within a 50mm\*50mm area. When the maximum HAC point has been found, the system will then carry out a 3D scan centred at that point to determine volume averaged HAC level.



WD reference and plane for RF emission measurements


## 5.3 Magnetic measurement locations for the WD

The following figure illustrates the three standard probe orientations. Position 1 is the axial orientation of the probe coil; orientation 2 and orientation 3 are radial orientations. The space between the measurement positions is not fixed. It is recommended that a scan of the EUT be done for each probe coil orientation and that the maximum level recorded be used as the reading for that orientation of the probe coil.

1) The reference plane is the planar area that contains the highest point in the area of the phone that normally rests against the user's ear. It is parallel to the centerline of the receiver area of the phone and is defined by the points of the receiver-end of the EUT handset,

which, in normal handsetuse, rest against the ear.

- 2) The measurement plane is parallel to, and 10 mm in front of, the reference plane.
- 3) The reference axis is normal to the reference plane and passes through the center of the receiver speaker section (or the center of the hole array); or may be centered on a secondary inductive source. The actual allocation of the measurement point shall be noted in the test report as the measurement reference point.
- 4) The measurement points may be located where the axial and radial field intensity measurements are optimum with regard to the requirements. However, the measurement points should be near the acoustic output of the EUT and shall be located in the same half of the phone as the EUT receiver. In a EUT handset with a centered receiver and a circularly symmetrical magnetic field, the measurement axis and the reference axis would coincide.
- 5) The relative spacing of each measurement orientation is not fixed. The axial and two radial orientations should be chosen to select the optimal position.
- 6) The measurement point for the axial position is located 10 mm from the reference plane on the measurement axis. The actual location of the measurement point shall be noted in test reports and designated as the measurement reference point.

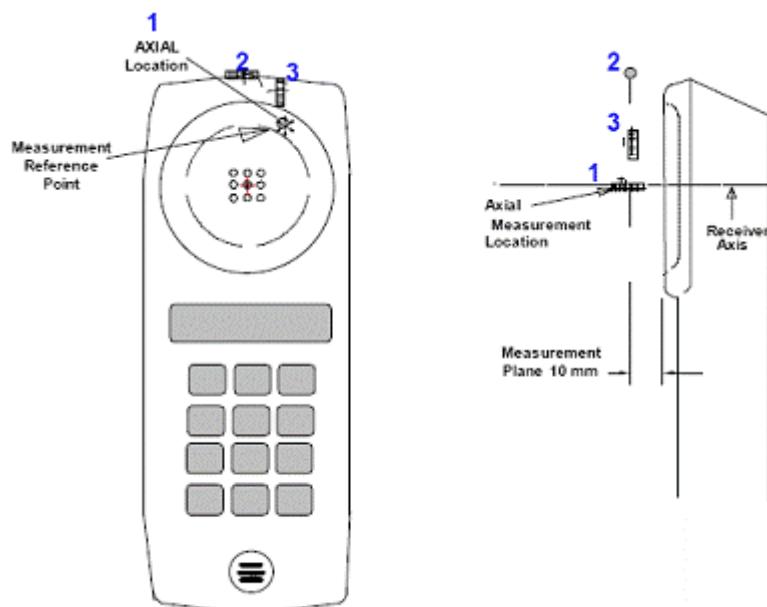

Axis and planes for EUT audio frequency magnetic field measurements

## 5.4 Equipments and results of validation testing

### System Audio Validation

Put the phone on call and select the CMU decoder cal. When the decoder cal is selected, a full sacle(3.14 dBm) signal is provided to the speech port. Measure the voltage form the speech connector using the provided CMU speech cable. For this connect the GSM/WCDMA out connector (or CDMA2K OUT connector) to the front panel of the keithley and read the AC voltage. With the speech cable provided by satiom, the GSM/WCDMA OUT connector 2 and the CDMA2K OUT connector is the connector 4.

Put the phone on call and select the CMU encoder cal. And send a signal to the CMU and check to avoid influencing the calibration. An RMS voltmeter would indicate 100 mV RMS during the first phase and 10 mV RMS during the second phase. After the first two phases, the two input channels are both calibrated for absolute measurements of voltages. The resulting factors are displayed above the multi-meter window.

After phases 1 and 2, the input channels are calibrated to measure exact voltages. This is required to use the inputs for measuring voltages with their peak and RMS value.

In phase 3, a multi-sine signal covering each third-octave band from 50 Hz to 10 kHz is generated and applied to both audio outputs. The probe should be positioned in the center of the AMCC and aligned in the z-direction, the field orientation of the AMCC. The "Coil In" channel is measuring the voltage over the AMCC internal shunt, which is proportional to the magnetic field in the AMCC. At the same time, the "Probe In" channel samples the amplified signal picked up by the probe coil and provides it to a numerical integrator. The ratio of the two voltages in each third-octave filter leads to the spectral representation over the frequency band of interest. The Coil signal is scaled in dBV, and the Probe signal is first integrated and normalized to show dB A/m. The ratio probe-to-coil at the frequency of 1 kHz is the sensitivity which will be used in the consecutive T-Coil jobs.

### Audio Level and Gain Measurements

#### W-CDMA/GSM

No correction gain factors were measured for W-CDMA/GSM due to the Rohde & Schwarz CMW500, hosting a calibrated audio board. The gains used to measure W-CDMA/GSM are set to 100.

Protocol	Input(dBm0)
CDMA	-18
GSM	-16
WCDMA	-16


## T-Coil Measurement Procedure

The following illustrate a typical T-Coil signal test scan over a wireless communications device:

- a. Position the EUT in the test setup and connect the EUT RF connector to a base station simulator.
- b. The drive level to the EUT is set such that the reference input level defined in 6.3.2.1, Table 6.1 is input to the base station simulator in the 1 kHz, 1/3 octave band. This drive level shall be used for the T-Coil signal test (ABM1) at  $f = 1$  kHz. Either a sine wave at 1025 Hz or a voice-like signal, band-limited to the 1 kHz 1/3 octave, as defined in 6.3.2, shall be used for the reference audio signal. If interference is found at 1025 Hz an alternate nearby reference audio signal frequency may be used. The same drive level will be used for the ABM1 frequency response measurements at each 1/3 octave band center frequency. The EUT volume control may be set at any level up to maximum, provided that a signal at any frequency at maximum modulation would not result in clipping or signal overload.
- c. Determine the magnetic measurement locations for the EUT, if not already specified by the manufacturer, as described in 6.3.4.1.1 and 6.3.4.4.
- d. At each measurement location, measure and record the desired T-Coil magnetic signals (ABM1 at  $f_i$ ) as described in 6.3.4.2 in each individual ISO 266-1975 R10 standard 1/3 octave band. The desired audio band input frequency ( $f_i$ ) shall be centered in each 1/3 octave band maintaining the same drive level as determined in Step 2) and the reading taken for that band. Equivalent methods of determining the frequency response may also be employed, such as fast Fourier transform (FFT) analysis using noise excitation or input-output comparison using simulated speech. The full-band integrated or half-band integrated probe output, as described in D.18, may be used, as long as the appropriate calibration curve is applied to the measured result, so as to yield an accurate measurement of the field magnitude. (The resulting measurement shall be an accurate measurement in dB A/m.) All measurements of the desired signal shall be shown to be of the desired signal and not of an undesired signal. This may be shown by turning the desired signal on and off with the probe measuring the same location. If the scanning method is used the scans shall show that all measurement points selected for the ABM1 measurement meet the ambient and test system noise criterion in 6.2.1.
- e. At each measurement location measure and record the undesired broadband audio magnetic signal (ABM2) as described in 6.3.4.3 with no audio signal applied (or digital zero applied, if appropriate) using A-weighting, and the half-band integrator. Calculate the ratio of the desired to undesired signal strength (i.e., signal quality).

f. Change the probe orientation to one of the two remaining orientations. At both measurement orientations, measure and record ABM1 using either a sine wave at 1025 Hz or a voice-like signal for the reference audio input signal.

g. Determine the category that properly classifies the signal quality.

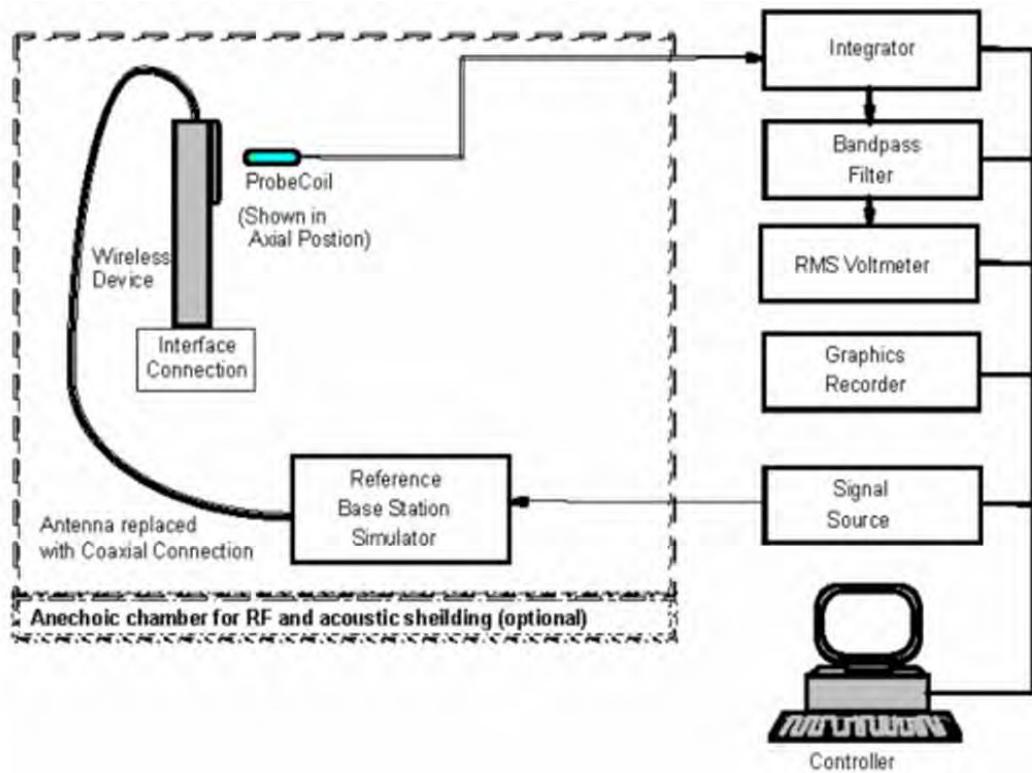

T-Coil measurement test setup


## 6. CHARACTERISTICS OF THE TEST

### Axial and Radial Field Intensity


All orientations of the magnetic field, in the axial and radial position along the measurement plane shall be  $\geq -18$  dB(A/m) at 1 kHz in a 1/3 octave band filter per § 8.3.1.

### Frequency Response

The frequency response of the axial component of the magnetic field shall follow the response curve specified in EIA RS-504-1983, over the frequency range 300 Hz – 3000 Hz per § 8.3.2.

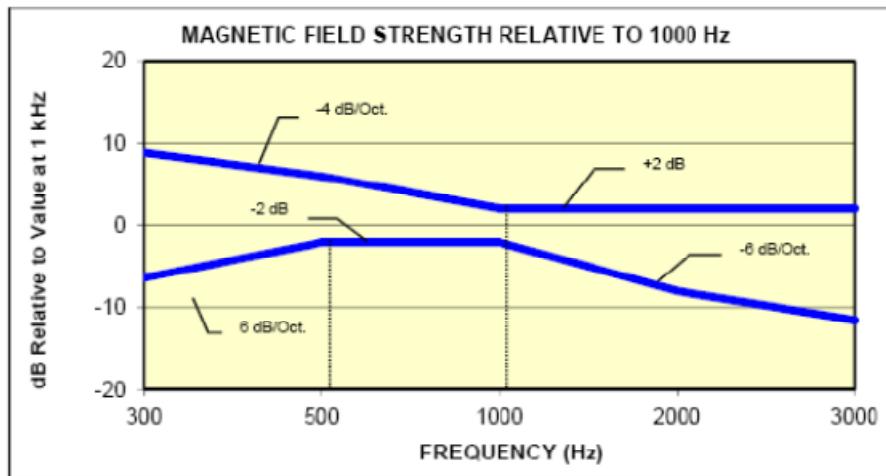

**Figure 4-1**  
Magnetic field frequency response for Wireless Devices with an axial field  
 $\leq -15$  dB (A/m) at 1 kHz

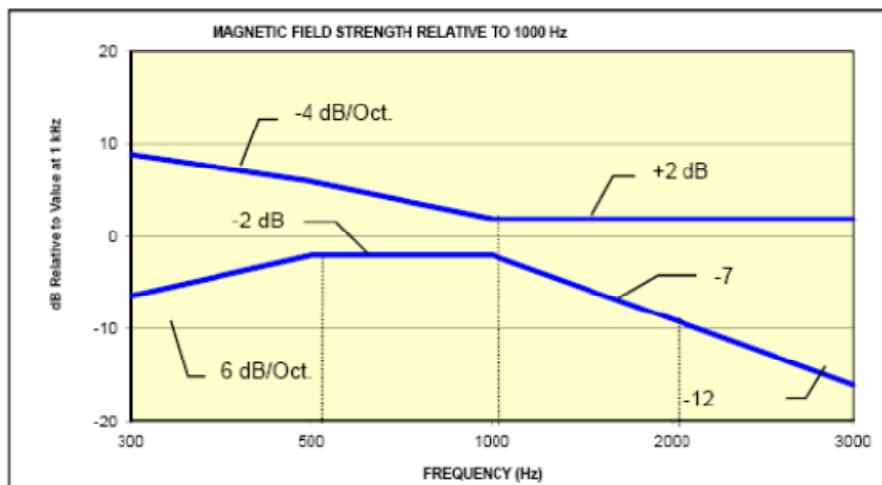

**Figure 4-2**  
Magnetic Field frequency response for wireless devices with an axial field that exceeds  
 $-15$  dB(A/m) at 1 kHz

## Signal Quality

The table below provides the signal quality requirement for the intended audio magnetic signal from a wireless device. Only the RF immunity of the hearing aid is measured in T-coil mode. It is assumed that a hearing aid can have no immunity to an interference signal in the audio band, which is the intended reception band for this mode. The only criterion that can be measured is the RF immunity in T-coil mode. This is measured using the same procedure as the audio coupling mode at the same levels.

The signal quality of the axial and radial components of the magnetic field was used to determine the T-coil mode category.

Table 3 T-Coil Mode Categories

Category	Telephone RF Parameter
	Wireless Device Signal Quality (Signal + Noise-to-noise ratio in dB)
T1	0 to 10 dB
T2	10 to 20 dB
T3	20 to 30 dB
T4	>30 dB

## 7. TEST RESULTS

### 7.1 Summary of Power Measurement Results

The power level results were listed in the following two tables:

Conducted RF Power of GSM850

Band	GSM 850			GSM 1900		
Channel	128	190	251	512	661	810
Frequency	824.2	836.4	848.8	1850.2	1880.0	1909.8
GSM	31.91	32.13	32.05	29.04	28.51	28.62

Conducted RF Power of WCDMA

Band	WCDMA 850			WCDMA1900		
TX Channel	4132	4182	4233	9262	9400	9538
Frequency	826.4	835	846.6	1852.4	1880.0	1907.6
ARM	23.05	23.31	23.19	22.72	22.85	22.77

Conducted RF Power of WCDMA

Band	WCDMA 1700		
TX Channel	1312	1412	1513
Frequency	1712.4	1732.4	1752.6
ARM	22.51	22.62	22.59

### 7.2 Summary of Measurement Results

T-Coil Values of the EUT

Temperature: 23.0~23.5°C, humidity: 62~64%.			
Band	Channel	Frequency (MHz)	Test Results Category
GSM850	190	836.6	T3
GSM1900	661	1880.0	T3
WCDMA850	4182	835	T4
WCDMA1700	1413	1732.6	T3
WCDMA1900	9538	1907.6	T3

## 8. Measurement Uncertainty

### Measurement Uncertainty of RF Emission Test

Uncertainty Component	Uncertainty value	Probe Dist.	Div	(Ci) E	(Ci) H	Std. Unc.(+-%)	
						E	H
<b>Measurement System</b>							
Probe calibration	6.00	N	1.000	1	1	6.00	6.00
Axial Isotropy	2.02	R	1.732	1	1	1.17	1.17
Sensor Displacement	14.30	R	1.732	1	0.217	8.26	1.79
Boundary effect	2.50	R	1.732	1	1	0.87	0.87
Phantom Boundary effect	6.89	R	1.732	1	0	3.52	0.00
Linearity	2.58	R	1.732	1	1	1.49	1.49
Scaling to PMR Calibration	9.02	N	1.000	1	1	9.02	9.02
System Detection Limit	1.30	R	1.732	1	1	0.75	0.75
Readout Electronics	0.25	R	1.732	1	1	0.14	0.14
Reponse Time	1.23	R	1.732	1	1	0.71	0.71
Integration Time	2.15	R	1.732	1	1	1.24	1.24
RF Ambient Conditions	2.03	R	1.732	1	1	1.17	1.17
RF Reflections	9.09	R	1.732	1	1	5.25	5.25
Probe positioner	0.63	N	1.000	1	0.71	0.63	0.45
Probe positioning	3.12	N	1.000	1	0.71	3.12	2.22
Extrapolation and Interpolation	1.18	R	1.732	1	1	0.68	0.68
<b>Uncertainties of the EUT</b>							
Test sample positioning Vertical	2.73	R	1.732	1	0.71	1.58	1.12
Test sample positioning Lateral	1.19	R	1.732	1	1	0.69	0.69
Device Holder and Phantom	2.20	N	1.000	1	1	2.20	2.20
Power Drift	4.08	R	1.732	1	1	2.36	2.36
<b>Phantom and Setup Related</b>							
Phantom Thickness	2.00	N	1.000	1	0.6	2.00	1.20
Conbined Std. Uncertainty(k=1)						16.18	13.25
Expanded Uncertainty on Power						32.35	26.50
Expanded Uncertainty on Field						16.18	13.25

Note:

N-Nomal

R-Rectangular

Div.- Divisor used to obataion standard uncertainty

## Measurement Uncertainty of T-Coil Test

No.	Uncertainty Component	Type	Uncertainty Value (%)	Probability Distribution	k	ci	Standard Uncertainty (%) ui(%)	Degree of freedom V <sub>eff</sub> or v <sub>i</sub>
<b>Measurement System</b>								
1	—Probe Calibration	B	6	N	3	1	3.5	$\infty$
2	—Axial isotropy	B	4.7	R	1.732	0.5	4.3	$\infty$
3	—Hemispherical Isotropy	B	9.4	R	1.732	0.5	4.3	$\infty$
4	—Boundary Effect	B	11.0	R	1.732	1	6.4	$\infty$
5	—Linearity	B	4.7	R	1.732	1	2.7	$\infty$
6	—System Detection Limits	B	1.0	R	1.732	1	0.6	$\infty$
7	—Probe Coil Sensitivity	B	0.49	R	1.732	1	0.28	$\infty$
8	—Response Time	B	0.00	R	1.732	1	0.00	$\infty$
9	—Integration Time	B	0.00	R	1.732	1	0.00	$\infty$
10	—RF Ambient Conditions	B	3.0	R	1.732	1	1.73	$\infty$
11	—Probe Position Mechanical tolerance	B	0.4	R	1.732	1	0.2	$\infty$
12	—Probe Position with respect to Phantom Shell	B	2.9	R	1.732	1	1.7	$\infty$

	<b>Uncertainties of the DUT</b>							
13	—Position of the DUT	A	4.8	N	3	1	4.8	5
14	—Holder of the DUT	A	7.1	N	3	1	7.1	5
15	—Repeatability of the WD	B	5.0	R	1.732	1	2.9	$\infty$
<b>Acoustic noise</b>								
16	—Acoustic noise	B	1.0	R	1.732	1	0.6	$\infty$
21	—Cable loss	B	0.46	N	1.732	1	0.46	$\infty$
<b>Combined Standard Uncertainty</b>				RSS			17.26	42.33
<b>Expanded uncertainty</b> (Confidence interval of 95 %)				K=2			34.52	

## 9. MAIN TEST INSTRUMENTS

N o.	EQUIPMENT	TYPE	Series No.	Due Date
1	T-Coil Probe	SATIMO/STCOIL	SN 24/13 TCP28	2020/11/27
2	TMFS	SATIMO/STMFS	SN 07/14 TMFS24	2020/11/27
3	Amplifier	Nucleitudes	143060	2021/04/04
4	Multimeter	Keithley - 2000	4014020	2021/04/04
5	Wireless Communication Test Set	CMU200	A0304212	2020/06/10


## 10. ANNEX A SYSTEM SETUP




Fig.1 Testing Photo

## 11. ANNEX D TEST PLOTS

### Worst-Case Test Plot GSM1900 Frequency (MHz): 1880.00000

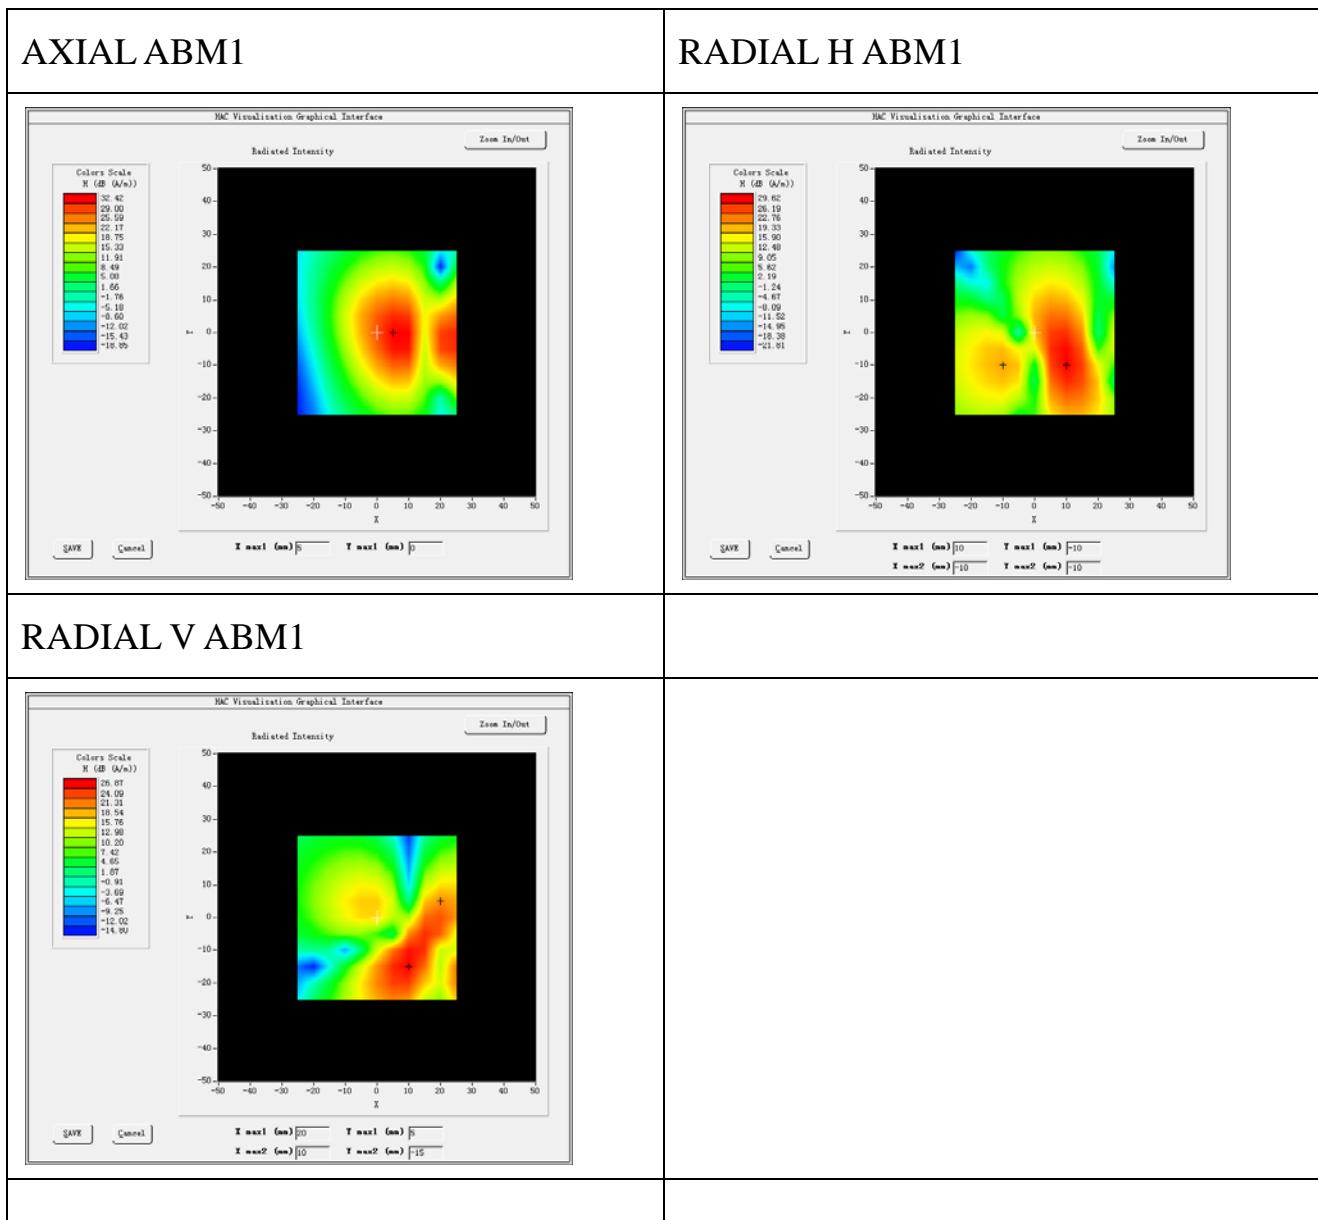

## Magnetic field frequency response (field that exceeds -15 dB)

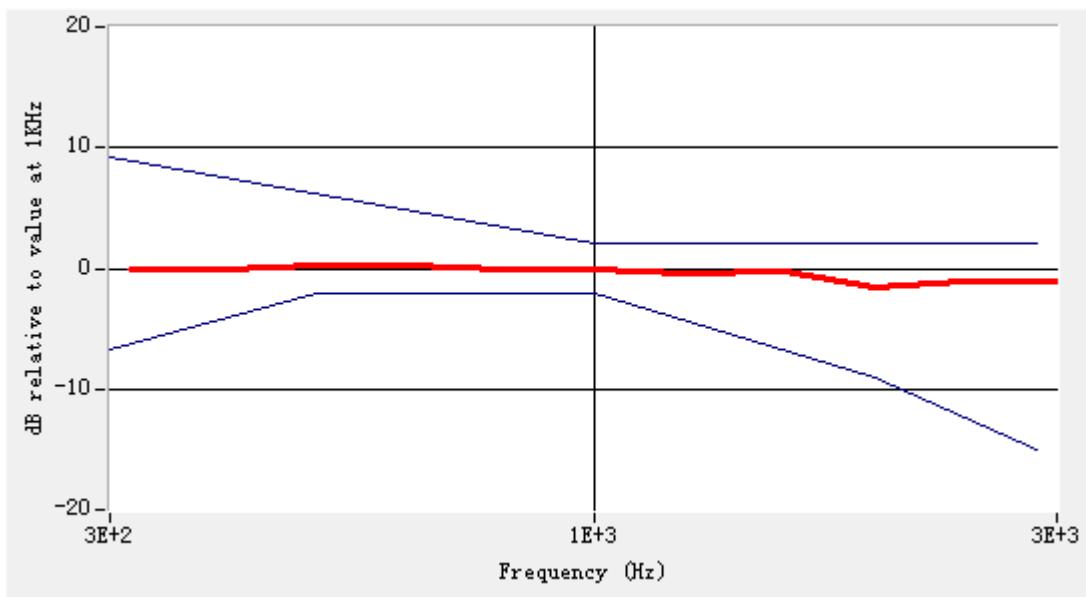

## Test Summary

C63.19	Mode	Band	Test Description	Minimum Limit	Location	Measured	Category	Verdict
				dBA/m	-	dBA/m	-	Pass/Fail
7.3.1.1	GSM	GSM1900	Intensity, Axial	-18	Max	8.72	-	PASS
7.3.1.2			Intensity, RadialH	-18	Right side	2.79	-	PASS
7.3.1.2				-18	Left side	4.76	-	PASS
			Intensity, RadialV	-18	Upper side	3.57	-	PASS
				-18	Lower side	6.19	-	PASS
7.3.3			Signal to noise/noise, Axial	20	Max	26.77	T3	PASS
7.3.3			Signal to noise/noise, RadialH	20	Right side	28.01	T3	PASS
7.3.3				20	Left side	24.69	T3	PASS
			Signal to noise/noise, RadialV	20	Upper side	21.51	T3	PASS
				20	Lower side	25.66	T3	PASS
7.3.2			Frequency reponse, Axial	0	-	1.84	-	PASS

## 12. ANNEX E CALIBRATION REPORT



### COMOHAC T-coil Probe Calibration Report

Ref: ACR.332.14.17.SATU.A

CCIC SOUTHERN ELECTRONIC PRODUCT  
TESTING (SHENZHEN) CO., LTD  
ELECTRONIC TESTING BUILDING, SHAHE ROAD, XILI  
TOWN  
SHENZHEN, P.R. CHINA (POST CODE:518055)  
MVG COMOHAC T-COIL PROBE  
SERIAL NO.: SN 24/11 TCP23

Calibrated at MVG US  
2105 Barrett Park Dr. - Kennesaw, GA 30144



Calibration Date: 11/27/19

#### Summary:

This document presents the method and results from an accredited COMOHAC T-coil Probe calibration performed in MVG USA using the COMOHAC test bench for use with a MVG COMOHAC system only. All calibration results are traceable to national metrology institutions.



## COMPACT-COIL PROBE CALIBRATION REPORT

REF ID: 111-1111111111

	Name	Function	Date	Signature
Prepared by:	Jérôme LUC	Product Manager	11/28/2019	
Checked by:	Jérôme LUC	Product Manager	11/28/2019	
Approved by:	Kim RUTKOWSKI	Quality Manager	11/28/2019	

	Customer Name
Distribution:	CCIC SOUTHERN ELECTRONIC PRODUCT TESTING (SHENZHEN) Co., Ltd

Issue	Date	Modifications
A	11/28/2017	Initial release

Page 27

This document shall not be reproduced, except in full or in part, without the prior written consent of MVG.  
The right to do so is granted, subject to the use only for the purpose for which it is intended and to no  
be resold to others or for further unauthorized reproduction of MVG.



## TABLE OF CONTENTS

1 Device Under Test.....	4
2 Product Description .....	4
2.1 General Information .....	4
3 Measurement Method .....	4
3.1 Sensitivity .....	4
3.2 Linearity .....	4
3.3 Signal to Noise Measurement of the Calibration System .....	5
4 Measurement Uncertainty .....	5
5 Calibration Measurement Results .....	5
5.1 Sensitivity .....	6
5.2 Linearity .....	6
5.3 Signal to Noise measurement of the Calibration System .....	6
6 List of Equipment.....	7

Page 3/7

This document shall not be reproduced, except in full or by work authorisation or the express consent of MVG.  
This right is not extended to the use only for the purpose of individual calibration and is to be  
de-restricted & released by your written written agreement of MVG.



## 1 DEVICE UNDER TEST

Device Under Test	
Device Type	COMOHACT-COIL PROBE
Manufacturer	MVG
Model	STCOIL
Serial Number	SN 24/11 TCP23
Product Condition (new /used)	Used
Frequency Range of Probe	200-3000 Hz

A yearly calibration interval is recommended.

## 2 PRODUCT DESCRIPTION

### 2.1 GENERAL INFORMATION

MVG's COMOHACT T-coil Probes are built in accordance to the ANSI C63.19 and IEEE 1027 standards.



Figure 1 - MVG COMOHACT-coil Probe

Coil Dimension	6.55mm length * 2.29 mm diameter
DC resistance	860.6 Ω
Wire size	51AWG
Inductance at 1 kHz	132.1 mH at 1 kHz

## 3 MEASUREMENT METHOD

All methods used to perform the measurements and calibrations comply with the ANSI C63.19 and IEEE 1027 standards. All measurements were performed using a Helmholtz coil built according to the specifications outlined in ANSI C63.19 and IEEE 1027.

### 3.1 SENSITIVITY

The T-coil was positioned within the Helmholtz coil in axial orientation. Using an audio generator connected to the input of the Helmholtz coil, a known field (1 A/m) was generated within the coil and the T-coil probe reading recorded over the frequency range of 100 Hz to 1000 Hz.

### 3.2 LINEARITY

The T-coil probe was positioned within the Helmholtz coil in axial orientation. The audio generator connected to the input of the Helmholtz coil was adjusted to obtain a field within the coil from 0 dB A/m to -50 dB A/m and the T-coil reading recorded at each power level (10 dB steps).

Page 4/7

This document shall not be reproduced, except in full or in part, without the written approval of MVG.  
No rights are or can be claimed to the work, only for the purposes for which it is intended, and to whom it is addressed & unless a written confirmation of use is obtained from MVG.



### 3.3 SIGNAL TO NOISE MEASUREMENT OF THE CALIBRATION SYSTEM

The T-coil probe was positioned within the Helmholtz coil in axial orientation. The audio generator connected to the input of the Helmholtz coil was adjusted to obtain a field of -50 dB A/m. The T-coil reading was recorded. The audio generator is then turned off and the T-coil reading recorded.

### 4 MEASUREMENT UNCERTAINTY

The guideline outlined in the IEEE ANSI C63.19 standard was followed to generate the measurement uncertainty for validation measurements. All uncertainties listed below represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ , traceable to the Internationally Accepted Guides to Measurement Uncertainty.

Uncertainty analysis of the T-coil probe calibration					
Uncertainty Component	Io1 (±dB)	Prob. Dist.	Div.	Uncertainty (dB)	Uncertainty (%)
Current/Voltage Accuracy	0.224	R	13	0.13	
Acoustic/Signal Source drift	0.008	R	13	0.00	
Probe coil sensitivity	0.2	R	13	0.12	
Positioning accuracy	0.4	R	13	0.23	
Acoustic Signal Receiver Accuracy	0.03	R	13	0.02	
Acoustic Signal Receiver Linearity	0.004	R	13	0.00	
System repeatability	0.4	N	1	0.40	
Combined Standard Uncertainty		N	1	0.49	
Expanded uncertainty (confidence level of 95% k = 2)		N	2	1.00	12.0


### 5 CALIBRATION MEASUREMENT RESULTS

Calibration Parameters	
Lab Temperature	21°C
Lab Humidity	45%




### 5.1 SENSITIVITY

Probe coil sensitivity relative to sensitivity at 1000 Hz

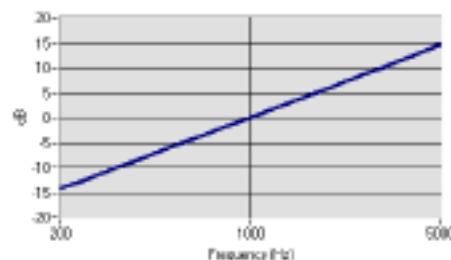

	Measured	Required
Sensitivity at 1 kHz	-60.24 dB (W/A/m)	-60.5 +/- 0.5 dB (W/A/m)
Max. deviation from Sensitivity	0.39 dB	+/- 0.5 dB

### 5.2 LINEARITY

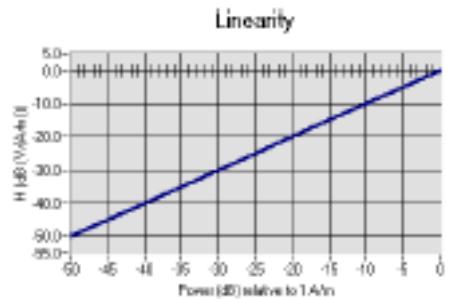

	Measured	Required
Linearity Slope	0.06 dB	+/- 0.5 dB

### 5.3 SIGNAL TO NOISE MEASUREMENT OF THE CALIBRATION SYSTEM

	Measured	Required
Signal to Noise	-72.58 dB A/m	'Reading with -50 dB A/m in coil - 'no signal applied' > 10 dB'

Page 67

This document shall not be reproduced, except in full or in part, or otherwise in any open-out-of-ENOC.  
The right to use the content of this document is to be used only for the purpose for which it is intended and is to be  
in accordance with the terms and conditions of the agreement of ENOC.



## 6 LIST OF EQUIPMENT

Equipment Summary Sheet				
Equipment Description	Manufacturer / Model	Identification No.	Current Calibration Date	Next Calibration Date
COMOHAC Test Bench	Versa 2	NA	Validated. No cal required.	Validated. No cal required.
Ardb Generator	National Instruments	152224E	02/2020	02/2021
Reference Probe	MVG	TCP 18 SN 47/10	10/2019	10/2020
Multimeter	Keithley 2000	1188666	01/2020	01/2021
HeimholtzColl	MVG	HCDT SN47/10	Validated. No cal required.	Validated. No cal required.
Temperature / Humidity Sensor	Control Company	1507 98832	11/2017	11/2020

Page 7/7

This document shall not be reproduced, except in full or in part, or otherwise in any manner or in any copy of it, of NYG.  
 This right, however, is granted to the user, only for the purpose of validating its calibration and to use it  
 in accordance with its original intended purpose of NYG.

—————End of the Report—————