

FCC TEST REPORT


Applicant	BenQ Corporation
Address	16 Jihu Road, Neihu, Taipei 114, Taiwan

Manufacturer or Supplier	BenQ Corporation
Address	16 Jihu Road, Neihu, Taipei 114, Taiwan
Product	Interactive Flat Panel
Brand Name	BenQ
Model	RP7503
Additional Model & Model Difference	RP7503*, VA7503* (* means 0~9, A~Z or blank); See item 2.1
Date of tests	Mar. 14, 2022 ~ Apr. 25, 2022 Sep. 16, 2022 ~ Oct. 21, 2022 Apr. 26, 2023 ~ Jun. 21, 2023

The submitted sample of the above equipment has been tested for according to the requirements of the following standards:

☒ **FCC Part 15, Subpart B, Class B (sDoC)**

CONCLUSION: The submitted sample was found to COMPLY with the test requirement

Tested by Andy Zhu Supervisor / EMC Department	Approved by Madison Luo Assistant Manager / EMC Department
	
	Date: Jul. 05, 2023

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

Table of Contents

RELEASE CONTROL RECORD	3
1 SUMMARY OF TEST RESULTS	4
1.1 MEASUREMENT UNCERTAINTY	4
2 GENERAL INFORMATION	5
2.1 GENERAL DESCRIPTION OF EUT	5
2.2 DESCRIPTION OF TEST MODES	7
2.3 DESCRIPTION OF SUPPORT UNITS	10
3 EMISSION TEST	11
3.1 CONDUCTED EMISSION MEASUREMENT	11
3.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT	11
3.1.2 TEST INSTRUMENTS	11
3.1.3 TEST PROCEDURE	12
3.1.4 DEVIATION FROM TEST STANDARD	12
3.1.5 TEST SETUP	13
3.1.6 EUT OPERATING CONDITIONS	13
3.1.7 TEST RESULTS	14
3.2 RADIATED EMISSION MEASUREMENT	16
3.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT	16
3.2.2 TEST INSTRUMENTS	18
3.2.3 TEST PROCEDURE	19
3.2.4 DEVIATION FROM TEST STANDARD	20
3.2.5 TEST SETUP	21
3.2.6 EUT OPERATING CONDITIONS	21
3.2.7 TEST RESULTS (BELOW 1GHz)	22
3.2.8 TEST RESULTS (ABOVE 1GHz)	24
4 APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	26

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
FS2203WDG0106	Original release	May 11, 2022
FS2209WDG0164	Based on the report FS2203WDG0106, 1. added a new mainboard(Main Board type B) 2. added a new front panel(Front board type B) 3. added two OPS boards (OPS Board type B & OPS Board type C) It needs to be retested all test items after engineer evaluated.	Nov. 24, 2022
FS2212WDG0200	Based on the original report FS2209WDG0164 add 5.8GHz Microwave Radar Module, aim at 5.8G Microwave Radar Module function it needed to be retest all items after engineer evaluated.	Jul. 05, 2023

1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD			
Standard Section	Test Item	Result	Remark
FCC Part 15, Subpart B, Class B (sDoC)	Conducted test	PASS	Meets limits minimum passing margin is -3.92dB at 0.16787MHz
	Radiated Emission Test (30MHz ~ 1GHz)	PASS	Meets limits minimum passing margin is -4.90dB at 30.00MHz
	Radiated Emission Test (Above 1GHz)	PASS	Meets limits minimum passing margin is -5.21dB at 23200.00MHz

Remark: 1.Please refer to FCC part 2 2.1077 for sDoC compliance information requirement.

1.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emission test	0.15MHz ~ 30MHz	+/- 3.05 dB
Radiated emissions	30MHz ~ 1GHz	+ /- 4.79 dB
	Above 1GHz	+/- 5.14 dB



2 GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Interactive Flat Panel
MODELS NO.	RP7503
ADDITIONAL MODELS	RP7503*, VA7503* (* means 0~9, A~Z or blank)
FCC ID	JVPRP7503NFC
FCC ID	2AQ5R-RDWM15209
POWER SUPPLY	AC 100-240V 50/60Hz
CABLE SUPPLIED	Power cord*7: Unshielded, Detachable 3m HDMI Cable: Shielded, Detachable 3m with two cores Touch USB Cable: Shielded, Detachable 3m VGA Cable: Shielded, Detachable 3m with two cores USB Type-C Cable: Shielded, Detachable 1.5m
THE HIGHEST OPERATING FREQUENCY	1.8GHz
ACCESSORY	IR Remote Control; Touch Pen; Wireless USB Adapter

NOTES:

1. This is a supplementary report of Report No.: FS2209WDG0164. The differences between them are as below information:

Report No.		Sample configuration No.	Difference	Test item
Original	FS2203WDG0106	#1	Main Board type A, Front board type A, OPS Board type A	Full test
The first supplementary	FS2209WDG0164	#2	Main Board type B, Front board type B, OPS Board type B	Full test
		#3	Main Board type B, Front board type B, OPS Board type C	Partial test (RE)
The second supplementary	FS2212WDG0200	#1	Main Board type A, Front board type A, OPS Board type A, Add a 5.8GHz Microwave Radar Module	5.8GHz Microwave Radar function full test
		#2	Main Board type B, Front board type B, OPS Board type B, Add a 5.8GHz Microwave Radar Module	5.8GHz Microwave Radar function full test
		#3	Main Board type B, Front board type B, OPS Board type C, Add a 5.8GHz Microwave Radar Module	5.8GHz Microwave Radar function Partial test (RE)

2. All the above test items met the requirements. But only the worst case was shown in test report.
3. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
4. Please refer to the EUT photo document (Reference No.: 2212WDG0200) for detailed product photo.
5. Additional models (see above table) are identical with the test model RP7503 except model number for trading purpose.

6. Details of the remote control are as follows:

Remote control	Brand:	BenQ
	Model:	TRY01
	Power Supply:	DC3V(AAA/1.5V*2) from battery

7. Details of the Wireless USB Adapter are as follows:

Wireless USB Adapter 1	Brand:	BenQ
	Model:	TDY31
	Power Supply:	DC 5V From USB Host Unit
Wireless USB Adapter 2	Brand:	BenQ
	Model:	WD02AT
	Power Supply:	DC 5V From USB Host Unit

2.2 DESCRIPTION OF TEST MODES

The EUT was tested under the following modes. And the final worst mode was marked in boldface and recorded in this report.

◆ FOR CONDUCTED EMISSION TEST FOR AC MAINS POWER PORT:

NO.	Test Mode	Sample No.	Test Voltage
1	RJ45 1 Data Transmitting 1000Mbps (More than 10%) + VGA In (1920*1080, 60Hz) + PC Audio In + MIC In + PC Touch(32767x32767) + RS232 Data Transmitting + HDMI Out	#1, #2	AC 120/60Hz
2	RJ45 1 Data Transmitting 100Mbps (More than 10%) + VGA In (1024*768, 60Hz) + PC Audio In + MIC In + PC Touch(32767x32767) + RS232 Data Transmitting + HDMI Out		
3	RJ45 1 Data Transmitting 10Mbps (More than 10%) + VGA In (640*480, 60Hz) + PC Audio In + MIC In + PC Touch(32767x32767) + RS232 Data Transmitting + HDMI Out		
4	RJ45 2 Data Transmitting 1000Mbps (More than 10%) + VGA In (1920*1080, 60Hz) + Audio In + MIC In + PC Touch(32767x32767) + RS232 Data Transmitting + HDMI Out		
5	WD02AT(WIFI Link Data Transmitting) + VGA In (1920*1080, 60Hz) + Audio In + MIC In + PC Touch(32767x32767) + RS232 Data Transmitting + HDMI Out + NFC		
6	TWY31(WIFI Link Data Transmitting) + VGA In (1920*1080, 60Hz) + Audio In + MIC In + PC Touch(32767x32767) + RS232 Data Transmitting + HDMI Out + NFC		
7	RJ45 1 Data Transmitting 1000Mbps (More than 10%) + HDMI In (3840*2160,60Hz) + MIC In + PC Touch(32767x32767) + RS232 Data Transmitting + HDMI Out		
8	RJ45 1 Data Transmitting 1000Mbps (More than 10%) + HDMI In (1920*1080, 60Hz) + MIC In + PC Touch(32767x32767) + RS232 Data Transmitting + HDMI Out		
9	RJ45 1 Data Transmitting 1000Mbps (More than 10%) + HDMI In (640*480, 60Hz) + MIC In + PC Touch(32767x32767) + RS232 Data Transmitting + HDMI Out		
10	RJ45 1 Data Transmitting 1000Mbps (More than 10%) + HDMI1 In (3840*2160,60Hz) + MIC In + PC Touch(32767x32767) + RS232 Data Transmitting + HDMI Out		
11	RJ45 1 Data Transmitting 1000Mbps (More than 10%) + HDMI2 In(3840*2160,60Hz) + MIC In + PC Touch(32767x32767) + RS232 Data Transmitting + HDMI Out		
12	RJ45 1 Data Transmitting 1000Mbps (More than 10%) + DP In(3840*2160,60Hz) + MIC In + PC Touch(32767x32767) + RS232 Data Transmitting + HDMI Out		
13	RJ45 1 Data Transmitting 1000Mbps (More than 10%) + Type-C(Front) In(3840*2160,60Hz) + MIC In + PC Touch(32767x32767) + RS232 Data Transmitting + HDMI Out		
14	RJ45 1 Data Transmitting 1000Mbps (More than 10%) + OPS (3840*2160, 60Hz) + MIC In + PC Touch(32767x32767) + RS232 Data Transmitting + HDMI Out		
15	RJ45 1 Data Transmitting 1000Mbps (More than 10%) + OPS (1920*1080, 60Hz) + MIC In + PC Touch(32767x32767) + RS232 Data Transmitting + HDMI Out		
16	RJ45 1 Data Transmitting 1000Mbps (More than 10%) + OPS (640*480, 60Hz) + MIC In + PC Touch(32767x32767) + RS232 Data Transmitting + HDMI Out		
17	RJ45 1 Data Transmitting 1000Mbps (More than 10%)+ USB 3.0*5 Data Transmitting + USB 2.0*2 Data Transmitting + Type-C(Back) Data Transmitting + stand-alone MP4 Playing + MIC In + Touch(32767x32767)		
18	RJ45 1 Data Transmitting 100Mbps (More than 10%) + VGA In (1024*768, 60Hz) + PC Audio In + MIC In + PC Touch(32767x32767) + RS232 Data Transmitting + HDMI Out + Audio out		
19	RJ45 1 Data Transmitting 100Mbps (More than 10%) + VGA In (1024*768, 60Hz) + PC Audio In + MIC In + PC Touch(32767x32767) + RS232 Data Transmitting + HDMI Out + SPDIF out		
20	Standby		
21	5.8G Radio determination		



◆ FOR RADIATED EMISSIONS TEST (BELOW 1GHz) :

NO.	Test Mode	Sample No.	Test Voltage
1	RJ45 1 Data Transmitting 1000Mbps (More than 10%) + VGA In (1920*1080, 60Hz) + PC Audio In + MIC In+ PC Touch(32767x32767) + RS232 Data Transmitting + HDMI Out	#1, #2	AC 120/60Hz
2	RJ45 1 Data Transmitting 100Mbps (More than 10%) + VGA In (1024*768, 60Hz) + PC Audio In + MIC In + PC Touch(32767x32767) + RS232 Data Transmitting + HDMI Out		
3	RJ45 1 Data Transmitting 10Mbps (More than 10%) + VGA In (640*480, 60Hz) + PC Audio In + MIC In + PC Touch(32767x32767) + RS232 Data Transmitting + HDMI Out		
4	RJ45 2 Data Transmitting 1000Mbps (More than 10%) + VGA In (1920*1080, 60Hz) + Audio In + MIC In + PC Touch(32767x32767) + RS232 Data Transmitting + HDMI Out		
5	WD02AT(WIFI Link Data Transmitting) + VGA In (1920*1080, 60Hz) + Audio In + MIC In + PC Touch(32767x32767) + RS232 Data Transmitting + HDMI Out + NFC		
6	TWY31(WIFI Link Data Transmitting) + VGA In (1920*1080, 60Hz) + Audio In + MIC In + PC Touch(32767x32767) + RS232 Data Transmitting + HDMI Out + NFC		
7	RJ45 1 Data Transmitting 1000Mbps (More than 10%) + HDMI In (3840*2160,60Hz) + MIC In + PC Touch(32767x32767) + RS232 Data Transmitting + HDMI Out		
8	RJ45 1 Data Transmitting 1000Mbps (More than 10%) + HDMI In (1920*1080, 60Hz) + MIC In + PC Touch(32767x32767) + RS232 Data Transmitting + HDMI Out		
9	RJ45 1 Data Transmitting 1000Mbps (More than 10%) + HDMI In (640*480, 60Hz) + MIC In + PC Touch(32767x32767) + RS232 Data Transmitting + HDMI Out		
10	RJ45 1 Data Transmitting 1000Mbps (More than 10%) + HDMI1 In (3840*2160,60Hz) + MIC In + PC Touch(32767x32767) + RS232 Data Transmitting + HDMI Out		
11	RJ45 1 Data Transmitting 1000Mbps (More than 10%) + HDMI2 In(3840*2160,60Hz) + MIC In + PC Touch(32767x32767) + RS232 Data Transmitting + HDMI Out		
12	RJ45 1 Data Transmitting 1000Mbps (More than 10%) + DP In(3840*2160,60Hz) + MIC In + PC Touch(32767x32767) + RS232 Data Transmitting + HDMI Out		
13	RJ45 1 Data Transmitting 1000Mbps (More than 10%) + Type-C(Front) In(3840*2160,60Hz) + MIC In + PC Touch(32767x32767) + RS232 Data Transmitting + HDMI Out		
14	RJ45 1 Data Transmitting 1000Mbps (More than 10%) + OPS (3840*2160, 60Hz) + MIC In + PC Touch(32767x32767) + RS232 Data Transmitting + HDMI Out		
15	RJ45 1 Data Transmitting 1000Mbps (More than 10%) + OPS (1920*1080, 60Hz) + MIC In + PC Touch(32767x32767) + RS232 Data Transmitting + HDMI Out		
16	RJ45 1 Data Transmitting 1000Mbps (More than 10%) + OPS (640*480, 60Hz) + MIC In + PC Touch(32767x32767) + RS232 Data Transmitting + HDMI Out		
17	RJ45 1 Data Transmitting 1000Mbps (More than 10%)+ USB 3.0*5 Data Transmitting + USB 2.0*2 Data Transmitting + Type-C(Back) Data Transmitting + stand-alone MP4 Playing + MIC In + Touch(32767x32767)		
18	RJ45 1 Data Transmitting 100Mbps (More than 10%) + VGA In (1024*768, 60Hz) + PC Audio In + MIC In + PC Touch(32767x32767) + RS232 Data Transmitting + HDMI Out + Audio out		
19	RJ45 1 Data Transmitting 100Mbps (More than 10%) + VGA In (1024*768, 60Hz) + PC Audio In + MIC In + PC Touch(32767x32767) + RS232 Data Transmitting + HDMI Out + SPDIF out		
20	Standby		
21	RJ45 1 Data Transmitting 1000Mbps (More than 10%) + OPS (3840*2160, 60Hz) + MIC In + PC Touch(32767x32767) + RS232 Data Transmitting + HDMI Out	#3	
22	5.8G Radio determination	#1, #2, #3	

◆ **FOR RADIATED EMISSIONS TEST (ABOVE 1GHz) :**

NO.	Test Mode	Sample No.	Test Voltage
1	RJ45 1 Data Transmitting 1000Mbps (More than 10%) + VGA In (1920*1080, 60Hz) + PC Audio In + MIC In + PC Touch(32767x32767) + RS232 Data Transmitting + HDMI Out	#1, #2	AC 120/60Hz
2	RJ45 1 Data Transmitting 100Mbps (More than 10%) + VGA In (1024*768, 60Hz) + PC Audio In + MIC In + PC Touch(32767x32767) + RS232 Data Transmitting + HDMI Out		
3	RJ45 1 Data Transmitting 10Mbps (More than 10%) + VGA In (640*480, 60Hz) + PC Audio In + MIC In + PC Touch(32767x32767) + RS232 Data Transmitting + HDMI Out		
4	RJ45 2 Data Transmitting 1000Mbps (More than 10%) + VGA In (1920*1080, 60Hz) + Audio In + MIC In + PC Touch(32767x32767) + RS232 Data Transmitting + HDMI Out		
5	WD02AT(WIFI Link Data Transmitting) + VGA In (1920*1080, 60Hz) + Audio In + MIC In + PC Touch(32767x32767) + RS232 Data Transmitting + HDMI Out + NFC		
6	TWY31(WIFI Link Data Transmitting) + VGA In (1920*1080, 60Hz) + Audio In + MIC In + PC Touch(32767x32767) + RS232 Data Transmitting + HDMI Out + NFC		
7	RJ45 1 Data Transmitting 1000Mbps (More than 10%) + HDMI In (3840*2160,60Hz) + MIC In + PC Touch(32767x32767) + RS232 Data Transmitting + HDMI Out		
8	RJ45 1 Data Transmitting 1000Mbps (More than 10%) + HDMI In (1920*1080, 60Hz) + MIC In + PC Touch(32767x32767) + RS232 Data Transmitting + HDMI Out		
9	RJ45 1 Data Transmitting 1000Mbps (More than 10%) + HDMI In (640*480, 60Hz) + MIC In + PC Touch(32767x32767) + RS232 Data Transmitting + HDMI Out		
10	RJ45 1 Data Transmitting 1000Mbps (More than 10%) + HDMI1 In (3840*2160,60Hz) + MIC In + PC Touch(32767x32767) + RS232 Data Transmitting + HDMI Out		
11	RJ45 1 Data Transmitting 1000Mbps (More than 10%) + HDMI2 In(3840*2160,60Hz) + MIC In + PC Touch(32767x32767) + RS232 Data Transmitting + HDMI Out		
12	RJ45 1 Data Transmitting 1000Mbps (More than 10%) + DP In(3840*2160,60Hz) + MIC In + PC Touch(32767x32767) + RS232 Data Transmitting + HDMI Out		
13	RJ45 1 Data Transmitting 1000Mbps (More than 10%) + Type-C(Front) In(3840*2160,60Hz) + MIC In + PC Touch(32767x32767) + RS232 Data Transmitting + HDMI Out		
14	RJ45 1 Data Transmitting 1000Mbps (More than 10%) + OPS (3840*2160, 60Hz) + MIC In + PC Touch(32767x32767) + RS232 Data Transmitting + HDMI Out		
15	RJ45 1 Data Transmitting 1000Mbps (More than 10%) + OPS (1920*1080, 60Hz) + MIC In + PC Touch(32767x32767) + RS232 Data Transmitting + HDMI Out		
16	RJ45 1 Data Transmitting 1000Mbps (More than 10%) + OPS (640*480, 60Hz) + MIC In + PC Touch(32767x32767) + RS232 Data Transmitting + HDMI Out		
17	RJ45 1 Data Transmitting 1000Mbps (More than 10%)+ USB 3.0*5 Data Transmitting + USB 2.0*2 Data Transmitting + Type-C(Back) Data Transmitting + stand-alone MP4 Playing + MIC In + Touch(32767x32767)		
18	RJ45 1 Data Transmitting 100Mbps (More than 10%) + VGA In (1024*768, 60Hz) + PC Audio In + MIC In + PC Touch(32767x32767) + RS232 Data Transmitting + HDMI Out + Audio out		
19	RJ45 1 Data Transmitting 100Mbps (More than 10%) + VGA In (1024*768, 60Hz) + PC Audio In + MIC In + PC Touch(32767x32767) + RS232 Data Transmitting + HDMI Out + SPDIF out		
20	Standby		
21	RJ45 1 Data Transmitting 1000Mbps (More than 10%) + OPS (3840*2160, 60Hz) + MIC In + PC Touch(32767x32767) + RS232 Data Transmitting + HDMI Out	#3	
22	5.8G Radio determination	#1, #2, #3	

2.3 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	Personal Computer	DELL	Vostro 230	357PV2X	N/A
2	Notebook	DELL	E6420	9H12FS1	N/A
3	Mouse	DELL	MOC5UO	J0Z008H3	N/A
4	Keyboard	DELL	L100	CN-0RH656-65890-14P-04AX	N/A
5	Printer	HP	hp LaserJet 1300	CNSJF75989	N/A
6	Monitor	Lenovo	L2364wA	0ML0041C3224759	N/A
7	Speaker	Lenovo	C3630	OS1186521101945	N/A
8	Microphone	WEISRE	M-6900	N/A	N/A
9	Monitor	Lenovo	T2054pC	VNA1ZPFD	N/A
10	2.0HDD	WD	WD3200BUCT	WXD1EB3UKK17	N/A
11	2.0HDD	WD	WD3200BUCT	WXA1A2489961	N/A
12	3.0 HDD	WD	WDBPCK5000ABK	WX11AB2P3094	N/A
13	3.0 HDD	WD	WDBPCK5000ABK	WX11AB2L0899	N/A
14	USB Driver 3.0(16G)	Kingston	DTSE9G2/16GB	YVLP9-B8HTAQ-XXAYB	N/A
15	USB Driver 3.0(16G)	Kingston	DTSE9G2/16GB	AQLJC-M8CTFB-UXTNB	N/A
16	USB Driver 3.0(16G)	Kingston	DTSE9G2/16GB	BQL94-F8HT4C-KX266	N/A
17	Type-C Driver 32GB	Kingston	DTDU03C	NVLC2-C84TDX-XXD4F	N/A
18	OPS	BenQ	IE1004	ISIE1004X203K0003	N/A

NO.	DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	AC Line: Unshielded, Detachable 1.8m, RJ45 Line: Non-shielded Detachable
2	AC Line: Unshielded, Detachable 0.8m, DC Line: Unshielded, Detachable 1.5m.
3	USB Line: Shielded, Non-Detachable 1.8m.
4	USB Line: Shielded, Non-Detachable 1.8m.
5	AC Line: Unshielded, Detachable 1.8m, USB Line: Unshielded, Detachable 1.5m.
6	AC Line: Unshielded, Detachable 1.8m, HDMI Line: Shielded, Detachable 1.8m.
7	AC Line: Unshielded, Detachable 1.8m, Audio Line: Unshielded, Detachable 1.5m. SPDIF Line: Unshielded, Detachable 1.5m.
8	Microphone Line: Unshielded, Non-Detachable 1.5m.
9	AC Line: Unshielded, Detachable 1.8m.
10 ~ 11	USB Line: Shielded, Detachable 0.8m.
12 ~ 13	USB Line: Shielded, Detachable 0.8m.
14 ~ 18	N/A

Remarks: Radiated emission test used 0.5m and 10m Shielded RJ45 Cat 7e line, Conducted emission test used 0.5m and 3.0m RJ45 line.



3 EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

TEST STANDARD: FCC Part 15, Subpart B (Section: 15.107)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 - 0.5	79	66	66 - 56	56 - 46
0.50 - 5.0	73	60	56	46
5.0 - 30.0	73	60	60	50

- NOTES:**
- (1) The lower limit shall apply at the transition frequencies.
 - (2) The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
 - (3) All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

3.1.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESR7	101494	Jan. 10,24
Artificial Mains Network	Rohde&Schwarz	ENV216	101173	Jan. 11,24
Artificial Mains Network	Rohde&Schwarz	ESH3-Z5	100317	Jan. 10,24
Voltage probe	SCHWARZBECK	TK 9421	TK 9421-176	Jul. 27, 23
Coaxial RF Cable	SUHNER	RG 223/U-CE	C2310066DG	Jul. 24, 23
Test software	ADT	ADT_Cond_V7.3.7	N/A	N/A

- NOTES:**
1. The test was performed at Shielded Room 553.
 2. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.

3.1.3 TEST PROCEDURE

The basic test procedure was in accordance with ANSI C63.4:2014 amended as per ANSI C63.4a:2017.

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150 kHz to 30 MHz was searched. Emission levels under (Limit – 20dB) were not recorded.

NOTES:


1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

3.1.4 DEVIATION FROM TEST STANDARD

No deviation.



3.1.5 TEST SETUP

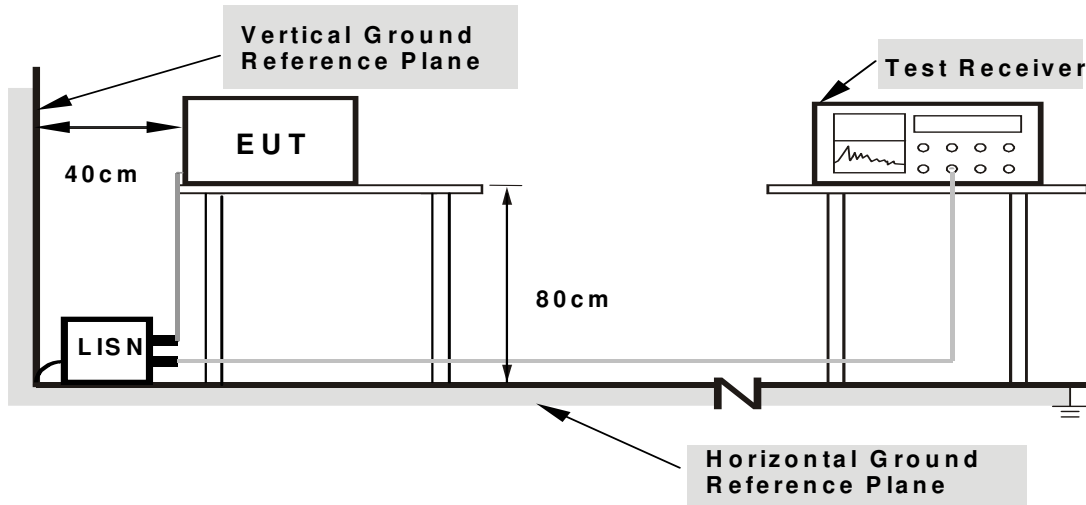

Note: 1.Support units were connected to second LISN.
2.Both of LISNs (AMN) are 80cm from EUT and at least 80cm from other units and other metal planes support units.

3.1.6 EUT OPERATING CONDITIONS

- Turned on the power of all equipment.
- EUT was operated according to the type description in manufacturer's specifications or the User's Manual.




3.1.7 TEST RESULTS

TEST MODE	See section 2.2	6DB BANDWIDTH	9 kHz
TEST VOLTAGE	AC 120V 60Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	25deg. C, 58% RH	TESTED BY	Joany

No.	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	9.90	38.23	27.05	48.13	36.95	66.00	56.00	-17.87	-19.05
2	0.16575	9.91	44.74	41.15	54.65	51.06	65.17	55.17	-10.52	-4.11
3	0.23550	9.93	30.43	20.48	40.36	30.41	62.25	52.25	-21.89	-21.84
4	0.82950	10.01	26.60	19.40	36.61	29.41	56.00	46.00	-19.39	-16.59
5	9.40200	10.29	30.81	25.69	41.10	35.98	60.00	50.00	-18.90	-14.02
6	14.32050	10.36	25.88	18.27	36.24	28.63	60.00	50.00	-23.76	-21.37

REMARK: The emission levels of other frequencies were very low against the limit.

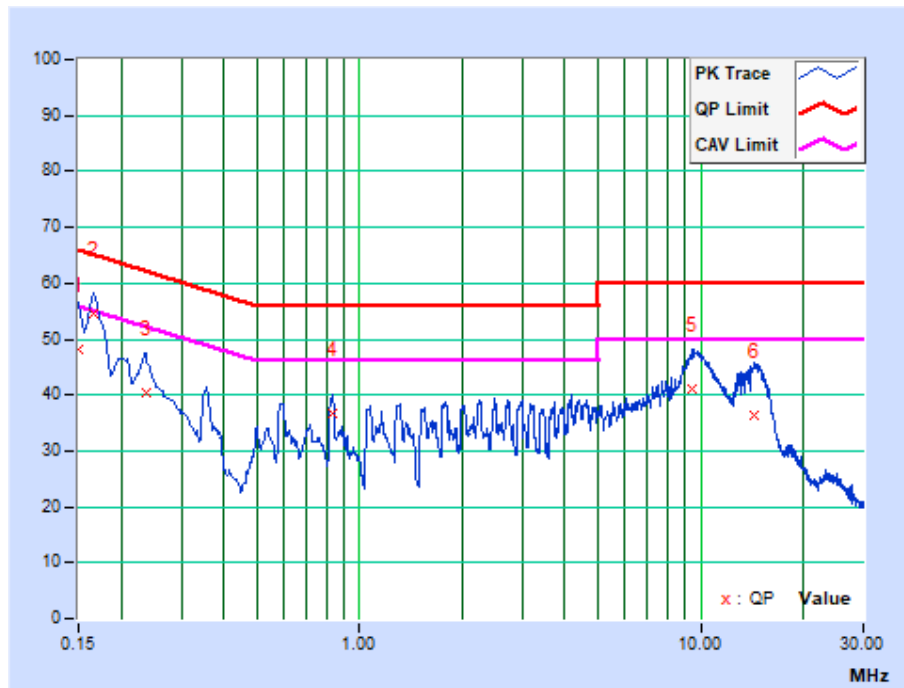




**BUREAU
VERITAS**

Test Report No.: FS2212WDG0200

TEST MODE	See section 2.2	6DB BANDWIDTH	9 kHz
TEST VOLTAGE	AC 120V 60Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	25deg. C, 58% RH	TESTED BY	Joany

No.	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	9.84	38.43	27.48	48.27	37.32	66.00	56.00	-17.73	-18.68
2	0.16787	9.84	44.80	41.30	54.64	51.14	65.07	55.07	-10.42	-3.92
3	0.23290	9.85	29.70	22.58	39.55	32.43	62.35	52.35	-22.79	-19.91
4	0.83152	9.88	27.05	20.45	36.93	30.33	56.00	46.00	-19.07	-15.67
5	9.80475	10.13	29.27	24.21	39.40	34.34	60.00	50.00	-20.60	-15.66
6	15.55125	10.25	29.56	21.62	39.81	31.87	60.00	50.00	-20.19	-18.13

REMARK: The emission levels of other frequencies were very low against the limit.

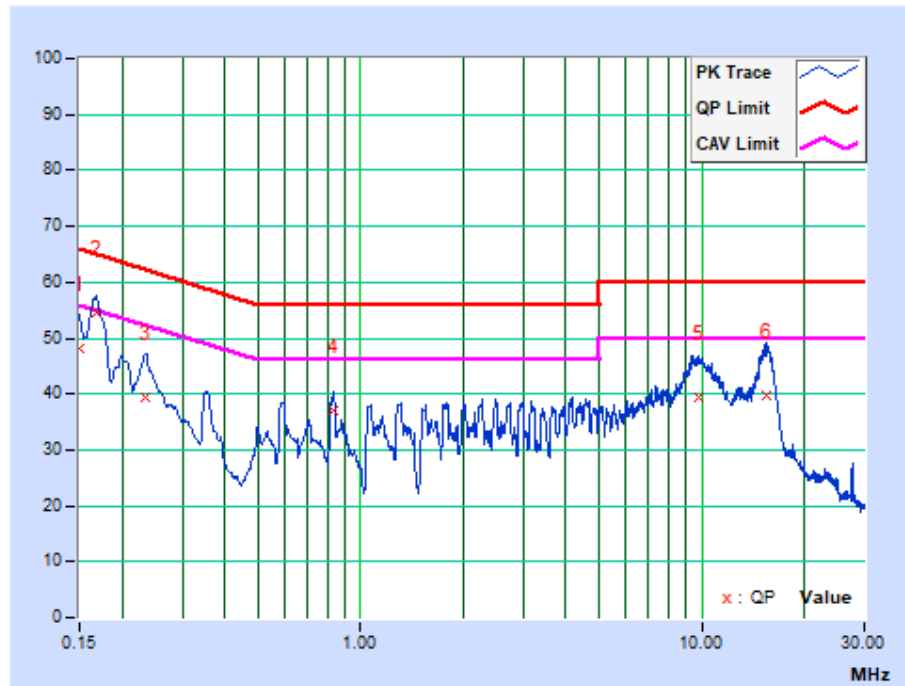

3.2 RADIATED EMISSION MEASUREMENT

3.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

TEST STANDARD: FCC Part 15, Subpart B (Section: 15.109)

Emissions radiated outside of the specified bands, shall be according to the general radiated limits as following:

Radiated Emissions Limits at 10 meters (dBµV/m)				
Frequencies (MHz)	FCC 15B Class A	FCC 15B Class B	CISPR 22, Class A	CISPR 22, Class B
30-88	39	29.5	40	30
88-216	43.5	33.1		
216-230	46.4	35.6		
230-960			47	37
960-1000	49.5	43.5		

Radiated Emissions Limits at 3 meters (dB μ V/m)		
Frequencies (MHz)	FCC 15B, Class A	FCC 15B, Class B
30-88	49.5	40
88-216	54	43.5
216-230	56.9	46
230-960		
960-1000	60	54
1000-3000	Avg: 60	Avg: 54
Above 3000	Peak: 80	Peak: 74

FREQUENCY RANGE OF RADIATED MEASUREMENT

(For unintentional radiators)

Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz)	Range (MHz)
Below 1.705	30
1.705 – 108	1000
108 – 500	2000
500 – 1000	5000
Above 1000	5th harmonic of the highest frequency or 40 GHz, whichever is lower

- Notes: (1) The lower limit shall apply at the transition frequencies.
 (2) Emission level (dBuV/m) = 20 log Emission level (uV/m).
 (3) All emanation from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.



3.2.2 TEST INSTRUMENTS

FREQUENCY RANGE BELOW 1GHz

Equipment	Manufacturer	Model No.	Serial No.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESU26	100005	Apr. 19, 24
EMI Test Receiver	Rohde&Schwarz	ESR7	101564	Jan. 10, 24
Trilog-Broadband Antenna	SCHWARZBECK	VULB 9168	9168-555	Jan. 08, 24
Trilog-Broadband Antenna	SCHWARZBECK	VULB 9168	9168-554	Jan. 08, 24
Preamplifier	EMCI	EMC1135	980378	Mar. 06, 24
Preamplifier	EMCI	EMC1135	980423	Mar. 06, 24
10m Semi-anechoic Chamber	CHANGLING	21.4m*12.1m*8.8m	NSEMC006	Oct. 15, 23
Coaxial RF Cable	/	10m Below 1GHz	C2310084DG	Jul. 26, 23
Coaxial RF Cable	/	10m Below 1GHz	C2310085DG	Jul. 26, 23
Test Software	ADT	ADT_Radiated_V8.7.07	N/A	N/A

- NOTES:**
1. The test was performed in 10m Chamber.
 2. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
 3. The FCC Site Registration No. is 749762.

FREQUENCY RANGE ABOVE 1GHz

Equipment	Manufacturer	Model No.	Serial No.	Next Cal.
Horn Antenna	ETS-Lindgren	3117	00085519	Nov. 05, 23
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170147	Apr. 28, 24
Signal and Spectrum Analyzer	Rohde&Schwarz	FSV40	101003	Jan. 11, 24
Broadband Preamplifier (1~18GHz)	SCHWARZBECK	BBV 9718C	00101	Nov. 27, 23
Pre-Amplifier (18GHz-40GHz)	EMCI	EMC 184045	980102	Jan. 16, 24
Coaxial RF Cable	/	10m Above 1GHz	C2310041DG	Dec .13, 23
Test Software	ADT	ADT_Radiated_V8.7.07	N/A	N/A

- NOTES:**
1. The test was performed in 10m Chamber.
 2. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
 3. The FCC Site Registration No. is 749762.

3.2.3 TEST PROCEDURE

The basic test procedure was in accordance with ANSI C63.4:2014 amended as per ANSI C63.4a:2017.

<Frequency Range below 1GHz>

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter semi-anechoic chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from 1 meter to 4 meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1GHz.

NOTES:

1. The resolution bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. $\text{Emission level(dBuV/m)} = \text{Raw Value(dBuV)} + \text{Correction Factor(dB/m)}$
3. $\text{Correction Factor(dB/m)} = \text{Antenna Factor (dB/m)} + \text{Cable Factor (dB)}$ (if the raw value not contains the amplifier)
4. $\text{Correction Factor (dB/m)} = \text{Antenna Factor (dB/m)} + \text{Cable Factor (dB)} - \text{Amplifier Gain(dB)}$ (if the raw value contains the amplifier)
5. $\text{Margin value} = \text{Emission level} - \text{Limit value}$

<Frequency Range above 1GHz>

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna can be varied from one meter to four meters, the height of adjustment depends on the EUT height and the antenna 3dB beamwidth both, to detect the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. The bore sight should be used during the test above 1GHz.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test receiver/spectrum was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.

NOTES:

1. The resolution bandwidth is 1MHz and video bandwidth of test receiver/spectrum analyzer is 3MHz for Peak detection at frequency above 1GHz. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz for Average detection (AV) at frequency above 1GHz.
2. For measurement of frequency above 1000 MHz, the EUT was set 10 meters away from the receiver antenna.
3. $\text{Emission level(dBuV/m)} = \text{Raw Value(dBuV)} + \text{Correction Factor(dB/m)}$
4. $\text{Correction Factor(dB/m)} = \text{Antenna Factor (dB/m)} + \text{Cable Factor (dB)}$ (if the raw value not contains the amplifier)
5. $\text{Correction Factor (dB/m)} = \text{Antenna Factor (dB/m)} + \text{Cable Factor (dB)} - \text{Amplifier Gain(dB)}$ (if the raw value contains the amplifier).
6. $\text{Margin value} = \text{Emission level} - \text{Limit value}$


3.2.4 DEVIATION FROM TEST STANDARD

No deviation.




3.2.5 TEST SETUP

<Frequency Range below 1GHz>

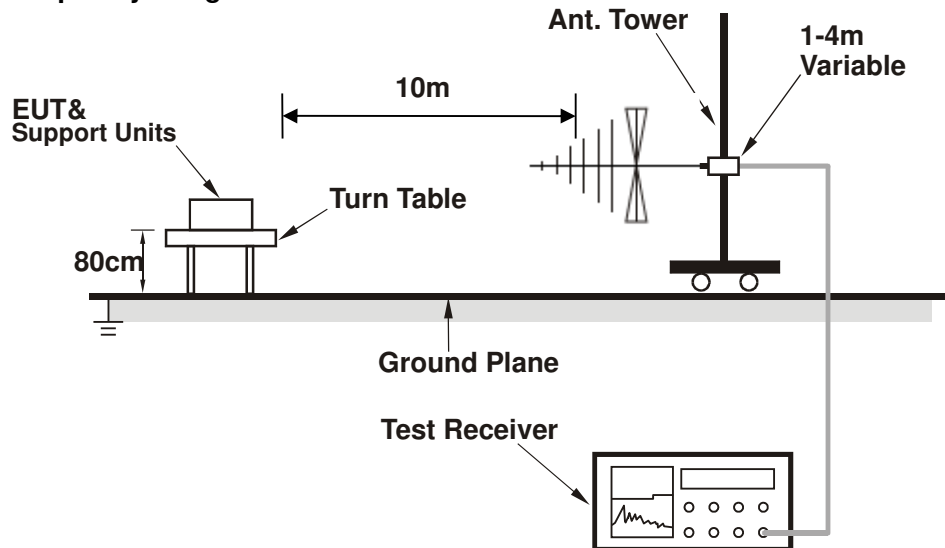

<Frequency Range above 1GHz>

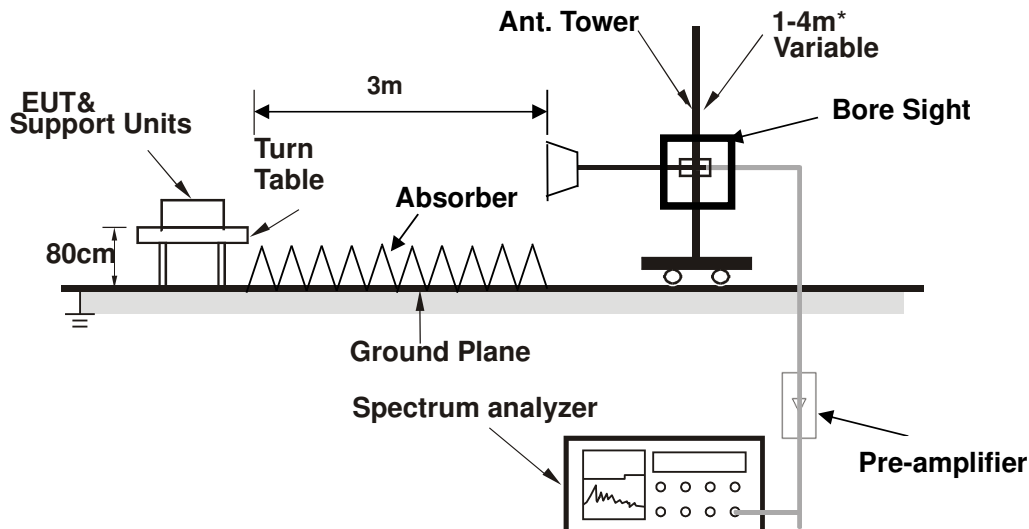

* : depends on the EUT height and the antenna 3dB beamwidth both, refer to section 7.3 of CISPR 16-2-3.

3.2.6 EUT OPERATING CONDITIONS

See items 3.1.6.




3.2.7 TEST RESULTS (BELOW 1GHz)

TEST MODE	See section 2.2	FREQUENCY RANGE	30-1000MHz
TEST VOLTAGE	AC 120V 60Hz	DETECTOR FUNCTION & RESOLUTION BANDWIDTH	Quasi-Peak, 120kHz
ENVIRONMENTAL CONDITIONS	22deg. C, 58% RH	TESTED BY:	Alex

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 10 M								
No.	Freq. (MHz)	Correction Factor (dB/m)	Raw Value (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)
1	159.00	-20.64	44.74	24.10	33.10	-9.00	200	23
2	368.53	-17.48	45.38	27.90	35.60	-7.70	400	82
3	426.73	-15.70	45.10	29.40	35.60	-6.20	400	95
4	480.20	-14.55	41.17	26.62	35.60	-8.98	200	337
5	625.10	-11.60	42.09	30.49	35.60	-5.11	400	117
6	875.11	-7.96	38.59	30.63	35.60	-4.97	400	300


- REMARKS:**
1. Peak detector quick scan is showed on the graph and final quasi-peak detector data is measured corresponding to relevant limit and recorded in the data table.
 2. Negative sign (-) in the margin column signify levels below the limit.
 3. Frequency range scanned: 30MHz to 1000MHz.
 4. Only emissions significantly above equipment noise floor are reported.

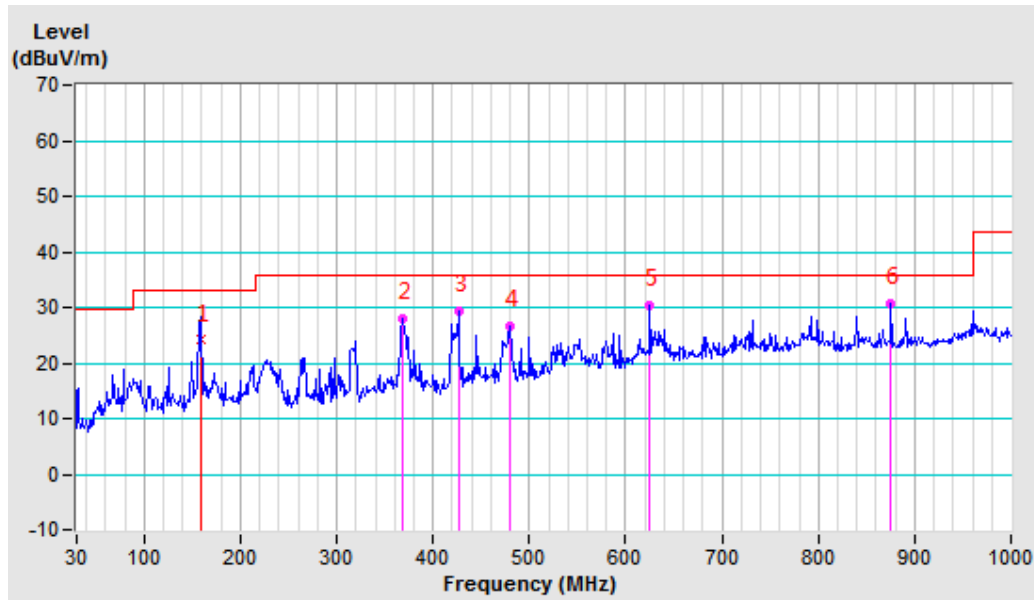

TEST MODE	See section 2.2	FREQUENCY RANGE	30-1000MHz
TEST VOLTAGE	AC 120V 60Hz	DETECTOR FUNCTION & RESOLUTION BANDWIDTH	Quasi-Peak, 120kHz
ENVIRONMENTAL CONDITIONS	22deg. C, 58% RH	TESTED BY: Alex	

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 10 M								
No.	Freq. (MHz)	Correction Factor (dB/m)	Raw Value (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)
1	30.00	-22.91	47.51	24.60	29.50	-4.90	100	339
2	105.18	-24.46	49.04	24.58	33.10	-8.52	300	338
3	124.97	-22.52	45.40	22.88	33.10	-10.22	100	134
4	375.00	-17.08	47.19	30.11	35.60	-5.49	100	187
5	419.14	-15.63	44.59	28.96	35.60	-6.64	100	317
6	480.30	-13.93	43.75	29.82	35.60	-5.78	300	338

- REMARKS:**
1. Peak detector quick scan is showed on the graph and final quasi-peak detector data is measured corresponding to relevant limit and recorded in the data table.
 2. Negative sign (-) in the margin column signify levels below the limit.
 3. Frequency range scanned: 30MHz to 1000MHz.
 4. Only emissions significantly above equipment noise floor are reported.

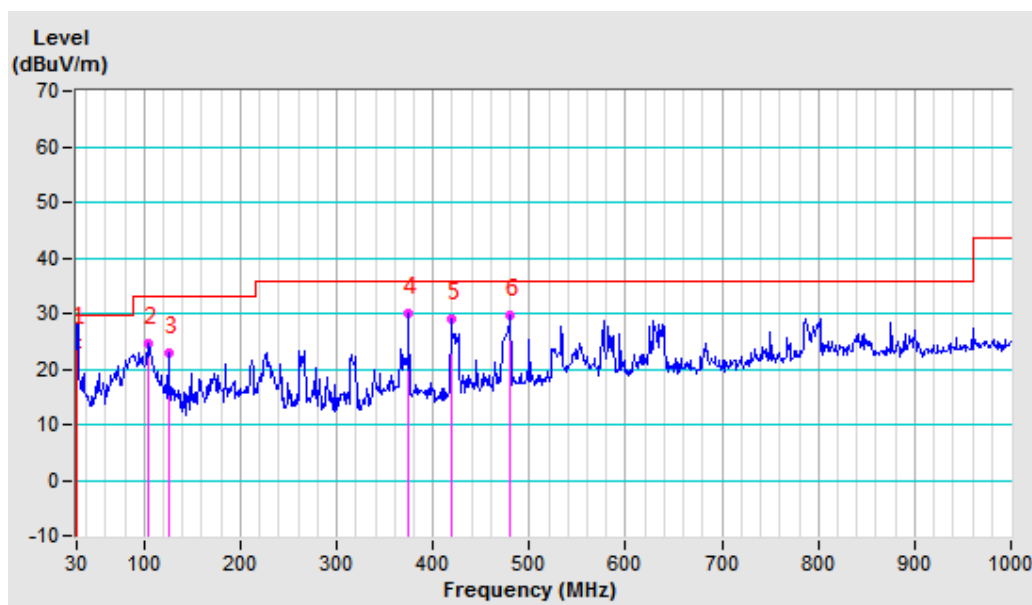

**3.2.8 TEST RESULTS (ABOVE 1GHz)**

TEST MODE	See section 2.2	FREQUENCY RANGE	1GHz to 18GHz
TEST VOLTAGE	AC 120V 60Hz	DETECTOR FUNCTION & RESOLUTION BANDWIDTH	Peak, Average 1MHz
ENVIRONMENTAL CONDITIONS	22deg. C, 58% RH	TESTED BY: Alex	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Correction Factor (dB/m)	Raw Value (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)
1	1244.00PK	-0.16	49.96	49.80	74.00	-24.20	100	58
2	1244.00AV	-0.16	30.56	30.40	54.00	-23.60	100	58
3	3051.00PK	4.18	49.42	53.60	74.00	-20.40	100	252
4	3051.00AV	4.18	29.82	34.00	54.00	-20.00	100	252
5	4516.00PK	7.87	46.13	54.00	74.00	-20.00	100	158
6	4516.00AV	7.87	24.53	32.40	54.00	-21.60	100	158
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Correction Factor (dB/m)	Raw Value (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)
1	1347.00PK	-0.39	51.89	51.50	74.00	-22.50	100	336
2	1347.00AV	-0.39	32.49	32.10	54.00	-21.90	100	336
3	3119.00PK	4.30	54.70	59.00	74.00	-15.00	100	234
4	3119.00AV	4.30	31.50	35.80	54.00	-18.20	100	234
5	4636.00PK	7.97	45.43	53.40	74.00	-20.60	100	257
6	4636.00AV	7.97	23.03	31.00	54.00	-23.00	100	257

- REMARKS:** 1. Peak detector quick scan is showed on the graph and final quasi-peak detector data is measured corresponding to relevant limit and recorded in the data table.
2. Negative sign (-) in the margin column signify levels below the limit.
3. Frequency range scanned: 1GHz to 18GHz.
4. Only emissions significantly above equipment noise floor are reported.

TEST MODE	See section 2.2	FREQUENCY RANGE	18GHz to 40GHz
TEST VOLTAGE	AC 120V 60Hz	DETECTOR FUNCTION & RESOLUTION BANDWIDTH	Peak, Average 1MHz
ENVIRONMENTAL CONDITIONS	22deg. C, 58% RH	TESTED BY: Alex	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Correction Factor (dB/m)	Raw Value (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)
1	23200.00PK	-3.12	60.40	57.28	74.00	-16.72	100	12
2	23200.00AV	-3.12	51.11	47.99	54.00	-6.01	100	12
3	29000.00PK	-0.92	60.19	59.27	74.00	-14.73	170	23
4	29000.00AV	-0.92	49.20	48.28	54.00	-5.72	170	23
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Correction Factor (dB/m)	Raw Value (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)
1	23200.00PK	-3.12	61.91	58.79	74.00	-15.21	123	123
2	23200.00AV	-3.12	51.91	48.79	54.00	-5.21	123	123
3	29000.00PK	-0.92	62.15	61.23	74.00	-12.77	125	24
4	29000.00AV	-0.92	49.16	48.24	54.00	-5.76	125	24

REMARKS: 1. Peak detector quick scan is showed on the graph and final quasi-peak detector data is measured corresponding to relevant limit and recorded in the data table.
2. Negative sign (-) in the margin column signify levels below the limit.
3. Frequency range scanned: 18GHz to 40GHz.
4. Only emissions significantly above equipment noise floor are reported.



Test Report No.: FS2212WDG0200

4 APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications were made to the EUT by the lab during the test.

---END---