




# TEST REPORT

**Report No.** .....: CTC2025286683  
**FCC ID** .....: 2AQ5R-WCN3988  
**IC** .....: 24301-WCN3988  
**Applicant** .....: Shenzhen KTC Commercial Display Technology CO.,LTD.  
Address.....: No.4023, Northern Wuhe Road, Bantian Street, Longgang District, Shenzhen City, Guangdong Province, P.R. China  
Manufacturer.....: Shenzhen KTC Commercial Display Technology CO.,LTD.  
Address.....: No.4023, Northern Wuhe Road, Bantian Street, Longgang District, Shenzhen City, Guangdong Province, P.R. China  
**Product Name** .....: WiFi Module  
Trade Mark .....: /  
Model/Type reference.....: WCN3988 A2  
Listed Model(s) .....: /  
**Standard** .....: FCC CFR Title 47 Part 15 Subpart E Section 15.407  
RSS-247 Issue 3  
Test Report Form No .....: CTC-TR-062\_A1  
Master TRF .....: Dated 2024-09-20  
Date of receipt of test sample.....: Dec. 17, 2024  
Date of testing.....: Dec. 17, 2024 ~ Feb. 18, 2025  
Apr. 25, 2025 ~ Apr. 27, 2025  
Date of issue.....: May 7, 2025  
**Result** .....: PASS

Compiled by:  
(Printed name+signature) Jim Jiang 

Supervised by:  
(Printed name+signature) Eric Zhang 

Approved by:  
(Printed name+signature) Totti Zhao 

This test report may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CTC. The Test Result in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to CTC within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit.

**Table of Contents**

	<b>Page</b>
<b>1. TEST SUMMARY .....</b>	<b>3</b>
1.1. TEST STANDARDS.....	3
1.2. REPORT VERSION .....	3
1.3. TEST DESCRIPTION.....	4
1.4. TEST FACILITY .....	5
1.5. MEASUREMENT UNCERTAINTY.....	6
1.6. ENVIRONMENTAL CONDITIONS.....	6
<b>2. GENERAL INFORMATION .....</b>	<b>7</b>
2.1. CLIENT INFORMATION .....	7
2.2. GENERAL DESCRIPTION OF EUT.....	7
2.3. ACCESSORY EQUIPMENT INFORMATION .....	9
2.4. OPERATION STATE .....	10
2.5. MEASUREMENT INSTRUMENTS LIST .....	13
<b>3. TEST ITEM AND RESULTS .....</b>	<b>14</b>
3.1. CONDUCTED EMISSION.....	14
3.2. RADIATED EMISSION.....	16
3.3. BAND EDGE EMISSIONS.....	57
3.4. BANDWIDTH.....	105
3.5. PEAK OUTPUT POWER .....	107
3.6. POWER SPECTRAL DENSITY .....	110
3.7. FREQUENCY STABILITY .....	113
3.8. ANTENNA REQUIREMENT.....	114
3.9. DYNAMIC FREQUENCY SELECTION.....	115

---

CTC Laboratories, Inc.

Room 101 Building B, No. 7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China

Tel.: (86)755-27521059    Fax: (86)755-27521011    [Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)

For anti-fake verification, please visit the official website of China Inspection And Testing

TRF No: CTC-TR-062\_A1

Society : [yz.cnca.cn](http://yz.cnca.cn)



## 1. TEST SUMMARY

### 1.1. Test Standards

The tests were performed according to following standards:

[FCC Rules Part 15.407](#): for 802.11a/n/ac/ax, the test procedure follows the FCC KDB 789033 D02 General UNII Test Procedures New Rules V02r01.

[RSS-247 Issue 3](#): Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices.

[RSS-Gen Issue 5](#): General Requirements for Compliance of Radio Apparatus.

[ANSI C63.10-2013](#): American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

### 1.2. Report Version

Revised No.	Report No.	Date of issue	Description
01	CTC2025286583	May 7, 2025	On the basis of the original report CTC2024299408, add group 2 of antenna, an FPC antenna to the 2.4GHz frequency band and an iron antenna to the 5GHz frequency band. Add group 2 antenna Conducted Output Power, Radiated Spurious Emissions (above 1GHz) and Band Edge Emissions test.



### 1.3. Test Description

FCC Part 15 Subpart E (15.407) / RSS-247 Issue 3				
Test Item	Standard Section		Result	Test Engineer
	FCC	ISED		
Antenna Requirement	15.203	RSS-Gen 6.8	Pass	Jim Jiang
Conducted Emission	15.207	RSS-Gen 8.8	Note 3	Note 3
Band Edge Emissions	15.407(b)	RSS-247 6.2	Pass	Jim Jiang
26dB Bandwidth & 99% Bandwidth	15.407(a)	RSS-247 6.2.1.2	Note 3	Note 3
6dB Bandwidth (only for UNII-3)	15.407(e)	RSS-247 6.2.4.1	Note 3	Note 3
Peak Output Power	15.407(a)	RSS-247 6.2	Pass	Jim Jiang
Power Spectral Density	15.407(a)	RSS-247 6.2	Note 3	Note 3
Transmitter Radiated Spurious Emission	15.407(b) &15.209	RSS-Gen 8.9 RSS-247 6.2	Pass	Jim Jiang
Frequency Stability	15.407(g)	RSS-Gen 6.11	Note 3	Note 3
Dynamic Frequency Selection (DFS)	15.407(h)	RSS-247 6.3	Note 3	Note 3
Automatically Discontinue Transmission	15.407(c)	RSS-247 6.4(a)	Note 3	Note 3

Note:

1. The measurement uncertainty is not included in the test result.
2. N/A: means this test item is not applicable for this device according to the technology characteristic of device.
3. Test data are detailed in the original report CTC2024299408.

CTC Laboratories, Inc.

Room 101 Building B, No. 7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China  
Tel.: (86)755-27521059 Fax: (86)755-27521011 [Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)

TRF No: CTC-TR-062\_A1

For anti-fake verification, please visit the official website of China Inspection And Testing Society : [vz.cnca.cn](http://www.vz.cnca.cn)



## 1.4. Test Facility

### Address of the report laboratory

#### CTC Laboratories, Inc.

Address: Room 101 of Building B, Room 107, 108, 207, 208 of Building A, No. 7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China

### Laboratory accreditation

The test facility is recognized, certified, or accredited by the following organizations:

#### A2LA-Lab Cert. No.: 4340.01

CTC Laboratories, Inc. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

#### Industry Canada (Registration No.: 9783A, CAB Identifier: CN0029)

CTC Laboratories, Inc. EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration NO.: 9783A on Jan, 2016.

#### FCC (Registration No.: 951311, Designation Number CN1208)

CTC Laboratories, Inc. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 951311, Aug 26, 2017.



## 1.5. Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to TR-100028-01 "Electromagnetic compatibility and Radio spectrum Matters (ERM);Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 2" and is documented in the CTC Laboratories, Inc. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Below is the best measurement capability for CTC Laboratories, Inc.

Test Items	Measurement Uncertainty	Notes
Emission Bandwidth	±0.0196%	(1)
Maximum Conduct Output Power	±0.766dB	(1)
Power Spectral Density	±1.22dB	(1)
Band Edge Measurements	±1.328dB	(1)
Unwanted Emissions Measurement	9kHz-1GHz: ±0.746dB 1GHz-26GHz: ±1.328dB	(1)
Frequency Stability	±2.76%	(1)
Conducted Emissions 9kHz~30MHz	±3.08 dB	(1)
Radiated Emissions 30~1000MHz	±4.51 dB	(1)
Radiated Emissions 1~18GHz	±5.84 dB	(1)
Radiated Emissions 18~40GHz	±6.12 dB	(1)

Note (1): This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

## 1.6. Environmental Conditions

<b>Normal Condition</b>	Temperature	15 °C to 35 °C
	Relative Humidity	20 % to 75 %
	Air Pressure	101 kPa
	Voltage	The normal test voltage for the equipment shall be the nominal voltage for which the equipment was designed.
<b>Extreme Condition</b>	Temperature	Measurements shall be made over the extremes of the operating temperature range as declared by the manufacturer.
	Voltage	Measurements shall be made over the extremes of the operating temperature range as declared by the manufacturer.

<b>Normal Condition</b>	$T_N$ =Normal Temperature	25 °C
<b>Extreme Condition</b>	$T_L$ =Lower Temperature	0 °C
	$T_H$ =Higher Temperature	50 °C



## 2. GENERAL INFORMATION

### 2.1. Client Information

Applicant:	Shenzhen KTC Commercial Display Technology CO.,LTD.
Address:	No.4023, Northern Wuhe Road, Bantian Street, Longgang District, Shenzhen City, Guangdong Province, P.R. China
Manufacturer:	Shenzhen KTC Commercial Display Technology CO.,LTD.
Address:	No.4023, Northern Wuhe Road, Bantian Street, Longgang District, Shenzhen City, Guangdong Province, P.R. China

### 2.2. General Description of EUT

Product Name:	WiFi Module
Trade Mark:	/
Model/Type reference:	WCN3988 A2
Listed Model(s):	/
Model Difference:	/
Sample ID:	CTC250425-002-S001
Power Supply:	Input: 19V == 3.42A
Hardware Version:	SHAHESHANG_SM6115_MB_V03
Software Version:	FlatBuild_TurboX-C6115_20250106

---

CTC Laboratories, Inc.

Room 101 Building B, No. 7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China  
Tel.: (86)755-27521059    Fax: (86)755-27521011    [Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)

TRF No: CTC-TR-062\_A1

For anti-fake verification, please visit the official website of China Inspection And Testing Society : [www.cnca.gov.cn](http://www.cnca.gov.cn)



5G Wi-Fi					
Operation Band:	<input checked="" type="checkbox"/> U-NII-1	<input checked="" type="checkbox"/> U-NII-2A	<input checked="" type="checkbox"/> U-NII-2C	<input checked="" type="checkbox"/> U-NII-3	
Operation Frequency:	U-NII-1	5180MHz~5240MHz			
	U-NII-2A	5260MHz~5320MHz			
	U-NII-2C	5500MHz~5720MHz			
	U-NII-3	5745MHz~5825MHz			
Support Bandwidth:	802.11a	<input checked="" type="checkbox"/> 20MHz			
	802.11n	<input checked="" type="checkbox"/> 20MHz	<input checked="" type="checkbox"/> 40MHz		
	802.11ac	<input checked="" type="checkbox"/> 20MHz	<input checked="" type="checkbox"/> 40MHz	<input checked="" type="checkbox"/> 80MHz	<input type="checkbox"/> 160MHz
Modulation:	802.11a/n: OFDM (BPSK, QPSK, 16QAM, 64QAM) 802.11ac: OFDM (BPSK, QPSK, 16QAM, 64QAM, 256QAM)				
Group 1 Antenna Type:	FPC Antenna				
Antenna Gain:	6.27dBi				
Group 2 Antenna Type:	Iron Antenna				
Antenna Gain:	3.56dBi				

---

CTC Laboratories, Inc.

Room 101 Building B, No. 7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China  
Tel.: (86)755-27521059    Fax: (86)755-27521011    [Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)

TRF No: CTC-TR-062\_A1

For anti-fake verification, please visit the official website of China Inspection And Testing Society : [yz.cnca.cn](http://www.yz.cnca.cn)



## 2.3. Accessory Equipment Information

<b>Equipment Information</b>			
Name	Model	S/N	Manufacturer
Notebook	ThinkPad T460s	MP246QDR	Lenovo
Switching Adapter	K65B3-2W19	/	KTC
Power Board	KB-6160A	/	KTC
Rechargeable Lithium ion Battery	AEC GK-18650-6200mAh-4S2P-01	/	Apower
GPON ONU, GPON ONT	GN630V (FCC ID: WNA-GN630V)	/	Skyworth
<b>Cable Information</b>			
Name	Shielded Type	Ferrite Core	Length
USB Cable	Unshielded	NO	100cm
<b>Test Software Information</b>			
Name	Version	/	/
QRCT4	V 4.0-00201	/	/

---

CTC Laboratories, Inc.

Room 101 Building B, No. 7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China  
Tel.: (86)755-27521059 Fax: (86)755-27521011 [Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)

TRF No: CTC-TR-062\_A1

For anti-fake verification, please visit the official website of China Inspection And Testing Society : [vz.cnca.cn](http://www.vz.cnca.cn)



## 2.4. Operation State

Operation Frequency List: The EUT has been tested under typical operating condition. The Applicant provides communication tools software to control the EUT for staying in continuous transmitting.

Operation Frequency List:

Operating Band	20MHz Bandwidth		40MHz Bandwidth		80MHz Bandwidth			
	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)		
U-NII-1	36	5180	38	5190	42	5210		
	40	5200						
	44	5220	46	5230				
	48	5240						
U-NII-2A	52	5260	54	5270	58	5290		
	56	5280						
	60	5300	62	5310				
	64	5320						
U-NII-2C	100	5500	102	5510	106	5530		
	104	5520						
	108	5540	110	5550				
	112	5560						
	116	5580	118	5590	122	5610		
	120	5600						
	124	5620	126	5630				
	128	5640						
	132	5660	134	5670	138	5690		
	136	5680						
	140	5700	142	5710				
	144	5720						
U-NII-3	149	5745	151	5755	155	5775		
	153	5765						
	157	5785	159	5795				
	161	5805						
	165	5825						



Test channel is below:

Operating Band	Test Channel	20MHz Bandwidth		40MHz Bandwidth		80MHz Bandwidth	
		Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
U-NII-1	CH <sub>L</sub>	36	5180	38	5190	/	/
	CH <sub>M</sub>	40	5200	/	/	42	5210
	CH <sub>H</sub>	48	5240	46	5230	/	/
U-NII-2A	CH <sub>L</sub>	52	5260	54	5270	/	/
	CH <sub>M</sub>	56	5280	/	/	58	5290
	CH <sub>H</sub>	64	5320	62	5310	/	/
U-NII-2C	CH <sub>L</sub>	100	5500	102	5510	106	5530
	CH <sub>M</sub>	116	5580	110	5550	/	/
	CH <sub>H</sub>	140	5700	134	5670	122	5610
U-NII-3	CH <sub>L</sub>	149	5745	151	5755	/	/
	CH <sub>M</sub>	157	5785	/	/	155	5775
	CH <sub>H</sub>	165	5825	159	5795	/	/

Data Rated:

Preliminary tests were performed in different data rate, and found which the below bit rate is worst case mode, so only show data which it is a worst case mode.

Test Mode	Data Rate (worst mode)
802.11a	6Mbps
802.11n(HT20)/ 802.11n(HT40)	HT-MCS0
802.11ac(VHT20)/ 802.11ac(VHT40)/ 802.11ac(VHT80)	VHT-MCS0

CTC Laboratories, Inc.

Room 101 Building B, No. 7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China  
Tel.: (86)755-27521059 Fax: (86)755-27521011 [Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)

TRF No: CTC-TR-062\_A1

For anti-fake verification, please visit the official website of China Inspection And Testing Society : [vz.cnca.cn](http://www.vz.cnca.cn)



Test Mode:

For RF test items:
1. The engineering test program was provided and enabled to make EUT continuous transmit. 2. The measurements for Output Power are tested, the worst case is IEEE 802.11a mode, IEEE 802.11ac(VHT20) mode, IEEE 802.11ac(VHT40) mode, IEEE 802.11ac(VHT80) mode, only the worst cases are documented for other test items.
For AC power line conducted emissions:
The engineering test program was provided and enabled to make EUT continuous transmit.
For Radiated spurious emissions test item:
The engineering test program was provided and enabled to make EUT continuous transmit. The EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.
For DFS test items:
The EUT has been tested under test mode condition. The Applicant provides software to control the EUT for staying in DFS mode for testing.

---

CTC Laboratories, Inc.

Room 101 Building B, No. 7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China  
Tel.: (86)755-27521059    Fax: (86)755-27521011    [Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)

TRF No: CTC-TR-062\_A1

For anti-fake verification, please visit the official website of China Inspection And Testing Society : [vz.cnca.cn](http://www.vz.cnca.cn)



## 2.5. Measurement Instruments List

RF Test System - SRD					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrated Until
1	Spectrum Analyzer	R&S	FSV40-N	101654	Dec. 12, 2025
2	MXA Signal Analyzer	Keysight	N9020A	MY46471737	Dec. 12, 2025
3	MXG Vector Signal Generator	Agilent	N5182A	MY47420864	Dec. 12, 2025
4	PSG Analog Signal Generator	Agilent	E8257D	MY46521908	Dec. 12, 2025
5	EXG Analog Signal Generator	Keysight	N5173B	MY59100842	Dec. 12, 2025
6	MXG Vector Signal Generator	Keysight	N5182B	MY59100212	Dec. 12, 2025
7	USB Wideband Power Sensor	Keysight	U2021XA	MY55130004	Mar. 21, 2026
8	USB Wideband Power Sensor	Keysight	U2021XA	MY55130006	Mar. 21, 2026
9	Wideband Radio Communication Tester	R&S	CMW500	102414	Dec. 12, 2025
10	High and low temperature test chamber	ESPEC	MT3035	/	Mar. 21, 2026
11	RF Control Unit	Tonscend	JS0806-2	/	Dec. 12, 2025

Radiated Emission					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrated Until
1	Trilog-Broadband Antenna	Schwarzbeck	VULB 9163	01026	Dec. 24, 2025
2	Horn Antenna	Schwarzbeck	BBHA 9120D	9120D-647	Sep. 25, 2025
3	Test Receiver	Keysight	N9038A	MY56400071	Dec. 12, 2025
4	Broadband Amplifier	SCHWARZBECK	BBV9743B	259	Dec. 12, 2025
5	Mirowave Broadband Amplifier	SCHWARZBECK	BBV9718C	111	Dec. 12, 2025
6	3m chamber 3	YIHENG	EE106	/	Aug. 28, 2026
7	Test Software	FARA	EZ-EMC	FA-03A2	/

Conducted Emission					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrated Until
1	LISN	R&S	ENV216	101112	Dec. 12, 2025
2	LISN	R&S	ENV216	101113	Dec. 12, 2025
3	EMI Test Receiver	R&S	ESCS30	100353	Dec. 12, 2025
4	ISN CAT6	Schwarzbeck	NTFM 8158	CAT6-8158-0046	Dec. 12, 2025
5	ISN CAT5	Schwarzbeck	NTFM 8158	CAT5-8158-0046	Dec. 12, 2025
6	Test Software	R&S	EMC32	6.10.10	/

Note: 1. The Cal. Interval was one year.

2. The Cal. Interval was three years of the antenna.

3. The cable loss has been calculated in test result which connection between each test instruments.

### 3. TEST ITEM AND RESULTS

### 3.1. Conducted Emission


## Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.207 / RSS-Gen 8.8

Frequency (MHz)	Conducted Limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 *	56 to 46 *
0.5 - 5	56	46
5 - 30	60	50

\* Decreases with the logarithm of the frequency.

## Test Configuration

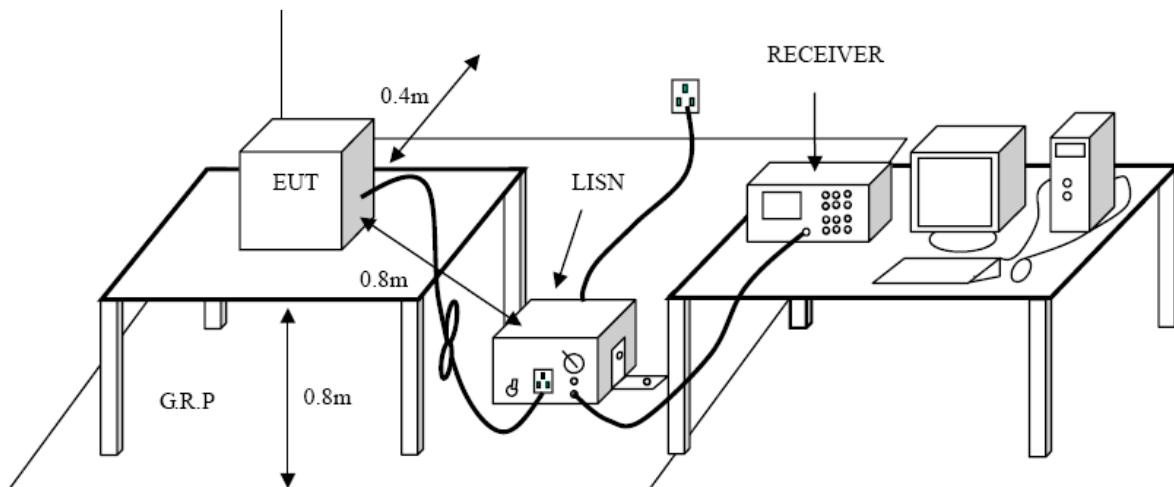

## Test Procedure

1. The EUT was setup according to ANSI C63.10:2013 requirements.
2. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface.
3. The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). The LISN provides a 50 ohm / 50  $\mu$ H coupling impedance for the measuring equipment.
4. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs)
5. Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.
6. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
7. Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.
8. During the above scans, the emissions were maximized by cable manipulation.

## Test Mode

Please refer to the clause 24

**Test Result**

Test data are detailed in the original report CTC2024299408.

---

CTC Laboratories, Inc.

Room 101 Building B, No. 7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China  
Tel.: (86)755-27521059      Fax: (86)755-27521011      [Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)

TRF No: CTC-TR-062\_A1

For anti-fake verification, please visit the official website of China Inspection And Testing Society : [yz.cnca.cn](http://www.cnca.gov.cn)



### 3.2. Radiated Emission

#### Limit

#### FCC CFR Title 47 Part 15 Subpart C Section 15.209 / RSS-Gen 8.9

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F (kHz)	300
0.490~1.705	24000/F (kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

Frequency Range (MHz)	dB $\mu$ V/m (at 3 meters)	
	Peak	Average
Above 1000	74	54

#### Note:

- (1) The tighter limit applies at the band edges.
- (2) Emission Level (dB $\mu$ V/m)=20log Emission Level ( $\mu$ V/m).

#### Limits of unwanted emission out of the restricted bands

#### FCC CFR Title 47 Part 15 Subpart E Section 15. 407(b) / RSS-247 6.2

Frequency (MHz)	EIRP Limits (dBm)	Equivalent Field Strength at 3m (dB $\mu$ V/m)
5150~5250	-27	68.2
5250~5350	-27	68.2
5470~5725	-27	68.2
5725~5825	-27 (Note 2)	68.2
	10 (Note 2)	105.2
	15.6 (Note 2)	110.8
	27 (Note 2)	122.2

#### Note:

1. The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:  $E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m}$ , where P is the eirp (Watts).
2. According to FCC 16-24, all emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27dBm/MHz at the band edge.




#### Test Configuration

CTC Laboratories, Inc.

Room 101 Building B, No. 7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China  
Tel.: (86)755-27521059 Fax: (86)755-27521011 [Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)

TRF No: CTC-TR-062\_A1

For anti-fake verification, please visit the official website of China Inspection And Testing Society : [yz.cnca.cn](http://www.yz.cnca.cn)

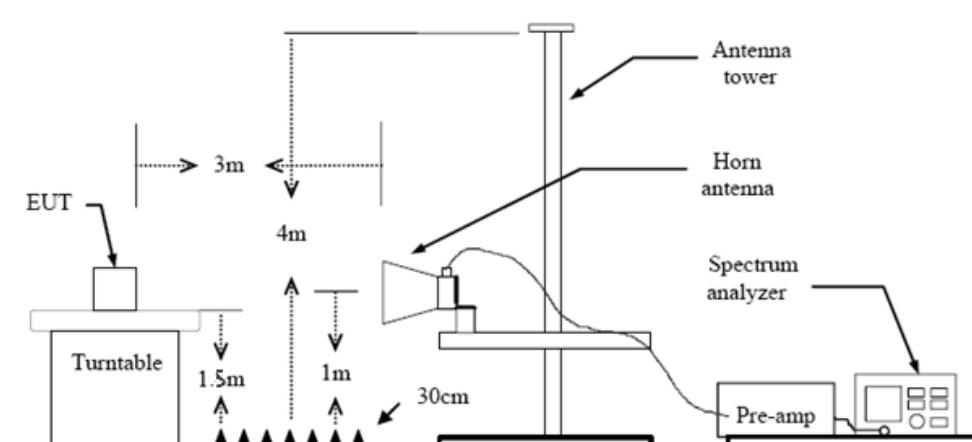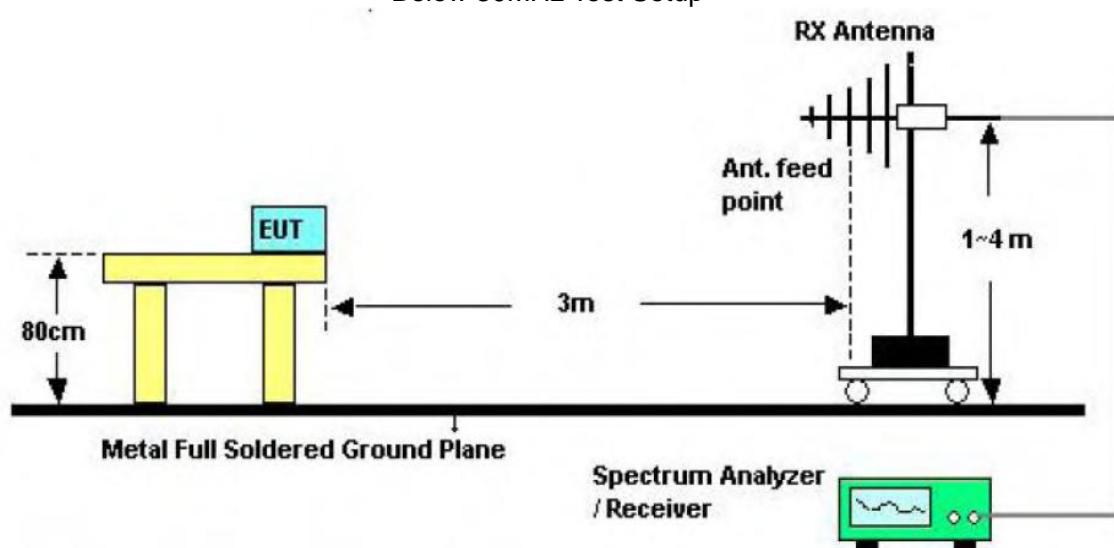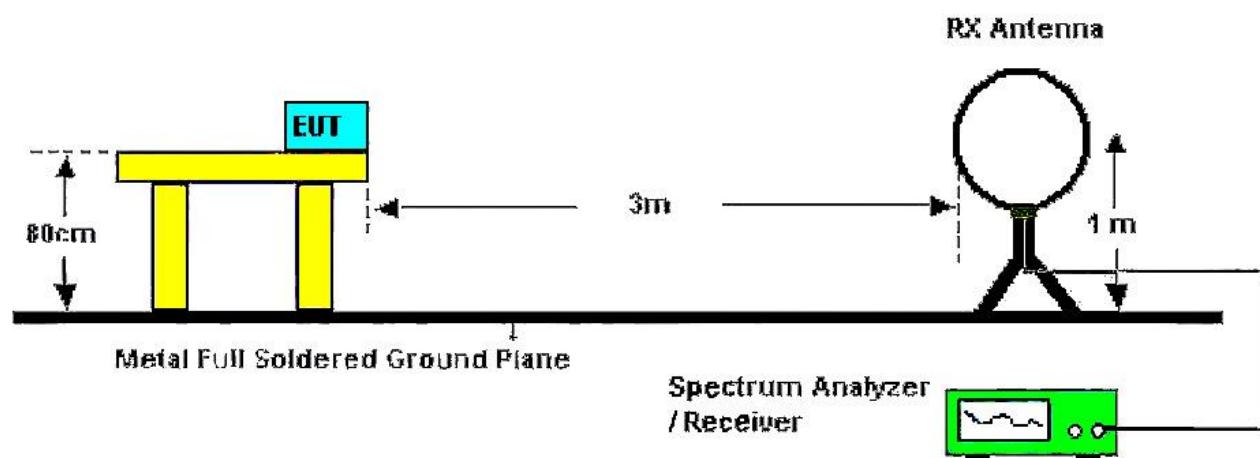



## **Test Procedure**

1. The EUT was setup and tested according to ANSI C63.10:2013.
2. The EUT is placed on a turn table which is 0.8 meter above ground for below 1 GHz, and 1.5 m for above 1 GHz. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was set 3 meters from the receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Use the following spectrum analyzer settings
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) 9k – 150kHz: RBW=300 Hz, VBW=1 kHz, Sweep=auto, Detector function=peak, Trace=max hold
  - (3) 0.15M – 30MHz: RBW=10 kHz, VBW=30 kHz, Sweep=auto, Detector function=peak, Trace=max hold
  - (4) 30M - 1 GHz: RBW=120 kHz, VBW=300 kHz, Sweep=auto, Detector function=peak, Trace=max hold  
If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
  - (5) From 1 GHz to 10<sup>th</sup> harmonic: RBW=1MHz, VBW=3MHz Peak detector for Peak value.  
RBW=1MHz, VBW see note 1 with Peak Detector for Average Value.

Note 1: For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause Duty Cycle.

## **Test Mode**

Please refer to the clause 2.4.

## **Test Result**

### **9 kHz~30 MHz**

Test data are detailed in the original report CTC2024299408.

### **30MHz-1GHz**

Test data are detailed in the original report CTC2024299408.



## Above 1GHz

Ant. Pol.	Horizontal						
Test Mode:	TX 802.11a Mode 5180MHz (U-NII-1)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10359.648	42.26	13.75	56.01	74.00	-17.99	peak
2 *	10360.745	29.49	13.74	43.23	54.00	-10.77	AVG

## Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value

Ant. Pol.	Vertical						
Test Mode:	TX 802.11a Mode 5180MHz (U-NII-1)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10360.131	40.06	13.75	53.81	74.00	-20.19	peak
2 *	10360.243	26.31	13.75	40.06	54.00	-13.94	AVG

## Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value



<b>Ant. Pol.</b>	Horizontal						
<b>Test Mode:</b>	TX 802.11a Mode 5200MHz (U-NII-1)						
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	10399.135	29.11	13.79	42.90	54.00	-11.10	AVG
2	10400.042	41.95	13.79	55.74	74.00	-18.26	peak

<b>Ant. Pol.</b>	Vertical						
<b>Test Mode:</b>	TX 802.11a Mode 5200MHz (U-NII-1)						
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	10399.860	26.11	13.79	39.90	54.00	-14.10	AVG
2	10400.103	40.61	13.79	54.40	74.00	-19.60	peak

## Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor  
2. Margin value = Level -Limit value



<b>Ant. Pol.</b>	Horizontal						
<b>Test Mode:</b>	TX 802.11a Mode 5240MHz (U-NII-1)						
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10479.785	41.23	13.87	55.10	74.00	-18.90	peak
2 *	10480.145	29.15	13.87	43.02	54.00	-10.98	AVG

<b>Ant. Pol.</b>	Vertical						
<b>Test Mode:</b>	TX 802.11a Mode 5240MHz (U-NII-1)						
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	10480.239	25.87	13.87	39.74	54.00	-14.26	AVG
2	10480.242	39.33	13.87	53.20	74.00	-20.80	peak

**Remarks:**

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor  
2. Margin value = Level -Limit value



<b>Ant. Pol.</b>	Horizontal						
<b>Test Mode:</b>	TX 802.11ac(VHT20) Mode 5180MHz (U-NII-1)						
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	10359.869	29.05	13.75	42.80	54.00	-11.20	AVG
2	10360.224	41.49	13.75	55.24	74.00	-18.76	peak

**Remarks:**

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value

<b>Ant. Pol.</b>	Vertical						
<b>Test Mode:</b>	TX 802.11ac(VHT20) Mode 5180MHz (U-NII-1)						
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	10359.690	26.04	13.75	39.79	54.00	-14.21	AVG
2	10360.402	39.92	13.74	53.66	74.00	-20.34	peak

**Remarks:**

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value



<b>Ant. Pol.</b>	Horizontal						
<b>Test Mode:</b>	TX 802.11ac(VHT20) Mode 5200MHz (U-NII-1)						
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	10399.885	29.36	13.79	43.15	54.00	-10.85	AVG
2	10400.112	41.59	13.79	55.38	74.00	-18.62	peak

<b>Ant. Pol.</b>	Vertical						
<b>Test Mode:</b>	TX 802.11ac(VHT20) Mode 5200MHz (U-NII-1)						
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10400.011	39.84	13.79	53.63	74.00	-20.37	peak
2 *	10400.032	25.90	13.79	39.69	54.00	-14.31	AVG

## Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor  
2. Margin value = Level -Limit value



<b>Ant. Pol.</b>	Horizontal						
<b>Test Mode:</b>	TX 802.11ac(VHT20) Mode 5240MHz (U-NII-1)						
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10479.708	40.01	13.87	53.88	74.00	-20.12	peak
2 *	10479.913	29.23	13.87	43.10	54.00	-10.90	AVG

<b>Ant. Pol.</b>	Vertical						
<b>Test Mode:</b>	TX 802.11ac(VHT20) Mode 5240MHz (U-NII-1)						
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	10479.810	25.71	13.87	39.58	54.00	-14.42	AVG
2	10480.242	39.86	13.87	53.73	74.00	-20.27	peak

**Remarks:**

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2. Margin value = Level -Limit value



<b>Ant. Pol.</b>	Horizontal							
<b>Test Mode:</b>	TX 802.11ac(VHT40) Mode 5190MHz (U-NII-1)							
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.							
<b>Remarks:</b> 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2. Margin value = Level -Limit value								

<b>Ant. Pol.</b>	Vertical							
<b>Test Mode:</b>	TX 802.11ac(VHT40) Mode 5190MHz (U-NII-1)							
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.							
<b>Remarks:</b> 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2. Margin value = Level -Limit value								



<b>Ant. Pol.</b>	Horizontal						
<b>Test Mode:</b>	TX 802.11ac(VHT40) Mode 5230MHz (U-NII-1)						
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10459.879	40.89	13.85	54.74	74.00	-19.26	peak
2 *	10460.202	29.30	13.85	43.15	54.00	-10.85	AVG

<b>Ant. Pol.</b>	Vertical						
<b>Test Mode:</b>	TX 802.11ac(VHT40) Mode 5230MHz (U-NII-1)						
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10459.864	39.80	13.85	53.65	74.00	-20.35	peak
2 *	10459.913	24.31	13.85	38.16	54.00	-15.84	AVG

**Remarks:**

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2. Margin value = Level -Limit value



<b>Ant. Pol.</b>	Horizontal						
<b>Test Mode:</b>	TX 802.11ac(VHT80) Mode 5210MHz (U-NII-1)						
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10419.896	41.78	13.80	55.58	74.00	-18.42	peak
2 *	10420.213	27.22	13.80	41.02	54.00	-12.98	AVG

<b>Ant. Pol.</b>	Vertical						
<b>Test Mode:</b>	TX 802.11ac(VHT80) Mode 5210MHz (U-NII-1)						
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10420.109	39.62	13.80	53.42	74.00	-20.58	peak
2 *	10420.127	24.00	13.80	37.80	54.00	-16.20	AVG

## Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor  
2. Margin value = Level -Limit value



<b>Ant. Pol.</b>	Horizontal						
<b>Test Mode:</b>	TX 802.11a Mode 5260MHz (U-NII-2A)						
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	10519.849	28.94	13.92	42.86	54.00	-11.14	AVG
2	10520.218	41.13	13.92	55.05	74.00	-18.95	peak

<b>Ant. Pol.</b>	Vertical						
<b>Test Mode:</b>	TX 802.11a Mode 5260MHz (U-NII-2A)						
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	10519.783	24.13	13.92	38.05	54.00	-15.95	AVG
2	10520.011	39.59	13.92	53.51	74.00	-20.49	peak

## Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor  
2. Margin value = Level -Limit value



<b>Ant. Pol.</b>	Horizontal						
<b>Test Mode:</b>	TX 802.11a Mode 5280MHz (U-NII-2A)						
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10560.218	40.02	13.98	54.00	74.00	-20.00	peak
2 *	10560.411	28.59	13.98	42.57	54.00	-11.43	AVG

**Remarks:**

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value

<b>Ant. Pol.</b>	Vertical						
<b>Test Mode:</b>	TX 802.11a Mode 5280MHz (U-NII-2A)						
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10559.817	39.82	13.98	53.80	74.00	-20.20	peak
2 *	10560.212	24.10	13.98	38.08	54.00	-15.92	AVG

**Remarks:**

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value



<b>Ant. Pol.</b>	Horizontal													
<b>Test Mode:</b>	TX 802.11a Mode 5320MHz (U-NII-2A)													
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.													
<b>Remarks:</b> 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2. Margin value = Level -Limit value														

<b>Ant. Pol.</b>	Vertical													
<b>Test Mode:</b>	TX 802.11a Mode 5320MHz (U-NII-2A)													
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.													
<b>Remarks:</b> 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2. Margin value = Level -Limit value														



<b>Ant. Pol.</b>	Horizontal						
<b>Test Mode:</b>	TX 802.11ac(VHT20) Mode 5260MHz (U-NII-2A)						
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	10519.819	28.45	13.92	42.37	54.00	-11.63	AVG
2	10520.128	41.04	13.92	54.96	74.00	-19.04	peak

**Remarks:**

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value

<b>Ant. Pol.</b>	Vertical						
<b>Test Mode:</b>	TX 802.11ac(VHT20) Mode 5260MHz (U-NII-2A)						
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10519.900	40.14	13.92	54.06	74.00	-19.94	peak
2 *	10520.183	24.38	13.92	38.30	54.00	-15.70	AVG

**Remarks:**

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value



Ant. Pol.	Horizontal						
Test Mode:	TX 802.11ac(VHT20) Mode 5280MHz (U-NII-2A)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	10559.951	28.76	13.98	42.74	54.00	-11.26	AVG
2	10560.132	41.82	13.98	55.80	74.00	-18.20	peak

## Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value

Ant. Pol.	Vertical						
Test Mode:	TX 802.11ac(VHT20) Mode 5280MHz (U-NII-2A)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	10559.818	25.03	13.98	39.01	54.00	-14.99	AVG
2	10560.152	39.85	13.98	53.83	74.00	-20.17	peak

## Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value



<b>Ant. Pol.</b>	Horizontal						
<b>Test Mode:</b>	TX 802.11ac(VHT20) Mode 5320MHz (U-NII-2A)						
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10639.972	41.00	14.11	55.11	74.00	-18.89	peak
2 *	10640.303	28.16	14.11	42.27	54.00	-11.73	AVG

**Remarks:**

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value

<b>Ant. Pol.</b>	Vertical						
<b>Test Mode:</b>	TX 802.11ac(VHT20) Mode 5320MHz (U-NII-2A)						
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10639.800	39.73	14.11	53.84	74.00	-20.16	peak
2 *	10640.381	24.41	14.11	38.52	54.00	-15.48	AVG

**Remarks:**

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value



<b>Ant. Pol.</b>	Horizontal						
<b>Test Mode:</b>	TX 802.11ac(VHT40) Mode 5270MHz (U-NII-2A)						
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	10539.870	27.76	13.95	41.71	54.00	-12.29	AVG
2	10539.923	40.40	13.95	54.35	74.00	-19.65	peak

**Remarks:**

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value

<b>Ant. Pol.</b>	Vertical						
<b>Test Mode:</b>	TX 802.11ac(VHT40) Mode 5270MHz (U-NII-2A)						
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	10539.784	24.15	13.95	38.10	54.00	-15.90	AVG
2	10540.315	39.61	13.95	53.56	74.00	-20.44	peak

**Remarks:**

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value



Ant. Pol.	Horizontal						
Test Mode:	TX 802.11ac(VHT40) Mode 5310MHz (U-NII-2A)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10619.793	40.14	14.07	54.21	74.00	-19.79	peak
2 *	10620.212	27.25	14.07	41.32	54.00	-12.68	AVG

## Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value

Ant. Pol.	Vertical						
Test Mode:	TX 802.11ac(VHT40) Mode 5310MHz (U-NII-2A)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	10619.810	25.07	14.07	39.14	54.00	-14.86	AVG
2	10620.231	39.09	14.07	53.16	74.00	-20.84	peak

## Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value



<b>Ant. Pol.</b>	Horizontal						
<b>Test Mode:</b>	TX 802.11ac(VHT80) Mode 5290MHz (U-NII-2A)						
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10579.764	41.04	14.02	55.06	74.00	-18.94	peak
2 *	10580.214	28.00	14.02	42.02	54.00	-11.98	AVG

**Remarks:**

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value

<b>Ant. Pol.</b>	Vertical						
<b>Test Mode:</b>	TX 802.11ac(VHT80) Mode 5290MHz (U-NII-2A)						
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	10579.693	24.12	14.02	38.14	54.00	-15.86	AVG
2	10579.789	39.70	14.02	53.72	74.00	-20.28	peak

**Remarks:**

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value



Ant. Pol.	Horizontal						
Test Mode:	TX 802.11a Mode 5500MHz (U-NII-2C)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	10999.896	25.93	14.57	40.50	54.00	-13.50	AVG
2	11000.341	39.45	14.57	54.02	74.00	-19.98	peak

## Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value

Ant. Pol.	Vertical						
Test Mode:	TX 802.11a Mode 5500MHz (U-NII-2C)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	11000.213	23.43	14.57	38.00	54.00	-16.00	AVG
2	11000.260	38.70	14.57	53.27	74.00	-20.73	peak

## Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value



Ant. Pol.	Horizontal						
Test Mode:	TX 802.11a Mode 5580MHz (U-NII-2C)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11159.951	38.93	14.66	53.59	74.00	-20.41	peak
2 *	11160.321	25.11	14.66	39.77	54.00	-14.23	AVG

## Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value

Ant. Pol.	Vertical						
Test Mode:	TX 802.11a Mode 5580MHz (U-NII-2C)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	11159.749	23.07	14.66	37.73	54.00	-16.27	AVG
2	11160.301	39.10	14.66	53.76	74.00	-20.24	peak

## Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value



<b>Ant. Pol.</b>	Horizontal						
<b>Test Mode:</b>	TX 802.11a Mode 5700MHz (U-NII-2C)						
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	11399.764	25.52	14.85	40.37	54.00	-13.63	AVG
2	11399.851	39.46	14.85	54.31	74.00	-19.69	peak

**Remarks:**

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value

<b>Ant. Pol.</b>	Vertical						
<b>Test Mode:</b>	TX 802.11a Mode 5700MHz (U-NII-2C)						
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	11400.309	22.31	14.85	37.16	54.00	-16.84	AVG
2	11400.330	38.23	14.85	53.08	74.00	-20.92	peak

**Remarks:**

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value



<b>Ant. Pol.</b>	Horizontal						
<b>Test Mode:</b>	TX 802.11ac(VHT20) Mode 5500MHz (U-NII-2C)						
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	10999.668	26.22	14.57	40.79	54.00	-13.21	AVG
2	11000.121	39.95	14.57	54.52	74.00	-19.48	peak

**Remarks:**

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value

<b>Ant. Pol.</b>	Vertical						
<b>Test Mode:</b>	TX 802.11ac(VHT20) Mode 5500MHz (U-NII-2C)						
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	10999.945	22.63	14.57	37.20	54.00	-16.80	AVG
2	11000.246	39.22	14.57	53.79	74.00	-20.21	peak

**Remarks:**

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value



<b>Ant. Pol.</b>	Horizontal						
<b>Test Mode:</b>	TX 802.11ac(VHT20) Mode 5580MHz (U-NII-2C)						
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.						

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11159.971	38.82	14.66	53.48	74.00	-20.52	peak
2 *	11160.302	25.06	14.66	39.72	54.00	-14.28	AVG

<b>Remarks:</b>
1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2. Margin value = Level -Limit value

<b>Ant. Pol.</b>	Vertical						
<b>Test Mode:</b>	TX 802.11ac(VHT20) Mode 5580MHz (U-NII-2C)						
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.						

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11159.876	39.38	14.66	54.04	74.00	-19.96	peak
2 *	11160.291	23.37	14.66	38.03	54.00	-15.97	AVG

<b>Remarks:</b>
1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2. Margin value = Level -Limit value



Ant. Pol.	Horizontal						
Test Mode:	TX 802.11ac(VHT20) Mode 5700MHz (U-NII-2C)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	11399.754	24.05	14.85	38.90	54.00	-15.10	AVG
2	11400.322	39.02	14.85	53.87	74.00	-20.13	peak

## Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value

Ant. Pol.	Vertical						
Test Mode:	TX 802.11ac(VHT20) Mode 5700MHz (U-NII-2C)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11399.673	38.74	14.85	53.59	74.00	-20.41	peak
2 *	11399.700	23.00	14.85	37.85	54.00	-16.15	AVG

## Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value



Ant. Pol.	Horizontal						
Test Mode:	TX 802.11ac(VHT40) Mode 5510MHz (U-NII-2C)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11020.213	40.43	14.59	55.02	74.00	-18.98	peak
2 *	11020.296	25.52	14.59	40.11	54.00	-13.89	AVG

## Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value

Ant. Pol.	Vertical						
Test Mode:	TX 802.11ac(VHT40) Mode 5510MHz (U-NII-2C)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11019.786	38.71	14.59	53.30	74.00	-20.70	peak
2 *	11020.219	22.30	14.59	36.89	54.00	-17.11	AVG

## Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value



Ant. Pol.	Horizontal						
Test Mode:	TX 802.11ac(VHT40) Mode 5550MHz (U-NII-2C)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11099.785	38.72	14.67	53.39	74.00	-20.61	peak
2 *	11100.206	24.82	14.67	39.49	54.00	-14.51	AVG

## Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value

Ant. Pol.	Vertical						
Test Mode:	TX 802.11ac(VHT40) Mode 5550MHz (U-NII-2C)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11100.061	39.45	14.67	54.12	74.00	-19.88	peak
2 *	11100.321	23.29	14.67	37.96	54.00	-16.04	AVG

## Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value



Ant. Pol.	Horizontal						
Test Mode:	TX 802.11ac(VHT40) Mode 5670MHz (U-NII-2C)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11339.695	39.30	14.80	54.10	74.00	-19.90	peak
2 *	11339.787	24.30	14.80	39.10	54.00	-14.90	AVG

## Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value

Ant. Pol.	Vertical						
Test Mode:	TX 802.11ac(VHT40) Mode 5670MHz (U-NII-2C)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11339.890	38.68	14.80	53.48	74.00	-20.52	peak
2 *	11340.205	22.93	14.80	37.73	54.00	-16.27	AVG

## Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value



Ant. Pol.	Horizontal						
Test Mode:	TX 802.11ac(VHT80) Mode 5530MHz (U-NII-2C)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	11060.310	24.60	14.63	39.23	54.00	-14.77	AVG
2	11060.362	39.37	14.63	54.00	74.00	-20.00	peak

## Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value

Ant. Pol.	Vertical						
Test Mode:	TX 802.11ac(VHT80) Mode 5530MHz (U-NII-2C)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11059.679	39.91	14.63	54.54	74.00	-19.46	peak
2 *	11060.351	24.95	14.63	39.58	54.00	-14.42	AVG

## Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value



Ant. Pol.	Horizontal						
Test Mode:	TX 802.11ac(VHT80) Mode 5610MHz (U-NII-2C)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11219.674	40.40	14.68	55.08	74.00	-18.92	peak
2 *	11219.911	24.95	14.68	39.63	54.00	-14.37	AVG

Remarks:  
1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor  
2. Margin value = Level -Limit value

Ant. Pol.	Vertical						
Test Mode:	TX 802.11ac(VHT80) Mode 5610MHz (U-NII-2C)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	11219.784	24.39	14.68	39.07	54.00	-14.93	AVG
2	11220.190	40.07	14.68	54.75	74.00	-19.25	peak

Remarks:  
1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor  
2. Margin value = Level -Limit value



Ant. Pol.	Horizontal						
Test Mode:	TX 802.11a Mode 5745MHz (U-NII-3)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	11489.419	25.79	14.94	40.73	54.00	-13.27	AVG
2	11490.324	40.25	14.95	55.20	74.00	-18.80	peak

## Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value

Ant. Pol.	Vertical						
Test Mode:	TX 802.11a Mode 5745MHz (U-NII-3)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	11489.687	23.62	14.94	38.56	54.00	-15.44	AVG
2	11489.869	39.57	14.94	54.51	74.00	-19.49	peak

## Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value



Ant. Pol.	Horizontal						
Test Mode:	TX 802.11a Mode 5785MHz (U-NII-3)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11569.672	39.11	15.00	54.11	74.00	-19.89	peak
2 *	11570.032	25.52	15.01	40.53	54.00	-13.47	AVG

## Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value

Ant. Pol.	Vertical						
Test Mode:	TX 802.11a Mode 5785MHz (U-NII-3)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11570.316	39.22	15.01	54.23	74.00	-19.77	peak
2 *	11570.320	21.74	15.01	36.75	54.00	-17.25	AVG

## Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value



Ant. Pol.	Horizontal						
Test Mode:	TX 802.11a Mode 5825MHz (U-NII-3)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11649.768	39.52	15.01	54.53	74.00	-19.47	peak
2 *	11649.941	26.09	15.01	41.10	54.00	-12.90	AVG

## Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value

Ant. Pol.	Vertical						
Test Mode:	TX 802.11a Mode 5825MHz (U-NII-3)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	11649.672	22.94	15.01	37.95	54.00	-16.05	AVG
2	11649.781	40.05	15.01	55.06	74.00	-18.94	peak

## Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value



<b>Ant. Pol.</b>	Horizontal						
<b>Test Mode:</b>	TX 802.11ac(VHT20) Mode 5745MHz (U-NII-3)						
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	11489.875	25.57	14.94	40.51	54.00	-13.49	AVG
2	11490.132	39.59	14.95	54.54	74.00	-19.46	peak

**Remarks:**

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value

<b>Ant. Pol.</b>	Vertical						
<b>Test Mode:</b>	TX 802.11ac(VHT20) Mode 5745MHz (U-NII-3)						
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	11489.675	25.48	14.94	40.42	54.00	-13.58	AVG
2	11489.746	40.55	14.94	55.49	74.00	-18.51	peak

**Remarks:**

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value



<b>Ant. Pol.</b>	Horizontal						
<b>Test Mode:</b>	TX 802.11ac(VHT20) Mode 5785MHz (U-NII-3)						
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11570.110	40.12	15.01	55.13	74.00	-18.87	peak
2 *	11570.210	25.79	15.01	40.80	54.00	-13.20	AVG

**Remarks:**

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value

<b>Ant. Pol.</b>	Vertical						
<b>Test Mode:</b>	TX 802.11ac(VHT20) Mode 5785MHz (U-NII-3)						
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11570.123	39.40	15.01	54.41	74.00	-19.59	peak
2 *	11570.425	21.85	15.01	36.86	54.00	-17.14	AVG

**Remarks:**

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value



<b>Ant. Pol.</b>	Horizontal						
<b>Test Mode:</b>	TX 802.11ac(VHT20) Mode 5825MHz (U-NII-3)						
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	11649.713	24.46	15.01	39.47	54.00	-14.53	AVG
2	11649.792	40.06	15.01	55.07	74.00	-18.93	peak

**Remarks:**

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value

<b>Ant. Pol.</b>	Vertical						
<b>Test Mode:</b>	TX 802.11ac(VHT20) Mode 5825MHz (U-NII-3)						
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11649.781	39.41	15.01	54.42	74.00	-19.58	peak
2 *	11649.988	21.96	15.01	36.97	54.00	-17.03	AVG

**Remarks:**

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value



<b>Ant. Pol.</b>	Horizontal						
<b>Test Mode:</b>	TX 802.11ac(VHT40) Mode 5755MHz (U-NII-3)						
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	11509.900	25.06	14.95	40.01	54.00	-13.99	AVG
2	11510.329	40.07	14.96	55.03	74.00	-18.97	peak

**Remarks:**

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value

<b>Ant. Pol.</b>	Vertical						
<b>Test Mode:</b>	TX 802.11ac(VHT40) Mode 5755MHz (U-NII-3)						
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11509.791	40.67	14.95	55.62	74.00	-18.38	peak
2 *	11510.134	23.60	14.96	38.56	54.00	-15.44	AVG

**Remarks:**

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value



<b>Ant. Pol.</b>	Horizontal						
<b>Test Mode:</b>	TX 802.11ac(VHT40) Mode 5795MHz (U-NII-3)						
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11589.918	39.51	15.02	54.53	74.00	-19.47	peak
2 *	11590.131	24.47	15.03	39.50	54.00	-14.50	AVG

**Remarks:**

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value

<b>Ant. Pol.</b>	Vertical						
<b>Test Mode:</b>	TX 802.11ac(VHT40) Mode 5795MHz (U-NII-3)						
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	11589.872	21.97	15.02	36.99	54.00	-17.01	AVG
2	11590.132	39.93	15.03	54.96	74.00	-19.04	peak

**Remarks:**

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value



Ant. Pol.	Horizontal						
Test Mode:	TX 802.11ac(VHT80) Mode 5775MHz (U-NII-3)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	11549.690	41.08	14.98	56.06	74.00	-17.94	peak
2	11549.773	-4.55	14.98	10.43	54.00	-43.57	AVG

## Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value

Ant. Pol.	Vertical						
Test Mode:	TX 802.11ac(VHT80) Mode 5775MHz (U-NII-3)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11550.124	40.69	15.00	55.69	74.00	-18.31	peak
2 *	11550.347	25.18	15.00	40.18	54.00	-13.82	AVG

## Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value

### 3.3. Band Edge Emissions

#### Limit

##### Limits of unwanted emission out of the restricted bands

##### FCC CFR Title 47 Part 15 Subpart E Section 15. 407(b) / RSS-247 6.2

Frequency (MHz)	EIRP Limits (dBm)	Equivalent Field Strength at 3m (dB $\mu$ V/m)
5150~5250	-27	68.2
5250~5350	-27	68.2
5470~5725	-27	68.2
5725~5825	-27 (Note 2)	68.2
	10 (Note 2)	105.2
	15.6 (Note 2)	110.8
	27 (Note 2)	122.2


##### Note:

1. The following formula is used to convert the equipment isotropic radiated power (eirp) to field

$$\text{strength: } E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where } P \text{ is the eirp (Watts).}$$

2. According to FCC 16-24, all emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27dBm/MHz at the band edge.

#### Test Configuration

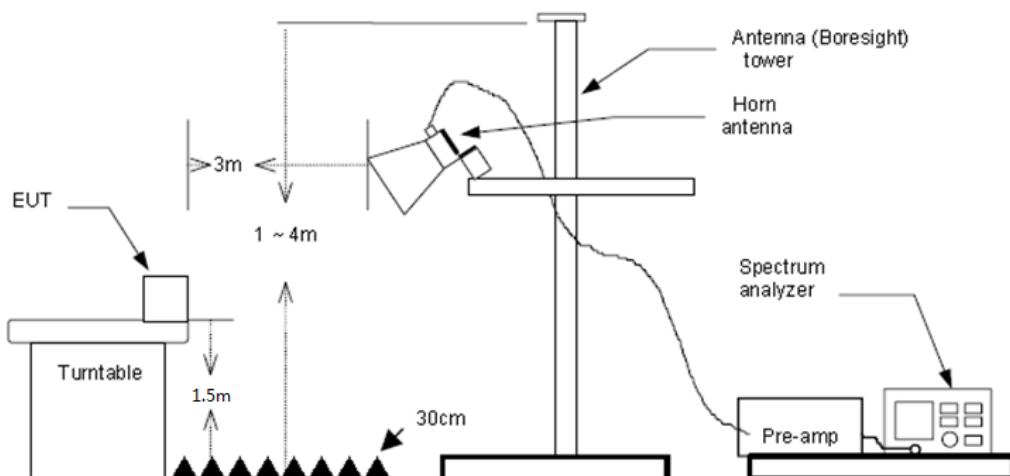



### **Test Procedure**

1. The EUT was setup and tested according to ANSI C63.10:2013 requirements.
2. The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.
4. The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10:2013 on radiated measurement.
5. The receiver set as follow:  
RBW=1MHz, VBW=3MHz Peak detector for Peak value.  
RBW=1MHz, VBW see note 1 with Peak Detector for Average Value.


Note 1: For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause Duty Cycle.


### **Test Mode**


Please refer to the clause 2.4.


### **Test Result**

*Note: Pre-scan both 4500-5150MHz, 5350-5460MHz were investigated, report only shows the test data for worst case.*

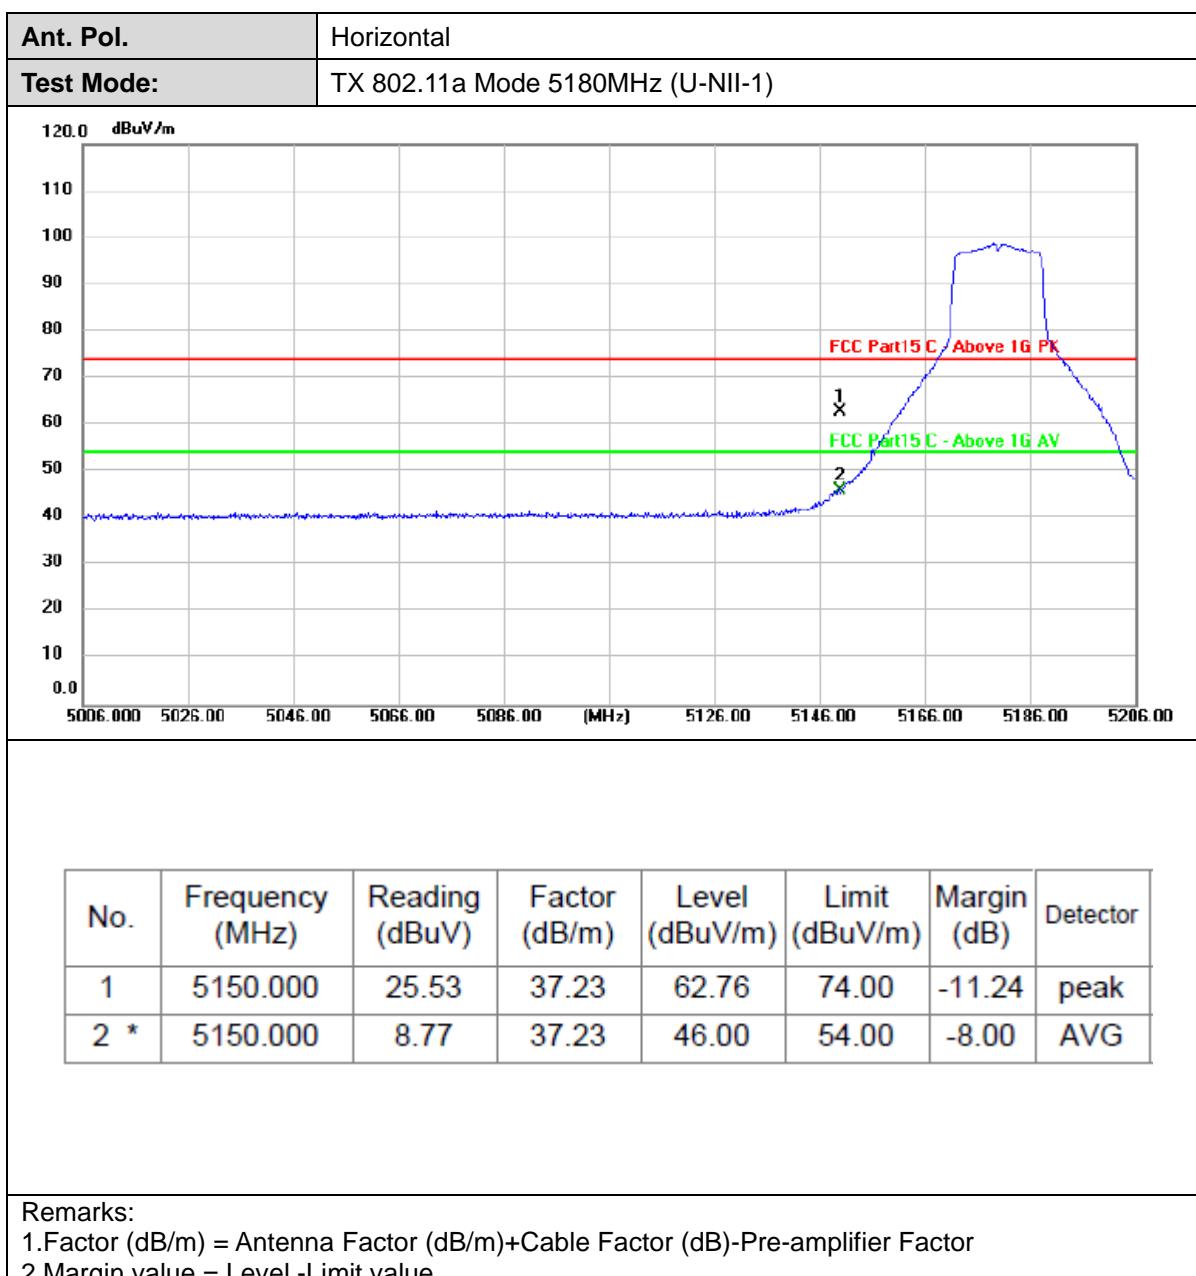

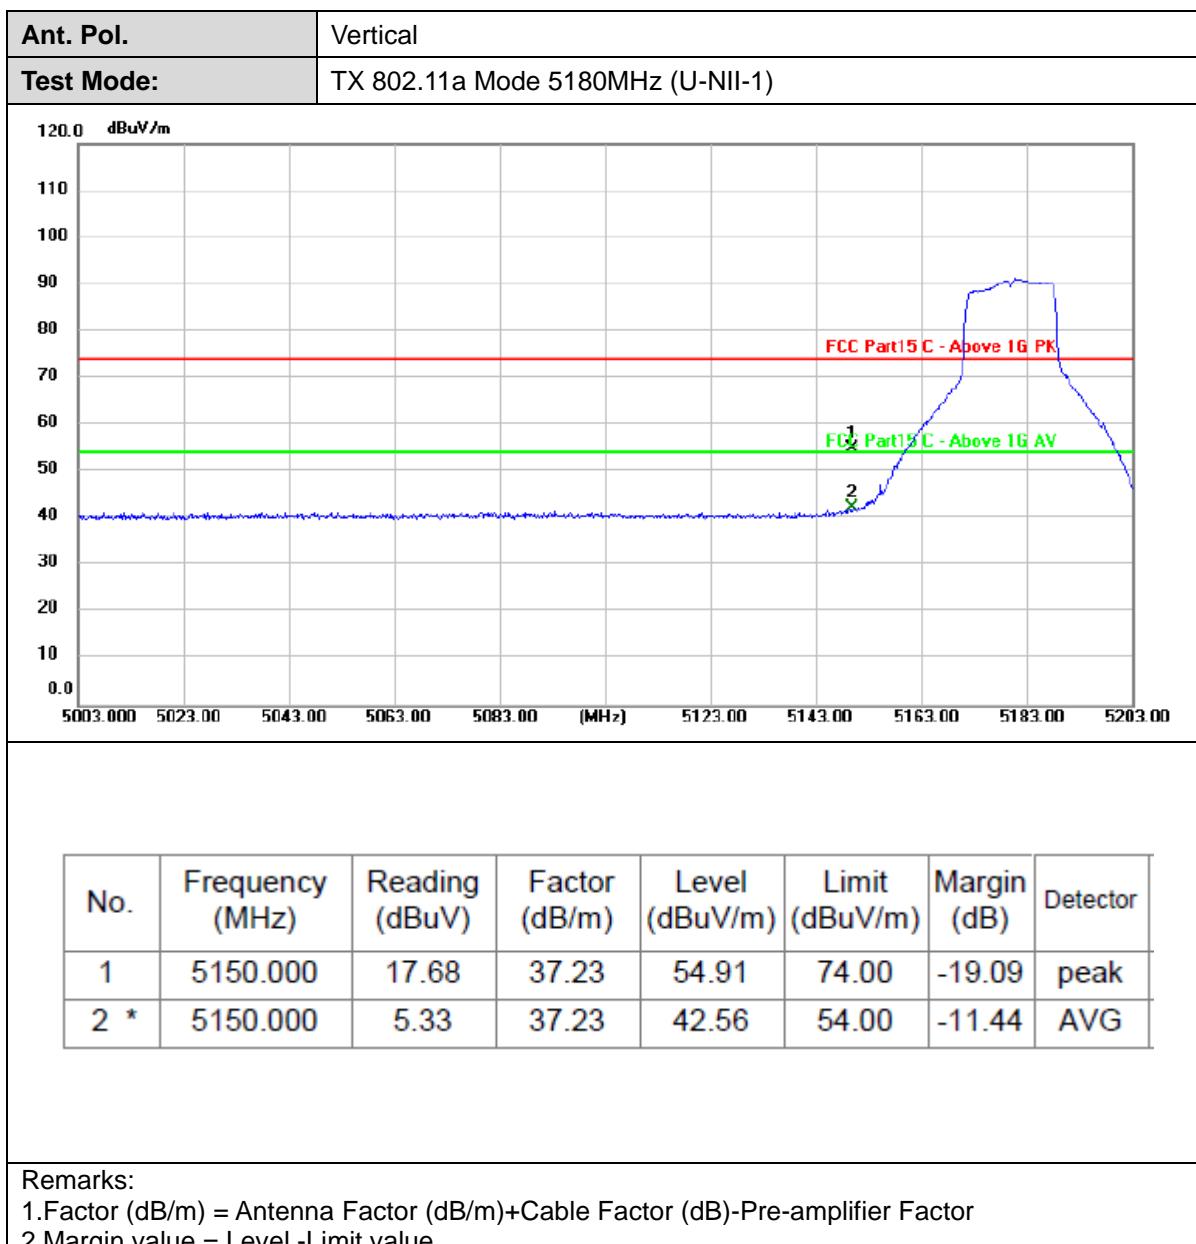

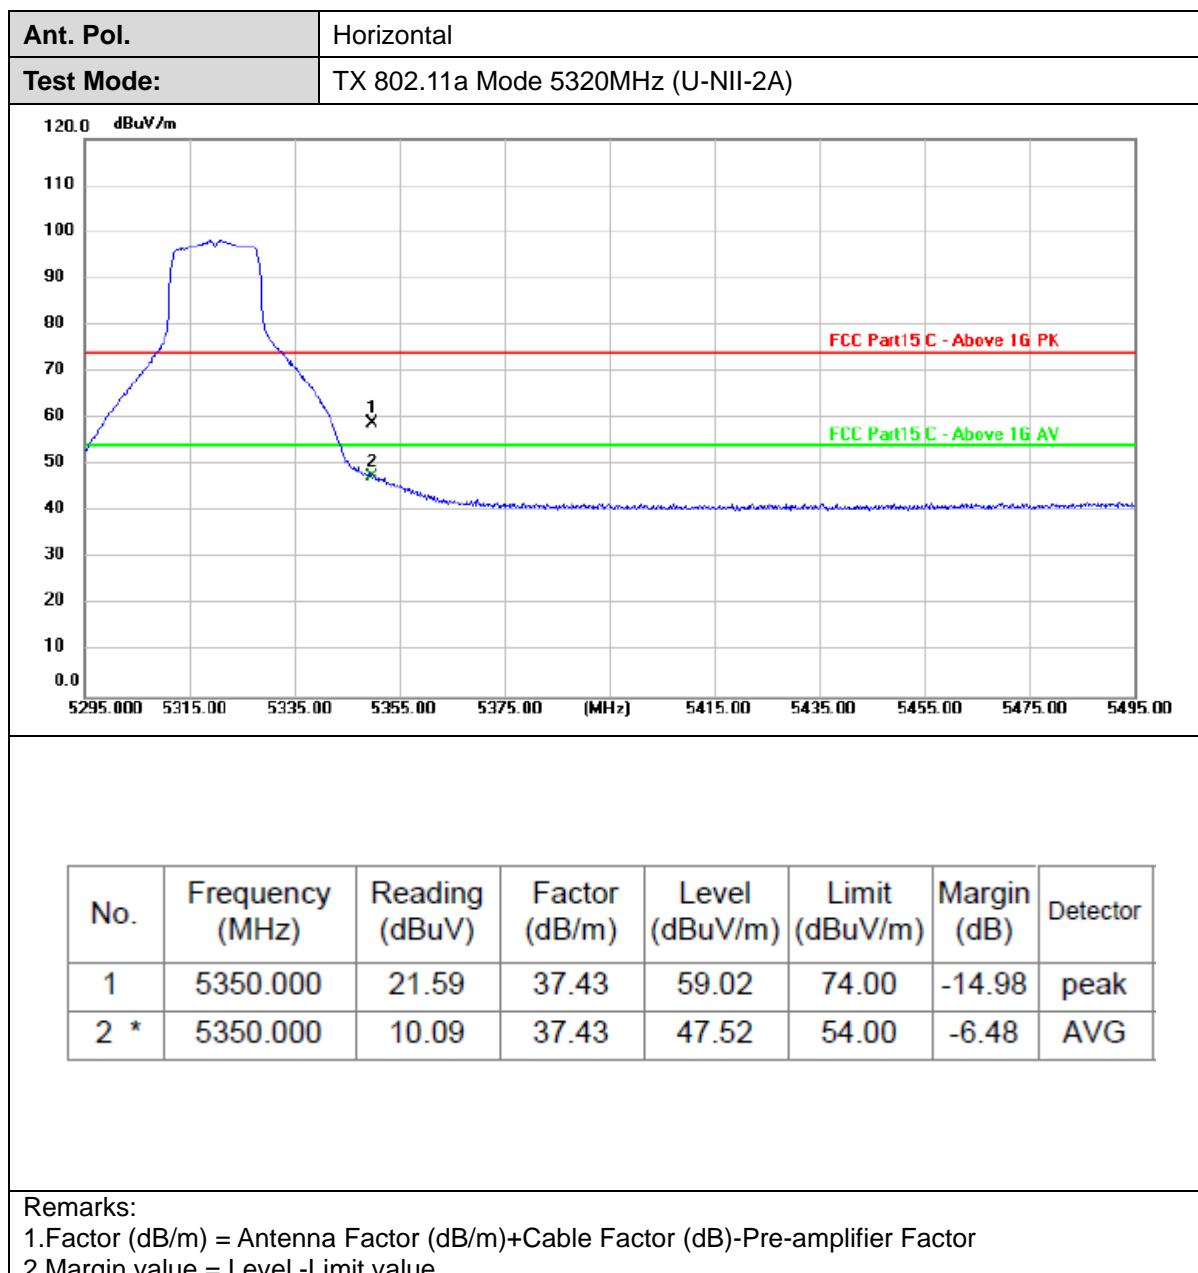

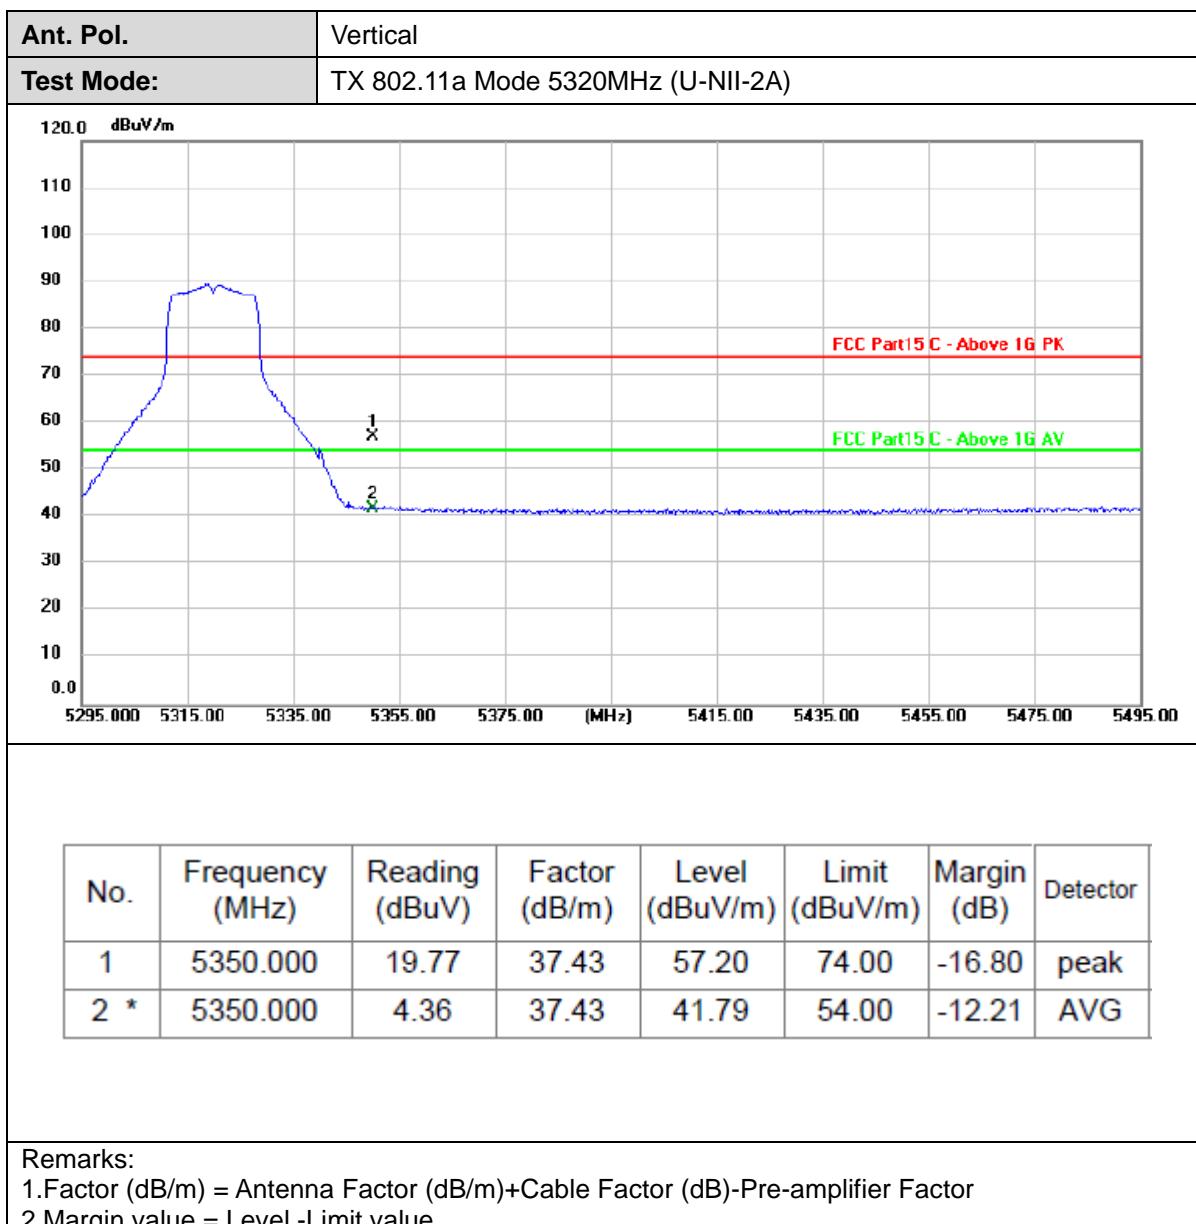


CTC Laboratories, Inc.

Room 101 Building B, No. 7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China  
Tel.: (86)755-27521059 Fax: (86)755-27521011 [Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)

TRF No: CTC-TR-062\_A1

For anti-fake verification, please visit the official website of China Inspection And Testing Society : [www.cnca.gov.cn](http://www.cnca.gov.cn)

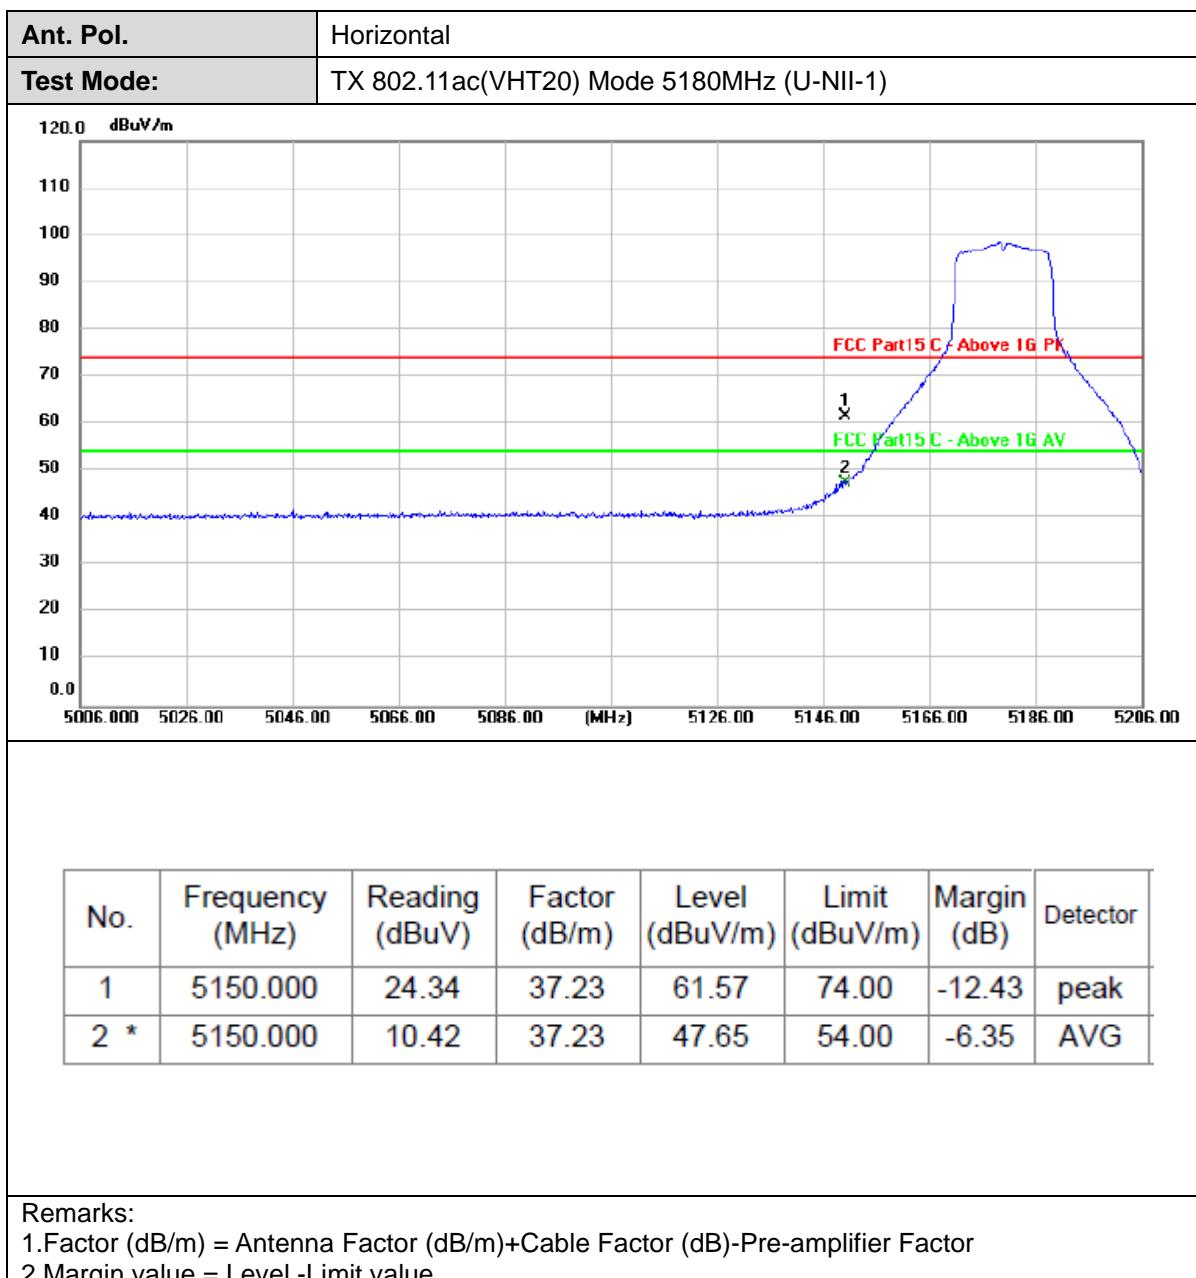



CTC Laboratories, Inc.

Room 101 Building B, No. 7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China  
Tel.: (86)755-27521059 Fax: (86)755-27521011 [Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)

TRF No: CTC-TR-062\_A1

For anti-fake verification, please visit the official website of China Inspection And Testing Society : [www.cnca.gov.cn](http://www.cnca.gov.cn)

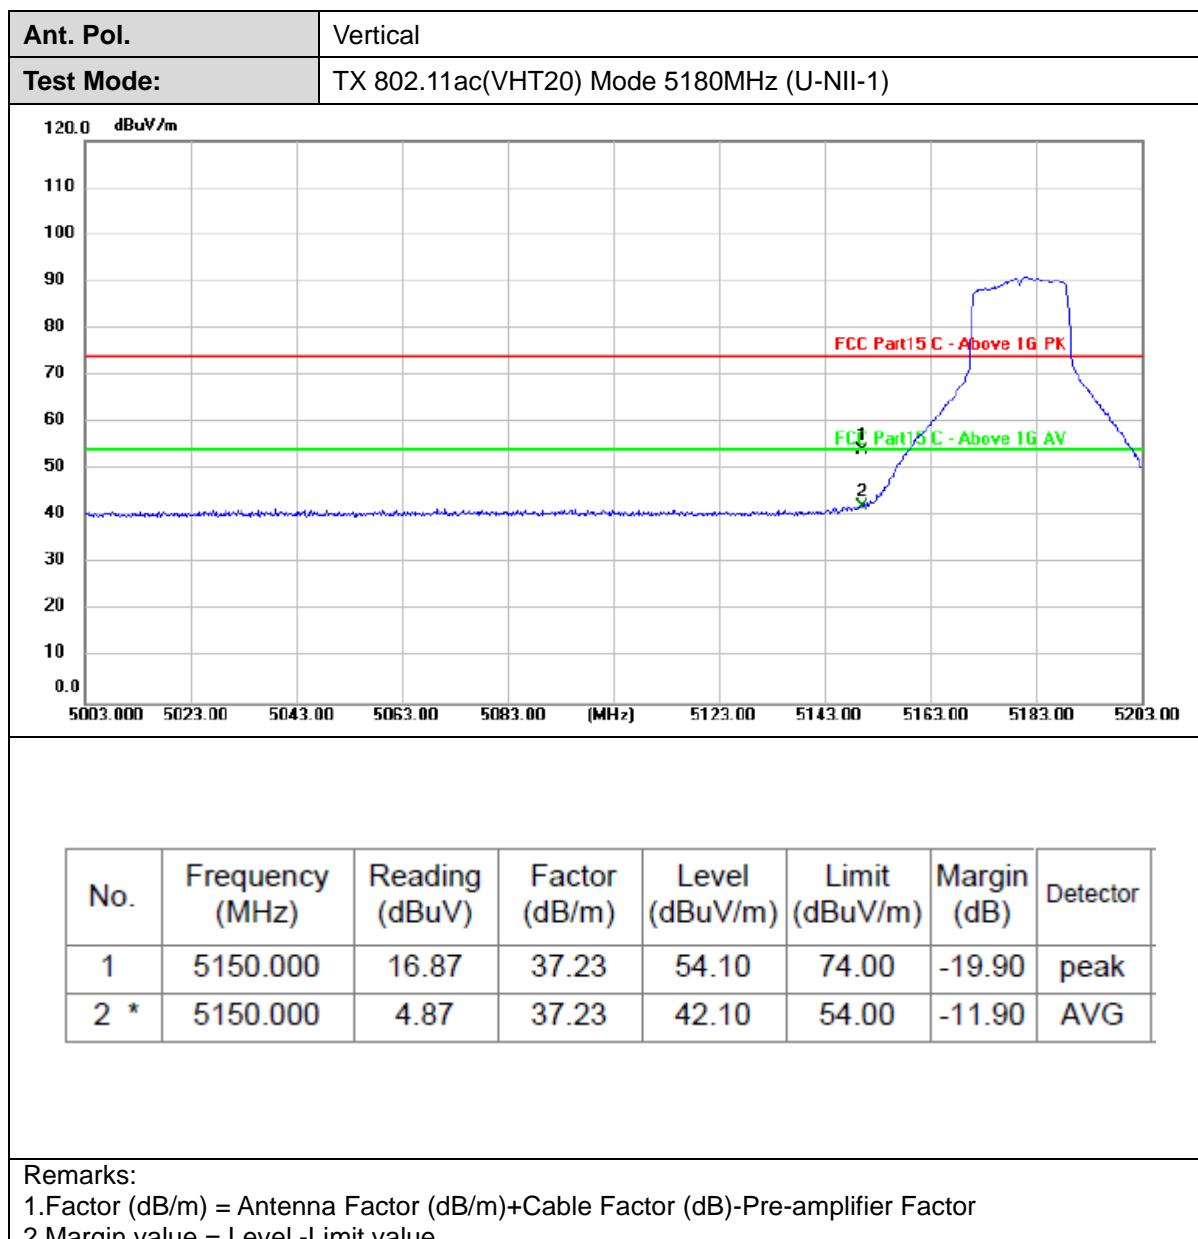

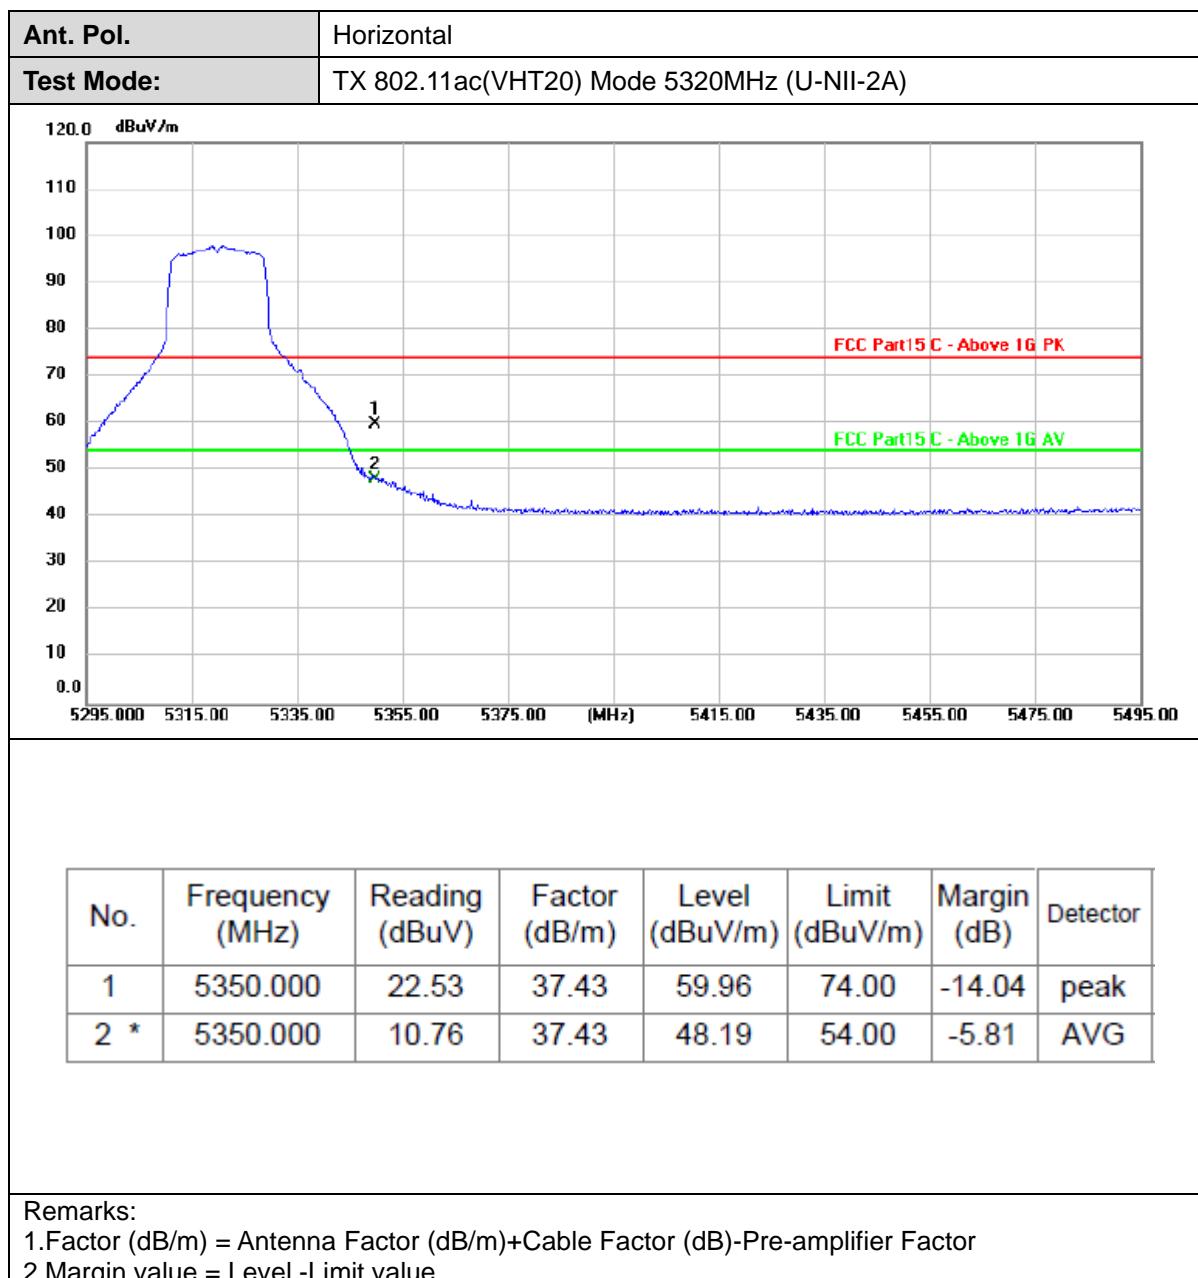


CTC Laboratories, Inc.

Room 101 Building B, No. 7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China  
Tel.: (86)755-27521059 Fax: (86)755-27521011 [Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)

TRF No: CTC-TR-062\_A1

For anti-fake verification, please visit the official website of China Inspection And Testing Society : [vz.cnca.cn](http://www.vz.cnca.cn)

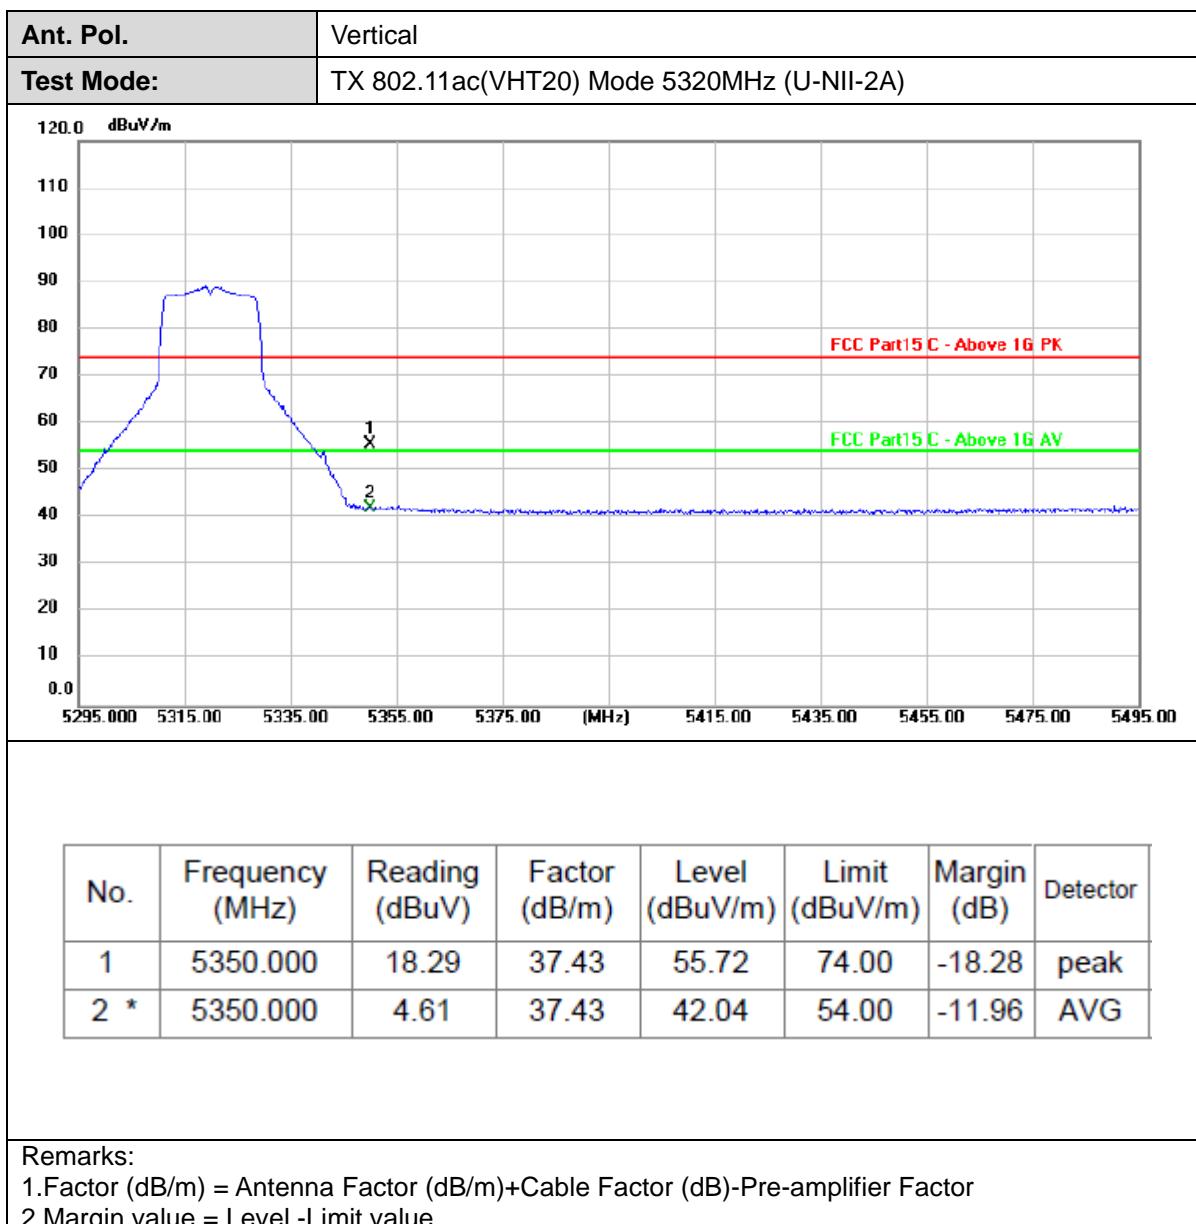



CTC Laboratories, Inc.


Room 101 Building B, No. 7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China  
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn


TRF No: CTC-TR-062\_A1

For anti-fake verification, please visit the official website of China Inspection And Testing Society : [vz.cnca.cn](http://www.vz.cnca.cn)

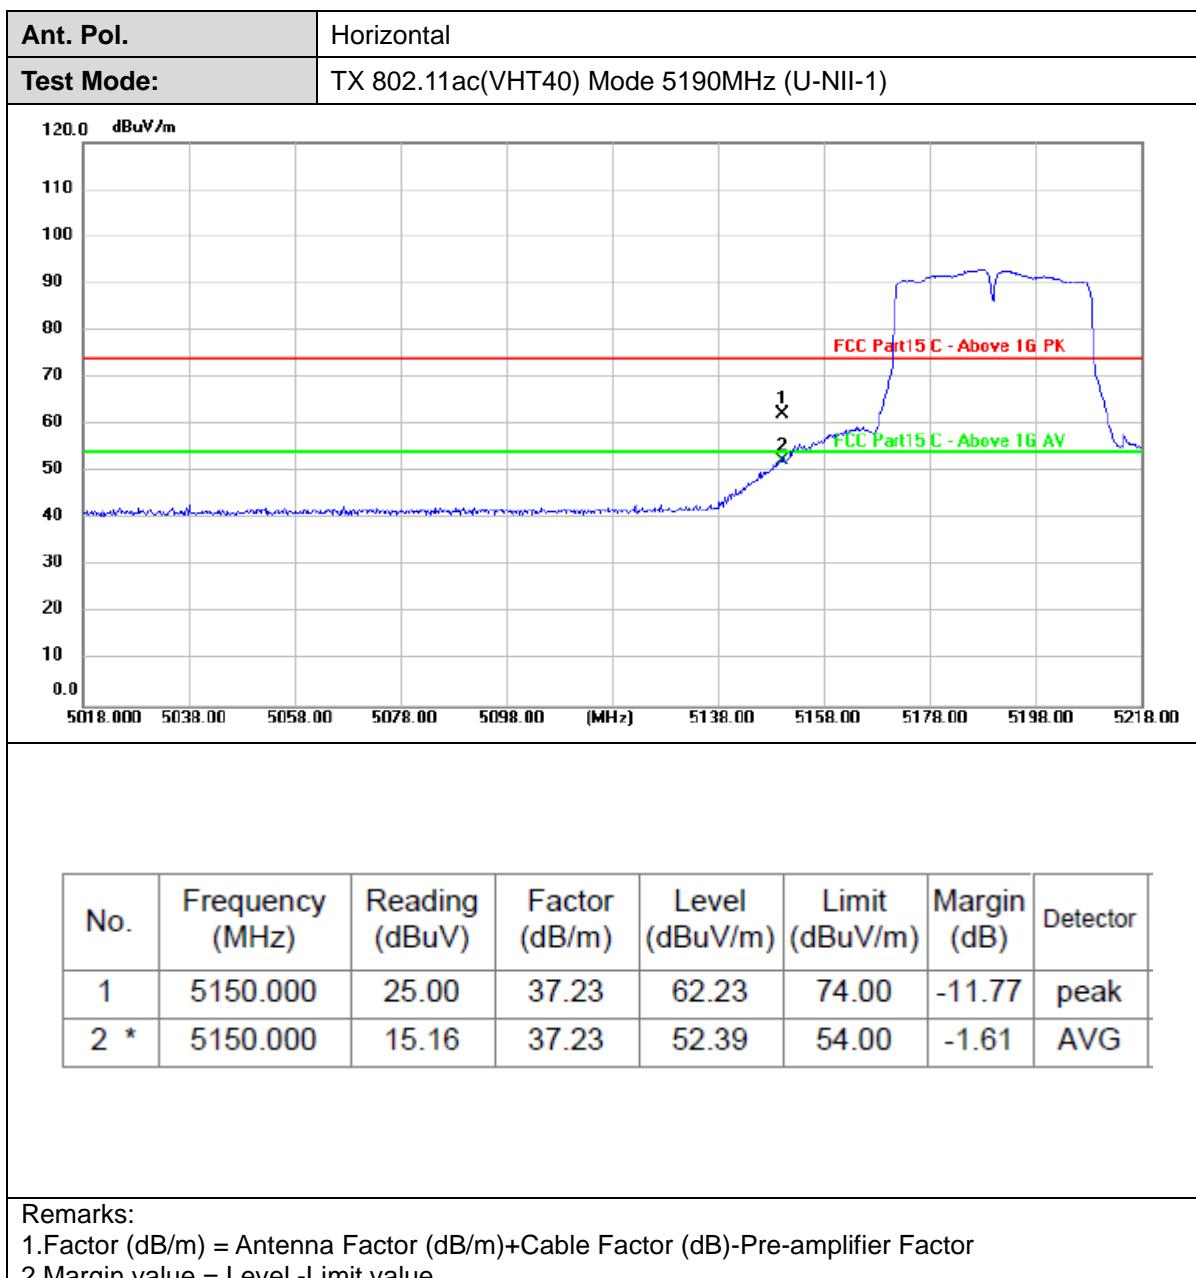

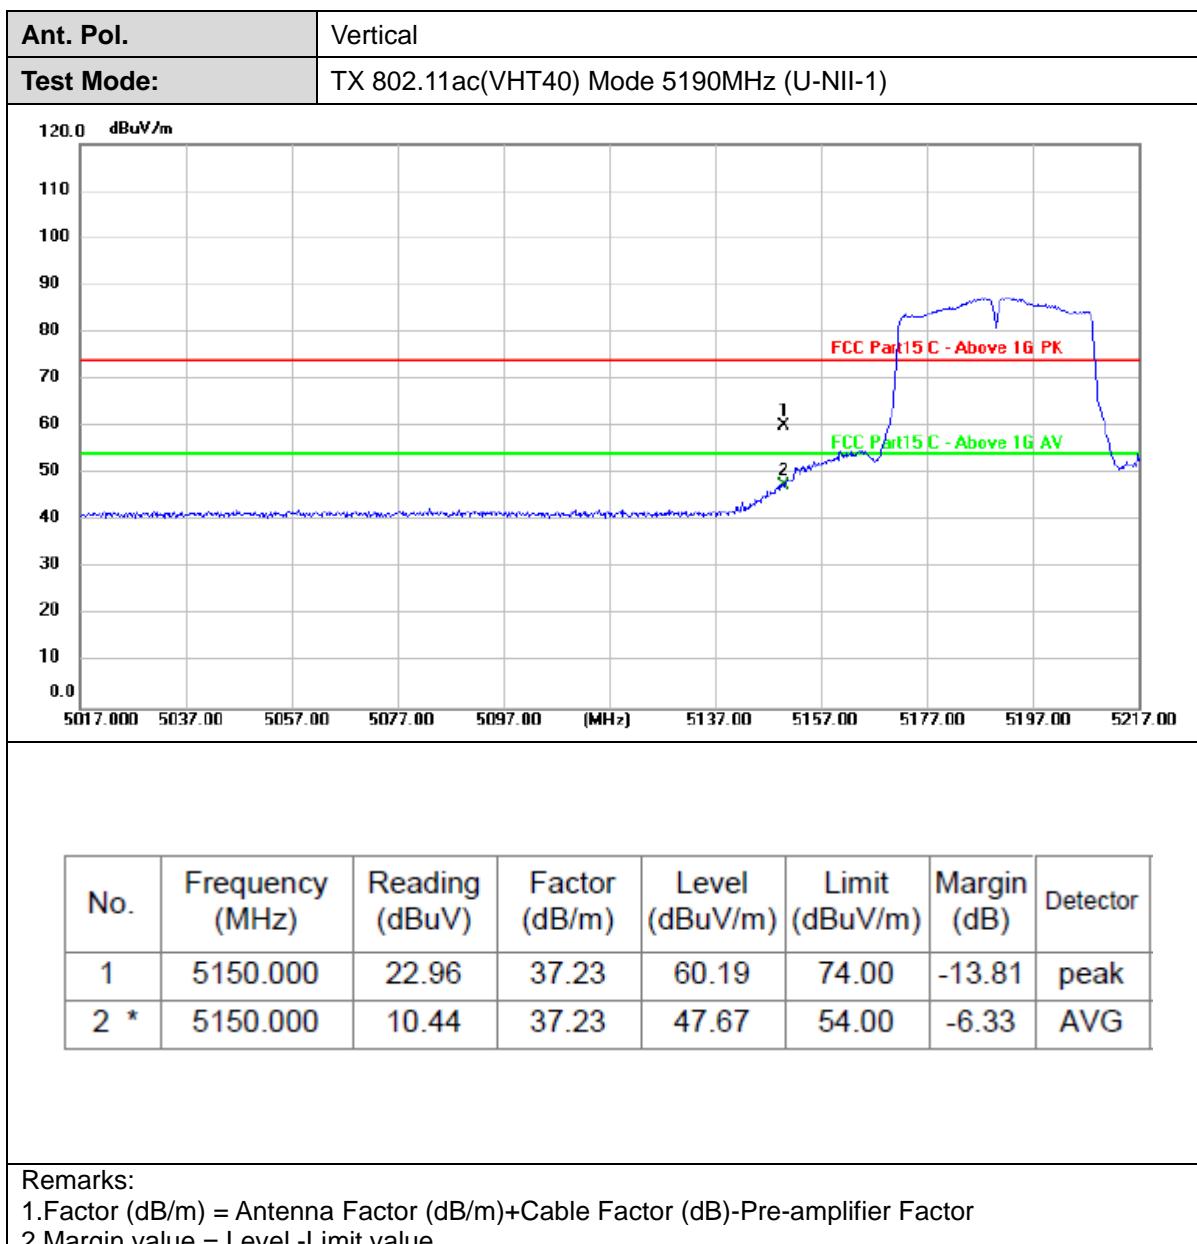

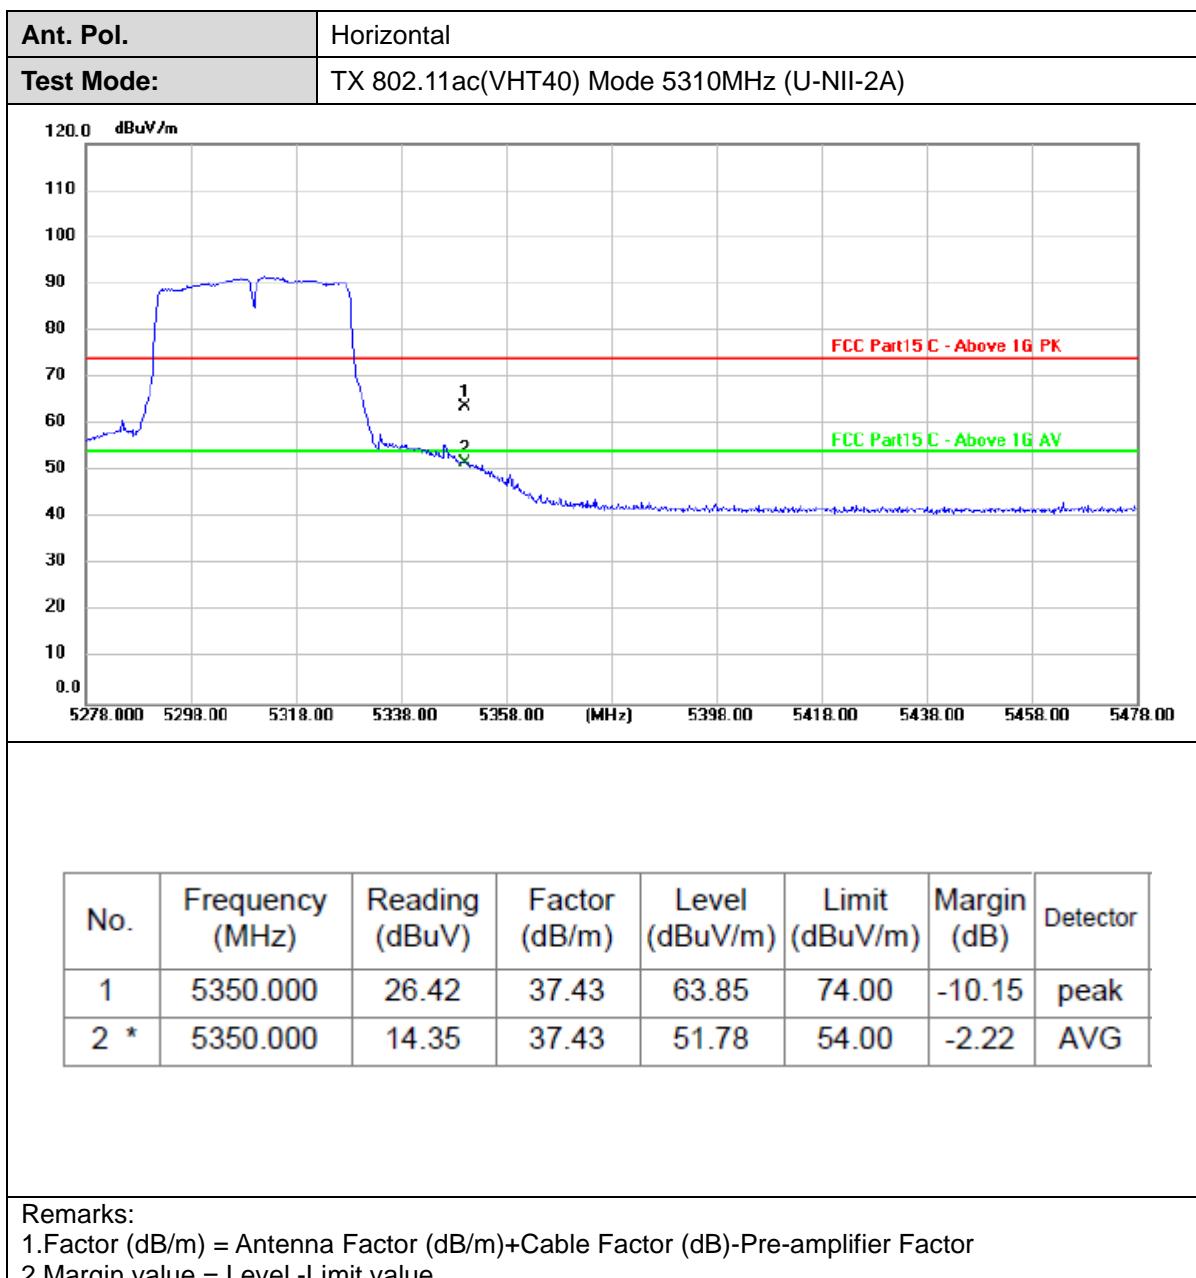

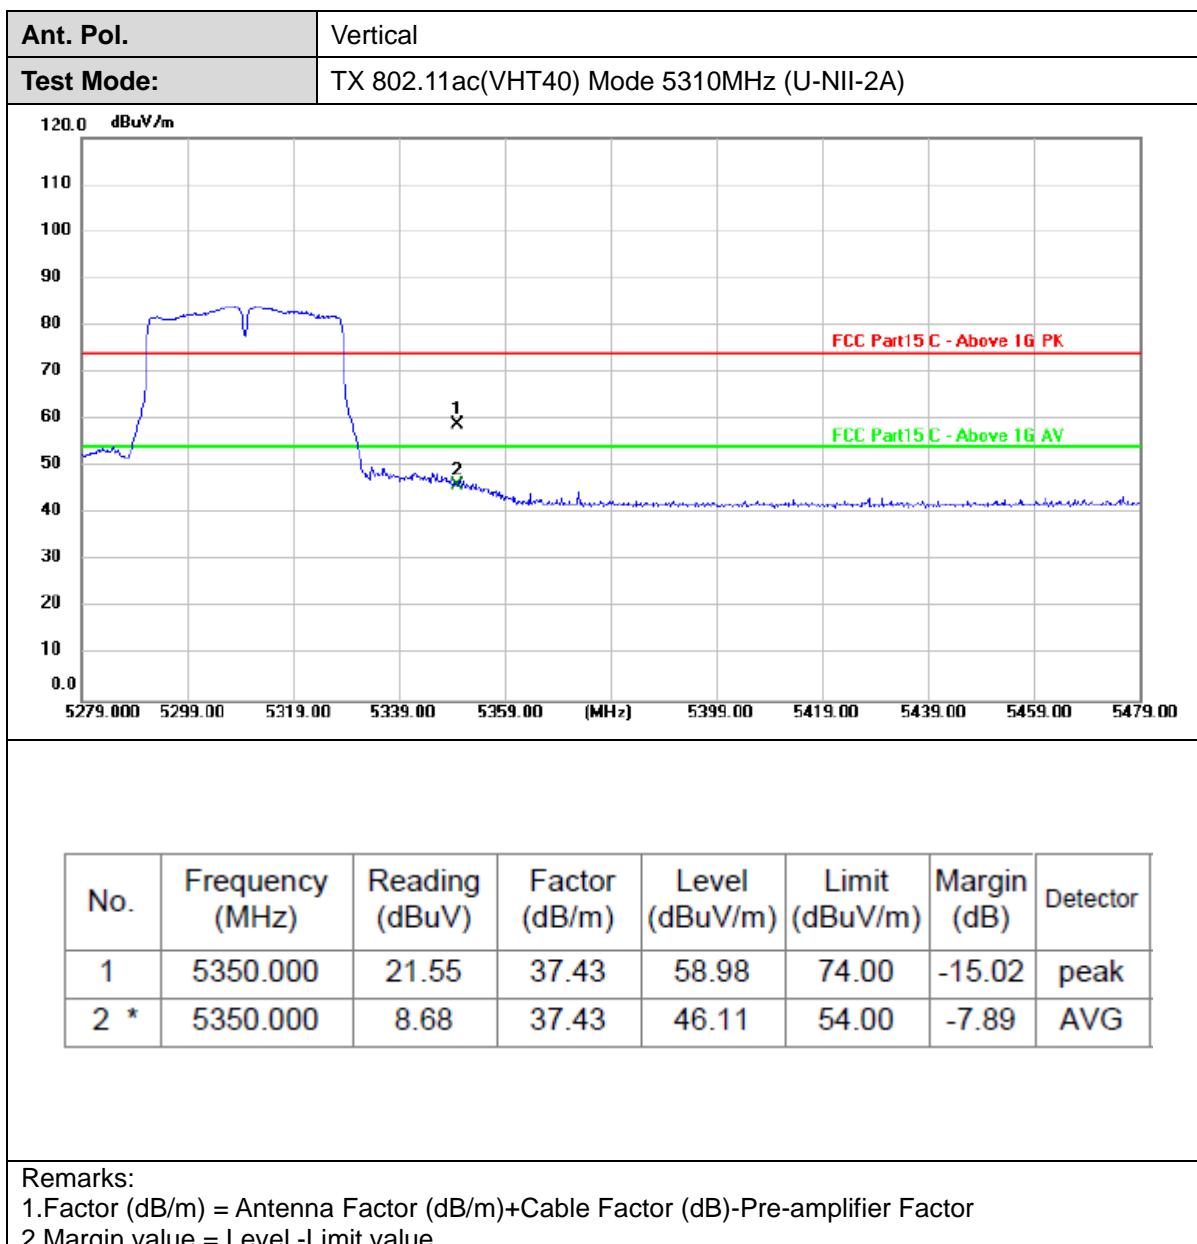



CTC Laboratories, Inc.


Room 101 Building B, No. 7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China  
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn


TRF No: CTC-TR-062\_A1


For anti-fake verification, please visit the official website of China Inspection And Testing Society : [www.cnca.gov.cn](http://www.cnca.gov.cn)

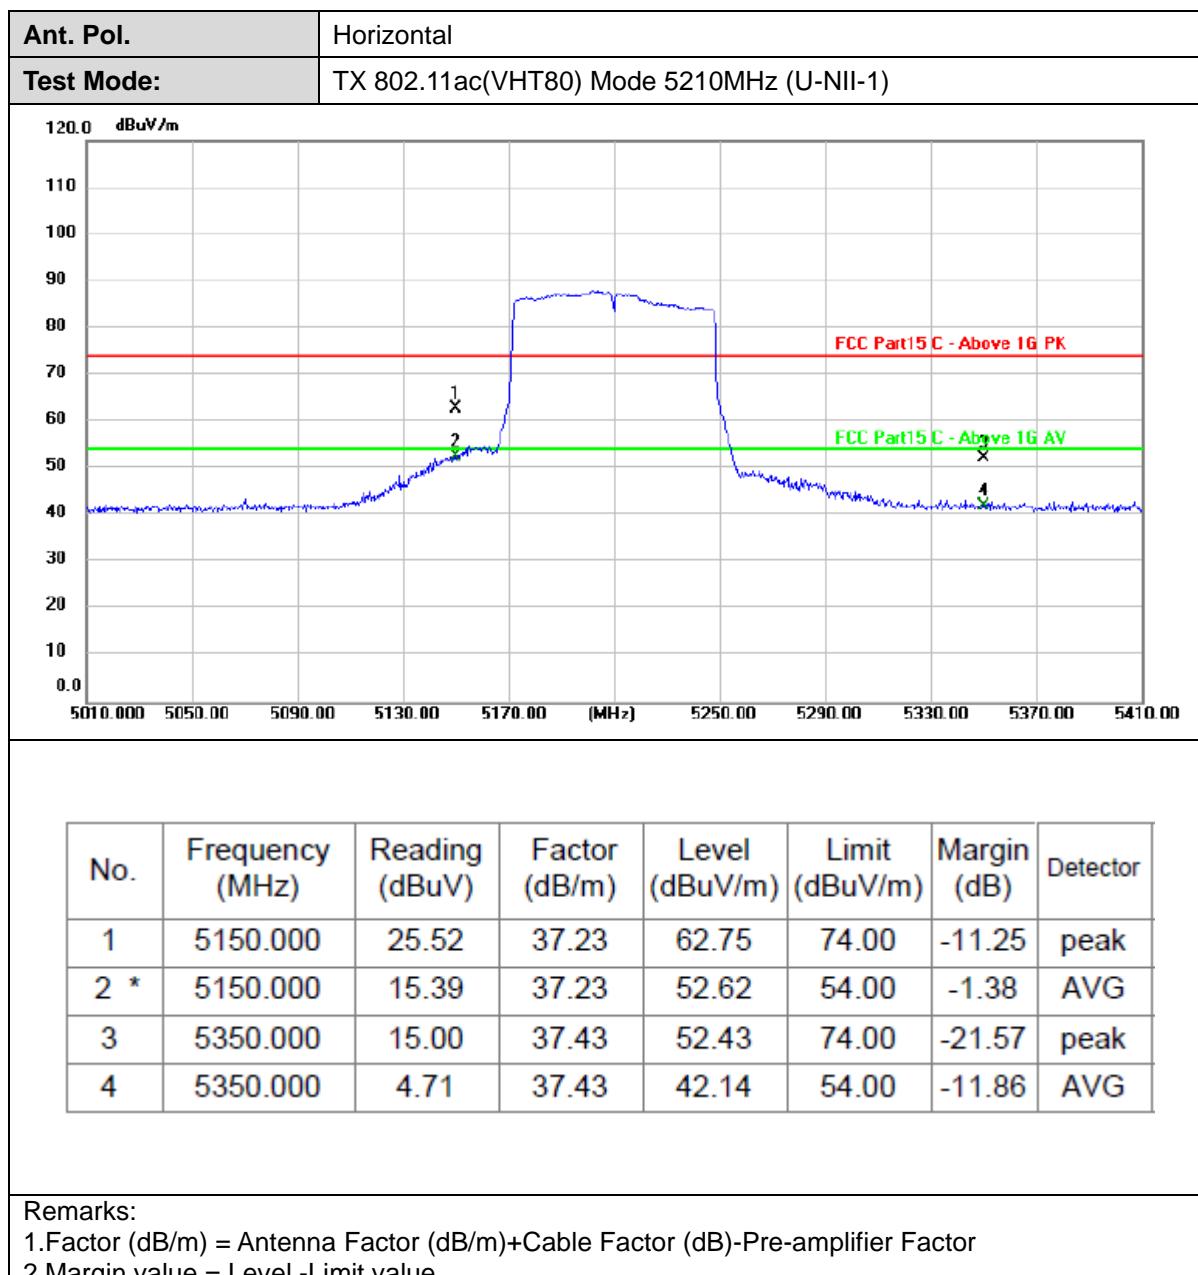


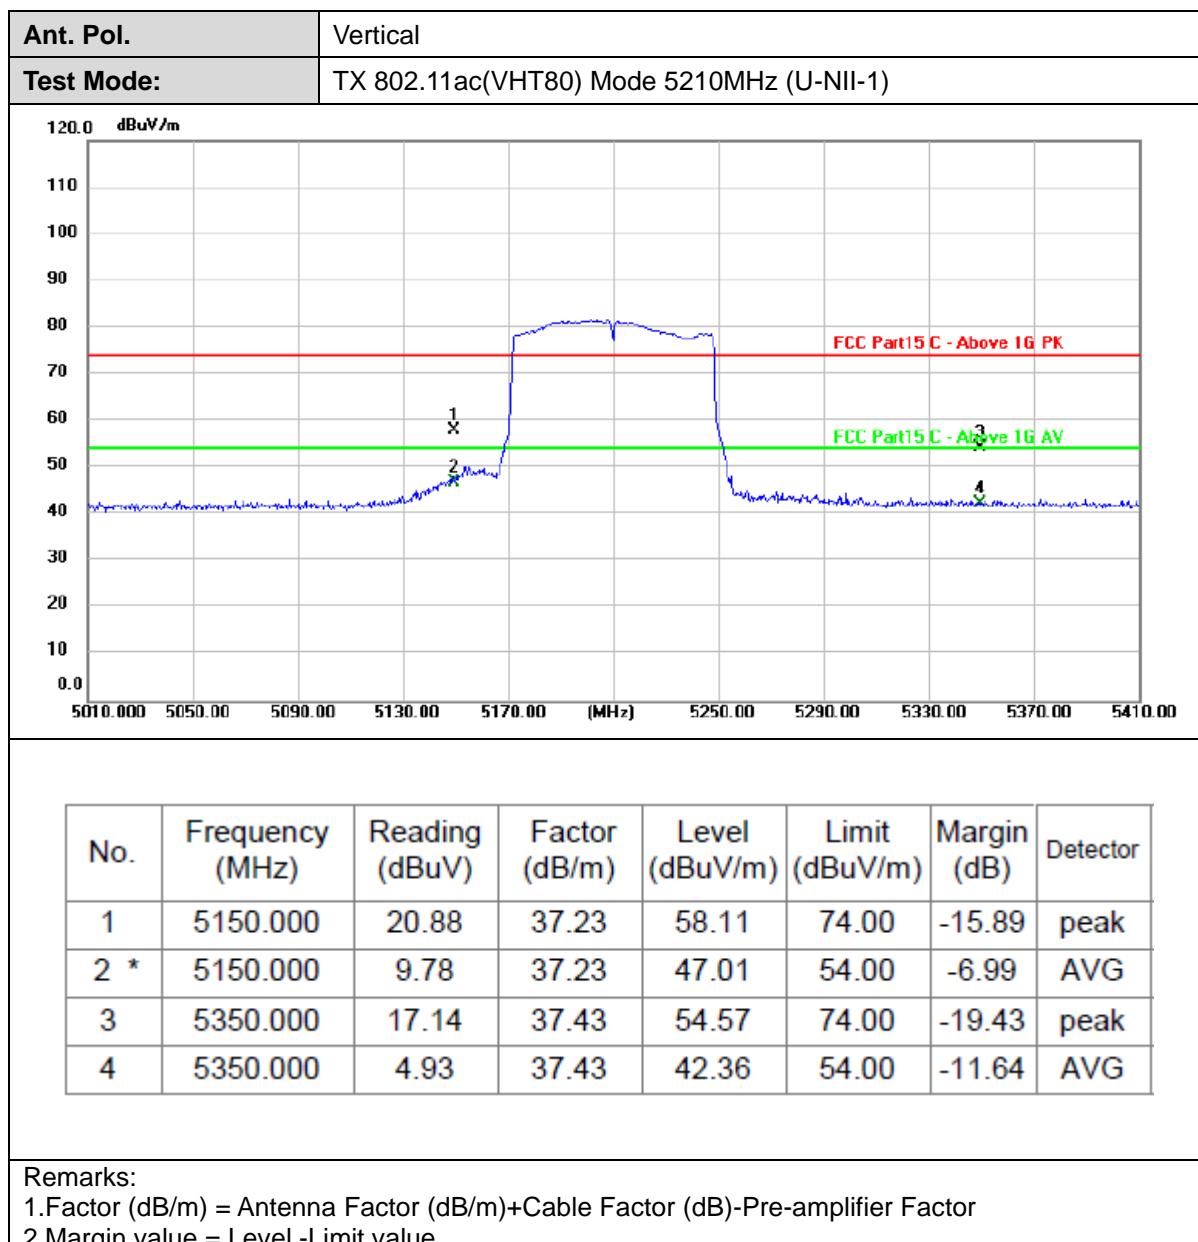


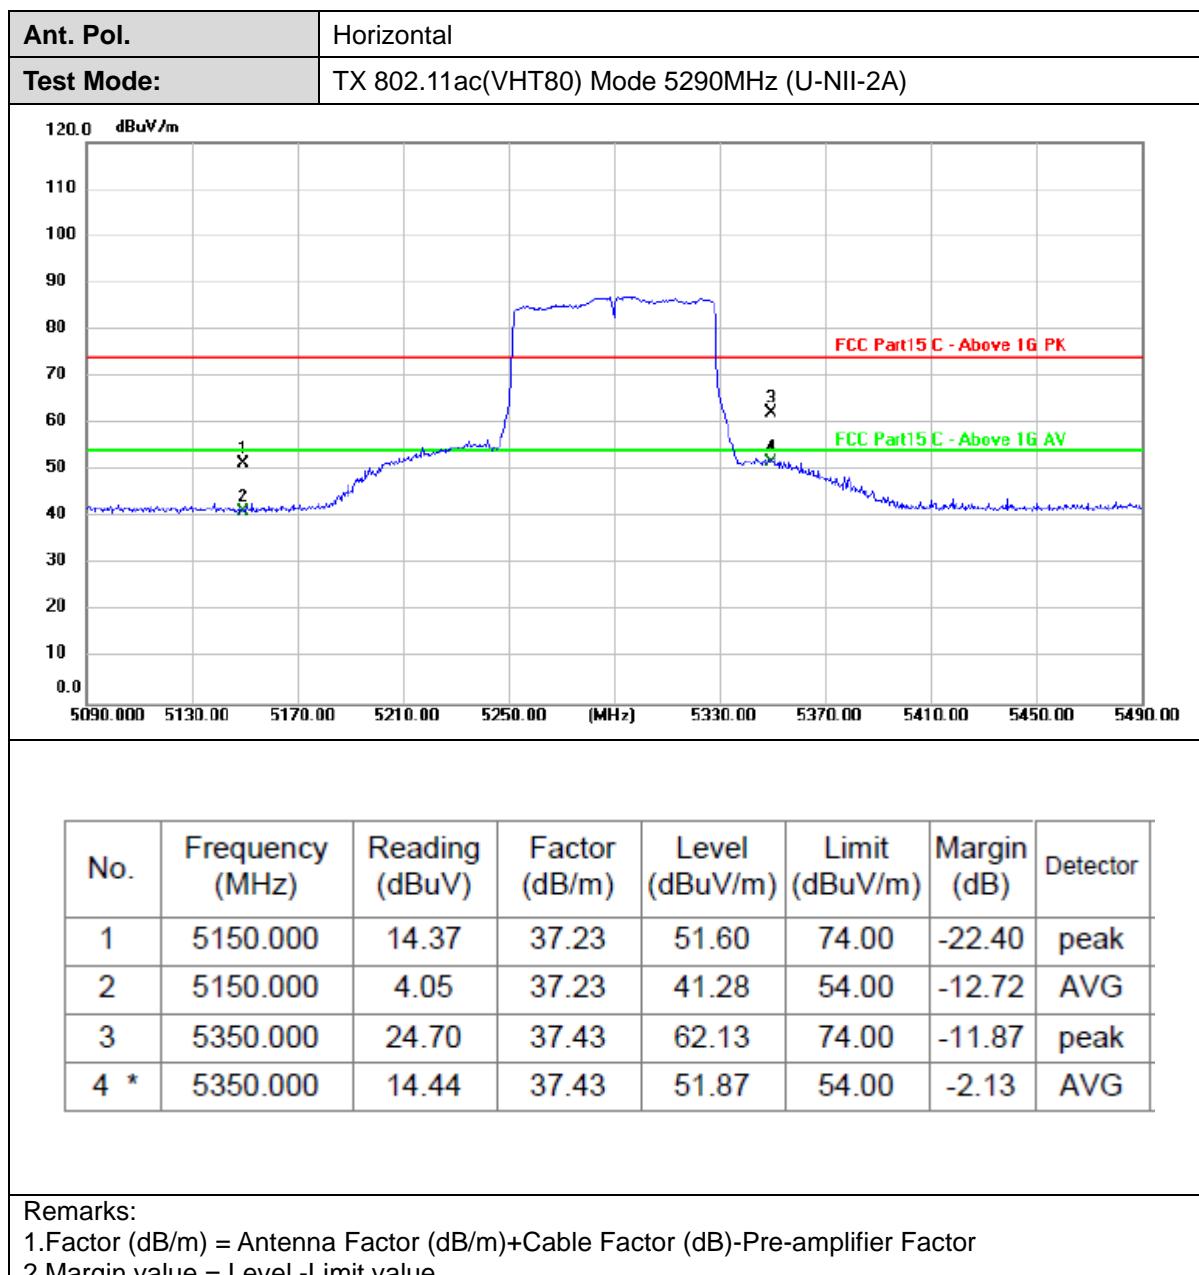


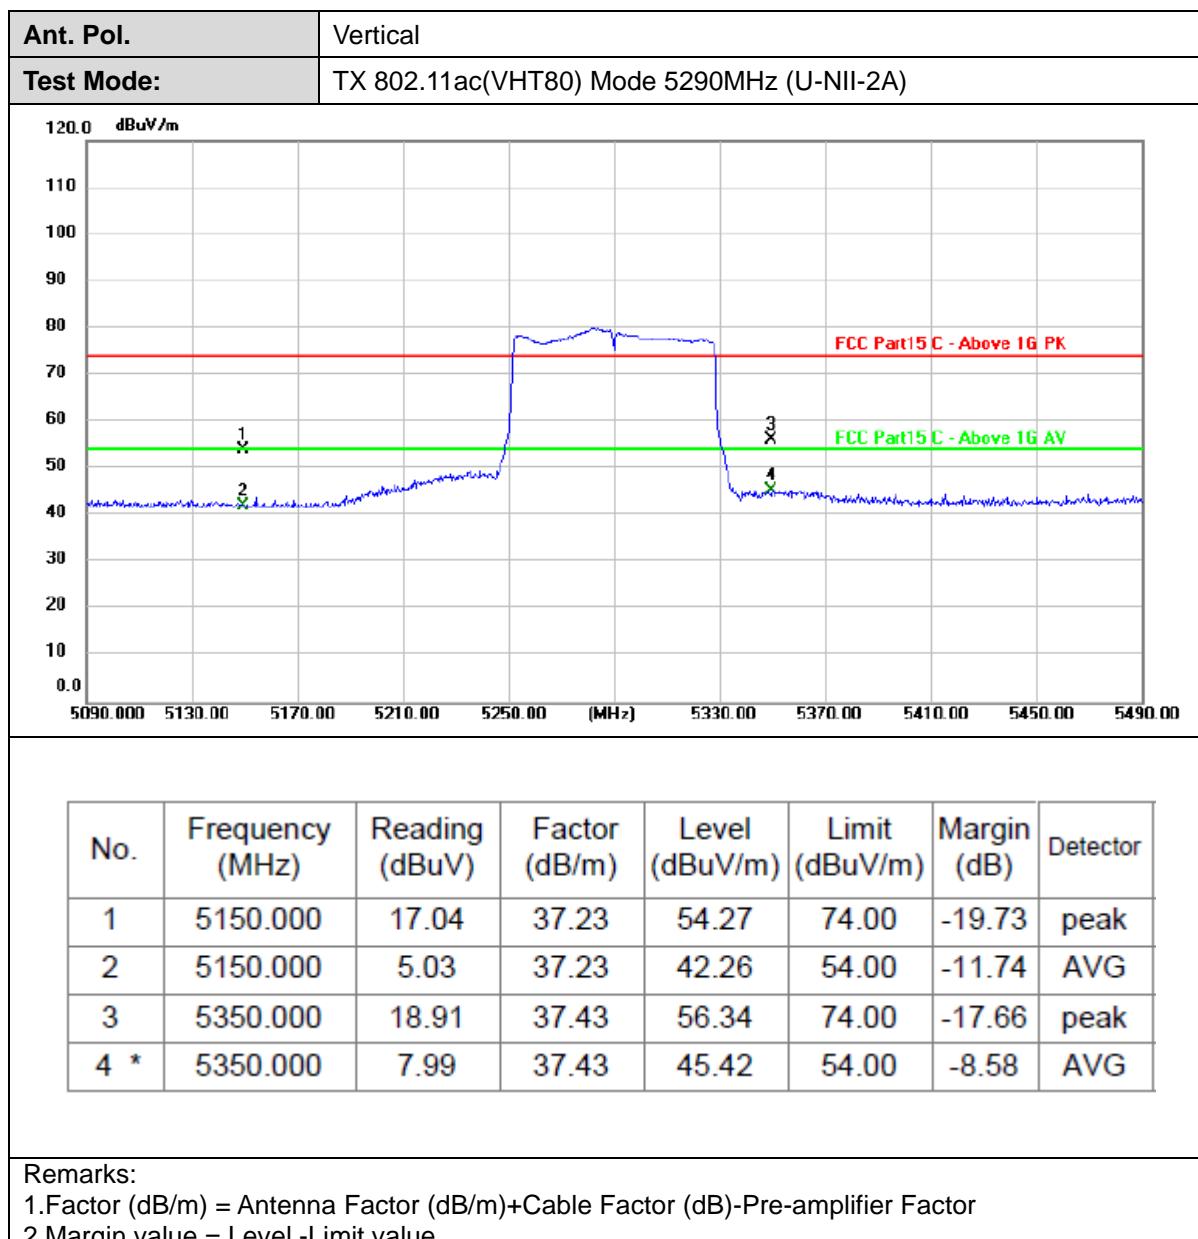


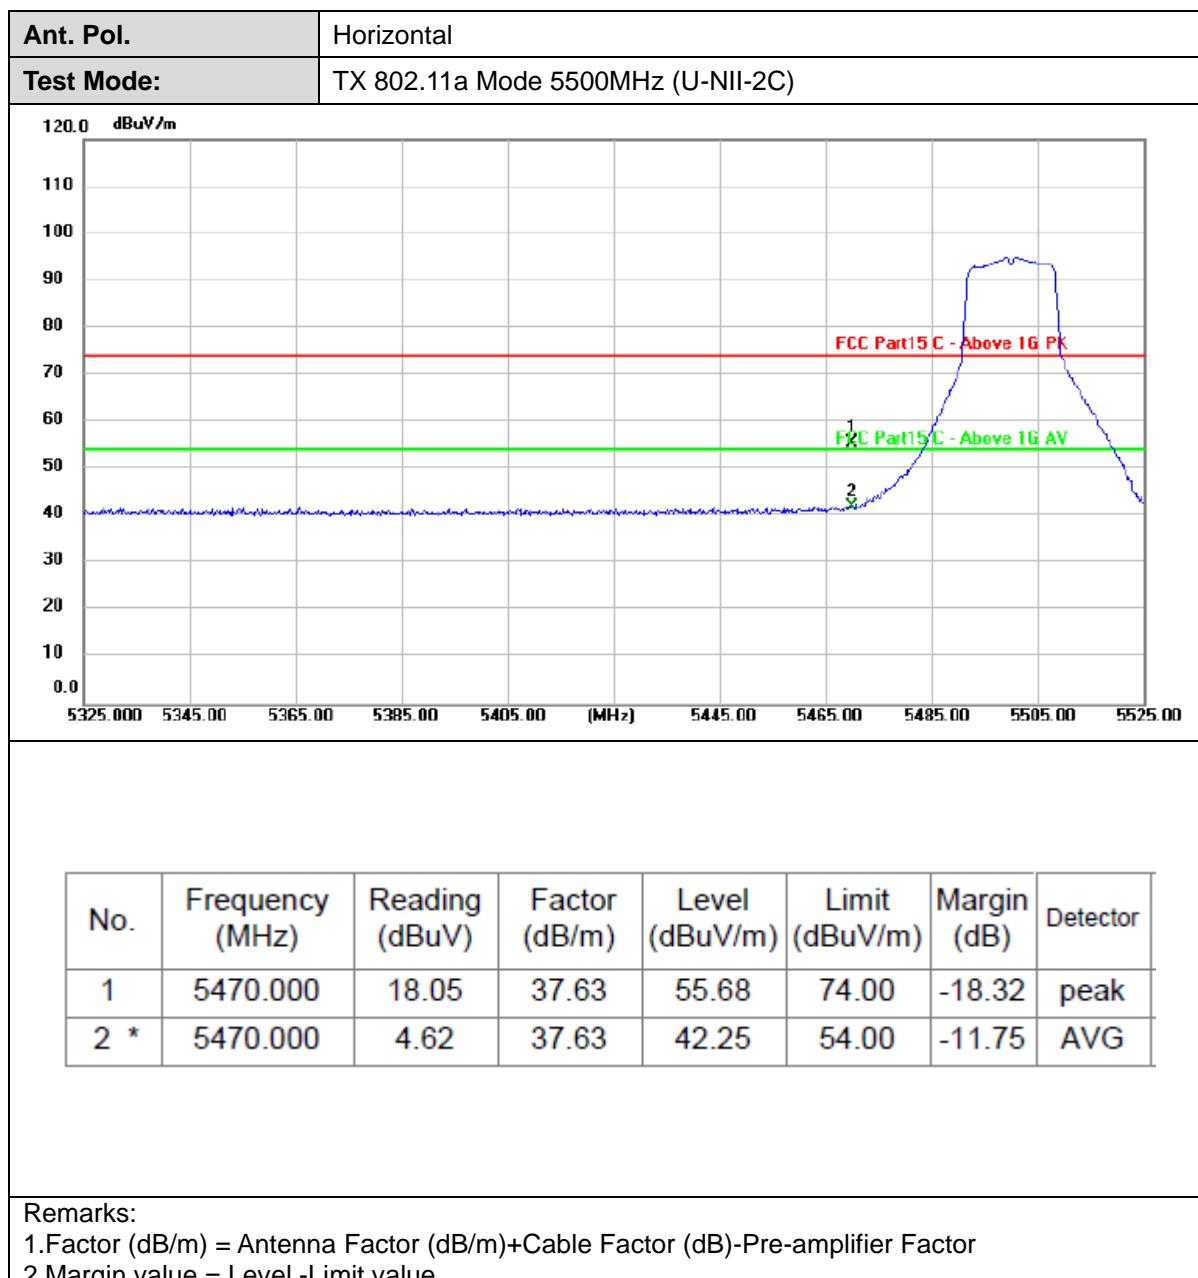


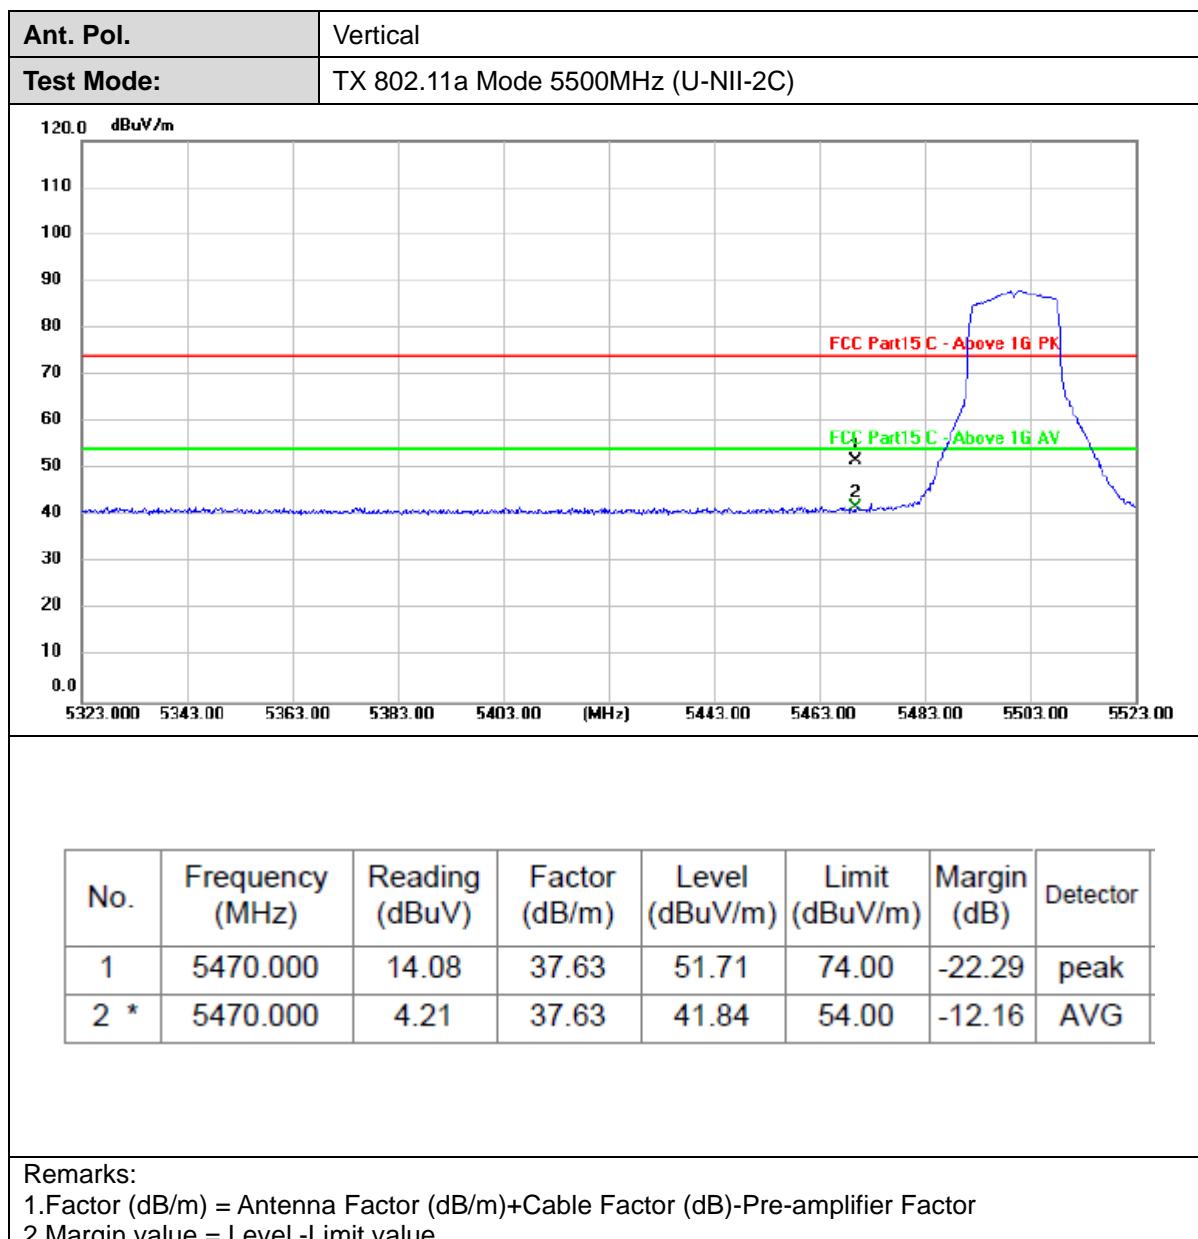


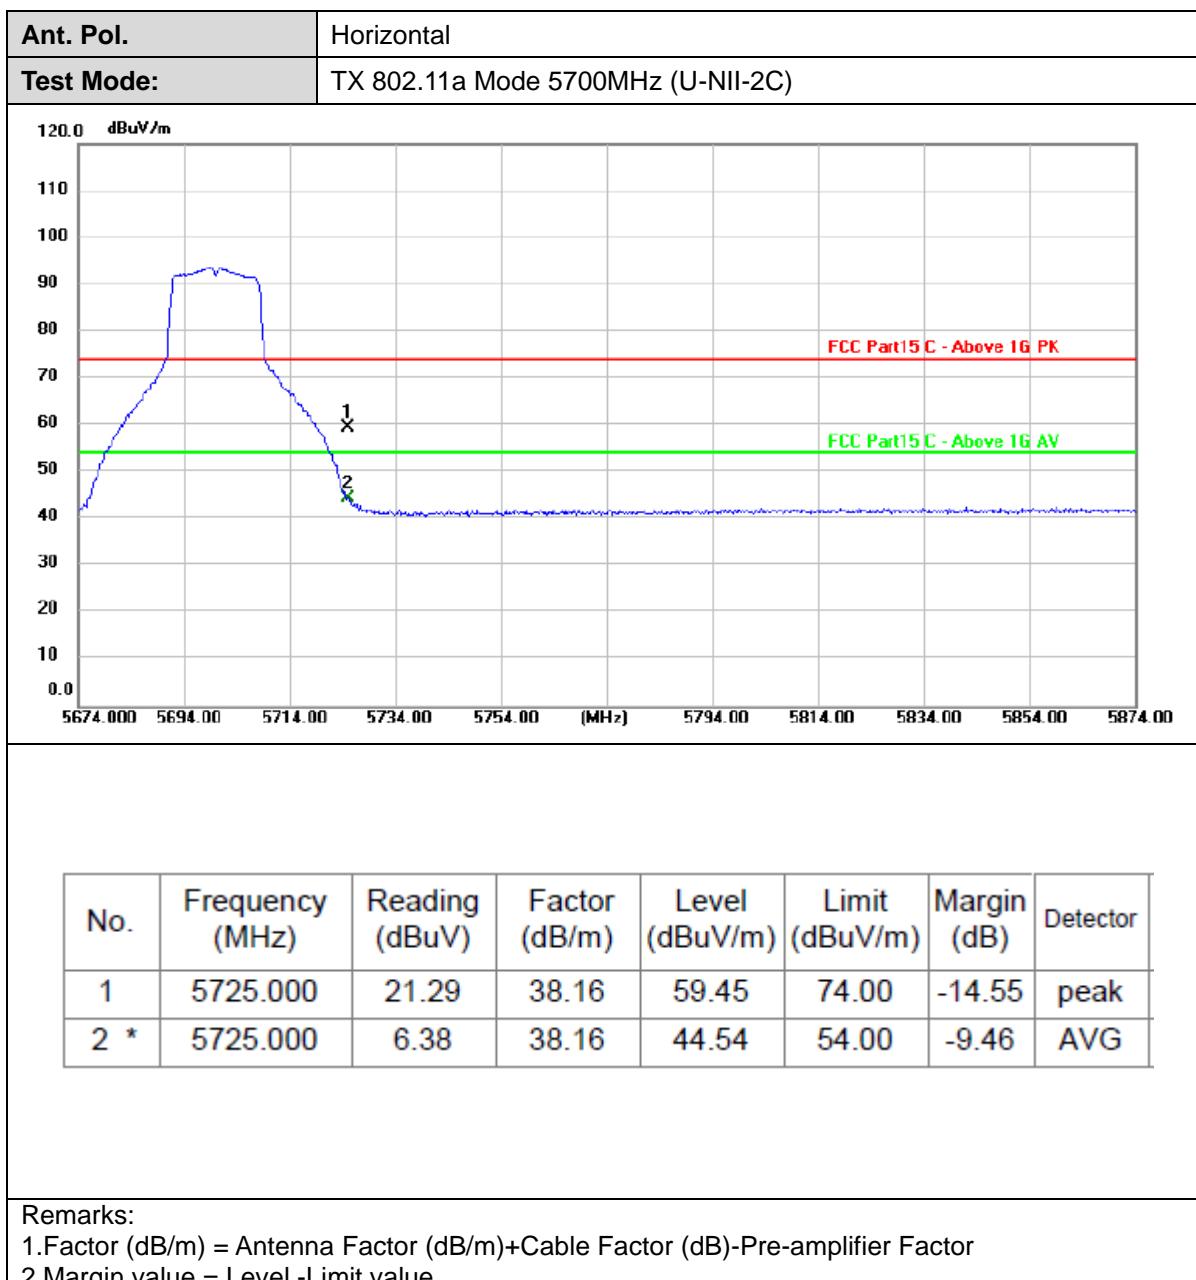

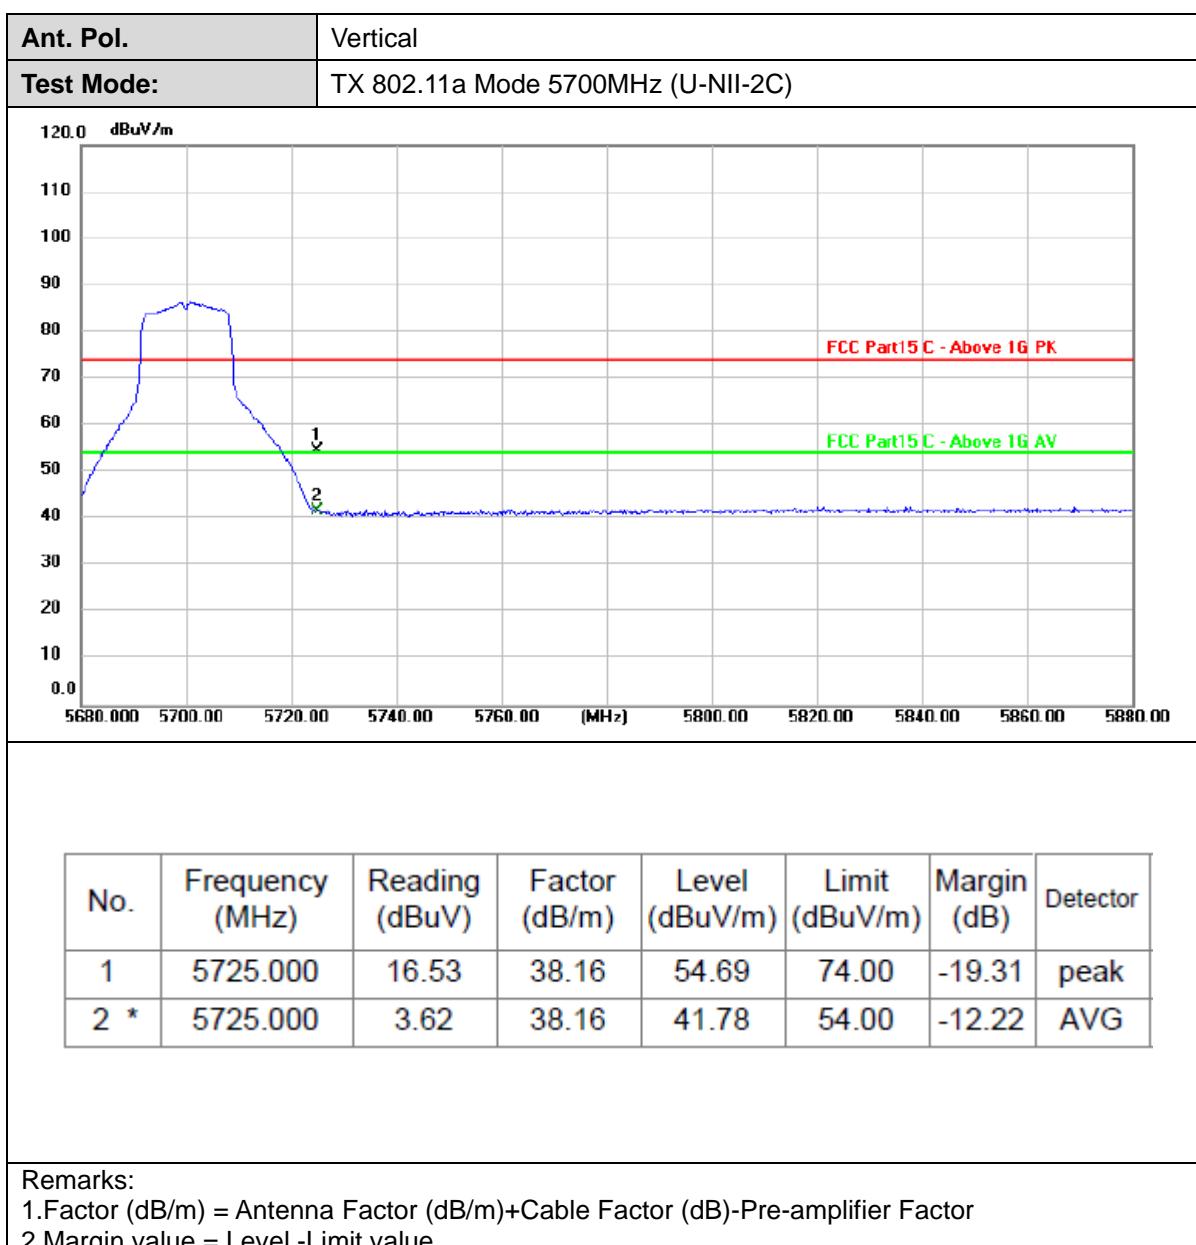

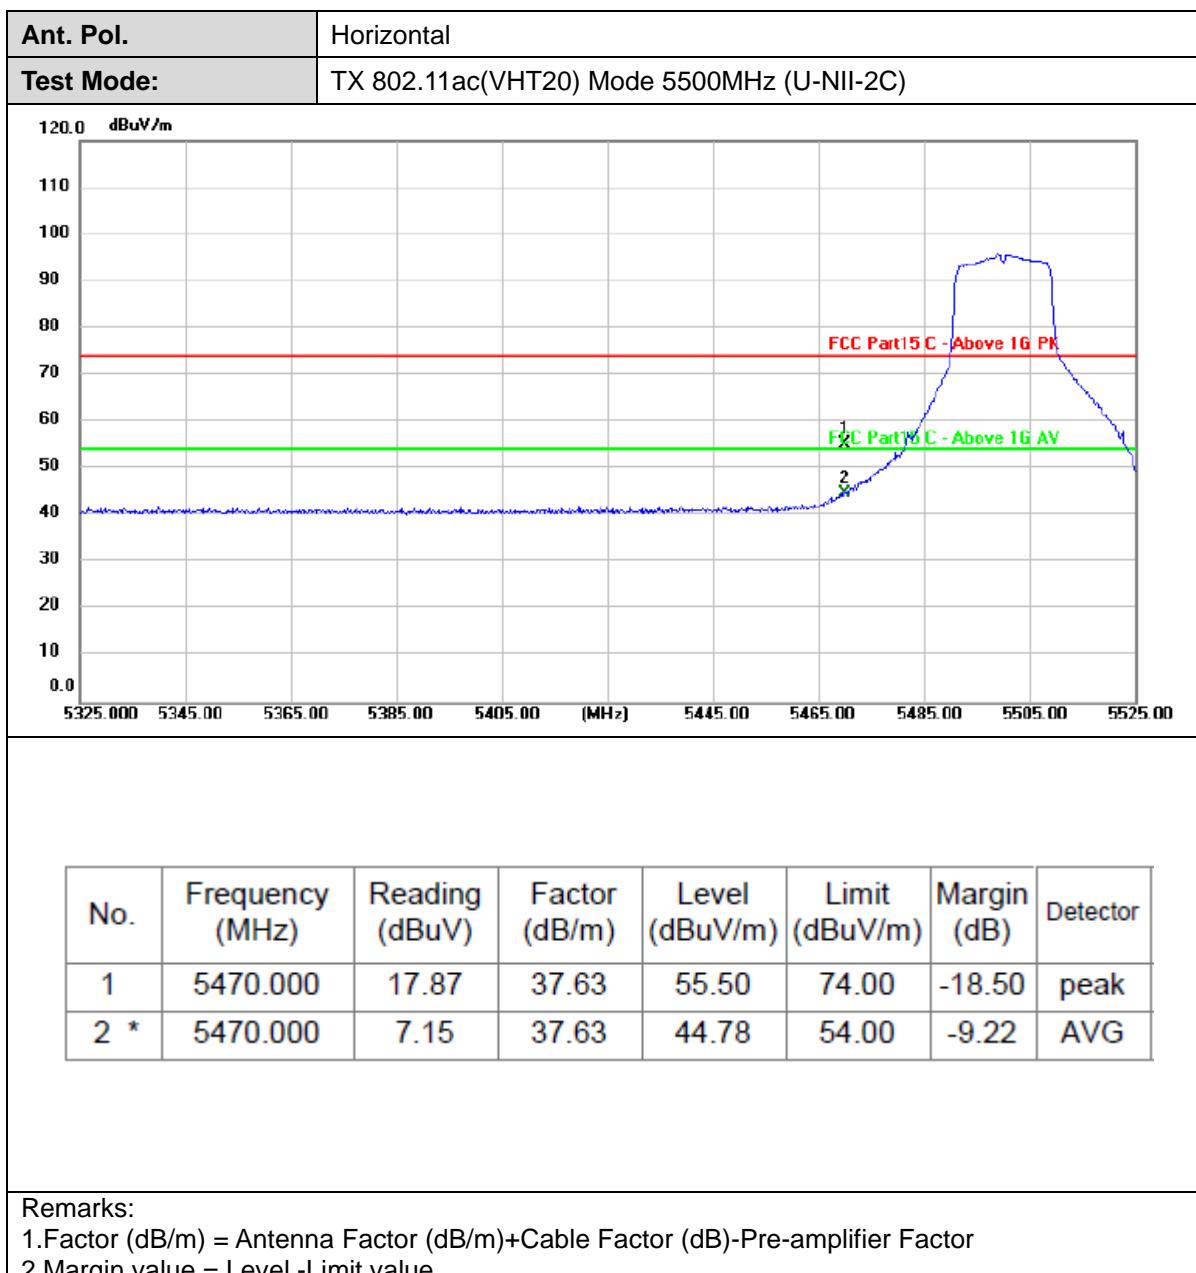

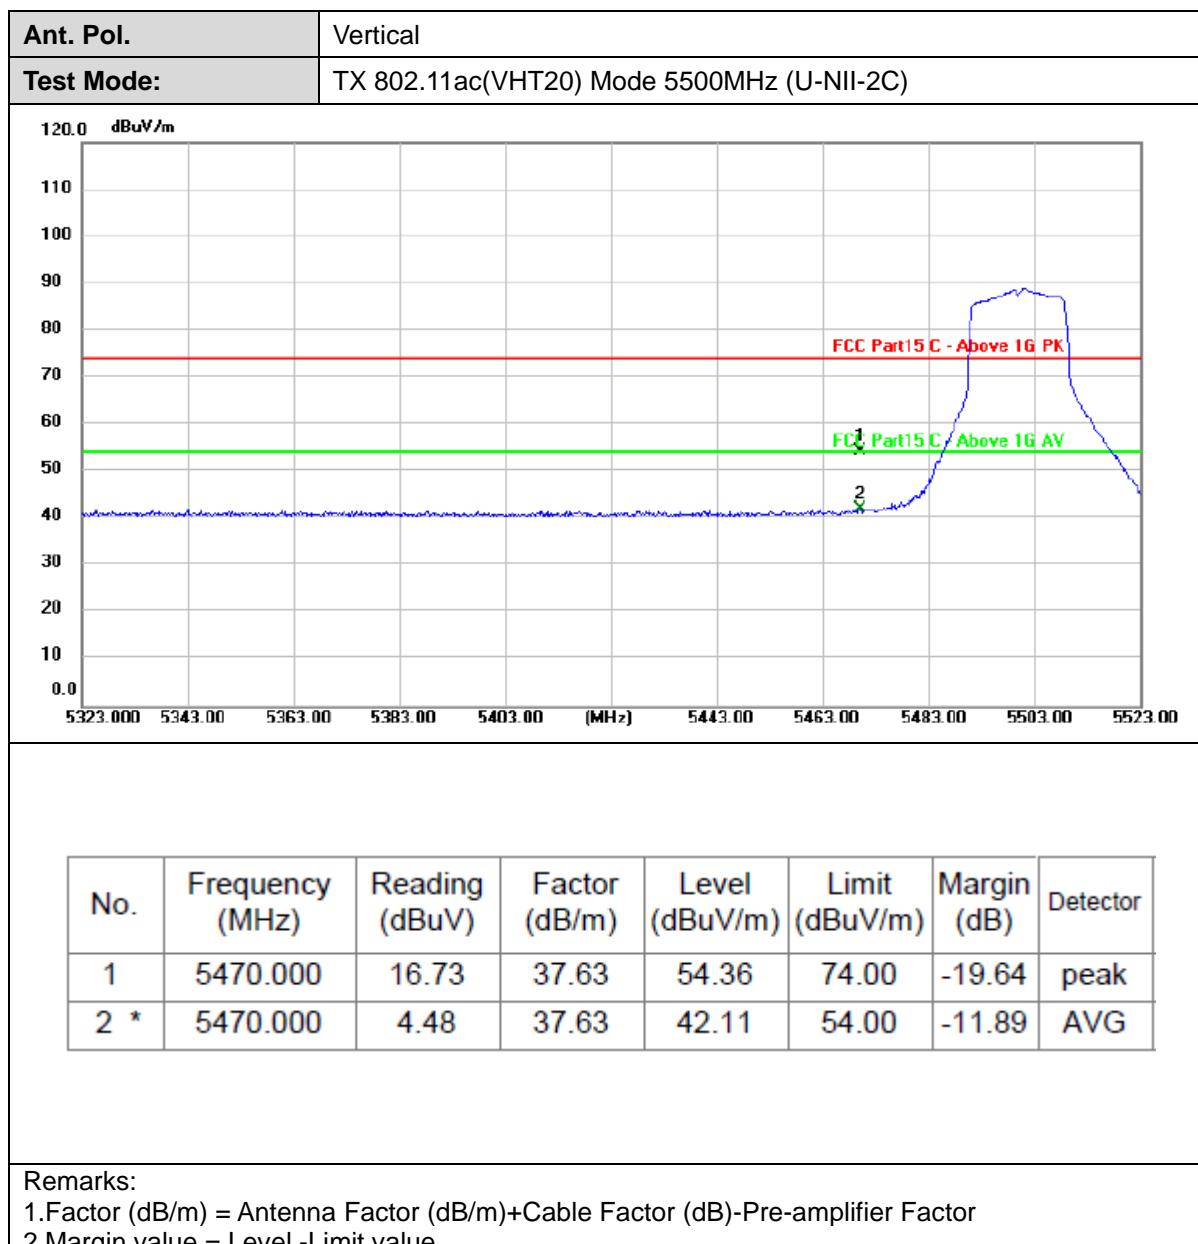

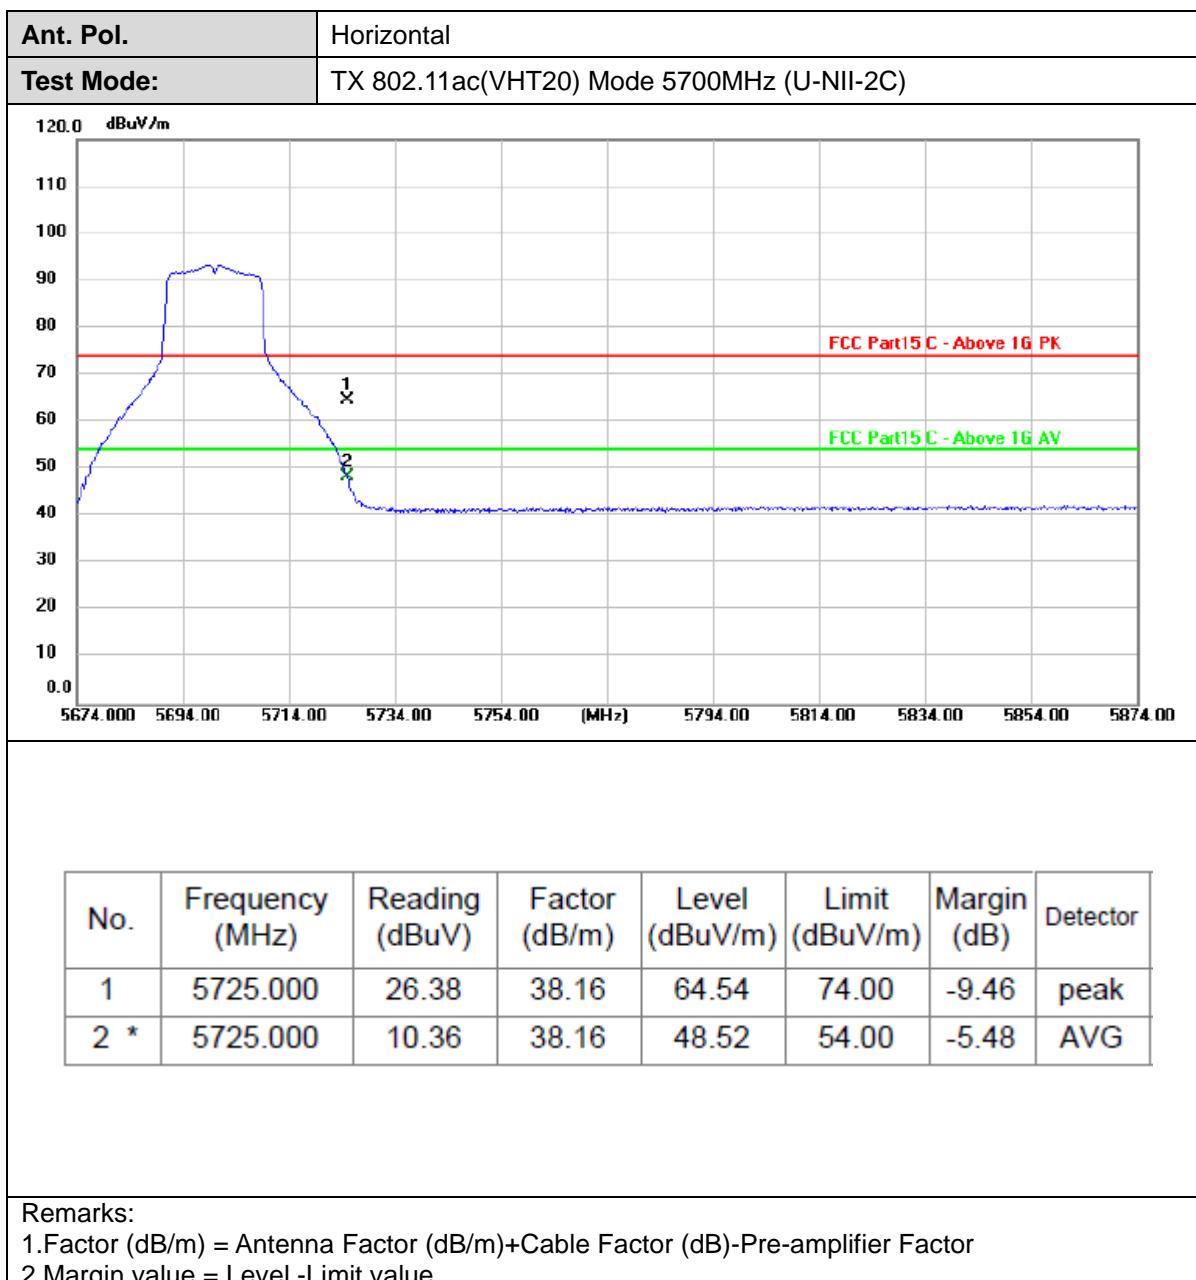


CTC Laboratories, Inc.

Room 101 Building B, No. 7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China  
Tel.: (86)755-27521059 Fax: (86)755-27521011 [Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)

TRF No: CTC-TR-062\_A1

For anti-fake verification, please visit the official website of China Inspection And Testing Society : [vz.cnca.cn](http://www.vz.cnca.cn)

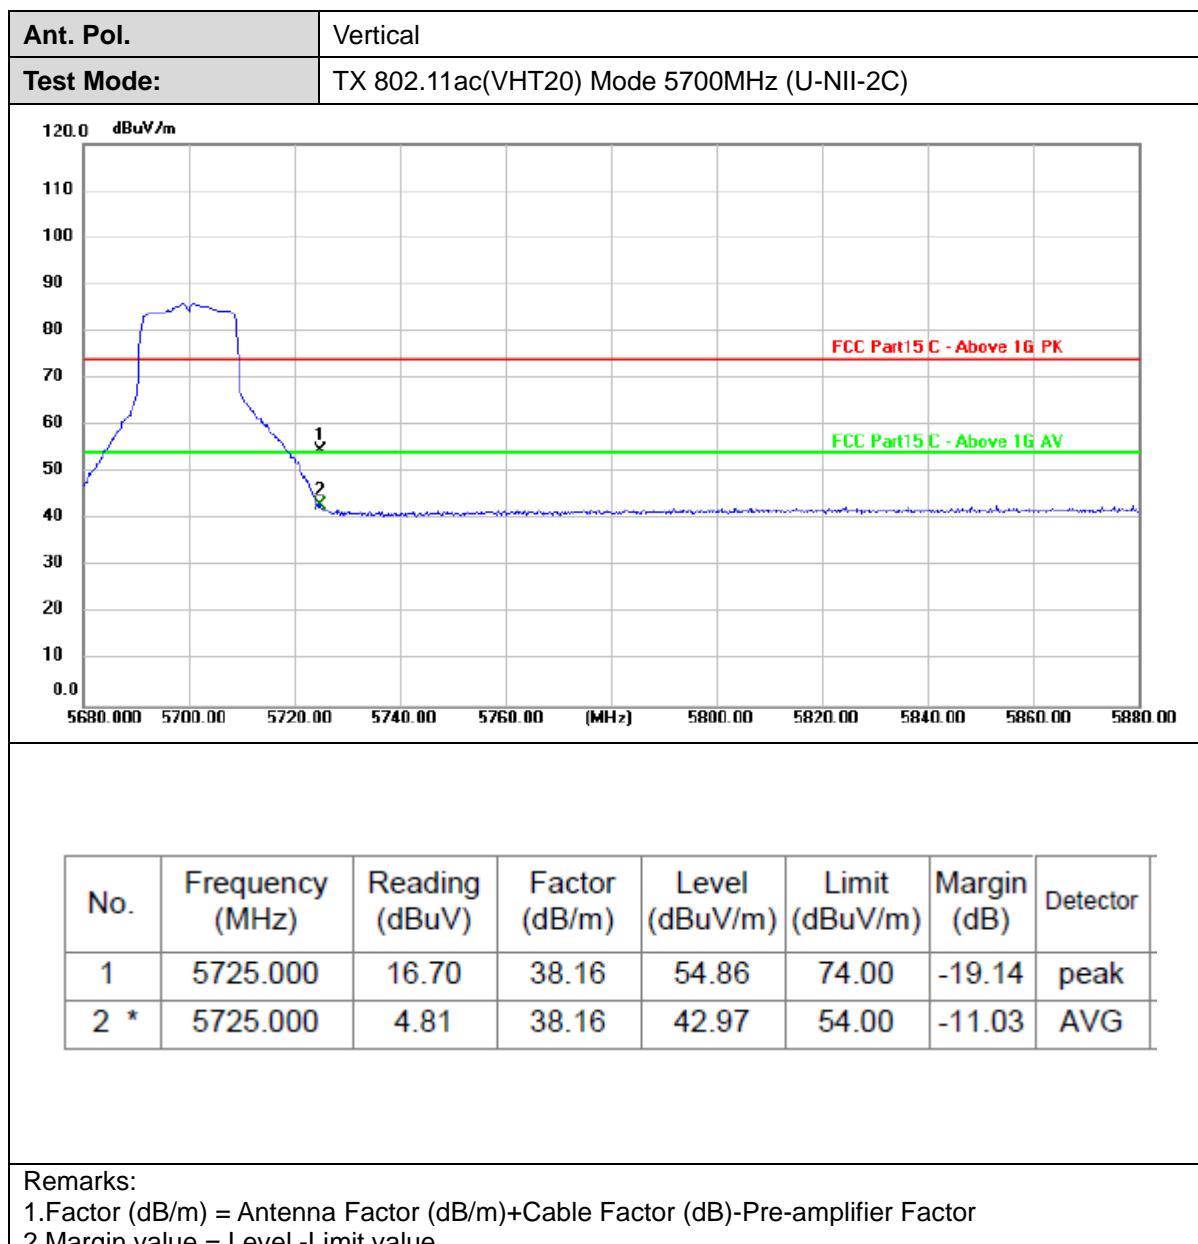



CTC Laboratories, Inc.

Room 101 Building B, No. 7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China  
Tel.: (86)755-27521059 Fax: (86)755-27521011 [Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)

TRF No: CTC-TR-062\_A1

For anti-fake verification, please visit the official website of China Inspection And Testing Society : [www.cnca.gov.cn](http://www.cnca.gov.cn)

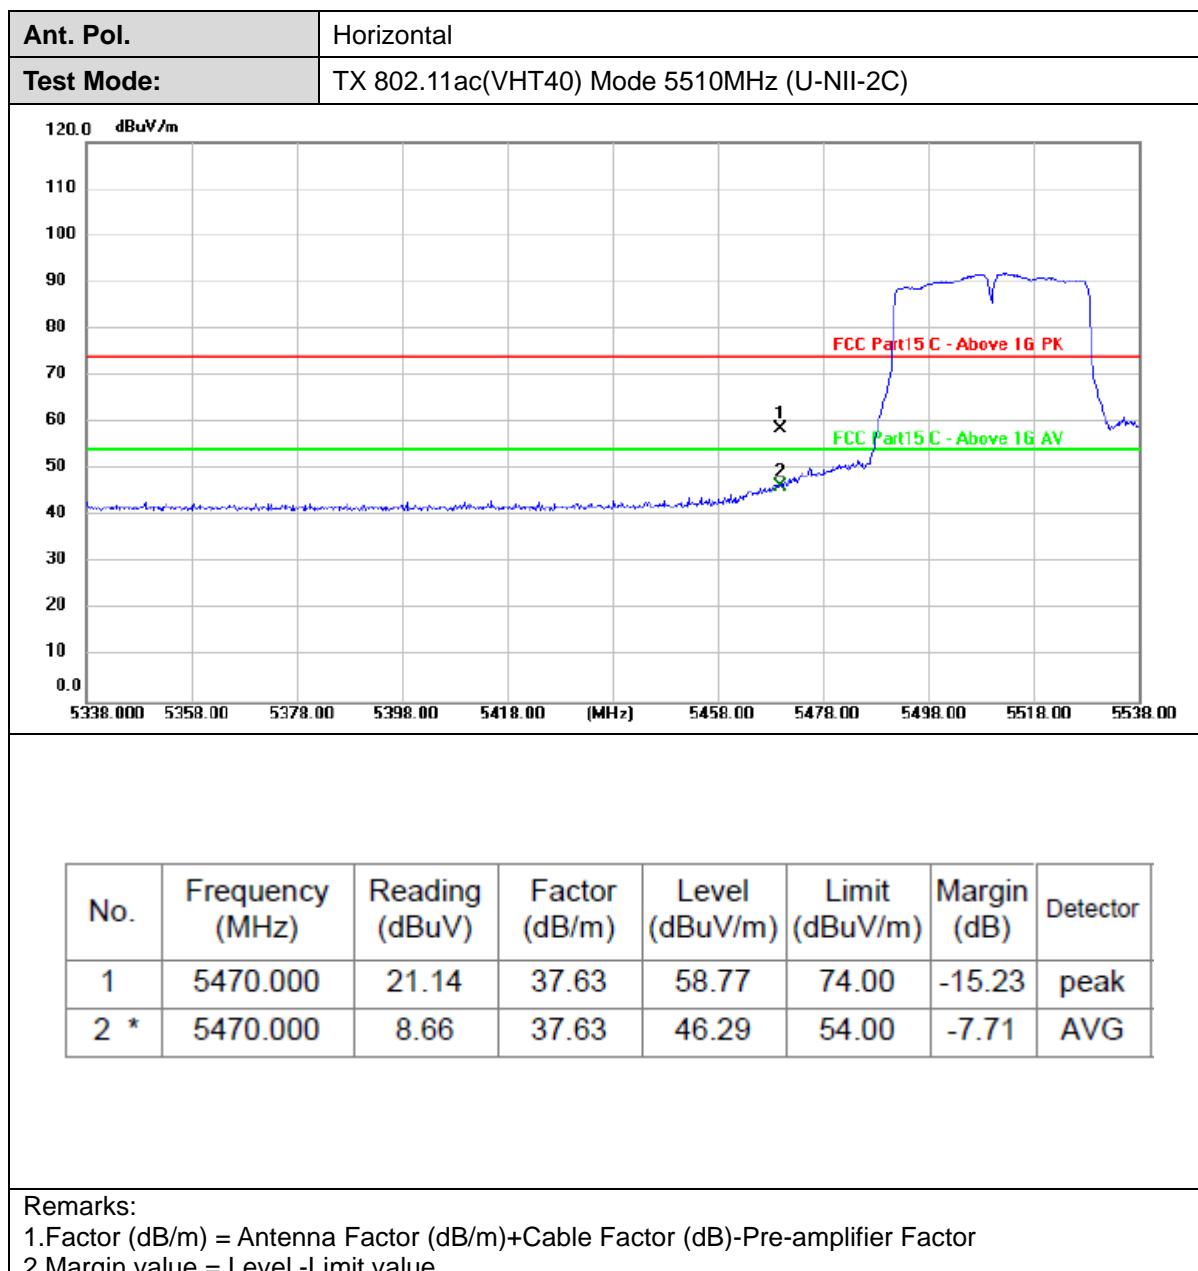

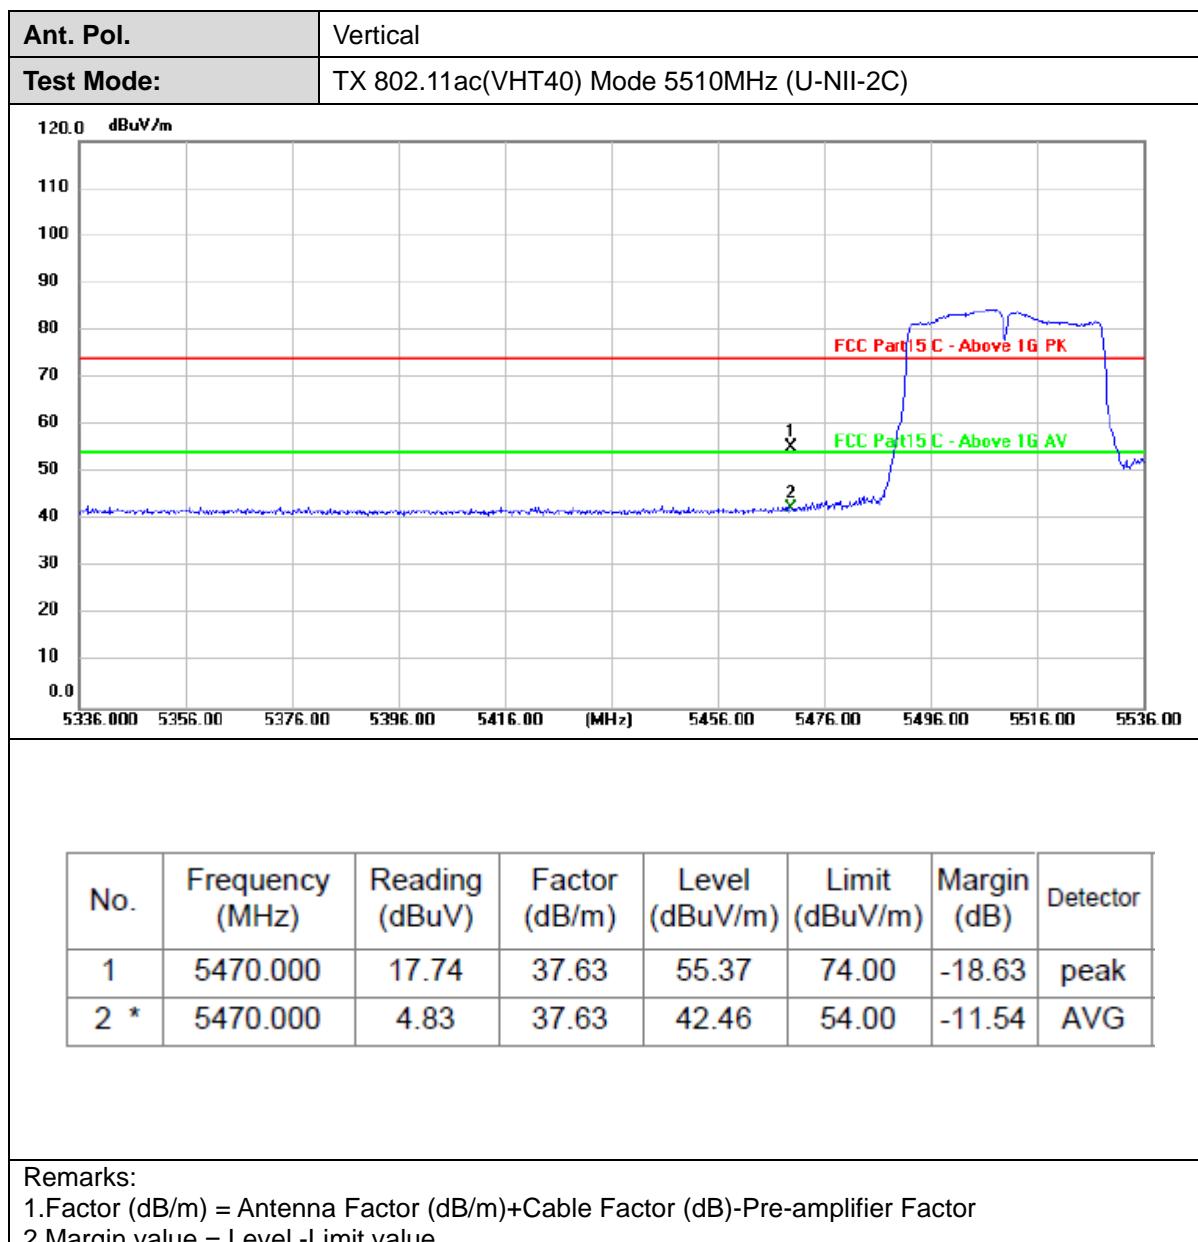



CTC Laboratories, Inc.


Room 101 Building B, No. 7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China  
Tel.: (86)755-27521059 Fax: (86)755-27521011 [Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)


TRF No: CTC-TR-062\_A1

For anti-fake verification, please visit the official website of China Inspection And Testing Society : [www.cnca.gov.cn](http://www.cnca.gov.cn)

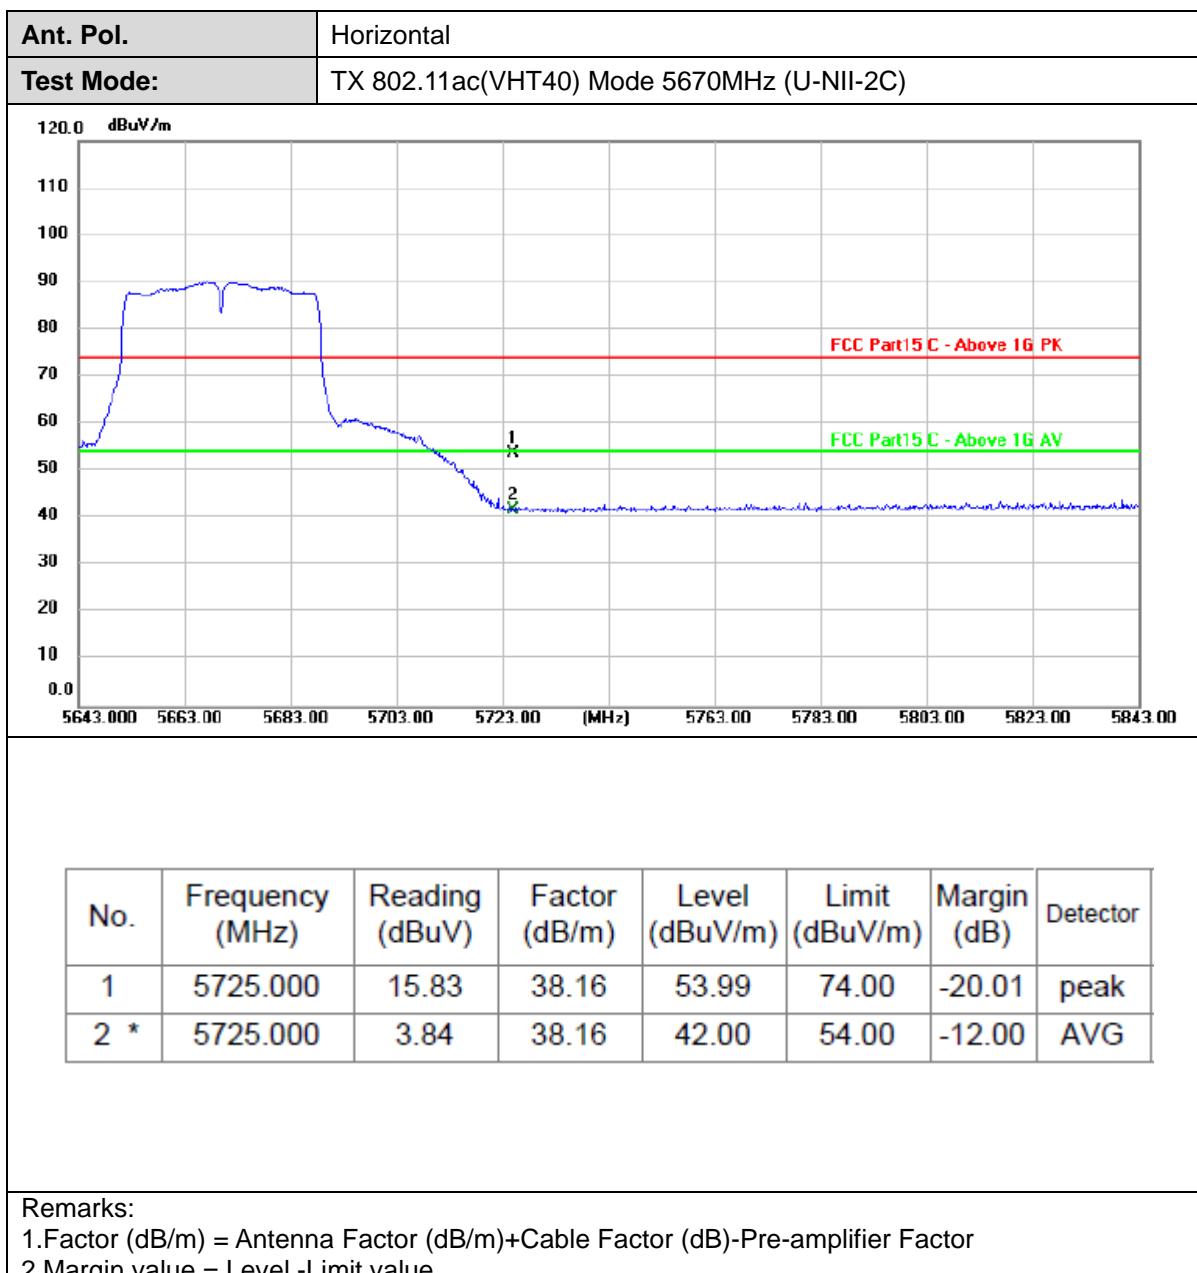

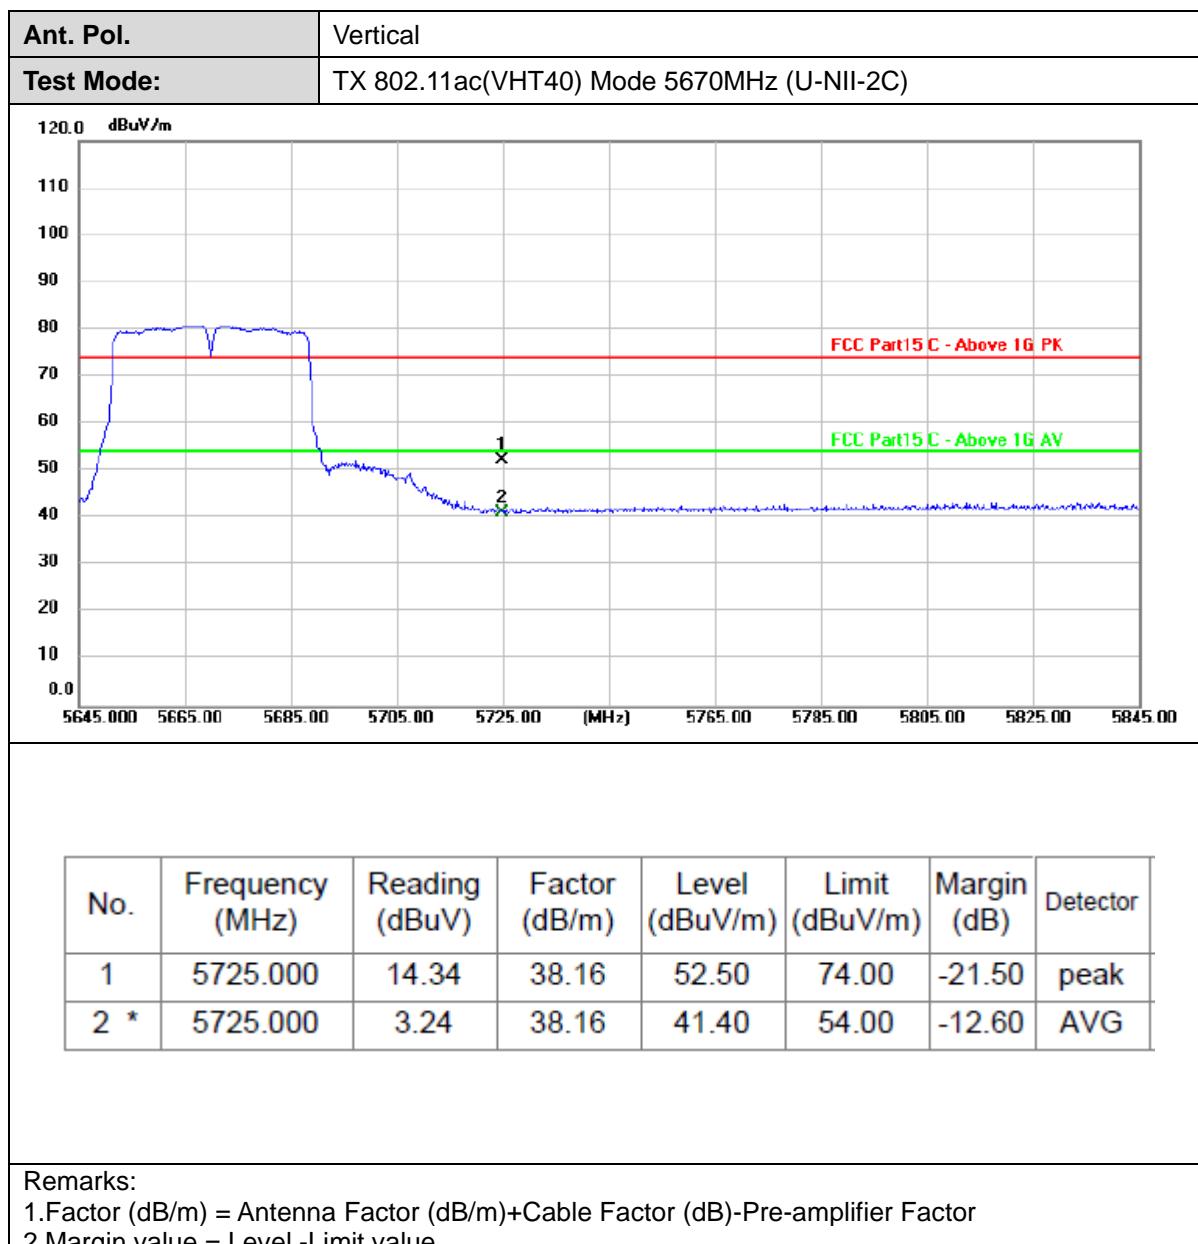

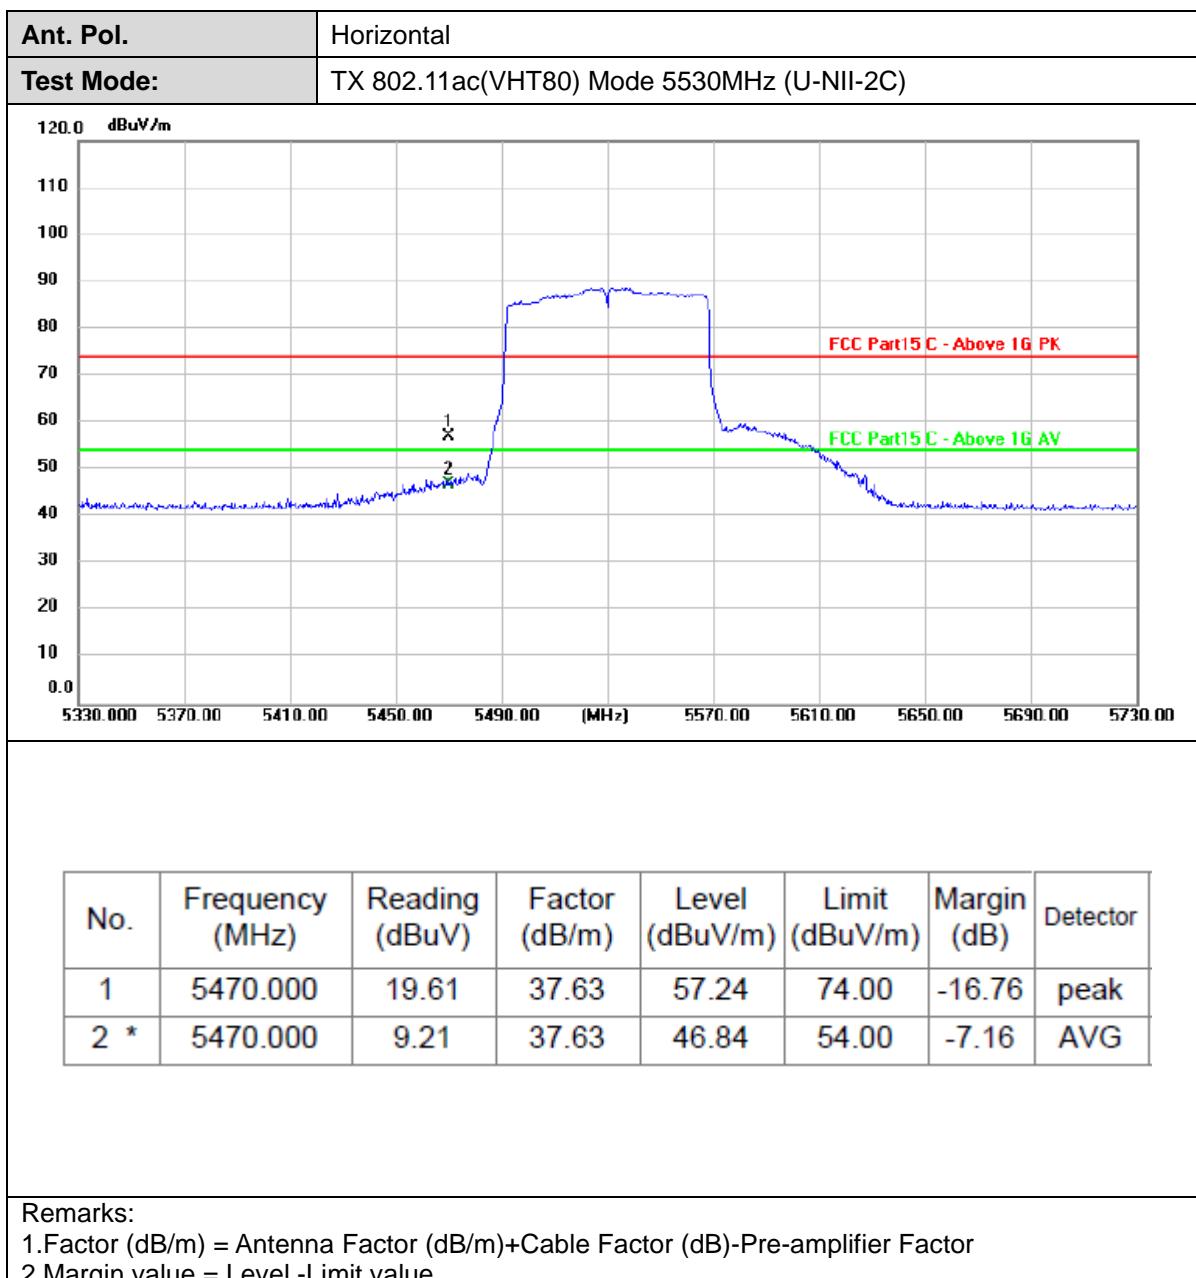

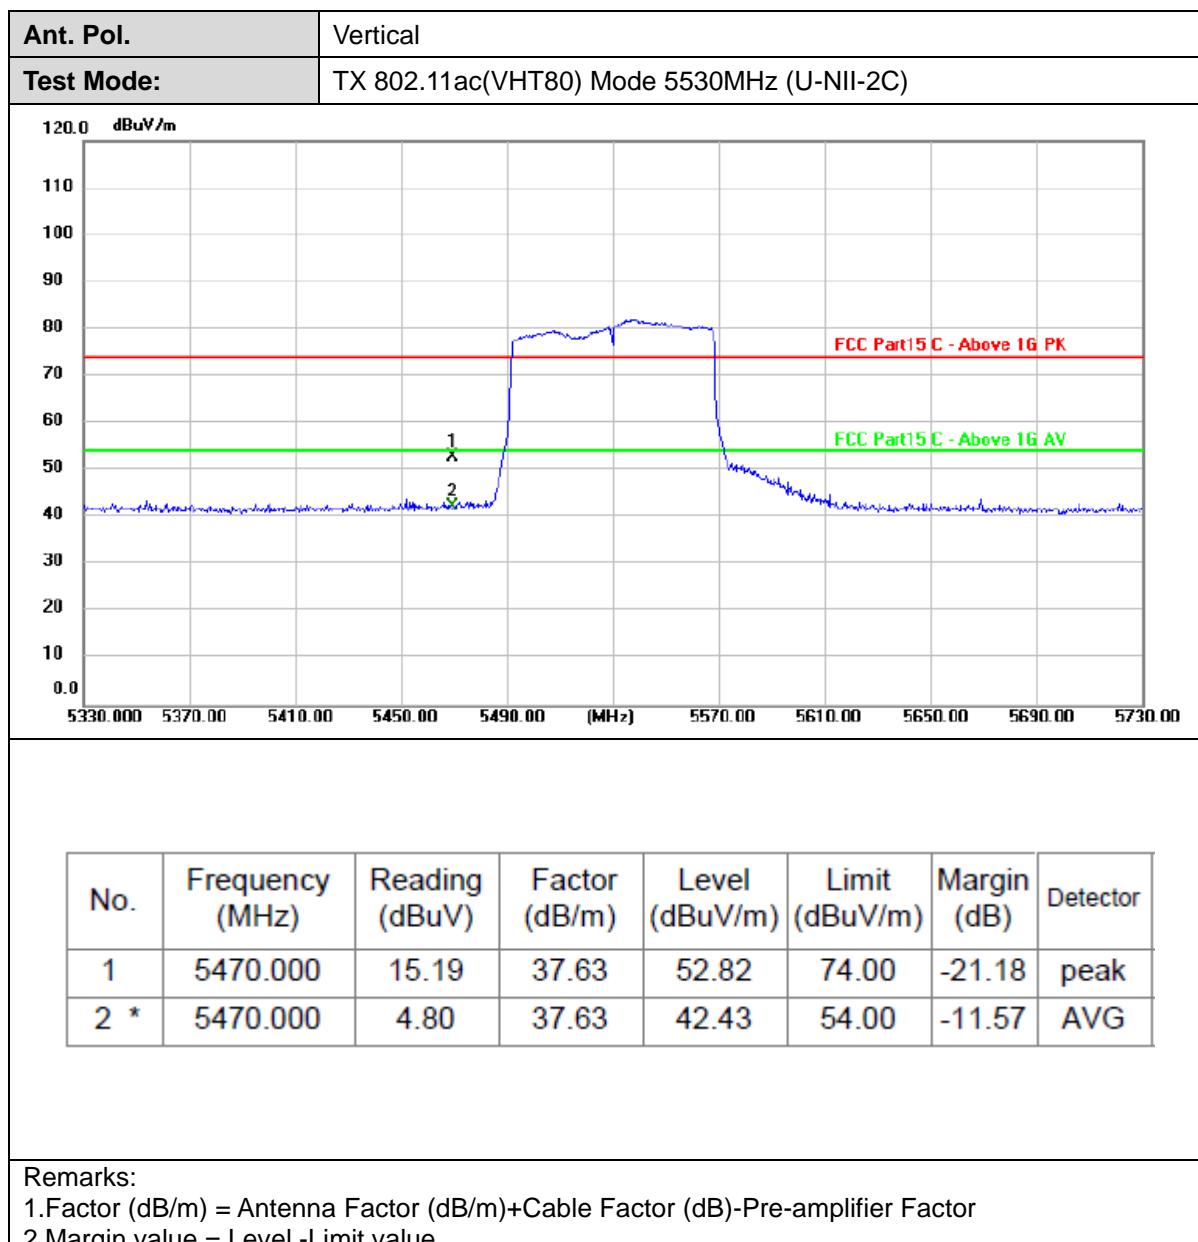



CTC Laboratories, Inc.


Room 101 Building B, No. 7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China  
Tel.: (86)755-27521059 Fax: (86)755-27521011 [Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)


TRF No: CTC-TR-062\_A1


For anti-fake verification, please visit the official website of China Inspection And Testing Society : [vz.cnca.cn](http://www.vz.cnca.cn)

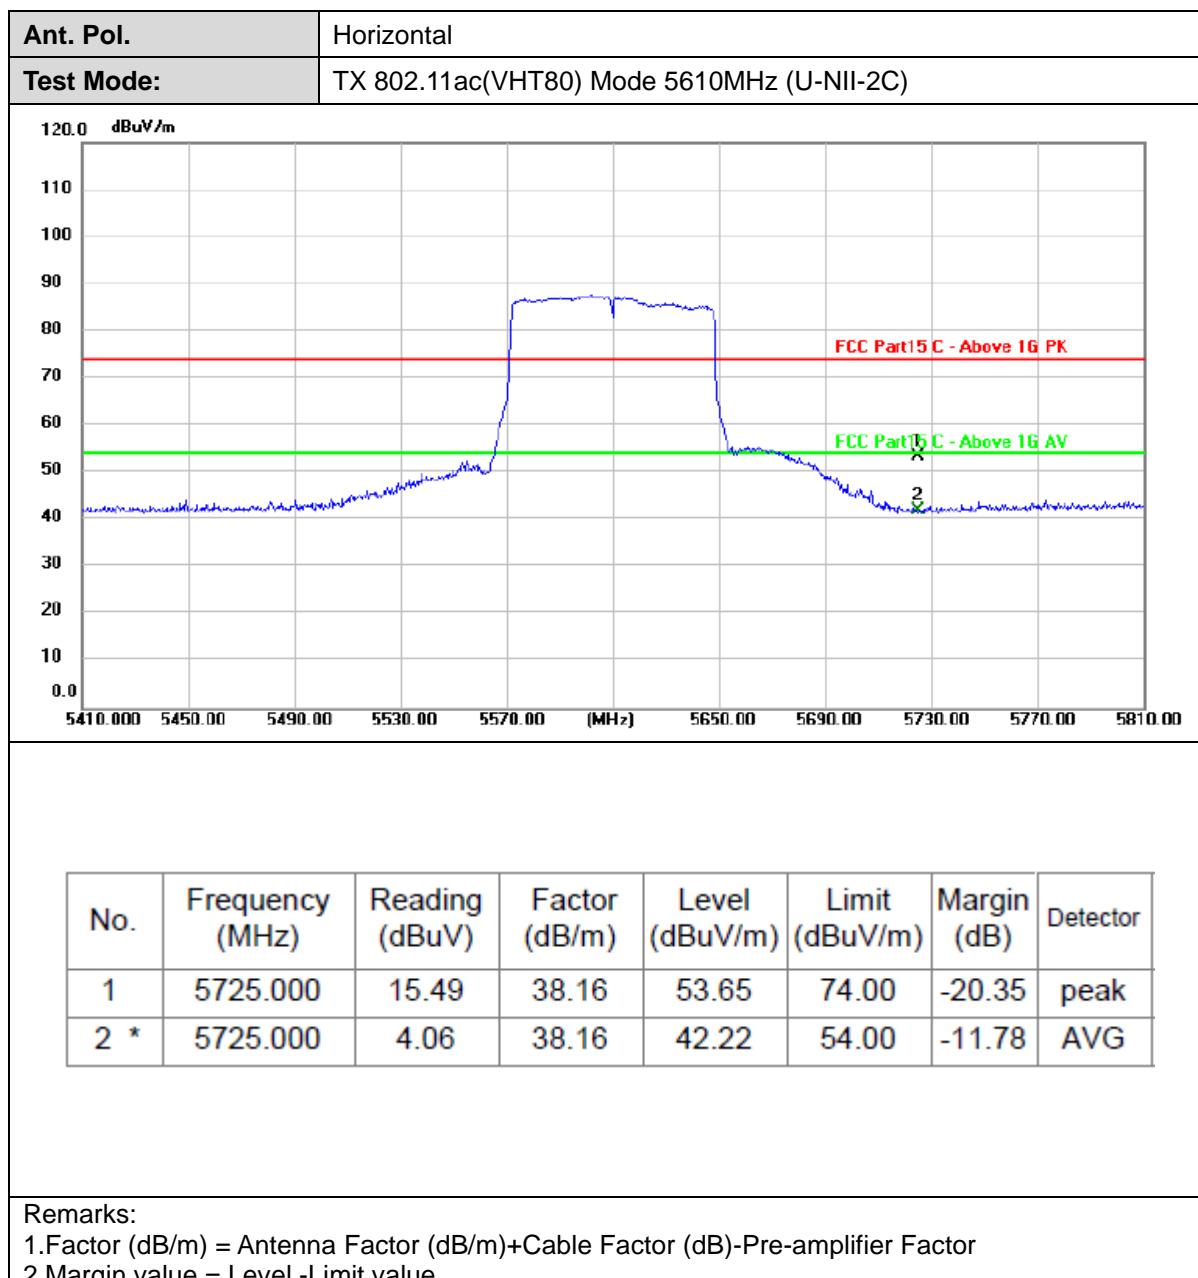

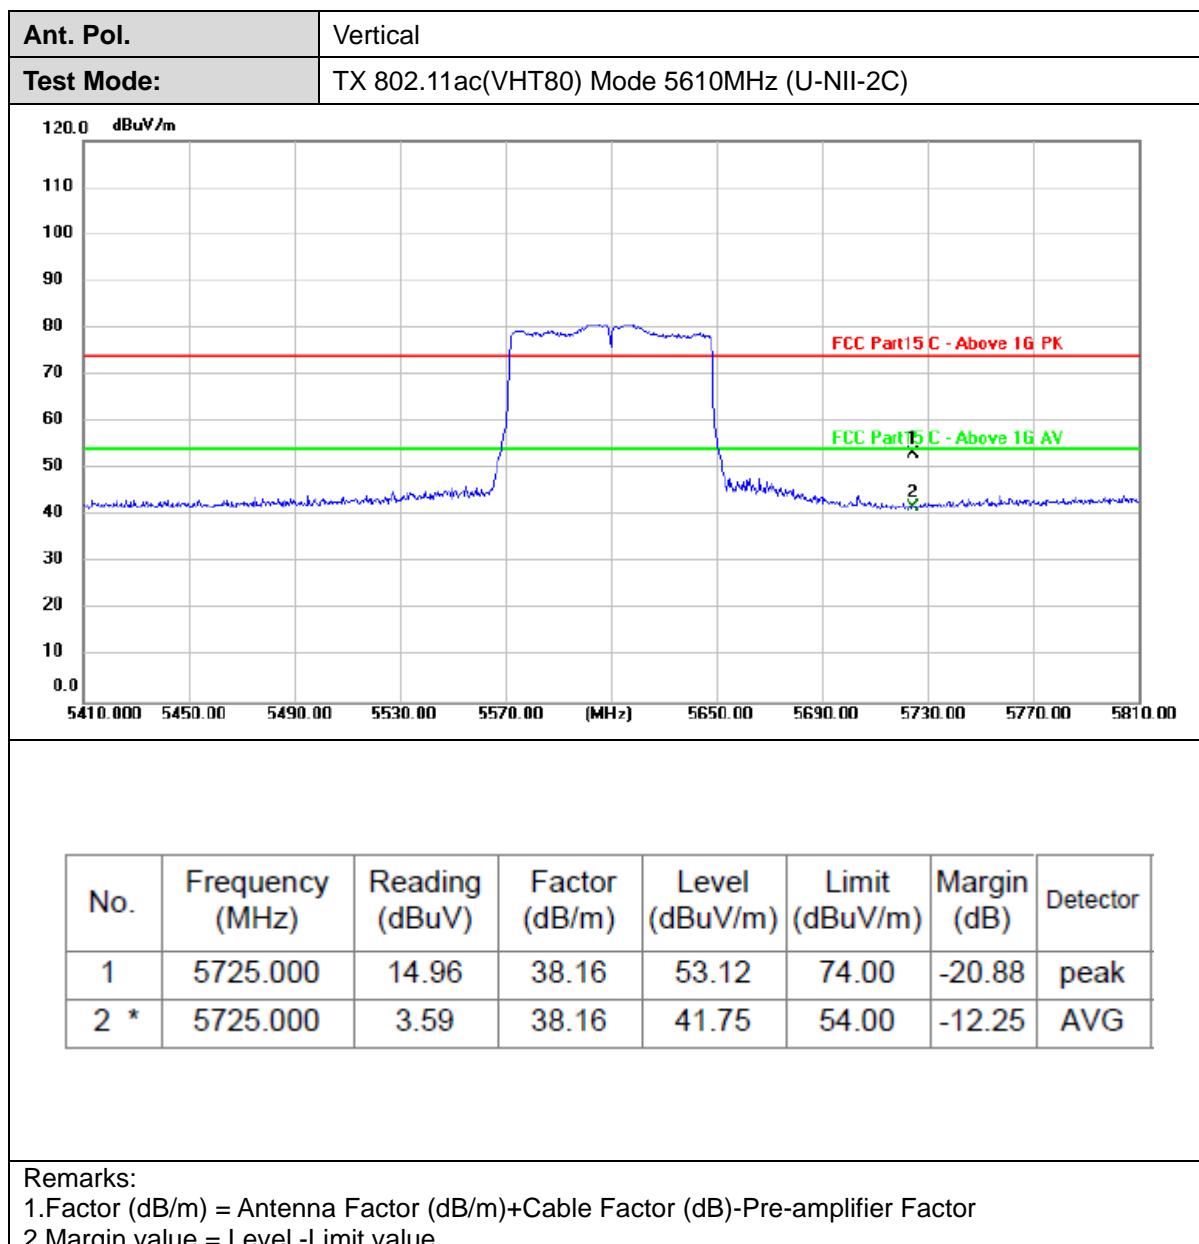

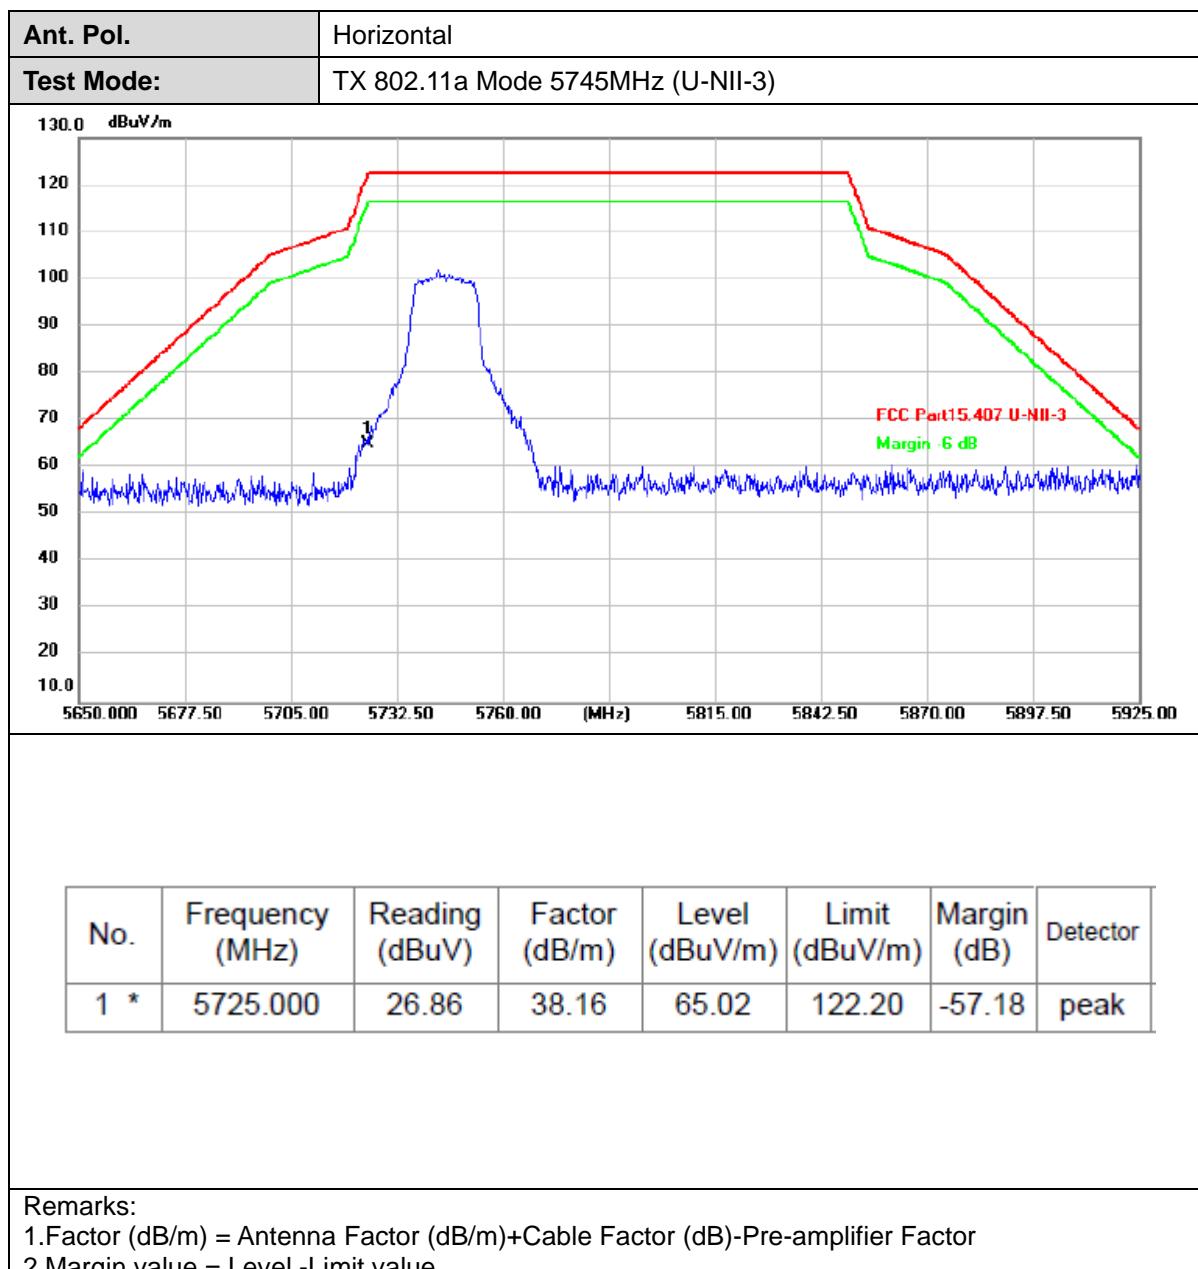

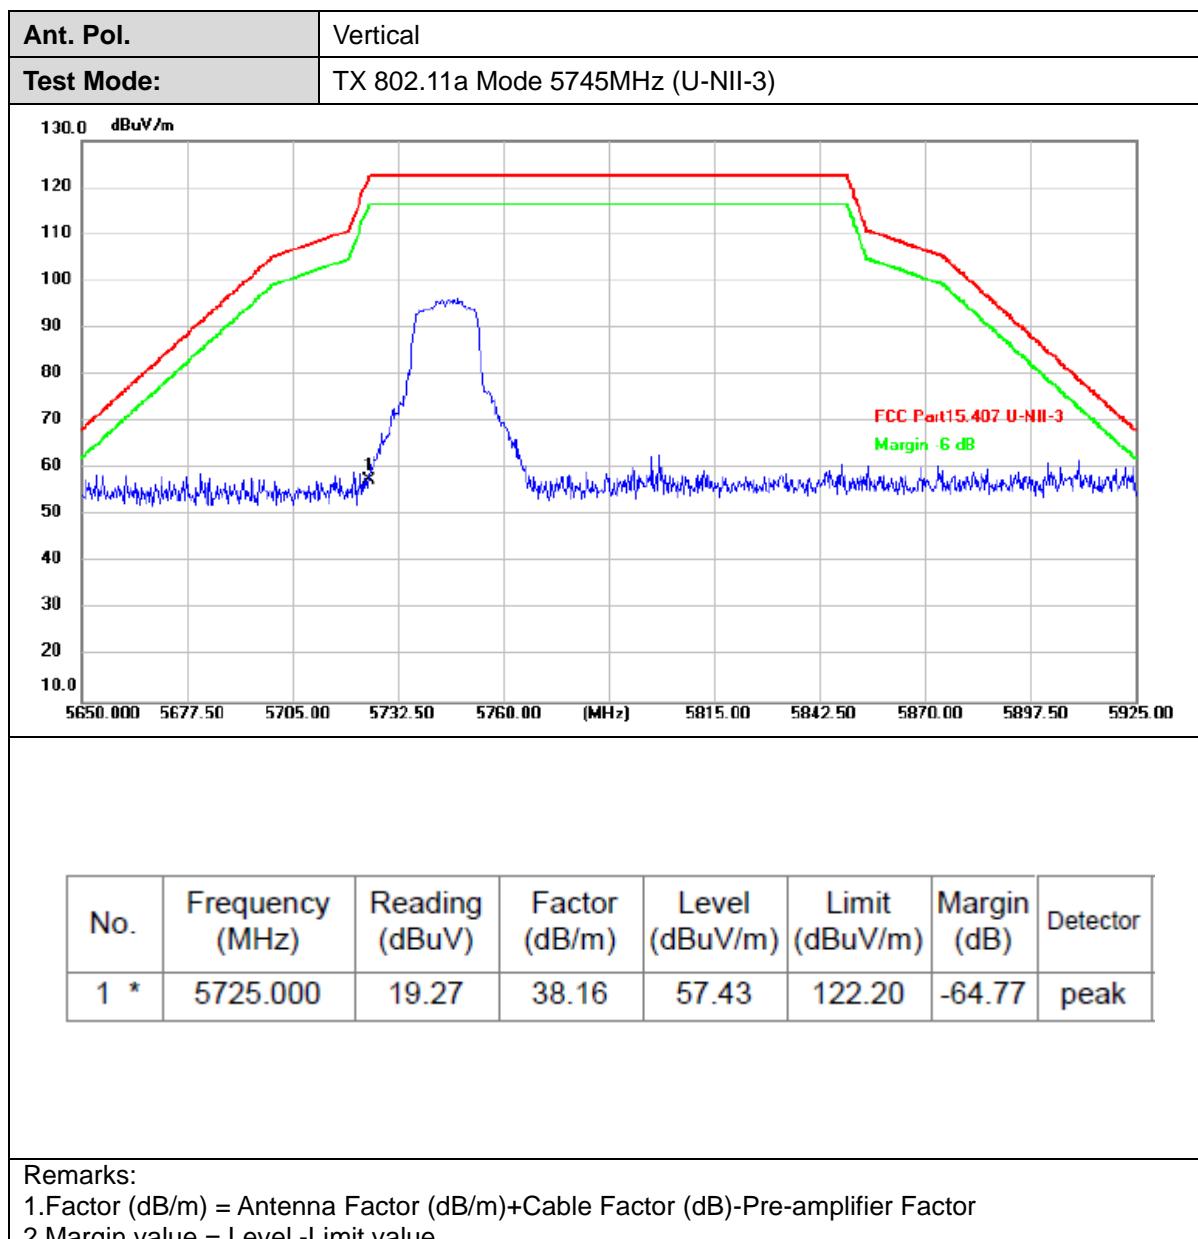

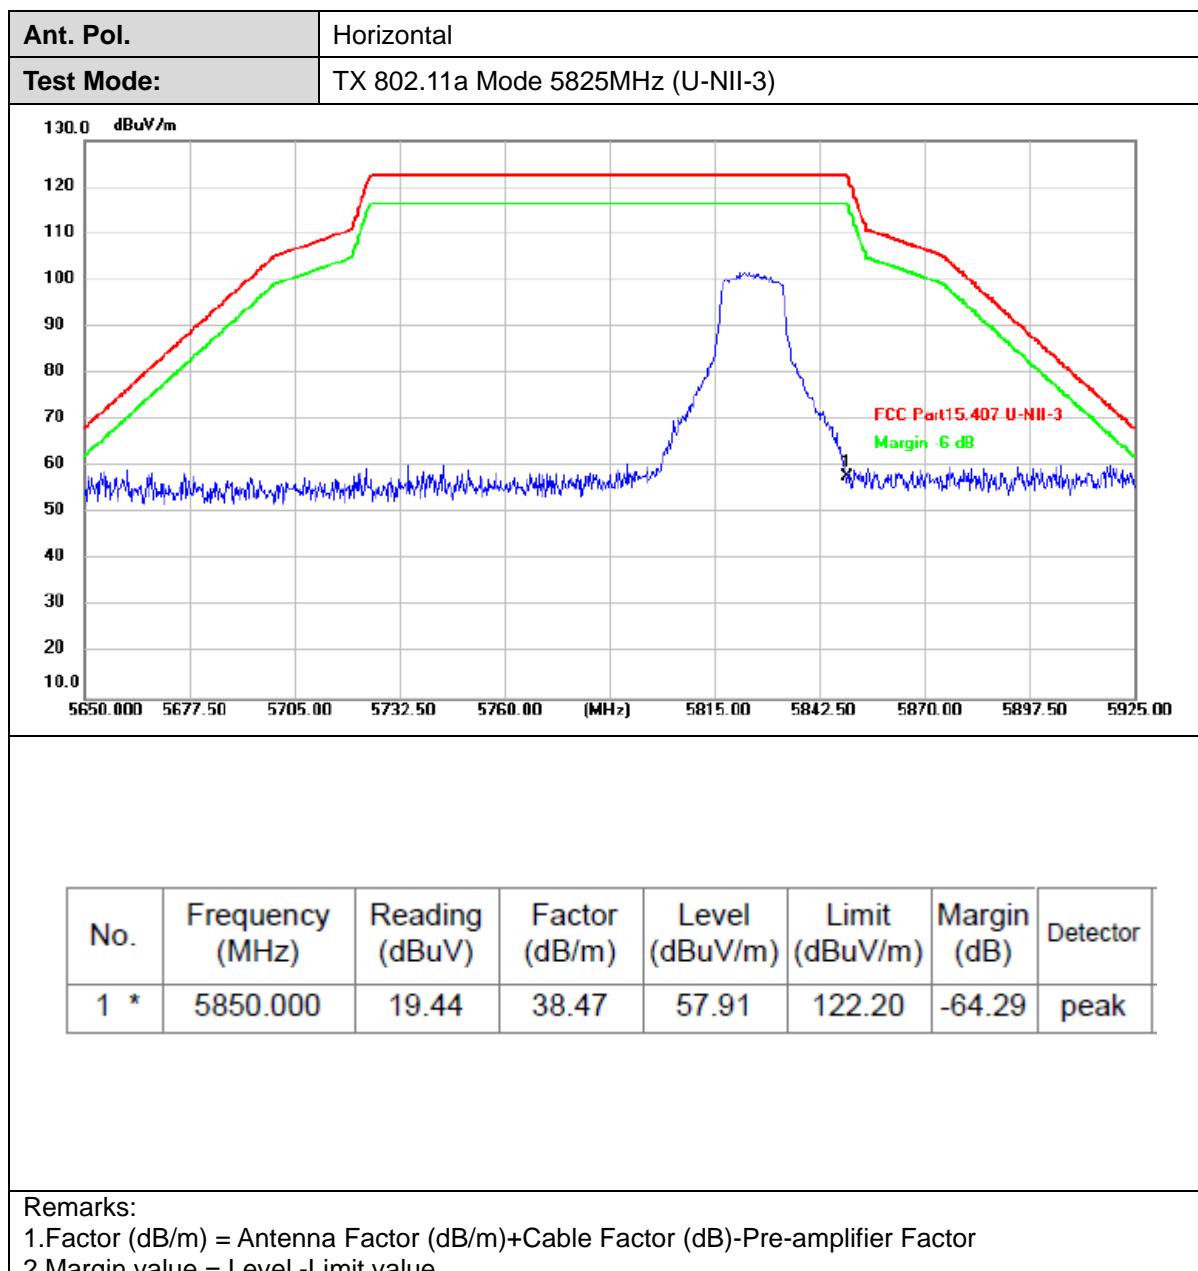


CTC Laboratories, Inc.

Room 101 Building B, No. 7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China  
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn

TRF No: CTC-TR-062\_A1

For anti-fake verification, please visit the official website of China Inspection And Testing Society : [vz.cnca.cn](http://www.vz.cnca.cn)

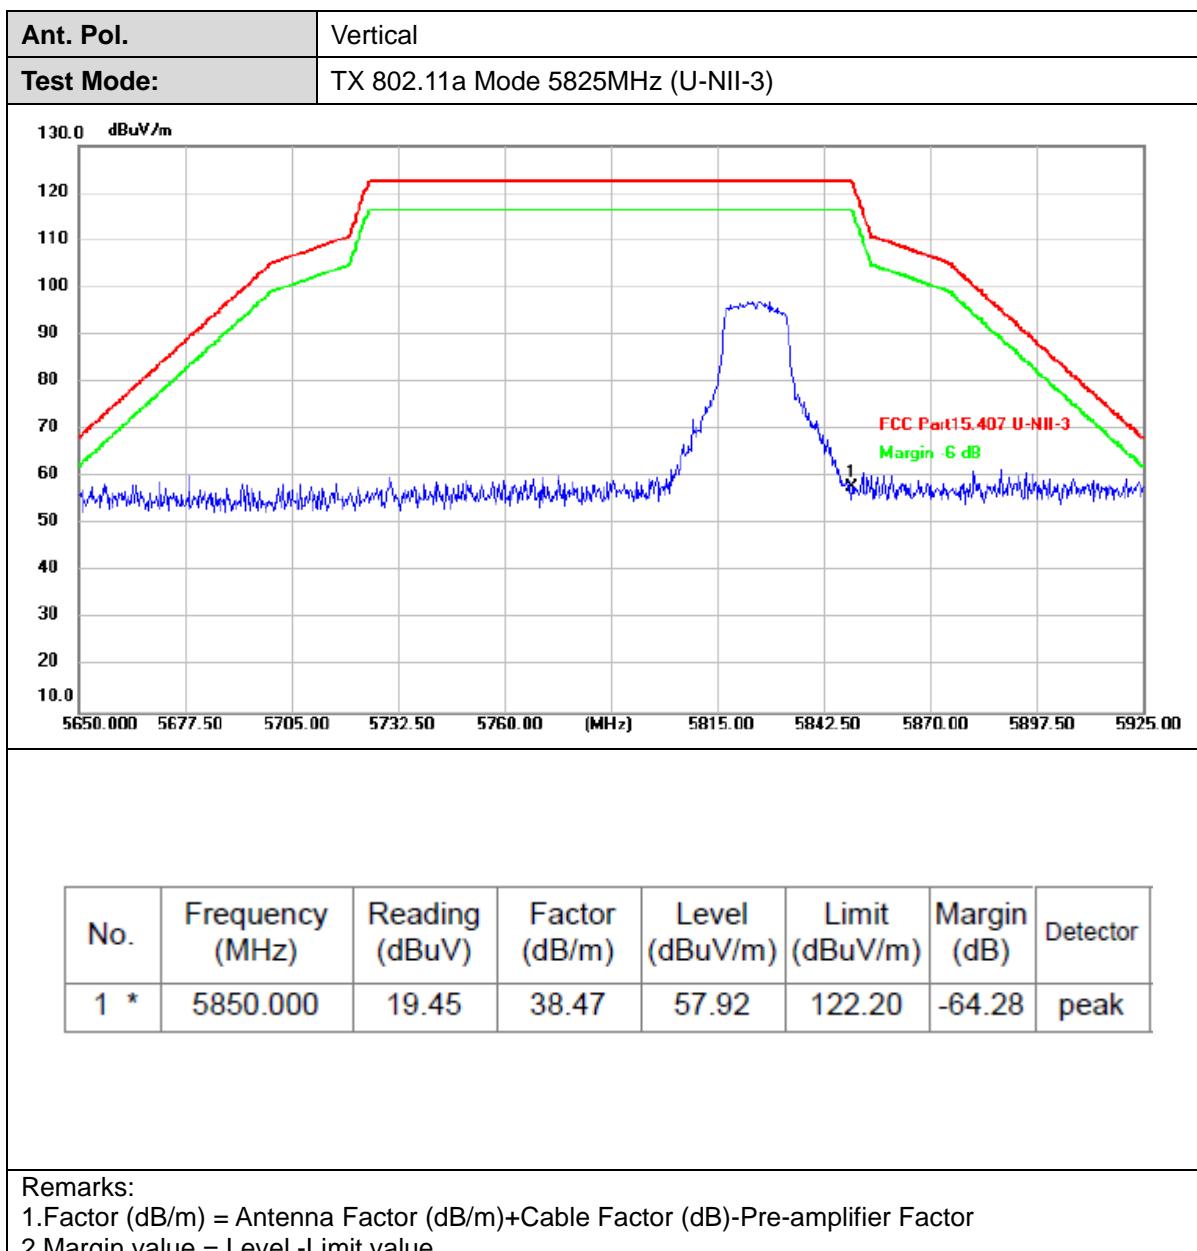


CTC Laboratories, Inc.

Room 101 Building B, No. 7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China  
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn

TRF No: CTC-TR-062\_A1

For anti-fake verification, please visit the official website of China Inspection And Testing Society : [www.cnca.gov.cn](http://www.cnca.gov.cn)

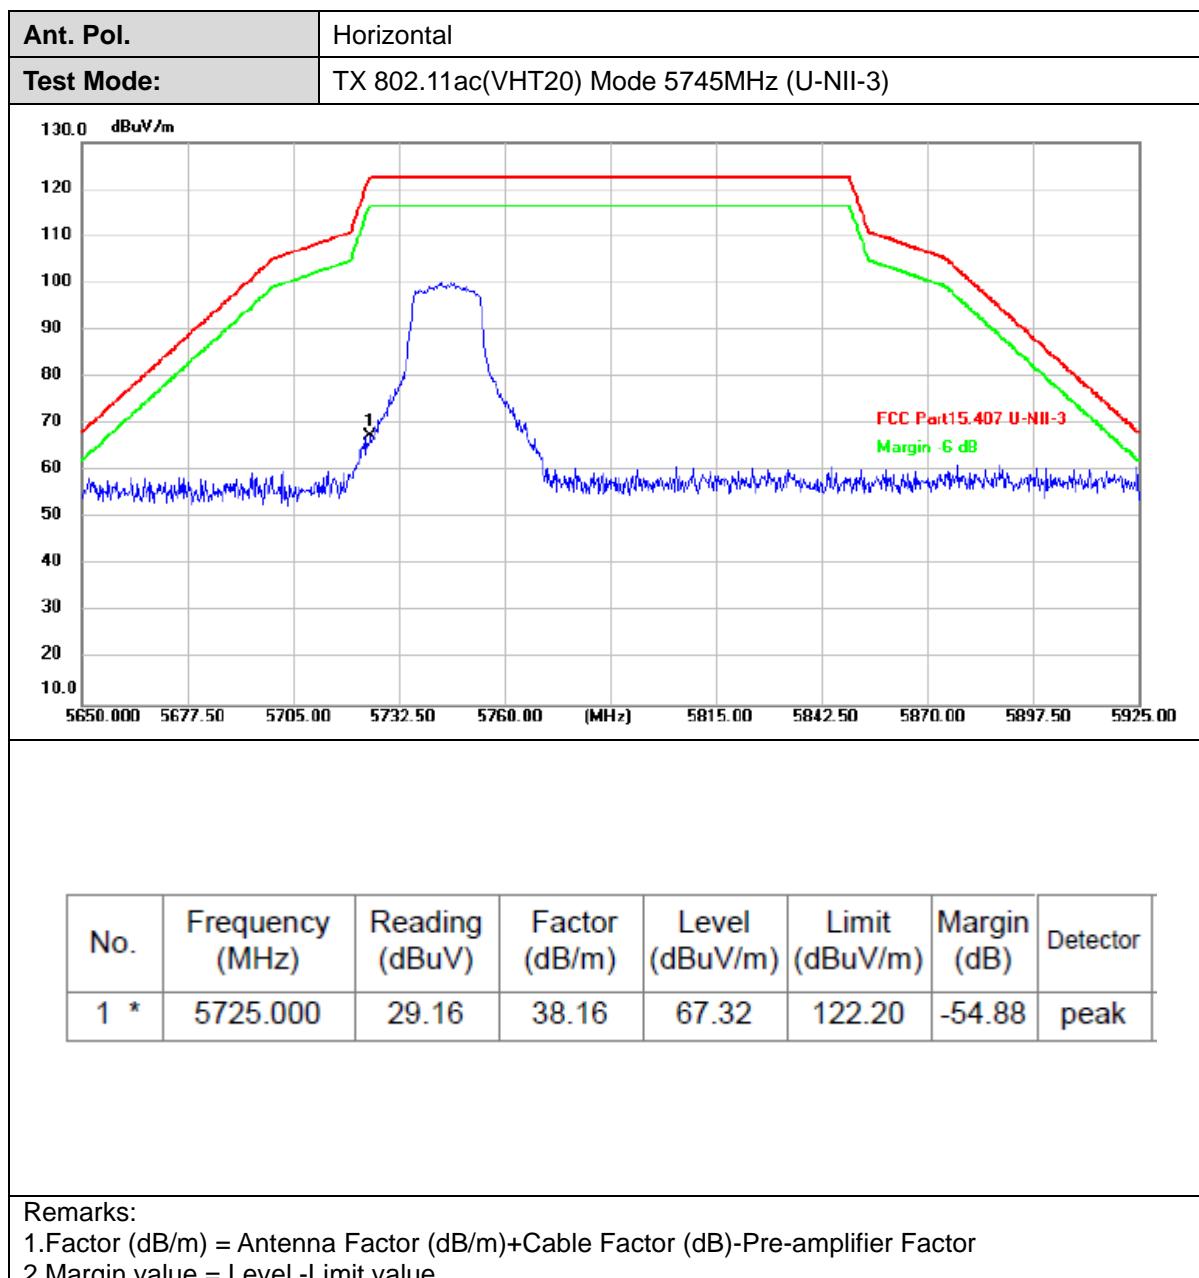



CTC Laboratories, Inc.


Room 101 Building B, No. 7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China  
Tel.: (86)755-27521059 Fax: (86)755-27521011 [Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)


TRF No: CTC-TR-062\_A1


For anti-fake verification, please visit the official website of China Inspection And Testing Society : [www.cnca.gov.cn](http://www.cnca.gov.cn)

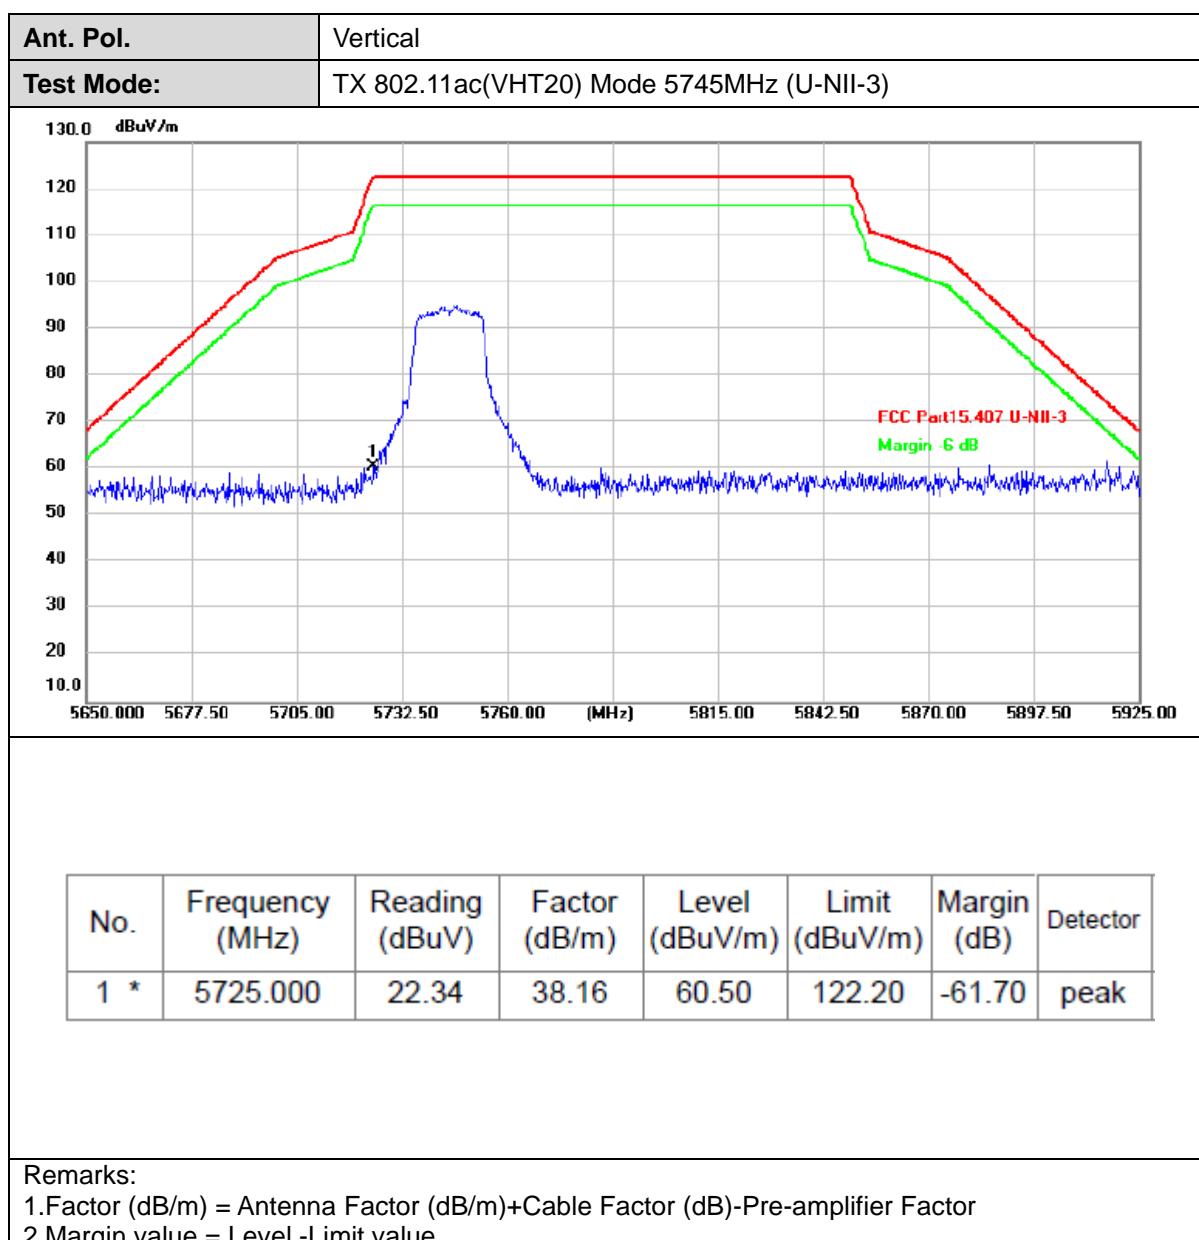


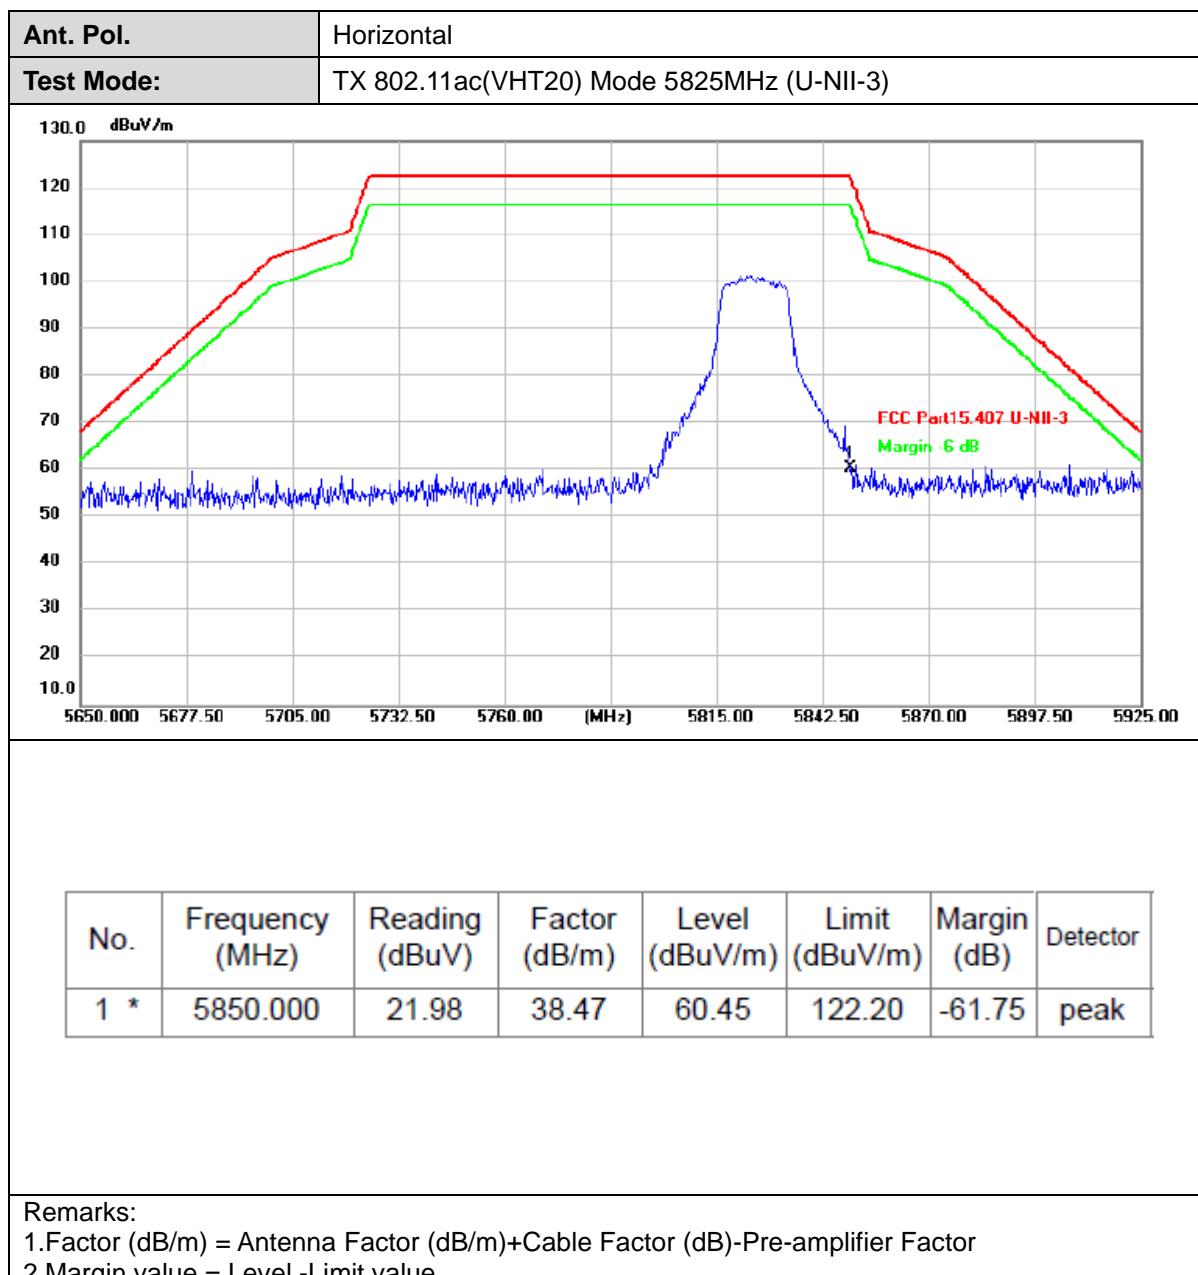

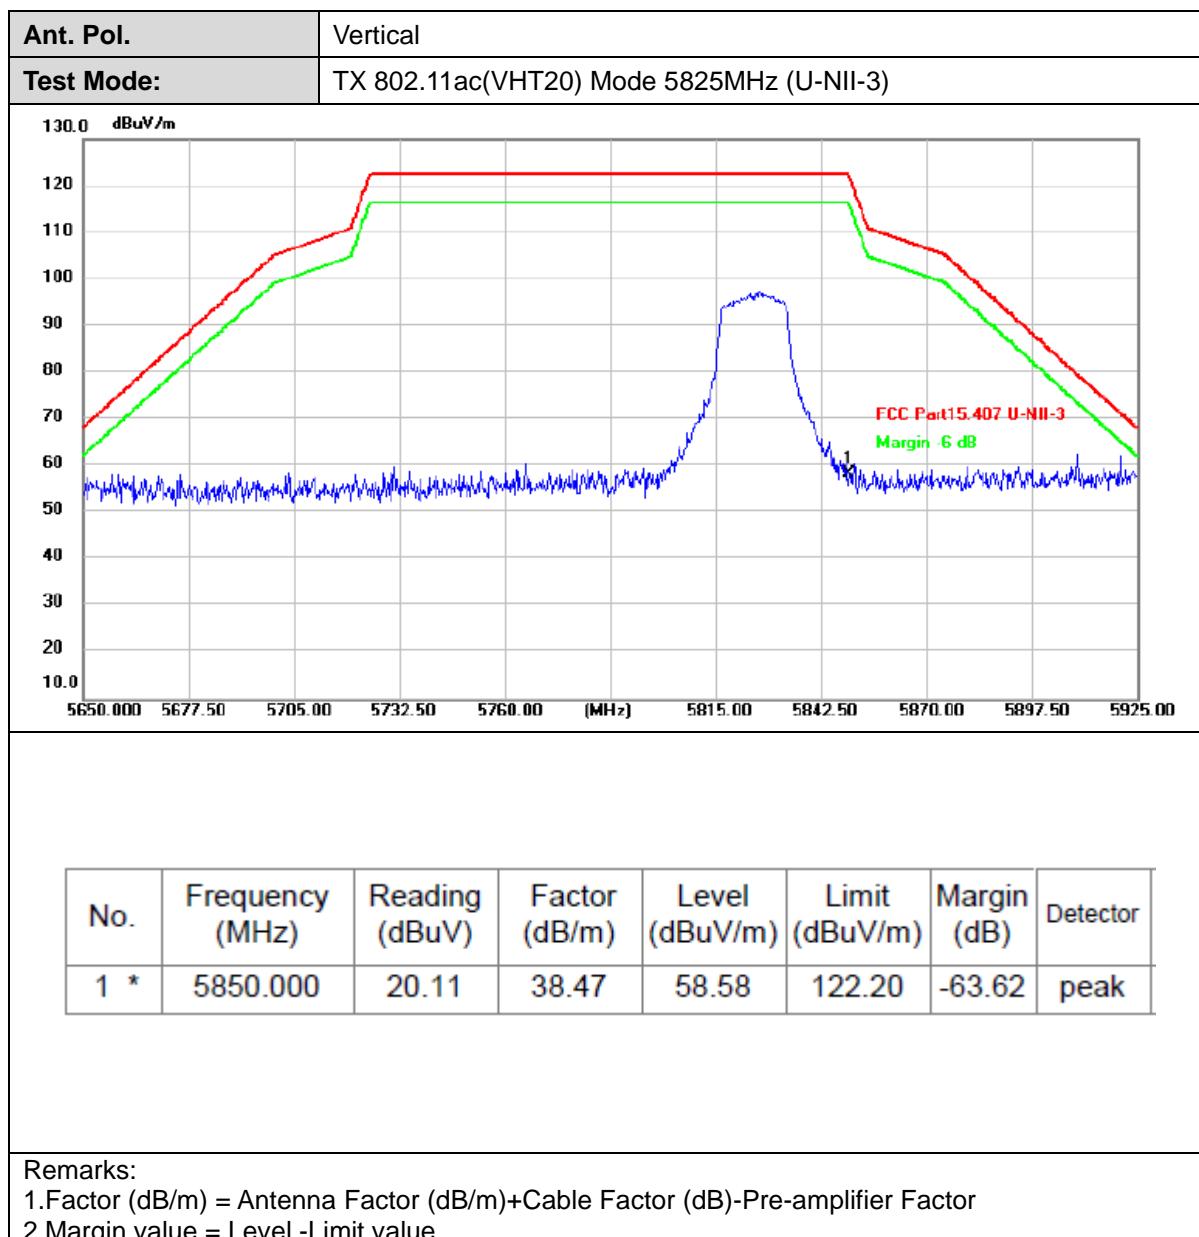

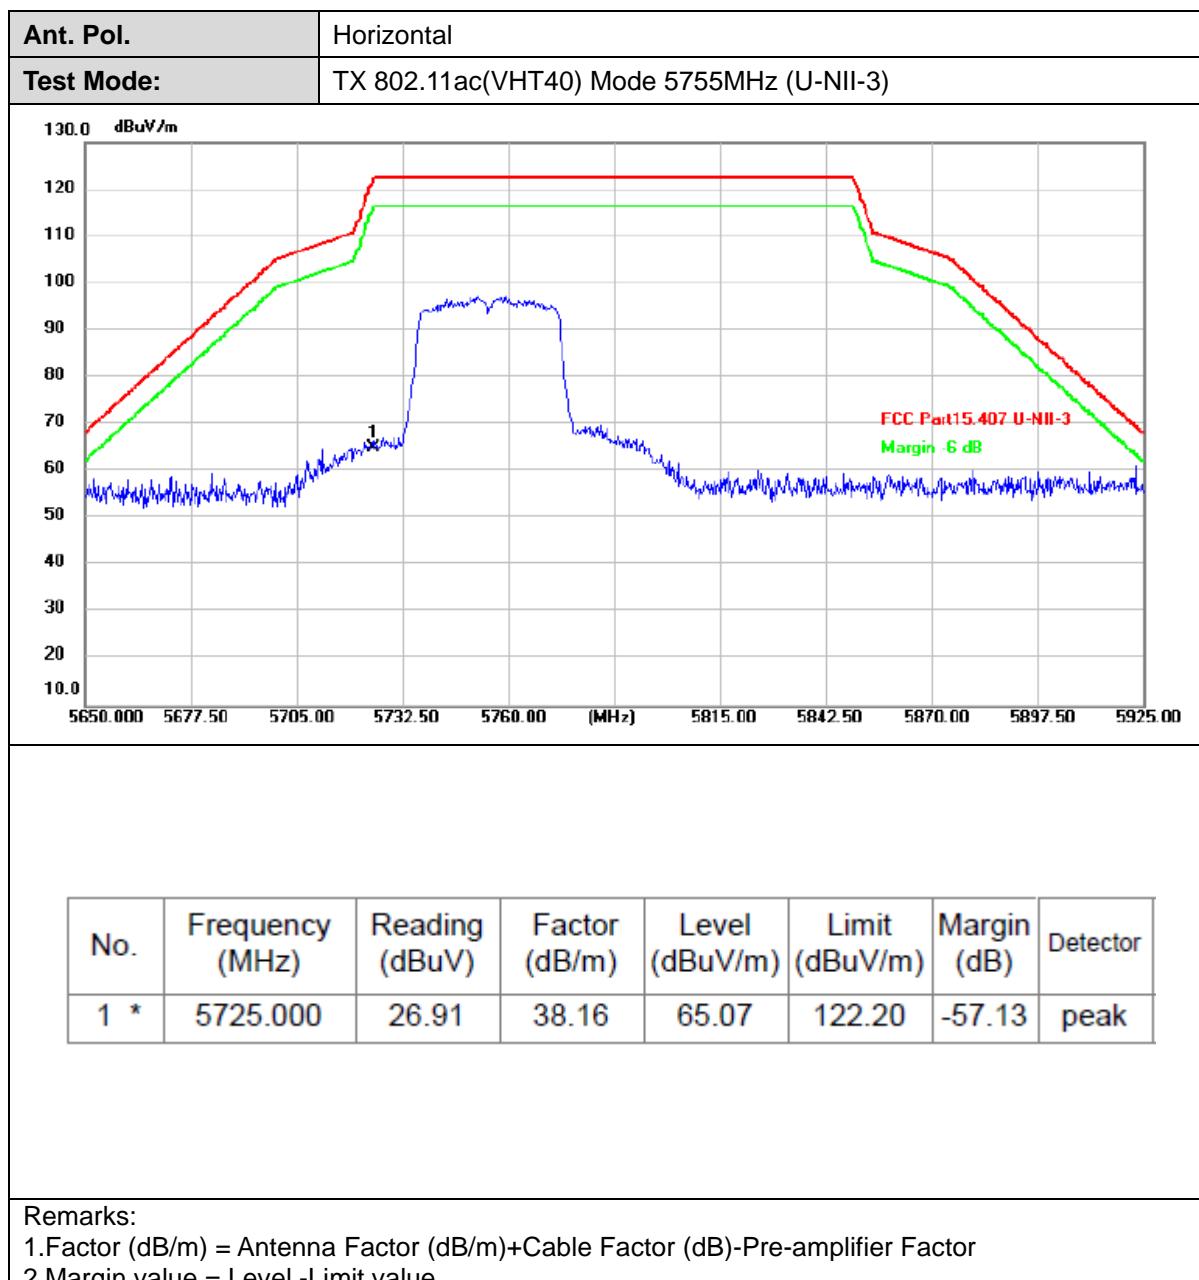

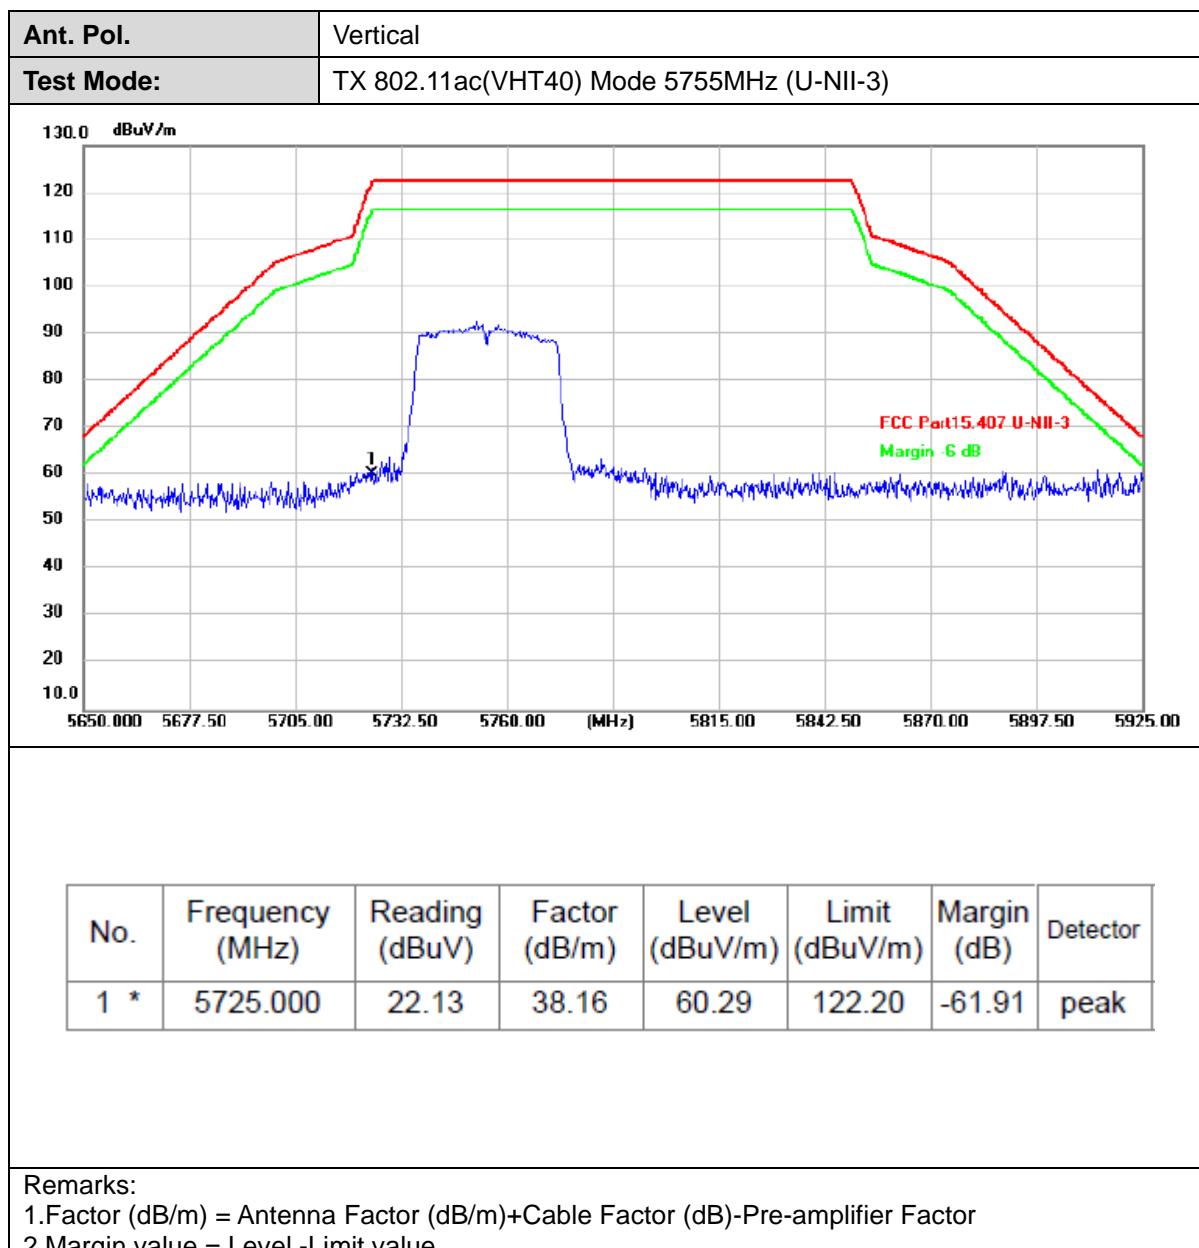

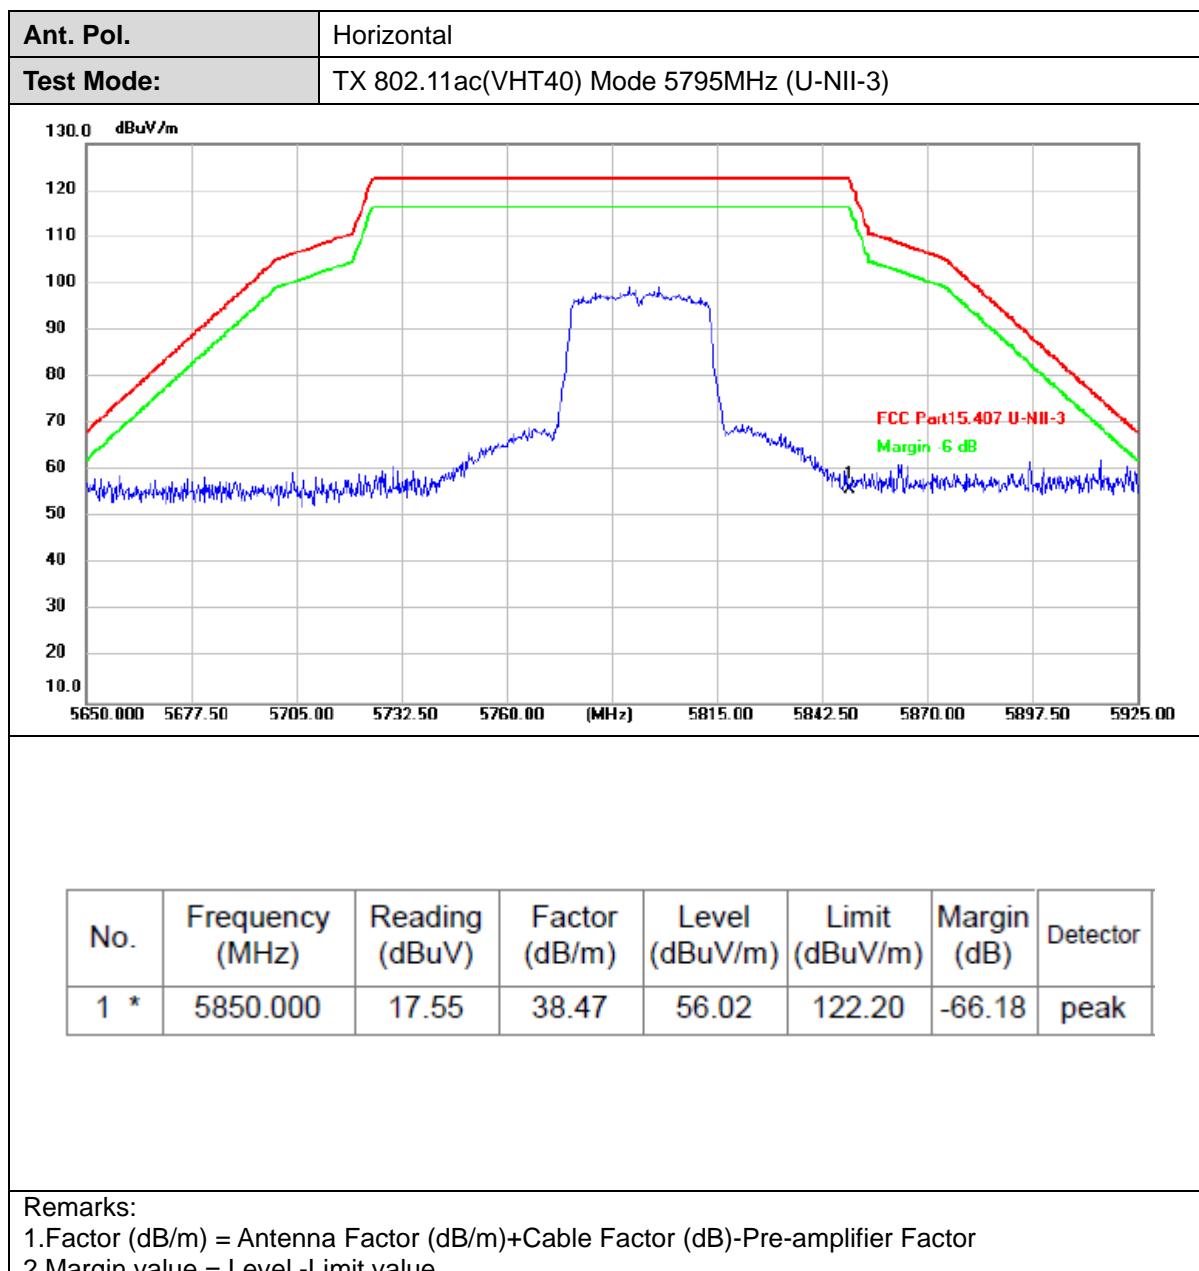



CTC Laboratories, Inc.


Room 101 Building B, No. 7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China  
Tel.: (86)755-27521059 Fax: (86)755-27521011 [Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)

TRF No: CTC-TR-062\_A1

For anti-fake verification, please visit the official website of China Inspection And Testing Society : [vz.cnca.cn](http://vz.cnca.cn)

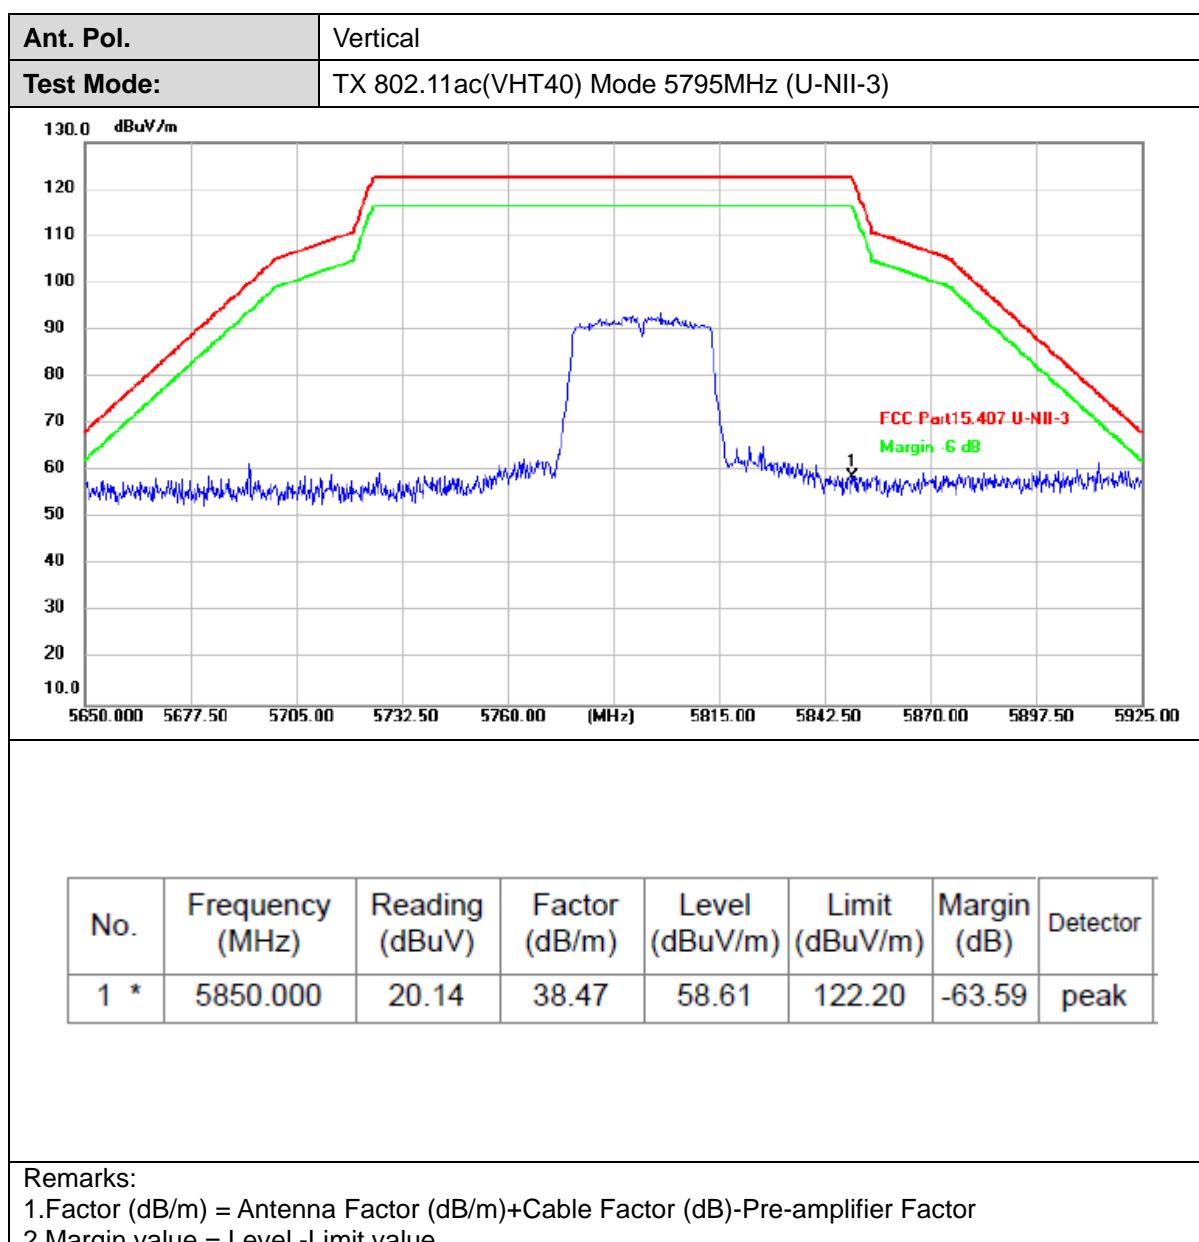

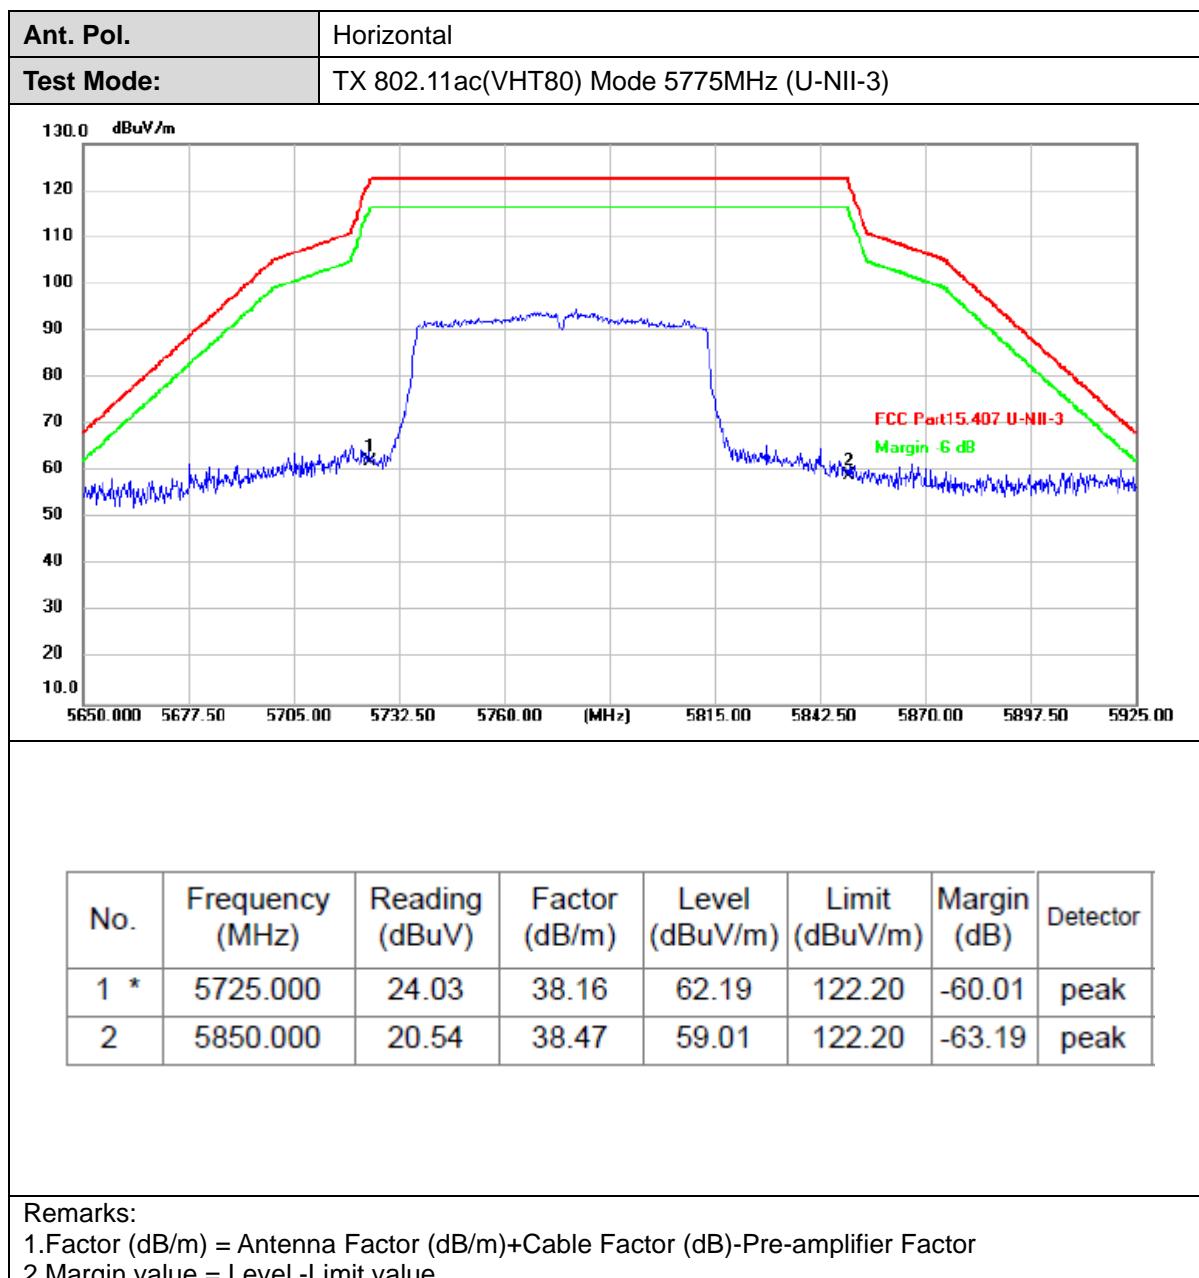

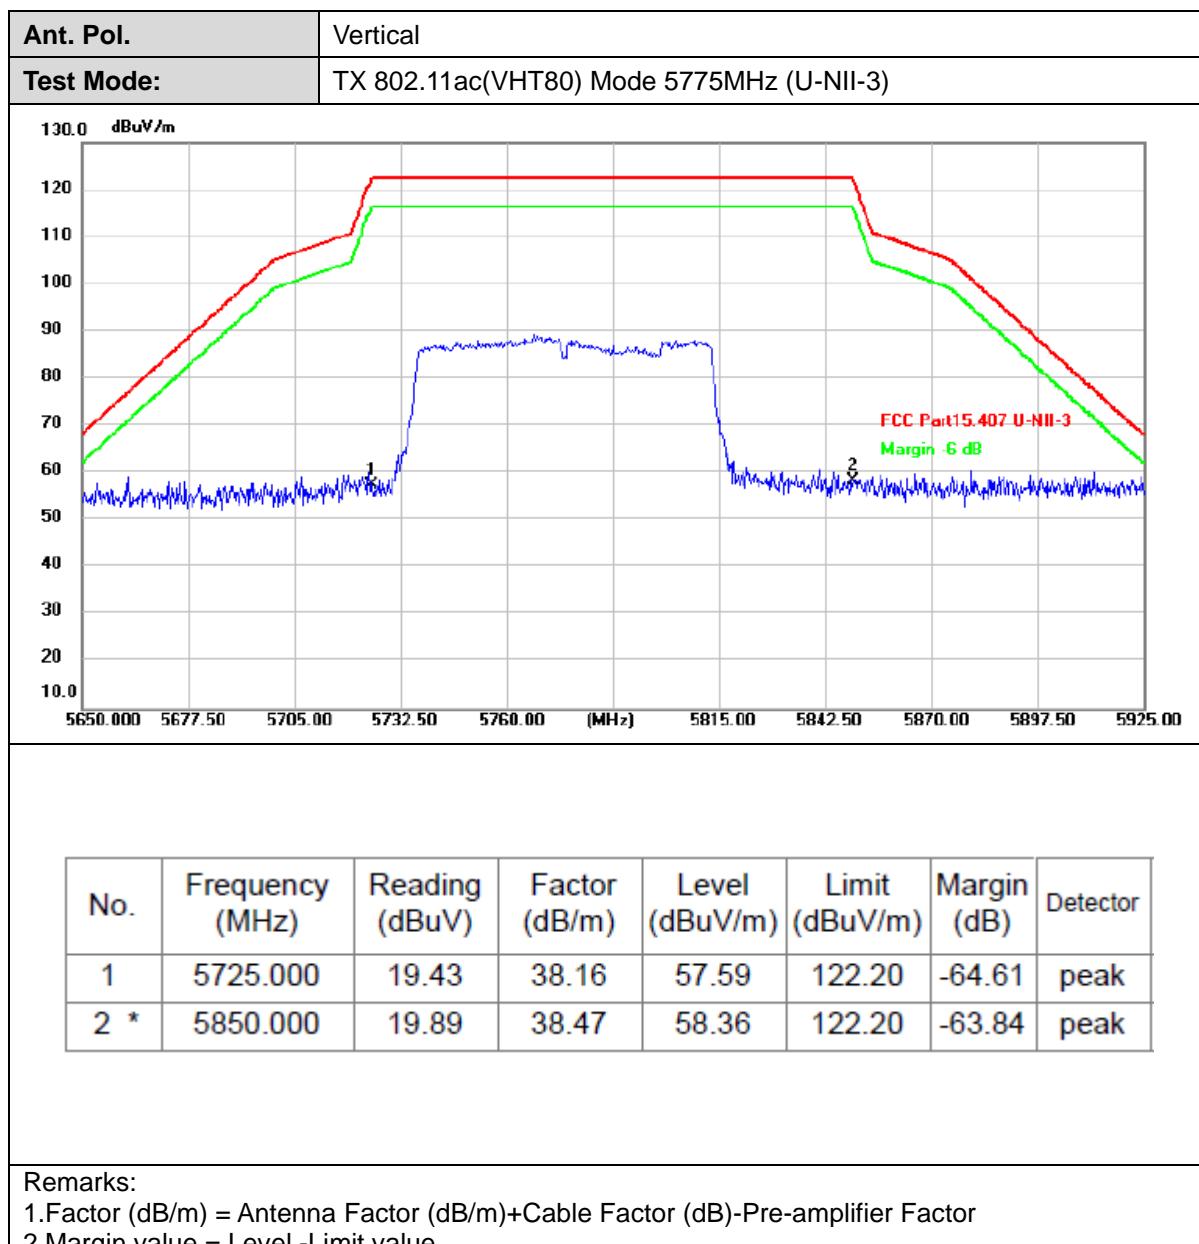




### 3.4. Bandwidth

#### Limit

FCC CFR Title 47 Part 15 Subpart E Section 15.407(a) & (e) / RSS-247 6.2.1.2 & 6.2.4.1

Test Item	Limit	Frequency Range (MHz)
26dB Bandwidth& 99% Bandwidth	N/A	5150~5250
		5250~5350
		5500~5700
6 dB Bandwidth	$\geq 500$ kHz	5725~5850

#### Test Configuration



#### Test Procedure

Please refer to KDB789033 D02 for the measurement methods.

#### The setting of the spectrum analyzer as below:

26dB Bandwidth Test	
Spectrum Parameters	Setting
Attenuation	Auto
Span	>26 dB Bandwidth
RBW	Approximately 1% of the emission bandwidth
VBW	>RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto



6dB Bandwidth Test	
Spectrum Parameters	Setting
Attenuation	Auto
Span	>6 dB Bandwidth
RBW	100 kHz
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

99% Occupied Bandwidth Test	
Spectrum Parameters	Setting
Attenuation	Auto
RBW	1% to 5% of the OBW
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold

NOTE: The EUT was set to continuously transmitting in each mode and low, middle and high channel for the test.

### Test Mode

Please refer to the clause 2.4.

### Test Result

Test data are detailed in the original report CTC2024299408.

---

CTC Laboratories, Inc.

Room 101 Building B, No. 7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China  
Tel.: (86)755-27521059    Fax: (86)755-27521011    [Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)

TRF No: CTC-TR-062\_A1

For anti-fake verification, please visit the official website of China Inspection And Testing Society : [www.cnca.gov.cn](http://www.cnca.gov.cn)



### 3.5. Peak Output Power

#### Limit


#### FCC CFR Title 47 Part 15 Subpart E Section 15.407(a)

Test Item	Limit	Frequency Range (MHz)
Conducted Output Power	Fixed: 1 Watt (30dBm) Mobile and Portable: 250mW (24dBm)	5150~5250
	250mW (24dBm)	5250~5350
	250mW (24dBm)	5500~5700
	1 Watt (30dBm)	5725~5850

#### RSS-247 6.2

IC Power&PSD Limit					
Frequency	Type of devices	Maximum Conducted Output Power	EIRP Output Power	Conducted Power Spectral Density	EIRP Power Spectral Density
5150MHz-5250MHz	in vehicles		30mW or $1.76 + 10 \times \log_{10} \text{dBm}$ , whichever is less (B=99% OBW in MHz)		
	Other Devices		200mW or $10 + 10 \times \log_{10} \text{dBm}$ , whichever is less (B=99% OBW in MHz)		10dBm/MHz
5250MHz-5350MHz	in vehicles		30mW or $1.76 + 10 \times \log_{10} \text{dBm}$ , whichever is less (B=99% OBW in MHz)		
	Other Devices	250mW or $11 + 10 \times \log_{10} \text{dBm}$ , whichever is less (B=99% OBW in MHz)	1W or $17 + 10 \times \log_{10} \text{dBm}$ , whichever is less (B=99% OBW in MHz)	11dBm/Mhz	
5470MHz-5600MHz 5650MHz-5725MHz	ALL Devices	250mW or $11 + 10 \times \log_{10} \text{dBm}$ , whichever is less (B=99% OBW in MHz)	1W or $17 + 10 \times \log_{10} \text{dBm}$ , whichever is less (B=99% OBW in MHz)	11dBm/Mhz	
5725MHz-5850MHz	ALL Devices	1W		30dBm/500KHz	

#### Test Configuration

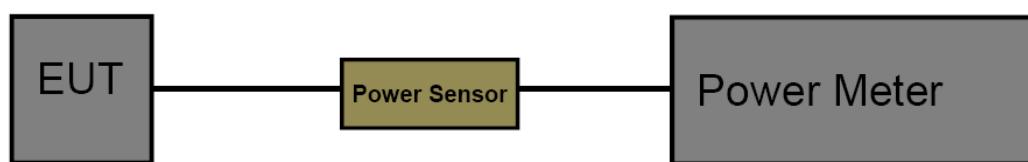

### **Test Procedure**

The measurement is according to section 3 of KDB 789033 D02 General UNII Test Procedures New Rules V02r01.

### **Test Mode**

Please refer to the clause 2.4.

### **Test Result**

Test Mode	Freq(MHz)	Conducted Output Power [dBm]	Limit [dBm]	EIRP [dBm]	EIRP Limit [dBm]	Verdict
11A	5180	14.79	≤24	18.35	≤23	PASS
	5200	14.55	≤24	18.11	≤23	PASS
	5240	14.30	≤24	17.86	≤23	PASS
	5260	14.26	≤24	17.82	≤30	PASS
	5280	14.29	≤24	17.85	≤30	PASS
	5320	14.87	≤24	18.43	≤30	PASS
	5500	15.60	≤24	19.16	≤30	PASS
	5580	14.74	≤24	18.30	≤30	PASS
	5700	14.33	≤24	17.89	≤30	PASS
	5720_UNII-2C	14.10	≤24	17.66	≤30	PASS
	5720_UNII-3	10.67	≤24	14.23	≤30	PASS
	5745	13.96	≤30	/	/	PASS
	5785	13.90	≤30	/	/	PASS
	5825	14.05	≤30	/	/	PASS
11N20SISO	5180	14.18	≤24	17.74	≤23	PASS
	5200	14.23	≤24	17.79	≤23	PASS
	5240	14.15	≤24	17.71	≤23	PASS
	5260	14.11	≤24	17.67	≤30	PASS
	5280	14.19	≤24	17.75	≤30	PASS
	5320	14.22	≤24	17.78	≤30	PASS
	5500	14.40	≤24	17.96	≤30	PASS
	5580	14.49	≤24	18.05	≤30	PASS
	5700	14.16	≤24	17.72	≤30	PASS
	5720_UNII-2C	13.49	≤24	17.05	≤30	PASS
	5720_UNII-3	11.87	≤24	15.43	≤30	PASS
	5745	13.71	≤30	/	/	PASS
	5785	13.79	≤30	/	/	PASS
	5825	14.10	≤30	/	/	PASS
11N40SISO	5190	14.21	≤24	17.77	≤23	PASS
	5230	14.40	≤24	17.96	≤23	PASS
	5270	14.52	≤24	18.08	≤30	PASS
	5310	14.33	≤24	17.89	≤30	PASS
	5510	14.69	≤24	18.25	≤30	PASS
	5550	14.71	≤24	18.27	≤30	PASS
	5670	14.58	≤24	18.14	≤30	PASS

CTC Laboratories, Inc.

Room 101 Building B, No. 7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China  
Tel.: (86)755-27521059 Fax: (86)755-27521011 [Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)

TRF No: CTC-TR-062\_A1

For anti-fake verification, please visit the official website of China Inspection And Testing Society : [vz.cnca.cn](http://www.vz.cnca.cn)



	5710_UNII-2C	14.01	≤24	17.57	≤30	PASS
	5710_UNII-3	11.62	≤24	15.18	≤30	PASS
	5755	14.39	≤30	/	/	PASS
	5795	14.22	≤30	/	/	PASS
11AC20SISO	5180	14.88	≤24	18.44	≤23	PASS
	5200	14.49	≤24	18.05	≤23	PASS
	5240	14.53	≤24	18.09	≤23	PASS
	5260	14.75	≤24	18.31	≤30	PASS
	5280	14.35	≤24	17.91	≤30	PASS
	5320	14.42	≤24	17.98	≤30	PASS
	5500	15.66	≤24	19.22	≤30	PASS
	5580	14.54	≤24	18.10	≤30	PASS
	5700	14.69	≤24	18.25	≤30	PASS
	5720_UNII-2C	13.61	≤24	17.17	≤30	PASS
	5720_UNII-3	12.10	≤24	15.66	≤30	PASS
	5745	14.12	≤30	/	/	PASS
	5785	14.10	≤30	/	/	PASS
	5825	14.18	≤30	/	/	PASS
11AC40SISO	5190	14.42	≤24	17.98	≤23	PASS
	5230	14.63	≤24	18.19	≤23	PASS
	5270	14.60	≤24	18.16	≤30	PASS
	5310	14.41	≤24	17.97	≤30	PASS
	5510	15.82	≤24	19.38	≤30	PASS
	5550	14.86	≤24	18.42	≤30	PASS
	5670	14.85	≤24	18.41	≤30	PASS
	5710_UNII-2C	14.38	≤24	17.94	≤30	PASS
	5710_UNII-3	14.12	≤24	17.68	≤30	PASS
	5755	14.54	≤30	/	/	PASS
	5795	14.46	≤30	/	/	PASS
11AC80SISO	5210	12.12	≤24	15.68	≤23	PASS
	5290	12.00	≤24	15.56	≤30	PASS
	5530	14.10	≤24	17.66	≤30	PASS
	5610	12.51	≤24	16.07	≤30	PASS
	5690_UNII-2C	14.33	≤24	17.89	≤30	PASS
	5690_UNII-3	14.25	≤24	17.81	≤30	PASS
	5775	12.66	≤30	/	/	PASS

Note: It was verified that the retested output power was at the same power level as the original case output power, so the output power was not updated.



## 3.6. Power Spectral Density

### Limit

#### FCC CFR Title 47 Part 15 Subpart E Section 15.407(a)

For the 5.15~5.25GHz band:

- Outdoor AP  
The peak power spectral density (PSD) shall not exceed the lesser of 17dBm/MHz.  
If  $G_{Tx} > 6\text{dBi}$ , then  $\text{PSD} = 17 - (G_{Tx} - 6)$ .
- Indoor AP  
The peak power spectral density (PSD) shall not exceed the lesser of 17dBm/MHz.  
If  $G_{Tx} > 6\text{dBi}$ , then  $\text{PSD} = 17 - (G_{Tx} - 6)$ .
- Point-to-point AP  
The peak power spectral density (PSD) shall not exceed the lesser of 17dBm/MHz.  
If  $G_{Tx} > 23\text{dBi}$ , then  $\text{PSD} = 17 - (G_{Tx} - 23)$ .
- Client devices  
The peak power spectral density (PSD) shall not exceed the lesser of 11dBm/MHz.  
If  $G_{Tx} > 6\text{dBi}$ , then  $\text{PSD} = 11 - (G_{Tx} - 6)$ .

For the 5.25~5.35GHz band:

The peak power spectral density (PSD) shall not exceed the lesser of 11dBm/MHz.  
If  $G_{Tx} > 6\text{dBi}$ , then  $\text{PSD} = 11 - (G_{Tx} - 6)$ .

For the 5.47~5.725GHz band:

The peak power spectral density (PSD) shall not exceed the lesser of 11dBm/MHz.  
If  $G_{Tx} > 6\text{dBi}$ , then  $\text{PSD} = 11 - (G_{Tx} - 6)$ .

For the 5.725~5.85GHz band:

- Point-to-multipoint systems (P2M)  
The peak power spectral density (PSD) shall not exceed the lesser of 30dBm/500kHz.  
If  $G_{Tx} > 6\text{dBi}$ , then  $\text{PSD} = 30 - (G_{Tx} - 6)$ .
- Point-to-point systems (P2P)  
The peak power spectral density (PSD) shall not exceed the lesser of 30dBm/500kHz.


Note:  $G_{Tx}$ : EUT Antenna gain.

**RSS-247 6.2**



		IC Power&PSD Limit			
Frequency	Type of devices	Maximum Conducted Output Power	EIRP Output Power	Conducted Power Spectral Density	EIRP Power Spectral Density
5150MHz-5250MHz	in vehicles		30mW or $1.76 + 10 \times \log_{10} B \text{ dBm}$ , whichever is less (B=99% OBW in MHz)		
	Other Devices		200mW or $10 + 10 \times \log_{10} B \text{ dBm}$ , whichever is less (B=99% OBW in MHz)		10dBm/MHz
5250MHz-5350MHz	in vehicles		30mW or $1.76 + 10 \times \log_{10} B \text{ dBm}$ , whichever is less (B=99% OBW in MHz)		
	Other Devices	250mW or $11 + 10 \times \log_{10} B \text{ dBm}$ , whichever is less (B=99% OBW in MHz)	1W or $17 + 10 \times \log_{10} B \text{ dBm}$ , whichever is less (B=99% OBW in MHz)	11dBm/MHz	
5470MHz-5600MHz 5650MHz-5725MHz	ALL Devices	250mW or $11 + 10 \times \log_{10} B \text{ dBm}$ , whichever is less (B=99% OBW in MHz)	1W or $17 + 10 \times \log_{10} B \text{ dBm}$ , whichever is less (B=99% OBW in MHz)	11dBm/MHz	
5725MHz-5850MHz	ALL Devices	1W		30dBm/500KHz	

### Test Configuration



### Test Procedure

The EUT was directly connected to the Spectrum Analyzer and antenna output port as show in the block diagram above. The measurement is according to KDB 789033 D02 General UNII Test Procedures New Rules V02r01.

- (1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- (2) Set analyzer center frequency to transmitting frequency.
- (3) Set the span to encompass the entire emissions bandwidth (EBW) (alternatively, the entire 99% OBW of the signal).
- (4) RBW=1MHz for devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz  
RBW=500kHz for devices operating in the band 5.725-5.85 GHz.
- (5) Set the VBW to:  $\geq 3 \text{ RBW}$
- (6) Detector: AVG
- (7) Trace: Max Hold and View
- (7) Sweep time: auto
- (8) Trace average at least 100 traces in power averaging.
- (9) Use the peak marker function to determine the maximum amplitude level within the RBW. Apply correction to the result if different RBW is used.

NOTE: The EUT was set to continuously transmitting in each mode and low, middle and high channel for the test.

### Test Mode

Please refer to the clause 2.4.

CTC Laboratories, Inc.

Room 101 Building B, No. 7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China  
Tel.: (86)755-27521059 Fax: (86)755-27521011 [Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)

TRF No: CTC-TR-062\_A1

For anti-fake verification, please visit the official website of China Inspection And Testing Society : [yz.cnca.cn](http://www.yz.cnca.cn)

**Test Result**

Test data are detailed in the original report CTC2024299408.

---

CTC Laboratories, Inc.

Room 101 Building B, No. 7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China  
Tel.: (86)755-27521059    Fax: (86)755-27521011    [Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)

TRF No: CTC-TR-062\_A1

For anti-fake verification, please visit the official website of China Inspection And Testing Society : [yz.cnca.cn](http://www.cnca.gov.cn)




## 3.7. Frequency Stability

### Limit

#### FCC CFR Title 47 Part 15 Subpart E Section 15.407(g) / RSS-Gen 6.11

Test Item	Limit	Frequency Range (MHz)
Frequency Stability	Specified in the user's manual, the transmitter center frequency tolerance shall be $\pm 20$ ppm maximum for the 5 GHz band (IEEE 802.11n specification)	5150~5250
		5250~5350
		5500~5700
		5725~5850

### Test Configuration

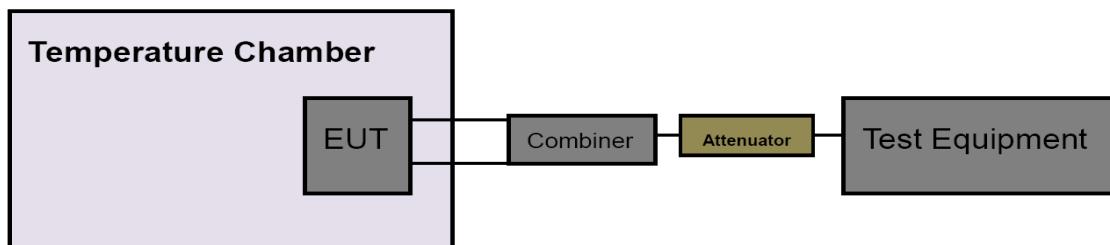

### Test Procedure

The EUT was directly connected to the Spectrum Analyzer and antenna output port as show in the block diagram above.

- (1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- (2) Set analyzer center frequency to transmitting frequency.
- (3) Set the span to encompass the entire emissions bandwidth (EBW) of the signal.
- (4) Set the RBW to: 8MHz, VBW=8MHz with peak detector and max hold settings.
- (5) The test extreme voltage is to change the primary supply voltage from 12Vdc to 19Vdc percent of the nominal value.
- (6) Extreme temperature is 0°C~50°C

NOTE: The EUT was set to continuously transmitting in continuously un-modulation transmitting mode.

### Test Mode

Please refer to the clause 2.4.

### Test Result

Test data are detailed in the original report CTC2024299408.



## 3.8. Antenna Requirement

### Requirement

#### **FCC CFR Title 47 Part 15 Subpart C Section 15.203**

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

### Test Result

The directional gain of the antenna is less than 6dBi, please refer to the EUT internal photographs antenna photo.

### **RSS-Gen Issue 5 Section 6.8**

The applicant for equipment certification, as per RSP-100, must provide a list of all antenna types that may be used with the licence-exempt transmitter, indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. Licence-exempt transmitters that have received equipment certification may operate with different types of antennas. However, it is not permissible to exceed the maximum equivalent isotropically radiated power(e.i.r.p.) limits specified in the applicable standard (RSS) for licence-exempt apparatus.

### Result

PASS.

The EUT has 1 antenna: a Iron Antenna for 5G WIFI.

Note:  Antenna use a permanently attached antenna which is not replaceable.

Not using a standard antenna jack or electrical connector for antenna replacement.

The antenna has to be professionally installed (please provide method of installation).

Which in accordance to RSS-Gen 6.8, please refer to the internal photos.



### 3.9. Dynamic Frequency Selection

#### Requirement

Table 1: Applicability of DFS Requirements Prior to Use of a Channel

Requirement	Operational Mode		
	Master	Client Without Radar Detection	Client With Radar Detection
Non-Occupancy Period	Yes	Not required	Yes
DFS Detection Threshold	Yes	Not required	Yes
Channel Availability Check Time	Yes	Not required	Not required
U-NII Detection Bandwidth	Yes	Not required	Yes

Table 2: Applicability of DFS requirements during normal operation

Requirement	Operational Mode	
	Master Device or Client with Radar Detection	Client Without Radar Detection
DFS Detection Threshold	Yes	Not required
Channel Closing Transmission Time	Yes	Yes
Channel Move Time	Yes	Yes
U-NII Detection Bandwidth	Yes	Not required

Additional requirements for devices with multiple bandwidth modes	Master Device or Client with Radar Detection	Client Without Radar Detection
U-NII Detection Bandwidth and Statistical Performance Check	All BW modes must be tested	Not required
Channel Move Time and Channel Closing Transmission Time	Test using widest BW mode available	Test using the widest BW mode available for the link
All other tests	Any single BW mode	Not required

Note: Frequencies selected for statistical performance check (Section 7.8.4) should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in each of the bonded 20 MHz channels and the channel center frequency.



## Limit

### 1. DFS Detection Thresholds

Table 3: DFS Detection Thresholds for Master Devices and Client Devices With Radar Detection

Maximum Transmit Power	Value (See Notes 1, 2, and 3)
EIRP $\geq$ 200 milliwatt	-64 dBm
EIRP $<$ 200 milliwatt and power spectral density $<$ 10 dBm/MHz	-62 dBm
EIRP $<$ 200 milliwatt that do not meet the power spectral density requirement	-64 dBm

Note 1: This is the level at the input of the receiver assuming a 0dBi receive antenna.  
Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.  
Note3: EIRP is based on the highest antenna gain. For MIMO devices refer to KDB Publication 662911 D01.

### 2. DFS Response Requirements

Table 4: DFS Response Requirement Values

Parameter	Value
Non-occupancy period	Minimum 30 minutes
Channel Availability Check Time	60 seconds
Channel Move Time	10 seconds See Note 1.
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.
U-NII Detection Bandwidth	Minimum 100% of the U-NII 99% transmission power bandwidth. See Note 3.

Note 1: Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst.  
Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required facilitating a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.  
Note 3: During the U-NII Detection Bandwidth detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.

## Radar Test Waveforms

This section provides the parameters for required test waveforms, minimum percentage of successful detections, and the minimum number of trials that must be used for determining DFS conformance. Step intervals of 0.1 microsecond for Pulse Width, 1 microsecond for PRI, 1 MHz for chirp width and 1 for the number of pulses will be utilized for the random determination of specific test waveforms.



Table 5 Short Pulse Radar Test Waveforms

Radar Type	Pulse Width (μsec)	PRI (μsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Number of Trials
0	1	1428	18	See Note 1	See Note 1
1	1	Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a	Roundup $\left\{ \left( \frac{1}{360} \right) \cdot \left( \frac{19 \cdot 10^6}{\text{PRI}_{\mu\text{sec}}} \right) \right\}$	60%	30
		Test B: 15 unique PRI values randomly selected within the range of 518-3066 μsec, with a minimum increment of 1 μsec, excluding PRI values selected in Test A			
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120

Note 1: Short Pulse Radar Type 0 should be used for the detection bandwidth test, channel move time, and channel closing time tests.

A minimum of 30 unique waveforms are required for each of the Short Pulse Radar Types 2 through 4. If more than 30 waveforms are used for Short Pulse Radar Types 2 through 4, then each additional waveform must also be unique and not repeated from the previous waveforms. If more than 30 waveforms are used for Short Pulse Radar Type 1, then each additional waveform is generated with Test B and must also be unique and not repeated from the previous waveforms in Tests A or B.

For example if in Short Pulse Radar Type 1 Test B a PRI of 3066 μsec is selected, the number of pulses

$$\left\{ \left( \frac{1}{360} \right) \cdot \left( \frac{19 \cdot 10^6}{3066} \right) \right\}$$

would be Round up

$$= \text{Round up } \{17.2\} = 18.$$

Table 5a - Pulse Repetition Intervals Values for Test A

Pulse Repetition Frequency Number	Pulse Repetition Frequency (Pulses Per Second)	Pulse Repetition Interval (Microseconds)
1	1930.5	518
2	1858.7	538
3	1792.1	558
4	1730.1	578
5	1672.2	598
6	1618.1	618
7	1567.4	638
8	1519.8	658

CTC Laboratories, Inc.

Room 101 Building B, No. 7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China  
Tel.: (86)755-27521059 Fax: (86)755-27521011 [Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)

TRF No: CTC-TR-062\_A1

For anti-fake verification, please visit the official website of China Inspection And Testing Society : [vz.cnca.cn](http://www.vz.cnca.cn)



Pulse Repetition Frequency Number	Pulse Repetition Frequency (Pulses Per Second)	Pulse Repetition Interval (Microseconds)
9	1474.9	678
10	1432.7	698
11	1392.8	718
12	1355	738
13	1319.3	758
14	1285.3	778
15	1253.1	798
16	1222.5	818
17	1193.3	838
18	1165.6	858
19	1139	878
20	1113.6	898
21	1089.3	918
22	1066.1	938
23	326.2	3066

Table 6 – Long Pulse Radar Test Waveform

Radar Type	Pulse Width (μsec)	Chirp Width (MHz)	PRI (μsec)	Number of Pulses per Burst	Number of Bursts	Minimum Percentage of Successful Detection	Minimum Number of Trials
5	50-100	5-20	1000-2000	1-3	8-20	80%	30

The parameters for this waveform are randomly chosen. Thirty unique waveforms are required for the Long Pulse Radar Type waveforms. If more than 30 waveforms are used for the Long Pulse Radar Type waveforms, then each additional waveform must also be unique and not repeated from the previous waveforms.

Table 7 – Frequency Hopping Radar Test Waveform

Radar Type	Pulse Width (μsec)	PRI (μsec)	Pulses per Hop	Hopping Rate (kHz)	Hopping Sequence Length (msec)	Minimum Percentage of Successful Detection	Minimum Number of Trials
6	1	333	9	0.333	300	70%	30

For the Frequency Hopping Radar Type, the same Burst parameters are used for each wave form. The hopping sequence is different for each wave form and a 100-length segment is selected from the hopping sequence defined by the following algorithm:


The first frequency in a hopping sequence is selected randomly from the group of 475 integer frequencies from 5250–5724MHz. Next, the frequency that was just chosen is removed from the group and a frequency is randomly selected from the remaining 474 frequencies in the group. This process continues until all 475 frequencies are chosen for the set. For selection of a random frequency, the frequencies remaining within the group are always treated as equally likely.

## Calibration of Radar Waveform

### Radar Waveform Calibration Procedure


- 1) A 50 ohm load is connected in place of the spectrum analyzer, and the spectrum analyzer is connected to place of the master.
- 2) The interference Radar Detection Threshold Level is  $-62\text{dBm} + 3.47\text{dBi} + 1\text{dB} = -57.53\text{dBm}$  that had been taken into account the output power range and antenna gain.
- 3) The following equipment setup was used to calibrate the conducted radar waveform. A vector signal generator was utilized to establish the test signal level for radar type 0. During this process there were no transmissions by either the master or client device. The spectrum analyzer was switched to the zero spans (time domain) at the frequency of the radar waveform generator. Peak detection was used. The spectrum analyzer resolution bandwidth (RBW) and video bandwidth (VBW) were set to 3 MHz. The spectrum analyzer had offset -1.0dB to compensate RF cable loss 1.0dB.
- 4) The vector signal generator amplitude was set so that the power level measured at the spectrum analyzer was  $-62\text{dBm} + 3.47\text{dBi} + 1\text{dB} = -57.53\text{dBm}$ . Capture the spectrum analyzer plots on short pulse radar waveform.

## Conducted Calibration Setup

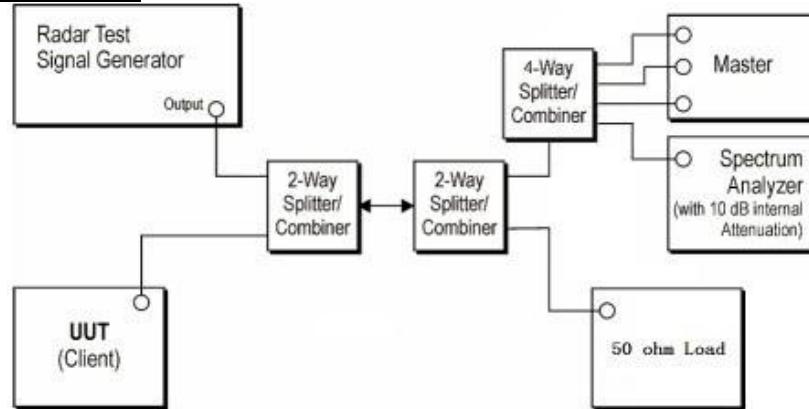

## Test Configuration

### Setup for Client with injection at the Master

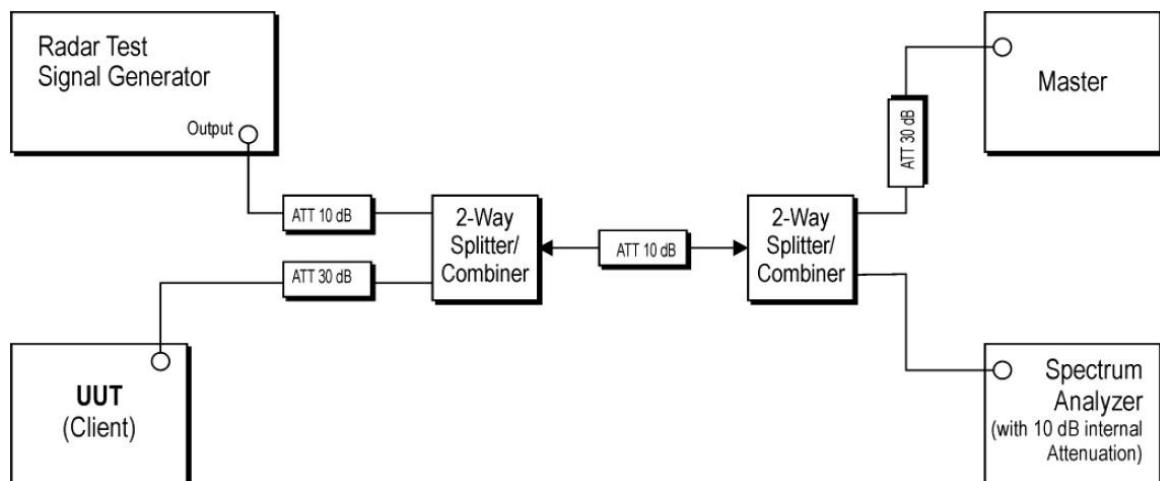



### **Test Procedure**

1. The radar pulse generator is setup to provide a pulse at frequency that the master and client are operating. A type 0 radar pulse with a 1us pulse width and a 1428us PRI is used for the testing.
2. The vector signal generator is adjusted to provide the radar burst (18 pulses) at the level of approximately -61dBm at the antenna port of the master device
3. A trigger is provided from the pulse generator to the DFS monitoring system in order to capture the traffic and the occurrence of the radar pulse.
4. EUT will associate with the master at channel. The file "iperf.exe" specified by the FCC is streamed from the PC 2 through the master and the client device to the PC 1 and played in full motion video using Media Player Classic Ver. 6.4.8.6 in order to properly load the network for the entire period of the test.
5. When radar burst with a level equal to the DFS Detection Threshold +1dB is generated on the operating channel of the U-NII device. At time T0 the radar waveform generator sends a burst of pulse of the radar waveform at Detection Threshold +1dB.
6. Observe the transmissions of the EUT at the end of the radar Burst on the Operating Channel Measure and record the transmissions from the UUT during the observation time (Channel Move Time). One 15 seconds plot is reported for the Short Pulse Radar Type 0. The plot for the Short Pulse Radar Types start at the end of the radar burst. The Channel Move Time will be calculated based on the zoom in 600ms plot of the Short Pulse Radar Type
7. Measurement of the aggregate duration of the Channel Closed Transmission Time method. With the spectrum analyzer set to zero span tuned to the center frequency of the EUT operating channel at the radar simulated frequency, peak detection, and max hold, the dwell time per bin is given by: Dwell (0.3ms) =  $S$  (12000ms) /  $B$  (4000); where Dwell is the dwell time per spectrum analyzer sampling bin,  $S$  is sweep time and  $B$  is the number of spectrum analyzer sampling bins. An upper bound of the aggregate duration of the intermittent control signals of Channel Closing Transmission Time is calculated by:  $C$  (ms) =  $N$  X Dwell (0.3ms); where  $C$  is the Closing Time,  $N$  is the number of spectrum analyzer sampling bins (intermittent control signals) showing a U-NII transmission and Dwell is the dwell time per bin.
8. Measurement the EUT for more than 30 minutes following the channel move time to verify that no transmission or beacons occur on this channel.

### **Test Mode**

Please refer to the clause 2.4.

### **Test Result**

Test data are detailed in the original report CTC2024299408.

\*\*\*\*\*THE END OF REPORT\*\*\*\*\*

---

CTC Laboratories, Inc.

Room 101 Building B, No. 7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China  
Tel.: (86)755-27521059    Fax: (86)755-27521011    [Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)

TRF No: CTC-TR-062\_A1

For anti-fake verification, please visit the official website of China Inspection And Testing Society : [www.cnca.gov.cn](http://www.cnca.gov.cn)