

FCC&ISED TEST REPORT

Product Name: WIFI Module
Trade Mark: N/A
Model No. / HVIN: BL-R8822BU1-A
Report Number: 200302010RFC-3
Test Standards: FCC 47 CFR Part 15 Subpart C
RSS-247 Issue 2
RSS-Gen Issue 5
FCC ID: 2AQ5RWBL-8822BU1-A
IC: 24301-BLR8822BU1A
Test Result: PASS
Date of Issue: May 12, 2020

Prepared for:


Shenzhen KTC Commercial Display Technology CO.,LTD.
No.4023,Northern Wuhe Road,Bantian Street,Longgang
District,Shenzhen City,Guangdong Province,P.R.China

Prepared by:

Shenzhen UnionTrust Quality and Technology Co., Ltd.
16/F, Block A, Building 6, Baoneng Science and Technology Park,
Qingxiang Road No.1, Longhua New District, Shenzhen, China

TEL: +86-755-2823 0888
FAX: +86-755-2823 0886

Prepared by:


Henry Lu
Team Leader

Reviewed by:


Kevin Liang
Assistant Manager

Approved by:


Billy Li

Technical Director

Date: May 12, 2020

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-RSS247-V1.0

Version

Version No.	Date	Description
V1.0	May 12, 2020	Original



Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-RSS247-V1.0

CONTENTS

1. GENERAL INFORMATION	4
1.1 CLIENT INFORMATION	4
1.2 EUT INFORMATION	4
1.2.1 GENERAL DESCRIPTION OF EUT	4
1.2.2 DESCRIPTION OF ACCESSORIES	4
1.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD	5
1.4 OTHER INFORMATION	5
1.5 DESCRIPTION OF SUPPORT UNITS	5
1.6 TEST LOCATION	6
1.7 TEST FACILITY	6
1.8 DEVIATION FROM STANDARDS	6
1.9 ABNORMALITIES FROM STANDARD CONDITIONS	6
1.10 OTHER INFORMATION REQUESTED BY THE CUSTOMER	6
1.11 MEASUREMENT UNCERTAINTY	7
2. TEST SUMMARY	8
3. EQUIPMENT LIST	9
4. TEST CONFIGURATION	10
4.1 ENVIRONMENTAL CONDITIONS FOR TESTING	10
4.1.1 NORMAL OR EXTREME TEST CONDITIONS	10
4.1.2 RECORD OF NORMAL ENVIRONMENT	10
4.2 TEST CHANNELS	10
4.3 EUT TEST STATUS	11
4.4 PRE-SCAN	11
4.5 TEST SETUP	12
4.5.1 FOR RADIATED EMISSIONS TEST SETUP	12
4.5.2 FOR CONDUCTED EMISSIONS TEST SETUP	13
4.5.3 FOR CONDUCTED RF TEST SETUP	14
4.6 SYSTEM TEST CONFIGURATION	14
4.7 DUTY CYCLE	15
5. RADIO TECHNICAL REQUIREMENTS SPECIFICATION	18
5.1 REFERENCE DOCUMENTS FOR TESTING	18
5.2 ANTENNA REQUIREMENT	18
5.3 CONDUCTED PEAK OUTPUT POWER	19
5.4 6 dB BANDWIDTH & OCCUPIED BANDWIDTH	20
5.5 POWER SPECTRAL DENSITY	25
5.6 CONDUCTED OUT OF BAND EMISSION	28
5.7 RADIATED SPURIOUS EMISSIONS	37
5.8 BAND EDGE MEASUREMENTS (RADIATED)	44
5.9 CONDUCTED EMISSION	53
APPENDIX 1 PHOTOS OF TEST SETUP	56
APPENDIX 2 PHOTOS OF EUT CONSTRUCTIONAL DETAILS	56

1. GENERAL INFORMATION

1.1 CLIENT INFORMATION

Applicant:	Shenzhen KTC Commercial Display Technology CO.,LTD.
Address of Applicant:	No.4023,Northern Wuhe Road,Bantian Street,Longgang District,Shenzhen City,Guangdong Province,P.R.China
Manufacturer:	Shenzhen KTC Commercial Display Technology CO.,LTD.
Address of Manufacturer:	No.4023,Northern Wuhe Road,Bantian Street,Longgang District,Shenzhen City,Guangdong Province,P.R.China

1.2 EUT INFORMATION

1.2.1 General Description of EUT

Product Name:	WIFI Module		
Model No. / HVIN:	BL-R8822BU1-A		
Trade Mark:	N/A		
DUT Stage:	Production Unit		
EUT Supports Function:	2.4 GHz ISM Band:	IEEE 802.11b/g/n	
		Bluetooth V4.0	
	5 GHz U-NII Bands:	5 150 MHz to 5 250 MHz	IEEE 802.11a/n/ac
		5 250 MHz to 5 350 MHz	IEEE 802.11a/n/ac
		5 470 MHz to 5 725 MHz	IEEE 802.11a/n/ac
		5 725 MHz to 5 850 MHz	IEEE 802.11a/n/ac
Sample Received Date:	March 2, 2020		
Sample Tested Date:	March 2, 2020 to April 14, 2020		

1.2.2 Description of Accessories

Brand	Specification	Antenna Type	Connect Type	Antenna Gain
Zhongtianxun Antenna	Shielded 120mm	PCB	IPEX	2.4G BT: 2.5 dBi 2.4G WIFI: 3.05 dBi 5.2G WIFI: 4.39 dBi 5.3G WIFI: 4.68 dBi 5.6G WIFI: 5.57 dBi 5.8G WIFI: 5.68 dBi
Zhongtianxun Antenna	Shielded 550mm	PCB	IPEX	2.4G BT: 2.5 dBi 2.4G WIFI: 3.05 dBi 5.2G WIFI: 4.39 dBi 5.3G WIFI: 4.68 dBi 5.6G WIFI: 5.57 dBi 5.8G WIFI: 5.68 dBi
Zhongtianxun Antenna	Shielded 750mm	PCB	IPEX	2.4G BT: 2.5 dBi 2.4G WIFI: 3.05 dBi 5.2G WIFI: 4.39 dBi 5.3G WIFI: 4.68 dBi 5.6G WIFI: 5.57 dBi

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-RSS247-V1.0

				5.8G WIFI: 5.68 dBi
Zhongtianxun Antenna	Shielded 1000mm	PCB	IPEX	2.4G BT: 2.5 dBi 2.4G WIFI: 3.05 dBi 5.2G WIFI: 4.39 dBi 5.3G WIFI: 4.68 dBi 5.6G WIFI: 5.57 dBi 5.8G WIFI: 5.68 dBi
Remark: The test data is gathered from a production sample (Shielded 120mm), provided by the manufacturer. The wire lengths of all antenna listed in the report is different, but the circuit and the electronic construction do not change, declared by the manufacturer. The device is investigated from radiated spurious emission and radiated band edge test under different wire lengths exploratory test. Subsequently, only the worst case (Shielded 120mm) emissions are reported.				

1.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD

Frequency Band:	2400 MHz to 2483.5 MHz
Frequency Range:	2412 MHz to 2462 MHz
Support Standards:	IEEE 802.11b, IEEE 802.11g, IEEE 802.11n-HT20, IEEE 802.11n-HT40
Type of Modulation:	IEEE 802.11b: DSSS(CCK, DQPSK, DBPSK) IEEE 802.11g: OFDM(64-QAM, 16-QAM, QPSK, BPSK) IEEE 802.11n-HT20: OFDM(64-QAM, 16-QAM, QPSK, BPSK) IEEE 802.11n-HT40: OFDM(64-QAM, 16-QAM, QPSK, BPSK)
Data Rate:	IEEE 802.11b: Up to 11 Mbps IEEE 802.11g: Up to 54 Mbps IEEE 802.11n-HT20: Up to MCS7 IEEE 802.11n-HT40: Up to MCS7
Number of Channels:	IEEE 802.11b: 11 IEEE 802.11g: 11 IEEE 802.11n-HT20: 11 IEEE 802.11n-HT40: 7
Channel Separation:	5 MHz
Antenna Type:	PCB Antenna
Antenna Gain:	3.05 dBi
Maximum Peak Power:	IEEE 802.11b: 18.73 dBm IEEE 802.11g: 21.12 dBm IEEE 802.11n-HT20: 16.35 dBm IEEE 802.11n-HT40: 15.55 dBm
Normal Test Voltage:	3.3 Vdc

1.4 OTHER INFORMATION

Operation Frequency Each of Channel	
IEEE 802.11b, IEEE 802.11g, IEEE 802.11n-HT20	$f = 2407 + 5k \text{ MHz}, k = 1, \dots, 11$
IEEE 802.11n-HT40	$f = 2407 + 5k \text{ MHz}, k = 3, \dots, 9$
Note: f is the operating frequency (MHz); k is the operating channel.	

1.5 DESCRIPTION OF SUPPORT UNITS

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China
 Tel: +86-755-28230888 Fax: +86-755-28230886 E-mail: info@uttlab.com <http://www.uttlab.com>
 UTR-RF-RSS247-V1.0

The EUT has been tested with associated equipment below.

1) Support Equipment

Description	Manufacturer	Model No.	Serial Number	Supplied by
Notebook	Lenovo	E450	SL10G10780	UnionTrust

2) Support Cable

Cable No.	Description	Connector	Length	Supplied by
1	Antenna Cable	SMA	0.30 Meter	UnionTrust

1.6 TEST LOCATION

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China 518109
Telephone: +86 (0) 755 2823 0888
Fax: +86 (0) 755 2823 0886

1.7 TEST FACILITY

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L9069

The measuring equipment utilized to perform the tests documented in this report has been calibrated once a year or in accordance with the manufacturer's recommendations, and is traceable under the ISO/IEC/EN 17025 to international or national standards. Equipment has been calibrated by accredited calibration laboratories.

A2LA-Lab Certificate No.: 4312.01

Shenzhen UnionTrust Quality and Technology Co., Ltd. has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

ISED Wireless Device Testing Laboratories

CAB identifier: CN0032

FCC Accredited Lab.

Designation Number: CN1194

Test Firm Registration Number: 259480

1.8 DEVIATION FROM STANDARDS

None.

1.9 ABNORMALITIES FROM STANDARD CONDITIONS

None.

1.10 OTHER INFORMATION REQUESTED BY THE CUSTOMER

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China
Tel: +86-755-28230888 Fax: +86-755-28230886 E-mail: info@uttlab.com <http://www.uttlab.com>
UTTR-RF-RSS247-V1.0

None.

1.11 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

No.	Item	Measurement Uncertainty
1	Conducted emission 9KHz-150KHz	±3.8 dB
2	Conducted emission 150KHz-30MHz	±3.4 dB
3	Radiated emission 9KHz-30MHz	±4.9 dB
4	Radiated emission 30MHz-1GHz	±4.7 dB
5	Radiated emission 1GHz-18GHz	±5.1 dB
6	Radiated emission 18GHz-26GHz	±5.2 dB
7	Radiated emission 26GHz-40GHz	±5.2 dB

2. TEST SUMMARY

FCC 47 CFR Part 15 Subpart C Test Cases			
Test Item	Test Requirement	Test Method	Result
Antenna Requirement	FCC 47 CFR Part 15 Subpart C Section 15.203/15.247 (c) RSS-Gen Issue 5, Section 6.8	N/A	PASS
AC Power Line Conducted Emission	FCC 47 CFR Part 15 Subpart C Section 15.207 RSS-Gen Issue 5, Section 8.8	ANSI C63.10-2013 Clause 6.2	PASS
Conducted Peak Output Power	FCC 47 CFR Part 15 Subpart C Section 15.247 (b)(3) RSS-247 Issue 2, Section 5.4(d)	ANSI C63.10-2013 Clause 11.9.1.3	PASS
6dB Bandwidth	FCC 47 CFR Part 15 Subpart C Section 15.247 (a)(2) RSS-247 Issue 2, Section 5.2(a)	ANSI C63.10-2013 Clause 11.8.1	PASS
Occupied Bandwidth	RSS-Gen Issue 5, Section 6.7	RSS-Gen Issue 5, Section 6.7	PASS
Power Spectral Density	FCC 47 CFR Part 15 Subpart C Section 15.247 (e) RSS-247 Issue 2, Section 5.2(b)	ANSI C63.10-2013 Clause 11.10.2	PASS
Conducted Out of Band Emission	FCC 47 CFR Part 15 Subpart C Section 15.247(d) RSS-247 Issue 2, Section 5.5	ANSI C63.10-2013 Clause 11.11	PASS
Radiated Spurious Emissions	FCC 47 CFR Part 15 Subpart C Section 15.205/15.209 RSS-Gen Issue 5, Section 6.13/8.9/8.10	ANSI C63.10-2013 Clause 11.11 & Clause 11.12	PASS
Band Edge Measurements (Radiated)	FCC 47 CFR Part 15 Subpart C Section 15.205/15.209 RSS-247 Issue 2, Section 5.5	ANSI C63.10-2013 Clause 11.13	PASS

3. EQUIPMENT LIST

Radiated Emission Test Equipment List						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm dd, yyyy)	Cal. Due date (mm dd, yyyy)
☒	3M Chamber & Accessory Equipment	ETS-LINDGREN	3M	N/A	Dec. 03, 2018	Dec. 03, 2021
☒	Receiver	R&S	ESIB26	100114	Nov. 24, 2019	Nov. 23, 2020
☒	EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY51440197	Nov. 24, 2019	Nov. 23, 2020
☒	Loop Antenna	ETS-LINDGREN	6502	00202525	Nov. 16, 2019	Nov. 15, 2020
☒	Broadband Antenna	ETS-LINDGREN	3142E	00201566	Nov. 16, 2019	Nov. 15, 2020
☒	6dB Attenuator	Talent	RA6A5-N-18	18103001	Nov. 16, 2019	Nov. 15, 2020
☒	Preamplifier	HP	8447F	2805A02960	Nov. 24, 2019	Nov. 23, 2020
☐	Broadband Antenna (Pre-amplifier)	ETS-LINDGREN	3142E-PA	00201891	Nov. 24, 2019	Nov. 23, 2020
☐	6dB Attenuator	Talent	RA6A5-N-18	18103002	Nov. 24, 2019	Nov. 23, 2020
☐	Horn Antenna	ETS-LINDGREN	3117	00164202	Nov. 16, 2019	Nov. 15, 2020
☒	Horn Antenna (Pre-amplifier)	ETS-LINDGREN	3117-PA	00201874	May 18, 2019	May 18, 2020
☐	Horn Antenna	ETS-LINDGREN	3116C	00200180	Jun. 23, 2019	Jun. 23, 2020
☒	Horn Antenna (Pre-amplifier)	ETS-LINDGREN	3116C-PA	00202652	Nov. 16, 2019	Nov. 15, 2020
☒	Multi device Controller	ETS-LINDGREN	7006-001	00160105	N/A	N/A
☒	Test Software	Audix	e3	Software Version: 9.160323		

Conducted Emission Test Equipment List						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm dd, yyyy)	Cal. Due date (mm dd, yyyy)
☒	Receiver	R&S	ESR7	1316.3003K07-101181-K3	Nov. 24, 2019	Nov. 23, 2020
☒	Pulse Limiter	R&S	ESH3-Z2	0357.8810.54	Nov. 24, 2019	Nov. 23, 2020
☒	LISN	R&S	ESH2-Z5	860014/024	Nov. 24, 2019	Nov. 23, 2020
☐	LISN	ETS-Lindgren	3816/2SH	00201088	Nov. 24, 2019	Nov. 23, 2020
☒	Test Software	Audix	e3	Software Version: 9.160323		

Conducted RF test Equipment List						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm dd, yyyy)	Cal. Due date (mm dd, yyyy)
☒	EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY51440197	Nov. 24, 2019	Nov. 23, 2020
☒	USB Wideband Power Sensor	KEYSIGHT	U2021XA	MY55430035	Nov. 24, 2019	Nov. 23, 2020
☐	USB Wideband Power Sensor	KEYSIGHT	U2021XA	MY55430023	Nov. 24, 2019	Nov. 23, 2020
☒	MXG X-Series RF Vector Signal Generator	KEYSIGHT	N5182B	MY51350267	Nov. 24, 2019	Nov. 23, 2020

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-RSS247-V1.0

4. TEST CONFIGURATION

4.1 ENVIRONMENTAL CONDITIONS FOR TESTING

4.1.1 Normal or Extreme Test Conditions

Environment Parameter	Selected Values During Tests		
Test Condition	Ambient		
	Temperature (°C)	Voltage (V)	Relative Humidity (%)
NT/NV	+15 to +35	3.3	20 to 75
Remark: 1) NV: Normal Voltage; NT: Normal Temperature			

4.1.2 Record of Normal Environment

Test Item	Temperature (°C)	Relative Humidity (%)	Pressure (kPa)	Tested by
AC Power Line Conducted Emission	23.6	49	100.42	Bert Xiong
Conducted Peak Output Power	24.3	51	99.80	Swift Liu
6dB Bandwidth & Occupied Bandwidth	24.3	51	99.80	Swift Liu
Power Spectral Density	24.3	51	99.80	Swift Liu
Conducted Out of Band Emission	24.3	51	99.80	Swift Liu
Radiated Spurious Emissions	26.8	55	100.40	Asia Yan
Band Edge Measurements (Radiated)	26.8	55	100.40	Asia Yan

4.2 TEST CHANNELS

Mode	Tx/Rx Frequency	Test RF Channel Lists		
		Lowest(L)	Middle(M)	Highest(H)
IEEE 802.11b	2412 MHz to 2462 MHz	Channel 1	Channel 7	Channel 11
		2412 MHz	2437 MHz	2462 MHz
IEEE 802.11g	2412 MHz to 2462 MHz	Channel 1	Channel 7	Channel 11
		2412 MHz	2437 MHz	2462 MHz
IEEE 802.11n-HT20	2412 MHz to 2462 MHz	Channel 1	Channel 7	Channel 11
		2412 MHz	2437 MHz	2462 MHz
IEEE 802.11n-HT40	2422 MHz to 2452 MHz	Channel 3	Channel 7	Channel 9
		2422 MHz	2437 MHz	2452 MHz

4.3 EUT TEST STATUS

Mode	Tx Function	Description
IEEE 802.11b IEEE 802.11g IEEE 802.11n-HT20 IEEE 802.11n-HT40	1Tx	1. Keep the EUT in continuously transmitting with modulation test single.

Power Setting	
Mode	Channel 1 -11
IEEE 802.11b	40
IEEE 802.11g	40
IEEE 802.11n-HT20	30
IEEE 802.11n-HT40	28

Test Software
Test software name: REALTEK 11ac 8822 BU USB WLAN NIC Mass production kit

4.4 PRE-SCAN

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and data rate. Following data rate was (were) selected for the final test as listed below

Mode	Worst-case data rates
IEEE 802.11b	1 Mbps
IEEE 802.11g	6 Mbps
IEEE 802.11n-HT20	MCS0
IEEE 802.11n-HT40	MCS0

4.5 TEST SETUP

4.5.1 For Radiated Emissions test setup



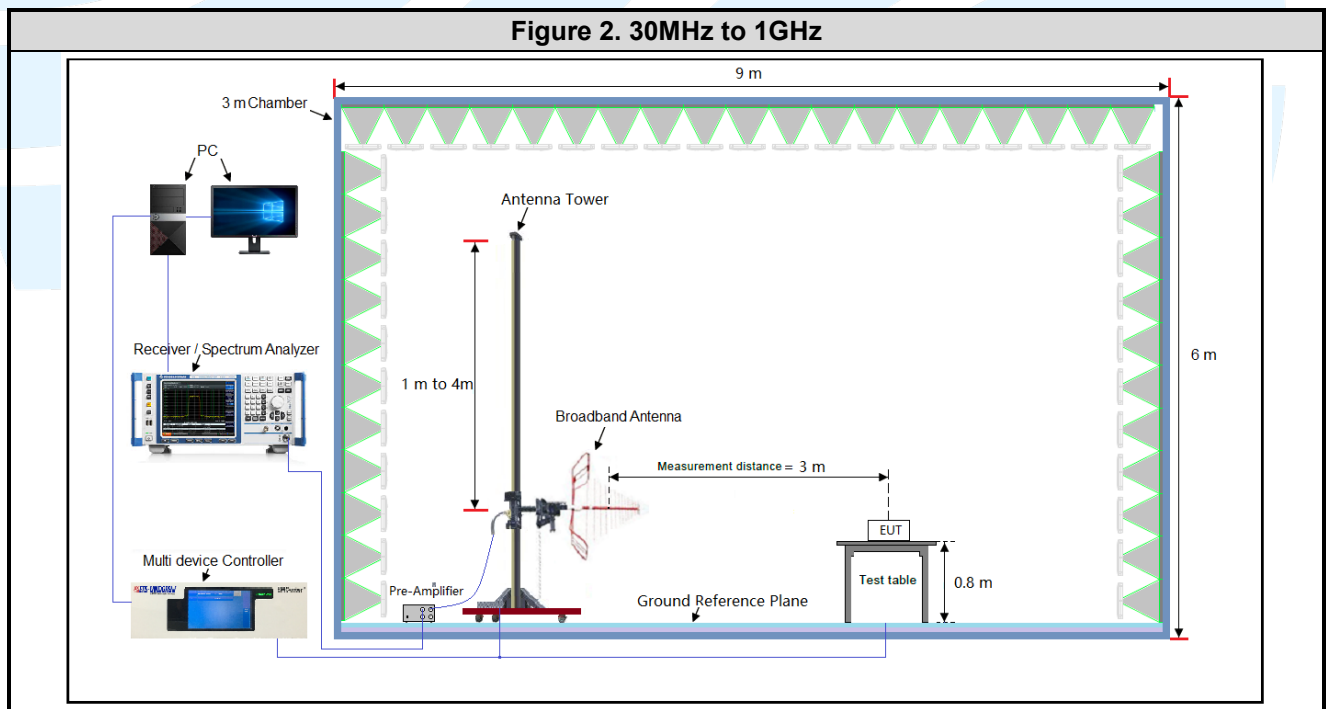


Figure 3. Above 1GHz

The diagram illustrates the setup for measurements above 1 GHz within a 3 m Chamber. The chamber dimensions are 9 m in width and 6 m in height. The Antenna Tower is adjustable, ranging from 1 m to 4 m in height. The measurement distance between the antenna and the EUT is 3 m. The EUT is placed on a Test table with a Turntable, which is 1.5 m high. The setup includes a Ground Reference Plane, a Pre-Amplifier, and a Horn Antenna. The Receiver / Spectrum Analyzer and Multi device Controller are connected to the system, with a PC also connected to the Receiver / Spectrum Analyzer.

The diagram illustrates the experimental setup within a Shielding Room. On the left, a PC and a Receiver are connected to a Pulse Limiter. A Ground Reference Plane is established. Two LISN (Line Impedance Stabilization Network) units, LISN 1 and LISN 2, are connected to the AC Mains. LISN 1 is connected to the Pulse Limiter and the Test table. LISN 2 is connected to the EUT/AE PSU. The Test table holds two EUT/AE units, each 10 cm apart. The EUT/AE units are 80 cm from the AC Mains. The Test table is 40 cm high, and the insulation is ≤ 0.15 m. The entire setup is enclosed in a Shielding Room.

4.5.3 For Conducted RF test setup

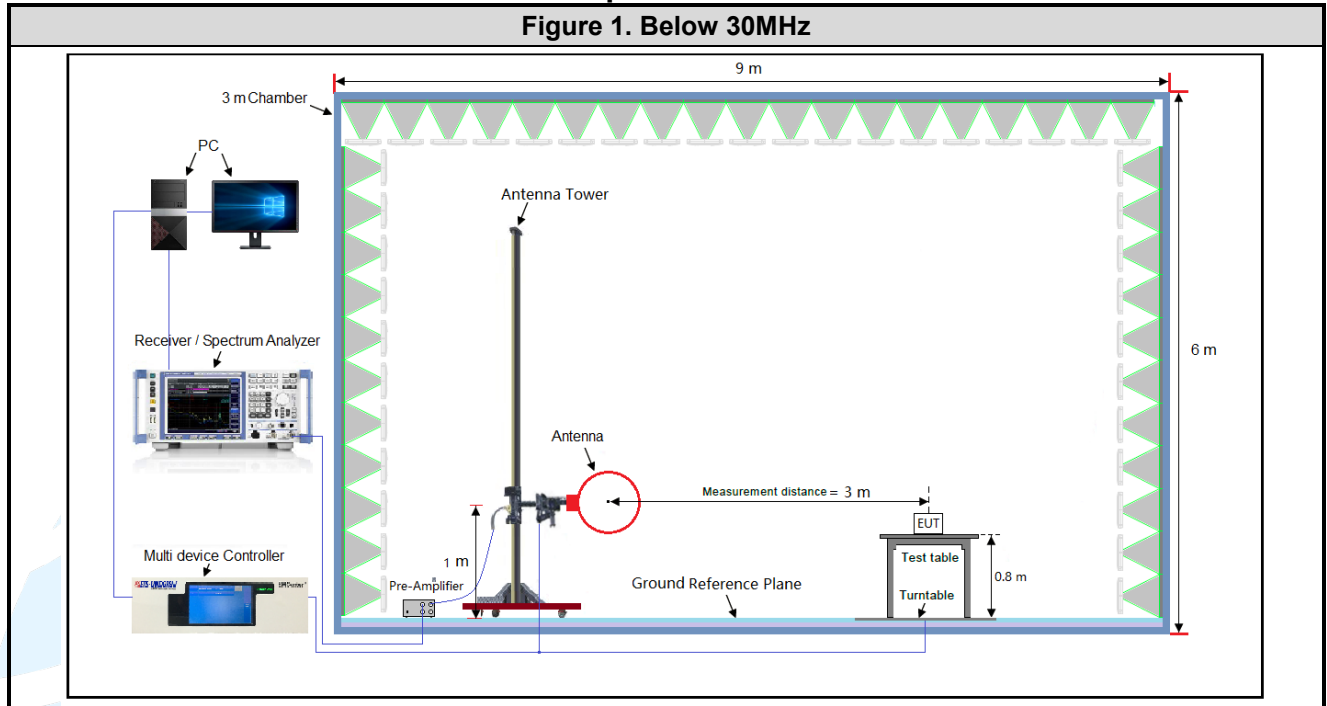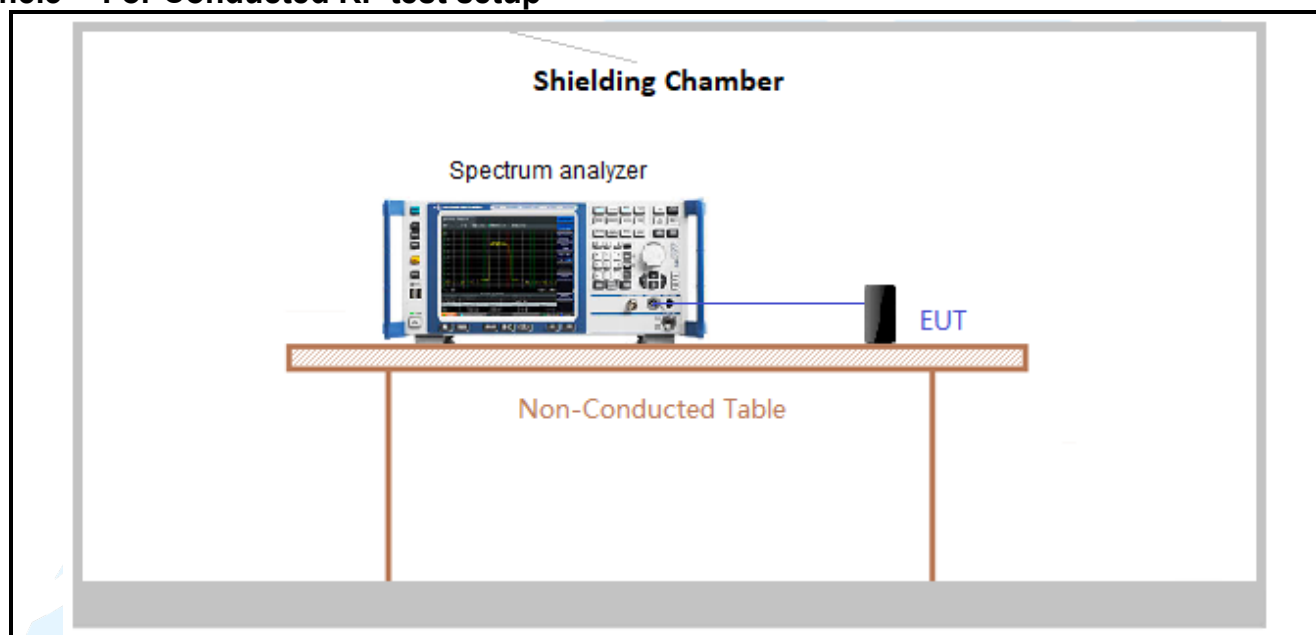

4.6 SYSTEM TEST CONFIGURATION

For emissions testing, the equipment under test (EUT) setup to transmit continuously to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing. During testing, radiated emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario. Only the worst case data were recorded in this test report.

The signal is maximized through rotation and placement in the three orthogonal axes. The antenna height and polarization are varied during the search for maximum signal level. The antenna height is varied from 1 to 4 meters. Radiated emissions are taken at three meters unless the signal level is too low for measurement at that distance. If necessary, a pre-amplifier is used and/or the test is conducted at a closer distance. Therefore, all final radiated testing was performed with the EUT in (see table below) orientation.

Frequency	Mode	Antenna Port	Worst-case axis positioning
Above 1GHz	1TX	Chain 0	Z axis

All readings are extrapolated back to the equivalent three meter reading using inverse scaling with distance. Analyzer resolution is 100 kHz or greater for frequencies below 1000 MHz. The resolution is 1 MHz or greater for frequencies above 1000 MHz. The spurious emissions more than 20 dB below the permissible value are not reported.

Radiated emission measurement were performed from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

4.7 DUTY CYCLE

Test Procedure: ANSI C63.10-2013 Clause 11.6.


Test Results



Mode	Data rates (Mbps)	On Time (msec)	Period (msec)	Duty Cycle (linear)	Duty Cycle (%)	Duty Cycle Factor (dB)	1/ T Minimum VBW (kHz)	Average Factor (dB)
IEEE 802.11b	1	8.130	8.250	0.99	98.55	0.00	0.01	-0.13
IEEE 802.11g	6	1.340	1.410	0.95	95.04	0.22	0.75	-0.44
IEEE 802.11n-HT20	MCS0	1.255	1.320	0.95	95.08	0.22	0.80	-0.44
IEEE 802.11n-HT40	MCS0	0.625	0.685	0.91	91.24	0.40	1.60	-0.80

Remark:

- 1) Duty cycle= On Time/ Period;
- 2) Duty Cycle factor = $10 * \log(1/ \text{Duty cycle})$;
- 3) Average factor = $20 \log_{10} \text{Duty Cycle}$.

The test plots as follows

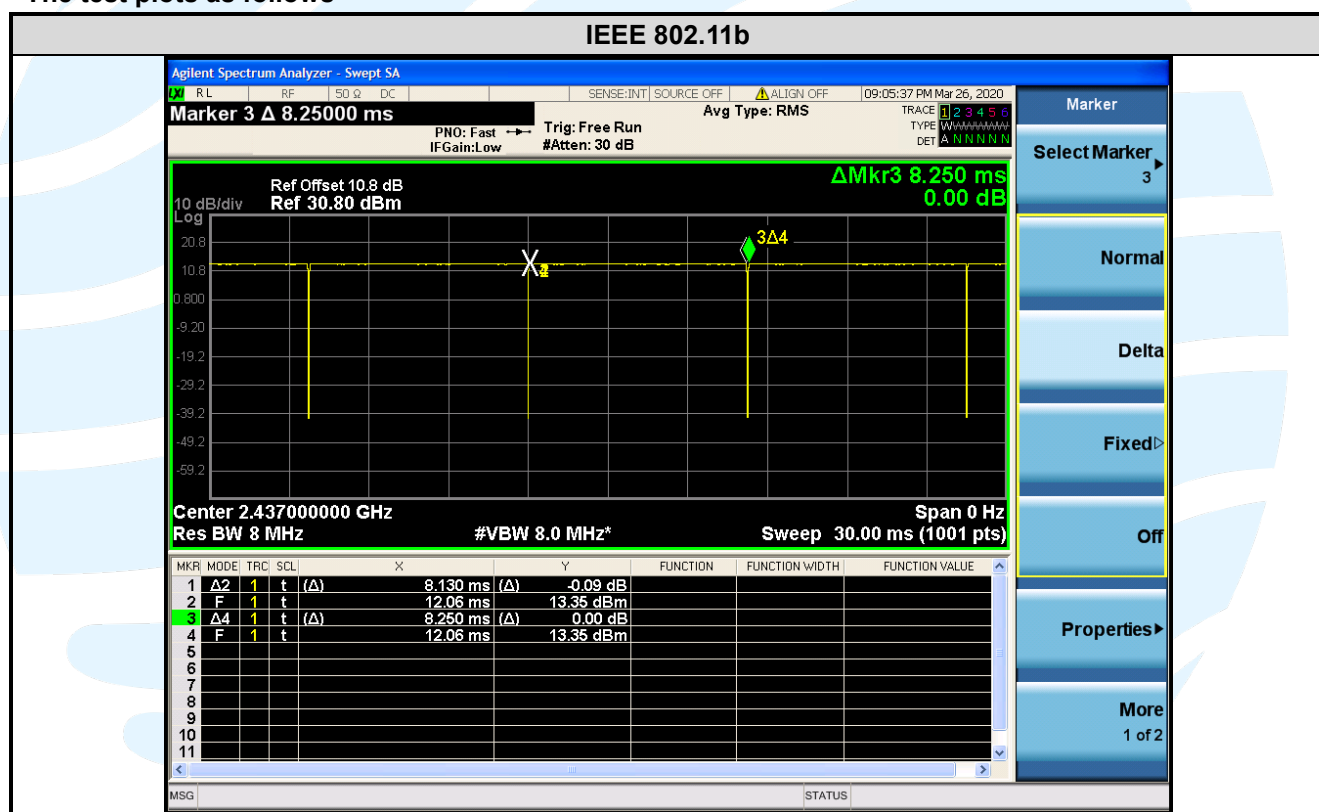

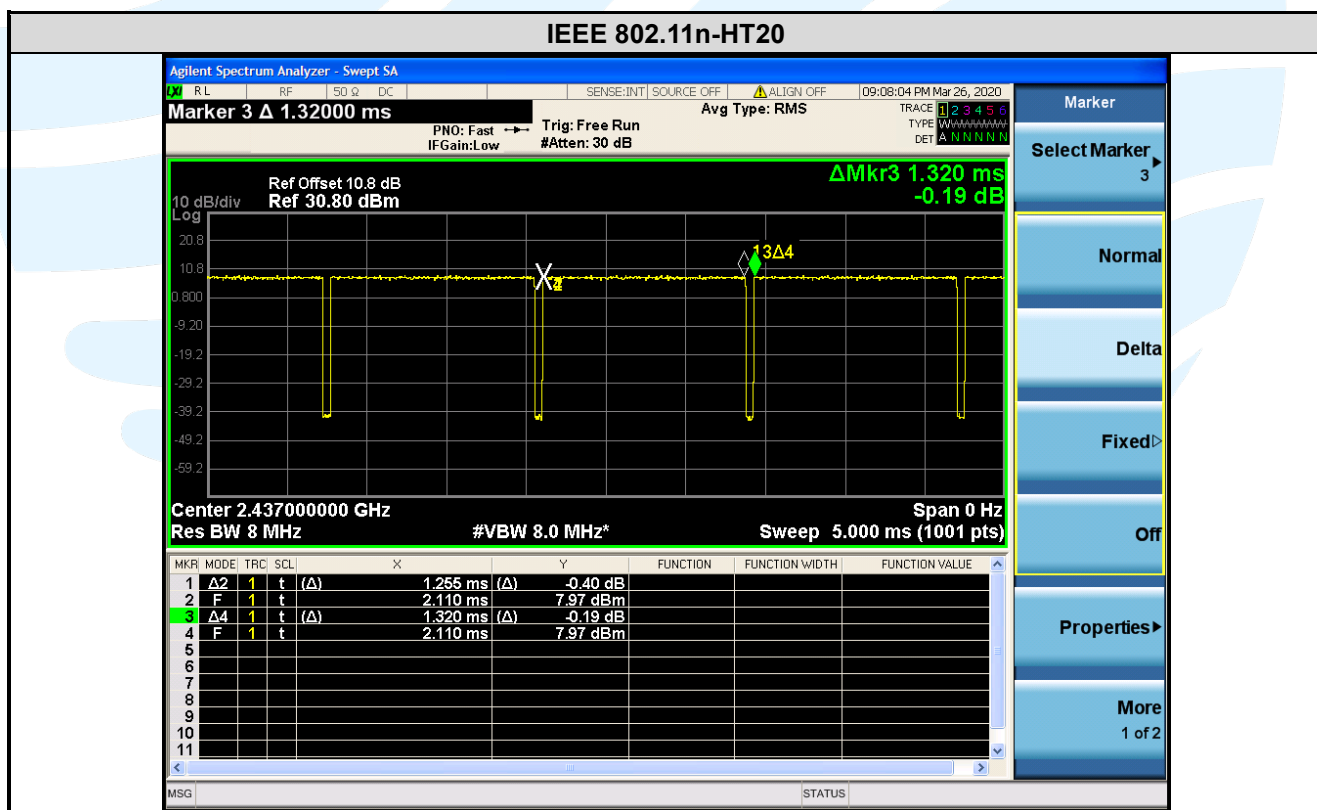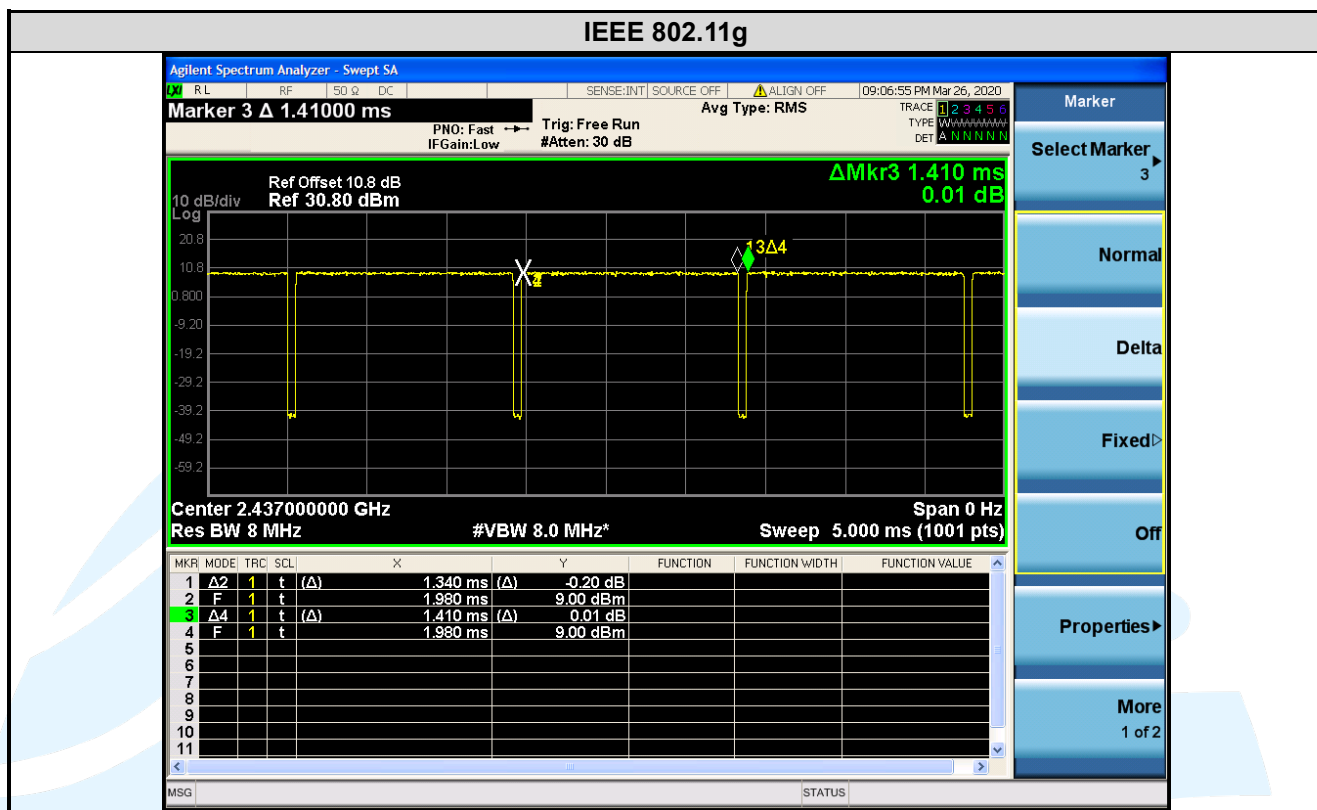



5. RADIO TECHNICAL REQUIREMENTS SPECIFICATION

5.1 REFERENCE DOCUMENTS FOR TESTING

No.	Identity	Document Title
1	FCC 47 CFR Part 2	Frequency allocations and radio treaty matters; general rules and regulations
2	FCC 47 CFR Part 15	Radio Frequency Devices
3	RSS-247 Issue 2	Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices
4	RSS-Gen Issue 5	General Requirements for Compliance of Radio Apparatus
5	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices
6	KDB 558074 D01 15.247 Meas Guidance v05r02	Guidance for compliance measurements on Digital Transmission Systems, Frequency Hopping Spread Spectrum system, and Hybrid system devices operating under Section 15.247 of the FCC rules

5.2 ANTENNA REQUIREMENT

Standard Requirement
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.247(b) (4) requirement: The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi. RSS-Gen Issue 5, Section 6.8 requirement: According to RSS-Gen Issue 5, Section 6.8, a transmitter can only be sold or operated with antennas with which it was certified. A transmitter may be certified with multiple antenna types. An antenna type comprises antennas having similar in-band and out-of-band radiation patterns. EUT Antenna: Antenna in the interior of the equipment and no consideration of replacement. The gain of the antenna is 3.05 dBi.

5.3 CONDUCTED PEAK OUTPUT POWER

- Test Requirement:** FCC 47 CFR Part 15 Subpart C Section 15.247 (b)(3)
RSS-247 Issue 2, Section 5.4(d)
- Test Method:** ANSI C63.10-2013 Clause 11.9.1.3
- Limit:** For systems using digital modulation in the 2400-2483.5 MHz bands: 1 Watt.
- Test Procedure:**
1. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power meter.
 2. Measure out each test modes' peak or average output power, record the power level.
- Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.
- Test Setup:** Refer to section 4.5.3 for details.
- Instruments Used:** Refer to section 3 for details
- Test Results:**

Mode	Channel/ Frequency (MHz)	Maximum Conducted Peak Power (dBm)	Maximum e.i.r.p (dBm)	Limit (dBm)	Pss / Fail
IEEE 802.11b	1(2412)	18.73	21.78	30	Pass
	6(2437)	18.11	21.16	30	Pass
	11(2462)	17.45	20.5	30	Pass
IEEE 802.11g	1(2412)	21.12	24.17	30	Pass
	6(2437)	20.78	23.83	30	Pass
	11(2462)	20.57	23.62	30	Pass
IEEE 802.11n-HT20	1(2412)	16.35	19.4	30	Pass
	6(2437)	16.08	19.13	30	Pass
	11(2462)	15.55	18.6	30	Pass
IEEE 802.11n-HT40	3(2422)	15.55	18.6	30	Pass
	6(2437)	15.42	18.47	30	Pass
	9(2452)	15.33	18.38	30	Pass

Note: The antenna gain of 3.05 dBi less than 6dBi maximum permission antenna gain value based on 1 watt (30dBm) peak output power limit.

5.46 DB BANDWIDTH & OCCUPIED BANDWIDTH

Test Requirement: FCC 47 CFR Part 15 Subpart C Section 15.247 (a)(2)
RSS-247 Issue 2, Section 5.2(a)
RSS-Gen Issue 5, Section 6.7

Test Method: ANSI C63.10-2013 Clause 11.8.1
RSS-Gen Issue 5, Section 6.7

Limit: For direct sequence systems, the minimum 6dB bandwidth shall be at least 500kHz

Test Procedure: Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
Use the following spectrum analyzer settings:

6dB Bandwidth

- Set RBW = 100 kHz.
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Allow the trace to stabilize.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Occupied Bandwidth

- Set RBW = 1% to 5% of the occupied bandwidth
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Allow the trace to stabilize.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

Test Setup: Refer to section 4.5.3 for details.


Instruments Used: Refer to section 3 for details

Test Results:

Mode	Channel/ Frequency (MHz)	6 dB Bandwidth (MHz)	99% Bandwidth (MHz)	6 dB Bandwidth Limit	Pass / Fail
IEEE 802.11b	1(2412)	9.122	13.613	> 500 kHz	Pass
	6(2437)	9.072	13.579	> 500 kHz	Pass
	11(2462)	9.108	13.603	> 500 kHz	Pass
IEEE 802.11g	1(2412)	16.34	16.701	> 500 kHz	Pass
	6(2437)	16.36	16.709	> 500 kHz	Pass
	11(2462)	16.35	16.710	> 500 kHz	Pass
IEEE 802.11n-HT20	1(2412)	17.07	17.732	> 500 kHz	Pass
	6(2437)	17.10	17.729	> 500 kHz	Pass
	11(2462)	17.08	17.7373	> 500 kHz	Pass
IEEE 802.11n-HT40	3(2422)	36.11	36.725	> 500 kHz	Pass
	6(2437)	36.12	36.716	> 500 kHz	Pass
	9(2452)	36.11	36.733	> 500 kHz	Pass

The test plots as follows:

6 dB Bandwidth

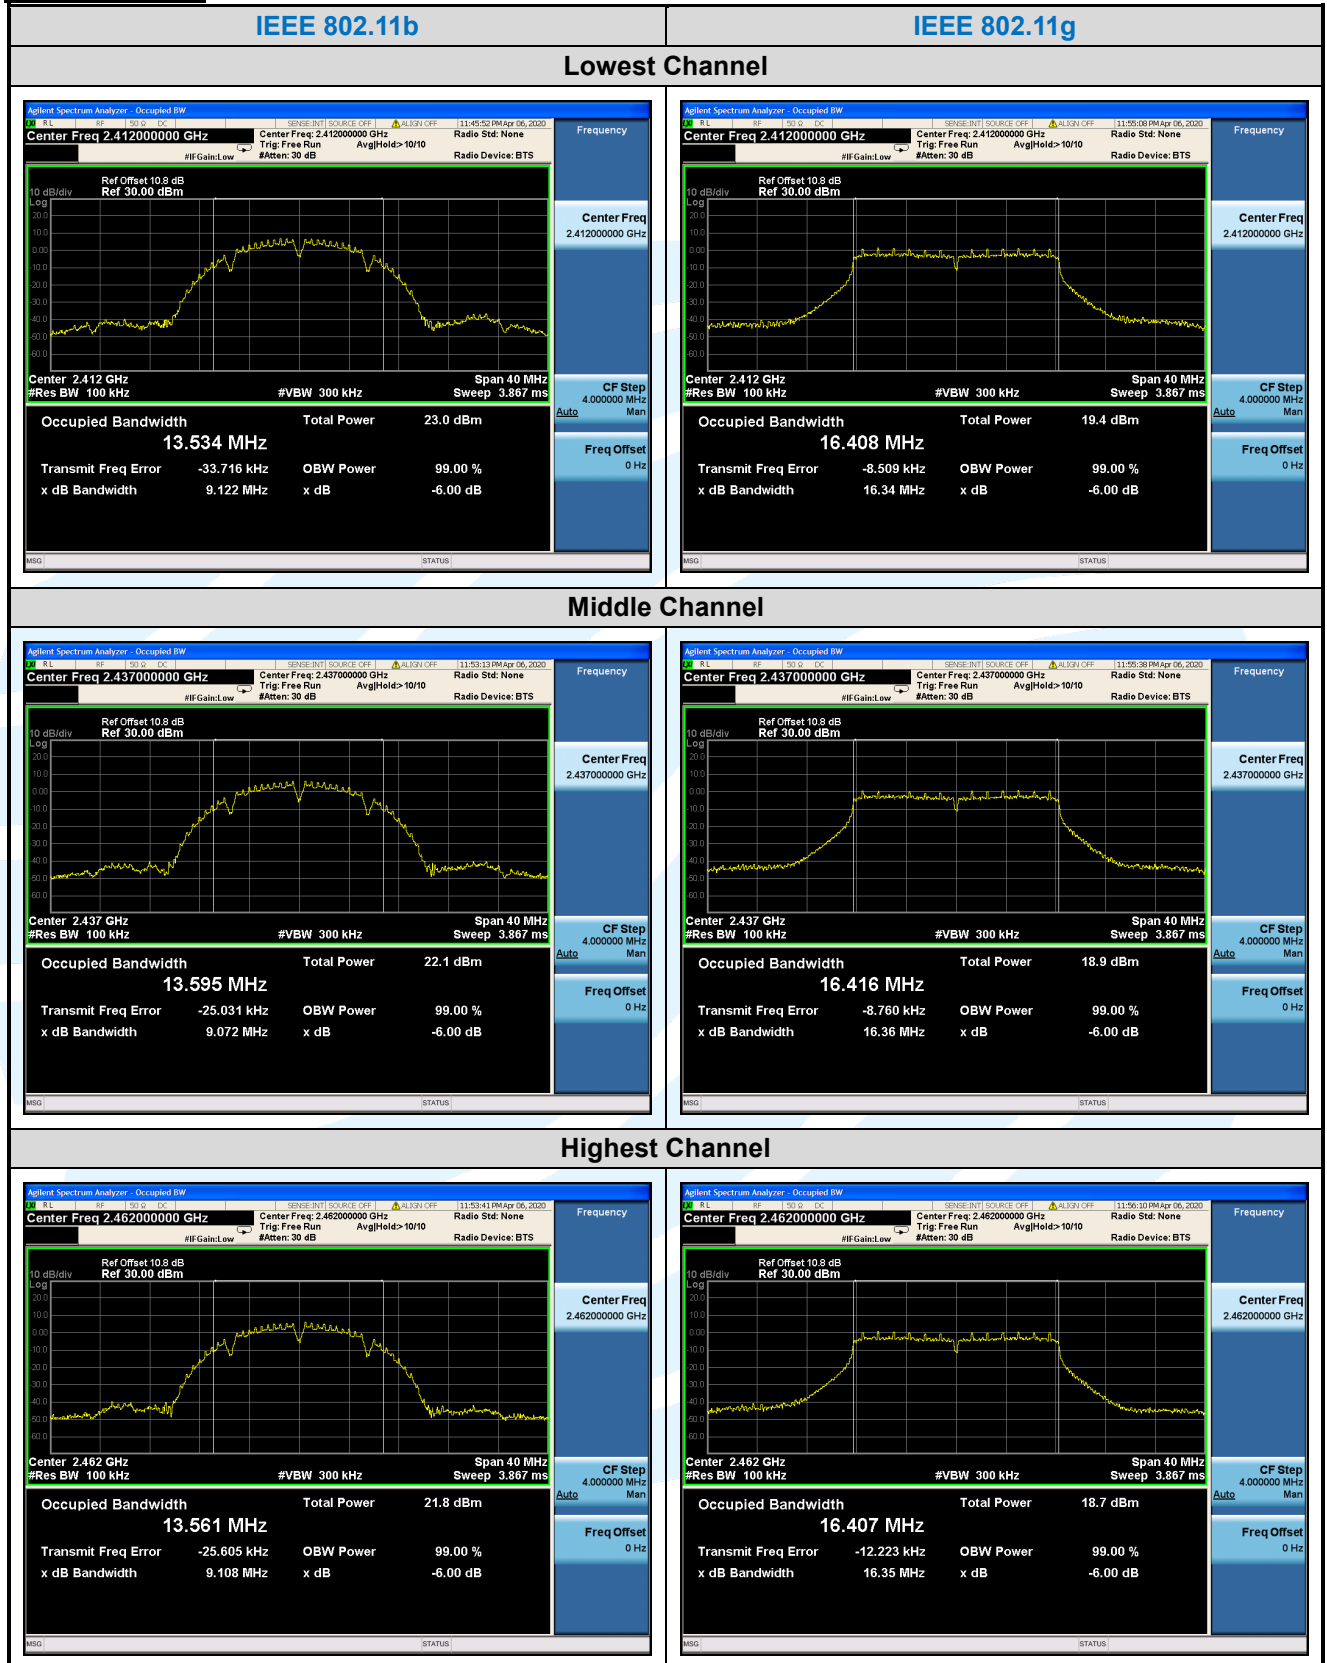

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886


E-mail: info@uttlab.com


<http://www.uttlab.com>

UTTR-RF-RSS247-V1.0

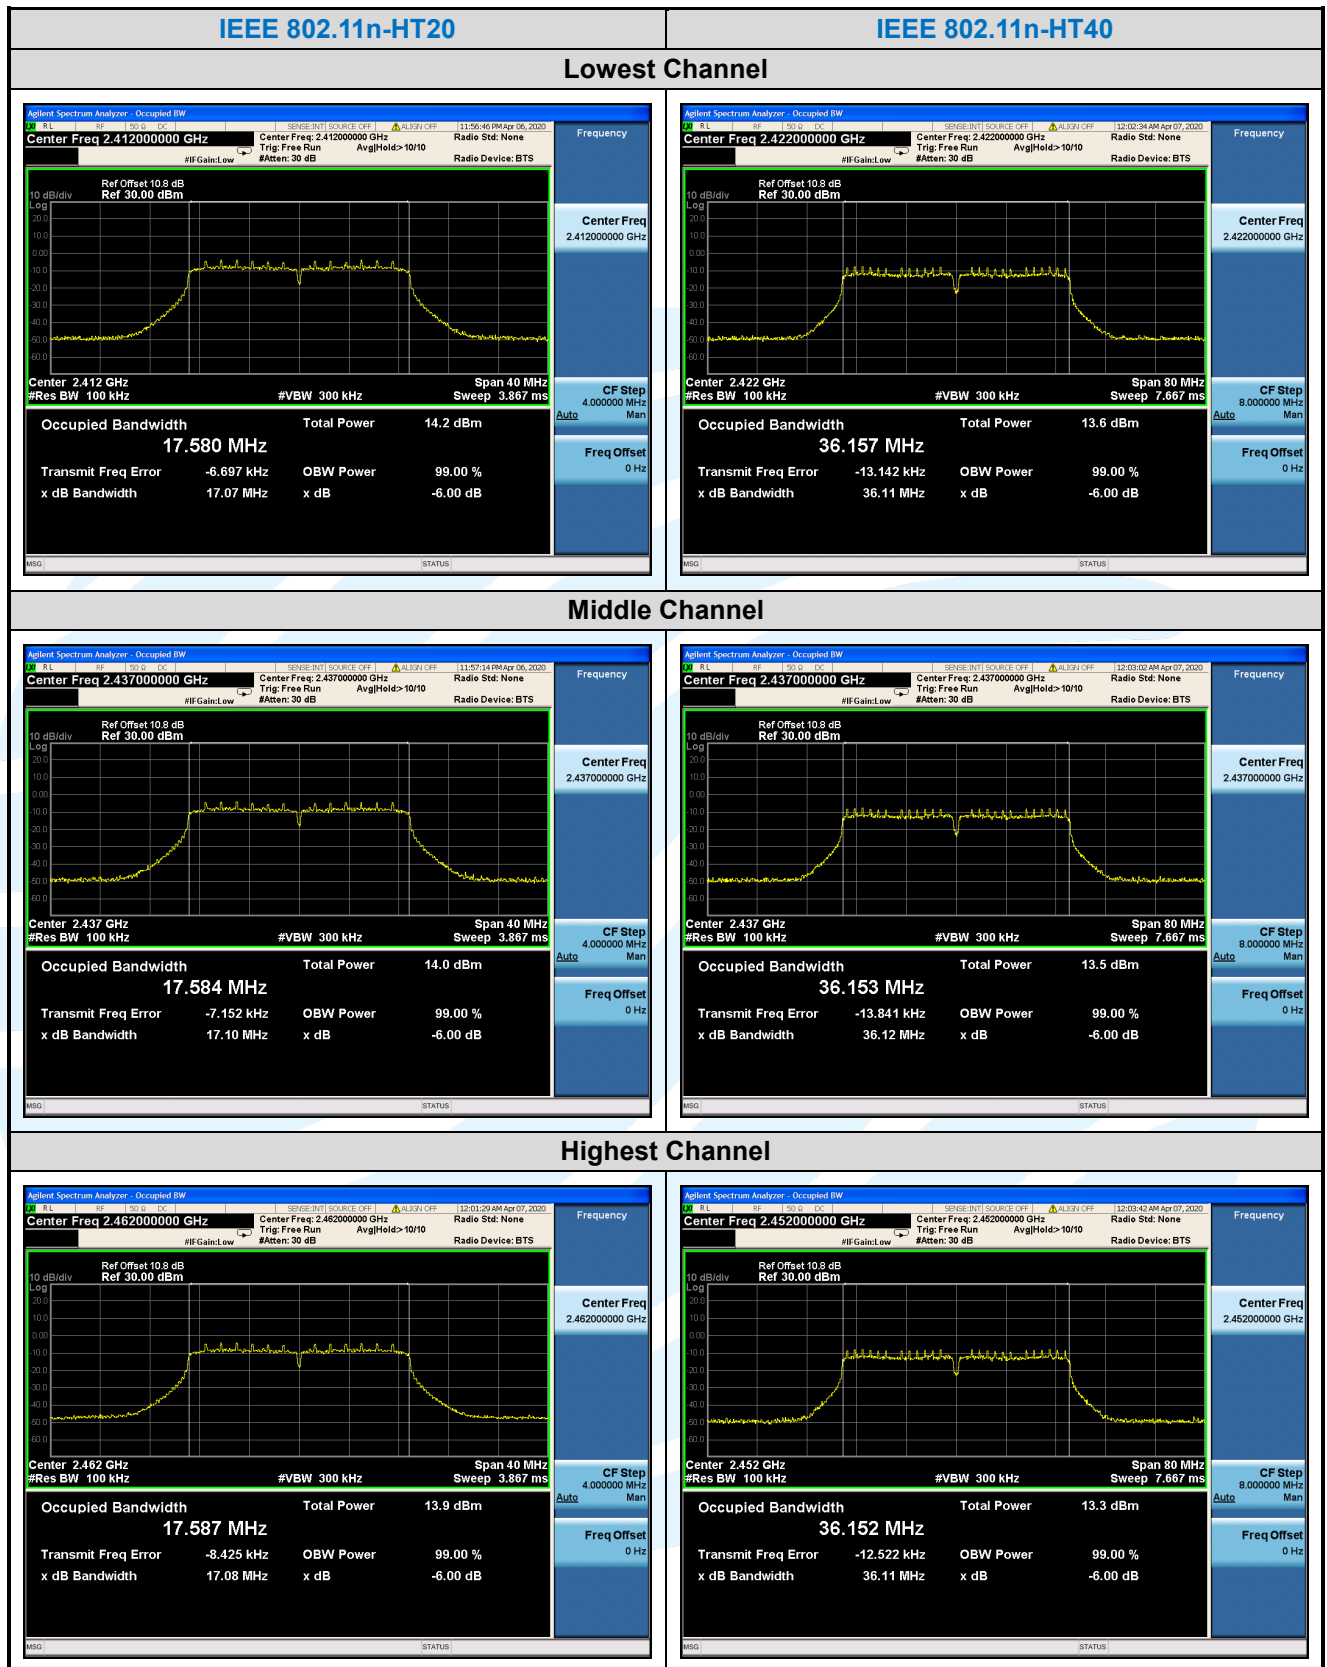

Occupied Bandwidth

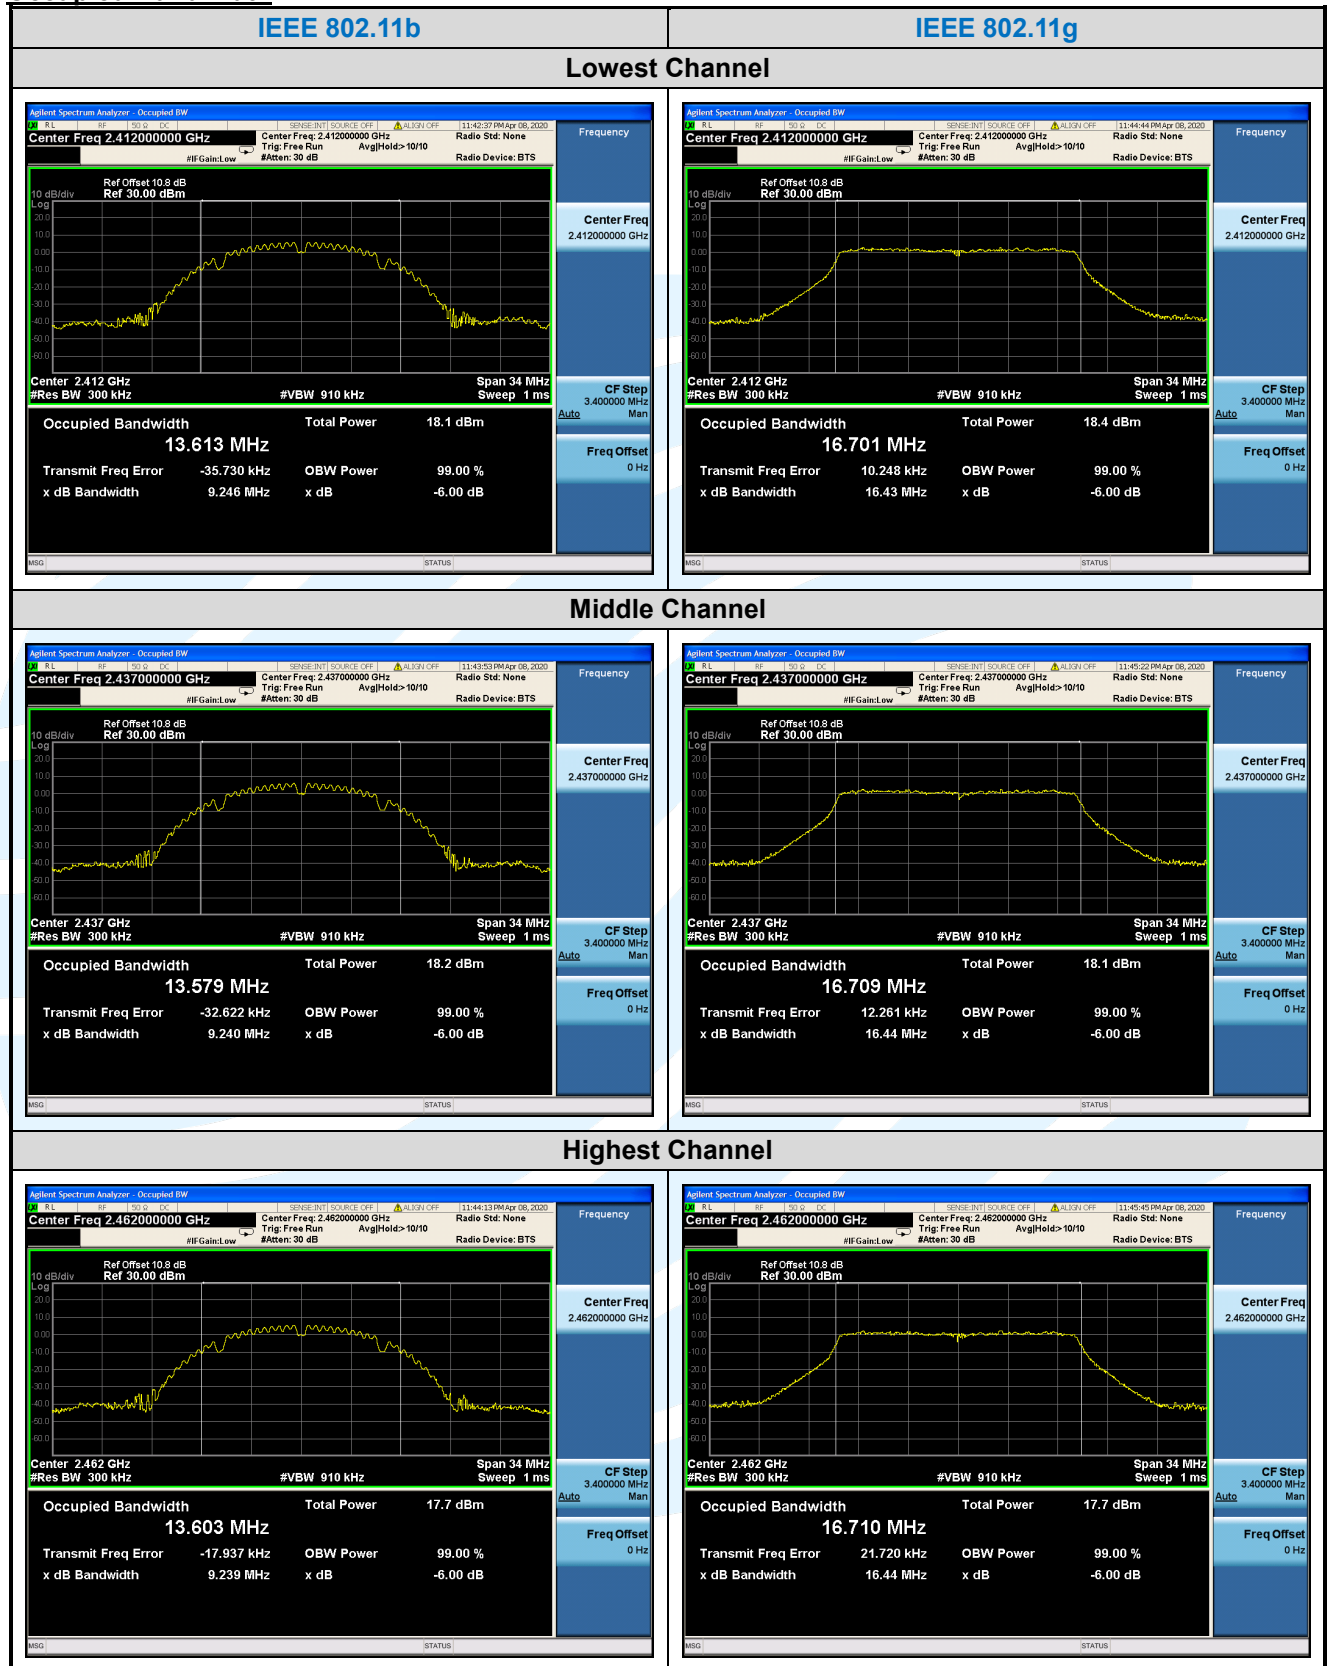

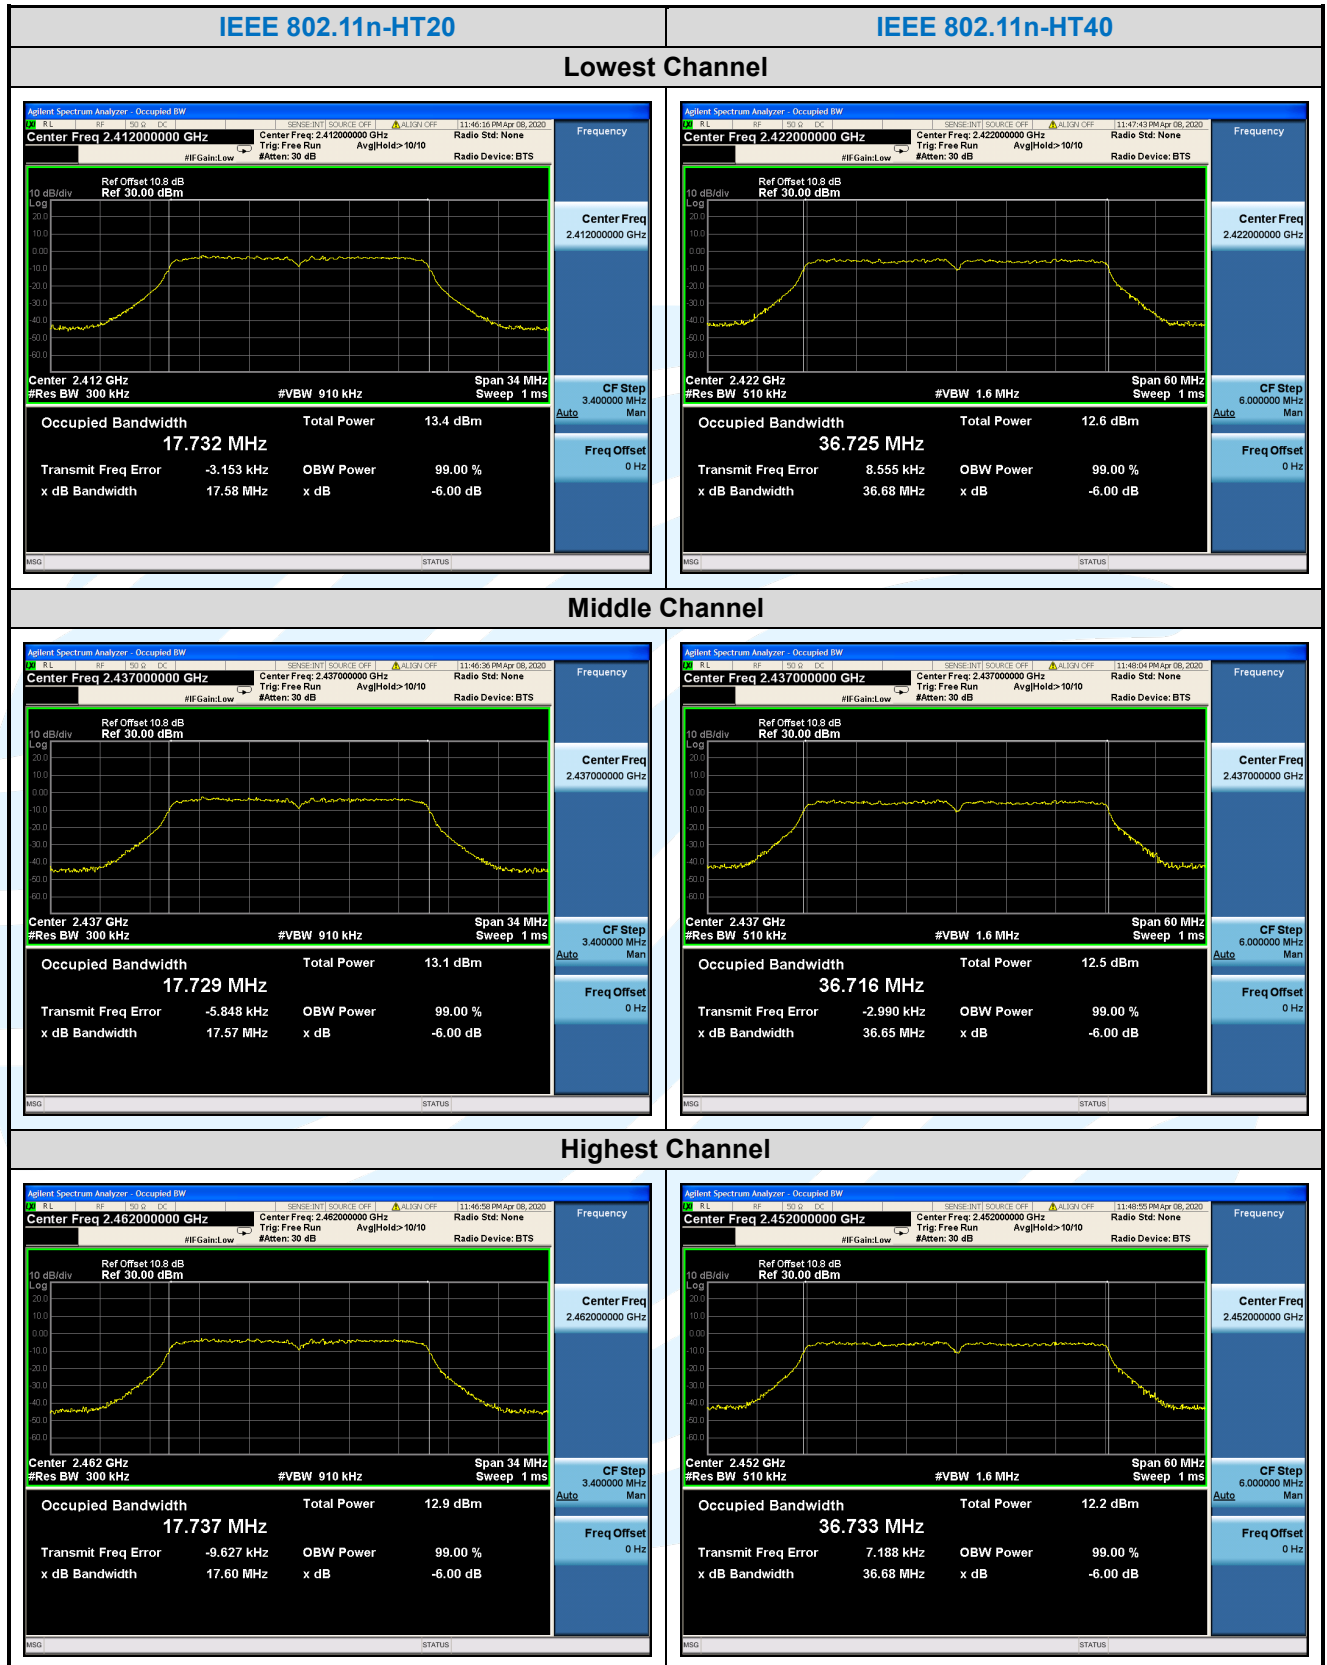


5.5 POWER SPECTRAL DENSITY

- Test Requirement:** FCC 47 CFR Part 15 Subpart C Section 15.247 (e)
RSS-247 Issue 2, Section 5.2(b)
- Test Method:** ANSI C63.10-2013 Clause 11.10.2
- Limit:** For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.
- Test Procedure:** Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
Use the following spectrum analyzer settings:
- Set analyzer center frequency to DTS channel center frequency.
 - Set the span to 1.5 times the DTS bandwidth.
 - Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
 - Set the VBW $\geq 3 \times \text{RBW}$.
 - Detector = peak.
 - Sweep time = auto couple.
 - Trace mode = max hold.
 - Allow trace to fully stabilize.
 - Use the peak marker function to determine the maximum amplitude level within the RBW.
 - If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.
- Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.
- Test Setup:** Refer to section 4.5.3 for details.
- Instruments Used:** Refer to section 3 for details
- Test Results:**

Mode	Channel/ Frequency (MHz)	PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)	Pass / Fail
IEEE 802.11b	1(2412)	-6.988	8	Pass
	6(2437)	-7.451	8	Pass
	11(2462)	-8.048	8	Pass
IEEE 802.11g	1(2412)	-12.767	8	Pass
	6(2437)	-13.116	8	Pass
	11(2462)	-13.475	8	Pass
IEEE 802.11n-HT20	1(2412)	-17.130	8	Pass
	6(2437)	-17.580	8	Pass
	11(2462)	-18.086	8	Pass
IEEE 802.11n-HT40	3(2422)	-22.173	8	Pass
	6(2437)	-22.270	8	Pass
	9(2452)	-15.484	8	Pass

The test plots as follows:

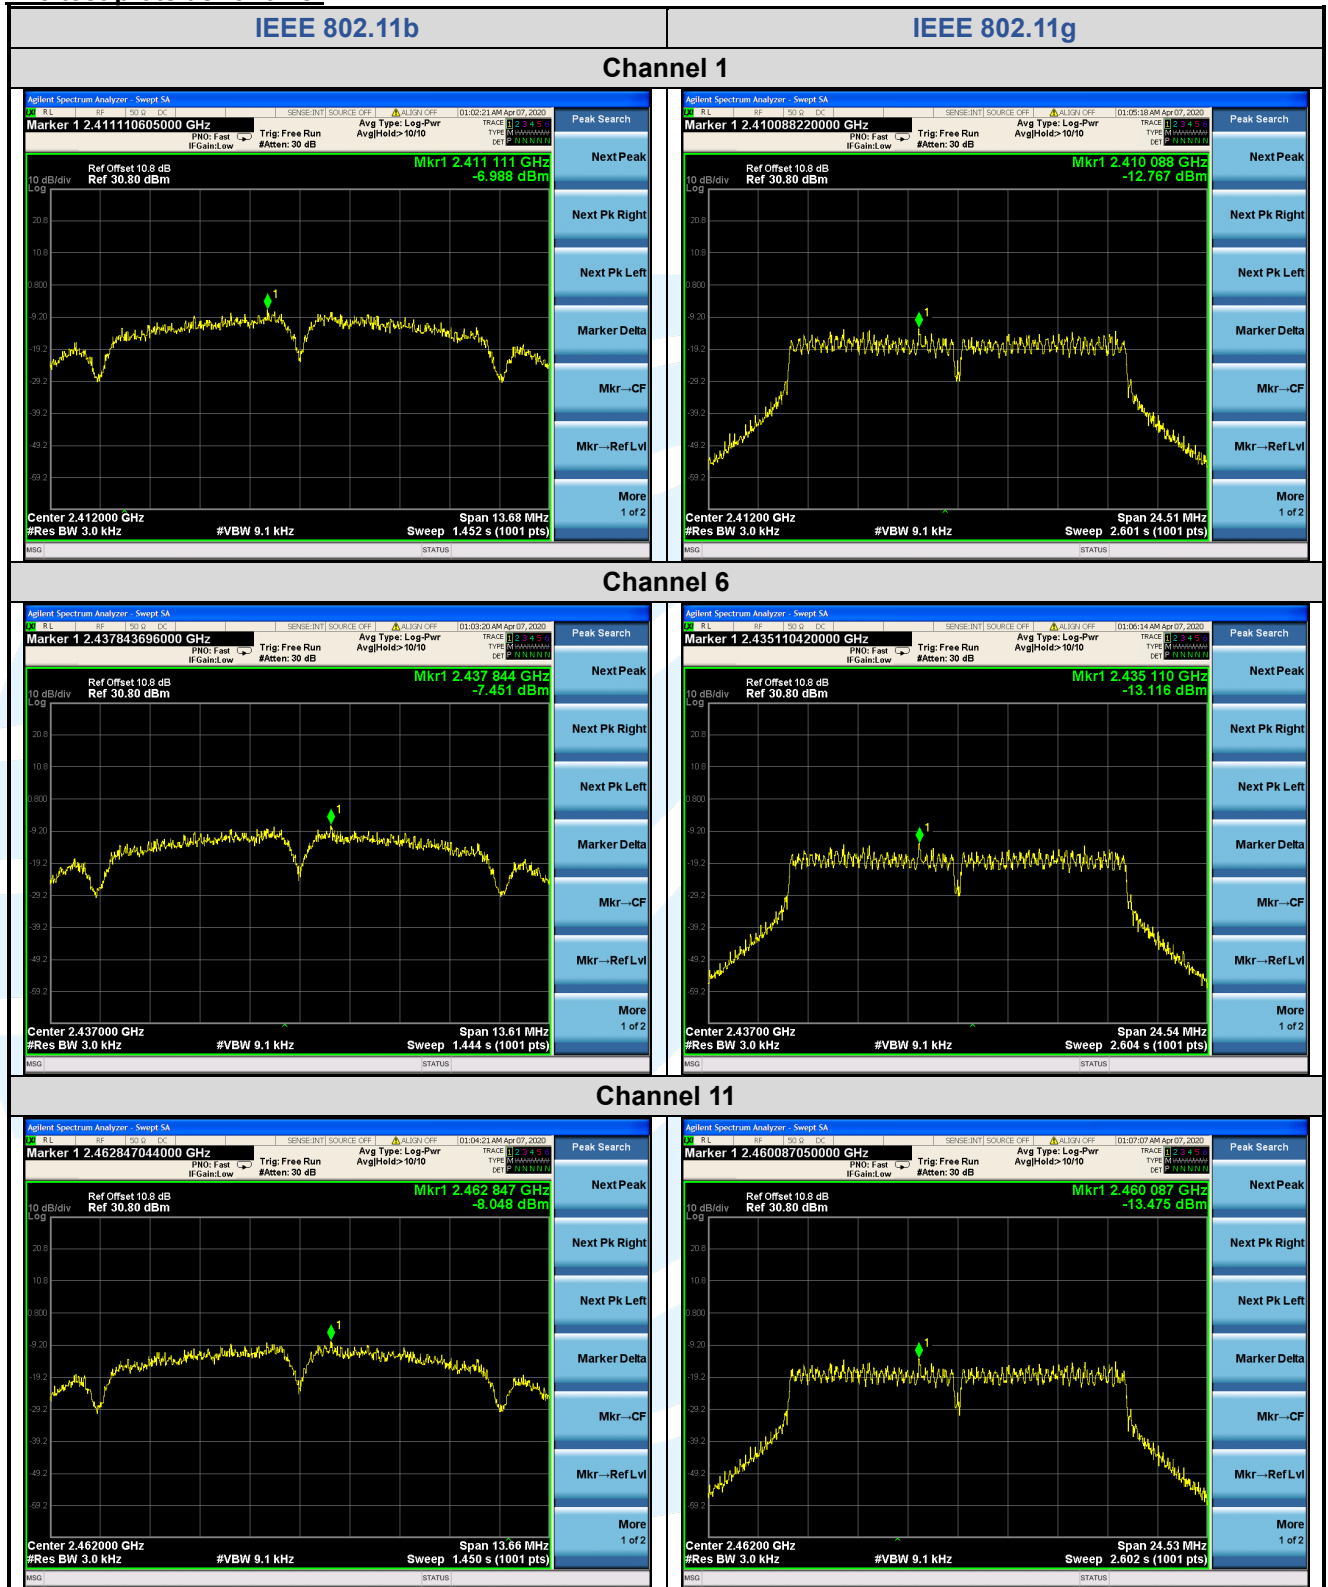

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>


UTTR-RF-RSS247-V1.0

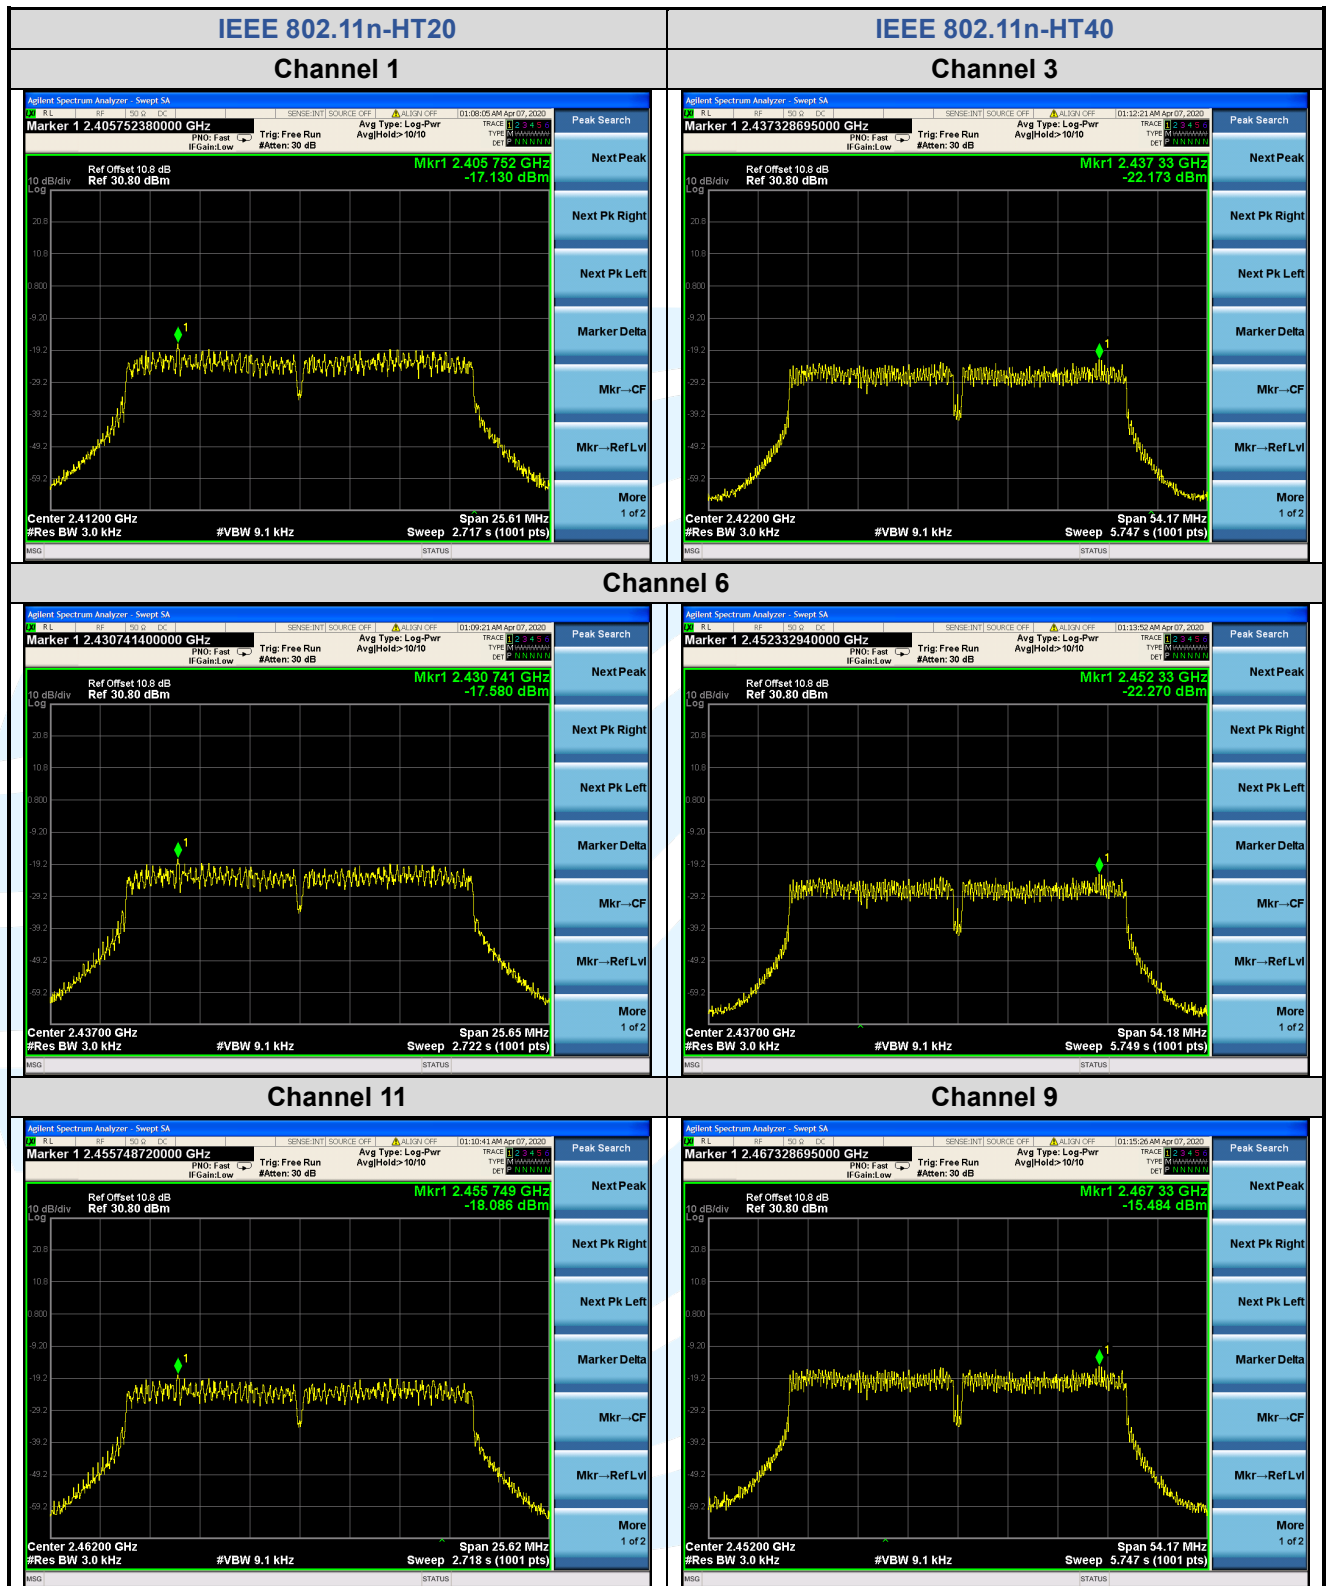



5.6 CONDUCTED OUT OF BAND EMISSION


Test Requirement:	FCC 47 CFR Part 15 Subpart C Section 15.247(d) RSS-247 Issue 2, Section 5.5
Test Method:	ANSI C63.10-2013 Clause 11.11
Limit:	In any 100kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.
Test Procedure:	Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer. Use the following spectrum analyzer settings: Step 1: Measurement Procedure REF - Set instrument center frequency to DTS channel center frequency. - Set the span to ≥ 1.5 times the DTS bandwidth. - Set the RBW = 100 kHz. - Set the VBW $\geq 3 \times$ RBW. - Detector = peak. - Sweep time = auto couple. - Trace mode = max hold. - Allow trace to fully stabilize. - Use the peak marker function to determine the maximum PSD level. - Note that the channel found to contain the maximum PSD level can be used to establish the reference level. Step 2: Measurement Procedure OOB - Set RBW = 100 kHz. - Set VBW ≥ 300 kHz. - Detector = peak. - Sweep = auto couple. - Trace Mode = max hold. - Allow trace to fully stabilize. - Use the peak marker function to determine the maximum amplitude level. Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.
Test Setup:	Refer to section 4.5.3 for details.
Instruments Used:	Refer to section 3 for details
Test Results:	Pass

The test plots as follows:

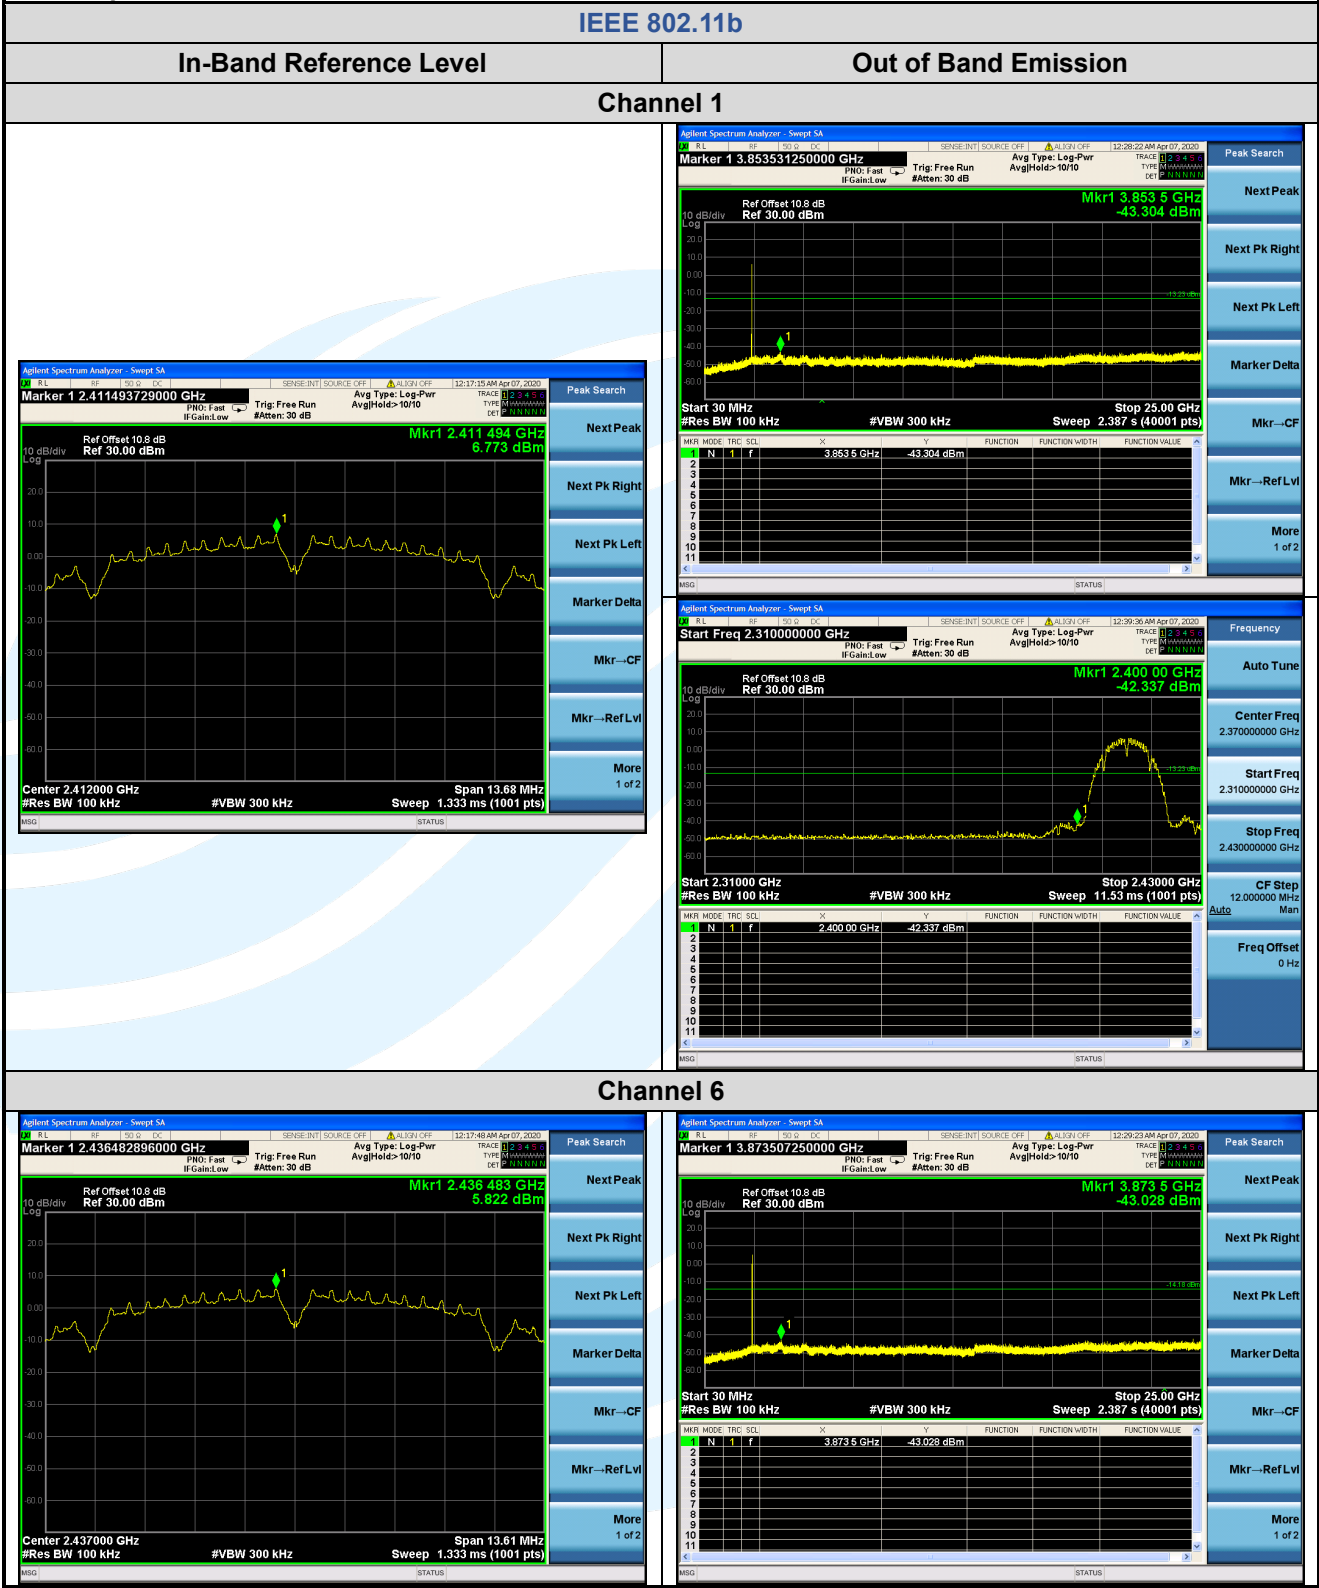

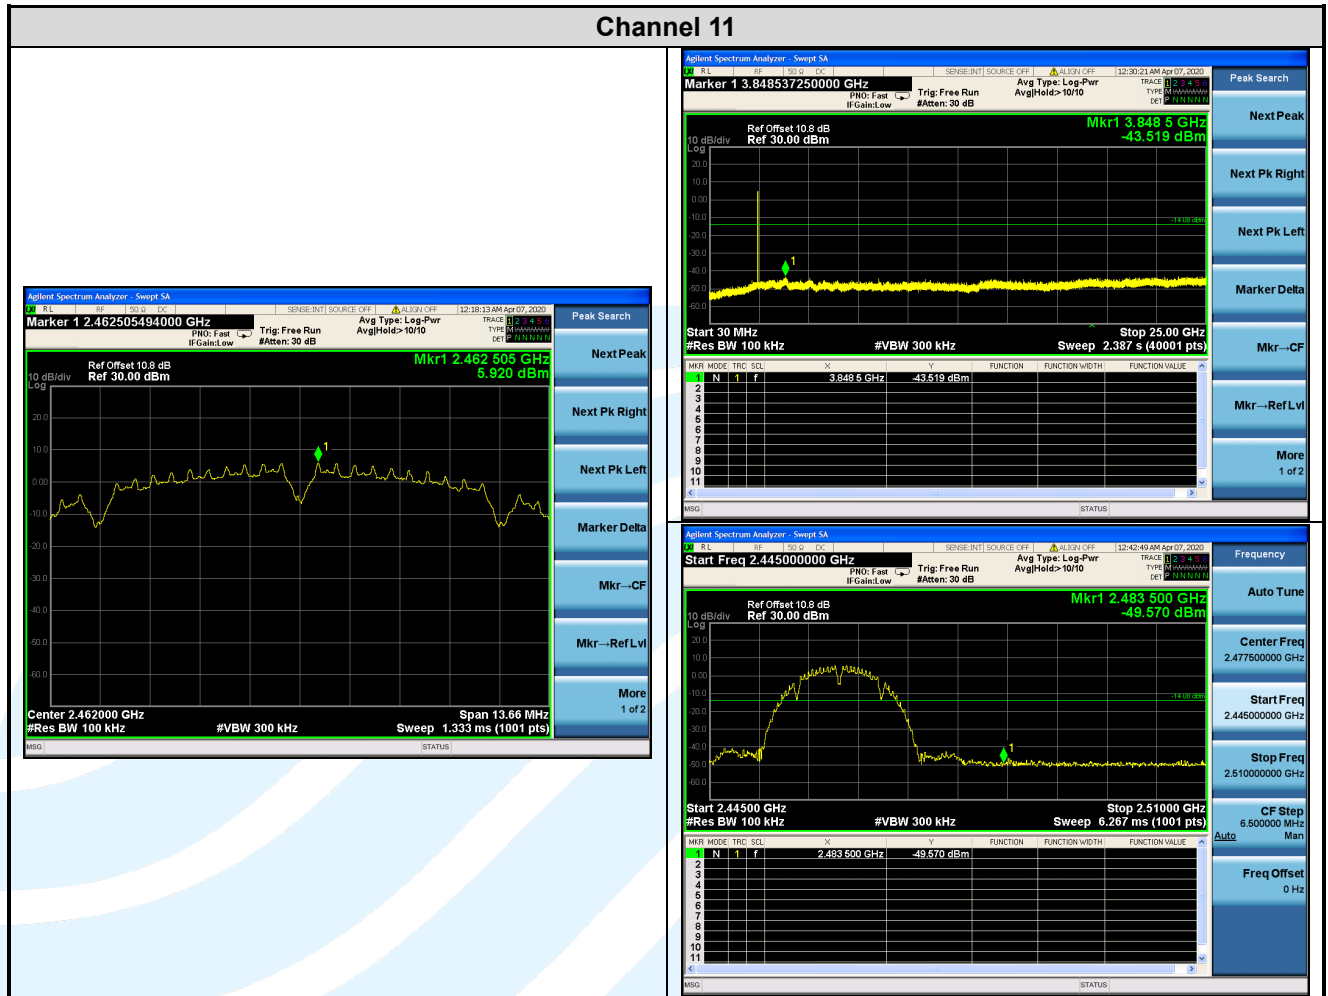

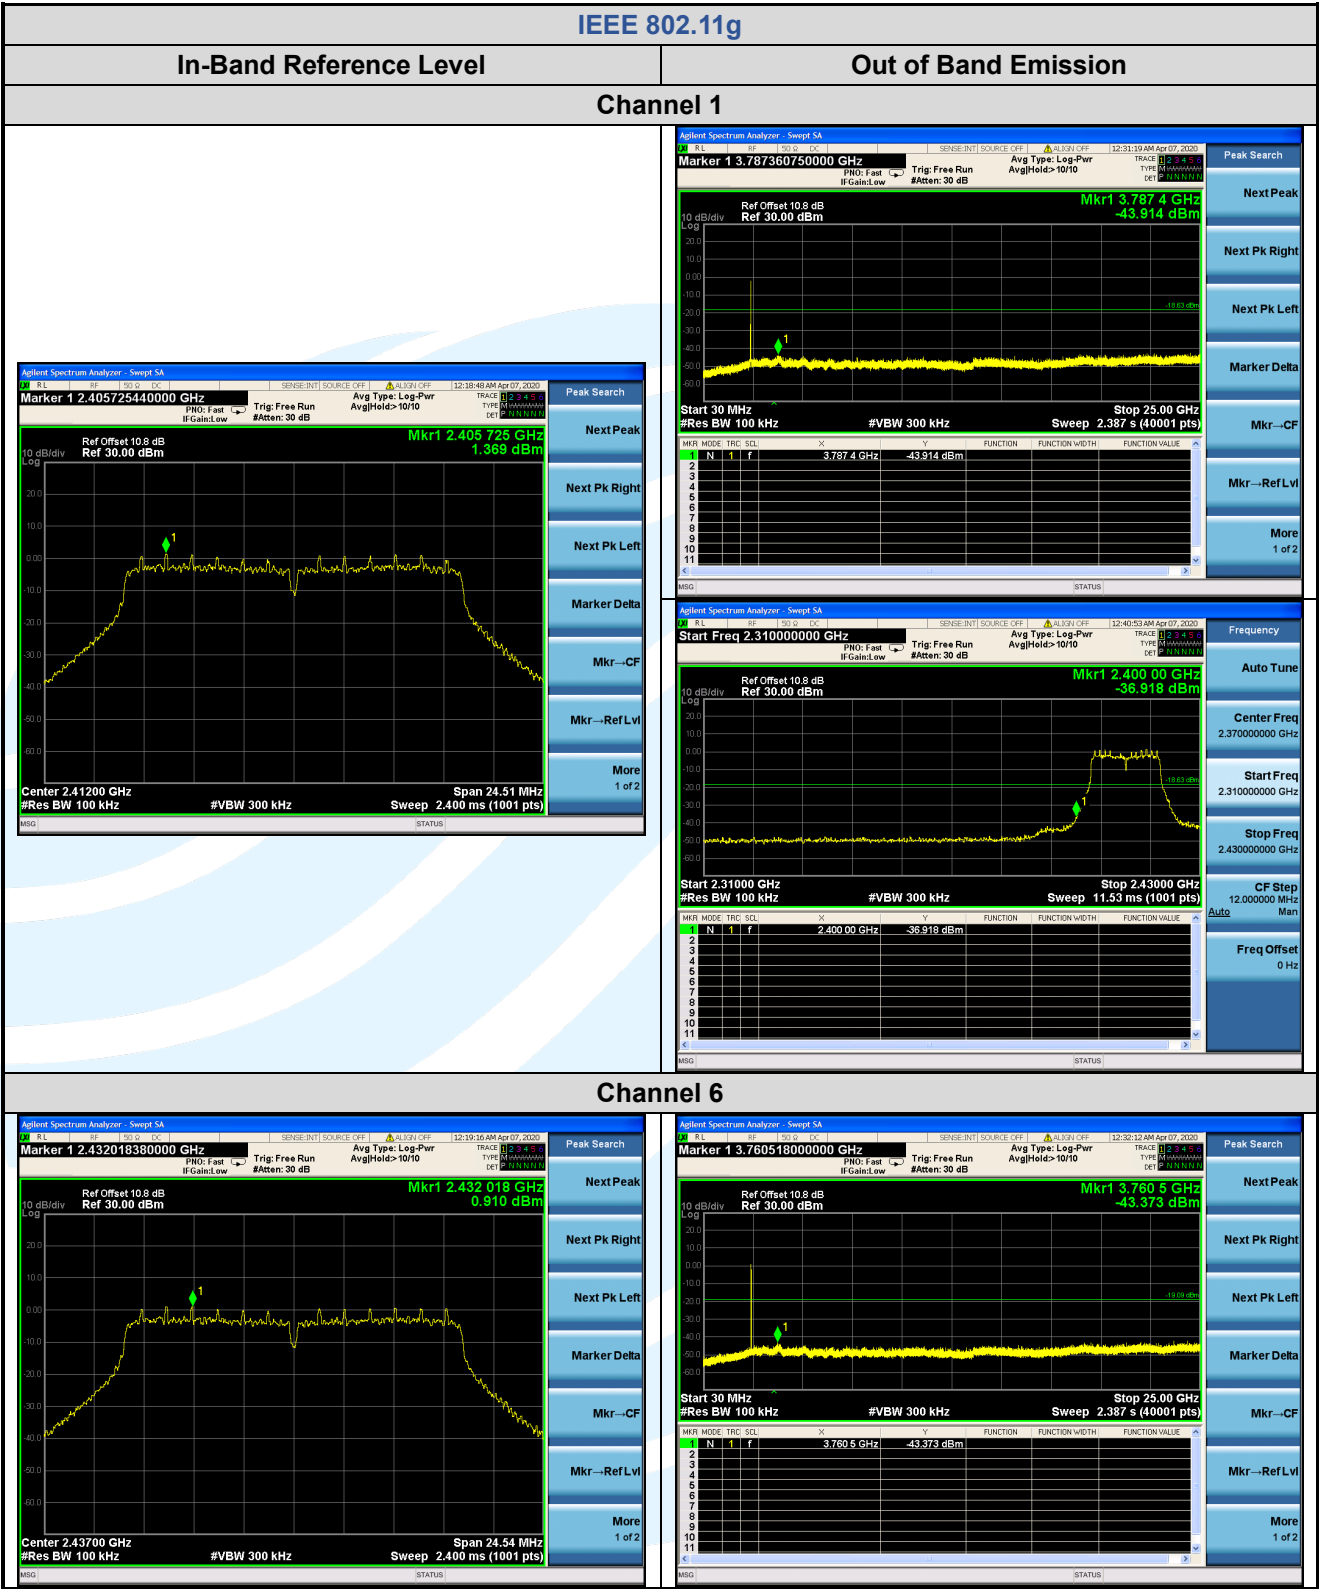

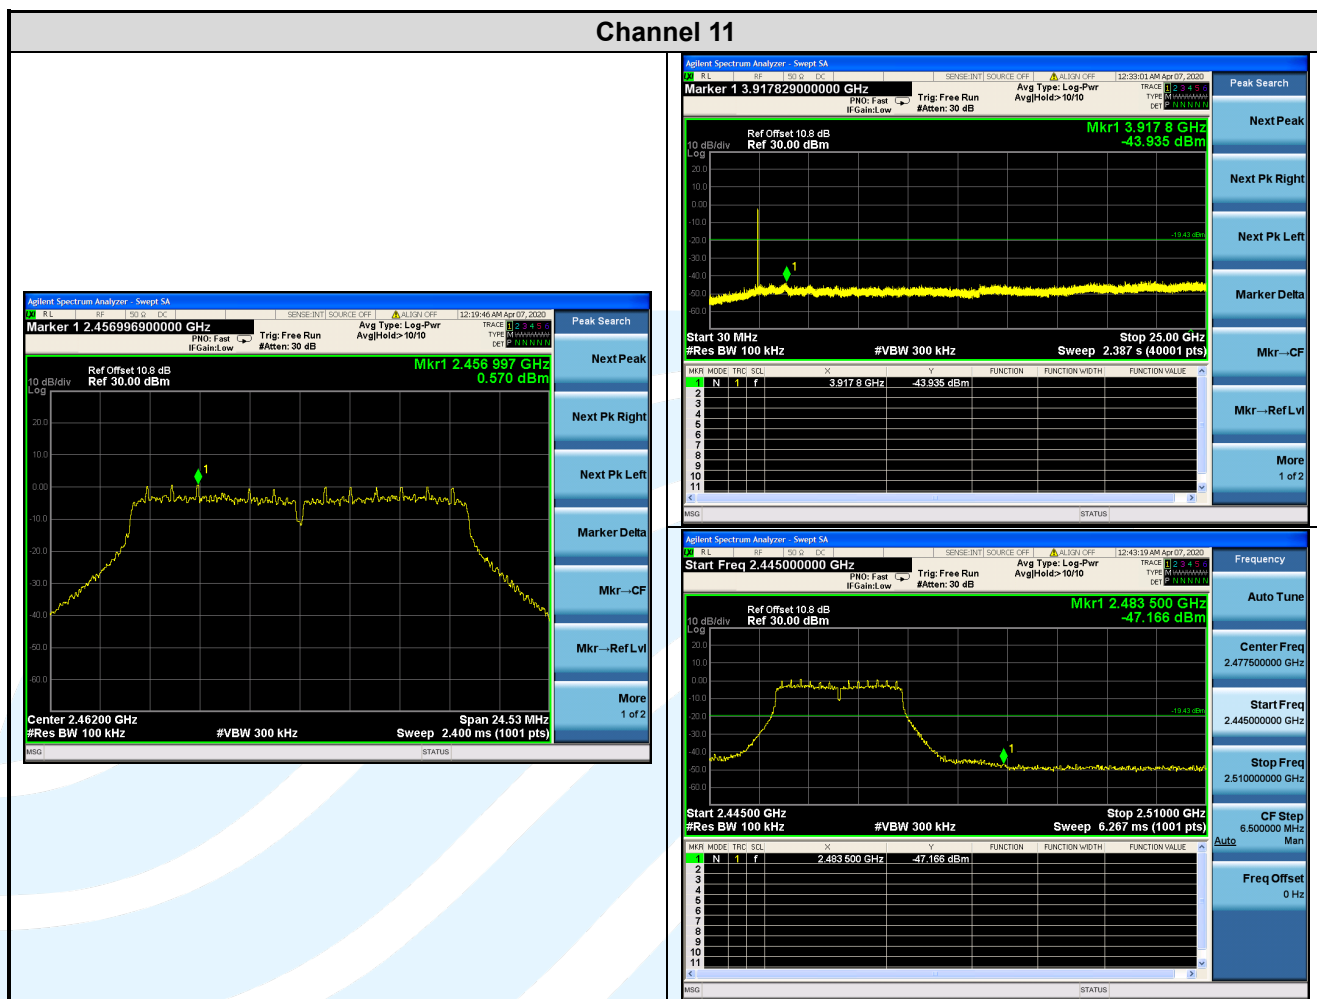

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China


Tel: +86-755-28230888


Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-RSS247-V1.0

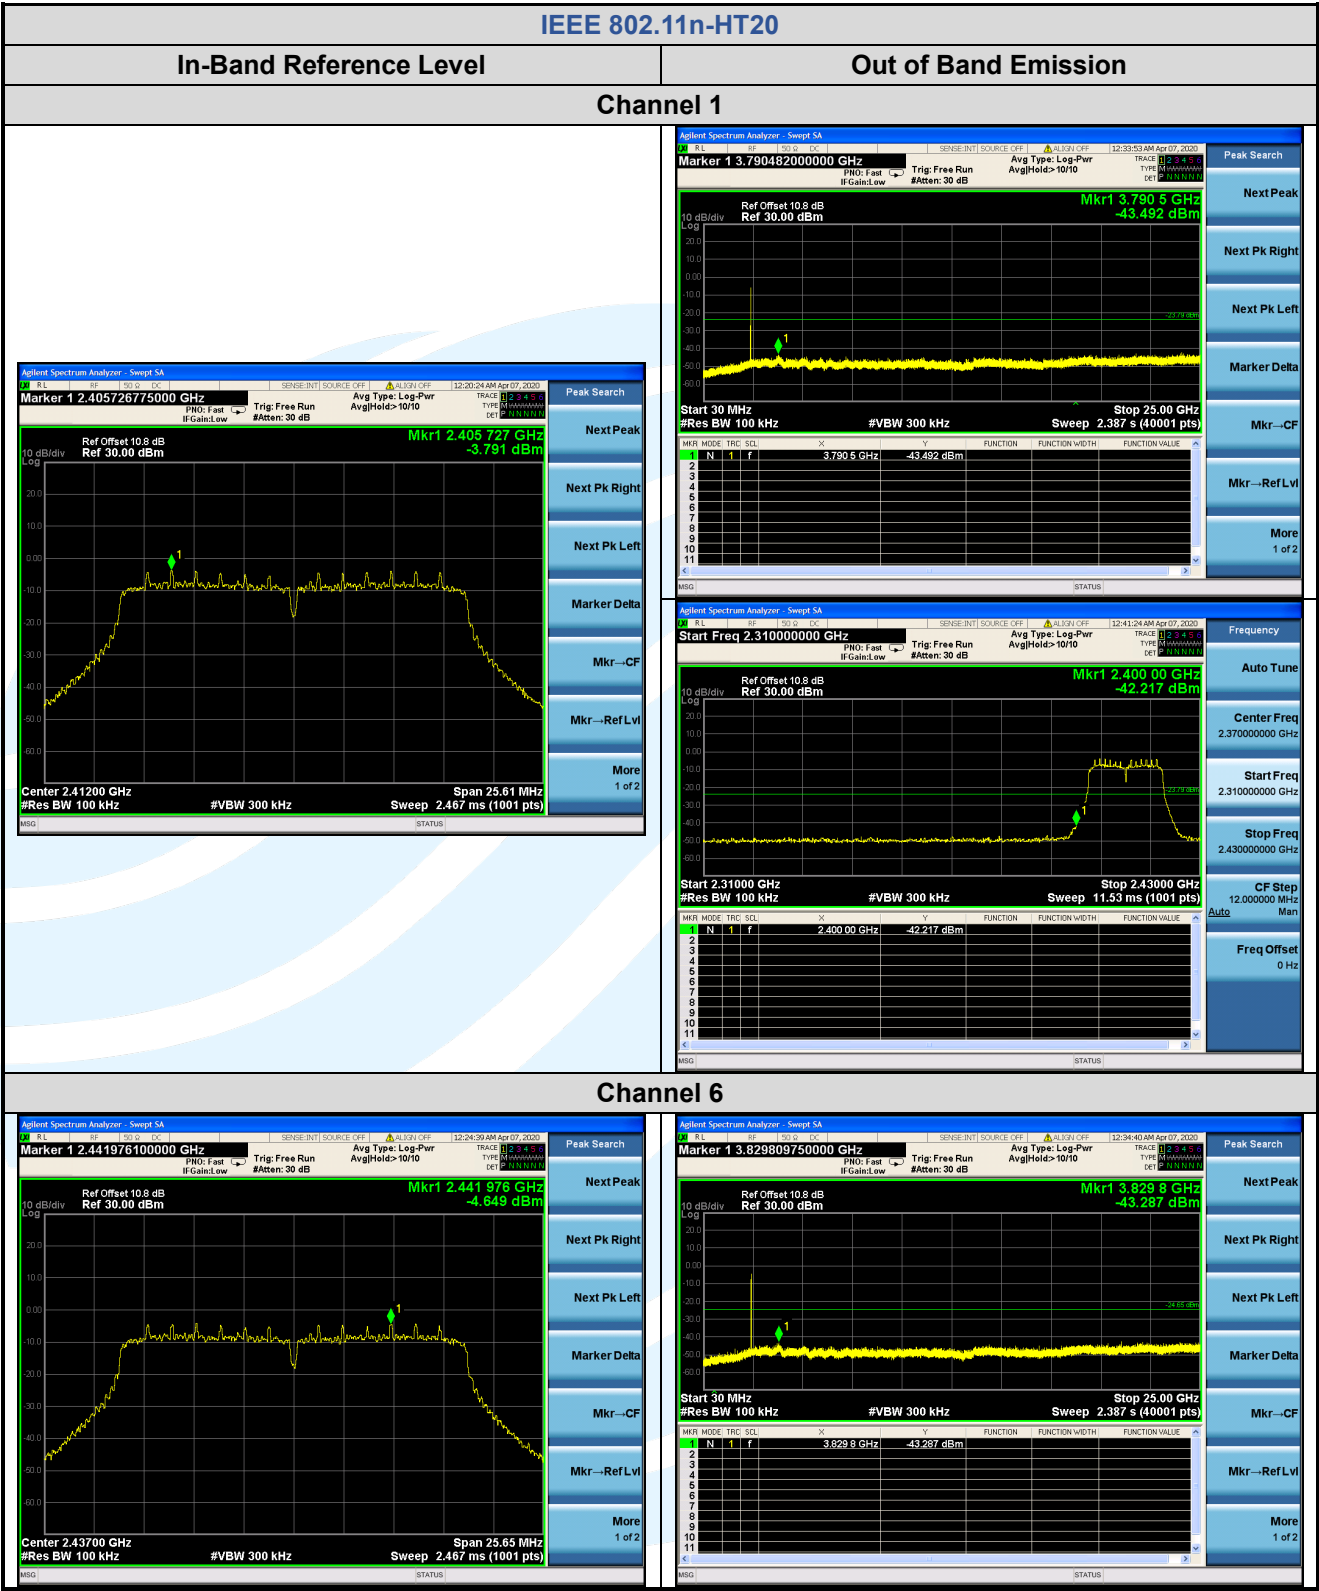

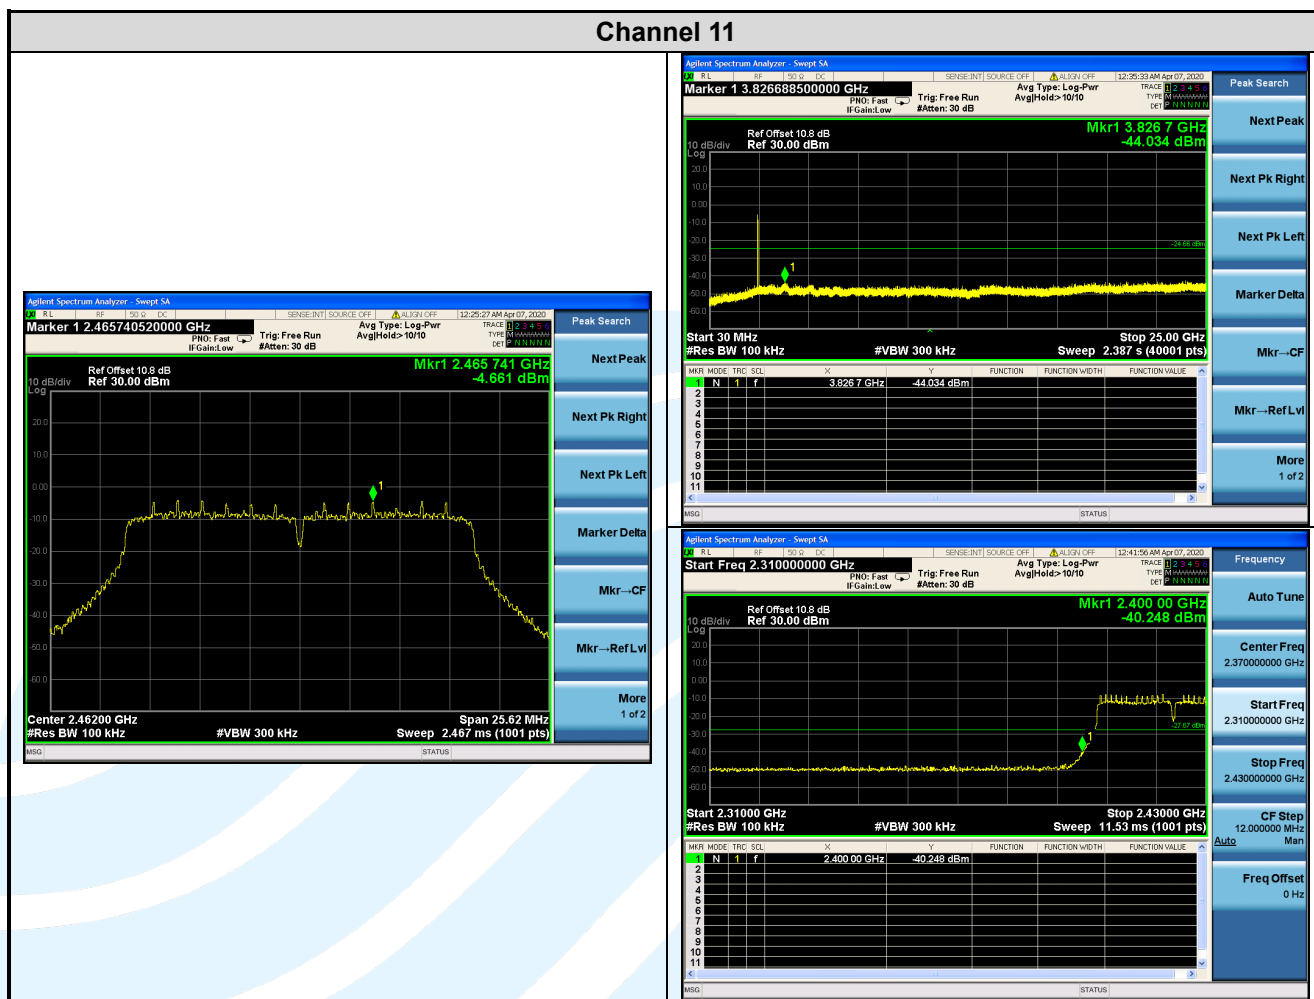

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China


Tel: +86-755-28230888


Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-RSS247-V1.0

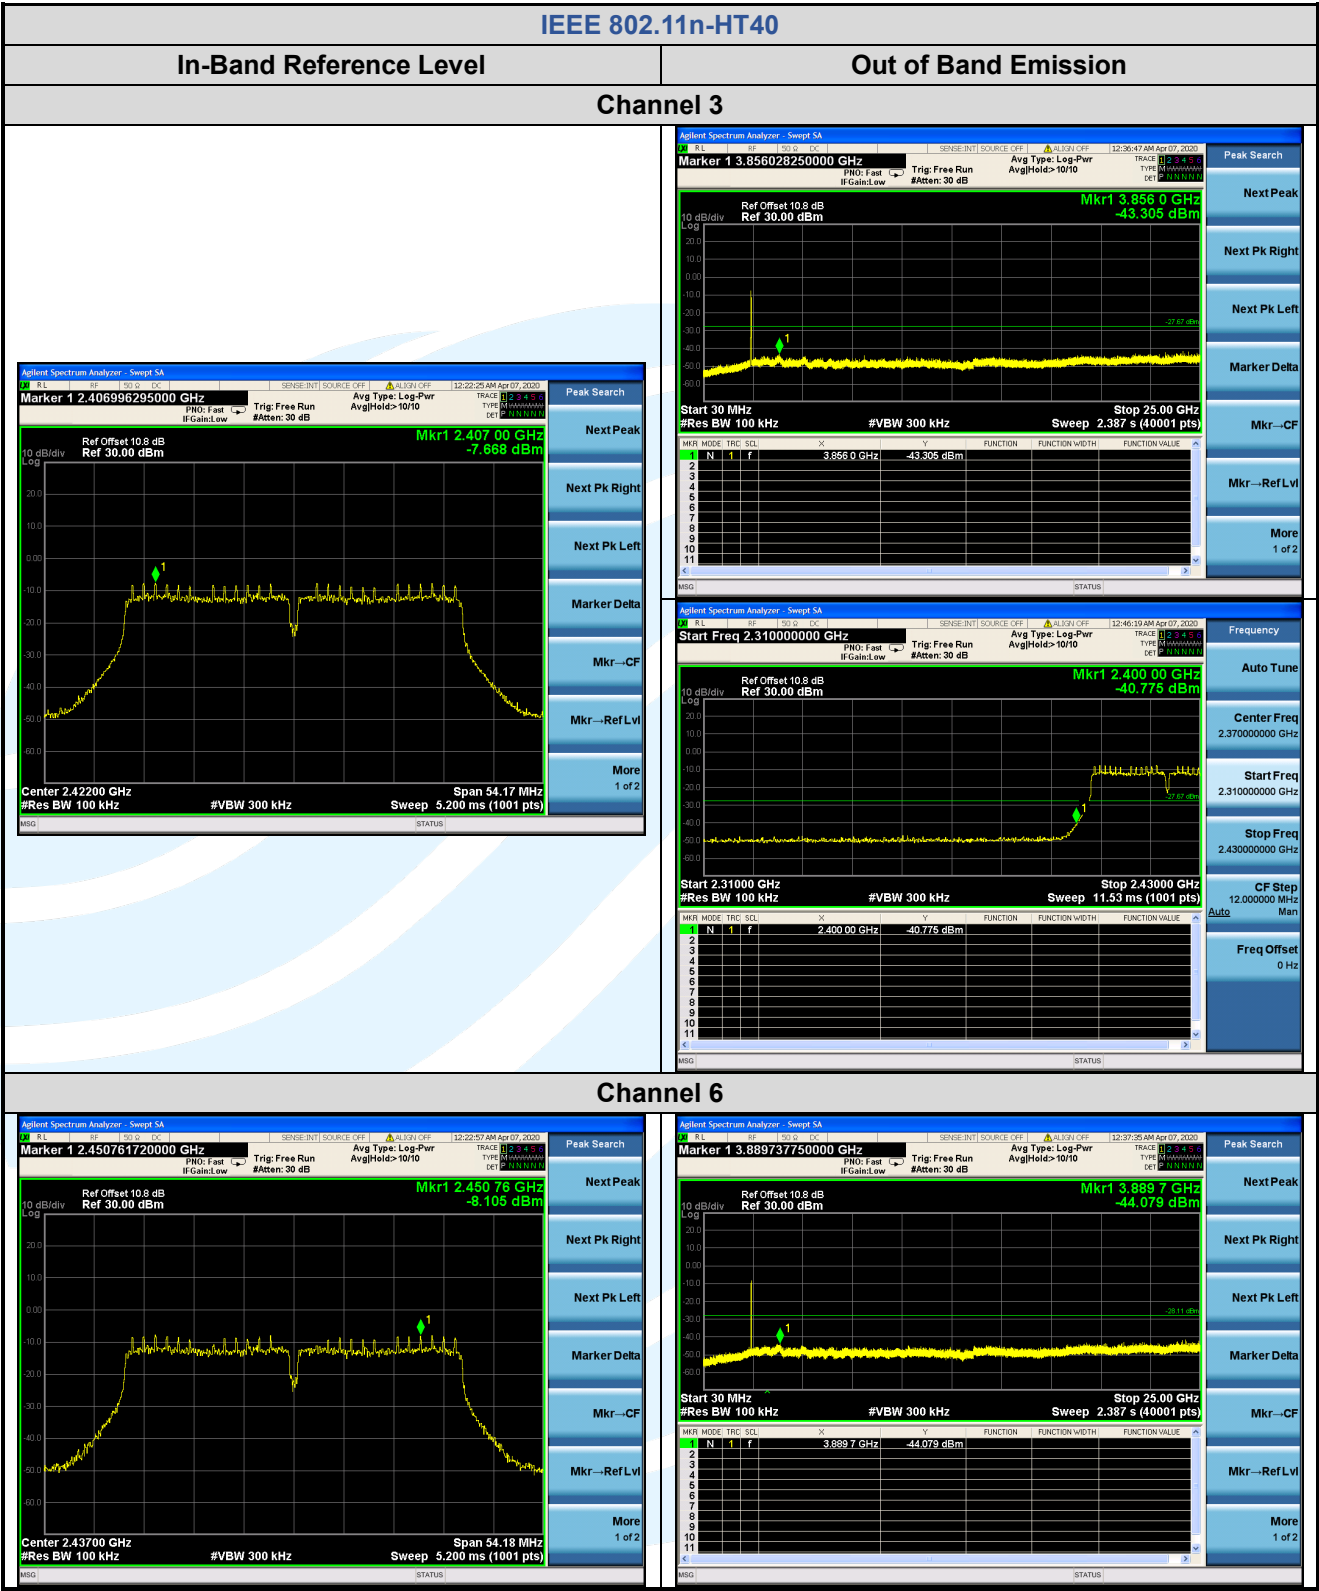

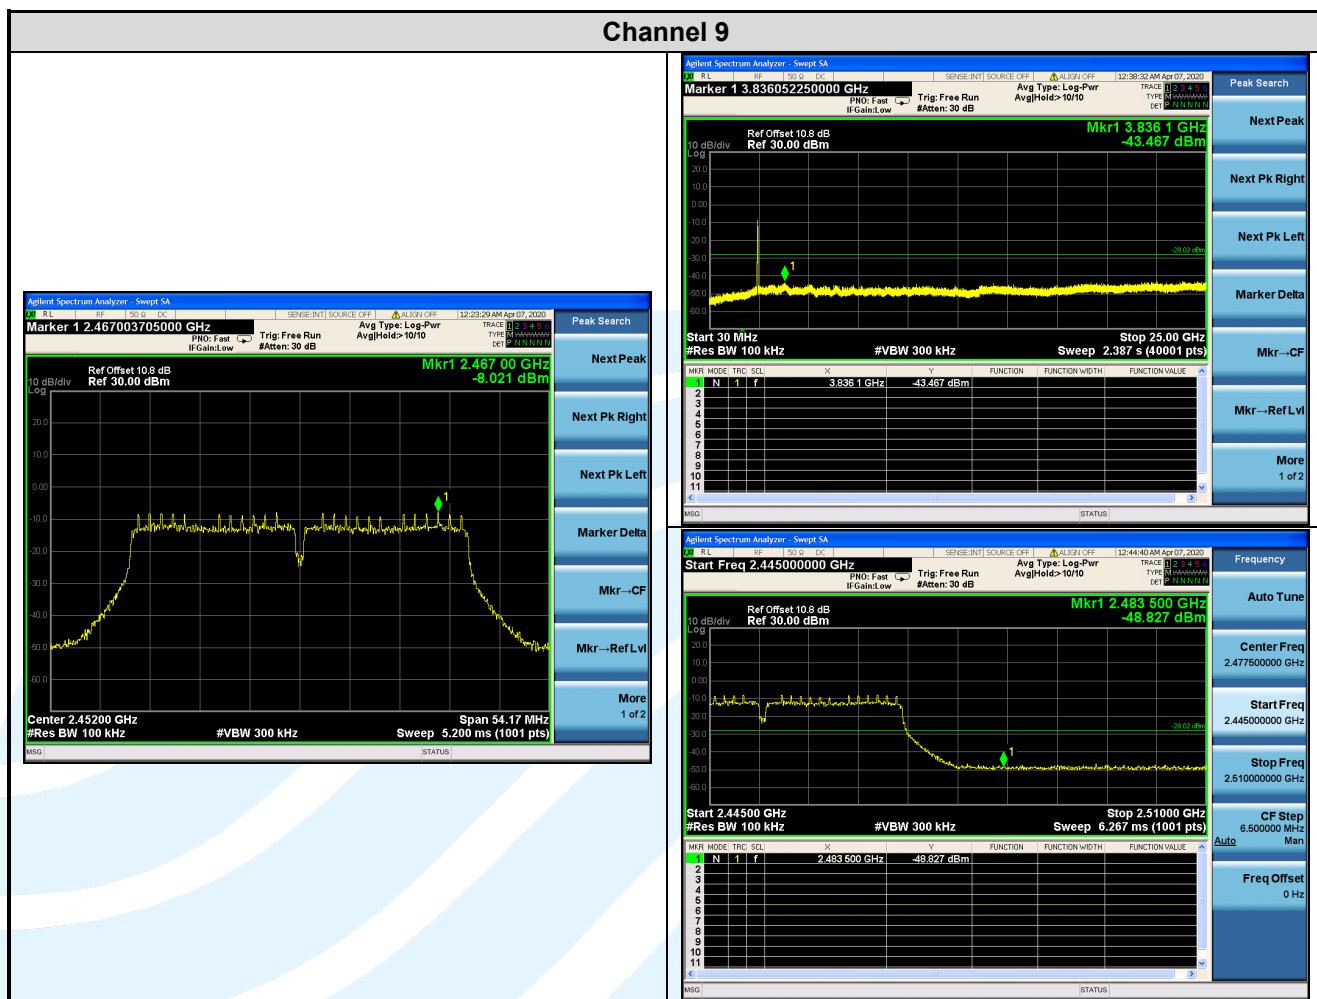

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-RSS247-V1.0

5.7 RADIATED SPURIOUS EMISSIONS

Test Requirement: FCC 47 CFR Part 15 Subpart C Section 15.205/15.209
RSS-Gen Issue 5, Section 6.13/8.9/8.10

Test Method: ANSI C63.10-2013 Clause 11.11 & Clause 11.12

Receiver Setup:

Frequency	RBW
0.009 MHz-0.150 MHz	200/300 kHz
0.150 MHz -30 MHz	9/10 kHz
30 MHz-1 GHz	100/120 kHz
Above 1 GHz	1 MHz

Limits:

Spurious Emissions

Frequency	Field strength (microvolt/meter)	Limit (dB μ V/m)	Remark	Measurement distance (m)
0.009 MHz-0.490 MHz	2400/F(kHz)	--	--	300
0.490 MHz-1.705 MHz	24000/F(kHz)	--	--	30
1.705 MHz-30 MHz	30	--	--	30
30 MHz-88 MHz	100	40.0	Quasi-peak	3
88 MHz-216 MHz	150	43.5	Quasi-peak	3
216 MHz-960 MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1 GHz	500	54.0	Average	3

Remark:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dB μ V/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.

Test Setup: Refer to section 4.4.1 for details.

Test Procedures:

1. From 30 MHz to 1GHz test procedure as below:

- 1) The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- 2) The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- 3) The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- 4) For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- 5) The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- 6) If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

2. Above 1GHz test procedure as below:

- 1) Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).
- 2) Test the EUT in the lowest channel ,middle channel, the Highest channel

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-RSS247-V1.0

- 3) The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the Z axis positioning which it is worse case.
- 4) Repeat above procedures until all frequencies measured was complete.

Equipment Used: Refer to section 3 for details.

Test Result: Pass

The measurement data as follows:


Radiated Emission Test Data (9 KHz ~ 30 MHz):

The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.

Radiated Emission Test Data (30 MHz ~ 1 GHz):


Worst-Case Configuration

Horizontal

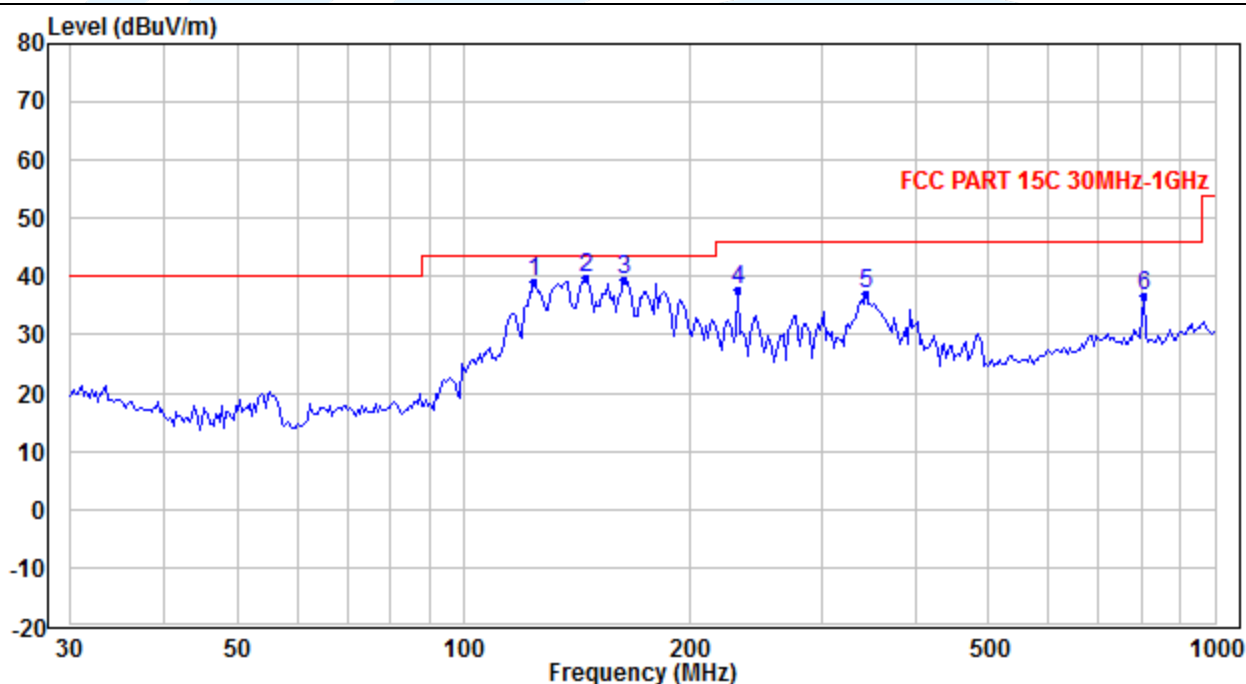

No.	Frequency (MHz)	Reading (dBuV)	Correction factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	124.050	51.50	-12.51	38.99	43.50	-4.51	QP
2	145.811	51.44	-11.63	39.81	43.50	-3.69	QP
3	163.162	49.92	-10.47	39.45	43.50	-4.05	QP
4	231.853	46.21	-8.42	37.79	46.00	-8.21	QP
5	343.651	41.65	-4.58	37.07	46.00	-8.93	QP
6	804.252	33.18	3.48	36.66	46.00	-9.34	QP

Vertical

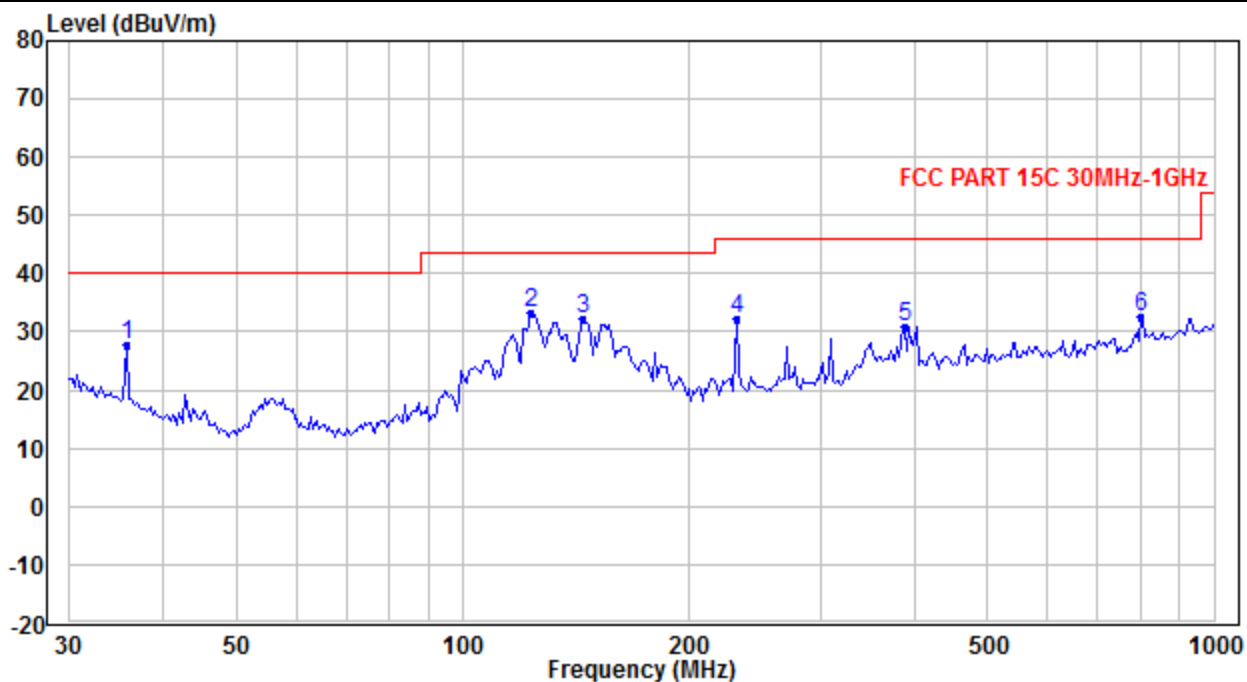

No.	Frequency (MHz)	Reading (dBuV)	Correction factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	35.762	36.59	-8.88	27.71	40.00	-12.29	QP
2	123.181	45.79	-12.52	33.27	43.50	-10.23	QP
3	144.790	43.92	-11.72	32.20	43.50	-11.30	QP
4	231.853	40.74	-8.42	32.32	46.00	-13.68	QP
5	387.257	34.98	-4.05	30.93	46.00	-15.07	QP
6	798.620	29.93	2.63	32.56	46.00	-13.44	QP

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-RSS247-V1.0

Radiated Emission Test Data (Above 1GHz):
IEEE 802.11b_Channel 1:

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Polaxis
1	4824.00	44.69	4.41	49.10	74.00	-24.90	Peak	Horizontal
2	4824.00	29.33	4.41	33.74	54.00	-20.26	Average	Horizontal
3	7236.00	45.12	6.68	51.80	74.00	-22.20	Peak	Horizontal
4	7236.00	31.15	6.68	37.83	54.00	-16.17	Average	Horizontal
5	4824.00	43.40	4.05	47.45	74.00	-26.55	Peak	Vertical
6	4824.00	28.16	4.05	32.21	54.00	-21.79	Average	Vertical
7	7236.00	39.78	6.38	46.16	74.00	-27.84	Peak	Vertical
8	7236.00	27.80	6.38	34.18	54.00	-19.82	Average	Vertical

IEEE 802.11b_Channel 6:

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Polaxis
1	4874.00	39.12	4.32	43.44	74.00	-30.56	Peak	Horizontal
2	4874.00	26.67	4.32	30.99	54.00	-23.01	Average	Horizontal
3	7311.00	43.60	6.74	50.34	74.00	-23.66	Peak	Horizontal
4	7311.00	30.58	6.74	37.32	54.00	-16.68	Average	Horizontal
5	4874.00	42.32	3.95	46.27	74.00	-27.73	Peak	Vertical
6	4874.00	27.97	3.95	31.92	54.00	-22.08	Average	Vertical
7	7311.00	41.01	6.44	47.45	74.00	-26.55	Peak	Vertical
8	7311.00	28.67	6.44	35.11	54.00	-18.89	Average	Vertical

IEEE 802.11b_Channel 11:

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Polaxis
1	4924.00	39.69	4.23	43.92	74.00	-30.08	Peak	Horizontal
2	4924.00	26.03	4.23	30.26	54.00	-23.74	Average	Horizontal
3	7386.00	42.60	6.80	49.40	74.00	-24.60	Peak	Horizontal
4	7386.00	27.96	6.80	34.76	54.00	-19.24	Average	Horizontal
5	4924.00	39.46	3.85	43.31	74.00	-30.69	Peak	Vertical
6	4924.00	26.31	3.85	30.16	54.00	-23.84	Average	Vertical
7	7386.00	39.28	6.50	45.78	74.00	-28.22	Peak	Vertical
8	7386.00	28.07	6.50	34.57	54.00	-19.43	Average	Vertical

IEEE 802.11g_Channel 1:

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Polaxis
1	4824.00	36.61	4.41	41.02	74.00	-32.98	Peak	Horizontal
2	4824.00	25.32	4.41	29.73	54.00	-24.27	Average	Horizontal
3	7236.00	41.59	6.68	48.27	74.00	-25.73	Peak	Horizontal
4	7236.00	28.37	6.68	35.05	54.00	-18.95	Average	Horizontal
5	4824.00	36.81	4.05	40.86	74.00	-33.14	Peak	Vertical
6	4824.00	25.92	4.05	29.97	54.00	-24.03	Average	Vertical
7	7236.00	39.07	6.38	45.45	74.00	-28.55	Peak	Vertical
8	7236.00	27.74	6.38	34.12	54.00	-19.88	Average	Vertical

IEEE 802.11g_Channel 6:

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Polaxis
1	4874.00	38.19	4.32	42.51	74.00	-31.49	Peak	Horizontal
2	4874.00	27.13	4.32	31.45	54.00	-22.55	Average	Horizontal
3	7311.00	41.96	6.74	48.70	74.00	-25.30	Peak	Horizontal
4	7311.00	29.43	6.74	36.17	54.00	-17.83	Average	Horizontal
5	4874.00	36.56	3.95	40.51	74.00	-33.49	Peak	Vertical
6	4874.00	25.96	3.95	29.91	54.00	-24.09	Average	Vertical
7	7311.00	39.48	6.44	45.92	74.00	-28.08	Peak	Vertical
8	7311.00	27.83	6.44	34.27	54.00	-19.73	Average	Vertical

IEEE 802.11g_Channel 11:

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Polaxis
1	4924.00	36.40	4.23	40.63	74.00	-33.37	Peak	Horizontal
2	4924.00	25.03	4.23	29.26	54.00	-24.74	Average	Horizontal
3	7386.00	39.00	6.80	45.80	74.00	-28.20	Peak	Horizontal
4	7386.00	27.72	6.80	34.52	54.00	-19.48	Average	Horizontal
5	4924.00	37.66	3.85	41.51	74.00	-32.49	Peak	Vertical
6	4924.00	26.31	3.85	30.16	54.00	-23.84	Average	Vertical
7	7386.00	39.04	6.50	45.54	74.00	-28.46	Peak	Vertical
8	7386.00	27.90	6.50	34.40	54.00	-19.60	Average	Vertical

IEEE 802.11n-HT20_ Channel 1:

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Polaxis
1	4824.00	37.69	4.41	42.10	74.00	-31.90	Peak	Horizontal
2	4824.00	26.14	4.41	30.55	54.00	-23.45	Average	Horizontal
3	7236.00	39.34	6.68	46.02	74.00	-27.98	Peak	Horizontal
4	7236.00	27.97	6.68	34.65	54.00	-19.35	Average	Horizontal
5	4824.00	36.75	4.05	40.80	74.00	-33.20	Peak	Vertical
6	4824.00	25.24	4.05	29.29	54.00	-24.71	Average	Vertical
7	7236.00	38.95	6.38	45.33	74.00	-28.67	Peak	Vertical
8	7236.00	27.62	6.38	34.00	54.00	-20.00	Average	Vertical

IEEE 802.11n-HT20_ Channel 6:

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Polaxis
1	4874.00	37.30	4.32	41.62	74.00	-32.38	Peak	Horizontal
2	4874.00	26.11	4.32	30.43	54.00	-23.57	Average	Horizontal
3	7311.00	39.89	6.74	46.63	74.00	-27.37	Peak	Horizontal
4	7311.00	28.23	6.74	34.97	54.00	-19.03	Average	Horizontal
5	4874.00	36.71	3.95	40.66	74.00	-33.34	Peak	Vertical
6	4874.00	26.32	3.95	30.27	54.00	-23.73	Average	Vertical
7	7311.00	39.33	6.44	45.77	74.00	-28.23	Peak	Vertical
8	7311.00	28.18	6.44	34.62	54.00	-19.38	Average	Vertical

IEEE 802.11n-HT20_ Channel 11:

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Polaxis
1	4924.00	37.35	4.23	41.58	74.00	-32.42	Peak	Horizontal
2	4924.00	26.10	4.23	30.33	54.00	-23.67	Average	Horizontal
3	7386.00	38.21	6.80	45.01	74.00	-28.99	Peak	Horizontal
4	7386.00	27.30	6.80	34.10	54.00	-19.90	Average	Horizontal
5	4924.00	37.84	3.85	41.69	74.00	-32.31	Peak	Vertical
6	4924.00	26.38	3.85	30.23	54.00	-23.77	Average	Vertical
7	7386.00	40.66	6.50	47.16	74.00	-26.84	Peak	Vertical
8	7386.00	29.20	6.50	35.70	54.00	-18.30	Average	Vertical

IEEE 802.11n-HT40_ Channel 3:

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Polaxis
1	4844.00	37.60	4.37	41.97	74.00	-32.03	Peak	Horizontal
2	4844.00	26.39	4.37	30.76	54.00	-23.24	Average	Horizontal
3	7266.00	39.40	6.71	46.11	74.00	-27.89	Peak	Horizontal
4	7266.00	27.94	6.71	34.65	54.00	-19.35	Average	Horizontal
5	4844.00	38.16	4.00	42.16	74.00	-31.84	Peak	Vertical
6	4844.00	26.80	4.00	30.80	54.00	-23.20	Average	Vertical
7	7266.00	41.22	6.41	47.63	74.00	-26.37	Peak	Vertical
8	7266.00	29.38	6.41	35.79	54.00	-18.21	Average	Vertical

IEEE 802.11n-HT40_ Channel 6:

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Polaxis
1	4874.00	38.29	4.32	42.61	74.00	-31.39	Peak	Horizontal
2	4874.00	25.89	4.32	30.21	54.00	-23.79	Average	Horizontal
3	7311.00	38.21	6.74	44.95	74.00	-29.05	Peak	Horizontal
4	7311.00	27.65	6.74	34.39	54.00	-19.61	Average	Horizontal
5	4874.00	36.64	3.95	40.59	74.00	-33.41	Peak	Vertical
6	4874.00	26.25	3.95	30.20	54.00	-23.80	Average	Vertical
7	7311.00	41.01	6.44	47.45	74.00	-26.55	Peak	Vertical
8	7311.00	29.24	6.44	35.68	54.00	-18.32	Average	Vertical

IEEE 802.11n-HT40_ Channel 9:

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Polaxis
1	4904.00	37.16	4.26	41.42	74.00	-32.58	Peak	Horizontal
2	4904.00	26.07	4.26	30.33	54.00	-23.67	Average	Horizontal
3	7356.00	39.61	6.79	46.40	74.00	-27.60	Peak	Horizontal
4	7356.00	28.08	6.79	34.87	54.00	-19.13	Average	Horizontal
5	4904.00	37.64	3.88	41.52	74.00	-32.48	Peak	Vertical
6	4904.00	26.75	3.88	30.63	54.00	-23.37	Average	Vertical
7	7356.00	40.45	6.49	46.94	74.00	-27.06	Peak	Vertical
8	7356.00	29.41	6.49	35.90	54.00	-18.10	Average	Vertical

Remark:

1. Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain, the value was added to Original Receiver Reading by the software automatically.
2. Result = Reading + Correct Factor.
3. Margin = Result – Limit

5.8 BAND EDGE MEASUREMENTS (RADIATED)

Test Requirement: FCC 47 CFR Part 15 Subpart C Section 15.205/15.209
RSS-247 Issue 2, Section 5.5

Test Method: ANSI C63.10-2013 Clause 11.13

Limits:

Radiated emissions which fall in the restricted bands, as defined in section 15.205(a), must also comply with the radiated emission limits specified in section 15.209(a).

Frequency	Limit (dB μ V/m @3m)	Remark
30 MHz-88 MHz	40.0	Quasi-peak Value
88 MHz-216 MHz	43.5	Quasi-peak Value
216 MHz-960 MHz	46.0	Quasi-peak Value
960 MHz-1 GHz	54.0	Quasi-peak Value
Above 1 GHz	54.0	Average Value
	74.0	Peak Value

Test Setup: Refer to section 4.4.1 for details.

Test Procedures:

Radiated band edge measurements at 2390 MHz and 2483.5 MHz were made with the unit transmitting in the low end of the channel range and the high end closest to the restricted bands respectively. The emissions were made on the 966 Semi-Chamber. Use (resolution bandwidth (RBW) = 1 MHz, video bandwidth (VBW) = 3 MHz for peak levels and RBW = 1 MHz and VBW = 10 Hz or 1/T for average levels).



1. Use radiated spurious emission test procedure described in clause 5.10. The transmitter output (antenna port) was connected to the test receiver.
2. Set the PK and AV limit line.
3. Record the fundamental emission and emissions out of the band-edge.
4. Determine band-edge compliance as required.

Equipment Used: Refer to section 3 for details.

Test Result: Pass

The measurement data as follows:

IEEE 802.11b

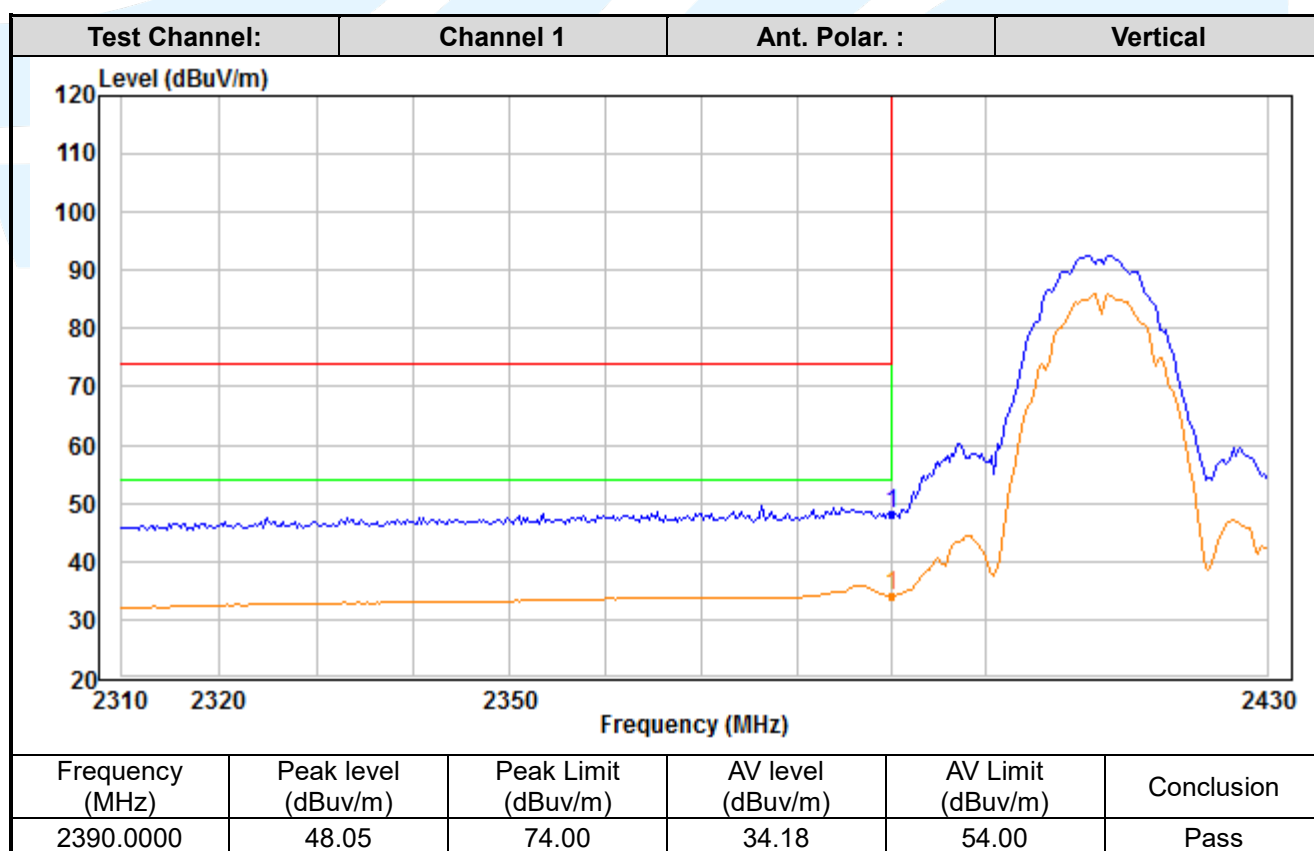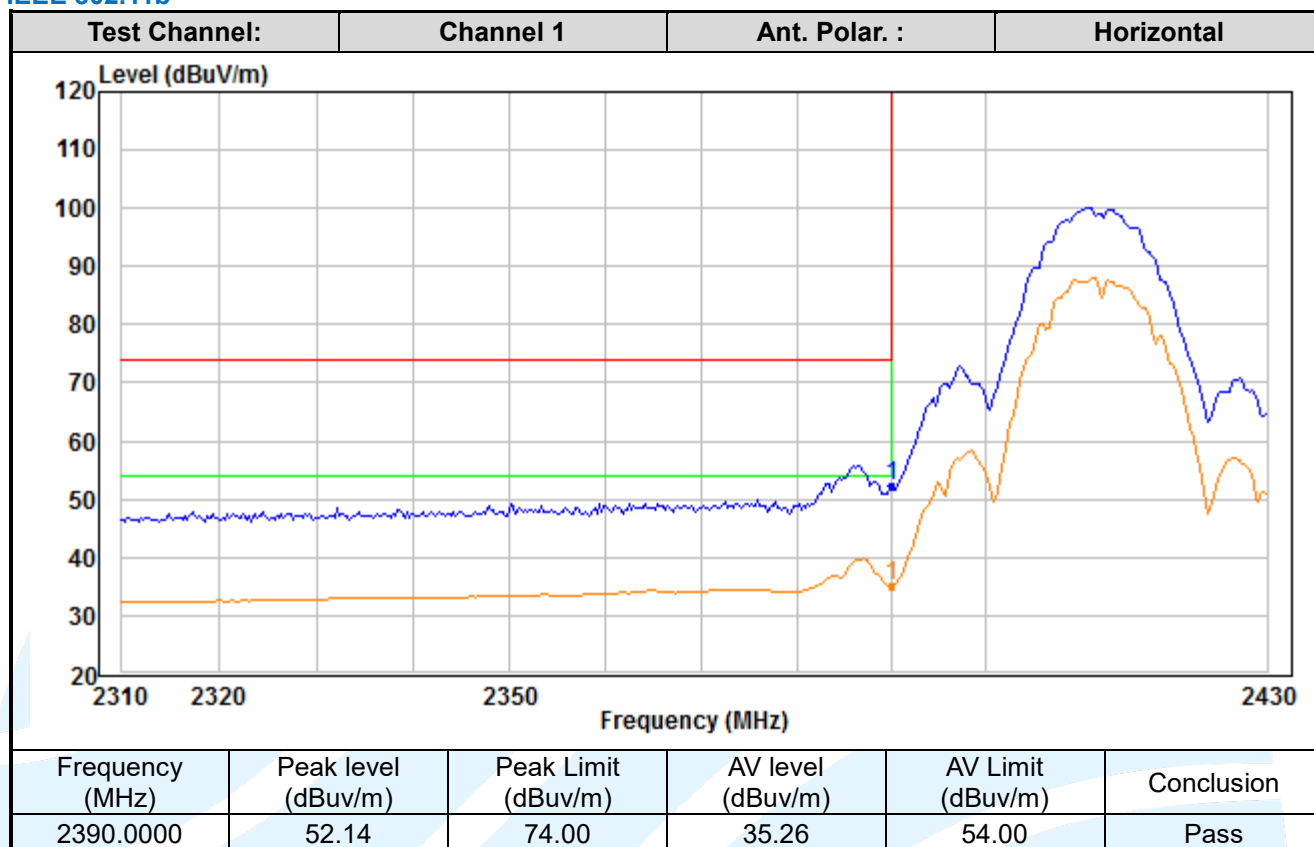

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China



Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-RSS247-V1.0

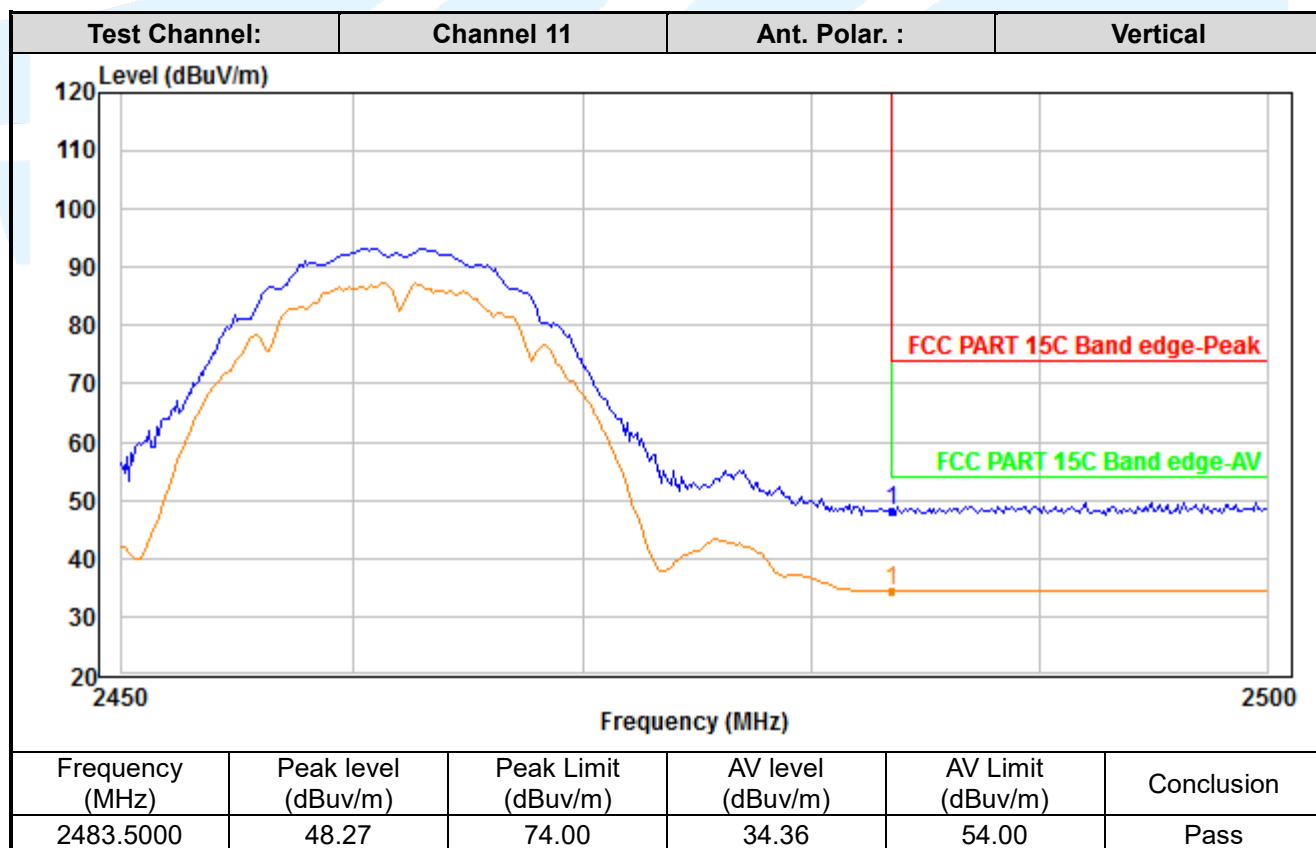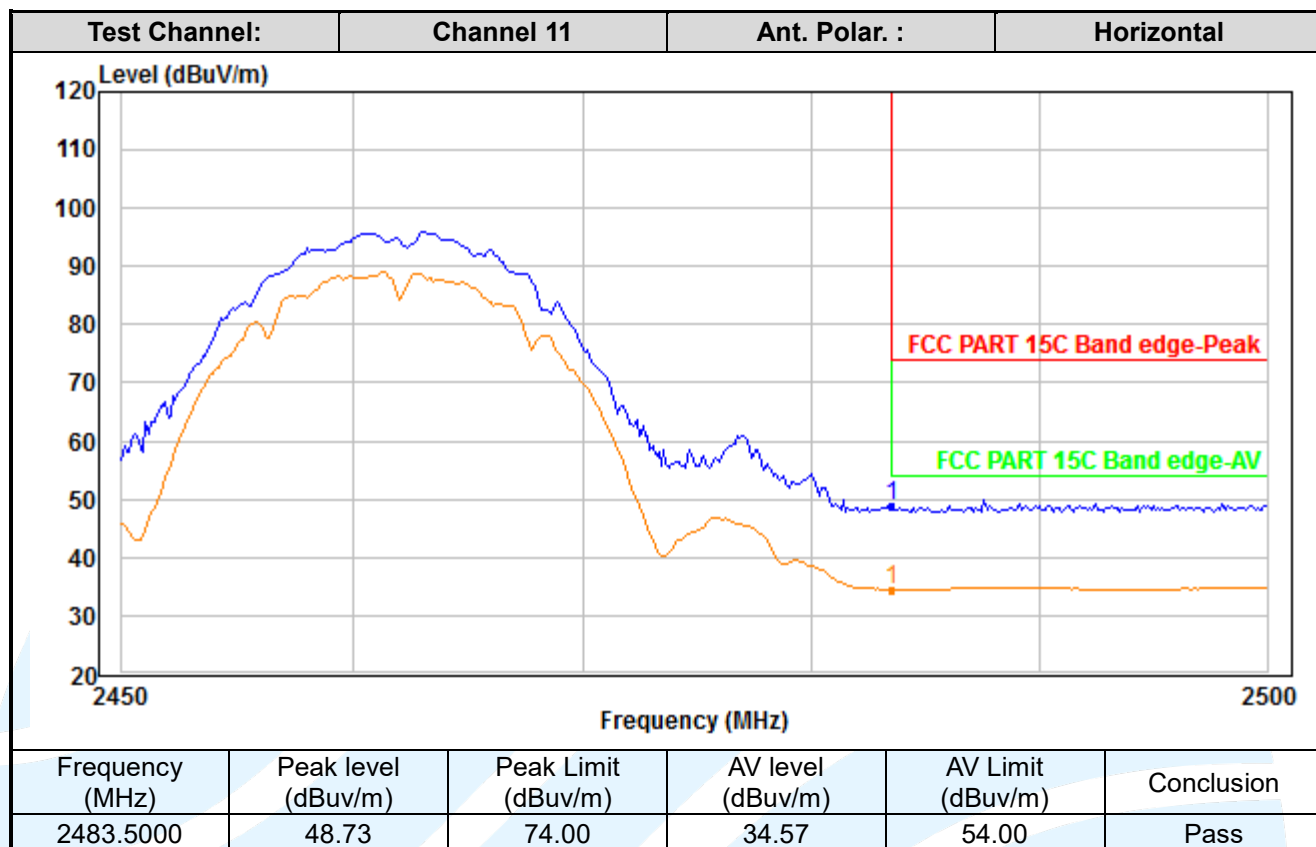

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China

Tel: +86-755-28230888



Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-RSS247-V1.0

IEEE 802.11g

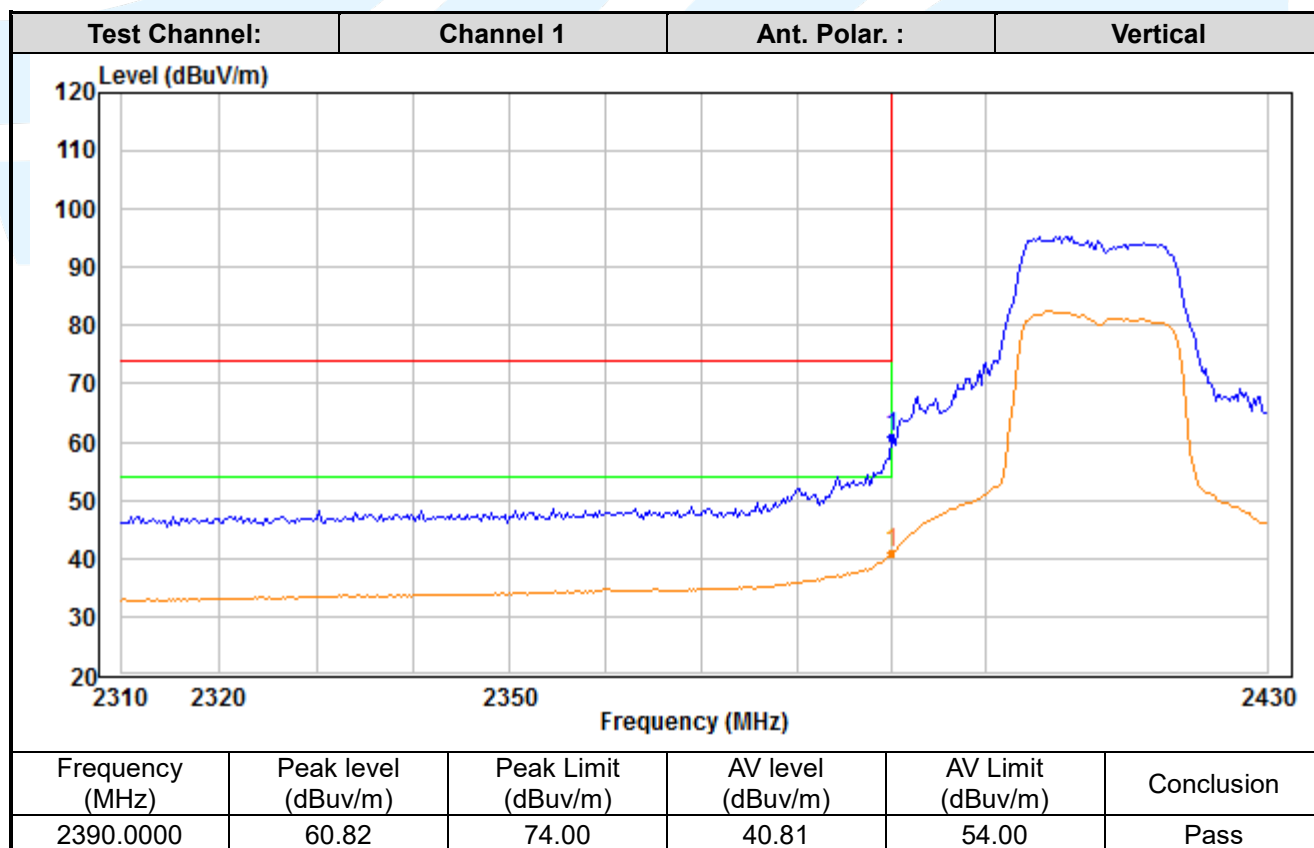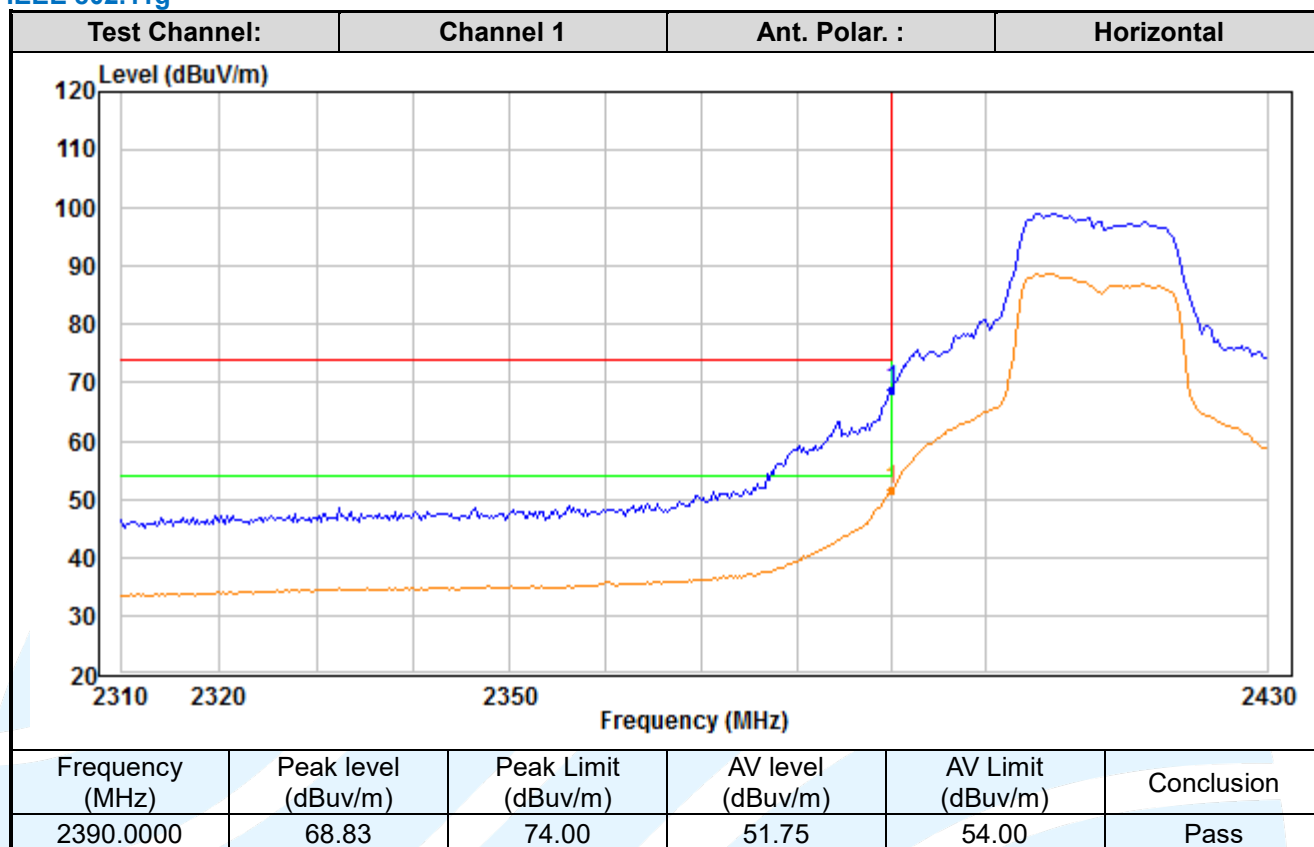

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China



Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-RSS247-V1.0

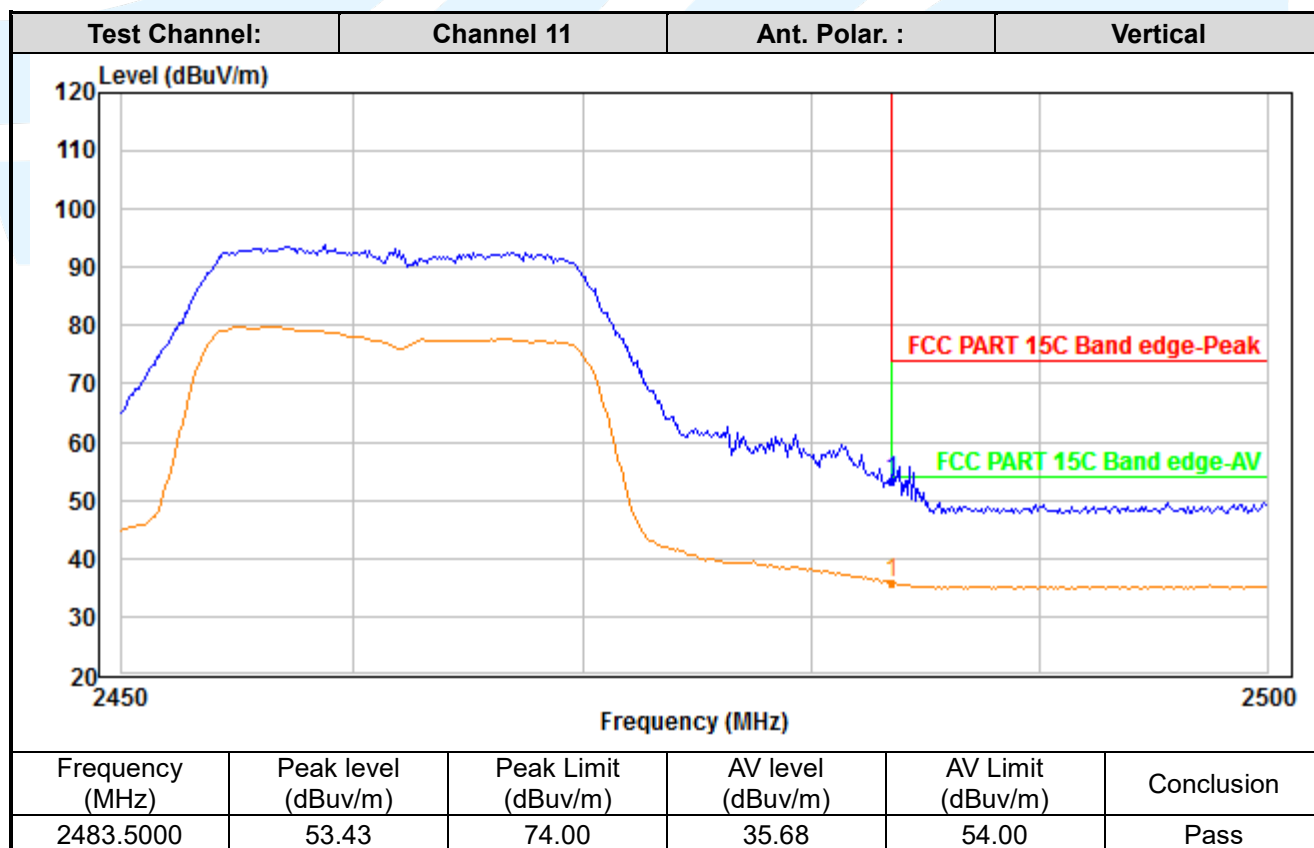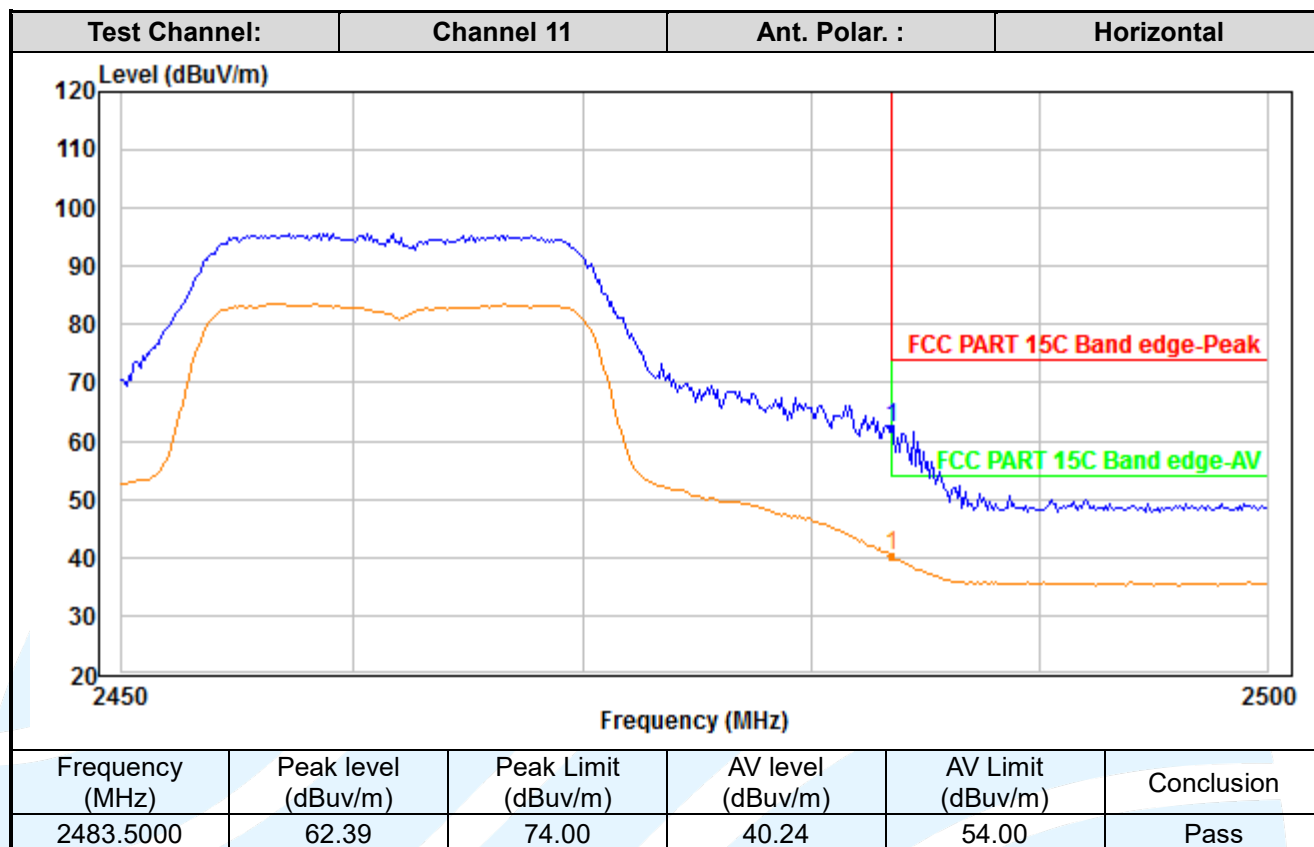

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China

Tel: +86-755-28230888



Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-RSS247-V1.0

IEEE 802.11n-HT20

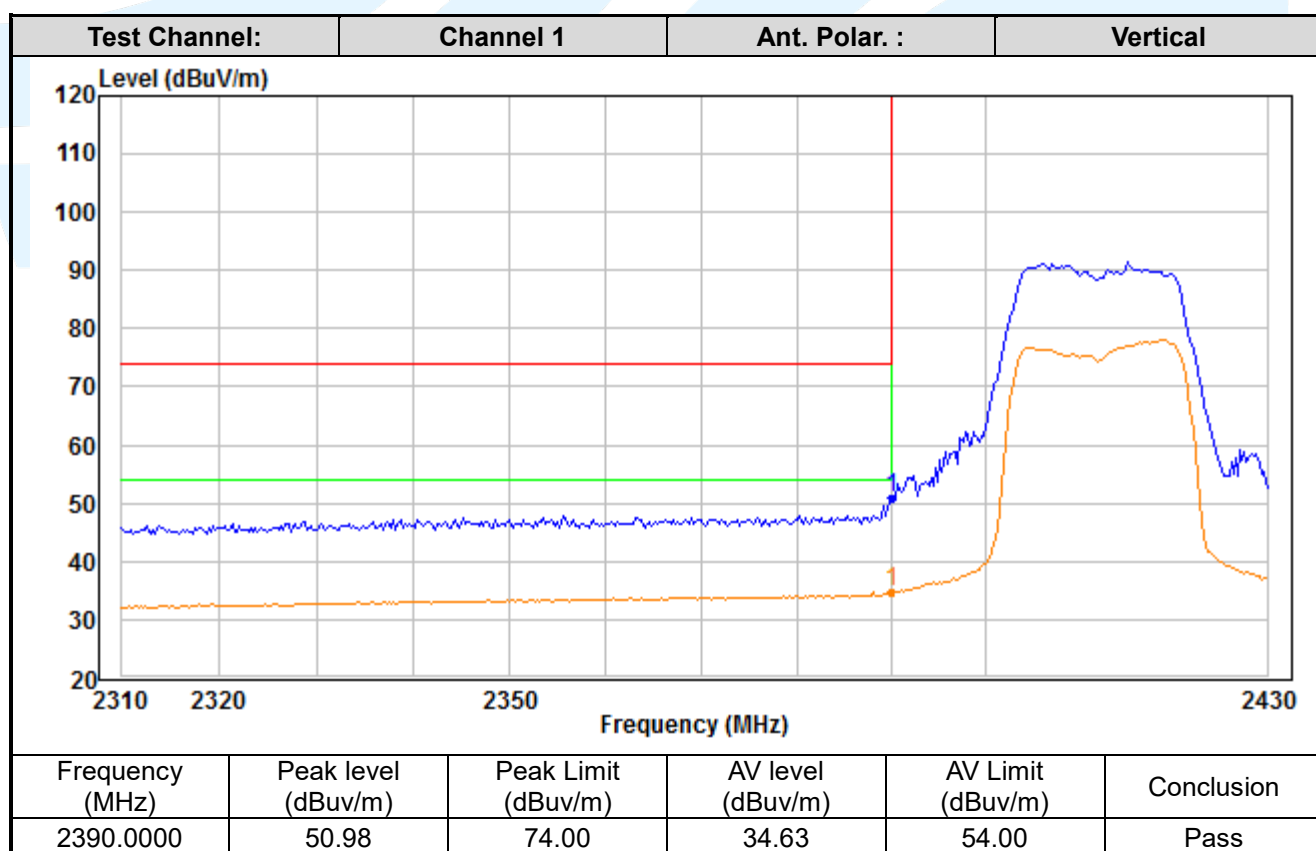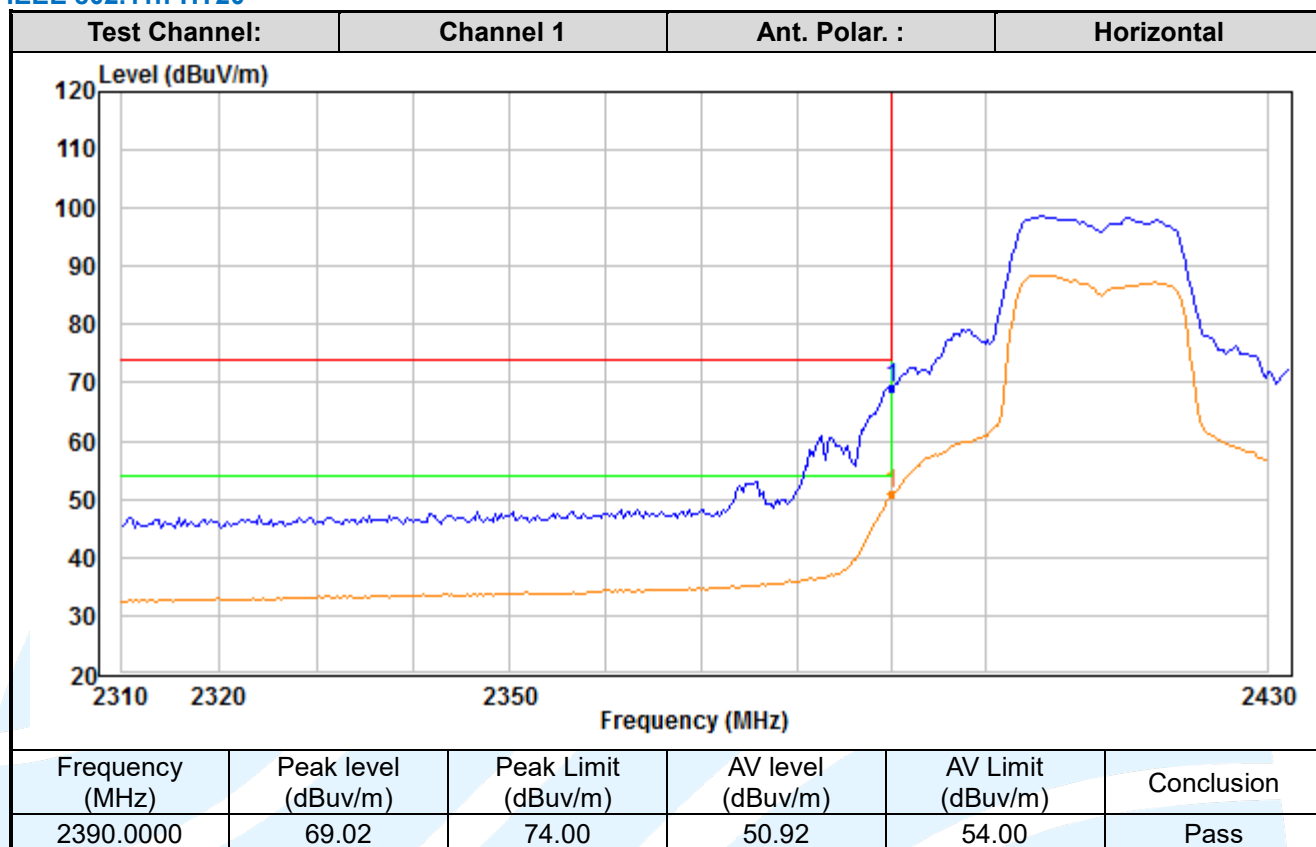

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China



Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-RSS247-V1.0

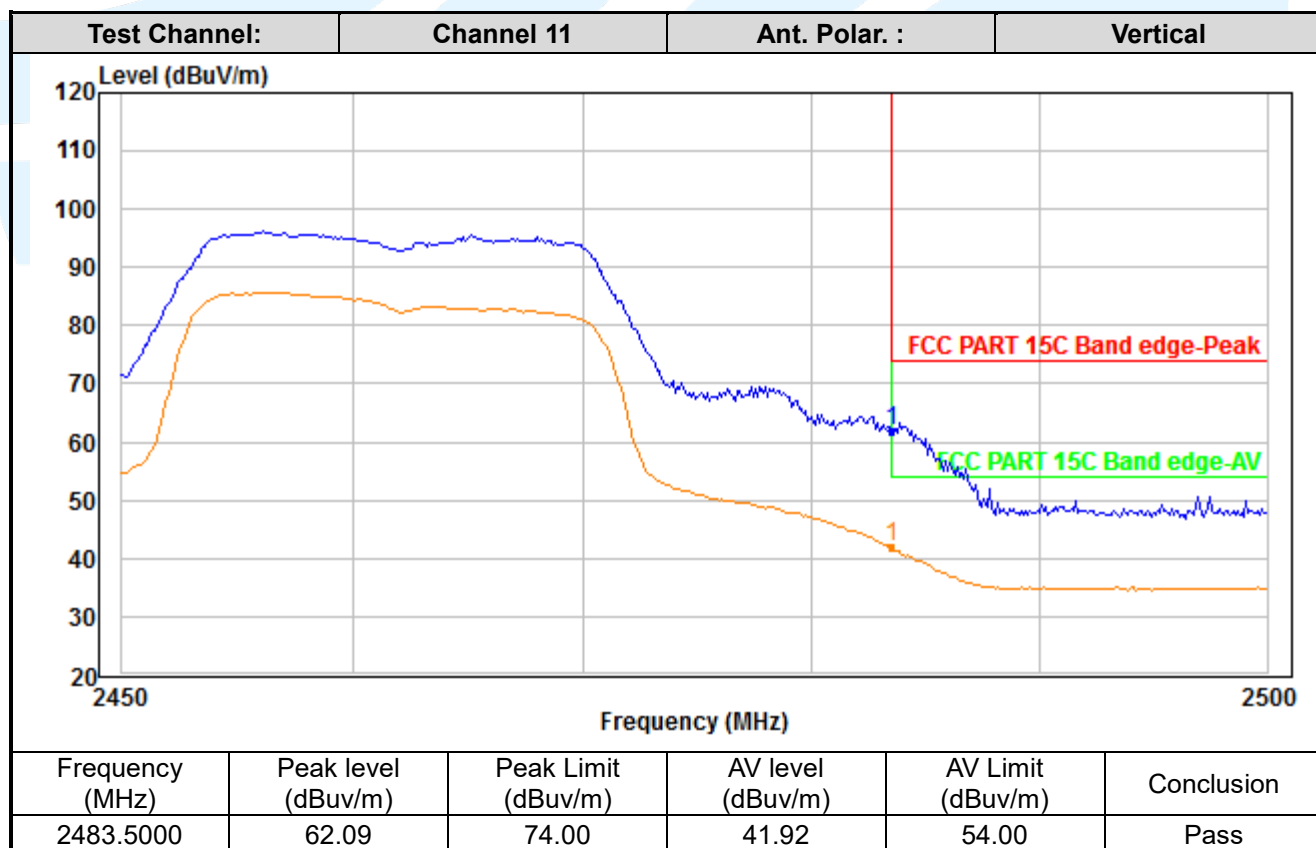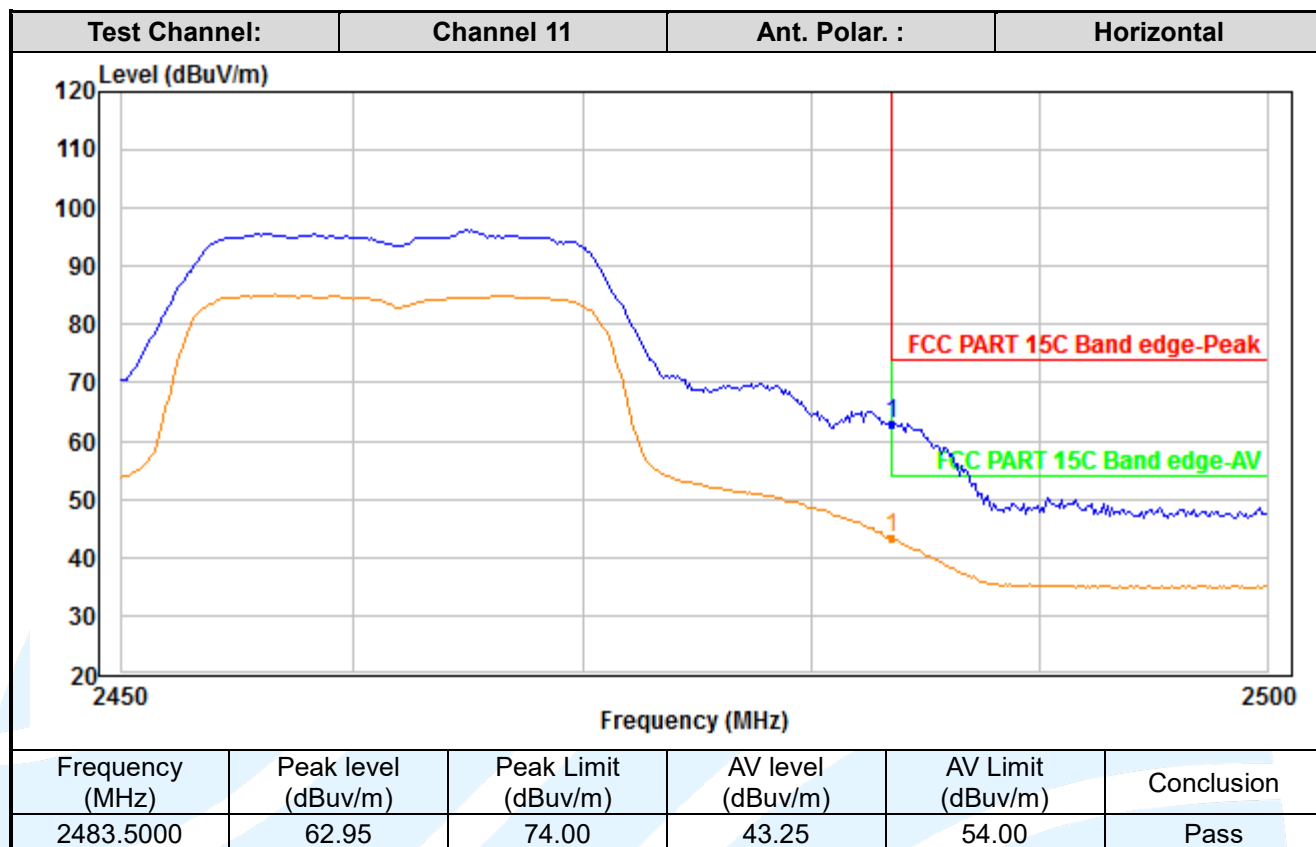

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China

Tel: +86-755-28230888



Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-RSS247-V1.0

IEEE 802.11n-HT40

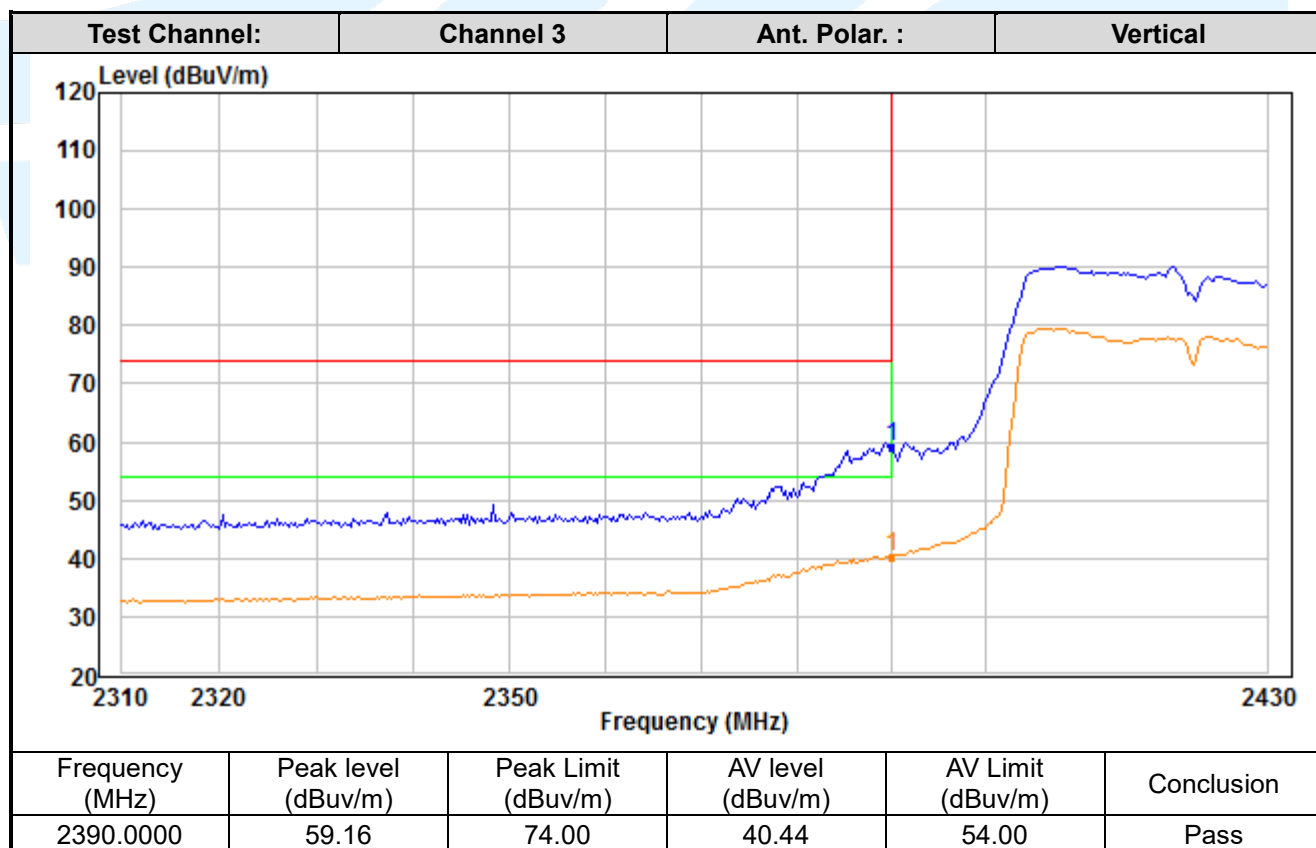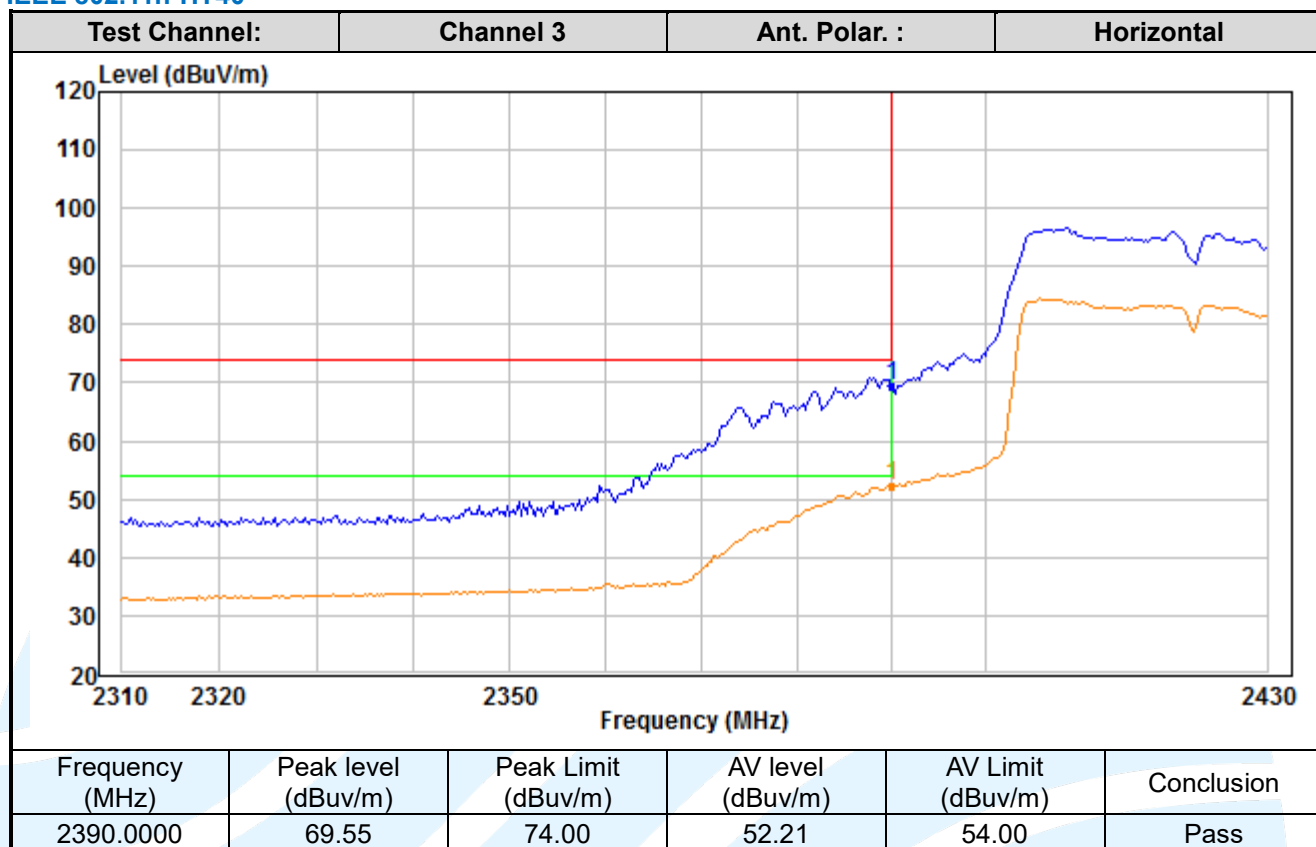

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China



Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-RSS247-V1.0

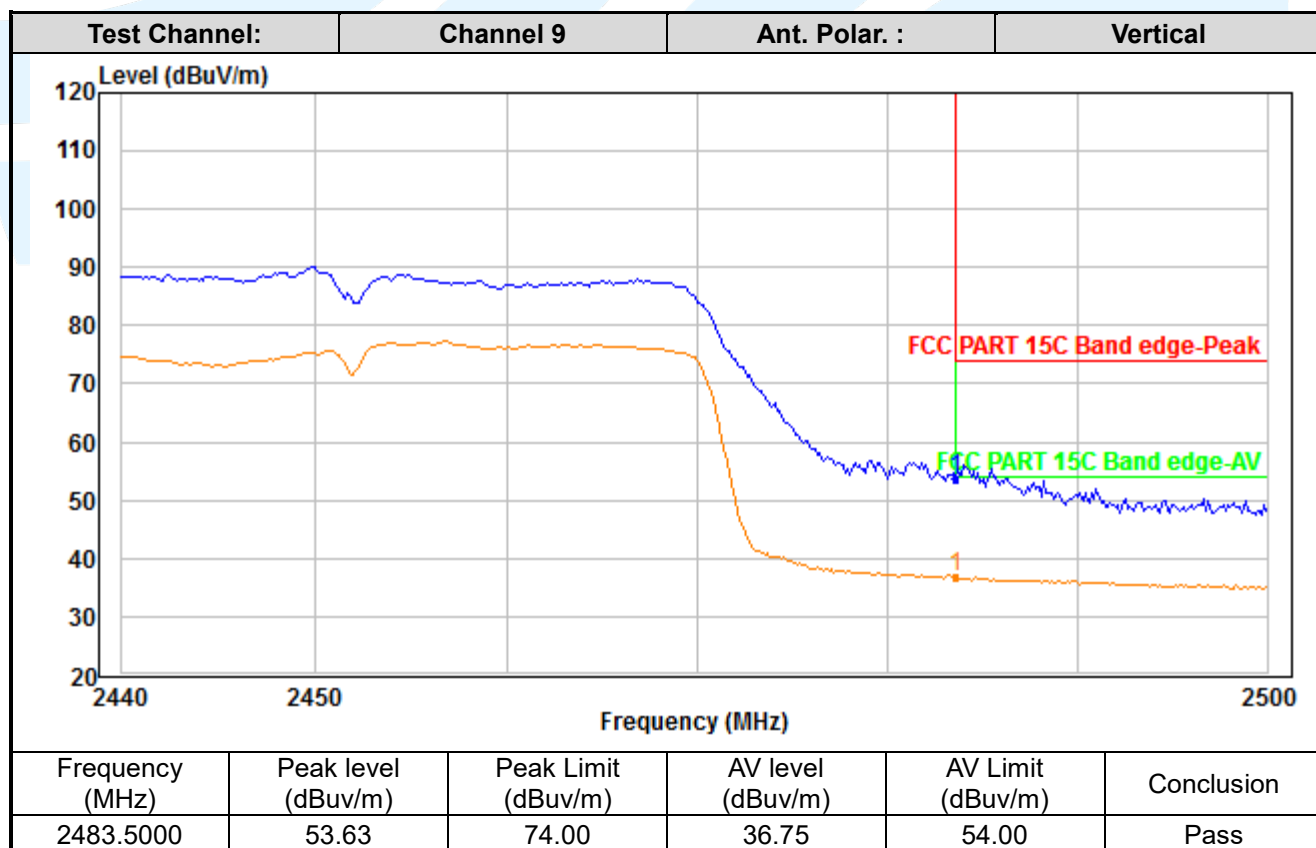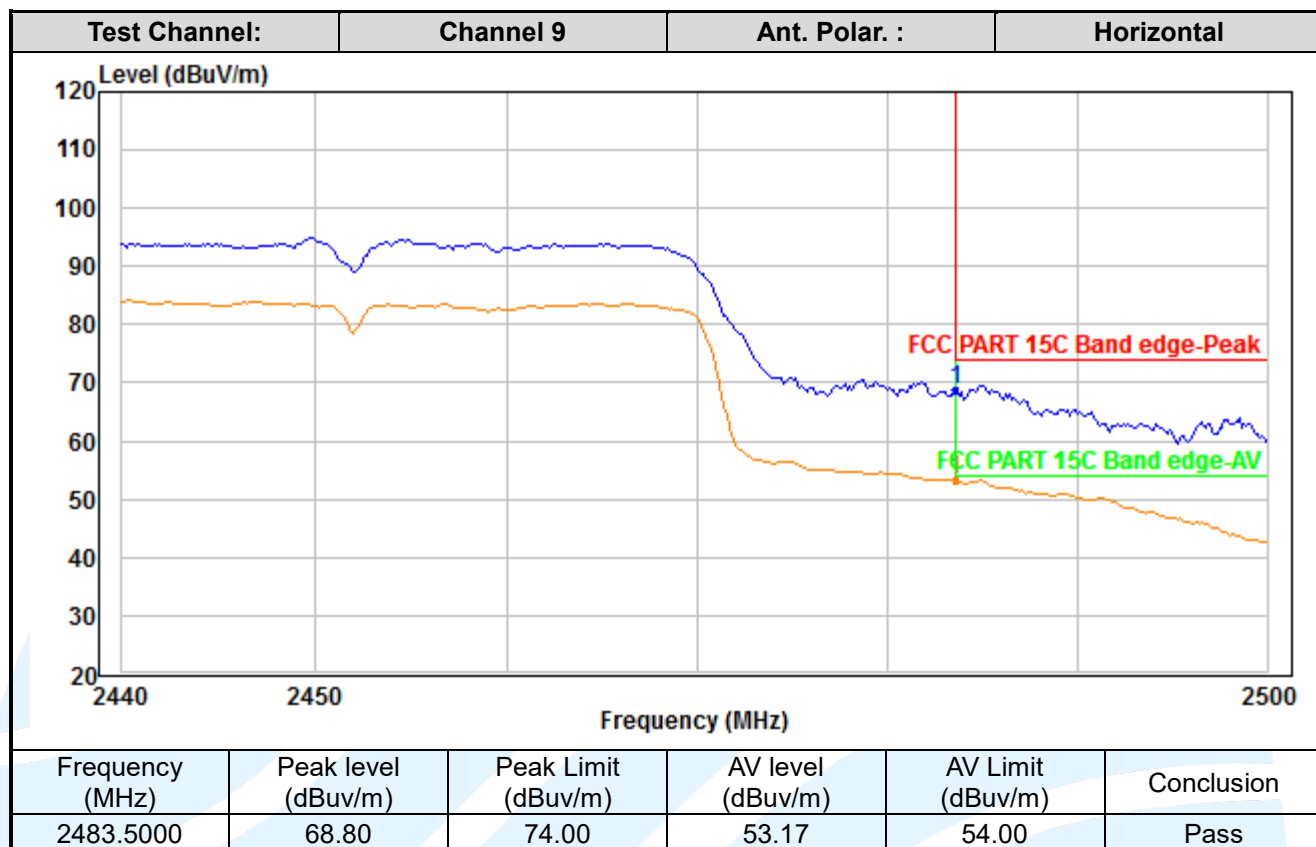

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-RSS247-V1.0

5.9 CONDUCTED EMISSION

Test Requirement: 47 CFR Part 15C Section 15.207
RSS-Gen Issue 5, Section 8.8

Test Method: ANSI C63.10-2013 Section 6.2

Limits:

Frequency range (MHz)	Limits (dB(μV))	
	Quasi-peak	Average
0,15 to 0,50	66 to 56	56 to 46
0,50 to 5	56	46
5 to 30	60	50

Remark:

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 to 0.50 MHz.

Test Setup: Refer to section 4.4.2 for details.

Test Procedures:

Test frequency range :150KHz-30MHz

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 5\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

Equipment Used: Refer to section 3 for details.


Test Result: Pass

The measurement data as follows:

Quasi Peak and Average:


Mode: WIFI Link

Live Line

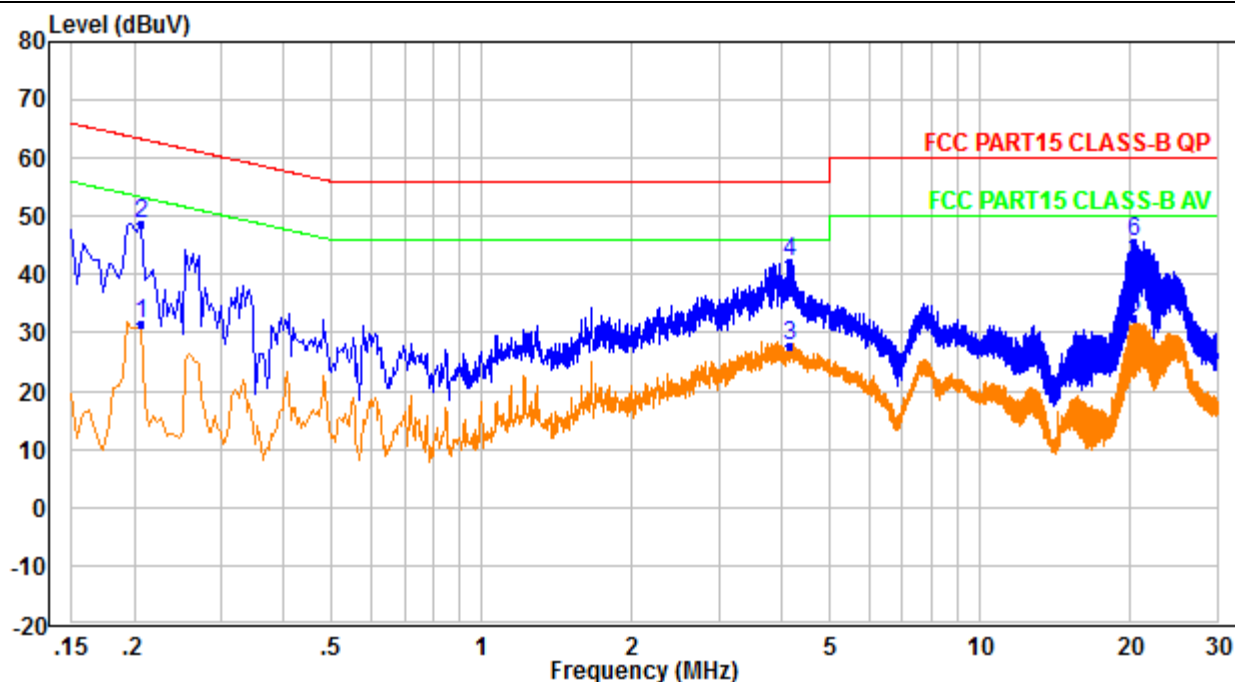

No.	Frequency (MHz)	Reading (dBuV)	Correction factor (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.206	22.53	9.08	31.61	53.37	-21.76	Average
2	0.206	39.76	9.08	48.84	63.37	-14.53	QP
3	4.138	18.32	9.60	27.92	46.00	-18.08	Average
4	4.138	32.48	9.60	42.08	56.00	-13.92	QP
5	20.341	22.55	10.03	32.58	50.00	-17.42	Average
6	20.341	35.62	10.03	45.65	60.00	-14.35	QP

Neutral Line

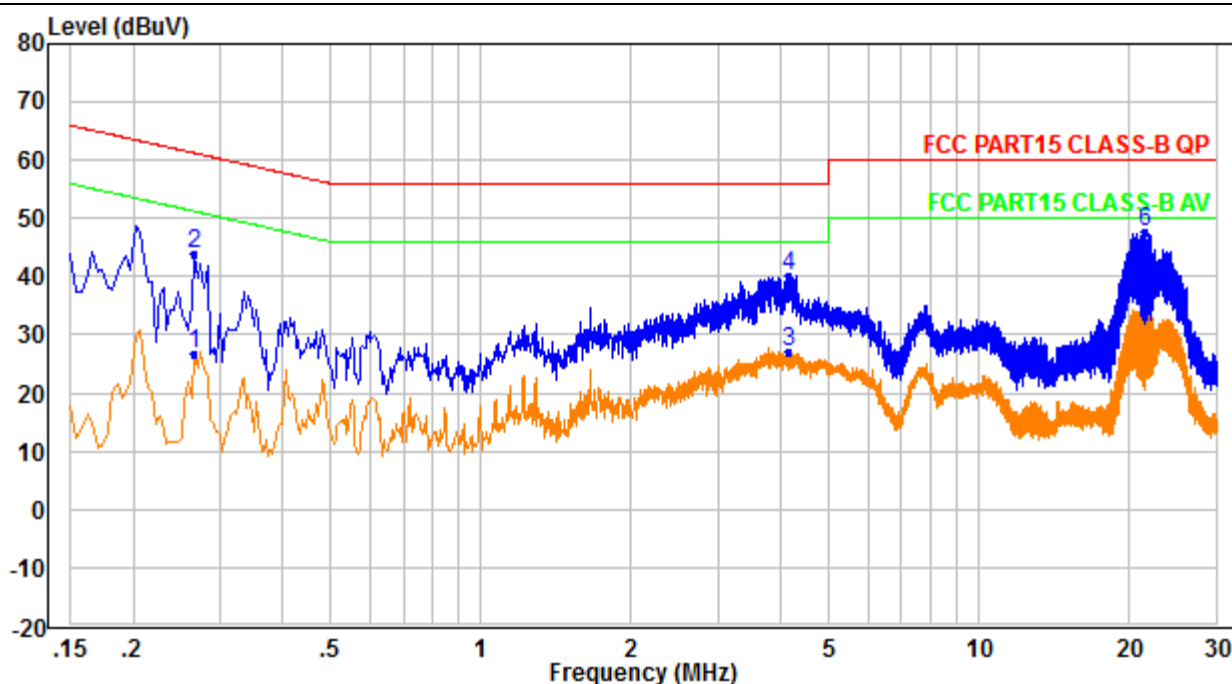

No.	Frequency (MHz)	Reading (dBuV)	Correction factor (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.266	17.75	9.15	26.90	51.24	-24.34	Average
2	0.266	34.82	9.15	43.97	61.24	-17.27	QP
3	4.142	17.32	9.60	26.92	46.00	-19.08	Average
4	4.142	30.58	9.60	40.18	56.00	-15.82	QP
5	21.601	23.22	10.03	33.25	50.00	-16.75	Average
6	21.601	37.73	10.03	47.76	60.00	-12.24	QP

Remark:

1. Correct Factor = LISN Factor + Cable Loss + Pulse Limiter Factor, the value was added to Original Receiver Reading by the software automatically.
2. Result = Reading + Correct Factor.
3. Margin = Result - Limit
4. An initial pre-scan was performed on the Phase and neutral lines with peak detector. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-RSS247-V1.0

APPENDIX 1 PHOTOS OF TEST SETUP

See test photos attached in Appendix 1 for the actual connections between Product and support equipment.

APPENDIX 2 PHOTOS OF EUT CONSTRUCTIONAL DETAILS

Refer to Appendix 2 for EUT external and internal photos.

*** End of Report ***

The test report is effective only with both signature and specialized stamp. The result(s) shown in this report refer only to the sample(s) tested. Without written approval of UnionTrust, this report can't be reproduced except in full.
