

FCC TEST REPORT

Product Name: WIFI Module
Trade Mark: Prowise
Model No.: PW.2.12004.0001
Report Number: 180907005RFC-4
Test Standards: FCC 47 CFR Part 15 Subpart E
FCC ID: 2AQ5RWIFIHS2B56
Test Result: PASS
Date of Issue: March 5, 2019

Prepared for:

Shenzhen KTC Commercial Display Technology CO.,LTD.
No.4023,Northern Wuhe Road,Bantian Street,Longgang
District,Shenzhen City,Guangdong Province,P.R.China

Prepared by:

Shenzhen UnionTrust Quality and Technology Co., Ltd.
16/F, Block A, Building 6, Baoneng Science and Technology Park,
Qingxiang Road No.1, Longhua New District, Shenzhen, China
TEL: +86-755-2823 0888
FAX: +86-755-2823 0886

Tested by: _____

Henry Lu
Project Engineer

Reviewed by: _____

Kevin Liang
Assistant Manager

Approved by: _____

Billy Li
Technical Director

Date: March 5, 2019

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

[Http://www.uttlab.com](http://www.uttlab.com)

Version

Version No.	Date	Description
V1.0	March 5, 2019	Original



Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

[Http://www.uttlab.com](http://www.uttlab.com)

CONTENTS

1. GENERAL INFORMATION	4
1.1 CLIENT INFORMATION	4
1.2 EUT INFORMATION	4
1.2.1 GENERAL DESCRIPTION OF EUT	4
1.2.2 DESCRIPTION OF ACCESSORIES	4
1.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD	4
1.4 OTHER INFORMATION	5
1.5 DESCRIPTION OF SUPPORT UNITS	5
1.6 TEST LOCATION	6
1.7 TEST FACILITY	6
1.8 DEVIATION FROM STANDARDS	6
1.9 ABNORMALITIES FROM STANDARD CONDITIONS	6
1.10 OTHER INFORMATION REQUESTED BY THE CUSTOMER	6
1.11 MEASUREMENT UNCERTAINTY	7
2. TEST SUMMARY	8
3. EQUIPMENT LIST	9
4. TEST CONFIGURATION	10
4.1 ENVIRONMENTAL CONDITIONS FOR TESTING	10
4.1.1 NORMAL OR EXTREME TEST CONDITIONS	10
4.1.2 RECORD OF NORMAL ENVIRONMENT	10
4.2 TEST CHANNELS	11
4.3 EUT TEST STATUS	11
4.4 PRE-SCAN	12
4.4.1 PRE-SCAN UNDER ALL RATES	12
4.4.2 WORST-CASE DATA RATES	12
4.5 TEST SETUP	13
4.5.1 FOR RADIATED EMISSIONS TEST SETUP	13
4.5.2 FOR CONDUCTED EMISSIONS TEST SETUP	14
4.5.3 FOR CONDUCTED RF TEST SETUP	15
4.6 SYSTEM TEST CONFIGURATION	16
4.7 DUTY CYCLE	17
5. RADIO TECHNICAL REQUIREMENTS SPECIFICATION	21
5.1 REFERENCE DOCUMENTS FOR TESTING	21
5.2 ANTENNA REQUIREMENT	21
5.3 26 dB BANDWIDTH	22
5.4 6 dB BANDWIDTH	28
5.5 MAXIMUM CONDUCTED OUTPUT POWER	34
5.6 PEAK POWER SPECTRAL DENSITY	37
5.7 RADIATED EMISSIONS AND BAND EDGE MEASUREMENT	52
5.8 AC POWER LINE CONDUCTED EMISSION	77
APPENDIX 1 PHOTOS OF TEST SETUP	80
APPENDIX 2 PHOTOS OF EUT CONSTRUCTIONAL DETAILS	80

1. GENERAL INFORMATION

1.1 CLIENT INFORMATION

Applicant:	Shenzhen KTC Commercial Display Technology CO.,LTD.
Address of Applicant:	No.4023,Northern Wuhe Road,Bantian Street,Longgang District,Shenzhen City,Guangdong Province,P.R.China
Manufacturer:	Shenzhen KTC Commercial Display Technology CO.,LTD.
Address of Manufacturer:	No.4023,Northern Wuhe Road,Bantian Street,Longgang District,Shenzhen City,Guangdong Province,P.R.China

1.2 EUT INFORMATION

1.2.1 General Description of EUT

Product Name:	WIFI Module		
Model No.:	PW.2.12004.0001		
Trade Mark:	Prowise		
DUT Stage:	Identical Prototype		
EUT Supports Function:	2.4 GHz ISM Band:	IEEE 802.11b/g/n	
		Bluetooth V4.1	
	5 GHz U-NII Bands:	5 150 MHz to 5 250 MHz	IEEE 802.11a/n/ac
		5 725 MHz to 5 850 MHz	IEEE 802.11a/n/ac
Sample Received Date:	September 7, 2018		
Sample Tested Date:	September 7, 2018 to March 1, 2019		

1.2.2 Description of Accessories

None.

1.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD

Frequency Bands:	5150 MHz to 5250 MHz (U-NII-1)
	5 725 MHz to 5 850 MHz (U-NII-3)
Frequency Ranges:	5180 MHz to 5240 MHz
	5 745 MHz to 5 825 MHz
Support Standards:	IEEE 802.11a/n/ac
TPC Function:	Not Support
Type of Modulation:	IEEE 802.11a: OFDM(64QAM, 16QAM, QPSK, BPSK)
	IEEE 802.11n: OFDM(64QAM, 16QAM, QPSK, BPSK)
	IEEE 802.11ac: OFDM(256QAM, 64QAM, 16QAM, QPSK, BPSK)
Channel Spacing:	IEEE 802.11a/n-HT20/ac-VHT20: 20 MHz
	IEEE 802.11n-HT40/ac-VHT40: 40 MHz
	IEEE 802.11ac-VHT80: 80 MHz
Data Rate:	IEEE 802.11a: Up to 54 Mbps
	IEEE 802.11n-HT20: Up to MCS15
	IEEE 802.11n-HT40: Up to MCS15
	IEEE 802.11ac-VHT20: Up to MCS8
	IEEE 802.11ac-VHT40: Up to MCS9
	IEEE 802.11ac-VHT80: Up to MCS9
Number of Channels:	5150 MHz to 5250 MHz: 4 for IEEE 802.11a/n-HT20/ac-VHT20 2 for IEEE 802.11n-HT40/ac-VHT40 1 for IEEE 802.11ac-VHT80

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

[Http://www.uttlab.com](http://www.uttlab.com)

	5725 MHz to 5850 MHz: 5 for IEEE 802.11a/n-HT20/ac-VHT20 2 for IEEE 802.11n-HT40/ac-VHT40 1 for IEEE 802.11ac-VHT80		
Antenna Type:	Chain 0	Diple Antenna	
	Chain 1	Diple Antenna	
Antenna Gain:	Chain 0	5150 MHz to 5250 MHz: 2 dBi	
		5725 MHz to 5850 MHz: 2 dBi	
	Chain 1	5150 MHz to 5250 MHz: 2 dBi	
		5725 MHz to 5850 MHz: 2 dBi	
Maximum conducted output power (dBm):	CDD_Chain 0+1	U-NII-1	U-NII-3
	IEEE 802.11a:	15.12	13.56
	IEEE 802.11n-HT20:	13.43	11.81
	IEEE 802.11n-HT40:	13.25	12.29
	IEEE 802.11ac-VHT20:	13.40	11.44
	IEEE 802.11ac-VHT40:	10.86	10.05
	IEEE 802.11ac-VHT80:	11.02	9.48
Normal Test Voltage:	3.3 Vdc		

1.4 OTHER INFORMATION

Operation Frequency Each of Channel		
	U-NII-1	U-NII-3
IEEE 802.11a, IEEE 802.11n-HT20, IEEE 802.11ac-VHT20	$f = 5000 + 5k, k = 32 + 4n$	$f = 5000 + 5k,$ $k = 145 + 4n$
	$n = 1,..., 4$	$n = 1,..., 5$
IEEE 802.11n-HT40, IEEE 802.11ac-VHT40	$f = 5000 + 5k, k = 30 + 8n$	$f = 5000 + 5k,$ $k = 143 + 8n$
	$n = 1, 2$	$n = 1, 2$
IEEE 802.11ac-VHT80	$f = 5000 + 5k, k = 26 + 16n$	$f = 5000 + 5k,$ $k = 155$
	$n = 1$	
Note: f is the operating frequency (MHz); k is the operating channel.		

1.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested with associated equipment below.

1) Support Equipment

Description	Manufacturer	Model No.	Serial Number	Supplied by
Keyboard	DELL	KB212-B	CN-0N291F-715	UnionTrust
Mouse	DELL	MS111	CN-011D3V-738	UnionTrust
PC	DELL	XPS8900	2015AP3055	UnionTrust
Monitor	DELL	P2416Db	CN-0NDY73-74261-SC9-0LVS	UnionTrust

2) Support Cable

Cable No.	Description	Connector	Length	Supplied by
1	Antenna Cable	SMA	0.30 Meter	UnionTrust

1.6 TEST LOCATION

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China 518109
Telephone: +86 (0) 755 2823 0888
Fax: +86 (0) 755 2823 0886

1.7 TEST FACILITY

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L9069

The measuring equipment utilized to perform the tests documented in this report has been calibrated once a year or in accordance with the manufacturer's recommendations, and is traceable under the ISO/IEC/EN 17025 to international or national standards. Equipment has been calibrated by accredited calibration laboratories.

IC-Registration No.: 21600-1

The 3m Semi-anechoic chamber of Shenzhen UnionTrust Quality and Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 21600-1.

A2LA-Lab Certificate No.: 4312.01

Shenzhen UnionTrust Quality and Technology Co., Ltd. has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC Accredited Lab.

Designation Number: CN1194
Test Firm Registration Number: 259480

1.8 DEVIATION FROM STANDARDS

None.

1.9 ABNORMALITIES FROM STANDARD CONDITIONS

None.

1.10 OTHER INFORMATION REQUESTED BY THE CUSTOMER

None.

1.11 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

No.	Item	Measurement Uncertainty
1	Conducted emission 9KHz-150KHz	± 3.8 dB
2	Conducted emission 150KHz-30MHz	± 3.4 dB
3	Radiated emission 9KHz-30MHz	± 4.9 dB
4	Radiated emission 30MHz-1GHz	± 4.7 dB
5	Radiated emission 1GHz-18GHz	± 5.1 dB
6	Radiated emission 18GHz-26GHz	± 5.2 dB
7	Radiated emission 26GHz-40GHz	± 5.2 dB

2. TEST SUMMARY

FCC 47 CFR Part 15 Subpart E Test Cases			
Test Item	Test Requirement	Test Method	Result
Antenna Requirement	FCC 47 CFR Part 15 Subpart C Section 15.203 FCC 47 CFR Part 15 Subpart C Section 15.407(a)(1) (2)	N/A	PASS
26 dB emission bandwidth	FCC 47 CFR Part 15 Subpart E Section 15.407 (a)(2)(5)	KDB 789033 D02 v02r01 Section C.1	PASS
6 dB bandwidth	FCC 47 CFR Part 15 Subpart E Section 15.407 (e)	KDB 789033 D02 v02r01 Section C.2	PASS
Maximum conducted output power	FCC 47 CFR Part 15 Subpart E Section 15.407 (a)(1)(3)	KDB 789033 D02 v02r01 Section E.3.a (Method PM)	PASS
Peak Power Spectral Density	FCC 47 CFR Part 15 Subpart E Section 15.407 (a)(1)(3)	KDB 789033 D02 v02r01 Section F	PASS
Radiated Emissions and Band Edge Measurement	FCC 47 CFR Part 15 Subpart E Section 15.407 (b)(1)(4)(6) FCC 47 CFR Part 15 Subpart C Section 15.209/205	KDB 789033 D02 v02r01 Section G.3, G.4, G.5, and G.6	PASS
Dynamic Frequency Selection	FCC 47 CFR Part 15 Subpart E Section 15.407 (h)	KDB 905462 D03 Client Without DFS New Rules v01r02	N/A (Note 1, 2)
AC Power Line Conducted Emission	FCC 47 CFR Part 15 Subpart E Section 15.407 (b)(6) FCC 47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013, Section 6.2.	PASS
Note: 1) N/A: In this whole report not application. 2) This EUT does not support U-NII-2A and U-NII-2C frequency bands.			

3. EQUIPMENT LIST

Radiated Emission Test Equipment List						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm dd, yyyy)	Cal. Due date (mm dd, yyyy)
☒	3M Chamber & Accessory Equipment	ETS-LINDGREN	3M	N/A	Dec. 20, 2015	Dec. 19, 2018
☒	Receiver	R&S	ESIB26	100114	Dec. 10, 2017	Dec. 10, 2018
☒	EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY51440197	Dec.10, 2017	Dec. 10, 2018
☒	Loop Antenna	ETS-LINDGREN	6502	00202525	Dec. 22, 2017	Dec. 22, 2018
☒	Broadband Antenna	ETS-LINDGREN	3142E	00201566	Dec. 17, 2017	Dec. 17, 2018
☒	Preamplifier	HP	8447F	2805A02960	Dec. 10, 2017	Dec. 10, 2018
☒	Horn Antenna (Pre-amplifier)	ETS-LINDGREN	3117-PA	00201874	May 22, 2018	May 22, 2019
☒	Horn Antenna (Pre-amplifier)	ETS-LINDGREN	3116C-PA	00202652	Dec. 17, 2017	Dec. 17, 2018
☒	Multi device Controller	ETS-LINDGREN	7006-001	00160105	N/A	N/A
☒	Band Rejection Filter (5150MHz~5880MHz)	Micro-Tronics	BRM50716	G1868	June 06, 2018	June 06, 2019
☒	Test Software	Audix	e3	Software Version: 9.160323		

Conducted Emission Test Equipment List						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm dd, yyyy)	Cal. Due date (mm dd, yyyy)
☒	Receiver	R&S	ESR7	1316.3003K07-101181-K3	Nov. 24, 2018	Nov. 24, 2019
☒	Pulse Limiter	R&S	ESH3-Z2	0357.8810.54	Nov. 24, 2018	Nov. 24, 2019
☒	LISN	R&S	ESH2-Z5	860014/024	Nov. 24, 2018	Nov. 24, 2019
☒	LISN	ETS-Lindgren	3816/2SH	00201088	Nov. 24, 2018	Nov. 24, 2019
☒	Test Software	Audix	e3	Software Version: 9.160323		

Conducted RF test Equipment List						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm dd, yyyy)	Cal. Due date (mm dd, yyyy)
☒	EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY51440197	Dec.10, 2017	Dec. 10, 2018
☒	USB Wideband Power Sensor	KEYSIGHT	U2021XA	MY55430035	Dec. 10, 2017	Dec. 10, 2018
☒	USB Wideband Power Sensor	KEYSIGHT	U2021XA	MY55430023	Dec. 10, 2017	Dec. 10, 2018

4. TEST CONFIGURATION

4.1 ENVIRONMENTAL CONDITIONS FOR TESTING

4.1.1 Normal or Extreme Test Conditions

Environment Parameter	Selected Values During Tests		
Test Condition	Ambient		
	Temperature (°C)	Voltage	Relative Humidity (%)
NT/NV	+15 to +35	3.3Vdc	20 to 75
Remark: 1) NV: Normal Voltage; NT: Normal Temperature			

4.1.2 Record of Normal Environment

Test Item	Temperature (°C)	Relative Humidity (%)	Pressure (kPa)	Tested by
26 dB emission bandwidth	23.4	51	99.8	Terence Chen
Maximum conducted output power	23.4	51	99.8	Terence Chen
Peak Power Spectral Density	23.4	51	99.8	Terence Chen
6 dB bandwidth	23.4	51	99.8	Terence Chen
Radiated Emissions and Band Edge Measurement	25.8	46	99.8	Tony Kang
AC Power Line Conducted Emission	22.4	45	99.8	Gemini Huang

4.2 TEST CHANNELS

Mode	Tx/Rx Frequency	Test RF Channel Lists		
		Lowest(L)	Middle(M)	Highest(H)
IEEE 802.11a IEEE 802.11n-HT20 IEEE 802.11ac-VHT20	5150 MHz to 5250 MHz	Channel 36	Channel 44	Channel 48
		5180 MHz	5220 MHz	5240 MHz
		5500 MHz	5580 MHz	5700 MHz
	5725 MHz to 5850 MHz	Channel 149	Channel 157	Channel 165
		5745 MHz	5785 MHz	5825 MHz
IEEE 802.11n-HT40 IEEE 802.11ac-VHT40	5150 MHz to 5250 MHz	Channel 38	--	Channel 46
		5190 MHz	--	5230 MHz
	5725 MHz to 5850 MHz	Channel 151	--	Channel 159
		5755 MHz	--	5795 MHz
IEEE 802.11ac-VHT80	5150 MHz to 5250 MHz	--	Channel 42	--
		--	5210 MHz	--
	5725 MHz to 5850 MHz	--	Channel 155	--
		--	5775 MHz	--

4.3 EUT TEST STATUS

Mode	Tx/Rx Function	Description
IEEE 802.11a/n/ac	1Tx/1Rx or 2Tx/2Rx	1. Keep the EUT in transmitting mode with all kind of modulation and all kind of data rate.

Power Setting		
	U-NII-1	U-NII-3
IEEE 802.11a	55	60
IEEE 802.11n-HT20	47	52
IEEE 802.11n-HT40	45	51
IEEE 802.11ac-VHT20	45	51
IEEE 802.11ac-VHT40	35	43
IEEE 802.11ac-VHT80	38	42

Test Software
Test software name: MTTOOL

4.4 PRE-SCAN

4.4.1 Pre-scan under all rates

Mode and Frequency	Maximum Conducted Average Power (dBm) for Data Rates (Mbps)							
IEEE 802.11a 5180 MHz	6	9	12	18	24	36	48	54
	11.43	11.37	11.31	11.26	11.21	11.13	10.89	10.65
IEEE 802.11n-HT20 5180 MHz	MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
	9.59	9.51	9.49	9.41	9.41	9.34	9.31	9.22
	MCS8	MCS9	MCS10	MCS11	MCS12	MCS13	MCS14	MCS15
IEEE 802.11n-HT40 5190 MHz	9.21	9.19	9.15	9.11	9.02	8.82	8.77	8.66
	MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
	9.21	9.17	9.17	9.11	9.05	8.89	8.81	8.78
IEEE 802.11ac-VHT20 5180 MHz	MCS8	MCS9	MCS10	MCS11	MCS12	MCS13	MCS14	MCS15
	8.76	8.71	8.57	8.43	8.35	8.21	8.09	7.98
	MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
IEEE 802.11ac-VHT40 5190 MHz	10.52	10.47	10.41	10.36	10.31	10.27	10.21	10.17
	MCS8							
	10.11							
IEEE 802.11ac-VHT80 5210 MHz	MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
	7.35	7.31	7.25	7.21	7.11	7.05	6.89	6.78
	MCS8	MCS9						
IEEE 802.11ac-VHT80 5210 MHz	6.75	6.54						
	MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
	7.14	7.11	7.04	6.87	6.81	6.77	6.69	6.56
IEEE 802.11ac-VHT80 5210 MHz	MCS8	MCS9						
	6.46	6.37						

4.4.2 Worst-case data rates

Mode	Worst-case data rates
IEEE 802.11a	6 Mbps
IEEE 802.11n-HT20	MCS0
IEEE 802.11n-HT40	MCS0
IEEE 802.11ac-VHT20	MCS0
IEEE 802.11ac-VHT40	MCS0
IEEE 802.11ac-VHT80	MCS0

4.5 TEST SETUP

4.5.1 For Radiated Emissions test setup

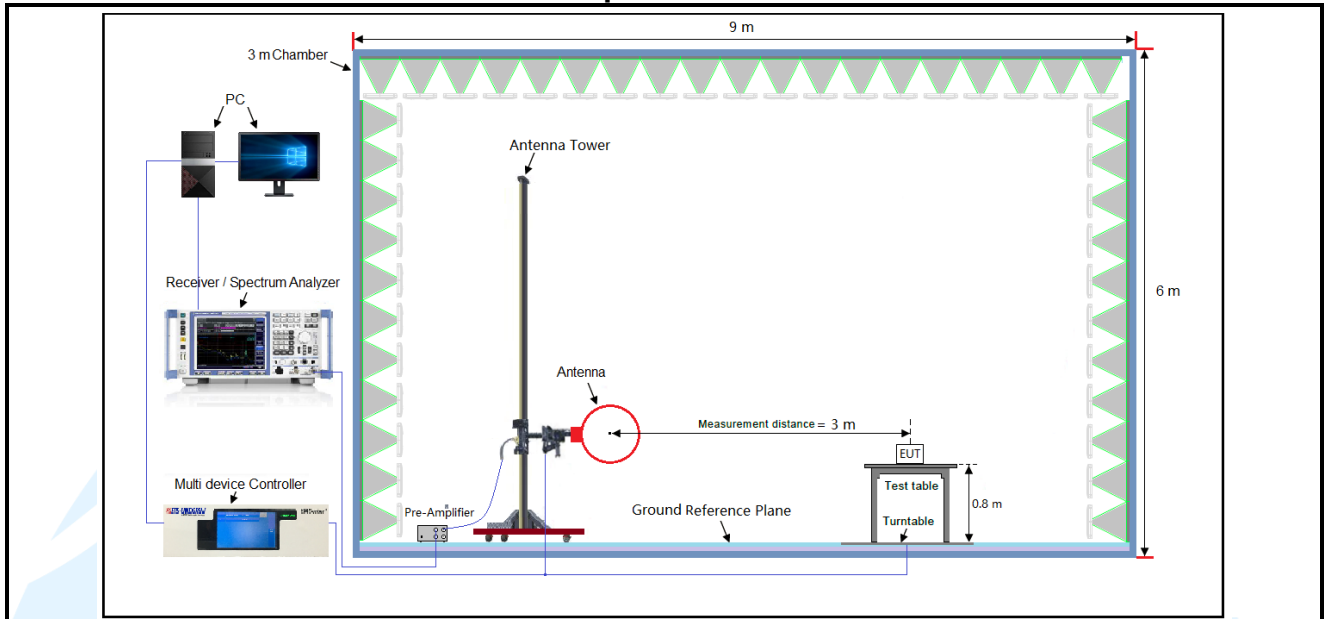


Figure 1. Below 30MHz



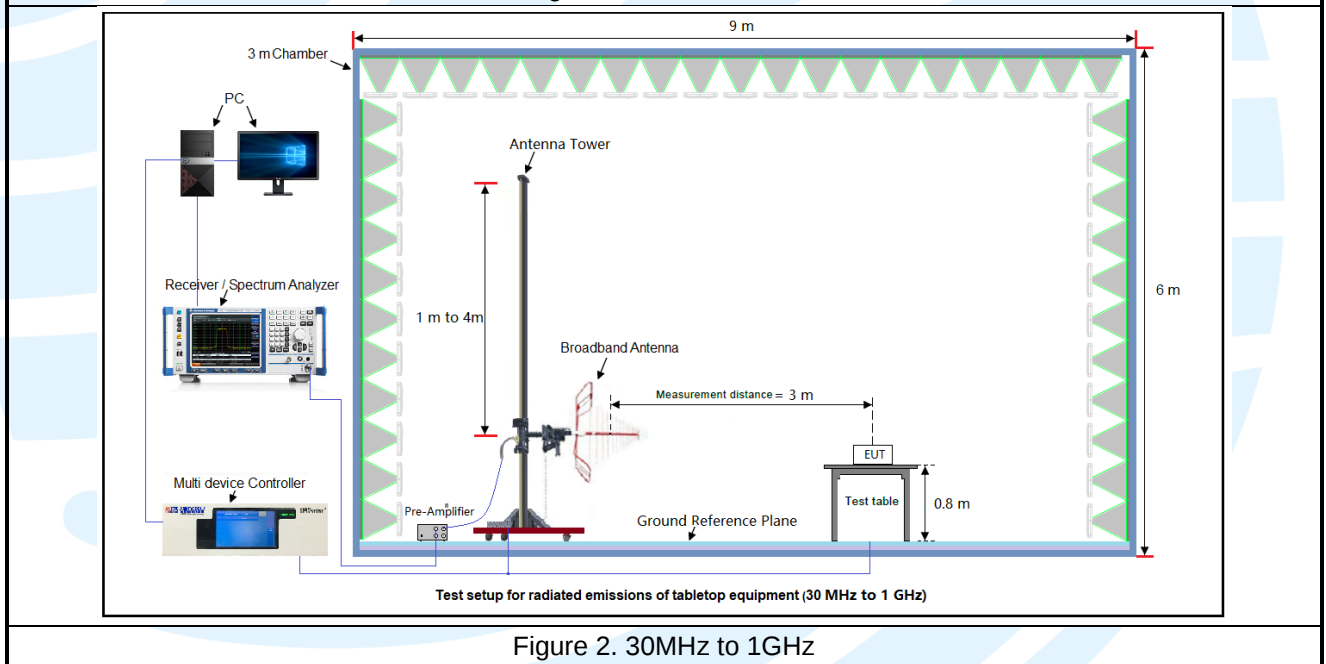



Figure 2. 30MHz to 1GHz

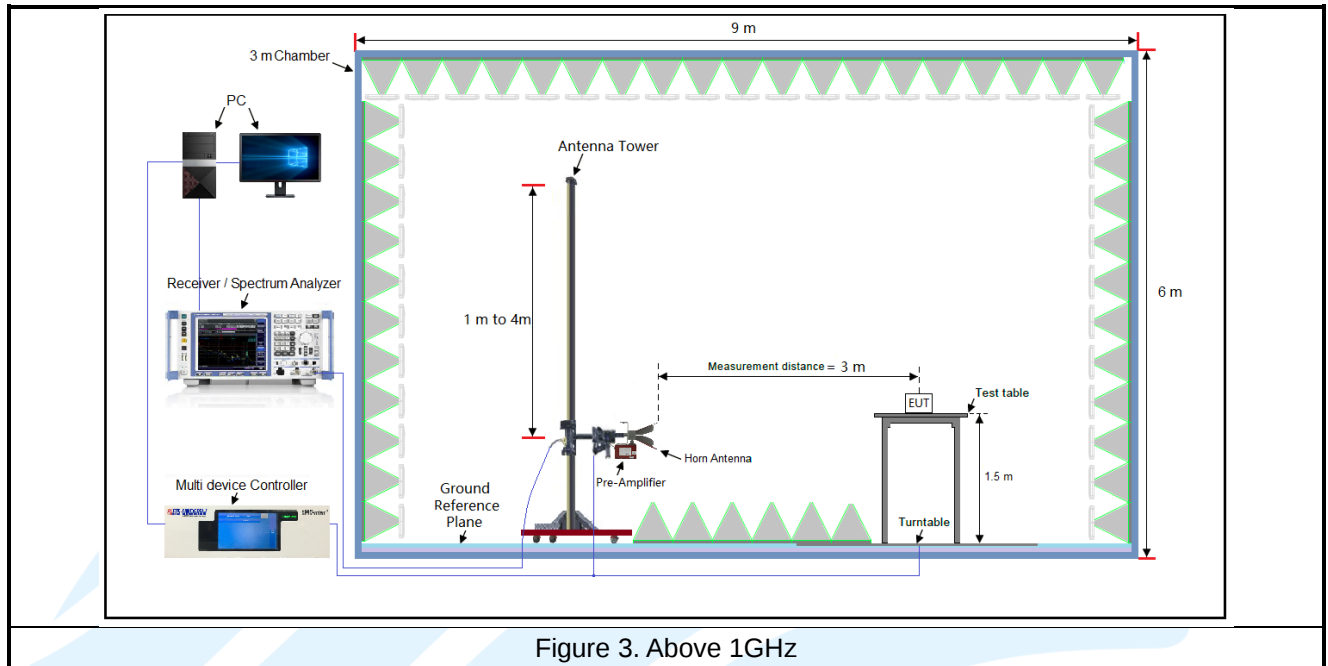

4.5.2 For Conducted Emissions test setup

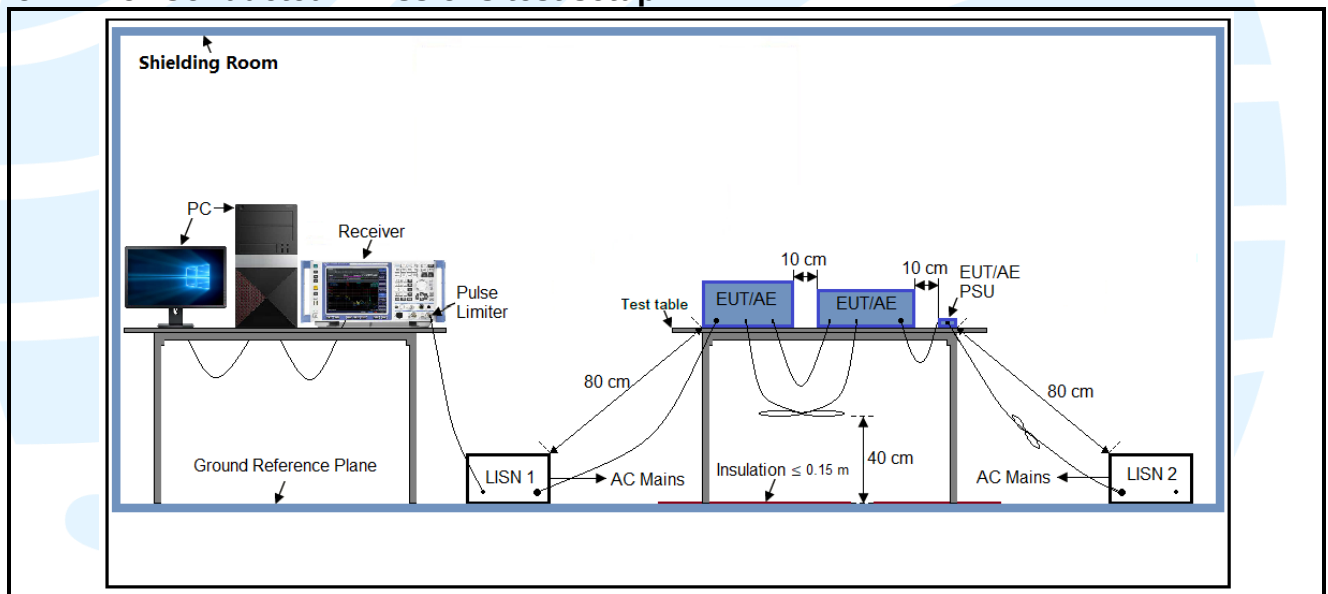

4.5.3 For Conducted RF test setup

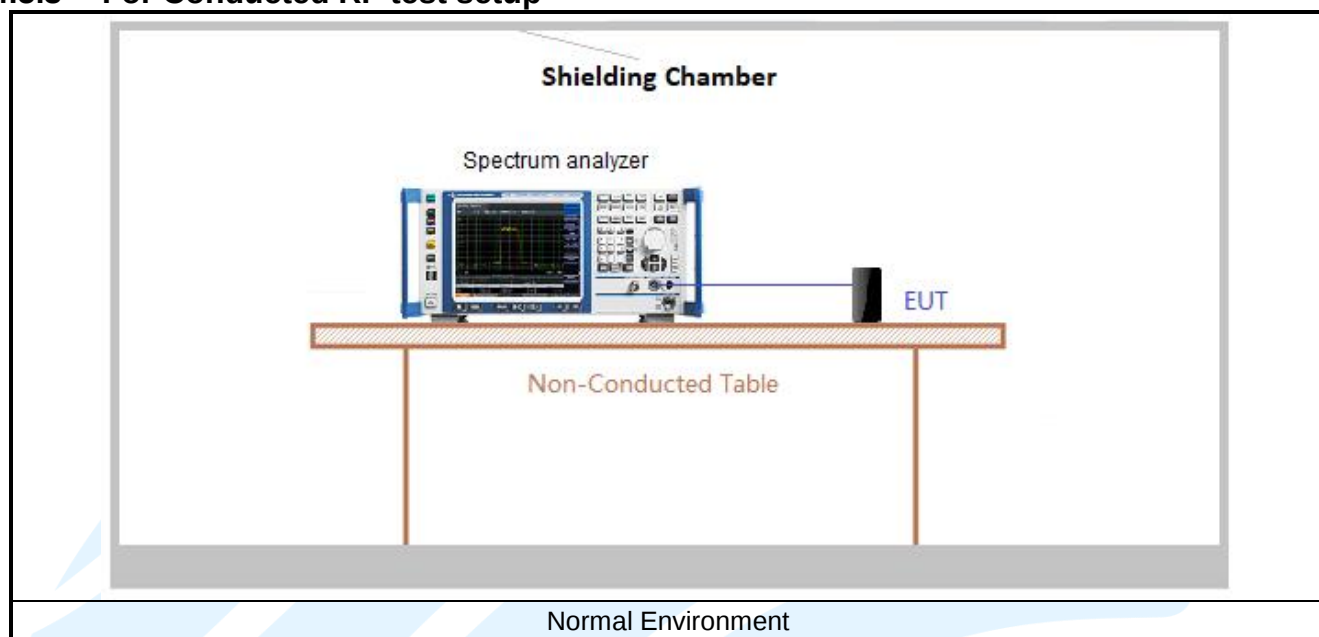

4.6 SYSTEM TEST CONFIGURATION

For emissions testing, the equipment under test (EUT) setup to transmit continuously to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing. During testing, radiated emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario. It was powered by a 3.3V circuit board. Only the worst case data were recorded in this test report.

The signal is maximized through rotation and placement in the three orthogonal axes. The antenna height and polarization are varied during the search for maximum signal level. The antenna height is varied from 1 to 4 meters. Radiated emissions are taken at three meters unless the signal level is too low for measurement at that distance. If necessary, a pre-amplifier is used and/or the test is conducted at a closer distance. Therefore, all final radiated testing was performed with the EUT in (see table below) orientation.

Frequency	Mode	Antenna Port	Worst-case axis positioning
Above 1GHz	2TX	Chain 0+1	Y axis

All readings are extrapolated back to the equivalent three meter reading using inverse scaling with distance. Analyzer resolution is 100 kHz or greater for frequencies below 1000 MHz. The resolution is 1 MHz or greater for frequencies above 1000 MHz. The spurious emissions more than 20 dB below the permissible value are not reported.

Radiated emission measurement were performed from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

4.7 DUTY CYCLE

Test Procedure: ANSI C63.10-2013 Clause 12.2.


Test Results



Mode	Data rates (Mbps)	On Time (msec)	Period (msec)	Duty Cycle (linear)	Duty Cycle (%)	Duty Cycle Factor (dB)	1/ T Minimum VBW (kHz)	Average Factor (dB)
IEEE 802.11a	6	2.06	2.17	0.95	95.03	0.22	0.48	-0.44
IEEE 802.11n-HT20	MCS0	1.92	2.02	0.95	95.00	0.22	0.52	-0.45
IEEE 802.11n-HT40	MCS0	0.94	1.05	0.90	90.32	0.44	1.06	-0.88
IEEE 802.11ac-VHT20	MCS0	1.93	1.96	0.98	98.47	0.00	0.01	-0.13
IEEE 802.11ac-VHT40	MCS0	0.95	0.98	0.97	96.99	0.13	1.05	-0.27
IEEE 802.11ac-VHT80	MCS0	0.46	0.49	0.94	93.88	0.27	2.17	-0.55



Remark:


- 1) Duty cycle= On Time/ Period;
- 2) Duty Cycle factor = $10 * \log(1/ \text{Duty cycle})$;
- 3) Average factor = $20 \log_{10} \text{Duty Cycle}$.

The test plots as follows

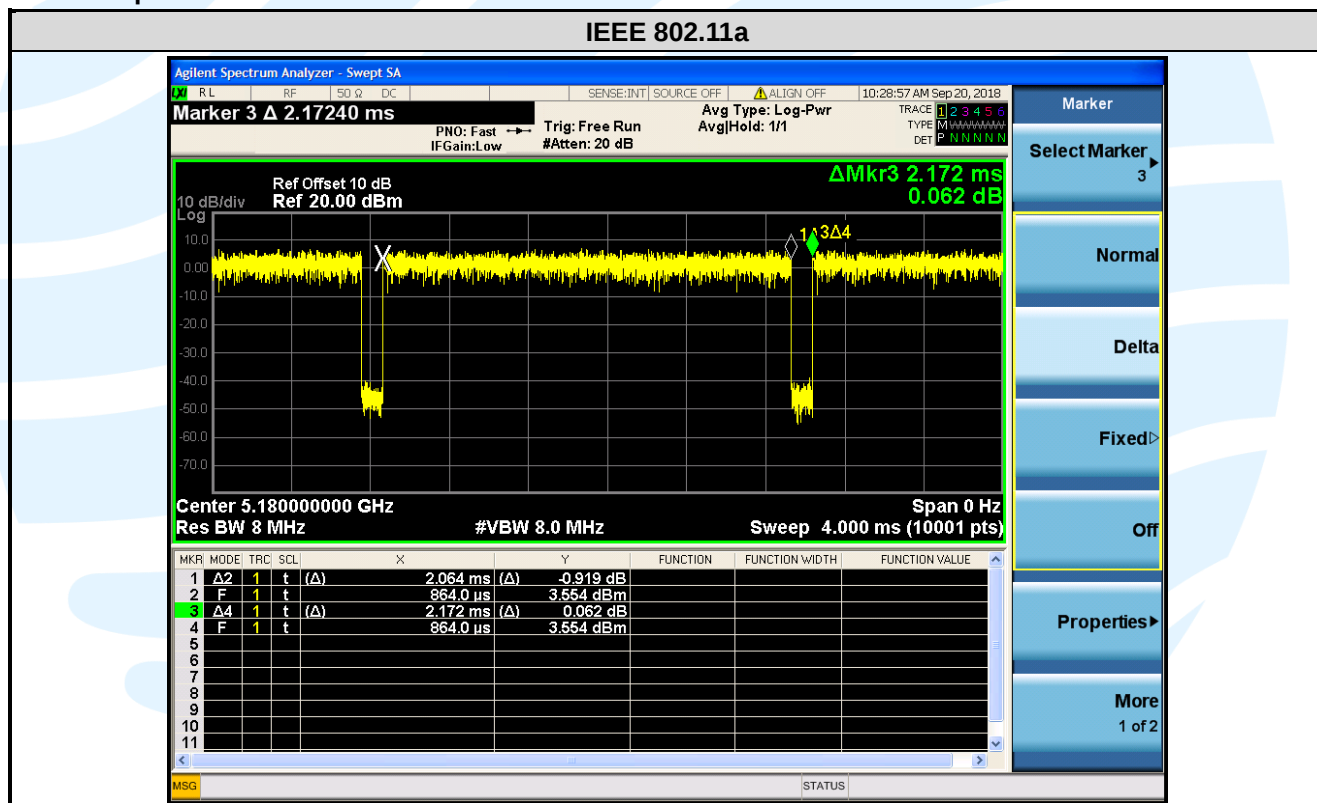

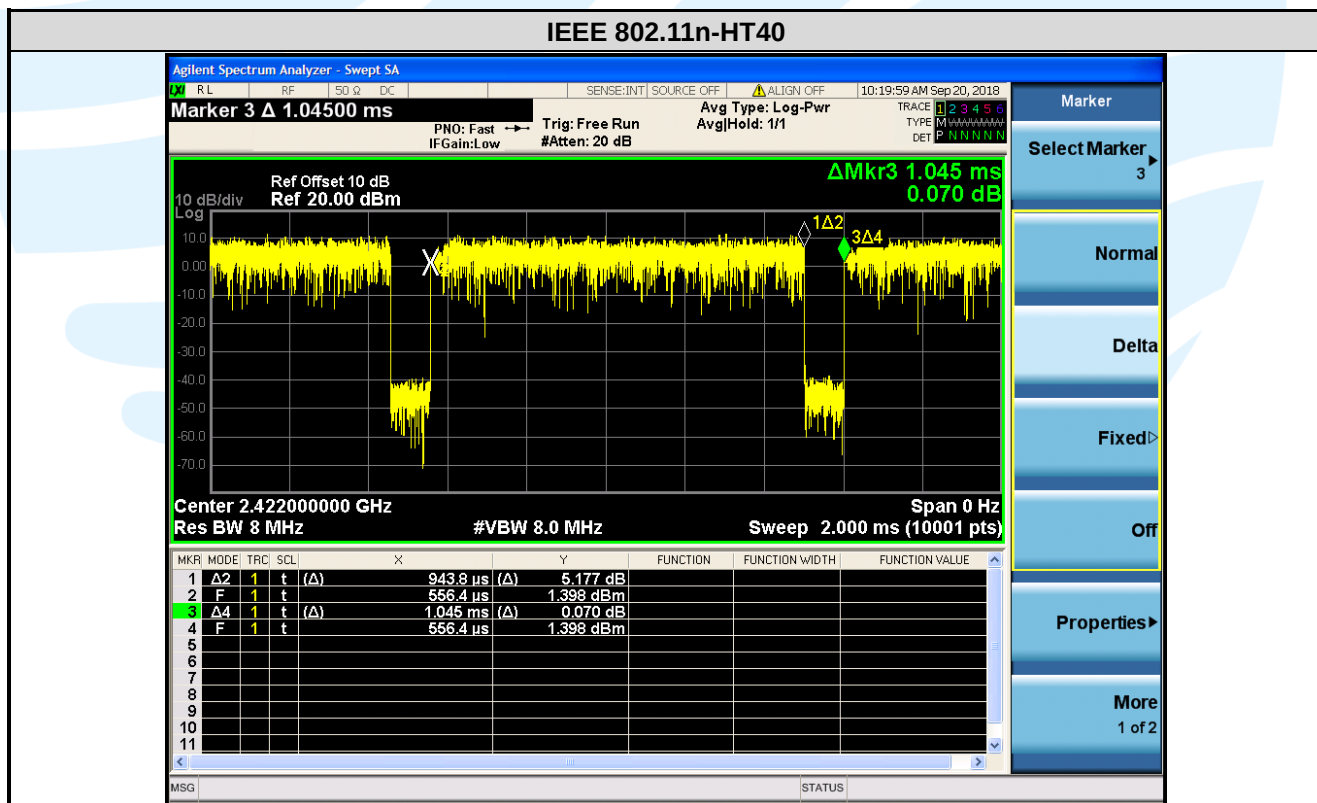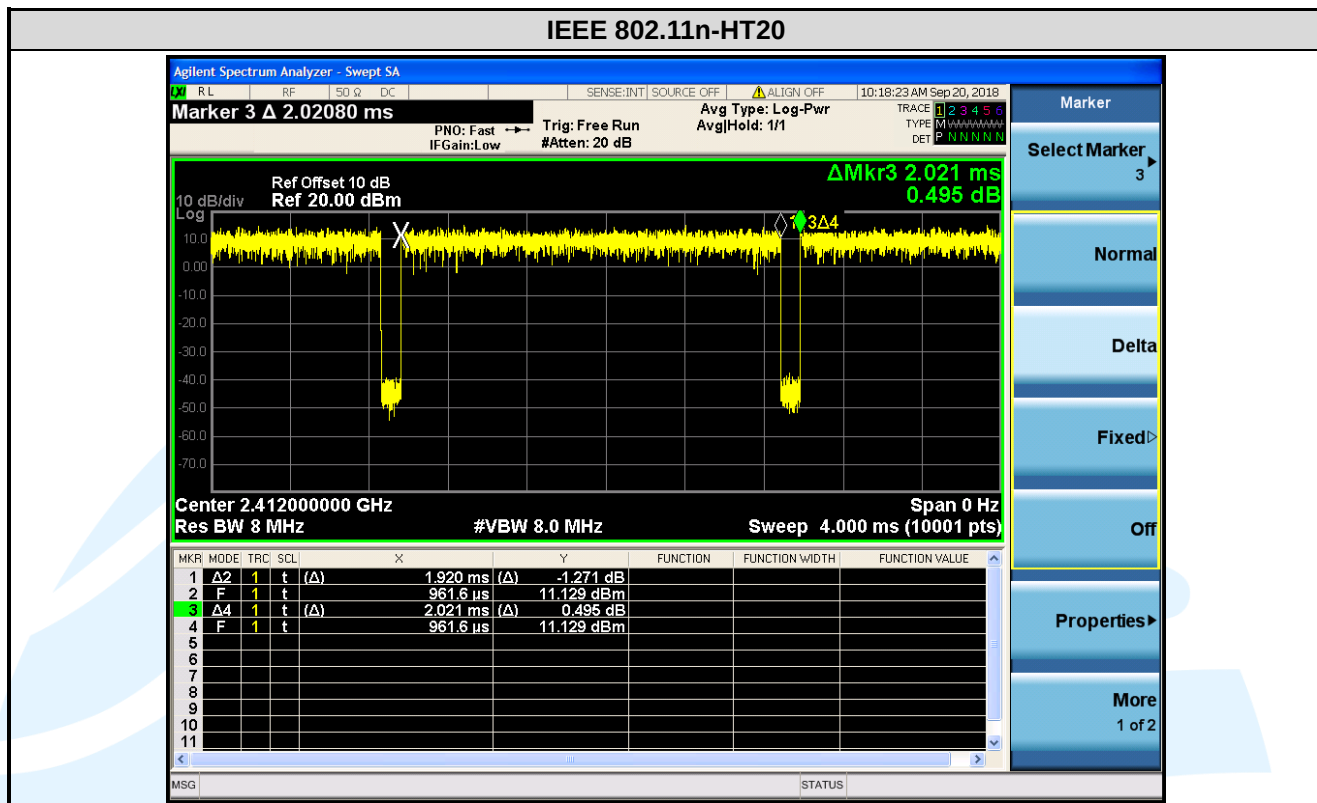

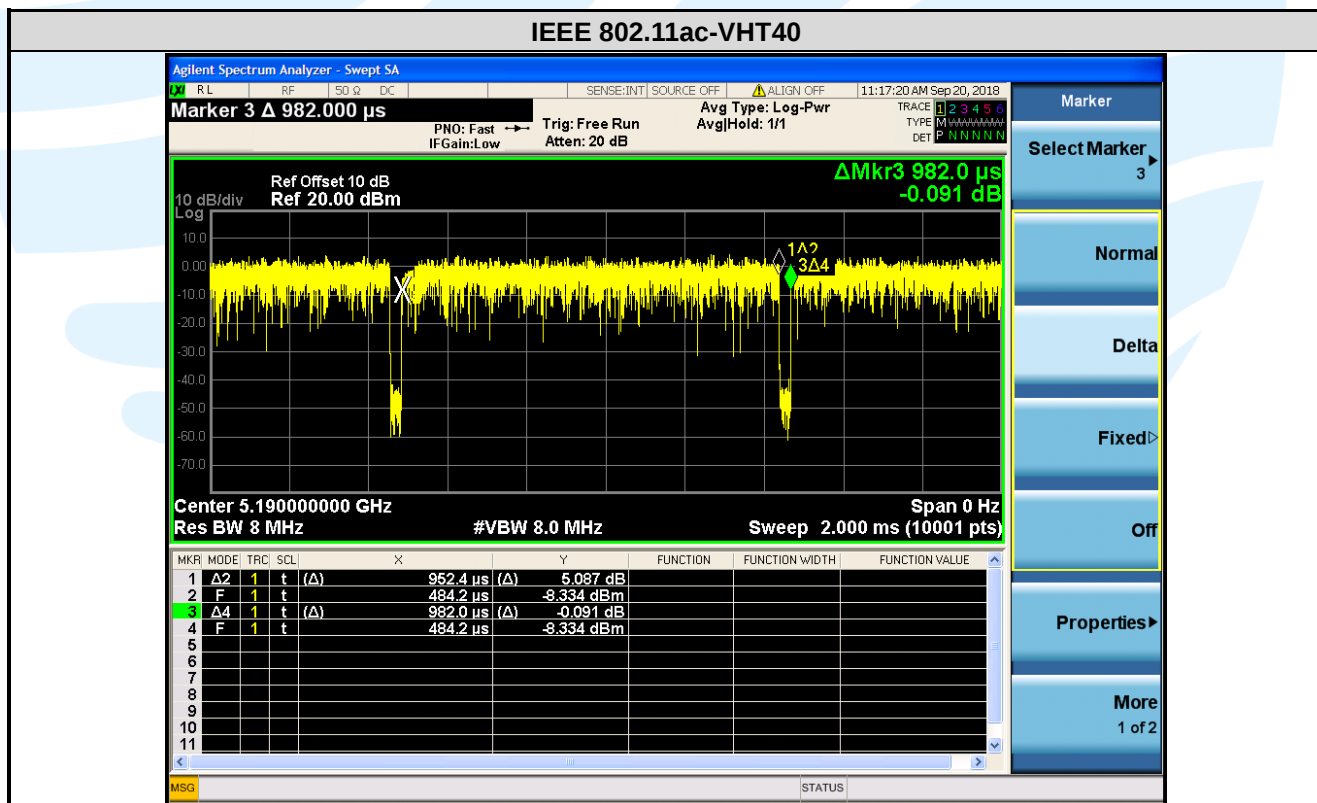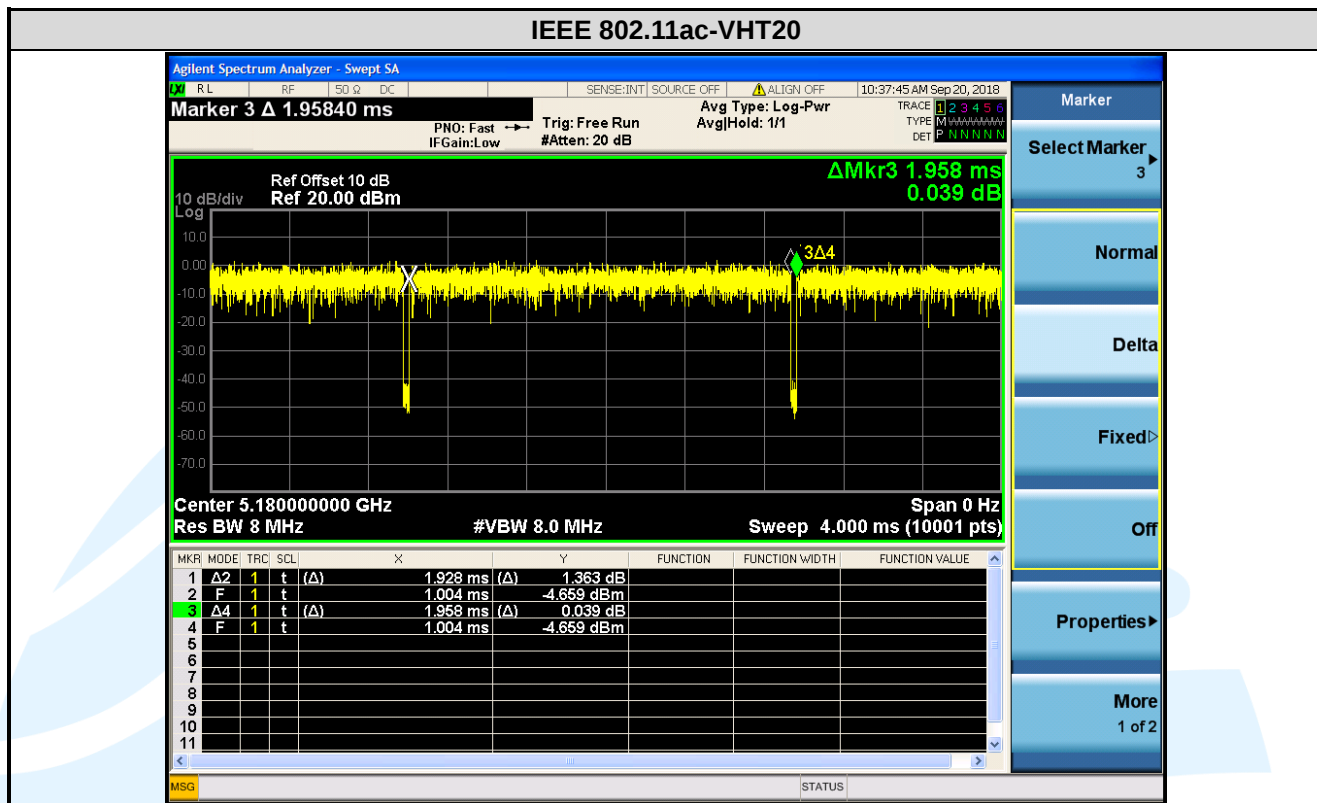

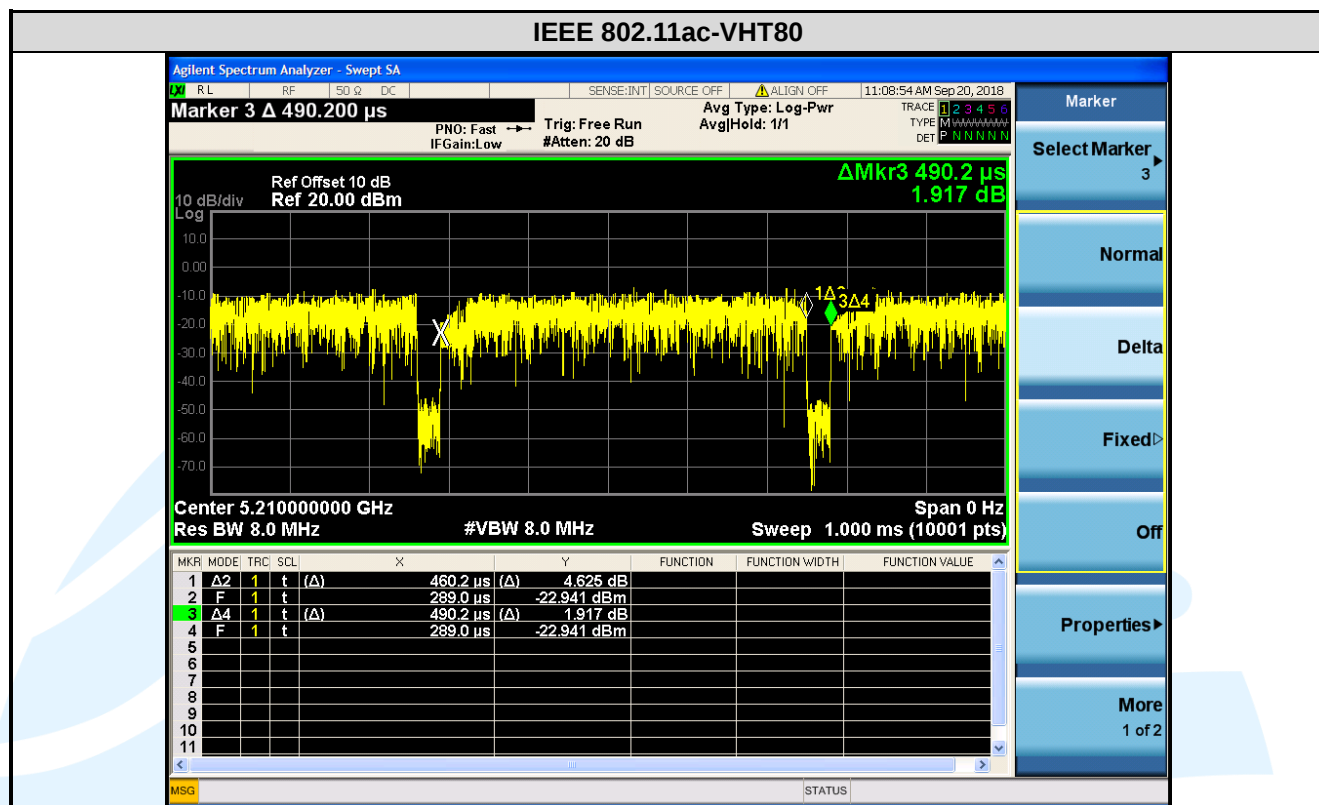

5. RADIO TECHNICAL REQUIREMENTS SPECIFICATION

5.1 REFERENCE DOCUMENTS FOR TESTING

No.	Identity	Document Title
1	FCC 47 CFR Part 2	Frequency allocations and radio treaty matters; general rules and regulations
2	FCC 47 CFR Part 15	Radio Frequency Devices
3	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices
4	KDB 789033 D02 General UNII Test Procedures New Rules v02r01	Guidelines for compliance testing of unlicensed national information infrastructure (U-NII) device part 15, subpart E
5	KDB 905462 D06 802.11 Channel Plans New Rules v02	Operation in U-NII bands -802.11 channel PLAN(\$15.407)
6	KDB 905462 D03 Client Without DFS New Rules v01r02	U-NII client devices without radar detection capability
7	KDB 662911 D01 Multiple Transmitter Output v02r01	Emissions Testing of Transmitters with Multiple Outputs in the Same Band

5.2 ANTENNA REQUIREMENT

Standard Requirement
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.407(a)(1) (2) requirement: The conducted output power limit specified in paragraph (a) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (a) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power and the peak power spectral density shall be reduced by the by the amount in dB that the directional gain of the antenna exceeds 6 dBi. EUT Antenna: Antenna connectors is RP-SMA. The transmit signals are correlated with each other and the antenna gain of both chains is completely consistent, the best case directional gain of the antenna is 5.01 dBi (See section 5.5).

5.326 DB BANDWIDTH

Test Requirement: FCC 47 CFR Part 15 Subpart E Section 15.407 (a) (2)(5)

Test Method: KDB 789033 D02 v02r01 Section C.1

Limit: None; for reporting purposes only.

Test Procedure:

The output from the transmitter was connected to an attenuator and then to the input of the RF Spectrum analyzer.

Spectrum analyzer according to the following Settings:

a) Set RBW = approximately 1 % of the emission bandwidth.

b) Set the VBW > RBW.

c) Detector = Peak.

d) Trace mode = max hold.

e) Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1 %.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

Test Setup: Refer to section 4.5.3 for details.


Instruments Used: Refer to section 3 for details


Test Mode: Transmitter mode


Test Results: Pass


Mode	Channel	26 dB Bandwidth (MHz)		99% Bandwidth (MHz)	
		Chain 0	Chain 1	Chain 0	Chain 1
IEEE 802.11a	36 (5180)	21.63	21.65	17.016	17.057
	44 (5220)	21.52	21.66	16.928	16.948
	48 (5240)	21.54	21.38	16.988	16.949
IEEE 802.11n-HT20	36 (5180)	21.86	21.81	18.106	18.052
	44 (5220)	21.90	21.72	18.120	18.011
	48 (5240)	21.87	21.88	18.125	18.004
IEEE 802.11n-HT40	38 (5190)	40.12	39.49	36.377	36.295
	46 (5230)	40.26	40.02	36.376	36.396
IEEE 802.11ac-VHT20	36 (5180)	21.85	21.65	18.146	17.983
	44 (5220)	22.02	21.91	18.127	18.039
	48 (5240)	21.86	21.86	18.145	17.997
IEEE 802.11ac-VHT40	38 (5190)	39.54	39.53	36.319	36.318
	46 (5230)	39.27	39.29	36.363	36.360
IEEE 802.11ac-VHT80	42 (5210)	82.60	82.16	75.772	75.863


The test plots as follows:

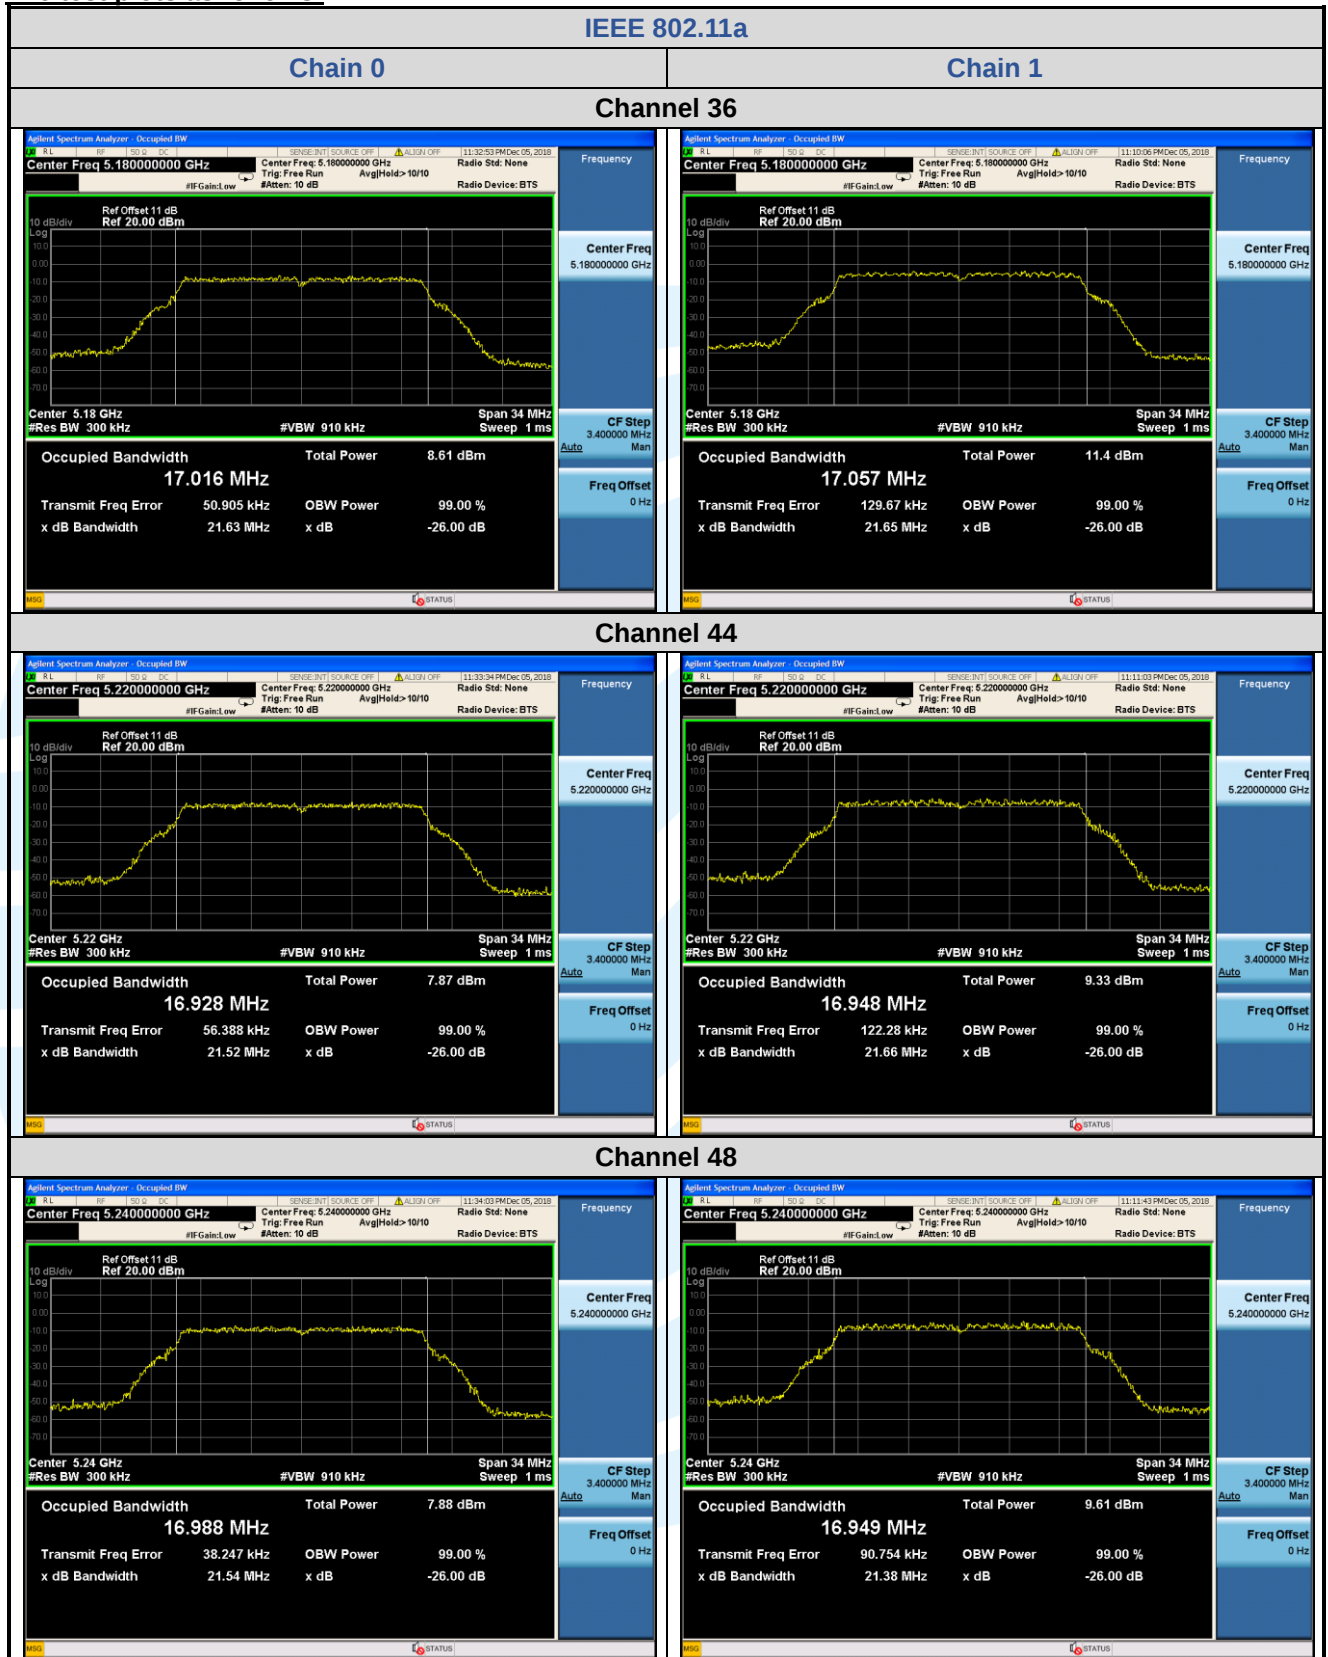

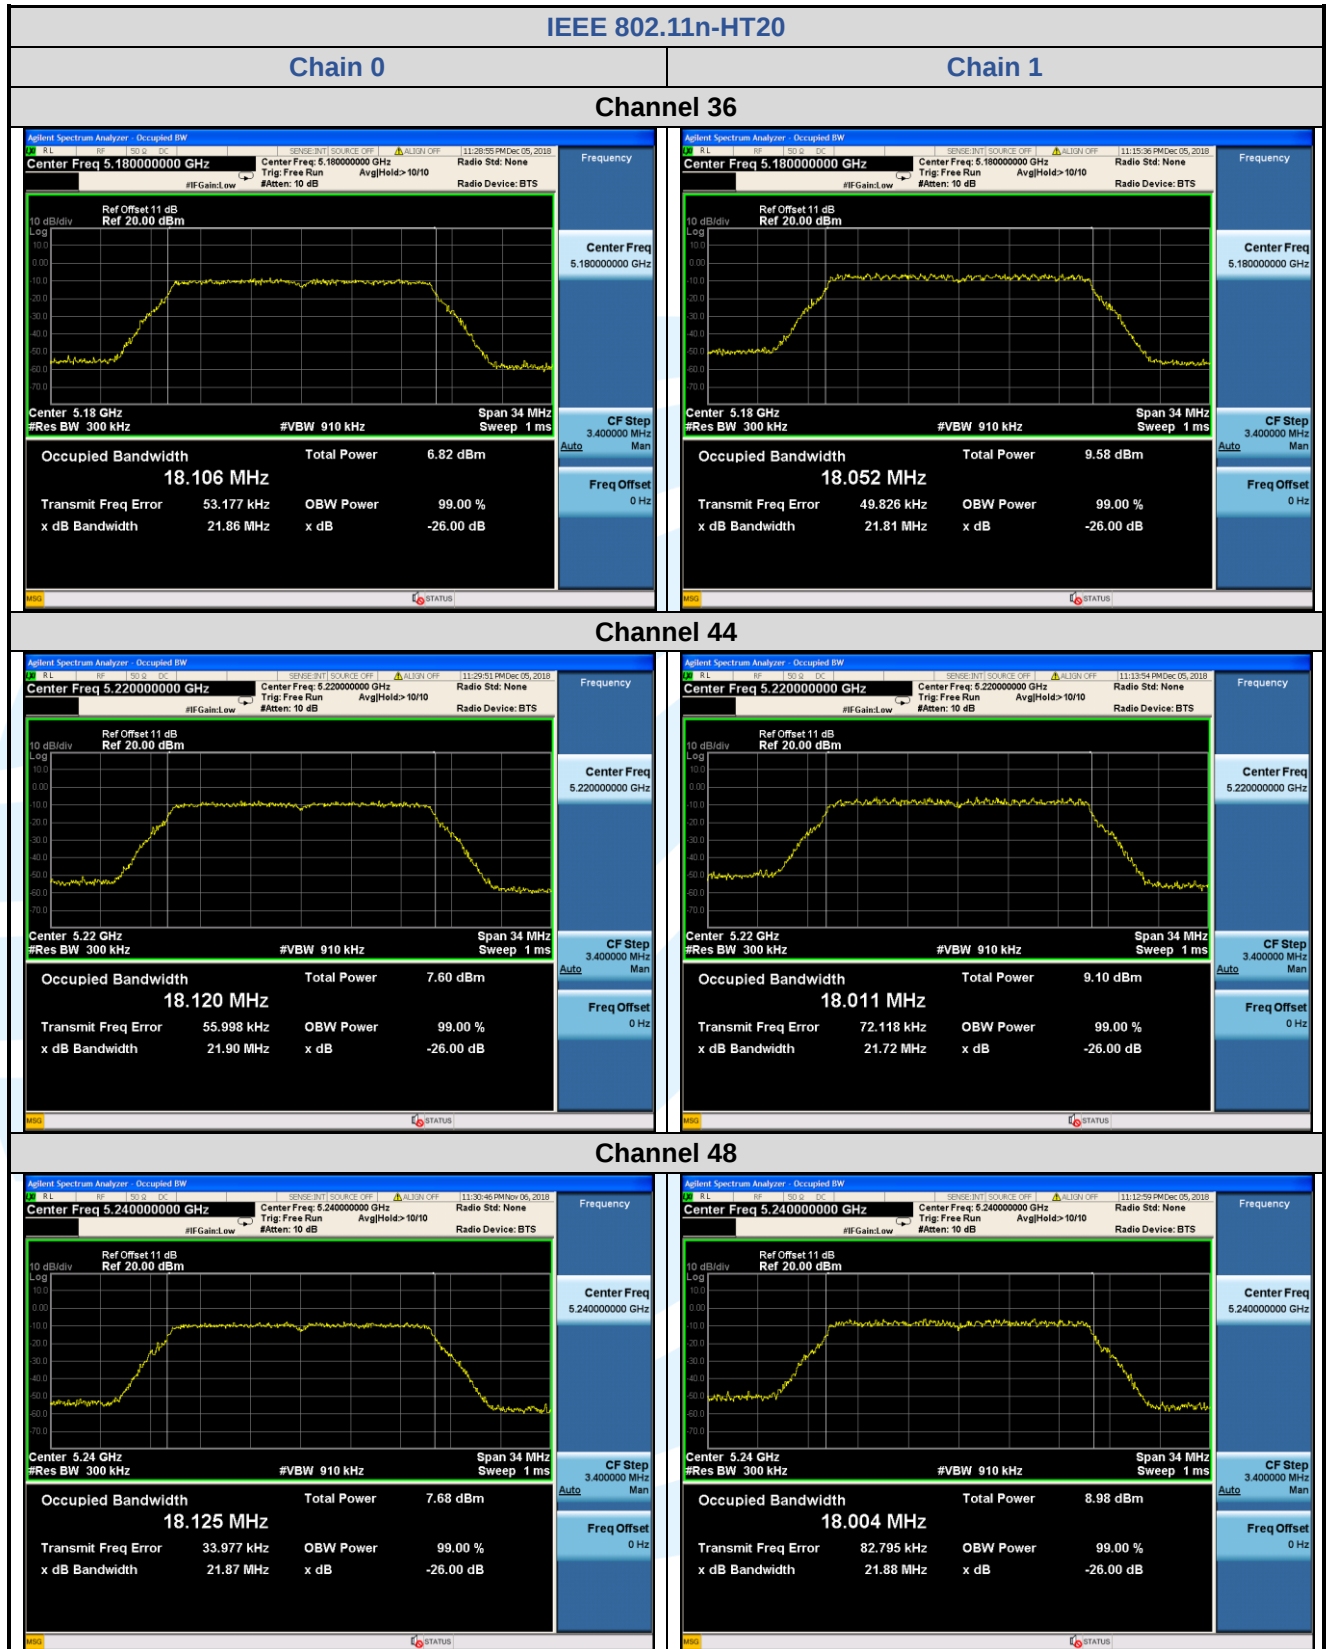

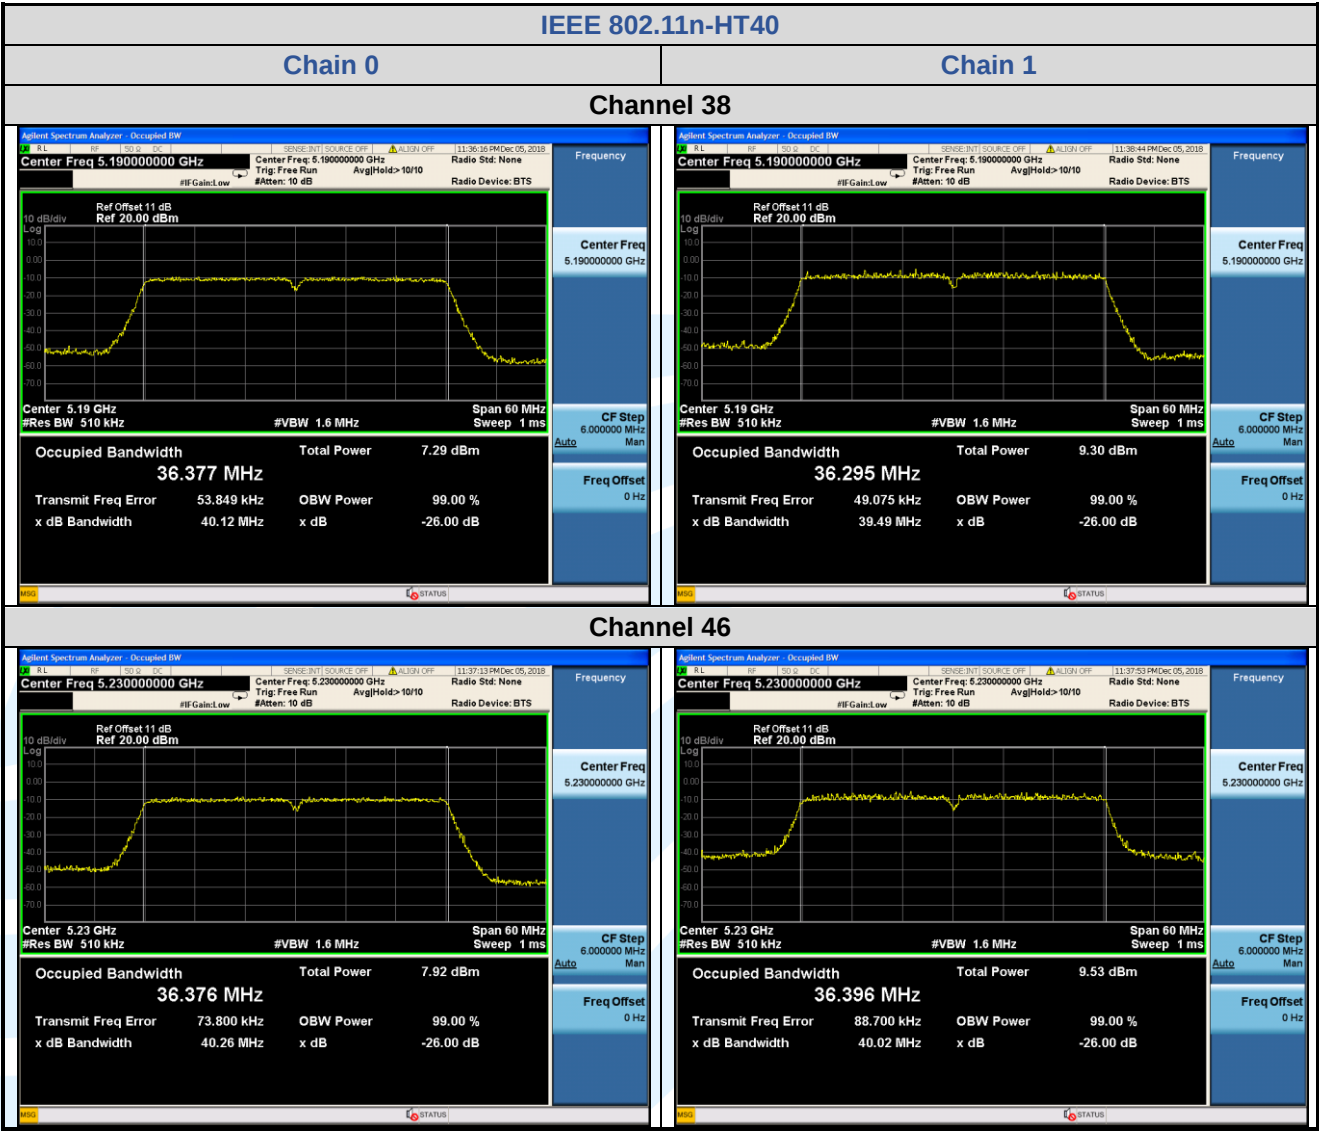

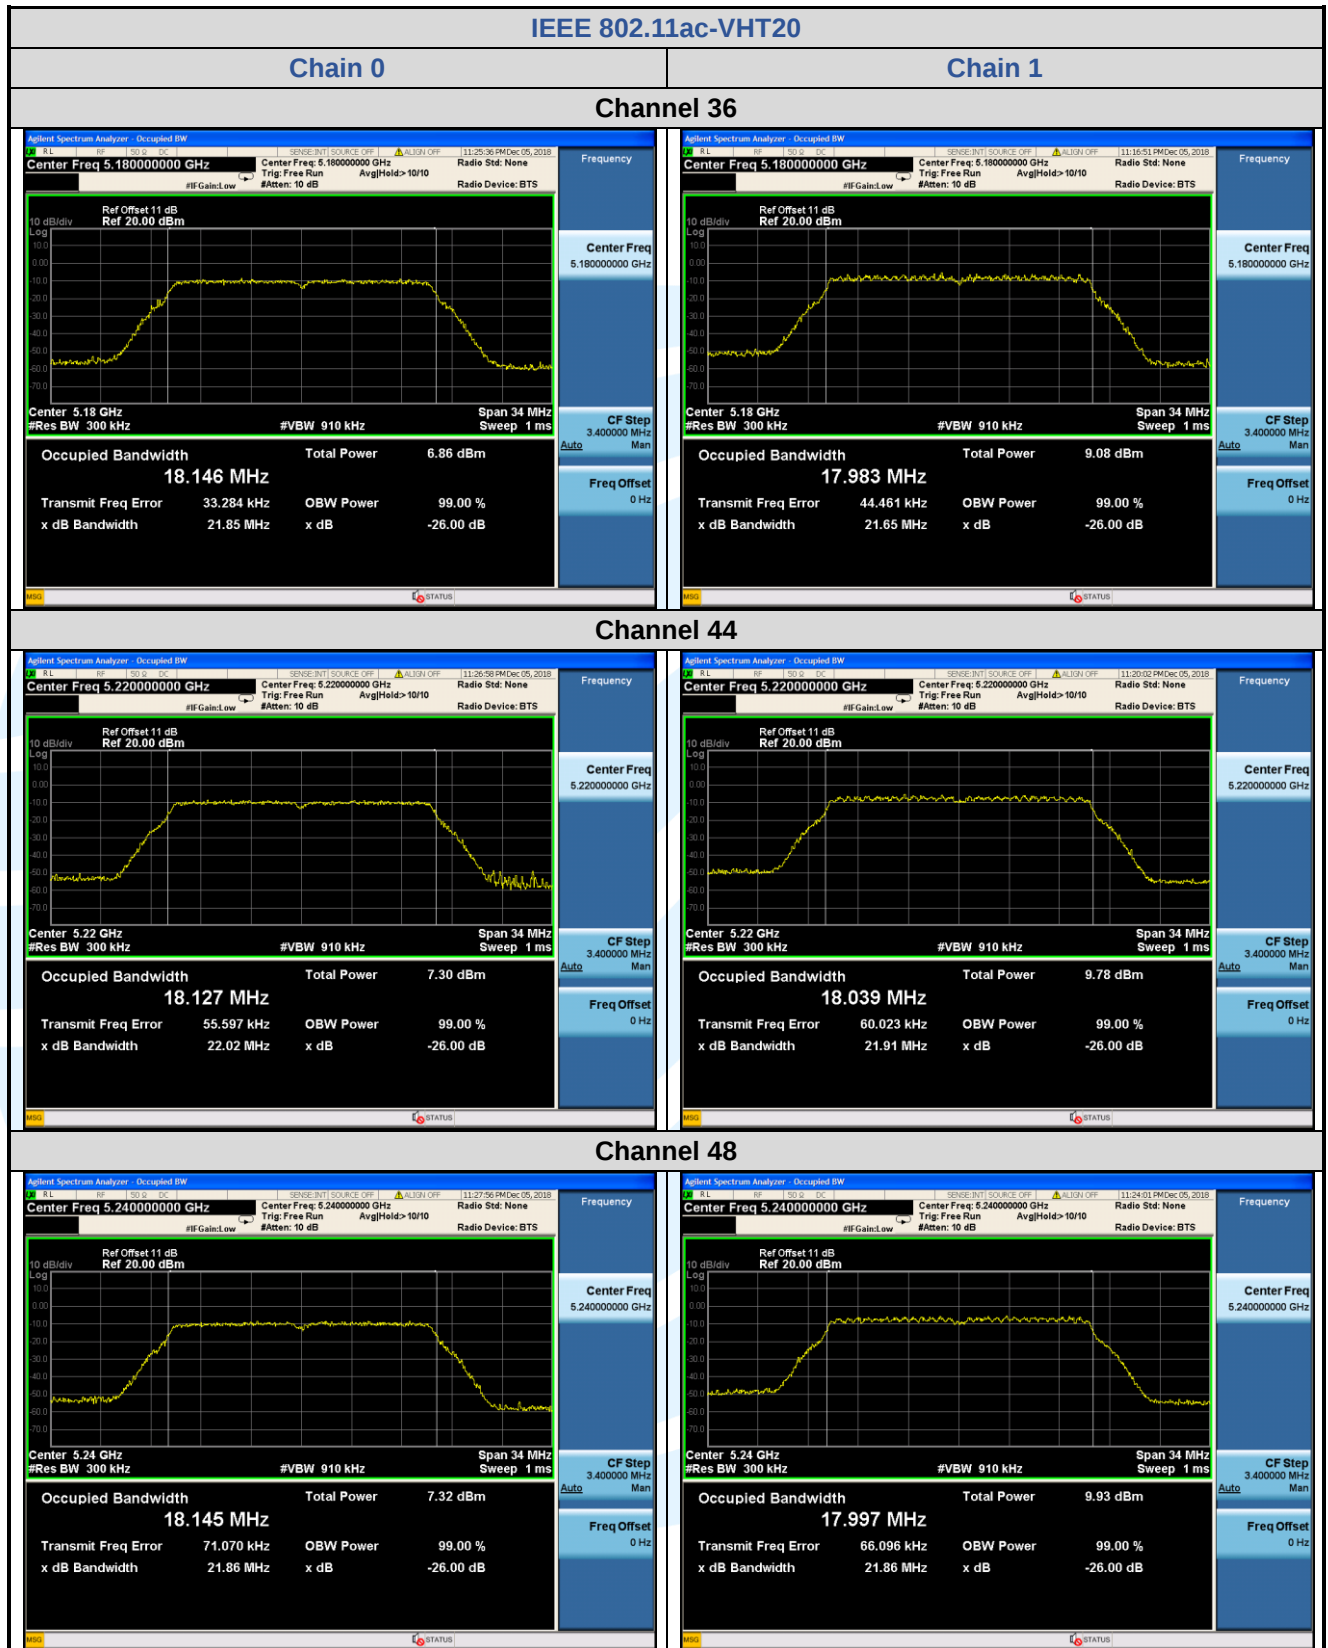

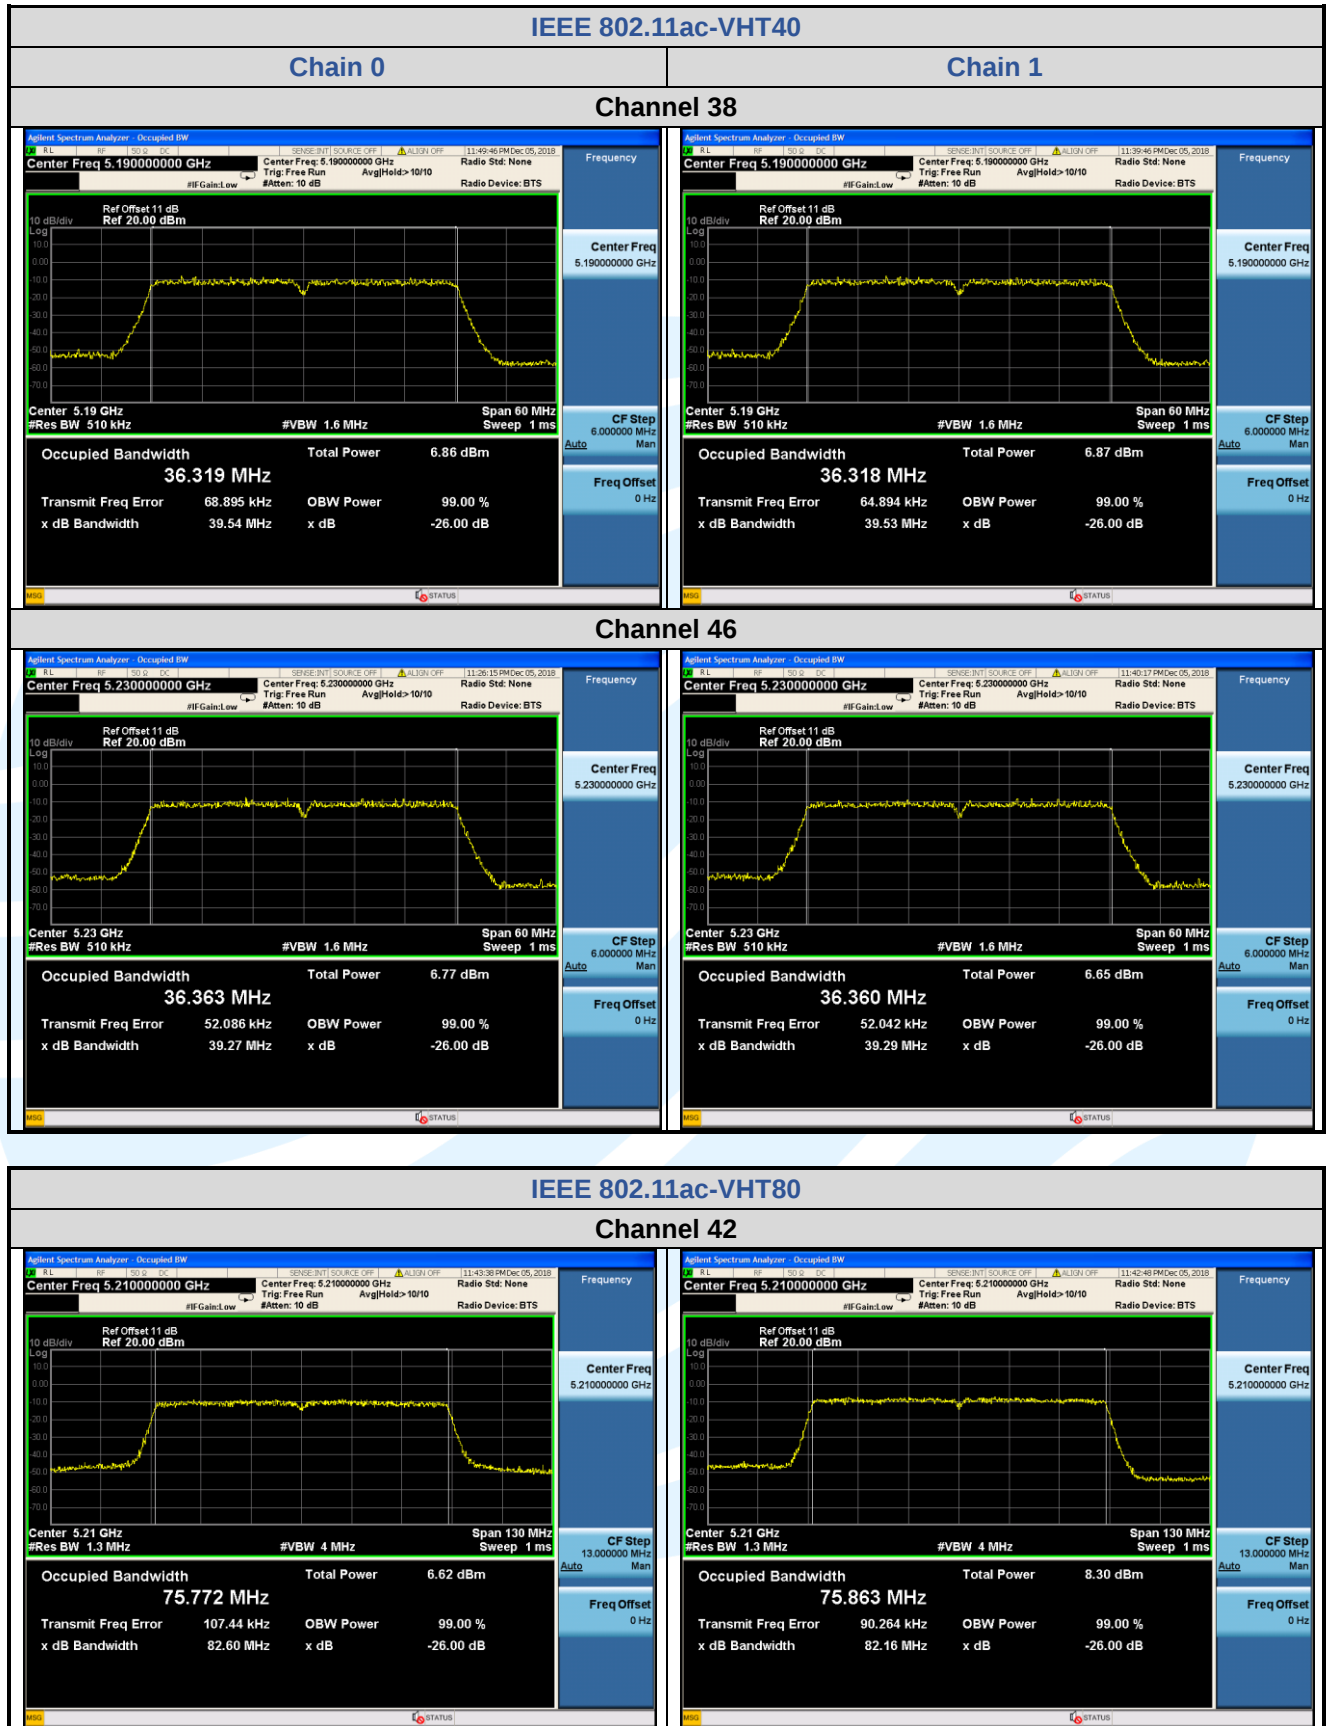

5.46 DB BANDWIDTH

Test Requirement: FCC 47 CFR Part 15 Subpart C Section 15.407 (e)

Test Method: KDB 789033 D02 v02r01Section C.2

Limit: Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

Test Procedure:

The output from the transmitter was connected to an attenuator and then to the input of the RF Spectrum Analyzer.

Spectrum analyzer according to the following Settings:

- Set RBW = 100 kHz.
- Set the video bandwidth (VBW) $\geq 3 * \text{RBW}$.
- Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Allow the trace to stabilize.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

Test Setup: Refer to section 4.5.3 for details.

Instruments Used: Refer to section 3 for details

Test Mode: Transmitter mode

Test Results: Pass

Test Data:

Mode	Channel/ Frequency (MHz)	6 dB Bandwidth (MHz)		99% Bandwidth (MHz)		6 dB Bandwidth Limit	Pass / Fail
		Chain 0	Chain 1	Chain 0	Chain 1		
IEEE 802.11a	149 (5745)	15.93	16.41	16.536	16.579	> 500 kHz	Pass
	157 (5785)	16.40	16.42	16.575	16.561	> 500 kHz	Pass
	165 (5825)	16.38	16.41	16.570	16.566	> 500 kHz	Pass
IEEE 802.11n- HT20	149 (5745)	17.62	17.64	17.760	17.747	> 500 kHz	Pass
	157 (5785)	17.62	17.65	17.763	17.759	> 500 kHz	Pass
	165 (5825)	17.62	17.64	17.777	17.734	> 500 kHz	Pass
IEEE 802.11n- HT40	151 (5755)	36.36	36.41	36.185	36.212	> 500 kHz	Pass
	159 (5795)	36.38	36.44	36.183	36.223	> 500 kHz	Pass
IEEE 802.11ac- VHT20	149 (5745)	17.61	17.58	17.755	17.737	> 500 kHz	Pass
	157 (5785)	17.63	17.66	17.782	17.733	> 500 kHz	Pass
	165 (5825)	17.62	17.66	17.752	17.745	> 500 kHz	Pass
IEEE 802.11ac- VHT40	151 (5755)	36.43	36.42	36.207	36.180	> 500 kHz	Pass
	159 (5795)	36.40	36.43	36.187	36.212	> 500 kHz	Pass
IEEE 802.11ac- VHT80	155 (5775)	75.86	76.37	75.545	75.598	> 500 kHz	Pass