





FR1 n77 / 80MHz / DFT-S OFDM / 256QAM

Lowest Band Edge / Full RB

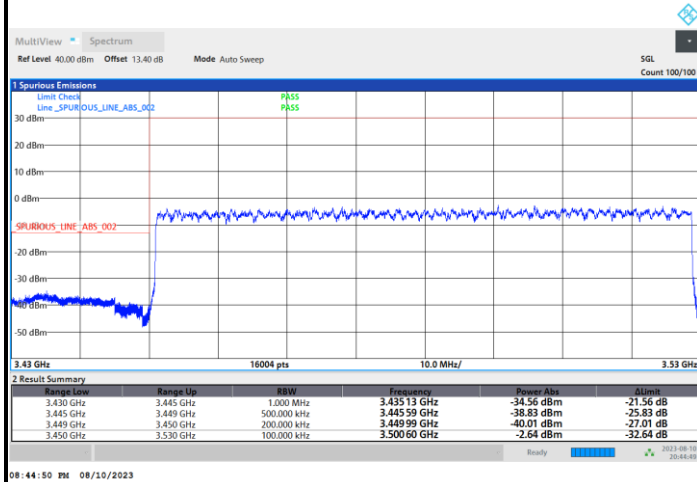


Highest Band Edge / Full RB

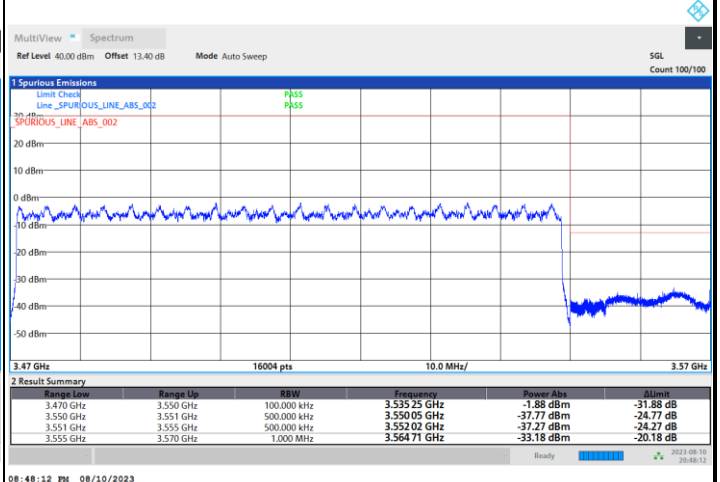






FR1 n77 / 80MHz / CP OFDM / QPSK / Full RB

Lowest Band Edge

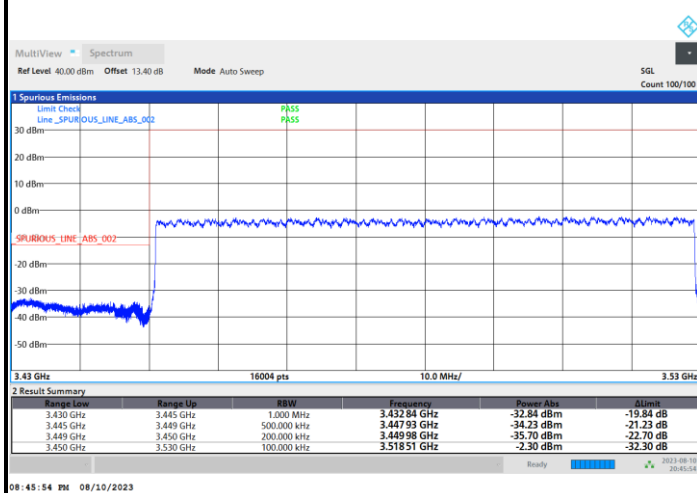

Highest Band Edge

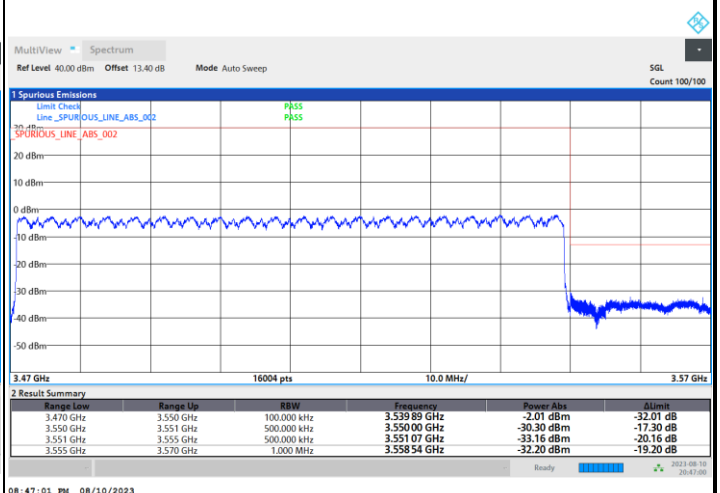


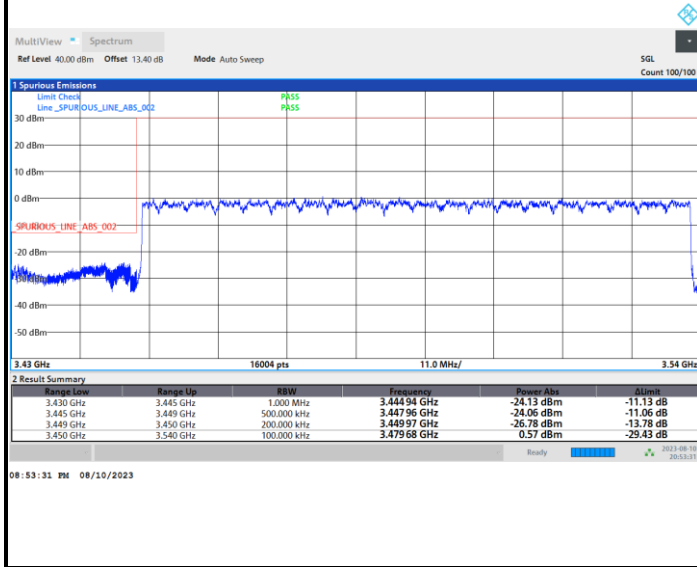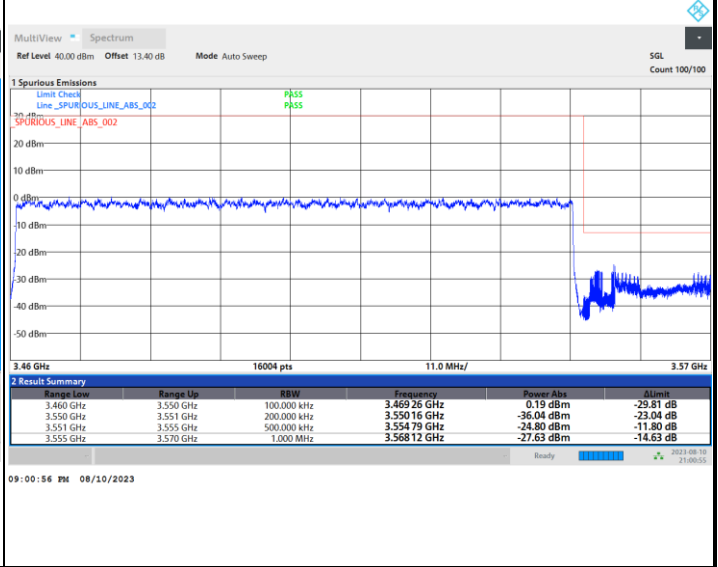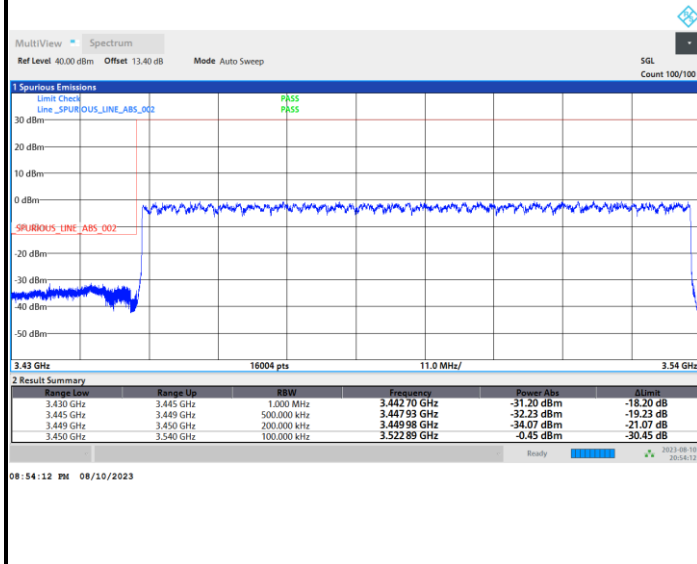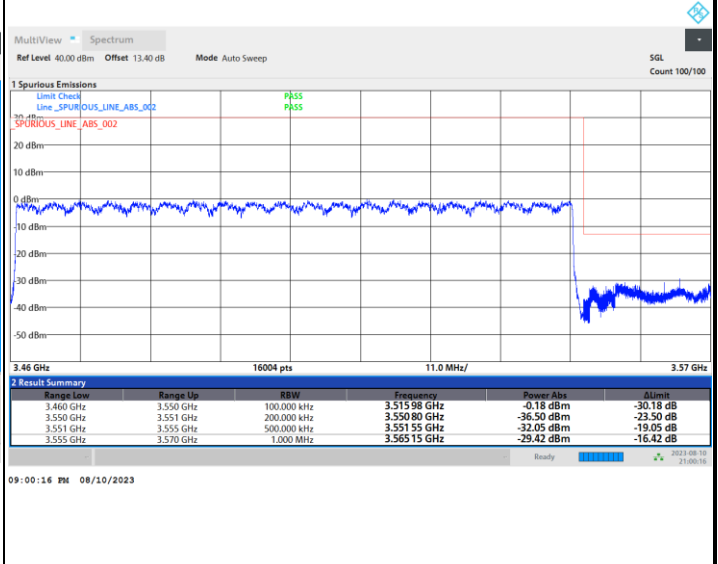**FR1 n77 / 90MHz / DFT-S OFDM / PI/2 BPSK****Lowest Band Edge / Full RB****Highest Band Edge / Full RB****FR1 n77 / 90MHz / DFT-S OFDM / QPSK****Lowest Band Edge / Full RB****Highest Band Edge / Full RB**




FR1 n77 / 90MHz / DFT-S OFDM / 16QAM

Lowest Band Edge / Full RB

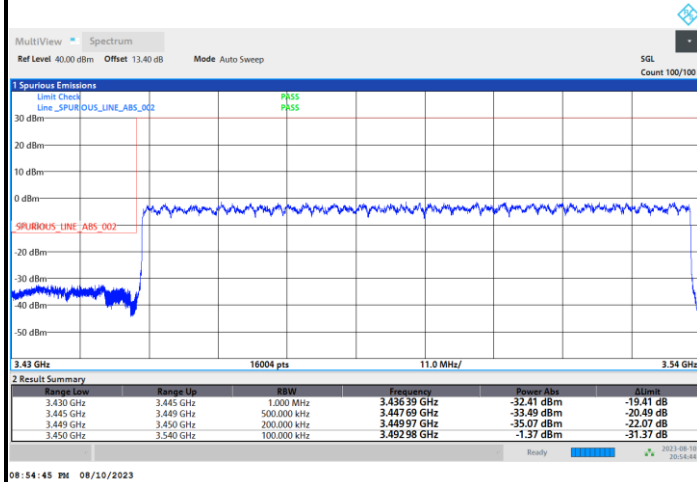


Highest Band Edge / Full RB

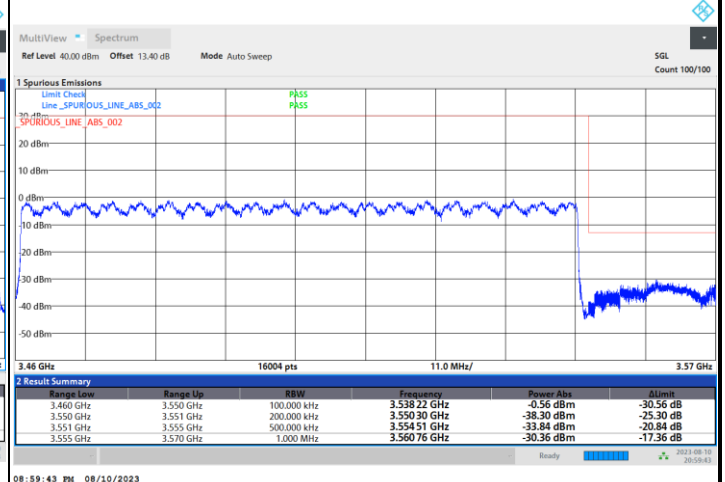


FR1 n77 / 90MHz / DFT-S OFDM / 64QAM

Lowest Band Edge / Full RB

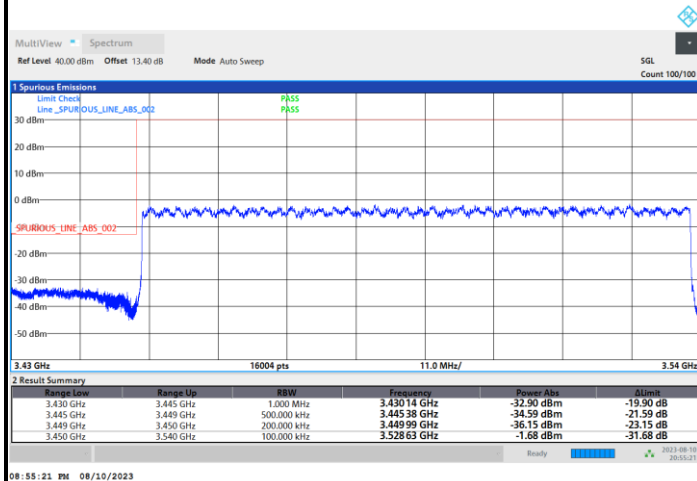


Highest Band Edge / Full RB

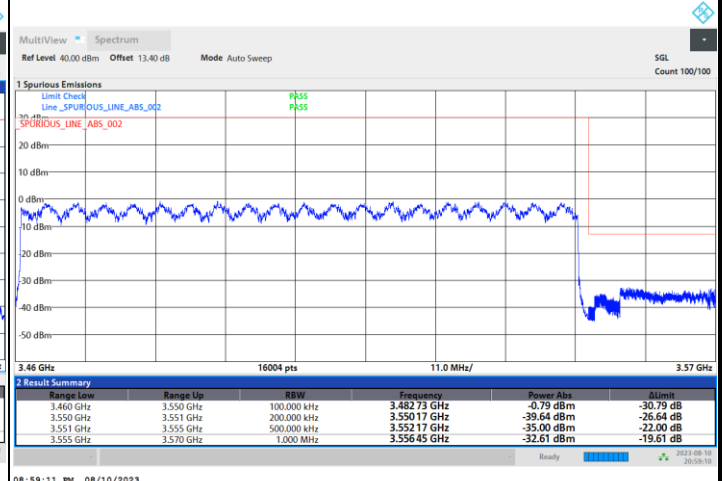




FR1 n77 / 90MHz / DFT-S OFDM / 256QAM

Lowest Band Edge / Full RB

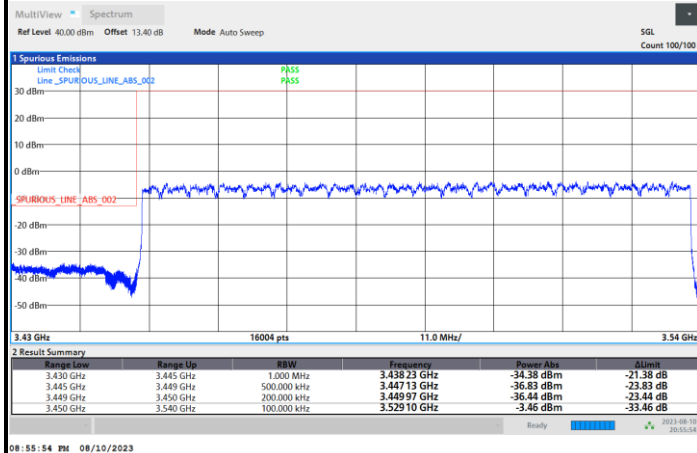


Highest Band Edge / Full RB

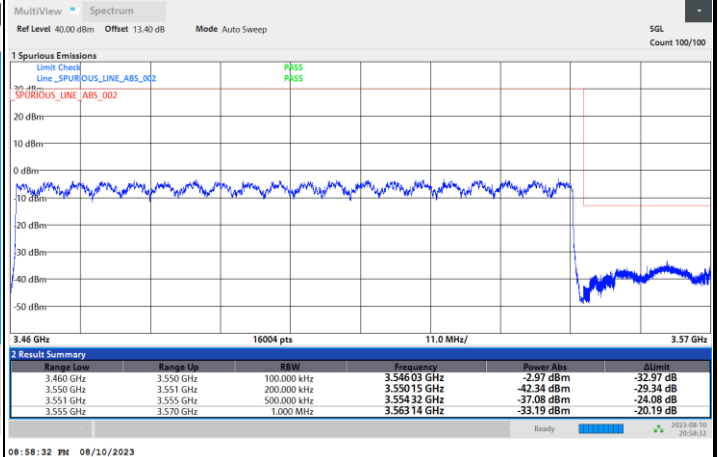






FR1 n77 / 90MHz / CP OFDM / QPSK / Full RB





Lowest Band Edge

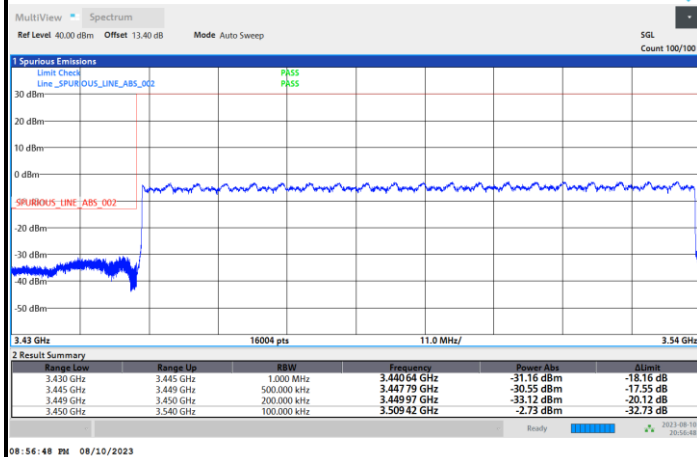

Highest Band Edge

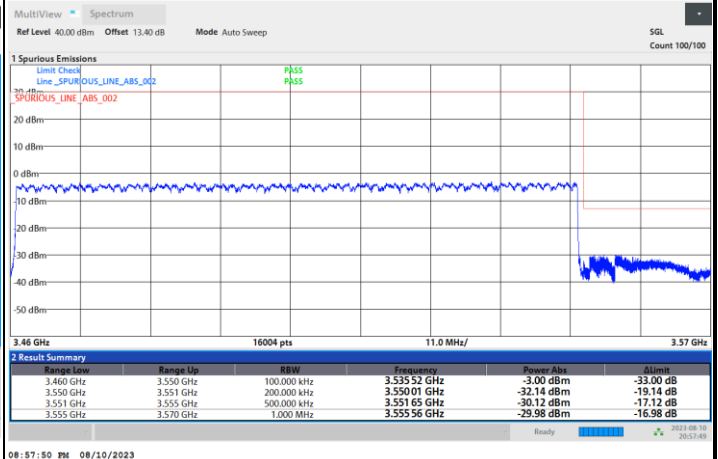

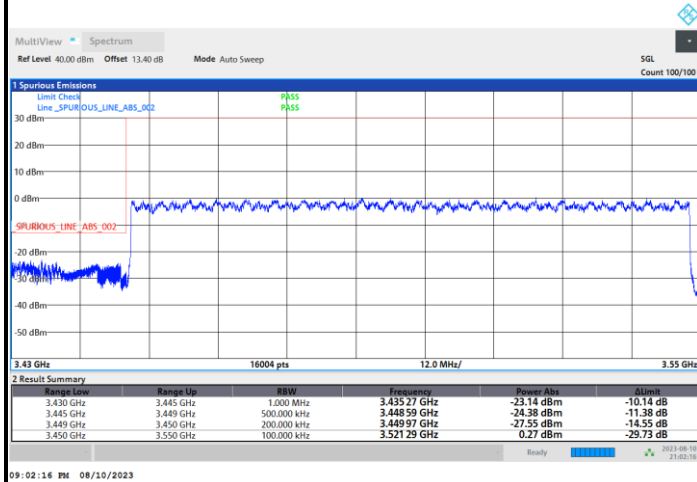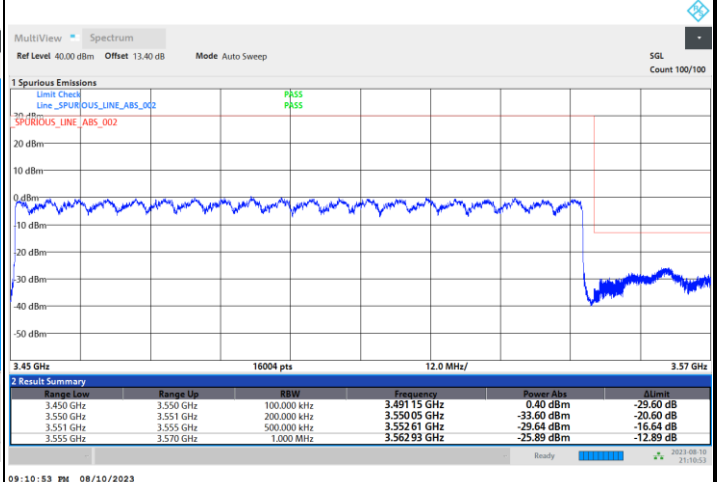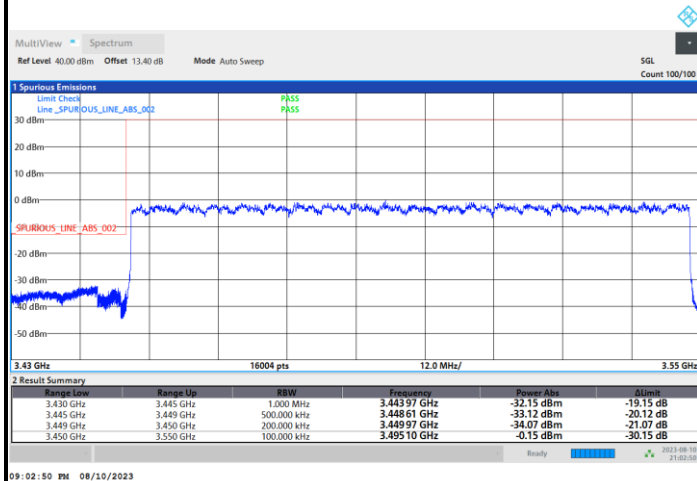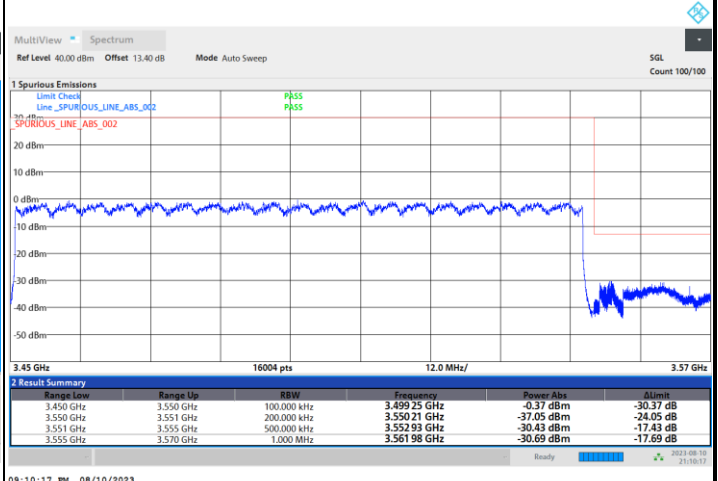
**FR1 n77 / 100MHz / DFT-S OFDM / PI/2 BPSK****Lowest Band Edge / Full RB****Highest Band Edge / Full RB****FR1 n77 / 100MHz / DFT-S OFDM / QPSK****Lowest Band Edge / Full RB****Highest Band Edge / Full RB**

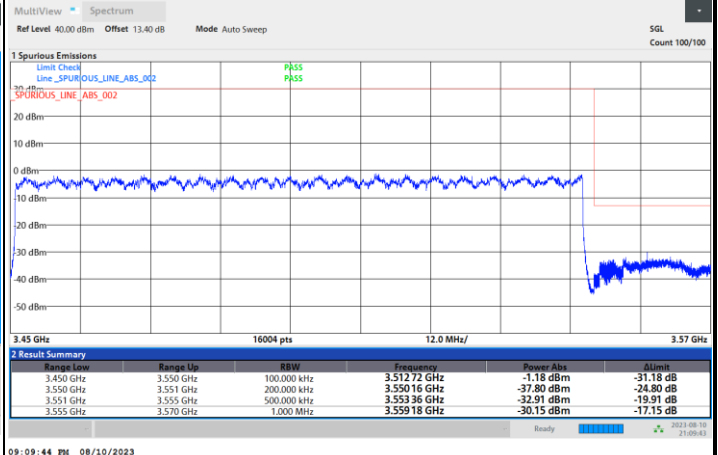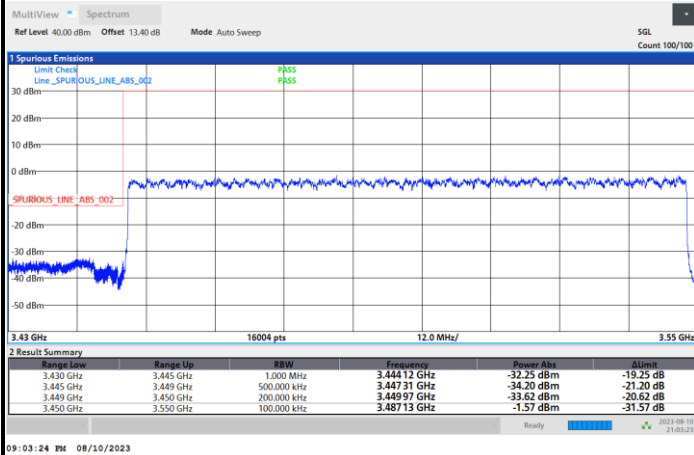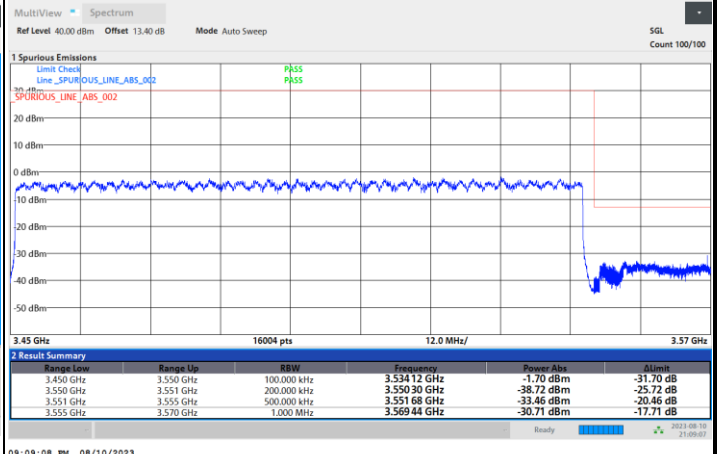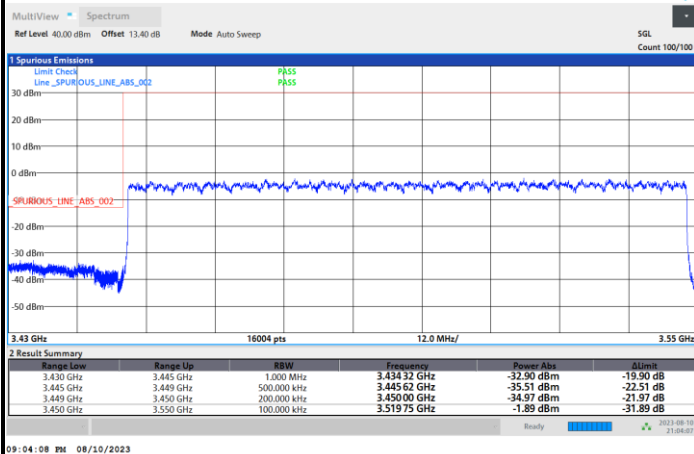**FR1 n77 / 100MHz / DFT-S OFDM / 16QAM****Lowest Band Edge / Full RB****Highest Band Edge / Full RB****FR1 n77 / 100MHz / DFT-S OFDM / 64QAM****Lowest Band Edge / Full RB****Highest Band Edge / Full RB**




FR1 n77 / 100MHz / DFT-S OFDM / 256QAM

Lowest Band Edge / Full RB

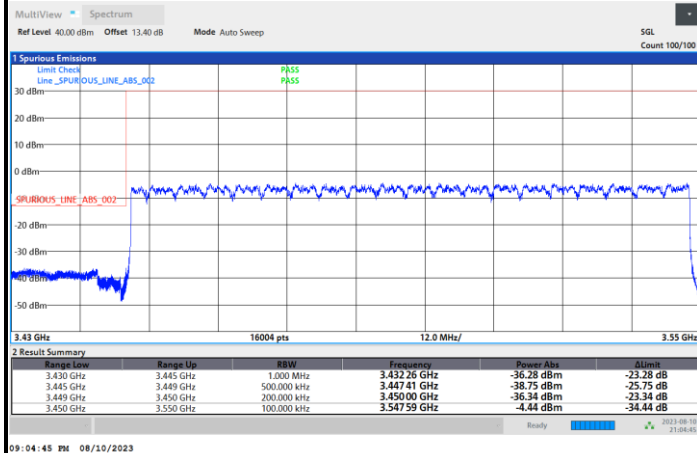


Highest Band Edge / Full RB

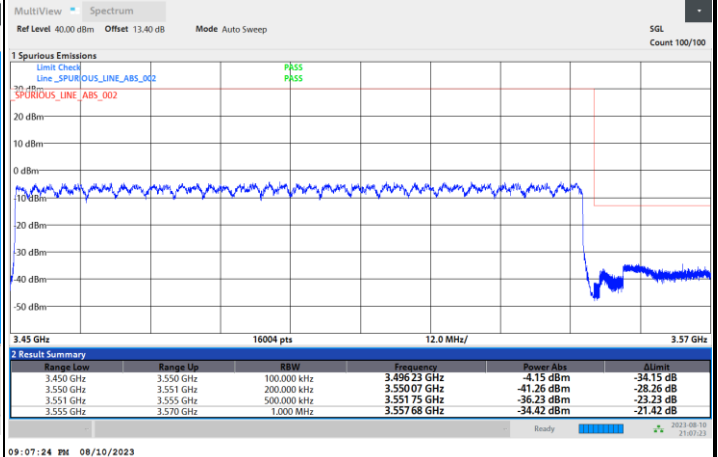


FR1 n77 / 100MHz / CP OFDM / QPSK / Full RB

Lowest Band Edge

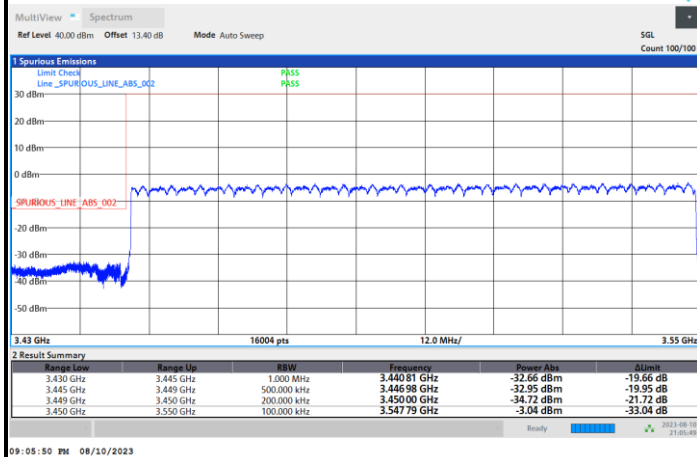

Highest Band Edge

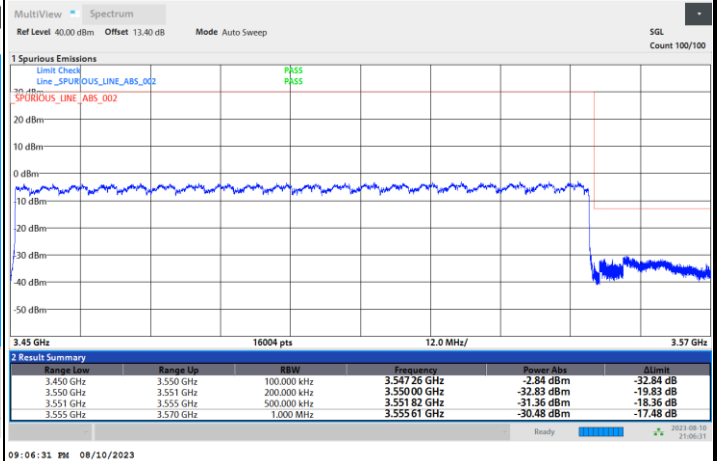





Conducted Spurious Emission

FR1 n77 / 10MHz / DFT-S OFDM / QPSK / 1RB1


Lowest Channel

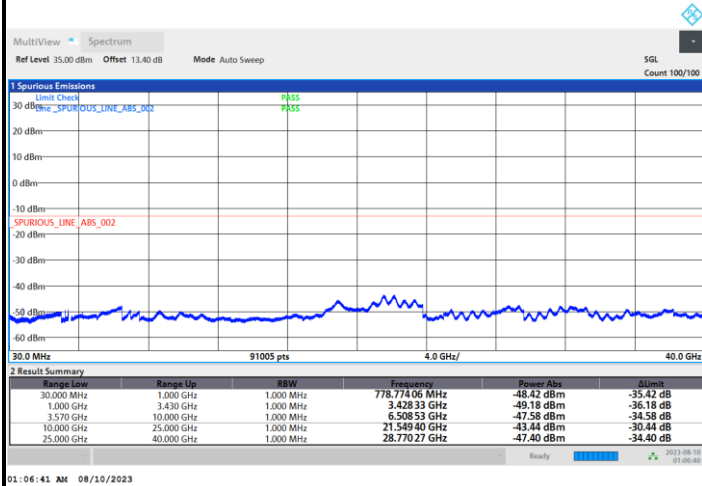

Middle Channel

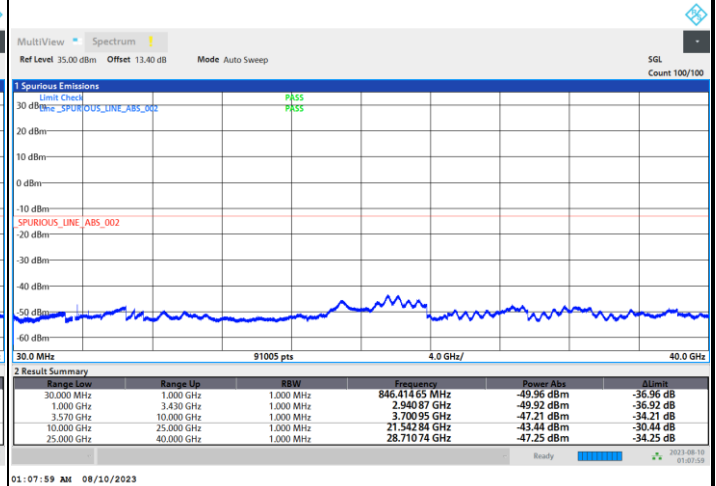

Highest Channel

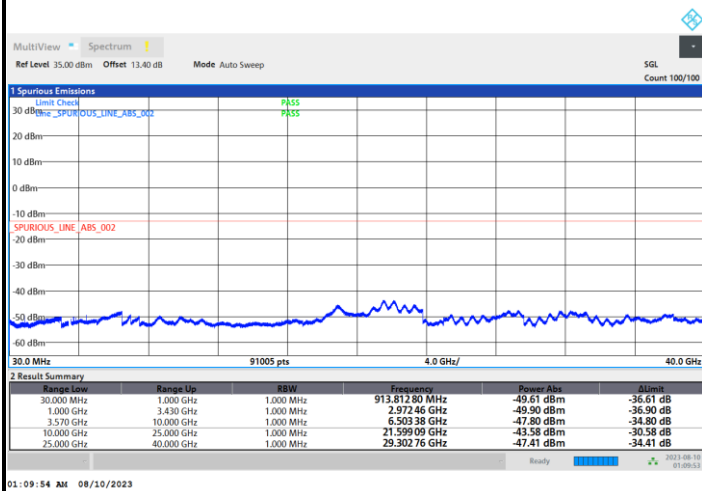

Frequency Stability

Test Conditions		FR1 n77 (BPSK) / Middle Channel	Limit
Temperature (°C)	Voltage (Volt)	BW 20MHz	Note 2.
		Deviation (ppm)	Result
50	Normal Voltage	0.0015	PASS
40	Normal Voltage	0.0017	
30	Normal Voltage	0.0032	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0028	
0	Normal Voltage	0.0042	
-10	Normal Voltage	0.0036	
-20	Normal Voltage	0.0041	
-30	Normal Voltage	0.0033	
20	Maximum Voltage	0.0025	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0033	

Note:

1. Normal Voltage = 3.3 V. ; Battery End Point (BEP) = 3.135 V. ; Maximum Voltage = 3.63 V.
2. The frequency fundamental emissions stay within the authorized frequency block.



Appendix B. Test Results of Radiated Test

MIMO <Ant. 0+1>

5G NR n77

SA NR n77 / 20MHz / PI/2 BPSK									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	6902	-47.50	-13	-34.50	-72.03	-55.70	1.84	12.19	H
	10353	-42.40	-13	-29.40	-72.28	-48.88	2.26	10.89	H
	13805	-38.44	-13	-25.44	-73.09	-46.21	2.63	12.56	H
	20708	-70.60	-13	-57.60	-77.45	-83.14	3.22	17.92	H
	24159	-68.09	-13	-55.09	-78.42	-80.65	3.78	18.50	H
	27610	-66.75	-13	-53.75	-79.17	-80.20	3.95	19.54	H
									H
	6902	-46.41	-13	-33.41	-72.37	-54.61	1.84	12.19	V
	10353	-43.39	-13	-30.39	-72.02	-49.87	2.26	10.89	V
	13805	-38.61	-13	-25.61	-73.17	-46.38	2.63	12.56	V
	20708	-70.64	-13	-57.64	-77.89	-83.18	3.22	17.92	V
	24159	-67.51	-13	-54.51	-78.53	-80.07	3.78	18.50	V
	27610	-66.67	-13	-53.67	-79.43	-80.12	3.95	19.54	V
									V
Middle	6982	-47.32	-13	-34.32	-71.82	-55.20	1.84	11.87	H
	10473	-42.02	-13	-29.02	-72.12	-48.43	2.25	10.82	H
	13965	-38.66	-13	-25.66	-72.87	-46.27	2.66	12.43	H
	20948	-70.50	-13	-57.50	-77.44	-82.93	3.24	17.82	H
	24439	-68.23	-13	-55.23	-78.67	-80.99	3.76	18.66	H
	27930	-66.65	-13	-53.65	-78.12	-80.21	3.97	19.67	H
									H
	6982	-45.88	-13	-32.88	-71.81	-53.76	1.84	11.87	V
	10473	-43.38	-13	-30.38	-72.14	-49.79	2.25	10.82	V
	13965	-38.78	-13	-25.78	-73.02	-46.39	2.66	12.43	V
	20948	-69.90	-13	-56.90	-77.21	-82.33	3.24	17.82	V
	24439	-67.59	-13	-54.59	-78.62	-80.35	3.76	18.66	V



	27930	-66.72	-13	-53.72	-78.59	-80.28	3.97	19.67	V
									V

Highest	7062	-47.87	-13	-34.87	-72.31	-55.52	1.84	11.65	H
	10593	-42.05	-13	-29.05	-72.38	-48.40	2.24	10.74	H
	14125	-38.58	-13	-25.58	-72.71	-46.10	2.66	12.33	H
	21188	-70.95	-13	-57.95	-78.28	-83.54	3.29	18.03	H
	24719	-68.55	-13	-55.55	-79.14	-81.24	3.73	18.57	H
	28250	-66.85	-13	-53.85	-78.4	-80.27	3.98	19.55	H
									H
	7062	-45.86	-13	-32.86	-71.74	-53.51	1.84	11.65	V
	10593	-43.68	-13	-30.68	-72.74	-50.03	2.24	10.74	V
	14125	-38.35	-13	-25.35	-72.61	-45.87	2.66	12.33	V
	21188	-70.71	-13	-57.71	-78.45	-83.30	3.29	18.03	V
	24719	-68.31	-13	-55.31	-79.39	-81.00	3.73	18.57	V
	28250	-66.03	-13	-53.03	-78	-79.45	3.98	19.55	V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



SA NR n77 / 100MHz / PI/2 BPSK									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	6903	-48.07	-13	-35.07	-72.6	-56.26	1.84	12.19	H
	10354	-41.77	-13	-28.77	-71.65	-48.25	2.26	10.89	H
	13805	-38.56	-13	-25.56	-73.21	-46.33	2.63	12.56	H
	20708	-70.78	-13	-57.78	-77.63	-83.32	3.22	17.92	H
	24159	-68.21	-13	-55.21	-78.54	-80.77	3.78	18.50	H
	27610	-66.93	-13	-53.93	-79.35	-80.38	3.95	19.54	H
									H
	6903	-45.91	-13	-32.91	-71.87	-54.10	1.84	12.19	V
	10354	-43.25	-13	-30.25	-71.88	-49.73	2.26	10.89	V
	13805	-38.27	-13	-25.27	-72.83	-46.04	2.63	12.56	V
	20708	-70.75	-13	-57.75	-78	-83.29	3.22	17.92	V
	24159	-67.08	-13	-54.08	-78.1	-79.64	3.78	18.50	V
	27610	-66.65	-13	-53.65	-79.41	-80.10	3.95	19.54	V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



MIMO <Ant. 0+2>

5G NR n77

SA NR n77 / 20MHz / PI/2 BPSK									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	6902	-47.98	-13	-34.98	-72.51	-56.18	1.84	12.19	H
	10353	-42.48	-13	-29.48	-72.36	-48.96	2.26	10.89	H
	13805	-40.19	-13	-27.19	-74.84	-47.96	2.63	12.56	H
	20708	-70.93	-13	-57.93	-77.78	-83.47	3.22	17.92	H
	24159	-68.28	-13	-55.28	-78.61	-80.84	3.78	18.50	H
	27610	-67.10	-13	-54.10	-79.52	-80.55	3.95	19.54	H
									H
	6902	-47.44	-13	-34.44	-73.4	-55.64	1.84	12.19	V
	10353	-44.10	-13	-31.10	-72.73	-50.58	2.26	10.89	V
	13805	-40.24	-13	-27.24	-74.8	-48.01	2.63	12.56	V
	20708	-70.54	-13	-57.54	-77.79	-83.08	3.22	17.92	V
	24159	-67.44	-13	-54.44	-78.46	-80.00	3.78	18.50	V
	27610	-66.29	-13	-53.29	-79.05	-79.74	3.95	19.54	V
									V
Middle	6982	-48.07	-13	-35.07	-72.57	-55.95	1.84	11.87	H
	10473	-42.64	-13	-29.64	-72.74	-49.05	2.25	10.82	H
	13965	-41.37	-13	-28.37	-75.58	-48.98	2.66	12.43	H
	20948	-70.57	-13	-57.57	-77.51	-83.00	3.24	17.82	H
	24439	-68.25	-13	-55.25	-78.69	-81.01	3.76	18.66	H
	27930	-66.99	-13	-53.99	-78.46	-80.55	3.97	19.67	H
									H
	6982	-46.77	-13	-33.77	-72.7	-54.65	1.84	11.87	V
	10473	-44.02	-13	-31.02	-72.78	-50.43	2.25	10.82	V
	13965	-41.38	-13	-28.38	-75.62	-48.99	2.66	12.43	V
	20948	-70.28	-13	-57.28	-77.59	-82.71	3.24	17.82	V
	24439	-67.51	-13	-54.51	-78.54	-80.27	3.76	18.66	V
	27930	-66.37	-13	-53.37	-78.24	-79.93	3.97	19.67	V
									V



Highest	7062	-48.22	-13	-35.22	-72.66	-55.87	1.84	11.65	H
	10593	-43.08	-13	-30.08	-73.41	-49.43	2.24	10.74	H
	14125	-40.30	-13	-27.30	-74.43	-47.82	2.66	12.33	H
	21188	-70.87	-13	-57.87	-78.2	-83.46	3.29	18.03	H
	24719	-68.39	-13	-55.39	-78.98	-81.08	3.73	18.57	H
	28250	-67.13	-13	-54.13	-78.68	-80.55	3.98	19.55	H
									H
	7062	-47.04	-13	-34.04	-72.92	-54.69	1.84	11.65	V
	10593	-44.56	-13	-31.56	-73.62	-50.91	2.24	10.74	V
	14125	-40.70	-13	-27.70	-74.96	-48.22	2.66	12.33	V
	21188	-70.45	-13	-57.45	-78.19	-83.04	3.29	18.03	V
	24719	-68.21	-13	-55.21	-79.29	-80.90	3.73	18.57	V
	28250	-66.36	-13	-53.36	-78.33	-79.78	3.98	19.55	V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



SA NR n77 / 100MHz / PI/2 BPSK									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	6903	-48.03	-13	-35.03	-72.56	-56.22	1.84	12.19	H
	10354	-42.67	-13	-29.67	-72.55	-49.15	2.26	10.89	H
	13805	-40.01	-13	-27.01	-74.66	-47.78	2.63	12.56	H
	20708	-70.71	-13	-57.71	-77.56	-83.25	3.22	17.92	H
	24159	-67.75	-13	-54.75	-78.08	-80.31	3.78	18.50	H
	27610	-66.65	-13	-53.65	-79.07	-80.10	3.95	19.54	H
									H
	6903	-46.37	-13	-33.37	-72.33	-54.56	1.84	12.19	V
	10354	-44.17	-13	-31.17	-72.8	-50.65	2.26	10.89	V
	13805	-40.09	-13	-27.09	-74.65	-47.86	2.63	12.56	V
	20708	-70.70	-13	-57.70	-77.95	-83.24	3.22	17.92	V
	24159	-67.52	-13	-54.52	-78.54	-80.08	3.78	18.50	V
	27610	-66.50	-13	-53.50	-79.26	-79.95	3.95	19.54	V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



MIMO <Ant. 1+3>

5G NR n77

SA NR n77 / 20MHz / PI/2 BPSK									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	6902	-48.27	-13	-35.27	-72.8	-56.47	1.84	12.19	H
	10353	-42.33	-13	-29.33	-72.21	-48.81	2.26	10.89	H
	13805	-38.37	-13	-25.37	-73.02	-46.14	2.63	12.56	H
	20708	-71.10	-13	-58.10	-77.95	-83.64	3.22	17.92	H
	24159	-67.61	-13	-54.61	-77.94	-80.17	3.78	18.50	H
	27610	-66.52	-13	-53.52	-78.94	-79.97	3.95	19.54	H
									H
	6902	-46.74	-13	-33.74	-72.7	-54.94	1.84	12.19	V
	10353	-43.54	-13	-30.54	-72.17	-50.02	2.26	10.89	V
	13805	-38.52	-13	-25.52	-73.08	-46.29	2.63	12.56	V
	20708	-70.56	-13	-57.56	-77.81	-83.10	3.22	17.92	V
	24159	-67.68	-13	-54.68	-78.7	-80.24	3.78	18.50	V
	27610	-66.56	-13	-53.56	-79.32	-80.01	3.95	19.54	V
									V
Middle	6982	-47.53	-13	-34.53	-72.03	-55.41	1.84	11.87	H
	10473	-42.42	-13	-29.42	-72.52	-48.83	2.25	10.82	H
	13965	-38.61	-13	-25.61	-72.82	-46.22	2.66	12.43	H
	20948	-70.56	-13	-57.56	-77.5	-82.99	3.24	17.82	H
	24439	-68.06	-13	-55.06	-78.5	-80.82	3.76	18.66	H
	27930	-67.11	-13	-54.11	-78.58	-80.67	3.97	19.67	H
									H
	6982	-46.04	-13	-33.04	-71.97	-53.92	1.84	11.87	V
	10473	-43.49	-13	-30.49	-72.25	-49.90	2.25	10.82	V
	13965	-38.62	-13	-25.62	-72.86	-46.23	2.66	12.43	V
	20948	-70.01	-13	-57.01	-77.32	-82.44	3.24	17.82	V
	24439	-67.82	-13	-54.82	-78.85	-80.58	3.76	18.66	V
	27930	-66.31	-13	-53.31	-78.18	-79.87	3.97	19.67	V
									V



Highest	7062	-48.06	-13	-35.06	-72.51	-55.71	1.84	11.65	H
	10593	-42.41	-13	-29.41	-72.74	-48.76	2.24	10.74	H
	14125	-39.03	-13	-26.03	-73.16	-46.55	2.66	12.33	H
	21188	-70.82	-13	-57.82	-78.15	-83.41	3.29	18.03	H
	24719	-68.72	-13	-55.72	-79.31	-81.41	3.73	18.57	H
	28250	-66.78	-13	-53.78	-78.33	-80.20	3.98	19.55	H
									H
	7062	-46.34	-13	-33.34	-72.24	-53.99	1.84	11.65	V
	10593	-43.69	-13	-30.69	-72.75	-50.04	2.24	10.74	V
	14125	-38.88	-13	-25.88	-73.14	-46.40	2.66	12.33	V
	21188	-70.57	-13	-57.57	-78.31	-83.16	3.29	18.03	V
	24719	-68.09	-13	-55.09	-79.17	-80.78	3.73	18.57	V
	28250	-66.51	-13	-53.51	-78.48	-79.93	3.98	19.55	V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



SA NR n77 / 100MHz / PI/2 BPSK									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	6903	-47.81	-13	-34.81	-72.34	-56.00	1.84	12.19	H
	10354	-42.25	-13	-29.25	-72.13	-48.73	2.26	10.89	H
	13805	-38.42	-13	-25.42	-73.07	-46.19	2.63	12.56	H
	20708	-71.18	-13	-58.18	-78.03	-83.72	3.22	17.92	H
	24159	-67.94	-13	-54.94	-78.27	-80.50	3.78	18.50	H
	27610	-66.73	-13	-53.73	-79.15	-80.18	3.95	19.54	H
									H
	6903	-46.10	-13	-33.10	-72.06	-54.29	1.84	12.19	V
	10354	-43.46	-13	-30.46	-72.09	-49.94	2.26	10.89	V
	13805	-38.71	-13	-25.71	-73.27	-46.48	2.63	12.56	V
	20708	-70.28	-13	-57.28	-77.53	-82.82	3.22	17.92	V
	24159	-67.16	-13	-54.16	-78.18	-79.72	3.78	18.50	V
	27610	-66.56	-13	-53.56	-79.32	-80.01	3.95	19.54	V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



MIMO <Ant. 2+3>

5G NR n77

SA NR n77 / 20MHz / PI/2 BPSK									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	6902	-47.74	-13	-34.74	-72.27	-55.94	1.84	12.19	H
	10353	-41.30	-13	-28.30	-71.18	-47.78	2.26	10.89	H
	13805	-38.29	-13	-25.29	-72.94	-46.06	2.63	12.56	H
	20708	-70.94	-13	-57.94	-77.79	-83.48	3.22	17.92	H
	24159	-67.92	-13	-54.92	-78.25	-80.48	3.78	18.50	H
	27610	-66.80	-13	-53.80	-79.22	-80.25	3.95	19.54	H
									H
	6902	-46.20	-13	-33.20	-72.16	-54.40	1.84	12.19	V
	10353	-43.40	-13	-30.40	-72.03	-49.88	2.26	10.89	V
	13805	-38.44	-13	-25.44	-73	-46.21	2.63	12.56	V
	20708	-70.48	-13	-57.48	-77.73	-83.02	3.22	17.92	V
	24159	-67.50	-13	-54.50	-78.52	-80.06	3.78	18.50	V
	27610	-66.30	-13	-53.30	-79.06	-79.75	3.95	19.54	V
									V
Middle	6982	-39.50	-13	-26.50	-71.88	-47.38	1.84	11.87	H
	10473	-41.66	-13	-28.66	-71.76	-48.07	2.25	10.82	H
	13965	-39.07	-13	-26.07	-73.28	-46.68	2.66	12.43	H
	20948	-70.76	-13	-57.76	-77.7	-83.19	3.24	17.82	H
	24439	-68.45	-13	-55.45	-78.89	-81.21	3.76	18.66	H
	27930	-66.74	-13	-53.74	-78.21	-80.30	3.97	19.67	H
									H
	6982	-45.71	-13	-32.71	-71.64	-53.59	1.84	11.87	V
	10473	-43.22	-13	-30.22	-71.98	-49.63	2.25	10.82	V
	13965	-38.99	-13	-25.99	-73.23	-46.60	2.66	12.43	V
	20948	-70.24	-13	-57.24	-77.55	-82.67	3.24	17.82	V
	24439	-67.71	-13	-54.71	-78.74	-80.47	3.76	18.66	V
	27930	-66.43	-13	-53.43	-78.3	-79.99	3.97	19.67	V
									V



Highest	7062	-47.82	-13	-34.82	-72.26	-55.47	1.84	11.65	H
	10593	-42.17	-13	-29.17	-72.5	-48.52	2.24	10.74	H
	14125	-38.54	-13	-25.54	-72.67	-46.06	2.66	12.33	H
	21188	-70.77	-13	-57.77	-78.1	-83.36	3.29	18.03	H
	24719	-68.11	-13	-55.11	-78.7	-80.80	3.73	18.57	H
	28250	-66.95	-13	-53.95	-78.5	-80.37	3.98	19.55	H
									H
	7062	-46.09	-13	-33.09	-71.97	-53.74	1.84	11.65	V
	10593	-43.55	-13	-30.55	-72.61	-49.90	2.24	10.74	V
	14125	-38.31	-13	-25.31	-72.57	-45.83	2.66	12.33	V
	21188	-70.67	-13	-57.67	-78.41	-83.26	3.29	18.03	V
	24719	-68.13	-13	-55.13	-79.21	-80.82	3.73	18.57	V
	28250	-66.42	-13	-53.42	-78.39	-79.84	3.98	19.55	V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



SA NR n77 / 100MHz / PI/2 BPSK									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	6903	-47.49	-13	-34.49	-72.02	-55.68	1.84	12.19	H
	10354	-41.33	-13	-28.33	-71.21	-47.81	2.26	10.89	H
	13805	-38.13	-13	-25.13	-72.78	-45.90	2.63	12.56	H
	20708	-71.09	-13	-58.09	-77.94	-83.63	3.22	17.92	H
	24159	-68.09	-13	-55.09	-78.42	-80.65	3.78	18.50	H
	27610	-67.05	-13	-54.05	-79.47	-80.50	3.95	19.54	H
									H
	6903	-45.97	-13	-32.97	-71.93	-54.16	1.84	12.19	V
	10354	-42.93	-13	-29.93	-71.56	-49.41	2.26	10.89	V
	13805	-38.14	-13	-25.14	-72.7	-45.91	2.63	12.56	V
	20708	-70.46	-13	-57.46	-77.71	-83.00	3.22	17.92	V
	24159	-67.40	-13	-54.40	-78.42	-79.96	3.78	18.50	V
	27610	-66.32	-13	-53.32	-79.08	-79.77	3.95	19.54	V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.